TRIPLE-SEARCH: DIFFERENTIABLE JOINT-SEARCH OF NETWORKS, PRECISION, AND ACCELERATORS

Anonymous authors
Paper under double-blind review

ABSTRACT

The record-breaking performance and prohibitive complexity of deep neural networks (DNNs) have ignited a substantial need for customized DNN accelerators which have the potential to boost DNN acceleration efficiency by orders-of-magnitude. While it has been recognized that maximizing DNNs' acceleration efficiency requires a joint design/search for three different yet highly coupled aspects, including the networks, adopted precision, and their accelerators, the challenges associated with such a joint search have not yet been fully discussed and addressed. First, to jointly search for a network and its precision via differentiable search, there exists a dilemma of whether to explode the memory consumption or achieve sub-optimal designs. Second, a generic and differentiable joint search of the networks and their accelerators is non-trivial due to (1) the discrete nature of the accelerator space and (2) the difficulty of obtaining operation-wise hardware cost penalties because some accelerator parameters are determined by the whole network. To this end, we propose a Triple-Search (TRIPS) framework to address the aforementioned challenges towards jointly searching for the network structure, precision, and accelerator in a differentiable manner, to efficiently and effectively explore the huge joint search space. Our TRIPS addresses the first challenge above via a heterogeneous sampling strategy to achieve unbiased search with constant memory consumption, and tackles the latter one using a novel co-search pipeline that integrates a generic differentiable accelerator search engine. Extensive experiments and ablation studies validate that both TRIPS generated networks and accelerators consistently outperform state-of-the-art (SOTA) designs (including co-search/exploration techniques, hardware-aware NAS methods, and DNN accelerators), in terms of search time, task accuracy, and accelerator efficiency. All codes will be released upon acceptance.

1 INTRODUCTION

The powerful performance and prohibitive complexity of deep neural networks (DNNs) have fueled a tremendous demand for efficient DNN accelerators which could boost DNN acceleration efficiency by orders-of-magnitude (Chen et al., 2016). In response, extensive research efforts have been devoted to developing DNN accelerators. Early works decouple the design of efficient DNN algorithms and their accelerators. On the algorithms level, pruning, quantization, or neural architecture search (NAS) are adopted to trim down the model complexity; On the hardware level, various FPGA-/ASIC-based accelerators have been developed to customize the *micro-architectures* (e.g., processing elements dimension, memory sizes, and network-on-chip design) and algorithm-to-hardware *mapping methods* (e.g., loop tiling strategies and loop orders) in order to optimize the acceleration efficiency fore given a DNN. Later, hardware-aware NAS (HA-NAS) has been developed to further improve DNNs' acceleration efficiency for different applications (Tan et al., 2019).

More recently, it has been recognized that (1) optimal DNN accelerators require a joint consideration/search for all the following different yet coupled aspects, including DNNs' network structure, the adopted precision, and their accelerators' micro-architecture and mapping methods, and (2) merely exploring a subset of these aspects will lead to sub-optimal designs in terms of hardware efficiency or task accuracy. For example, the optimal accelerators for networks with different structures (e.g., width, depth, and kernel size) can be very different; while the optimal networks and their bitwidths

for different accelerators can differ a lot (Wu et al., 2019). However, the direction of jointly designing or searching for all the three aspects has only been slightly touched on previously. For example, (Chen et al., 2018; Gong et al., 2019; Wang et al., 2020) proposed to jointly search for the structure and precision of DNNs for a fixed target hardware; (Abdelfattah et al., 2020; Yang et al., 2020; Jiang et al., 2020a;b) made the first attempt to jointly search for the networks and their accelerators, yet either their network or accelerator choices are limited due to the prohibitive time cost required by their adopted reinforcement learning (RL) based methods; and EDD (Li et al., 2020) contributed a pioneering effort towards this direction by formulating a differentiable joint search framework, which however only consider one single accelerator parameter (i.e., parallel factor) and more importantly, has not yet fully solved the challenges of such joint search.

Plethora of challenges exist to achieve an effective generic joint search for the aforementioned three aspects. First, Challenge 1: to jointly search for a network and its precision via differentiable search, there exists a dilemma whether to activate all the paths during search. On one hand, the required memory consumption can easily explode and thus constrain the search's scalability to more complex tasks if all paths are activated; on the other hand, partially activating a subset of the paths can lead to a sequential training of different precision on the same weights, which might result in inaccurate accuracy ranking among different precision as discussed in (Jin et al., 2020). Second, Challenge 2: the accelerators' parameters are not differentiable, and it is non-trivial to derive the operation-wise hardware-cost penalty in order to perform differentiable search (in considering search efficiency). This is because the optimal accelerator is often determined by the whole network instead of one specific operation/layer due to the fact that some accelerator parameters (e.g., the loop order) need to be optimized for the whole network.

In this paper, we aim to address the aforementioned challenges towards scalable generic joint search for the network, precision, and accelerator. Specifically, we make the following contributions:

- We propose a Triple-Search (TRIPS) framework to jointly search for the network, precision, and accelerator in a differentiable manner to efficiently explore the huge joint search space which cannot be afforded by previous RL-based methods due to their required prohibitive search cost. TRIPS identifies and tackles the aforementioned challenges towards scalable generic joint search of the three for maximizing both the accuracy and acceleration efficiency.
- We develop a *heterogeneous* sampling strategy for simultaneous updating the weights and network structures to (1) avoid the need to sequentially train different precision and (2) achieve unbiased search with constant memory consumption, i.e., solve the above Challenge 1. In addition, we develop a novel co-search pipeline that integrates a differentiable hardware search engine to address the above Challenge 2.
- Extensive experiments and ablation studies validate the effectiveness of our proposed TRIPS framework in terms of the resulting search time, task accuracy, and accelerator efficiency, when benchmarked over state-of-the-art (SOTA) co-search/exploration techniques, HA-NAS methods, and DNN accelerators. Furthermore, we visualize the searched accelerators by TRIPS to provide insights towards efficient DNN accelerator design in Appendix.

2 Related works

Hardware-aware NAS. Hardware-aware NAS has been proposed to automate the design of efficient DNNs. Early works (Tan et al., 2019; Howard et al., 2019; Tan & Le, 2019) utilize RL-based NAS that requires a massive search time/cost, while recent works (Wu et al., 2019; Wan et al., 2020; Cai et al., 2018; Stamoulis et al., 2019) explore the design space in a differentiable way (Liu et al., 2018) with much improved searching efficiency. In addition, NAS has been adopted to search for quantization strategies (Wang et al., 2019; Wu et al., 2018; Cai & Vasconcelos, 2020; Elthakeb et al., 2020) for trimming down the complexity of a given DNN. However, these works leave unexplored the hardware design space, which is a crucial enabler for DNN's acceleration efficiency, thus can leading to sub-optimal solutions.

DNN accelerators. Motivated by customized accelerators' large potential gains, SOTA accelerators (Du et al., 2015; Chen et al., 2017) innovate micro-architectures and algorithm-to-hardware mapping methods to optimize the acceleration efficiency, given a DNN and the hardware specifications. However, it is non-trivial to design an optimal accelerator as it requires cross-disciplinary

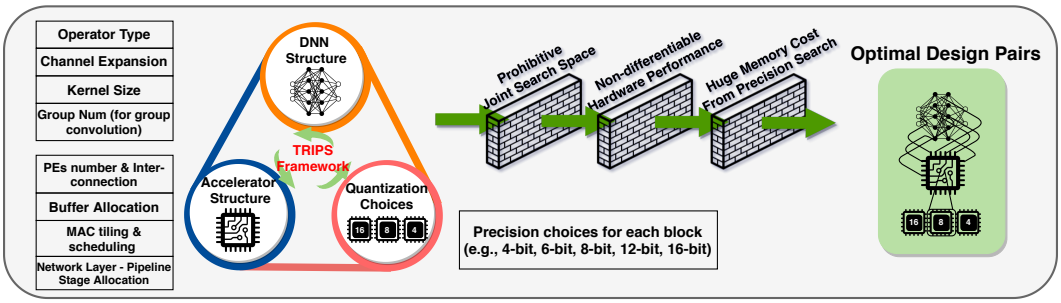

Figure 1: Illustrating our TRIPS framework: the large joint space and tackled challenges.

knowledge in algorithm, micro-architecture, and circuit design. SOTA accelerator design relies on either experts' manual design, which is very time consuming or design flow (Chen et al., 2005; 2009; Rupnow et al., 2011) and DNN accelerator design automation (Wang et al., 2016; Zhang et al., 2018a; Guan et al., 2017; Venkatesan et al., 2019; Wang et al., 2018). As they merely explore the accelerator design space, they can result in sub-optimal solutions as compared to SOTA co-search/exploration methods and our TRIPS framework.

Co-exploration/search techniques. Pioneering efforts have been made towards jointly searching of DNNs and their accelerators to some extent. For joint searching of DNNs and their precision, (Chen et al., 2018; Gong et al., 2019; Wang et al., 2020) adopt either differentiable or evolutionary algorithms yet without exploring their hardware accelerators. For joint searching of DNNs and their accelerators, (Abdelfattah et al., 2020; Yang et al., 2020; Jiang et al., 2020a;b) conduct RL-based search for the networks and some accelerator parameters/templates, where they strictly constrain the search space of the network or accelerator to achieve a practical RL search time, limiting their scalability and achievable efficiency. EDD (Li et al., 2020) extends differentiable NAS to search for layer-wise precision and the accelerators' parallel factor, which is most relevant to our TRIPS. EDD has not yet fully solved the joint search challenges. First, it does not discuss or address the potentially explosive memory consumption issue of such joint search; second, EDD's accelerator search space only includes the parallel factor, which can be strictly limited to their accelerator template and cannot generalize to include common accelerator parameters such as the tiling strategies.

Built upon prior arts, our TRIPS targets a scalable generic joint search framework to optimally search for the network, its precision, and adopted accelerator in a differentiable manner for both improved efficiency and better transferability to other tasks/applications.

3 The Proposed Techniques

In this section, we describe our proposed techniques for enabling TRIPS, where Sec. 3.1 provides TRIPS's formulation and implementation, and Sec. 3.2 and 3.3 introduce TRIPS's enablers that address the key challenges of scalable generic joint search for networks, precision, and accelerators.

3.1 TRIPS: Formulation and Implementation

TRIPS formulation. Fig. 1 shows an overview of TRIPS, which jointly searches for the networks (e.g., kernel size, channel expansion, and group number), precision (e.g., 4-/6-/8-/12-/16-bit), and the accelerators (e.g., PE array type, buffer size, and tiling strategies of each memory hierarchy) in a differentiable manner. TRIPS targets a *scalable* yet *generic* joint search framework, which we formulate as a bi-level optimization problem:

$$\min_{\alpha,\beta} \; L_{val}(\omega^*, net(\alpha), prec(\beta)) + \lambda L_{cost}(hw(\gamma^*), net(\alpha), prec(\beta)) \tag{1}$$

$$s.t. \quad \omega^* = \arg\min_{\omega} \; L_{train}(\omega, net(\alpha), prec(\beta)), \tag{2}$$

$$s.t. \quad \gamma^* = \arg\min_{\gamma} \; L_{cost}(hw(\gamma), net(\alpha), prec(\beta)) \tag{3}$$

Where α, β, and γ are the continuous variables parameterizing the probability of different choices for the network operators, precision bitwidths, and accelerator parameters as in (Liu et al., 2018), ω

is the supernet weights, L_{train}, L_{val}, and L_{cost} are the loss during training and validation and the hardware-cost loss, and $net(\alpha)$, $prec(\beta)$, and $hw(\gamma)$ denote the network, precision, and accelerator characterized by α, β, γ, respectively.

TRIPS's iterative search starts from updating both the supernet weights ω and accelerator parameters γ, given the current network $net(\alpha)$ quantized using precision $prec(\beta)$, and then updates α and β based on the derived optimal weights ω^* and accelerator $hw(\gamma^*)$ resulting from the previous step. More details regarding how to update ω^* and γ^* are provided in Eq. (2) and Eq. (3) and discussed in Sec. 3.2 and Sec. 3.3, respectively. **The key objective** of TRIPS is captured by Eq. (1) which involves all the three major aspects towards efficient DNN accelerators. **The key challenges** in achieving TRIPS include **(1)** the prohibitively large joint search space (e.g., 2.3E+21 in this work) which if not addressed will limit the scalability of TRIPS to practical yet complex tasks; **(2)** the entangled co-adaptation (Hong et al., 2020), correlation (Li et al., 2019), and cooperation (Tian et al., 2020) issues among different network and precision choices can enlarge the gap between the supernet during search and the final derived network, thus failing the joint search; and **(3)** the non-triviality of deriving hardware-cost for the layer/block-wise update during network search, as the hardware-cost is determined by the whole network.

$$Forward: A^{l+1} = \sum_{i=1}^{N} GS_{hard}(\alpha_i^l)\, O_i(A^l) = O_{fw}^l(A^l) \tag{4}$$

$$Backward: \frac{\partial L_{val}}{\partial \alpha_i^l} = \sum_{k=1}^{K} \frac{\partial L_{val}}{\partial GS(\alpha_k^l)} \frac{\partial GS(\alpha_k^l)}{\partial \alpha_i^l} = \frac{\partial L_{val}}{\partial A^{l+1}} \sum_{k=1}^{K} O_k^l(A^l) \frac{\partial GS(\alpha_k^l)}{\partial \alpha_i^l} \tag{5}$$

$$\frac{\partial L_{cost}}{\partial \alpha_i^l} = \mathbb{1}(GS_{hard}(\alpha_i^l) = 1)\, L_{cost}^{\alpha_i^l}(hw(\gamma^*), net(\alpha_i^l), prec(\beta)) \tag{6}$$

TRIPS implementation. To tackle the three aforementioned challenges, TRIPS integrates a novel co-search pipeline which can be illustrated using the co-search for α as follows and is similarly applicable to co-search for β .

Single-path forward: For updating both α (see Eq. (4)) and β during forward, TRIPS adopts hard Gumbel Softmax sampling (Dong & Yang, 2019; Hu et al., 2020a), i.e., only the choice with the highest probability will be activated to narrow the gap between the search and evaluation thanks to the single-path property of hard Gumbel Softmax sampling. In Eq. (4), A^l and A^{l+1} denote the feature maps of the l-th and $(l+1)$-th layer, respectively, GS_{hard} is the hard Gumbel Softmax operator generating a one-hot output, i.e., only one operator O_{fw}^l, will be activated during forward, N is the total number of operator choices, and O_i^l is the i-th operator in the l-th layer parameterized by α_i^l.

Multi-path backward: For updating both α (see Eq. (5)) and β during backward, TRIPS activates multiple paths to calculate the gradients of α and β through Gumbel Softmax relaxation in order to balance the search efficiency and stability motivated by (Cai et al., 2018; Hu et al., 2020b). For example, α_i^l's gradients are calculated using Eq. (5), where GS is a Gumbel Softmax function (Maddison et al., 2014) and K is the number of activated choices with the top K Gumbel Softmax probability. Similar to (Cai et al., 2018), $K \in (1, N)$ in TRIPS to control the computational cost.

Hardware-cost penalty: The network search in Eq. (1) is performed in a layer/block-wise manner as in (Liu et al., 2018), thus requiring layer/block-wise hardware-cost penalty which is determined by the layer/block-to-accelerator *mapping method* and the corresponding layer/block execution cost on the optimal accelerator $hw(\gamma^*)$. The optimal mapping method of an accelerator is yet determined by the whole network. To handle this gap, we derive the layer/block-wise hardware-cost assuming that the single-path network derived from the current forward would be the final derived network, as this single-path network has a higher if not the highest probability to be finally derived. In Eq. (6), $\mathbb{1}$ is an indicator denoting whether α_i^l (i.e., the i-th operator in the l-th layer) is activated during forward.

3.2 TRIPS Enabler 1: Heterogeneous sampling for precision search

As discussed in Sec.1, there exists a dilemma (i.e., memory consumption explosion or biased search) whether to activate all the paths during precision search, for addressing which we have developed a

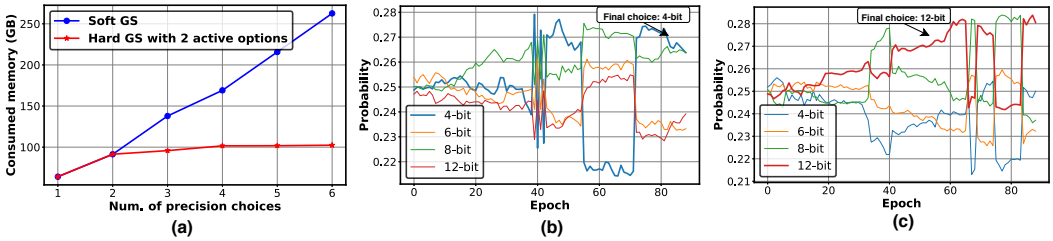

Figure 2: (a) GPU memory consumption comparison between soft Gumbel Softmax (GS) and hard GS sampling (two active choices) for precision search. Probability of each precision choice during the search process in the 4-th block when searching with: (b) hard GS sampling for updating both weights ω and precision choices β (result in the lowest 4-bit), and (c) the proposed heterogeneous sampling for updating ω and β (result in the highest 12-bit).

heterogeneous sampling. Next, we first use real experiments to illustrate the joint search dilemma, and then introduce our heterogeneous sampling which effectively address those challenges/issues.

Activating all choices - memory explosion and entangled correlation among choices. During precision search, activating all the precision choices as (Wu et al., 2018; Gong et al., 2019) can easily explode the memory consumption especially when the precision is co-searched with the network structures. While composite convolutions (Cai & Vasconcelos, 2020) for mixed precision search can mitigate this memory explosion issue during search by shrinking the required computation, yet this large memory consumption issue would still exist during training when updating the precision parameters, i.e., β in Eq. (5). For example, as shown in Fig. 2 (a), the measured GPU memory consumption of co-searching the network and precision on ImageNet grows linearly with the number of precision choices if activating all precision choices during search. In addition, the entangled correlation (e.g., co-adaptation (Hong et al., 2020), correlation (Li et al., 2019), and cooperation (Tian et al., 2020)) among different precision choices leads to a large gap between the supernet during search and the final derived network, thus failing the joint search.

Activating only a subset of choices - Biased search. For addressing the above issues of memory explosion and correlation among choices, one natural choice is to adopt hard Gumbel Softmax by reducing the memory consumption, which however can lead to a biased search and thus poor performance. Specifically, activating only a subset of the precision choices implies a sequential training of different precisions that can lead to inaccurate performance ranking. This is because a sequential training means different precision choices are applied on top of the same weights and activations. As a result, different precision choices can interfere with each other and different training order would lead to a different result. For better understanding, we next show two concrete experiments.

Table 1: Comparing the resulting accuracy when training a fixed network using different precision schedules, where high2low and low2high denote sequential training from high precision to low precision and the inverse case, respectively.

Strategy	Acc				
	4-bit (%)	8-bit (%)	12-bit (%)	16-bit (%)	32-bit (%)
Independent	63.52	67.44	67.56	67.65	68.21
high2low	59.29	45.09	45.45	45.15	65
low2high	4.36	26.55	43.58	63.3	63.5
joint	63.28	66.98	67.21	67.23	67.36

Co-search network and precision using hard Gumbel Softmax: Fig. 2 (b) shows the resulting precision probability evolution when co-searching the network and precision on CIFAR-100 using hard Gumbel Softmax (activating two precision choices) without imposing any hardware-cost constraints, indicating the desired precision choice would be the highest precision. However, as shown in Fig. 2 (b), the block co-searched using hard Gumbel Softmax collapse to the lowest precision (i.e., the highest probability towards the end of the search is the lowest precision choice 4-bit), indicating an ineffective search direction. Note that the fluctuation in the probability of different precision choices is caused by the intermittent activation of the block due to the hard Gumbel Softmax sampling.

Sequential training of a fixed network with multiple precision choices: As observed in (Jin et al., 2020), when training a fixed network with multiple precision choices, either ascending or descending the precision will incur an inferior convergence and thus chaotic accuracy ranking among different precision choices. For example, as shown in Tab. 1, we compare the accuracy of a fixed network (all blocks adopt the k3e1 (kernel size 3 and channel expansion 1) structure in (Wu et al., 2019)) under different precision choices, when being trained with different precision schedules, and find

that only jointly training all the precision choices can maintain the ranking consistent with that of independently trained ones, while sequential training leads to both inferior accuracy and ranking.

Proposed solution - Heterogeneous sampling. To tackle both aspects of the aforementioned dilemma, we propose a heterogeneous sampling strategy as formulated in Eq. (7) where $\bar{W}^l$ / $\bar{A}^l$ are the composite weights / activations of the l-th layer as in (Cai & Vasconcelos, 2020) which are the weighted sum of weights / activations under different precision choices, e.g., W_j^l is the weights quantized to the j-th precision among the total J options. In our heterogeneous sampling, for updating the weights in Eq. (2), we jointly update the weights under all the precision choices weighted by their corresponding soft Gumbel Softmax $GS(\beta_j^l)$ and the gradients can be estimated by STE (Zhou et al., 2016) as $\partial L_{train}/\partial A^l \approx \partial L_{train}/\partial \bar{A}^l$ so that no extra intermediate feature maps are needed to be stored into the memory during backward. For updating β, we adopt hard Gumbel Softmax with one-hot outputs $GS_{hard}(\beta_j^l)$ as discussed in Sec. 3.1 to save memory and computation while reducing the correlation among precision choices. In the same co-search setting as Fig. 2 (b), all the blocks searched using our proposed heterogeneous sampling converge to the highest precision choice towards the end of the search as shown in Fig. 2 (c).

$$A^{l+1} = \bar{W}^l * \bar{A}^l = \sum_{j=1}^{J} \bar{\beta}_j^l W_j^l * \sum_{j=1}^{J} \bar{\beta}_j^l A_j^l \quad where\ \bar{\beta}_j^l = \begin{cases} GS(\beta_j^l) & \text{if updating weight} \\ GS_{hard}(\beta_j^l) & \text{if updating } \beta \end{cases} \tag{7}$$

3.3 TRIPS Enabler 2: Differentiable Accelerator Search Engine

Although EDD (Li et al., 2020) also co-searches the accelerator with the network, their search space is limited to include only the parallel factor within their template which can be analytically fused into their theoretical computational cost, whereas this is not always applicable to other naturally non-differentiable accelerator design parameters such as tiling strategies. A more general and efficient search engine is needed towards generic differentiable accelerator search.

We propose a differentiable search engine to efficiently search for the optimal accelerator (including the micro-architectures and mapping methods) given a DNN model and its precision based on single-path sampling as discussed in Sec. 3.1. We solve Eq. (3) in a differentiable way:

$$\gamma^* = \arg\min_{\gamma} \sum_{m=1}^{M} GS_{hard}(\gamma^m)\, L_{cost}(hw(\{GS_{hard}(\gamma^m)\}), net(\{O_{fw}^l\}), prec(\{B_{fw}^l\})) \tag{8}$$

where M is the number of accelerator design parameters. Given the network $net(\{O_{fw}^l\})$ and precision $prec(\{B_{fw}^l\})$, our search engine utilizes hard Gumbel Softmax GS_{hard} sampling on each design parameter γ^m to build an accelerator $hw(\{GS_{hard}(\gamma^m)\})$ and penalize each sampled accelerator parameter with the overall hardware-cost L_{cost} through relaxation in a gradient manner.

4 Experiment Results

4.1 Experiment Setup

Software settings. Search space and hyper-params. We adopt the same search space in (Wu et al., 2019) for the ImageNet experiments and disable the first two down sampling operations for the CIFAR-10/100 experiments. We use [4, 6, 8, 12, 16] as candidate precision choices and one block shares the same precision of weights and activations for more hardware friendly implementation. We choose to activate two paths during backward, i.e., $K = 2$ in Eq. (5), for search efficiency. **Detailed search and training settings are elaborated in Appendix A.**

Baselines. We mainly benchmark over four kinds of SOTA baselines: (1) the most relevant baseline EDD (Li et al., 2020) which supports the co-exploration of networks, precision, and accelerators, (2) SOTA methods co-explore networks and accelerators including HS-Co-Opt (Jiang et al., 2020b), NASAIC (Yang et al., 2020), and BSW (Abdelfattah et al., 2020), (3) SOTA methods co-searching the networks and precision including APQ (Wang et al., 2020) and MP-NAS (Gong et al., 2019), and (4) hardware-aware NAS with uniform/searched precision, including FBNet (Wu et al., 2019), ProxylessNAS (Cai et al., 2018), and EfficientNet-B0 (Tan & Le, 2019).

Hardware settings. To evaluate the generated network and accelerator designs, for FPGA cases, we adopt the standard Vivado HLS (Xilinx Inc., a) design flow, on the target Xilinx ZC706 development board (Xilinx Inc., b), which has a total 900 DSP48s (Digital Signal Processor) and 19.1Mb BRAM (Block RAM). For ASIC implementations, we use the SOTA energy estimation tool Timeloop (Parashar et al., 2019) and Accelergy, (Wu et al., 2019), to validate our generated design's performance, with CACTI7 (Balasubramonian et al., 2017) and Aladdin (Shao et al., 2014) at a 32nm CMOS technology as unit energy and timing cost plugins. **Details about the accelerator search space are discussed in Appendix B.**

4.2 Benchmark over SOTA methods

Co-exploration of networks, precision, and accelerators. We benchmark our TRIPS framework with SOTA efficient DNN solutions on ImageNet and FPGA-based accelerators under the 512 DSP limits in Fig. 3. Specifically, we provide four searched results of our TRIPS framework; we use the reported results for EDD, and search for the optimal accelerator in our accelerator space for APQ, MP-NAS, and SOTA hardware-aware NAS methods; for EfficientNet-B0, we apply the SOTA mixed precision strategy searched by (Habi et al., 2020) for a fair comparison and the ProxylessNAS-8bit is reported by APQ (Wang et al., 2020); and the other baselines are all quantized to 8-bit for hardware measurement and the accuracies are from the original papers without considering the quantization effect. We can observe from Fig. 3 that (1) the searched networks by our TRIPS framework consistently push forward the frontier of accuracy-FPS trade-offs, (2) compared with the most relevant baseline EDD, we achieve a +1.3% higher accuracy with a 1.59× FPS. The effectiveness of TRIPS over various SOTA methods that represent most of the existing co-design directions verifies the necessity and effectiveness of co-searching all the three aspects towards efficient DNN accelerators.

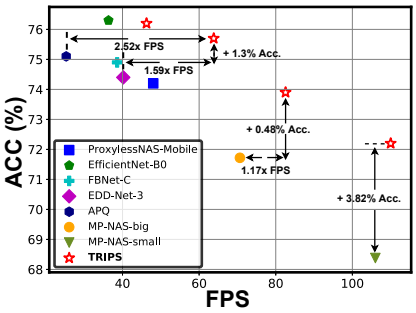

Figure 3: Achieved Accuracy vs. FPS trade-off of TRIPS against SOTA efficient DNN solutions on ImageNet, including EDD (Li et al., 2020), APQ (Wang et al., 2020), MP-NAS (Gong et al., 2019), EfficientNet-B0 (Tan & Le, 2019), FBNet (Wu et al., 2019), ProxylessNAS (Cai et al., 2018).

Co-exploration of networks and accelerators. Software-Hardware co-design is a significant property of our TRIPS framework, so we further benchmark it with both searched precision and fixed-precision over SOTA network/accelerator co-search works for a fair comparison.

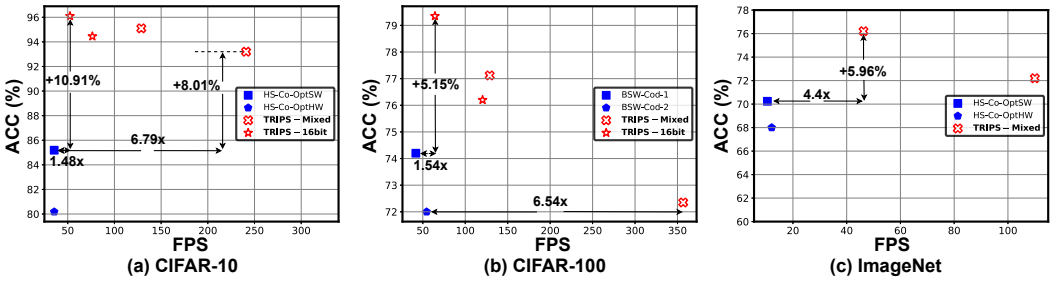

Figure 4: Benchmark TRIPS w/ and w/o precision search (denoted as TRIPS-Mixed and TRIPS-16bit, respectively) with SOTA network/accelerator co-exploration methods (Jiang et al., 2020b; Abdelfattah et al., 2020) on CIFAR-10/100/ImageNet.

Co-search on FPGA. We benchmark with HS-Co-Opt (Jiang et al., 2020b) and BSW (Abdelfattah et al., 2020) on ZC706 under the same DSP limits as the baselines on CIFAR-10/100/ImageNet. From Fig. 4, we can see that (1) on both CIFAR-10/100 dataset, TRIPS with fixed 16-bit consistently achieves a better accuracy (up to 10.91% and 5.15%, respectively) and higher FPS (up to 2.21× and 2.15×, respectively) under the same DSP constraint, and (2) when co-searching the precision, our method can more aggressively push forward the FPS improvement (up to 6.79× and 6.54×, respectively on CIFAR-10/100), implying the importance of the co-exploration of the precision dimension in addition to network and accelerator co-explorations. Specifically, TRIPS with searched precision achieves a +5.96% higher accuracy and 4.4× FPS on ImageNet over (Jiang et al., 2020b).

Co-search on ASIC. We benchmark with NASAIC on ASIC accelerators with both the co-search results and their reported sequential optimization/hardware aware optimization results (Yang et al., 2020) on CIFAR-10 in Tab. 2. We can observe that compared with both co-search, sequential optimization, and hardware-aware optimization methods for exploring the ASIC design space, our TRIPS framework consistently achieves notably improved trade-offs between accuracy and energy delay product (EDP), which is energy multiplied with latency. In particular, we achieve a +0.17% ~ +1.81% higher accuracy with a 371.56 ~ 756.88× reduction in EDP. In the baseline implementations, most of the area is occupied by the support for heterogeneous functionalities, which leads to severe under utilization when executing one task, thus contributing to the surprisingly higher area and energy consumption.

Table 2: Comparing the accuracy and ASIC efficiency (i.e., EDP and area) of TRIPS and SOTA co-exploration ASIC works (Yang et al., 2020).

Optimization Methods	Accuracy (%)	EDP (J*clock-cycle)	Area (um^2)
NAS → ASIC	94.17	3.30E+06	4.83E+09
ASIC → HW-NAS	92.53	2.81E+06	3.86E+09
NASAIC	92.62	1.62E+06	3.34E+09
TRIPS	**94.34**	**4.36E+03**	**5.92E+05**

4.3 Ablation studies about TRIPS

Scalability under the same DSP. In Fig. 5, we show the pareto frontier of our TRIPS framework under the same DSP constraint with different accuracy and FPS trade-offs on CIFAR-100 to show our TRIPS can handle and is scalable with a large range of DNN solutions.

Effectiveness of heterogeneous sampling. In addition to the example and analysis in Sec. 3.2, we further benchmark with the baseline that adopts the same sampling strategy for updating both the weights and precision. We integrate the baseline sampling strategy into our TRIPS framework ($K = 2$ for all the experiments), termed as TRIPS w/o h-sampling, and show the trade-offs between the achieved accuracy and FPS in Fig. 5. We find it tends to select lower precision choices which are harmful to the overall accuracy, which is consistently inferior than TRIPS with heterogeneous sampling, due to the inaccurate estimation for different precision ranking as analyzed in Sec. 3.2.

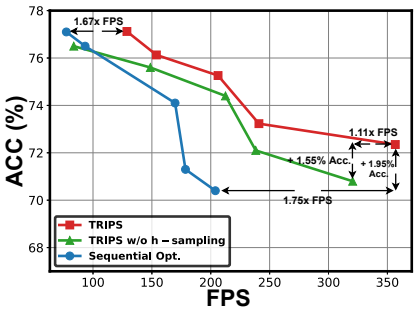

Figure 5: Accuracy vs. FPS trade-off of TRIPS, TRIPS w/o heterogeneous sampling, and the sequential optimization baseline on CIFAR-100.

Comparison with sequential optimization. Due to the great flexibility on both software and hardware side, a nature design flow is to search the network and precision based on theoretical efficiency metrics (e.g., bit operations) and then search for the best matched accelerator given the searched network and precision. We benchmark over results from such a design flow in Fig. 5 on CIFAR-100 and observe that TRIPS consistently outperforms the sequential optimization baseline, e.g., a 1.95% higher accuracy with 1.75× FPS, indicating the poor correlation between theoretical efficiency and real-device efficiency measurement.

More ablation studies about the accelerator search engine and the visualization of searched network, precision, and accelerator can be found in Appendix C and D, respectively.

5 Conclusion

We propose a Triple-Search (TRIPS) framework to jointly search for the network structure, precision, and accelerator in a differentiable manner. Our TRIPS framework adopts a heterogeneous sampling strategy to achieve unbiased search with constant memory consumption, and tackles the non-differentiable nature of accelerator design space with a novel co-search pipeline that integrates a generic differentiable accelerator search engine. Extensive experiments and ablation studies validate that both TRIPS generated networks and accelerators consistently outperform SOTA designs in terms of task accuracy and and accelerator efficiency.

REFERENCES

Mohamed S Abdelfattah, Łukasz Dudziak, Thomas Chau, Royson Lee, Hyeji Kim, and Nicholas D Lane. Best of both worlds: Automl codesign of a cnn and its hardware accelerator. *arXiv preprint arXiv:2002.05022*, 2020.

Rajeev Balasubramonian, Andrew B. Kahng, Naveen Muralimanohar, Ali Shafiee, and Vaishnav Srinivas. Cacti 7: New tools for interconnect exploration in innovative off-chip memories. *ACM Trans. Archit. Code Optim.*, 14(2), June 2017. ISSN 1544-3566. doi: 10.1145/3085572. URL `https://doi.org/10.1145/3085572`.

Han Cai, Ligeng Zhu, and Song Han. Proxylessnas: Direct neural architecture search on target task and hardware. *arXiv preprint arXiv:1812.00332*, 2018.

Zhaowei Cai and Nuno Vasconcelos. Rethinking differentiable search for mixed-precision neural networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2349–2358, 2020.

Deming Chen, Jason Cong, Yiping Fan, Guoling Han, Wei Jiang, and Zhiru Zhang. xpilot: A platform-based behavioral synthesis system. *SRC TechCon*, 5, 2005.

Deming Chen, Jason Cong, Yiping Fan, and Lu Wan. Lopass: A low-power architectural synthesis system for FPGAs with interconnect estimation and optimization. *IEEE Transactions on Very Large Scale Integration (VLSI) Systems*, 18(4):564–577, 2009.

Y. Chen, T. Krishna, J. Emer, and V. Sze. Eyeriss: An energy-efficient reconfigurable accelerator for deep convolutional neural networks. *JSSC 2017*, 52(1):127–138, 2017.

Yu-Hsin Chen, Joel Emer, and Vivienne Sze. Eyeriss: A spatial architecture for energy-efficient dataflow for convolutional neural networks. *ACM SIGARCH Computer Architecture News*, 44(3): 367–379, 2016.

Yukang Chen, Gaofeng Meng, Qian Zhang, Xinbang Zhang, Liangchen Song, Shiming Xiang, and Chunhong Pan. Joint neural architecture search and quantization. *arXiv preprint arXiv:1811.09426*, 2018.

Xuanyi Dong and Yi Yang. Searching for a robust neural architecture in four gpu hours. In *Proceedings of the IEEE Conference on computer vision and pattern recognition*, pp. 1761–1770, 2019.

Z. Du, R. Fasthuber, T. Chen, P. Ienne, L. Li, T. Luo, X. Feng, Y. Chen, and O. Temam. Shidiannao: Shifting vision processing closer to the sensor. In *ACM SIGARCH Computer Architecture News*, volume 43, pp. 92–104. ACM, 2015.

Ahmed Taha Elthakeb, Prannoy Pilligundla, Fatemeh Mireshghallah, Amir Yazdanbakhsh, and Hadi Esmaeilzadeh. Releq: A reinforcement learning approach for automatic deep quantization of neural networks. *IEEE Micro*, 2020.

Chengyue Gong, Zixuan Jiang, Dilin Wang, Yibo Lin, Qiang Liu, and David Z Pan. Mixed precision neural architecture search for energy efficient deep learning. In *ICCAD*, pp. 1–7, 2019.

Yijin Guan, Hao Liang, Ningyi Xu, Wenqiang Wang, Shaoshuai Shi, Xi Chen, Guangyu Sun, Wei Zhang, and Jason Cong. FP-DNN: An automated framework for mapping deep neural networks onto FPGAs with RTL-HLS hybrid templates. In *2017 IEEE 25th Annual International Symposium on Field-Programmable Custom Computing Machines (FCCM)*, pp. 152–159. IEEE, 2017.

Hai Victor Habi, Roy H Jennings, and Arnon Netzer. Hmq: Hardware friendly mixed precision quantization block for cnns. *arXiv preprint arXiv:2007.09952*, 2020.

Weijun Hong, Guilin Li, Weinan Zhang, Ruiming Tang, Yunhe Wang, Zhenguo Li, and Yong Yu. Dropnas: Grouped operation dropout for differentiable architecture search. In *International Joint Conference on Artificial Intelligence*, 2020.

Andrew Howard, Mark Sandler, Grace Chu, Liang-Chieh Chen, Bo Chen, Mingxing Tan, Weijun Wang, Yukun Zhu, Ruoming Pang, Vijay Vasudevan, et al. Searching for mobilenetv3. In *Proceedings of the IEEE International Conference on Computer Vision*, pp. 1314–1324, 2019.

Shoukang Hu, Sirui Xie, Hehui Zheng, Chunxiao Liu, Jianping Shi, Xunying Liu, and Dahua Lin. Dsnas: Direct neural architecture search without parameter retraining. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12084–12092, 2020a.

Yibo Hu, Xiang Wu, and Ran He. Tf-nas: Rethinking three search freedoms of latency-constrained differentiable neural architecture search. *arXiv preprint arXiv:2008.05314*, 2020b.

Weiwen Jiang, Qiuwen Lou, Zheyu Yan, Lei Yang, Jingtong Hu, X Sharon Hu, and Yiyu Shi. Device-circuit-architecture co-exploration for computing-in-memory neural accelerators. *IEEE Transactions on Computers*, 2020a.

Weiwen Jiang, Lei Yang, Edwin H-M Sha, Qingfeng Zhuge, Shouzhen Gu, Sakyasingha Dasgupta, Yiyu Shi, and Jingtong Hu. Hardware/software co-exploration of neural architectures. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 2020b.

Qing Jin, Linjie Yang, and Zhenyu Liao. Adabits: Neural network quantization with adaptive bit-widths. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2146–2156, 2020.

Guilin Li, Xing Zhang, Zitong Wang, Zhenguo Li, and Tong Zhang. Stacnas: Towards stable and consistent differentiable neural architecture search. *arXiv*, pp. arXiv–1909, 2019.

Yuhong Li, Cong Hao, Xiaofan Zhang, Xinheng Liu, Yao Chen, Jinjun Xiong, Wen-mei Hwu, and Deming Chen. Edd: Efficient differentiable dnn architecture and implementation co-search for embedded ai solutions. *arXiv preprint arXiv:2005.02563*, 2020.

Hanxiao Liu, Karen Simonyan, and Yiming Yang. Darts: Differentiable architecture search. *arXiv preprint arXiv:1806.09055*, 2018.

Chris J Maddison, Daniel Tarlow, and Tom Minka. A* sampling. In *Advances in Neural Information Processing Systems*, pp. 3086–3094, 2014.

A. Parashar, P. Raina, Y. S. Shao, Y. Chen, V. A. Ying, A. Mukkara, R. Venkatesan, B. Khailany, S. W. Keckler, and J. Emer. Timeloop: A systematic approach to dnn accelerator evaluation. In *2019 IEEE International Symposium on Performance Analysis of Systems and Software (ISPASS)*, pp. 304–315, 2019.

Jiantao Qiu, Jie Wang, Song Yao, Kaiyuan Guo, Boxun Li, Erjin Zhou, Jincheng Yu, Tianqi Tang, Ningyi Xu, Sen Song, et al. Going deeper with embedded fpga platform for convolutional neural network. In *Proceedings of the 2016 ACM/SIGDA International Symposium on Field-Programmable Gate Arrays*, pp. 26–35. ACM, 2016.

Kyle Rupnow, Yun Liang, Yinan Li, Dongbo Min, Minh Do, and Deming Chen. High level synthesis of stereo matching: Productivity, performance, and software constraints. In *2011 International Conference on Field-Programmable Technology*, pp. 1–8. IEEE, 2011.

Y. S. Shao, B. Reagen, G. Wei, and D. Brooks. Aladdin: A pre-rtl, power-performance accelerator simulator enabling large design space exploration of customized architectures. In *2014 ACM/IEEE 41st International Symposium on Computer Architecture (ISCA)*, pp. 97–108, 2014.

Yongming Shen, Michael Ferdman, and Peter Milder. Maximizing cnn accelerator efficiency through resource partitioning. In *Proceedings of the 44th Annual International Symposium on Computer Architecture*, ISCA '17, pp. 535–547, New York, NY, USA, 2017. Association for Computing Machinery. ISBN 9781450348928. doi: 10.1145/3079856.3080221. URL `https://doi.org/10.1145/3079856.3080221`.

Dimitrios Stamoulis, Ruizhou Ding, Di Wang, Dimitrios Lymberopoulos, Bodhi Priyantha, Jie Liu, and Diana Marculescu. Single-path nas: Designing hardware-efficient convnets in less than 4 hours. In *Joint European Conference on Machine Learning and Knowledge Discovery in Databases*, pp. 481–497. Springer, 2019.

Mingxing Tan and Quoc V Le. Efficientnet: Rethinking model scaling for convolutional neural networks. *arXiv preprint arXiv:1905.11946*, 2019.

Mingxing Tan, Bo Chen, Ruoming Pang, Vijay Vasudevan, Mark Sandler, Andrew Howard, and Quoc V Le. Mnasnet: Platform-aware neural architecture search for mobile. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2820–2828, 2019.

Yunjie Tian, Chang Liu, Lingxi Xie, Jianbin Jiao, and Qixiang Ye. Discretization-aware architecture search. *arXiv preprint arXiv:2007.03154*, 2020.

Rangharajan Venkatesan, Yakun Sophia Shao, Miaorong Wang, Jason Clemons, Steve Dai, Matthew Fojtik, Ben Keller, Alicia Klinefelter, Nathaniel Pinckney, Priyanka Raina, et al. MAGNet: A Modular Accelerator Generator for Neural Networks. In *Proceedings of the International Conference on Computer-Aided Design (ICCAD)*, 2019.

Alvin Wan, Xiaoliang Dai, Peizhao Zhang, Zijian He, Yuandong Tian, Saining Xie, Bichen Wu, Matthew Yu, Tao Xu, Kan Chen, et al. Fbnetv2: Differentiable neural architecture search for spatial and channel dimensions. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 12965–12974, 2020.

Junsong Wang, Qiuwen Lou, Xiaofan Zhang, Chao Zhu, Yonghua Lin, and Deming Chen. Design flow of accelerating hybrid extremely low bit-width neural network in embedded FPGA. In *2018 28th International Conference on Field Programmable Logic and Applications (FPL)*, 2018.

Kuan Wang, Zhijian Liu, Yujun Lin, Ji Lin, and Song Han. Haq: Hardware-aware automated quantization with mixed precision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 8612–8620, 2019.

Tianzhe Wang, Kuan Wang, Han Cai, Ji Lin, Zhijian Liu, Hanrui Wang, Yujun Lin, and Song Han. Apq: Joint search for network architecture, pruning and quantization policy. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 2078–2087, 2020.

Ying Wang, Jie Xu, Yinhe Han, Huawei Li, and Xiaowei Li. Deepburning: Automatic generation of fpga-based learning accelerators for the neural network family. DAC '16, New York, NY, USA, 2016. Association for Computing Machinery. ISBN 9781450342360. doi: 10.1145/2897937.2898003. URL https://doi.org/10.1145/2897937.2898003.

Bichen Wu, Yanghan Wang, Peizhao Zhang, Yuandong Tian, Peter Vajda, and Kurt Keutzer. Mixed precision quantization of convnets via differentiable neural architecture search. *arXiv preprint arXiv:1812.00090*, 2018.

Bichen Wu, Xiaoliang Dai, Peizhao Zhang, Yanghan Wang, Fei Sun, Yiming Wu, Yuandong Tian, Peter Vajda, Yangqing Jia, and Kurt Keutzer. Fbnet: Hardware-aware efficient convnet design via differentiable neural architecture search. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 10734–10742, 2019.

Y. N. Wu, J. S. Emer, and V. Sze. Accelergy: An architecture-level energy estimation methodology for accelerator designs. In *2019 IEEE/ACM International Conference on Computer-Aided Design (ICCAD)*, pp. 1–8, 2019.

Qingcheng Xiao, Yun Liang, Liqiang Lu, Shengen Yan, and Yu-Wing Tai. Exploring heterogeneous algorithms for accelerating deep convolutional neural networks on fpgas. In *Proceedings of the 54th Annual Design Automation Conference 2017*, DAC '17, New York, NY, USA, 2017. Association for Computing Machinery. ISBN 9781450349277. doi: 10.1145/3061639.3062244. URL https://doi.org/10.1145/3061639.3062244.

Xilinx Inc. Vivado High-Level Synthesis, a. https://https://www.xilinx.com/products/design-tools/vivado/integration/esl-design.html, accessed 2019-09-16.

Xilinx Inc. Xilinx zynq-7000 soc zc706 evaluation kit. https://www.xilinx.com/products/boards-and-kits/ek-z7-zc706-g.html, b. (Accessed on 09/30/2020).

Lei Yang, Zheyu Yan, Meng Li, Hyoukjun Kwon, Liangzhen Lai, Tushar Krishna, Vikas Chandra, Weiwen Jiang, and Yiyu Shi. Co-exploration of neural architectures and heterogeneous asic accelerator designs targeting multiple tasks. *arXiv preprint arXiv:2002.04116*, 2020.

Xuan Yang, Jing Pu, Blaine Burton Rister, Nikhil Bhagdikar, Stephen Richardson, Shahar Kvatinsky, Jonathan Ragan-Kelley, Ardavan Pedram, and Mark Horowitz. A systematic approach to blocking convolutional neural networks, 2016.

Chen Zhang, Peng Li, Guangyu Sun, Yijin Guan, Bingjun Xiao, and Jason Cong. Optimizing fpga-based accelerator design for deep convolutional neural networks. In *Proceedings of the 2015 ACM/SIGDA International Symposium on Field-Programmable Gate Arrays*, FPGA '15, pp. 161–170, New York, NY, USA, 2015. Association for Computing Machinery. ISBN 9781450333153. doi: 10.1145/2684746.2689060. URL https://doi.org/10.1145/2684746.2689060.

Chen Zhang, Guangyu Sun, Zhenman Fang, Peipei Zhou, Peichen Pan, and Jason Cong. Caffeine: Towards uniformed representation and acceleration for deep convolutional neural networks. *IEEE Transactions on Computer-Aided Design of Integrated Circuits and Systems*, 2018a.

Xiaofan Zhang, Junsong Wang, Chao Zhu, Yonghua Lin, Jinjun Xiong, Wen-mei Hwu, and Deming Chen. Dnnbuilder: An automated tool for building high-performance dnn hardware accelerators for fpgas. In *Proceedings of the International Conference on Computer-Aided Design*, ICCAD '18, New York, NY, USA, 2018b. Association for Computing Machinery. ISBN 9781450359504. doi: 10.1145/3240765.3240801. URL https://doi.org/10.1145/3240765.3240801.

Shuchang Zhou, Yuxin Wu, Zekun Ni, Xinyu Zhou, He Wen, and Yuheng Zou. Dorefa-net: Training low bitwidth convolutional neural networks with low bitwidth gradients. *arXiv preprint arXiv:1606.06160*, 2016.

A TRAINING AND SEARCH SETTING

Search settings. For searching on CIFAR-10/100 dataset, we use half of the dataset for updating supernet weight ω and the other half for updating network and precision parameter α and β. We search for 90 epochs with an initial gumbel softmax temperature 5 decayed by a factor 0.975 every epoch. For searching on ImageNet, we randomly sample 100 classes as a proxy search dataset and use 80% data for updating ω and the other 20% for updating α and β. We pretrain the supernet by 30 epochs without updating network architecture and precision, then search for 90 epochs with an initial temperature 5 decayed by 0.956 every epoch, following (Wu et al., 2019). For both CIFAR-10/100 and ImageNet, we use initial learning rate 0.1 and an annealing cosine learning rate.

Training settings. For CIFAR-10/100, we train the derived network for 600 epochs with a 0.1 initial learning rate and an annealing cosine learning rate on a single NVIDIA RTX-2080Ti gpu following (Liu et al., 2018). For ImageNet, we adopt a 0.05 initial learning rate and an annealing cosine learning rate for 150 epochs with four NVIDIA Tesla V100 gpus.

B ACCELERATOR SEARCH SPACE

To flexibly maintain the balance between hardware resource consumption and throughput across different generated networks, we employ the chunk-wise pipeline styled accelerator architecture inspired by (Shen et al., 2017; Zhang et al., 2018b). To enable the automatic hardware optimization and explore as much as the performance frontier, we further free up the hardware configurations during the co-optimization. Adopted from (Chen et al., 2017; Zhang et al., 2015; Yang et al., 2016), these configurations, as illustrated in Fig. 1, cover **1)** parallel processing elements (PE) settings: number and inter-connections of PEs, **2)** buffer management: allocation of lower memory levels between input, weight and output, **3)** tiling and scheduling of MAC(Multiply and Accumulate) computations and **4)** layer allocation: ways to assign each layer to the corresponding pipeline stage (sub-accelerator). All the above configurations are formatted and maintained through vectors of options to be compatible with the optimization formulation in Sec. 3. Taking AlexNet as an example workload, the total accelerator space size can reach up to 10^5 for each sub-accelerator and the space can go exponentially larger as the number of sub-accelerator(pipeline chunks) increases.

C ABLATION STUDIES ABOUT THE ACCELERATOR SEARCH ENGINE

The proposed accelerator search engine is one key enabler of our TRIPS framework. To evaluate its efficacy, we compare the accelerator efficiency of the TRIPS generated accelerators with SOTA accelerators under the same datasets and models. For FPGA-based accelerators, we consider three representative including (Qiu et al., 2016; Xiao et al., 2017; Zhang et al., 2018b) on two DNN models (AlexNet and VGG16) on ImageNet. For a fair comparison, when using our own engine to generate optimal accelerators, we adopt the same precision and FPGA resource as the baselines. The results in Tab. 3 show that the TRIPS generated accelerators outperform **both SOTA expert-designed and tool-generated** accelerators under the same dataset, DNNs, and FPGA resources. For example, the TRIPS generated accelerators achieve up to 2.16× increase in throughput on VGG16. The consistent better performance of our auto generated accelerators validates the effectiveness of our accelerator search engine in navigating the large and discrete design space of DNN accelerators to search for optimal DNN accelerators.

Table 3: TRIPS generated FPGA accelerators vs. SOTA FPGA accelerators with ImageNet.

	(Zhang et al., 2018b)	(Xiao et al., 2017)	(Qiu et al., 2016)	**TRIPS generated**	(Zhang et al., 2018b)	**TRIPS generated**
Chip model	Zynq XC70Z45	Zynq XC70Z45	Zynq XC70Z45	Zynq XC70Z45	Zynq XC70Z45	Zynq XC70Z45
Frequency	200MHz	200MHz	200Mhz	200MHz	200MHz	200MHz
Precision	Fix16	Fix16	Fix16	Fix16	Fix16	Fix16
Network	VGG16	VGG16	VGG16	VGG16	AlexNet	AlexNet
Dataset	ImageNet	ImageNet	ImageNet	ImageNet	ImageNet	ImageNet
Resource Utilization	680/900 DSP	824/900 DSP	780/900 DSP	723/900 DSP	808/900 DSP	704/900 DSP
Performance (GOP/s)	262	230	137	**291**	247	**272**

D VISUALIZATION OF SEARCHED NETWORK, PRECISION, AND ACCELERATOR.

Fig. 6 visualizes the searched network, precision, and accelerator achieved a 72.2% top-1 accuracy on ImageNet and 252.5 FPS on ZC706 FPGA. We conclude the insights below.

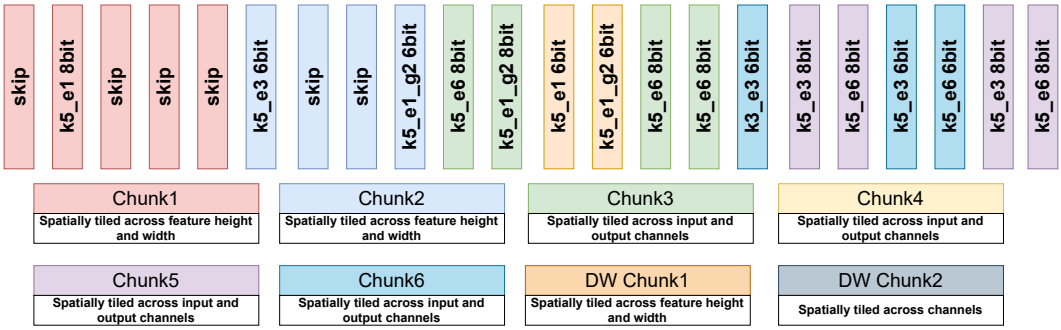

Figure 6: Visualization of the searched network, precision, and accelerator that achieves a 72.2% top -1 accuracy on ImageNet and 252.5 FPS on ZC706 FPGA. The block definition follows (Wu et al., 2019).

Insights for the searched network. We find that wide while shallow networks will better favor real device efficiency on ZC706 FPGA while achieve a similar accuracy. We conjecture the reason is that wider networks offer more opportunities for feature/channel-wise parallelism when batch size equals to one, leading to higher resource utilization and thus overall higher throughput.

Insights for the searched accelerator of TRIPS. The whole network is partitioned into multiple pipeline chunks to prioritize the resulting throughput, with each color representing one chunk. Deterministically, two blocks with different quantization schemes will not be put into one chunk due to hardware constraints. Adopted from the design in (Shen et al., 2017), there is no dependency of computation among blocks, so the pipeline chunks can take non-consecutive layers and better group the layers with similar dimensions together. Generally, as observed in Fig. 6 the chunks which take mostly the early blocks of the network favor spatially tiling the feature map height and width as it offers more parallelism, while the later chunks tends to choose the architecture to tile channels as, after down-sampling, parallelism opportunity is more prominent along channel dimensions.