R-Tac: A Rounded Monochrome Vision-based Tactile Sensor

Wanlin Li^{1*}, Pei Lin^{1,2*}, Meng Wang¹, Chenxi Xiao², Kaspar Althoefer³, Yao Su^{1†}, Ziyuan Jiao^{1†}, Hangxin Liu^{1†}

Abstract-Endowing the curved surfaces of rounded visionbased tactile sensors (VBTS) is essential for dexterous robotic manipulation, as they offer more sufficient contact with the environment. However, current rounded designs are constrained by a low sensing frequency (30-60 Hz) and the need for extensive calibration when adapting to new sensors due to the reliance on multi-channel captures, which hinders their performance in dynamic robotic tasks and large-scale deployment. In this work, we introduce R-Tac, a low-cost rounded VBTS engineered for high-resolution and high-speed perception. The key innovation is a monochrome vision-based sensing principle: utilizing a single-channel camera to capture the reflection properties of the compound rounded elastomer under monochromatic illumination. This single-channel sensing principle significantly reduces data volume and simplifies computational complexity, enabling 120 Hz tactile perception. R-Tac features an efficient calibration process, requiring only a few captures with a 3D-printed calibration setup. We demonstrate the advantages of R-Tac's design through a series of tasks (shown in Fig. 1) including object grasping, paper picking, inhand object reorientation, and terrain exploration, showcasing its effectiveness for dexterous robotic hands.

I. INTRODUCTION

Tactile sensors [1,2] are essential for robotic manipulation, providing precise feedback on contact states, contact positions, and surface characteristics. In recent years, Visionbased Tactile Sensors (VBTSs) [3–14] have made significant progress, while most designs are flat, and their responseness remains limited (running under 100 Hz compared to eskin [15]), which can cause missed detections and even motion blur during dynamic robotic tasks. This stems from their reliance on multi-channel RGB image data, which increases computational load and heat generation.

When deploying VBTSs on robotic multi-finger dexterous hand, factors such as calibration process and cost in largescale deployments are also important. The complexity of multi-channel data requires individual and extensive calibration for each newly manufactured sensor, and this calibration necessitate specialized equipment (e.g. CNC machines). These pose significant challenges to the efficient large-scale deployment of VBTSs at present.

Our response to this overall challenge is the development of R-Tac, that leverages a monochrome vision-based sensing

- * Wanlin Li and Pei Lin contributed equally to this work.
- † Corresponding authors.
- State Key Laboratory of General Artificial Intelligence, Beijing Institute for General Artificial Intelligence (BIGAI). Emails: {liwanlin, linpei, wangmeng, suyao, jiaoziyuan, liuhx}@bigai.ai.
- ² School of Information Science and Technology, ShanghaiTech University. Email: xiaochx@shanghaitech.edu.cn.

 ³ Centre for Advanced Robotics @ Queen Mary (ARQ), Queen Mary
- University of London. Email: k.althoefer@gmul.ac.uk.

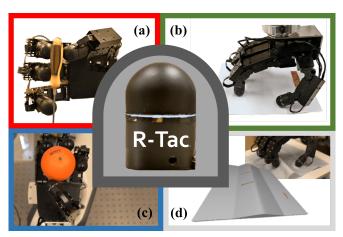


Fig. 1: The R-Tac Tactile Sensor Designed For Fingertips of Dexterous Robotic Hands. (a) Object grasping task. (b) Paper picking task. (c) In-hand object reorientation task. (d) Terrain exploration task.

principle. The proposed rounded sensor uses a low-cost single-channel camera to capture the reflection properties of a coated semitransparent elastomer under white-lighting illumination, enabling high-frequency (120 Hz) pixel-level curved surface reconstruction and simple calibration. The comparison between R-Tac and current VBTS is shown in Tab. I. We also introduce an efficient, 3D-printed calibration setup that requires only a few captures. Therefore, R-Tac is a novel spherical tactile sensor designed with ease of fabrication, calibration, and scalable deployment. To demonstrate its utility, we integrate R-Tac into each fingertip of a fully actuated dexterous robotic hand, enabling real-time contact feedback during manipulation tasks.

II. SENSOR DESIGN

The design criterial of R-Tac tactile sensor (Fig. 3) is guided by five key principles to ensure effective integration for robotic end-effectors:

- Round shape: The hemispherical design enables omnidirectional tactile perception.
- High resolution: High resolution enables accurate depth reconstruction and slip detection during picking-up.
- Convenient to fabricate & low-cost: The components of the tactile sensor are either off-the-shelf or easy to fabricate, with a cost of around \$60.
- Efficient calibration: The monochrome sensing principle simplifies lighting control and reduces manual effort for calibration, making it particularly suitable for large-scale deployment on multi-fingered robotic hands.

TABLE I: Comparison of the proposed R-Tac with the state-of-the-art curved VBTSs

Sensor	Working Principle	Camera	Dimension (mm)	Cost (\$)	Frequency (Hz)	Configuration
TacTip [5]	Learning-based	Monocular RGB	$40 \times 40 \times 85$	-	90	Bionic fingertip
RainbowSight [16]	Photometric Stereo	Monocular RGB	$28 \times 28 \times 50$	-	30	Bionic fingertip
Omnitact [17]	Photometric Stereo	5 Cameras	$30 \times 30 \times 33$	3200	30	Bionic fingertip
GelTip [18]	Photometric Stereo	Monocular RGB	$30 \times 30 \times 100$	-	30	Bionic finger
InSight [19]	Photometric Stereo	Monocular RGB	$40 \times 40 \times 70$	-	40	Bionic finger
AllSight [20]	Photometric Stereo	Monocular RGB	$26 \times 28 \times 38$	30+	60	Bionic fingertip
DenseTact [12]	Learning-based	Monocular RGB	$32 \times 32 \times 43$	80-	30	Bionic fingertip
DIGIT Pinki [13]	Photometric Stereo	Monocular RGB	$15 \times 15 \times 15$	-	30	Bionic fingertip
GelStereo BioTip [21]	Binocular Stereo	Binocular RGB	$34 \times 28 \times 34$	-	60	Bionic fingertip
DTact [6]	Darkness Mapping	Monocular RGB	$32.5\times25.5\times25.5$	15	90	Non-planar
R-Tac (Ours)	Darkness Mapping	Monochrome	$30 \times 30 \times 43$	60	120	Bionic fingertip

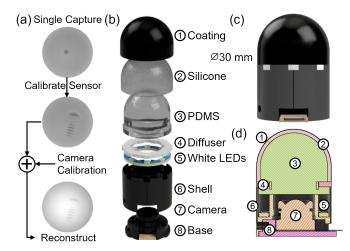


Fig. 2: **R-Tac Sensor Design and Calibration.** (a) illustrates the pipeline of depth reconstruction. (b) illustrates the exploded view of the sensor, detailing each component. (c) shows the dimensions of the sensor. (d) shows the schematic design.

• Efficient data transmission: The monochrome camera produces lightweight data per frame, facilitating highspeed data transmission between systems.

III. SENSOR CALIBRATION

The uniform optical properties of the elastomer and illumination module (standard deviation as low as 6) enable the 3D geometry of the round shape sensor to be computed from single-channel pixel intensity in simply two steps using only 30 captures. First, given the known intrinsic parameters K, camera calibration (Fig. 3) is performed using 29 captures in a 3D-printed indentation-based setup to estimate the extrinsic parameters of rotation matrix A and translation vector b, as well as the sensor surface reference projection D. Next, the depth mapping function M is calibrated by capturing a single image of a ball of known size pressed onto the sensor [6]. The mapping function from the pixel coordinates (u,v) to the sensor coordinates (x,y,z) can be expressed as:

$$\begin{bmatrix} x \\ y \\ z \end{bmatrix} = A^{-1} \left((D(u, v) - M(I_{\Delta}(u, v))) K^{-1} \begin{bmatrix} u \\ v \\ 1 \end{bmatrix} - b \right), \quad (1)$$

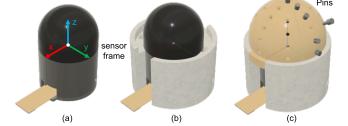


Fig. 3: Camera Calibration. We calibrate the intrinsic parameters and distortion using a calibration board. We 3D print a dome structure with predetermined holes, and by inserting pins at known coordinates, we are able to obtain pair-wise 3D and 2D points. The camera pose is then obtained using OpenCV's solvePnP function.

which transforms grayscale intensity images to a depth map expressed in the sensor coordinates. Moreover, R-Tac sensor is capable of detecting both deformation and slip events. We trained a lightweight neural network for slippage detection.

We quantify the reconstruction error by leveraging ground truth indentation information obtained from 3D-printed hemispherical shape indicators containing various testing indenters. We collected 215 testing configurations, each with paired sensor outputs and ground truth reprojection images. The sensor achieves a mean absolute error (L1 error) reconstruction loss of $0.35\ mm$, and a median loss of $0.28\ mm$, with 60% of reconstruction losses below $0.3\ mm$. In terms of computational speed, the depth mapping process takes less than $10\ ms$, ensuring real-time performance for robotic applications.

IV. CONCLUSION

In this work, we present R-Tac, a round-shaped, low-cost monochrome vision-based tactile sensor that achieves pixel-level surface reconstruction at a high-frequency of 120 Hz. We have also developed an easy-to-deploy calibration method that relies solely on 3D-printed setups, requiring only a few captures to achieve robust performance. R-Tac is designed to be compatible with the fingertips of current dexterous robotic hands, such as the Allegro Hand and Leap Hand, enabling them to perform various manipulation and exploration tasks. To support further research and community development, the design of R-Tac is open-sourced.

REFERENCES

- R. S. Dahiya, G. Metta, M. Valle, and G. Sandini, "Tactile sensing—from humans to humanoids," *IEEE transactions on robotics*, vol. 26, no. 1, pp. 1–20, 2009.
- [2] H. Xue, J. Ren, W. Chen, G. Zhang, Y. Fang, G. Gu, H. Xu, and C. Lu, "Reactive diffusion policy: Slow-fast visual-tactile policy learning for contact-rich manipulation," arXiv preprint arXiv:2503.02881, 2025.
- [3] S. Zhang, Z. Chen, Y. Gao, W. Wan, J. Shan, H. Xue, F. Sun, Y. Yang, and B. Fang, "Hardware technology of vision-based tactile sensor: A review," *IEEE Sensors Journal*, vol. 22, no. 22, pp. 21410–21427, 2022.
- [4] W. Yuan, S. Dong, and E. H. Adelson, "Gelsight: High-resolution robot tactile sensors for estimating geometry and force," *Sensors*, vol. 17, no. 12, p. 2762, 2017.
- [5] B. Ward-Cherrier, N. Pestell, L. Cramphorn, B. Winstone, M. E. Giannaccini, J. Rossiter, and N. F. Lepora, "The tactip family: Soft optical tactile sensors with 3d-printed biomimetic morphologies," *Soft robotics*, vol. 5, no. 2, pp. 216–227, 2018.
- [6] C. Lin, Z. Lin, S. Wang, and H. Xu, "Dtact: A vision-based tactile sensor that measures high-resolution 3d geometry directly from darkness," in *IEEE International Conference on Robotics and Automation* (ICRA), 2023.
- [7] Y. Wu, Y. Chen, Z. Zhu, X. Qin, and C. Xiao, "Humanft: A human-like fingertip multimodal visuo-tactile sensor," arXiv preprint arXiv:2410.10353, 2024.
- [8] W. Li, M. Wang, J. Li, Y. Su, D. K. Jha, X. Qian, K. Althoefer, and H. Liu, "L3 f-touch: A wireless gelsight with decoupled tactile and three-axis force sensing," *IEEE Robotics and Automation Letters* (RA-L), vol. 8, no. 8, pp. 5148–5155, 2023.
- [9] Z. Zhao, W. Li, Y. Li, T. Liu, B. Li, M. Wang, K. Du, H. Liu, Y. Zhu, Q. Wang, et al., "Embedding high-resolution touch across robotic hands enables adaptive human-like grasping," Nature Machine Intelligence, pp. 1–12, 2025.
- [10] J. Hu, S. Cui, S. Wang, R. Wang, and Y. Wang, "Active shape reconstruction using a novel visuotactile palm sensor," *Biomimetic Intelligence and Robotics*, vol. 4, no. 3, p. 100167, 2024.
- [11] M. H. Tippur and E. H. Adelson, "Gelsight360: An omnidirectional camera-based tactile sensor for dexterous robotic manipulation," in IEEE International Conference on Soft Robotics (RoboSoft), 2023.
- [12] W. K. Do and M. Kennedy, "Densetact: Optical tactile sensor for dense shape reconstruction," in *IEEE International Conference on Robotics* and Automation (ICRA), 2022.
- [13] J. Di, Z. Dugonjic, W. Fu, T. Wu, R. Mercado, K. Sawyer, V. R. Most, G. Kammerer, S. Speidel, R. E. Fan, et al., "Using fiber optic bundles to miniaturize vision-based tactile sensors," arXiv preprint arXiv:2403.05500, 2024.
- [14] B. Romero, F. Veiga, and E. Adelson, "Soft, round, high resolution tactile fingertip sensors for dexterous robotic manipulation," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2020.
- [15] M. L. Hammock, A. Chortos, B. C.-K. Tee, J. B.-H. Tok, and Z. Bao, "25th anniversary article: the evolution of electronic skin (e-skin): a brief history, design considerations, and recent progress," *Advanced materials*, vol. 25, no. 42, pp. 5997–6038, 2013.
- [16] M. H. Tippur and E. H. Adelson, "Rainbowsight: A family of generalizable, curved, camera-based tactile sensors for shape reconstruction," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2024.
- [17] A. Padmanabha, F. Ebert, S. Tian, R. Calandra, C. Finn, and S. Levine, "Omnitact: A multi-directional high-resolution touch sensor," in *IEEE International Conference on Robotics and Automation (ICRA)*, 2020.
- [18] D. F. Gomes, Z. Lin, and S. Luo, "Geltip: A finger-shaped optical tactile sensor for robotic manipulation," in *IEEE/RAS International Conference on Intelligent Robots and Systems (IROS)*, 2020.
- [19] H. Sun, K. J. Kuchenbecker, and G. Martius, "A soft thumb-sized vision-based sensor with accurate all-round force perception," *Nature Machine Intelligence*, vol. 4, no. 2, pp. 135–145, 2022.
- [20] O. Azulay, N. Curtis, R. Sokolovsky, G. Levitski, D. Slomovik, G. Lilling, and A. Sintov, "Allsight: A low-cost and high-resolution round tactile sensor with zero-shot learning capability," *IEEE Robotics* and Automation Letters (RA-L), vol. 9, no. 1, pp. 483–490, 2023.
- [21] S. Cui, S. Wang, C. Zhang, R. Wang, B. Zhang, S. Zhang, and Y. Wang, "Gelstereo biotip: Self-calibrating bionic fingertip visuotactile sensor for robotic manipulation," *IEEE/ASME Transactions on Mechatronics (TMECH)*, vol. 29, no. 4, pp. 2451–2462, 2024.