

GRAPH NEIGHBORHOOD ATTENTIVE POOLING

Anonymous authors

Paper under double-blind review

ABSTRACT

Network representation learning (NRL) is a powerful technique for learning low-dimensional vector representation of high-dimensional and sparse graphs. Most studies explore the structure and meta data associated with the graph using random walks and employ a unsupervised or semi-supervised learning schemes. Learning in these methods is context-free, because only a single representation per node is learned. Recently studies have argued on the sufficiency of a single representation and proposed a context-sensitive approach that proved to be highly effective in applications such as link prediction and ranking.

However, most of these methods rely on additional textual features that require RNNs or CNNs to capture high-level features or rely on a community detection algorithm to identifying multiple contexts of a node.

In this study, without requiring additional features nor a community detection algorithm, we propose a novel context-sensitive algorithm called GAP that learns to attend on different part of a node’s neighborhood using attentive pooling networks. We show the efficacy of GAP using three real-world datasets on link prediction and node clustering tasks and compare it against 10 popular and state-of-the-art (SOTA) baselines. GAP consistently outperforms them and achieves up to $\approx 9\%$ and $\approx 20\%$ gain over the best performing methods on link prediction and clustering tasks, respectively.

1 INTRODUCTION

NRL is a powerful technique to learn representation of graphs. Such a representation gracefully lends itself to a wide variety of network analysis tasks, such as link prediction, node clustering, node classification, recommendation, and so forth.

In most studies, the learning is done in a context-free fashion. That is, the representation of a node characterizes just a single aspect of the node, for instance, the local or global neighborhood of a node. Recently, a complementary line of research has questioned the sufficiency of single representations and considered a context-sensitive approach. Given a node, this approach projects it to different points in a space depending on other contexts its coupled with. A context node can be sampled from a neighborhood (Tu et al., 2017; Zhang et al., 2018), random walk, and so on. In this study we sample from a node neighborhood (nodes connected by an edge). Thus, in the learning process of our approach a source node’s representation changes depending on the target (context) node it is accompanied by. A related notion (Peters et al., 2018; Devlin et al., 2018) in NLP has significantly improved SOTA across several NLP tasks. NRL studies have shown a context-sensitive approach significantly outperform previous context-free SOTA methods in link-prediction task.

In this paper we propose GAP (**G**raph neighborhood **a**ttentive **p**ooling), which is inspired by *attentive pooling networks* (APN) (dos Santos et al., 2016), originally proposed for solving the problem of pair ranking in NLP. For instance, given a question q , and a set of answers $A = \{a_1, \dots, a_z\}$, an APN can be trained to rank the answers in A with respect to q by using a two-way attention mechanism. APN is based on the prevalent deep learning formula for SOTA NLP, that is, *embed, encode, attend, predict* (Honnibal, 2018). Given a question-answer pair (q, a_i) , the APN model first projects the embedding of the pairs using two separate encoders, and the encoder can be a CNN or LSTM. The projection helps to capture n-gram context information and/or long-term dependencies in the input sequence. Next, a soft-alignment matrix is obtained by a mutual-attention mechanism that transforms these projections using a parameter matrix. Attention vectors are then computed through a column-wise and row-wise pooling operations on the alignment matrix. Finally, the weighted sum

of each of the above projections by its respective attention vector is computed to obtain the representations of the question and answer. Each candidate answer a_i is then ranked according to its similarity with the question q computed using the representations of q and a_i .

Recently, APN have been applied to context-sensitive NRL by Tu et al. (2017), and the inputs are textual information attached with a pair of incident nodes of edges in a graph. Such information, however, has the added overhead of encoding textual information.

Though we adopt APN in GAP, we capitalize on the graph neighborhood of nodes to avoid the need for textual documents without compromising the quality of the learned representations. Our hypothesis is that one can learn high-quality context-sensitive node representations just by mutually attending to the graph neighborhood of a node and its context node. To achieve this, we naturally assume that the order of nodes in the graph neighborhood of a node is arbitrary. Moreover, we exploit this assumption to simplify the APN model by removing the expensive encode phase.

Akin to textual features in APN, GAP simply uses graph neighborhood of nodes. That is, for every node in the graph we define a graph neighborhood function to build a fixed size neighborhood sequence, which specifies the input of GAP. In the APN model, the *encoder* phase is usually required to capture high-level features such as n-grams, and long term and order dependencies in textual inputs. As we have no textual features and due to our assumption that there is no ordering in the graph neighborhood of nodes we can effectively strip off the encoder. The encoder is the expensive part of APN as it involves a RNN or CNN, and hence GAP can be trained faster than APN.

This simple yet empirically fruitful modification of the APN model enables GAP to achieve SOTA performance on link prediction and node clustering tasks using three real world datasets. Furthermore, we have empirically shown that GAP is more than 2 times faster than an APN like NRL algorithm based on text input. In addition, the simplification in GAP does not introduce new hyperparameters other than the usual ones, such as the learning rate and sequence length in APN.

2 APN ARCHITECTURE

For the sake of being self-contained, here we briefly describe the original APN architecture. We are given a pair of natural language texts (x, y) as input, where $x = (w_1, \dots, w_X)$ and $y = (w_1, \dots, w_Y)$ are a sequence of words of variable lengths, and each word w_i is a sample from a vocabulary \mathbb{V} , $X = |x|$, $Y = |y|$, and X and Y could be different. The APN’s forward execution is shown in Fig. 1(A) and in the following we describe each component.

Embed: First embedding matrices of x and y are constructed through a lookup operation on an embedding matrix $\mathbf{E} \in \mathbb{R}^{d \times |\mathbb{V}|}$ of words, where d is the embedding dimension. That is, for both x and y , respectively, embedding matrices $\mathbf{X} = [w_1, \dots, w_X]$ and $\mathbf{Y} = [w_1, \dots, w_Y]$ are constructed by concatenating embeddings w_i of each word w_i in x and y , the *Embed* box in Fig. 1(A).

Encode: Each embedding matrix is then projected using a CNN or BI-LSTM encoder to capture inherent high-level features, the *Encode* box in Fig. 1(A). More formally, the embedded texts $\mathbf{X} \in \mathbb{R}^{d \times X}$, $\mathbf{Y} \in \mathbb{R}^{d \times Y}$ are projected as $\mathbf{X}_{enc} = f(\mathbf{X}, \Theta)$ and $\mathbf{Y}_{enc} = f(\mathbf{Y}, \Theta)$ where f is the encoder, CNN or BI-LSTM, Θ is the set of parameters of the encoder, and $\mathbf{X}_{enc} \in \mathbb{R}^{c \times X}$ and $\mathbf{Y}_{enc} \in \mathbb{R}^{c \times Y}$, where c is the number of filters or hidden features of the CNN and BI-LSTM, respectively.

Attend: In the third step, a parameter matrix $\mathbf{P} \in \mathbb{R}^{c \times c}$ is introduced so as to learn a similarity or soft-alignment matrix $\mathbf{A} \in \mathbb{R}^{X \times Y}$ between the sequence projections \mathbf{X}_{enc} and \mathbf{Y}_{enc} as:

$$\mathbf{A} = \tanh(\mathbf{X}_{enc}^T \mathbf{P} \mathbf{Y}_{enc})$$

Then unnormalized attention weight vectors $\mathbf{x}' \in \mathbb{R}^X$ and $\mathbf{y}' \in \mathbb{R}^Y$ are obtained through a column-wise and row-wise max-pooling operations on \mathbf{A} , respectively as $x'_i = \max(\mathbf{A}_{i,:})$, $y'_j = \max(\mathbf{A}_{:,j})$, where $0 \leq i < X$, $0 \leq j < Y$ and $\mathbf{A}_{i,:}$ and $\mathbf{A}_{:,j}$ are the i -th and j -th row and column of \mathbf{A} , respectively. Next, the attention vectors are normalized using softmax, $\mathbf{x} = \text{softmax}(\mathbf{x}')$ and $\mathbf{y} = \text{softmax}(\mathbf{y}')$. Finally, the normalized attention vectors are used to compute the final representations as $\mathbf{r}_x = \mathbf{X}_{enc} \cdot \mathbf{x}^T$ and $\mathbf{r}_y = \mathbf{Y}_{enc} \cdot \mathbf{y}^T$.

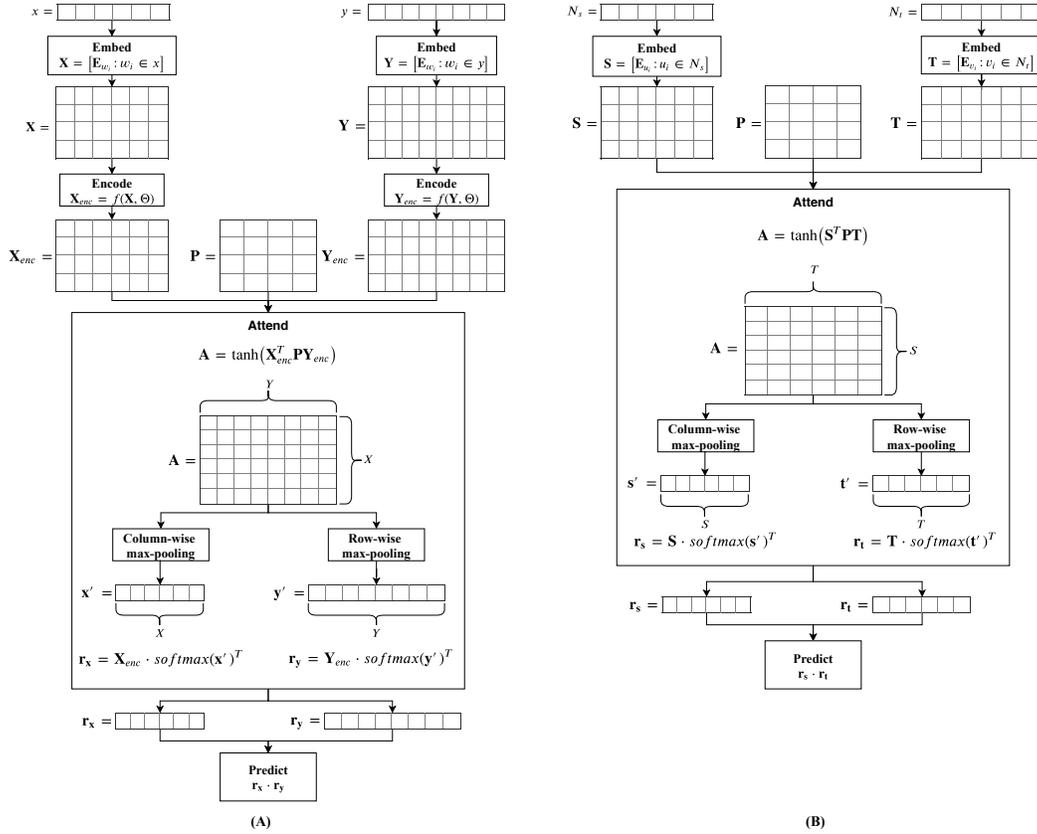


Figure 1: The APN (A) and GAP (B) models forward execution for question answering and context-sensitive node representation, respectively.

Predict: In the last step, the representations r_x and r_y will be used for ranking depending on the task on hand. For instance, in a question and answer setting, each candidate answer’s representation r_y will be ranked based on its similarity score with the question’s representation r_x .

3 GAP

GAP adopts the APN model for learning the representations of node pairs in a graph $G = (V, E)$ with a set of n nodes V and m edges E . G can be a directed or undirected and weighted or unweighted graph. Without loss of generality we assume that G is an unweighted directed graph.

We define a neighborhood function $N : V \rightarrow 2^V$, which maps each node $u \in V$ to a set of nodes $N_u \subseteq V$. A simple way of materializing N_u is to consider the first-order neighbors of u , that is, $N_u = [v : (u, v) \in E \vee (v, u) \in E]$. An important assumption that we have on N_u is that the ordering of the nodes in N_u is not important. GAP capitalizes on this assumption to simplify the APN model and achieve SOTA performance. Even though one can explore a more sophisticated neighborhood functions, in this study we simply consider the first order neighborhood.

Our goal is to learn node representations using the simplified APN based on the node neighborhood function N . Hence, akin to the input text pairs in APN, we consider a pair of neighborhood sequences $N_s = (u_1, \dots, u_S)$ and $N_t = (v_1, \dots, v_T)$ associated with a pair $(s, t) \in E$ of nodes s and t , and $S = |N_s|$ and $T = |N_t|$. Without loss of generality we consider $S = T$. Recall that we assume the order of nodes in N_s and N_t is arbitrary.

Dataset	#Nodes	#Edges	Features
Cora	2277	5214	Paper Abstract
Zhihu	10000	43894	User post
Email	1005	25571	NA

Table 1: Summary of datasets, the *Features* column is relevant to some of the baselines not GAP

Given a source node s , we seek to learn multiple context-sensitive embeddings of s with respect to a target node t it is paired with. In principle one can learn using all pairs of nodes, however that is not scalable, and hence we restrict learning between pairs in E .

GAP’s forward execution model is shown in Fig 1(B), and learning starts by embedding N_s and N_t , respectively, as $\mathbf{S} = (\mathbf{u}_1, \dots, \mathbf{u}_S)$ and $\mathbf{T} = (\mathbf{v}_1, \dots, \mathbf{v}_T)$. Since there is no order dependency between the nodes in N_s or N_t , besides being a neighbor of the respective node, we leave out the CNN or BI-LSTM based projections of \mathbf{S} and \mathbf{T} that could capture the dependencies. *No encoder!*

Thus, the next step of GAP is mutually attending on the embeddings, \mathbf{S} and \mathbf{T} , of the graph neighborhood of the node pairs; the *Attend* box of 1(B). That is, we employ the trainable parameter matrix $\mathbf{P} \in \mathbb{R}^{d \times d}$ and compute the soft-alignment matrix, \mathbf{A} , between the neighbors of s and t .

$$\mathbf{A} = \tanh(\mathbf{S}^T \mathbf{P} \mathbf{T}) \quad (1)$$

Here \mathbf{A} is a soft-alignment matrix between every pair of nodes, $(u, v) \in N_s \times N_t$. Therefore, for each axis of \mathbf{A} , we proceed by pooling the maximum alignment score for each node to obtain the unnormalized attention vectors $\mathbf{s}'_i = \max(\mathbf{A}_{i,:})$ and $\mathbf{t}'_j = \max(\mathbf{A}_{:,j})$. As a result of the pooling operations, each neighbor $u \in N_s$ of the source node, s , selects a neighbor $v \in N_t$ of the target node, t , with the maximum alignment or similarity score. A similar selection is done for $v \in N_t$. This enables the source and target neighborhood sequences of the pair to influence each other in order to learn a context-sensitive representation of s and t . The normalized attention vectors are then obtained by applying softmax as $\mathbf{s} = \text{softmax}(\mathbf{s}')$ and $\mathbf{t} = \text{softmax}(\mathbf{t}')$. Ultimately, we compute the context-sensitive representations \mathbf{r}_s and \mathbf{r}_t of the source and target nodes s and t , respectively as $\mathbf{r}_s = \mathbf{S} \cdot \mathbf{s}^T$ and $\mathbf{r}_t = \mathbf{T} \cdot \mathbf{t}^T$.

Optimization: The objective of GAP is to maximize the likelihood of the graph (edges) by predicting edge similarities using the dot product of the source and target representations as $\mathbf{r}_s \cdot \mathbf{r}_t$; the *Predict* box of Fig 1(B). Hence we employ a hard-margin loss given in Eq. 2.

$$\mathcal{L}(s, t) = \max(0, 1 - \mathbf{r}_s \cdot \mathbf{r}_t + \mathbf{r}_s \cdot \mathbf{r}_t^-) \quad (2)$$

where \mathbf{r}_t^- is the representation of a negative target node t^- , that is $(s, t^-) \notin E$. The goal is to learn, in an unsupervised fashion, a context-sensitive embedding of nodes that enable us to rank the positive edges $(s, t) \in E$ higher than the negative pairs (s, t^-) .

Finally a word on the computational complexity of GAP that is proportional to the the number of edges, as we are considering each edge as an input pair.

4 EXPERIMENTAL EVALUATION

In this section we provide an empirical evaluation of GAP. To this end, experiments are carried out using the following datasets, and a basic summary is given in Table 1.

1. Cora Tu et al. (2017); Zhang et al. (2018): is a citation network dataset, where a node represents a paper and an edge $(u, v) \in E$ represents that paper u has cited paper v .
2. Zhihu Tu et al. (2017); Zhang et al. (2018): is the biggest social network for Q&A and it is based in China. Nodes are the users and the edges are follower relations between the users.
3. Email Leskovec et al. (2007): is an email communication network between the largest European research institutes. A node represents a person and an edge $(u, v) \in G$ denotes that person u has sent an email to v .

Dataset	#Neighborhood (S and T)	Dropout	Learning rate	Representation size
Cora	100	0.5	0.0001	200
Zhihu	250	0.65	0.0001	200
Email	100	0.8	0.0001	200

Table 2: Conifguration of GAP

The first two datasets have features (documents) associated to nodes. For Cora, abstract of papers and Zhihu user posts. Some of the baselines, discussed bellow, they require textual information, and hence they consume the aforementioned features. The Email dataset has ground-truth community assignment for nodes based on a persons affiliation to one of the 42 departments.

We compare our method against the following 10 popular and SOTA baselines grouped as:

- *Structure based methods*: DEEPWALK Perozzi et al. (2014), NODE2VEC Grover & Leskovec (2016), WALKLETS Perozzi et al. (2016), ATTENTIVEWALK Abu-El-Haija et al. (2017), LINE Tang et al. (2015):
- *Structure and attribute based methods*: TRIDNR Pan et al. (2016), TADW Yang et al. (2015), CENE Sun et al. (2016)
- *Context-sensitive*: CANE Tu et al. (2017), DMTE Zhang et al. (2018)

We are aware of another SOTA context-sensitive algorithm (Epasto & Perozzi, 2019) that do not require textual information, however we have not included it in our experiments because the source code is not available.¹ Now we report the experimental results carried out in two tasks, which are link prediction and node clustering. All experiments are performed using a 24-Core CPU and 125GB RAM Ubuntu 18.04 machine.

4.1 LINK PREDICTION

Link prediction is an important task that graph embedding algorithms are applied to. Particularly context-sensitive embedding techniques have proved to be well suited for this task. Similar to existing studies we perform this experiment using a fraction of the edges as a training set. We hold out the remaining fraction of the edges from the training phase and we will only reveal them during the test phase, results are reported using this set. All hyper-parameter tuning is performed by taking a small fraction of the training set as a validation set.

Setup: In-line with existing existing techniques (Tu et al., 2017; Zhang et al., 2018), the percentage of training edges ranges from 15% to 95% by a step of 10. The hyper-parameters of all algorithms are tuned using random-search. For some of the baselines, our results are consistent with what is reported in previous studies, and hence for Cora and Zhihu we simply report these results.

Except the “unavoidable” hyper-parameters (Eg. learning rate, regularization/dropout rate) that are common in all of the algorithms, our model has just one hyper-parameter which is the neighborhood sequence length (#Neighborhood = $S = T$), for nodes with smaller neighborhood size we use zero padding. As we shall verify later, GAP is not significantly affected by the choice of this parameter.

The quality of the prediction task is measured using the AUC score. AUC indicates the probability that a randomly selected pair $(u, w) \notin E$ will have a higher similarity score than an edge $(u, v) \in E$. Similarity between a pair of nodes is computed as the dot product of their representation. For all the algorithms the representation size – d is 200 and GAP’s configuration is shown in Table 2.

Results: The results of the empirical evaluations on the Cora, Zhihu, and Email datasets are reported in Tables 3, 4, and 5. GAP outperforms the SOTA baselines in all cases for Zhihu and Email, and in almost all cases for Cora. One can see that as we increase the percentage of training edges, performance increases for all the algorithms. As indicated by the “Gain” row, GAP achieves upto 9% improvement over SOTA context-sensitive techniques. Notably the gain is pronounced for smaller

¹We have contacted the authors and have been told that the code is not ready for release

Algorithm	% of training edges								
	15%	25%	35%	45%	55%	65%	75%	85%	95%
DEEPWALK	56.0	63.0	70.2	75.5	80.1	85.2	85.3	87.8	90.3
LINE	55.0	58.6	66.4	73.0	77.6	82.8	85.6	88.4	89.3
NODE2VEC	55.9	62.4	66.1	75.0	78.7	81.6	85.9	87.3	88.2
WALKLETS	69.8	77.3	82.8	85.0	86.6	90.4	90.9	92.0	93.3
ATTENTIVEWALK	64.2	76.7	81.0	83.0	87.1	88.2	91.4	92.4	93.0
TADW	86.6	88.2	90.2	90.8	90.0	93.0	91.0	93.0	92.7
TRIDNR	85.9	88.6	90.5	91.2	91.3	92.4	93.0	93.6	93.7
CENE	72.1	86.5	84.6	88.1	89.4	89.2	93.9	95.0	95.9
CANE	86.8	91.5	92.2	93.9	94.6	94.9	95.6	96.6	97.7
DMTE	91.3	93.1	93.7	95.0	96.0	97.1	97.4	98.2	98.8
GAP	95.8	96.4	97.1	97.6	97.6	97.6	97.8	98.0	98.2
GAIN%	4.5%	3.6%	3.4%	2.6%	1.6%	0.5%	0.4%		

Table 3: AUC score for link prediction on the Cora dataset

Algorithm	% of training edges								
	15%	25%	35%	45%	55%	65%	75%	85%	95%
DEEPWALK	56.6	58.1	60.1	60.0	61.8	61.9	63.3	63.7	67.8
LINE	52.3	55.9	59.9	60.9	64.3	66.0	67.7	69.3	71.1
NODE2VEC	54.2	57.1	57.3	58.3	58.7	62.5	66.2	67.6	68.5
WALKLETS	50.7	51.7	52.6	54.2	55.5	57.0	57.9	58.2	58.1
ATTENTIVEWALK	69.4	68.0	74.0	75.9	76.4	74.5	74.7	71.7	66.8
TADW	52.3	54.2	55.6	57.3	60.8	62.4	65.2	63.8	69.0
TRIDNR	53.8	55.7	57.9	59.5	63.0	64.2	66.0	67.5	70.3
CENE	56.2	57.4	60.3	63.0	66.3	66.0	70.2	69.8	73.8
CANE	56.8	59.3	62.9	64.5	68.9	70.4	71.4	73.6	75.4
DMTE	58.4	63.2	67.5	71.6	74.0	76.7	78.7	80.3	82.2
GAP	72.6	77.9	81.2	80.8	81.4	81.8	82.0	83.7	86.3
GAIN%	3.2%	9.9%	7.2%	5.1%	5.0%	5.1%	3.3%	3.4%	4.1%

Table 4: AUC score for link prediction on the Zhihu dataset

Algorithm	% of training edges								
	15%	25%	35%	45%	55%	65%	75%	85%	95%
DEEPWALK	69.2	71.4	74.1	74.7	76.6	76.1	78.7	75.7	79.0
LINE	65.6	71.5	73.8	76.0	76.7	77.8	78.5	77.9	78.8
NODE2VEC	66.4	68.6	71.2	71.7	72.7	74.0	74.5	74.4	76.1
WALKLETS	70.3	73.2	75.2	78.7	78.2	78.1	78.9	80.0	78.5
ATTENTIVEWALK	68.8	72.5	73.5	75.2	74.1	74.9	73.0	70.3	68.6
GAP	77.6	81.6	81.9	83.3	83.1	84.1	84.5	84.8	84.8
GAIN%	7.3%	8.4%	6.7%	4.6%	4.9%	6.0%	5.6%	4.8%	5.8%

Table 5: AUC score for link prediction on the Email dataset

values of percentage of edges used for training. This shows that GAP is suitable both in cases where there are several missing links and most of the links are present.

4.2 NODE CLUSTERING

Nodes in a network has the tendency to form cohesive structures based on some kinds of shared aspects. These structures are usually referred to as groups, clusters or communities and identifying them is an important task in network analysis. In this section we use the Email dataset that has ground truth communities, and there are 42 of them. Since this dataset has only structural information, we have excluded the baselines that require textual information.

Algorithm	%of training edges							
	25%		55%		75%		95%	
	NMI	AMI	NMI	AMI	NMI	AMI	NMI	AMI
DEEPWALK	41.3	28.6	53.6	44.8	50.6	42.4	57.6	49.9
LINE	44.0	30.3	49.9	38.2	53.3	42.6	56.3	46.5
NODE2VEC	46.6	35.3	45.9	35.3	47.8	38.5	53.8	45.5
WALKLETS	47.5	39.9	55.3	47.4	54.0	45.4	50.1	41.6
ATTENTIVEWALK	42.9	30.0	45.7	36.5	44.3	35.7	47.4	38.5
GAP	67.8	58.8	64.7	55.7	65.6	57.6	65.4	58.7
%Gain	20.3%		9.4%		11.0%		7.8%	

Table 6: NMI and AMI scores for node clustering experiment on the Email dataset. The Gain is with respect to the NMI only.

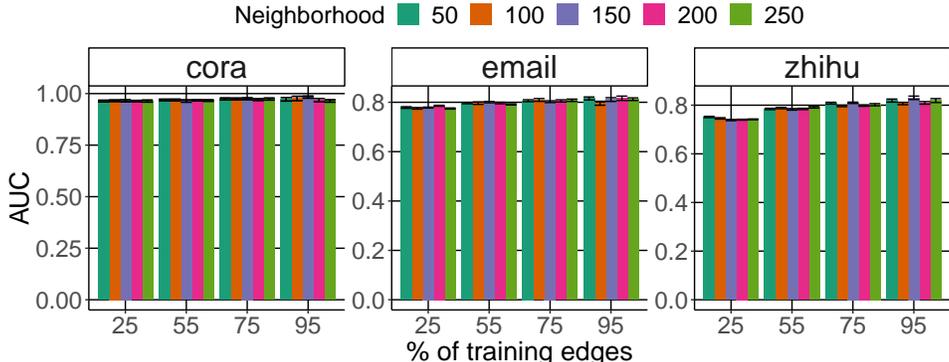


Figure 2: Sensitivity of GAP to the size of node’s neighborhood (S, T) on the link prediction task

Setup: Since each node belongs to exactly one cluster, we employ the Spectral Clustering algorithm to identify clusters. The learned representations of nodes by a certain algorithm are the input features of the clustering algorithm. In this experiment the percentage of training edges varies from 25% to 95% by a step of 20%, for the rest we use the same configuration as in the above experiment.

Given the ground truth community assignment y of nodes and the predicted community assignments \hat{y} , usually the agreement between y and \hat{y} are measured using mutual information $I(y, \hat{y})$. However, I is not bounded and difficult for comparing methods, hence we use two other variant of I (Vinh et al., 2010). Which are, the normalized mutual information $NMI(y, \hat{y})$, which simply normalizes I and adjusted mutual information $AMI(y, \hat{y})$, which adjusts or normalizes I to random chances.

Results: The results of this experiment are reported in Table 6, and GAP significantly outperforms all the baselines by upto 20% with respect to AMI score. Consistent to our previous experiment GAP performs well in both extremes for the value of the percentage of the training edges. Similar improvements are achieved for AMI score.

4.3 PARAMETER SENSITIVITY ANALYSIS

Here we first show the main hyper-parameter of GAP, which is the size of the neighborhood, #Neighborhood = $S = T$. Figures 2 and 3(A) show the effect of this paramter both for link prediction and node clustering tasks. In both cases we notice that GAP is not significantly affected by the change of values. We show the effect across different values of percentage and fixed (55%) of training edges for link prediction and node clustering tasks, respectively. Regardless of the percentage of training edges, we only see a small change of AUC (Fig 2), and NMI and AMI (Fig 3-a) across different values of #Neighborhood.

Next we analyze the run time of training GAP and our goal is to show the benefit of removing the encoder of APN and we do this by comparing GAP against CANE, which employs the exact APN ar-

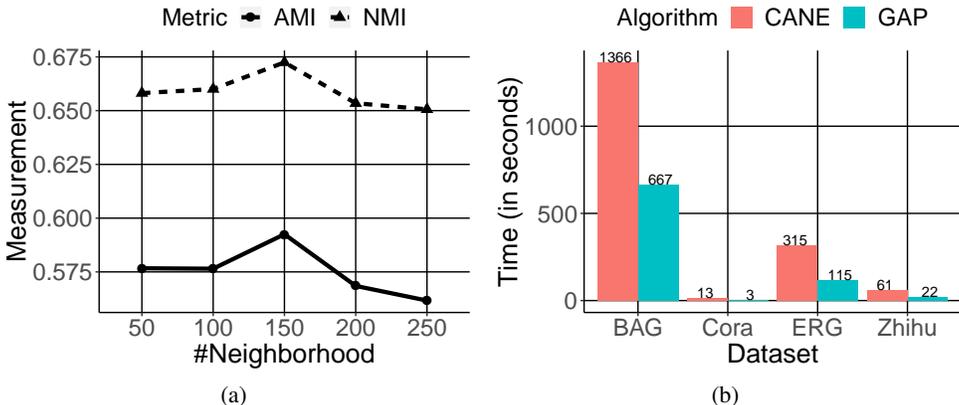


Figure 3: (a) Sensitivity of GAP to the size of node’s neighborhood on the node clustering task and (b) the run time comparison of GAP and CANE using two real and two synthetic datasets

chitecture. For this experiment we include two randomly generated graphs, using ErdősRényi (ERG) and BarabásiAlbert (BAG) models. ERG has 200K edges, and BAG has 1.5M edges. Figure 3(B) clearly shows that GAP is at least 2 times faster than CANE in all the graphs.

5 RELATED WORK

NRL is usually carried out by exploring the structure of the graph and meta data, such as node attributes, attached to the graph (Perozzi et al., 2014; Grover & Leskovec, 2016; Tang et al., 2015; Perozzi et al., 2016; Wang et al., 2016; Yang et al., 2015; Pan et al., 2016; Sheikh et al., 2019). Random walks are widely used to explore local/global neighborhood structures, which are then fed into a learning algorithm. The learning is carried out in unsupervised manner by maximizing the likelihood of observing the neighbor nodes and/or attributes of a center node.

Recently graph convolution networks have also been proposed for semi-supervised network analysis tasks (Kipf & Welling, 2017; Hamilton et al., 2017; Wu et al., 2019; Velickovic et al., 2017; Abu-El-Haija et al., 2019). These algorithms work by way of aggregating neighborhood features, with a down-stream objective based on partial labels of nodes, for example. All these methods are essentially different from our approach because they are context-free.

Context-sensitive learning is another paradigm to NRL that challenges the sufficiency of a single representation of a node for applications such as, link prediction, product recommendation, ranking. While some of these methods (Tu et al., 2017; Zhang et al., 2018) rely on textual information, others have also shown that a similar goal can be achieved using just the structure of the graph (Epasto & Perozzi, 2019). However, they require an extra step of persona decomposition that is based on microscopic level community detection algorithms to identify multiple contexts of a node. Unlike the first approaches our algorithm does not require extra textual information and with respect to the second ones our approach does not require any sort of community detection algorithm.

6 CONCLUSION

In this study we present a novel context-sensitive graph embedding algorithm called GAP. It consumes node neighborhood as input feature, which are constructed based on an important assumption that their ordering is arbitrary. To learn representations of nodes GAP employs attentive pooling networks (APN). By exploiting the above assumption it makes an important simplification of APN and gain more than 2X speed up over another SOTA method, which employs the exact APN. Furthermore, GAP consistently outperforms all the baselines and achieves upto $\approx 9\%$ and $\approx 20\%$ improvement over the best performing ones on the link prediction and node clustering tasks, respectively. In future we will investigate how node attributes can be incorporated and provide a theoretical framework on the relation between the neighborhood sampling and topological properties.

REFERENCES

- Sami Abu-El-Haija, Bryan Perozzi, Rami Al-Rfou, and Alex Alemi. Watch your step: Learning graph embeddings through attention. *CoRR*, abs/1710.09599, 2017. URL <http://arxiv.org/abs/1710.09599>.
- Sami Abu-El-Haija, Bryan Perozzi, Amol Kapoor, Hrayr Harutyunyan, Nazanin Alipourfarid, Kristina Lerman, Greg Ver Steeg, and Aram Galstyan. Mixhop: Higher-order graph convolutional architectures via sparsified neighborhood mixing. *CoRR*, abs/1905.00067, 2019. URL <http://arxiv.org/abs/1905.00067>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. *CoRR*, abs/1810.04805, 2018. URL <http://arxiv.org/abs/1810.04805>.
- Cícero Nogueira dos Santos, Ming Tan, Bing Xiang, and Bowen Zhou. Attentive pooling networks. *CoRR*, abs/1602.03609, 2016. URL <http://arxiv.org/abs/1602.03609>.
- Alessandro Epasto and Bryan Perozzi. Is a single embedding enough? learning node representations that capture multiple social contexts. *CoRR*, abs/1905.02138, 2019. URL <http://arxiv.org/abs/1905.02138>.
- Aditya Grover and Jure Leskovec. Node2vec: Scalable feature learning for networks. In *Proceedings of the 22Nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining*, KDD '16, pp. 855–864, New York, NY, USA, 2016. ACM. ISBN 978-1-4503-4232-2. doi: 10.1145/2939672.2939754. URL <http://doi.acm.org/10.1145/2939672.2939754>.
- William L. Hamilton, Rex Ying, and Jure Leskovec. Inductive representation learning on large graphs. *CoRR*, abs/1706.02216, 2017. URL <http://arxiv.org/abs/1706.02216>.
- Matthew Honnibal. Embed, encode, attend, predict: The new deep learning formula for state-of-the-art nlp models. 2018. URL <https://explosion.ai/blog/deep-learning-formula-nlp>.
- Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations (ICLR)*, 2017.
- Jure Leskovec, Jon Kleinberg, and Christos Faloutsos. Graph evolution: Densification and shrinking diameters. *ACM Trans. Knowl. Discov. Data*, 1(1), March 2007. ISSN 1556-4681. doi: 10.1145/1217299.1217301. URL <http://doi.acm.org/10.1145/1217299.1217301>.
- Shirui Pan, Jia Wu, Xingquan Zhu, Chengqi Zhang, and Yang Wang. Tri-party deep network representation. In *Proceedings of the Twenty-Fifth International Joint Conference on Artificial Intelligence, IJCAI'16*, pp. 1895–1901. AAAI Press, 2016. ISBN 978-1-57735-770-4. URL <http://dl.acm.org/citation.cfm?id=3060832.3060886>.
- Bryan Perozzi, Rami Al-Rfou, and Steven Skiena. Deepwalk: Online learning of social representations. *CoRR*, abs/1403.6652, 2014. URL <http://arxiv.org/abs/1403.6652>.
- Bryan Perozzi, Vivek Kulkarni, and Steven Skiena. Walklets: Multiscale graph embeddings for interpretable network classification. *CoRR*, abs/1605.02115, 2016. URL <http://arxiv.org/abs/1605.02115>.
- Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. *CoRR*, abs/1802.05365, 2018. URL <http://arxiv.org/abs/1802.05365>.
- Nasrullah Sheikh, Zekarias T. Kefato, and Alberto Montresor. gat2vec: Representation learning for attributed graphs. In *Journal of Computing*. Springer, May 2019.
- Xiaofei Sun, Jiang Guo, Xiao Ding, and Ting Liu. A general framework for content-enhanced network representation learning. *CoRR*, abs/1610.02906, 2016. URL <http://arxiv.org/abs/1610.02906>.

- Jian Tang, Meng Qu, Mingzhe Wang, Ming Zhang, Jun Yan, and Qiaozhu Mei. LINE: large-scale information network embedding. *CoRR*, abs/1503.03578, 2015. URL <http://arxiv.org/abs/1503.03578>.
- Cunchao Tu, Han Liu, Zhiyuan Liu, and Maosong Sun. CANE: Context-aware network embedding for relation modeling. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1722–1731, Vancouver, Canada, July 2017. Association for Computational Linguistics. doi: 10.18653/v1/P17-1158. URL <https://www.aclweb.org/anthology/P17-1158>.
- Petar Velickovic, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks. *ArXiv*, abs/1710.10903, 2017.
- Nguyen Xuan Vinh, Julien Epps, and James Bailey. Information theoretic measures for clusterings comparison: Variants, properties, normalization and correction for chance. *J. Mach. Learn. Res.*, 11:2837–2854, 2010.
- Daixin Wang, Peng Cui, and Wenwu Zhu. Structural deep network embedding. In *Proceedings of the 22Nd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, KDD '16*, pp. 1225–1234, New York, NY, USA, 2016. ACM. ISBN 978-1-4503-4232-2. doi: 10.1145/2939672.2939753. URL <http://doi.acm.org/10.1145/2939672.2939753>.
- Felix Wu, Tianyi Zhang, Amauri H. Souza Jr., Christopher Fifty, Tao Yu, and Kilian Q. Weinberger. Simplifying graph convolutional networks. *CoRR*, abs/1902.07153, 2019. URL <http://arxiv.org/abs/1902.07153>.
- Cheng Yang, Zhiyuan Liu, Deli Zhao, Maosong Sun, and Edward Y. Chang. Network representation learning with rich text information. In *Proceedings of the 24th International Conference on Artificial Intelligence, IJCAI'15*, pp. 2111–2117. AAAI Press, 2015. ISBN 978-1-57735-738-4. URL <http://dl.acm.org/citation.cfm?id=2832415.2832542>.
- Xinyuan Zhang, Yitong Li, Dinghan Shen, and Lawrence Carin. Diffusion maps for textual network embedding. In *Proceedings of the 32Nd International Conference on Neural Information Processing Systems, NIPS'18*, pp. 7598–7608, USA, 2018. Curran Associates Inc. URL <http://dl.acm.org/citation.cfm?id=3327757.3327858>.