

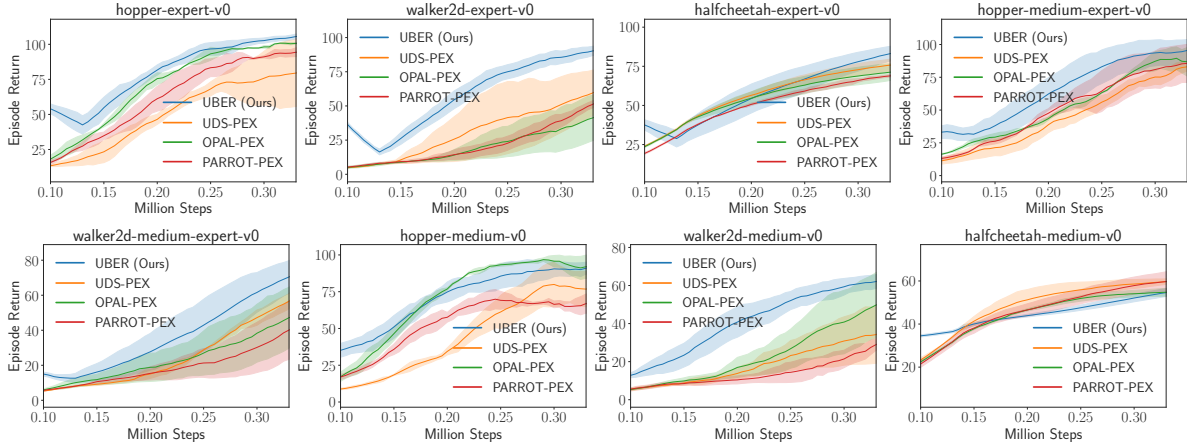


Figure 1: Comparison between UBER and baselines including unsupervised behavior extraction (OPAL and PARROT) and data-sharing method (UDS). We adopt a normalized score metric averaged with five random seeds.

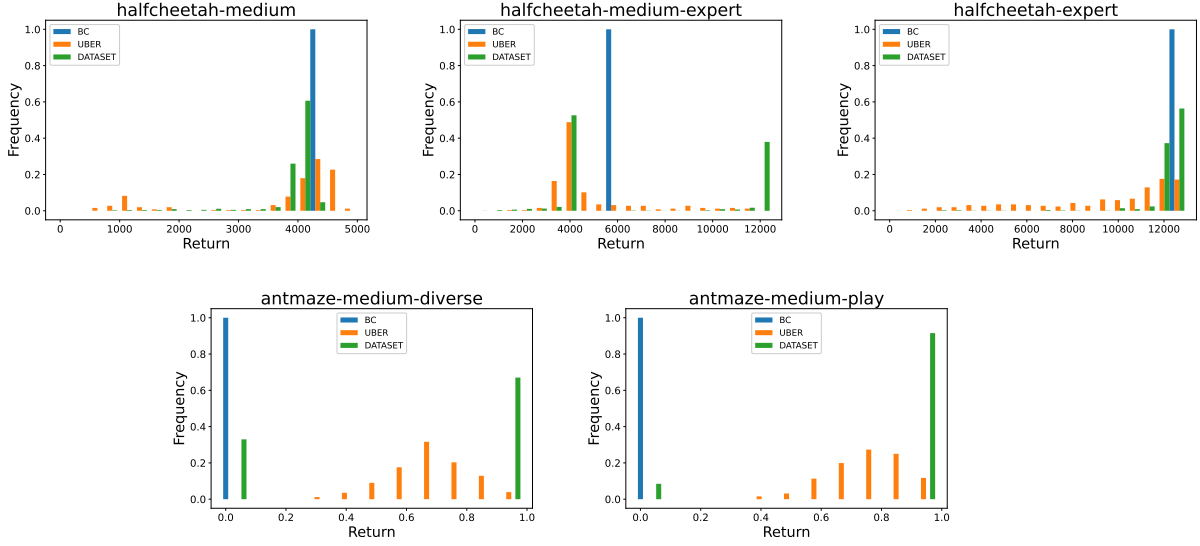


Figure 2: Frequency of each episode return of random intent priors, datasets, and behavior cloning policies on halfcheetah and antmaze tasks.