

CIFAR-10-WAREHOUSE: BROAD AND MORE REALISTIC TESTBEDS IN MODEL GENERALIZATION ANALYSIS

Xiaoxiao Sun^{1*}, Xingjian Leng^{1*}, Zijian Wang^{2*}, Yang Yang^{1*}, Zi Huang², Liang Zheng¹

¹ The Australian National University ² The University of Queensland

{first-name.last-name}@anu.edu.au¹

zijian.wang@uq.edu.au, huang@itee.uq.edu.au

In the supplementary material, we show some example images of different sources in CIFAR-10-W.

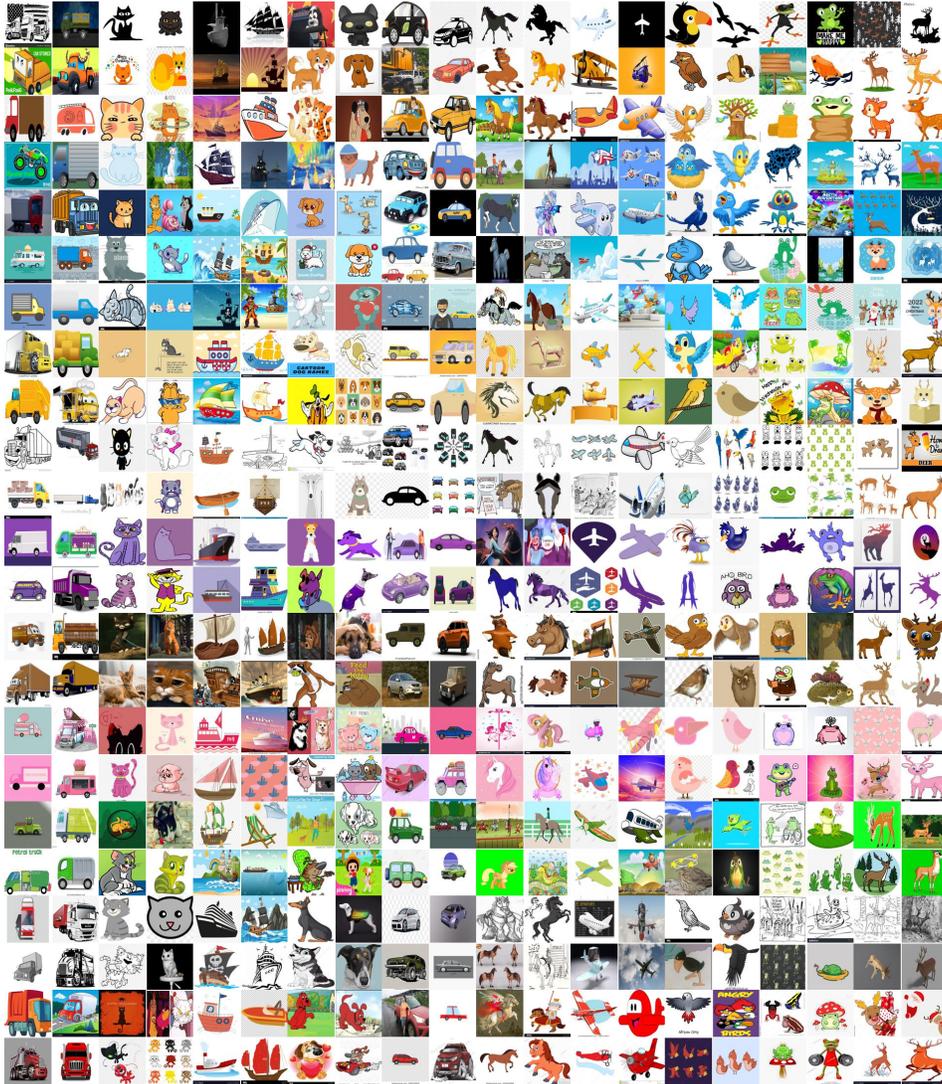


Figure 1: Cartoon images searched from Google with class names as keywords and 12 color options.

*Equal contribution.

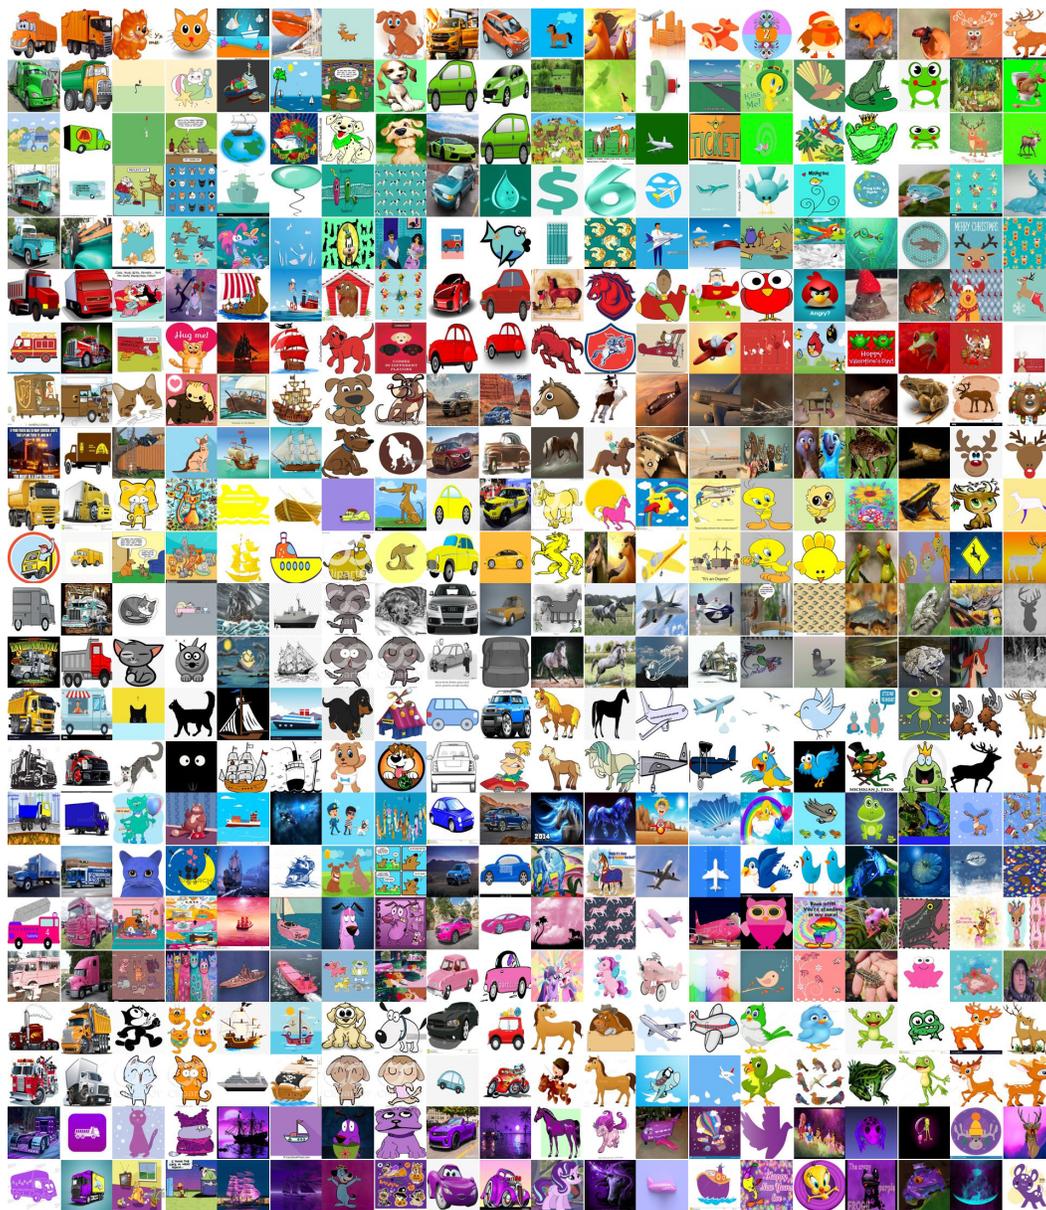


Figure 2: Cartoon images retrieved from Bing with class names as keywords and 12 color options.



Figure 3: Cartoon images searched from Baidu with class names as keywords and 12 color options.

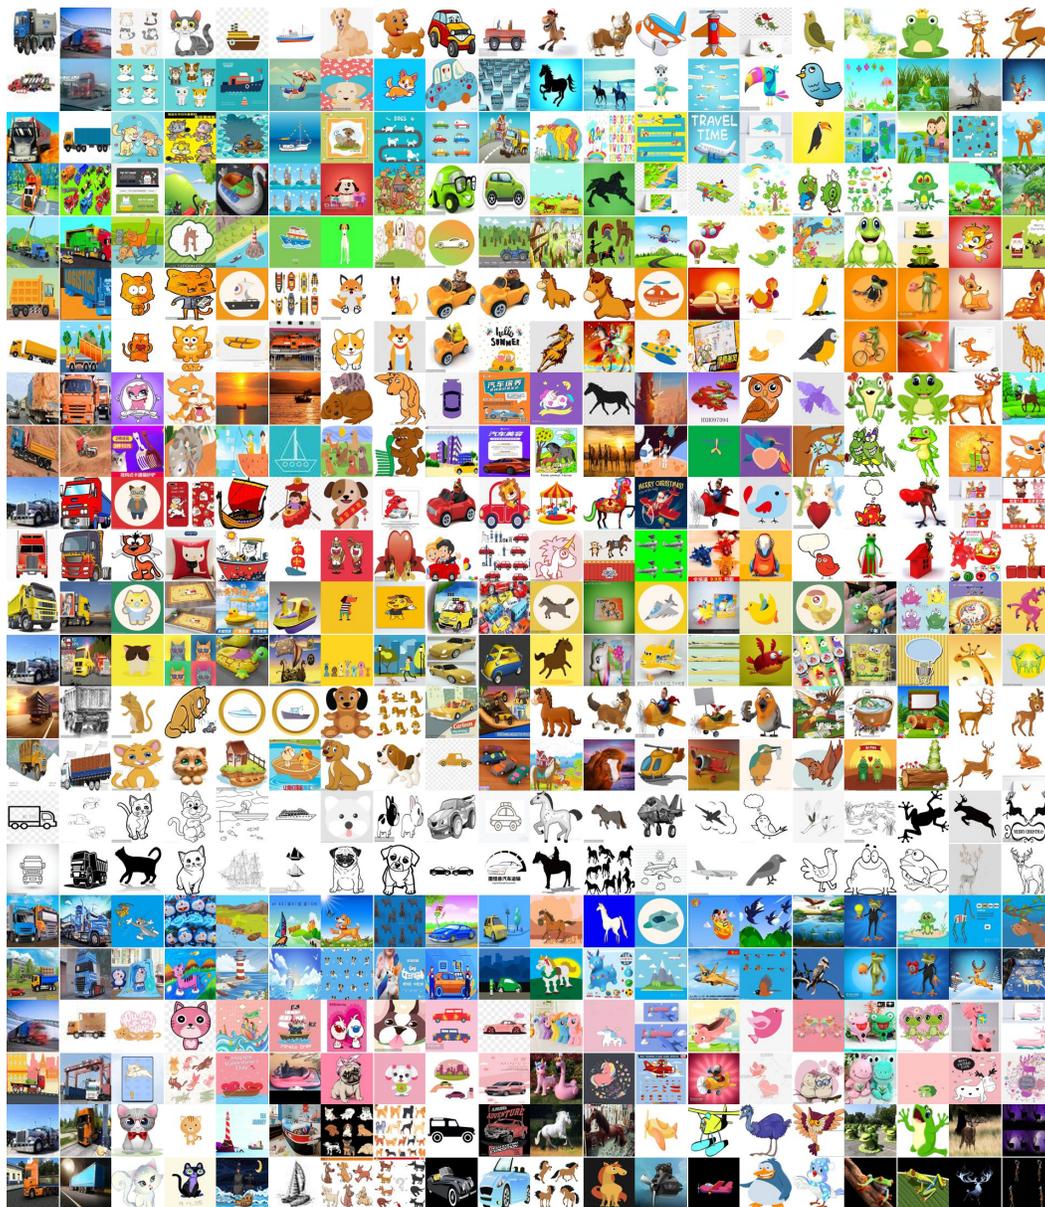


Figure 4: Cartoon images searched from 360 with class names as keywords and 12 color options.

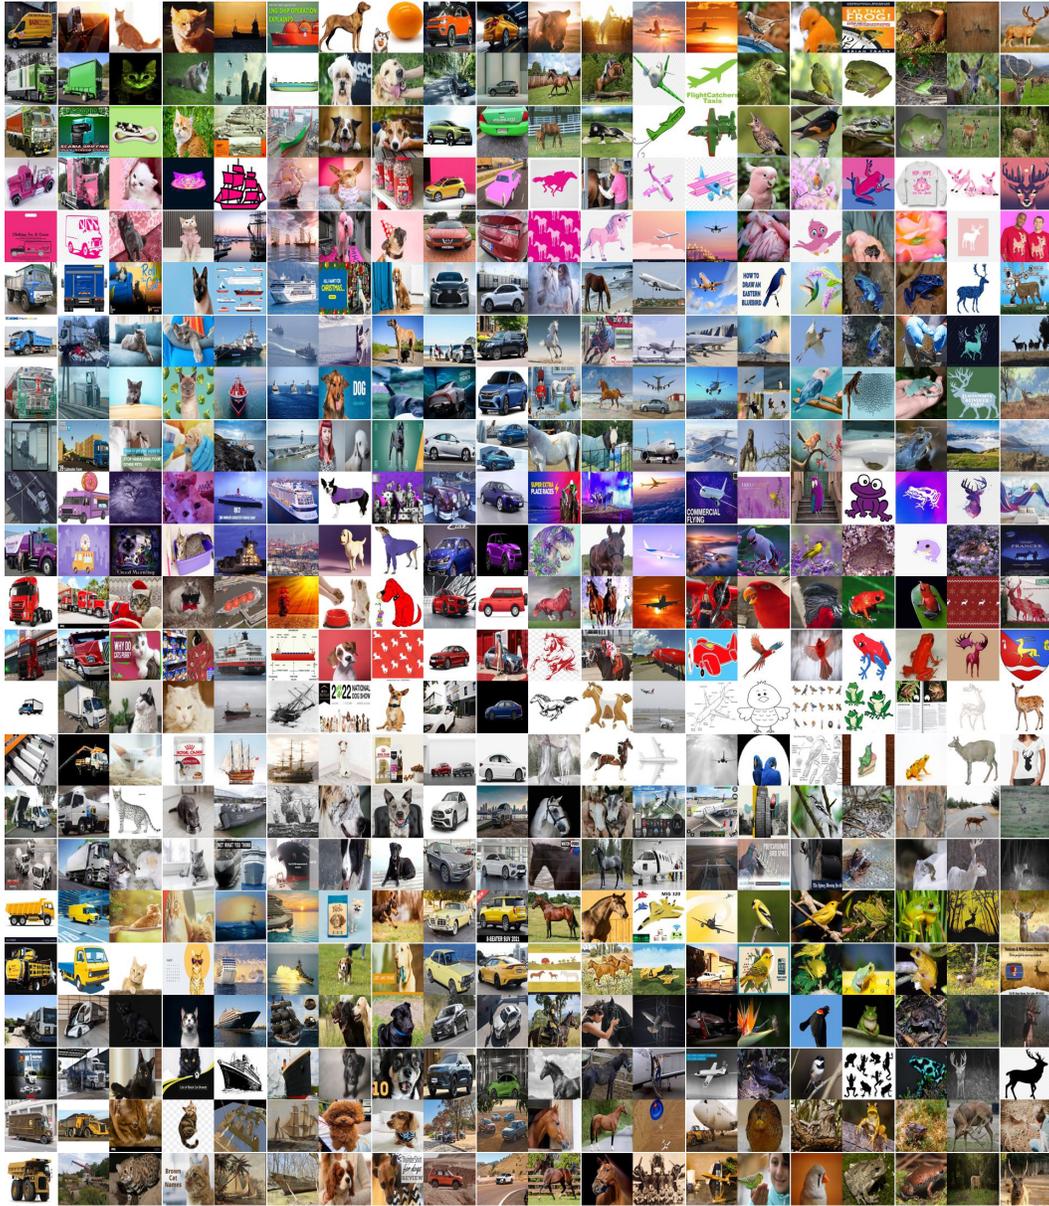


Figure 5: Images searched from Google with class names as keywords and 12 color options.

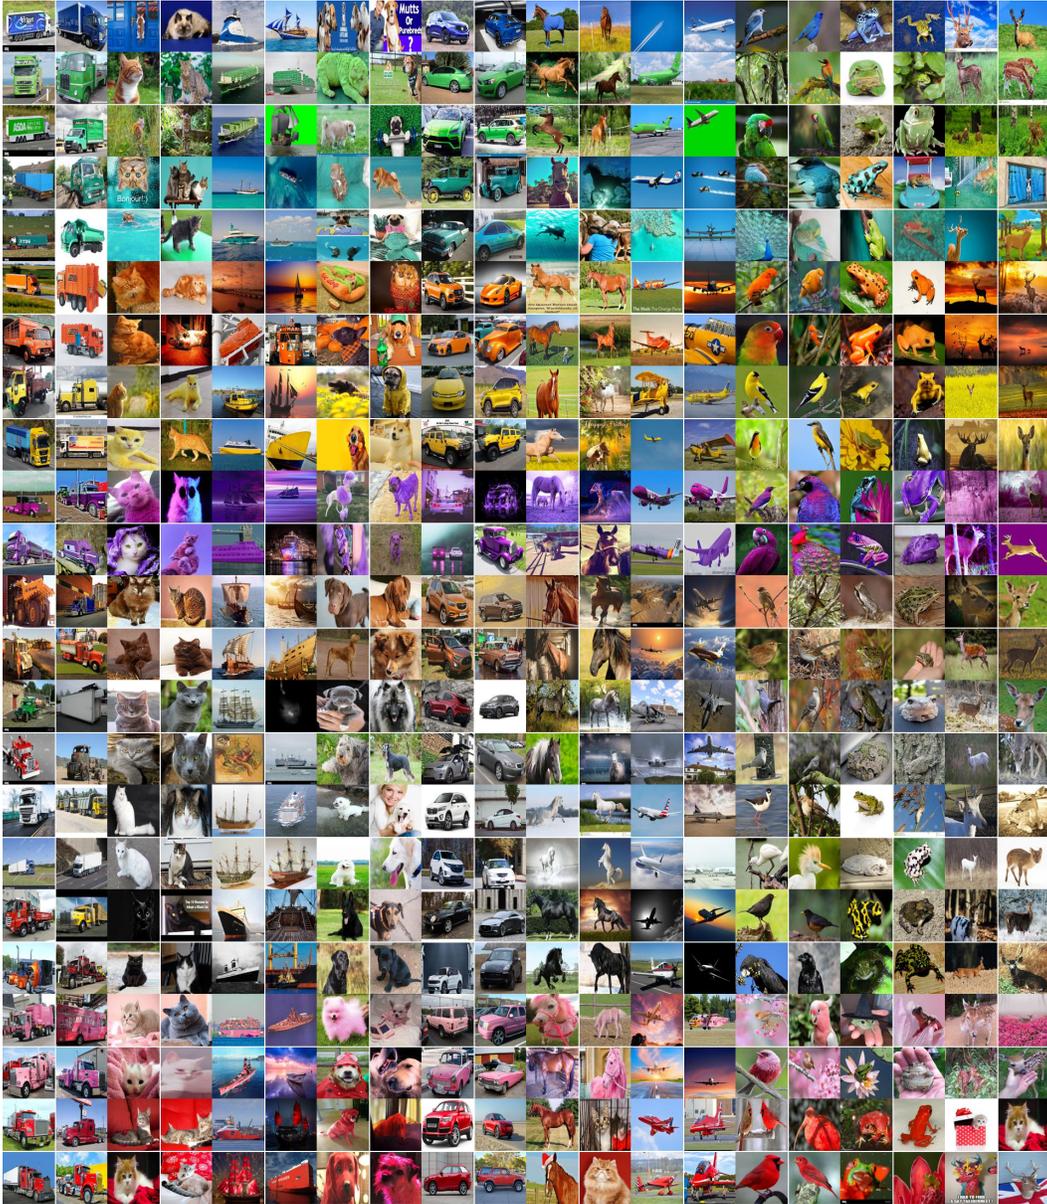


Figure 6: Images searched from Bing with class names as keywords and 12 color options.

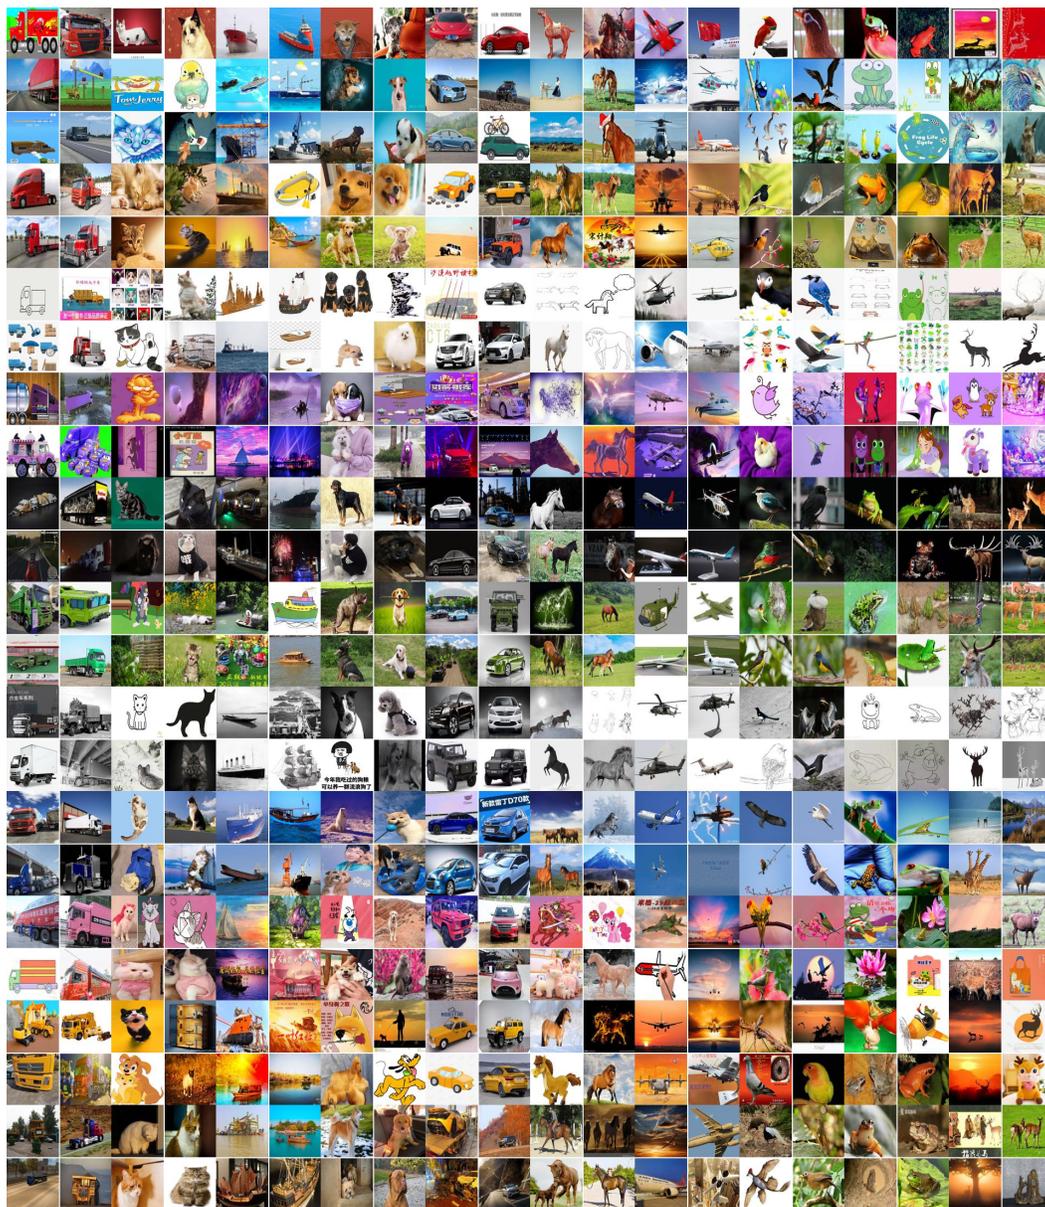


Figure 7: Images searched from Baidu with class names as keywords and 12 color options.



Figure 8: Images searched from 360 with class names as keywords and 12 color options.

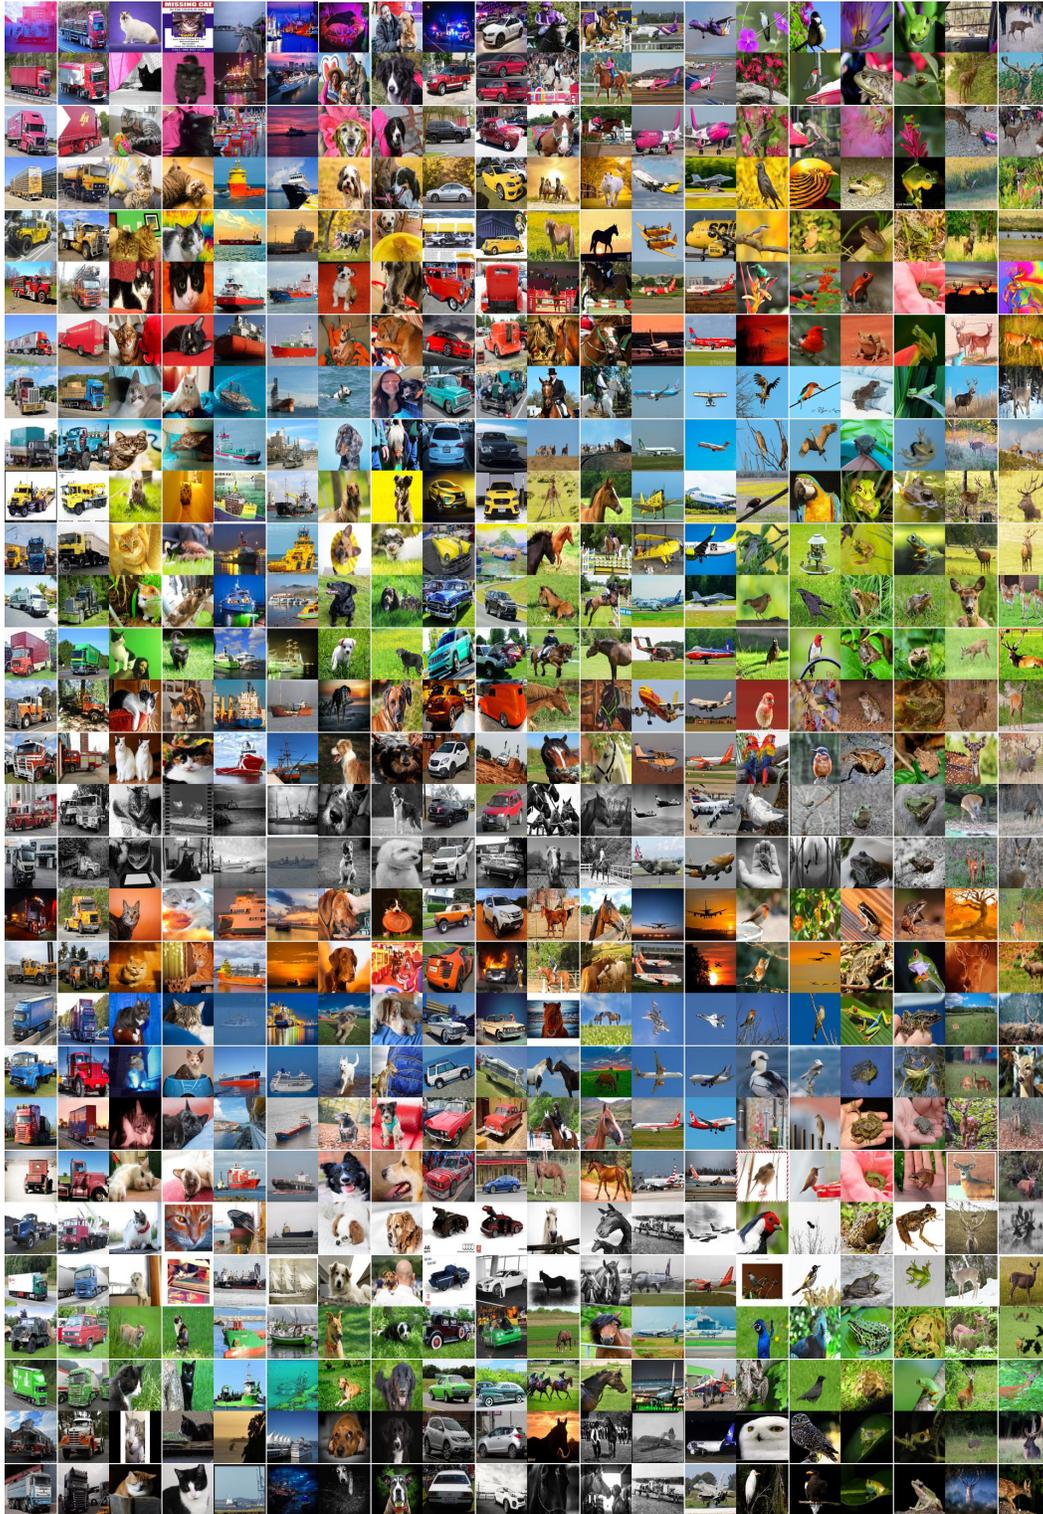


Figure 10: Images searched from Flickr engine with class names as keywords and 15 color options.



Figure 11: Images searched from Pexel with class names as keywords and 20 color options.



Figure 12: Images generated by the diffusion model using prompts of CIFAR-10-W diff. hard.



Figure 13: Images generated by the diffusion model using prompts of CIFAR-10-W diff..



Figure 14: Images generated by the diffusion model using prompts of CIFAR-10-W diff. cartoon.