

# ALLaM: LARGE LANGUAGE MODELS FOR ARABIC AND ENGLISH

Anonymous authors

Paper under double-blind review

## ABSTRACT

We present ALLaM: Arabic Large Language Model, a series of large language models to support the ecosystem of Arabic Language Technologies (ALT). ALLaM is carefully trained considering the values of *language alignment* and *knowledge transfer at scale*. Our autoregressive decoder-only architecture models demonstrate how second-language acquisition via vocabulary expansion and pretraining on a mixture of Arabic and English text can steer a model towards a new language (Arabic) without any catastrophic forgetting in the original language (English). Furthermore, we highlight the effectiveness of using parallel/translated data to aid the process of knowledge alignment between languages. Finally, we show that extensive alignment with human preferences can significantly enhance the performance of a language model compared to models of a larger scale with lower quality alignment. ALLaM achieves state-of-the-art performance in various Arabic benchmarks, including MMLU Arabic, ACVA, and Arabic Exams. Our aligned models improve both in Arabic and English from their base aligned models.

## 1 INTRODUCTION

Language modeling has significantly progressed from its humble origins, transitioning from fundamental probabilistic methods to complex neural priors. The foundational work by Shannon (1951) on the information theory of language laid the groundwork for predicting the next word in a sequence, which was subsequently tackled by Bengio et al. (2003) in neural networks. The field experienced a substantial leap with the introduction of LSTMs (Hochreiter & Schmidhuber, 1997) in language models (LM) (Peters et al., 2018b), which could capture longer dependencies in LMs but proved difficult to scale. The emergence of scalable and distributed architectures like Transformers (Vaswani et al., 2017) and the potential for precisely (Kaplan et al., 2020; Hoffmann et al., 2022) compressing web-scale data has resonated in recent years with the advancements of *Generative Pretraining* (Radford et al., 2018; Brown et al., 2020a; Anil et al., 2023).

With the release of ChatGPT (OpenAI, 2022), followed by the introduction of more frontier class models Gemini (Google, 2024), Claude (Anthropic, 2022), Reka (Ormazabal et al., 2024), Mistral (Mistral, 2024), Llama-3 (Meta, 2024) and recently released Qwen-2 (Yang et al., 2024), large language models have demonstrated significant leaps over each generation of models (Laskar et al., 2023). This exponential growth in performance has raised hope in the possibility of achieving Artificial General Intelligence (Hendrycks & Mazeika, 2022; Marcus, 2022). This rapid advancement has spurred discussions across various fields, including ethics, economics, and technology (Weidinger et al., 2021). Judging from the initial capabilities (Bubeck et al., 2023), the potential of these frontier models are reinventing the way humans interact with machines, impacting social norms, productivity, trends, and culture on a broader scale (Zhou et al., 2024). However, most of these frontier-class models are primarily trained on English and often lack a connection to localized regional cultures and norms (Naous et al., 2024). This gap has the potential to result in slow and irreversible manipulation of regional identities and lead to cultural homogenization.

The natural course to reverse this trend is to invest resources in curating data and building models to support the diversity of languages and cultures represented in the modern world. While this is possible, the significant training costs of LLMs and their environmental impact have become major concerns in recent years (Strubell et al., 2019). The vast computational resources required to train LLMs contribute to substantial carbon emissions (Luccioni & Hernandez-Garcia, 2023). Governments<sup>1</sup> and non/for-profit organizations (Dodge et al., 2022; Google, 2021; Amazon, 2021), are

<sup>1</sup><https://www.cnrs.fr/en/update/jean-zay-supercomputer-recycling-its-heat>

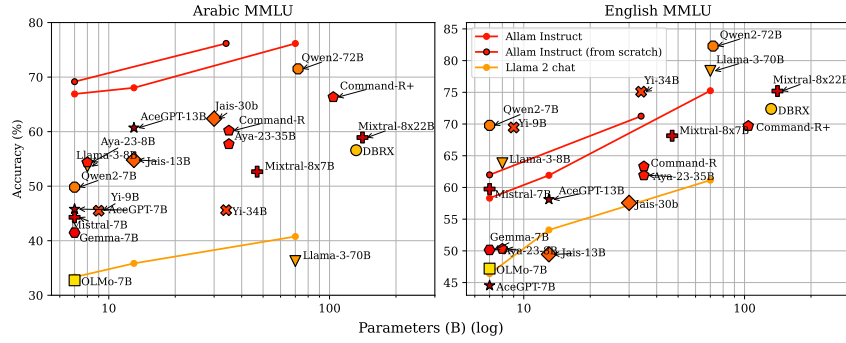


Figure 1: Performance on Arabic (Koto et al., 2024) and English (Hendrycks et al., 2020) MMLU Benchmarks. ALLaM (red line) shows impressive improvement from its base model Llama-2 (yellow line). All evaluations were done on the latest version of the fine-tuned (chat or instruct) models. The ALLaM 7B from scratch model also shows significant improvement over the ALLaM 7B continued pretraining model.

increasingly aware of these issues. This awareness has led to discussions about the ethical implications of AI development and the need for sustainable practices concerning “When and how to scale the training of these models”. In addition, curating data for each language/region at pretraining scale is also a difficult task, since most available data comes from a few high-resource languages.

To address these concerns, we consider the problem of adapting strong, but potentially under-trained, open pretrained models, rather than starting from a randomly initialized model. Technically, this involves continuing training of a model in a new language to facilitate Second Language Acquisition (SLA) (Swain & Lapkin, 1995), popularized by Bari et al. (2020) in NLP and recently adapted to LLMs by Nguyen et al. (2023). This process involves the challenging task of incorporating an additional language distribution without compromising the source language(s). For instance, if a pretrained model was initially trained in English, expanding to an additional language presents challenges related to tokenization. Figure 2 gives an overview of ALLaM’s tokenizers compared to a tokenizer primarily trained on English.

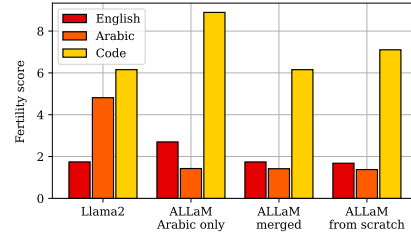


Figure 2: Comparison of tokenizer fertility scores. The chart illustrates the fertility scores across four tokenizers: Llama-2, ALLaM Arabic only, ALLaM merged with Llama-2, and ALLaM Arabic/English (from scratch model). We calculate the fertility over a random subsample of the entire English, Arabic, and code training corpus.

There are various Arabic LLMs that have been developed, such as Jais (Sengupta et al., 2023) and AceGPT (Huang et al., 2023), which trained from scratch or continued training Llama-2, respectively. A more detailed description and other relevant works can be found in Appendix C.

Our approach to building ALLaM, large language models developed specifically for fluency and understanding in Arabic and English, can be outlined as follows. We first demonstrate the feasibility of adapting an existing pretrained English model (Llama-2 (Touvron et al., 2023a)) to fluency in both Arabic and English through *tokenizer and vocabulary expansion*. Then, we apply our learnings to train a stronger model from scratch (random initialization) in a similar fashion, i.e., pretraining on English followed by training in mixed Arabic and English. The resulting model exhibits impressive performance and has favorable tokenization properties compared to other models. This approach aligns with both our technical goals and our commitment to sustainable practices. Our overall contributions are summarized below:

1. The ALLaM model series, with the goal of supporting the cultural values of the Arabic-speaking world. We train four models at four different scales: 7B, 13B, 34B and 70B models initialized by Llama-2 weights along with 7B and 34B models trained from scratch.
2. Our model achieves state-of-the-art results in Arabic, as well as improving overall English performance of the original Llama-2 model. Refer to Figure 1 for an overview.

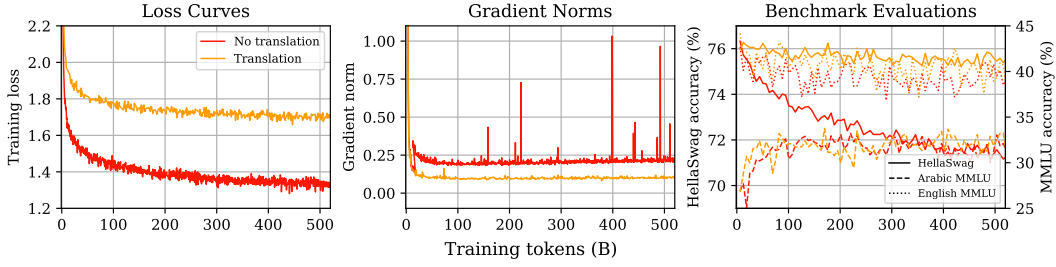


Figure 3: Measuring the effect of adding machine translated Arabic data to pretraining. Although the two loss curves look normal (*left*), adding the translated Arabic reduced the frequency of gradient spikes during training (*center*). Adding translated Arabic data also clearly helps align the Arabic and English capabilities of the model and reduce catastrophic forgetting (*right*).

3. We demonstrate that it is possible to train highly-performant models in low-resource languages from publicly available model weights using our continued pretraining recipe with tokenizer expansion, presenting a path for better representation of low-resource languages.
4. The training methodology and decision-making involved in training the LLM. We provide necessary ablation studies for most crucial decisions.

## 2 PRETRAINING

Pretraining language models on trillions of natural language tokens represents the bulk of the cost required to build an effective language model. This large investment of time and compute precludes experimentation or ablation for every decision. Thus, before starting to train ALLaM from random initialization, or “scratch”, we experiment in the continue-pretraining regime. As the name implies, continue-pretraining is the practice of warm-starting an experiment from an already pretrained LM.

We begin by discussing our entire pretraining corpus, describe experiments conducted with continue-pretraining, and finally describe pretraining from scratch.

### 2.1 PRETRAINING DATA

For English, many high quality and large scale datasets are available for pretraining (Together Computer, 2023; Soldaini et al., 2024; Gao et al., 2021; Penedo et al., 2023). We harnessed subsets from RedPajama (Together Computer, 2023), FineWeb (Penedo et al., 2024), Dolma-v1 (Soldaini et al., 2024) and Pile (Gao et al., 2021) datasets e.g., Dolma-CC, The Stack (Kocetkov et al., 2022), PeS2o, PubMed, DM-Math (Saxton et al., 2019) and StackExchange (Soboleva et al., 2023). In total, we had access to 4T high to medium quality English tokens for pretraining. For our 30B pre-training we sample 5.2T tokens from the RedPajamaV2 (Together Computer, 2023). We provide detailed description of our data filtering method in the Appendix G.

Pretraining data in the Arabic language is much more limited, thus we undertook large scale collection and curation of Arabic language data. This includes in-house crawled sources covering Web documents, news articles, books (literature, religion, law and culture, among others), Wikipedia (over 1M articles), and audio transcripts (books and news). To ensure high quality Web data, we applied the following processing steps: (i) drop documents with language identification score below 95%, (ii) drop short documents that are less than 30 words, (iii) drop documents with duplicate URLs or high ratio of spam and stop words, and (iv) drop duplicate documents using exact matching. We experimented with fuzzy matching but opted against using it, as it was too restrictive given the scarcity of Arabic data. During Arabic data processing, no standardizing or normalization of characters was performed. For language identification, we used fastText embeddings. For spam and stop words selection, we used Mubarak et al. (2020). The majority of the Arabic data is from the web, which naturally contains Arabic varieties; however, no specific Dialectal Arabic (DA) datasets were intentionally included in the corpus. Knowledge of the distribution of Arabic varieties would require the data to be classified into DA, and since, to the best of our knowledge, DA identification is a hard task that is still under research. According to Abdul-Mageed et al. (2024); Bouamor et al. (2019); Abdelali et al. (2021), classifying the data to DA is difficult. Nonetheless, for future work, we plan to evaluate ALLaM’s ability to understand and generate DA via ALDi (Keleg et al., 2023). For Audio transcription, we used the SauTech ASR system.

Additionally, we extended our Arabic data with translated English content using an in-house machine translation system. We translated the following English datasets from Dolma: Wikipedia, books, C4 and peS2o, which also are part of our English data. The hypothesis is that this will improve Arabic-English language alignment, leading to a better Arabic model. Figure 3 demonstrates the impact of Arabic translated datasets in the pretraining data mixture<sup>2</sup>. While models trained without translated data exhibit lower training loss, those trained with translated data show more stable training, as evidenced by fewer spikes in gradient norms. Incorporating Arabic translated data in the pretraining dataset mitigates catastrophic forgetting in English. In total, we curate 540B Arabic tokens<sup>3</sup> of which 270B are natural Arabic tokens and 270B are translated Arabic tokens. For Arabic, we have a total of  $\sim 540$ B tokens, and for English, we have a total of  $\sim 660$ B distinct tokens. Based on the sampling ratio from Table 1, we collected the training data from the corpus.

**Data Mixture** To build a performant model in both Arabic and English, we conducted experiments to determine the optimal language mix. Figure 4 gives an overview of data-mixture experiments on our curated Arabic-English corpus. We conducted the experiments with the same sampling ratio (Table 1) and data order. We observe best trend in performance with 45/55 Arabic/English data mix.

Table 1 shows the language and category mixing distributions for English, Arabic natural, Arabic translated and final mix. Following mainstream work (Touvron et al., 2023b; Chowdhery et al., 2022; Rae et al., 2021), web data constitutes the highest ratio with 71%, 65% and 48% of the Arabic natural, Arabic translated and overall mix, respectively. We limited the contribution of English web data to 31%, as the Llama-2 base model was trained on a significant amount of English web data already, and we expected that increasing its ratio might degrade performance. We ensured that high quality sources, such as books, news, code etc. are well represented in our mixture.

## 2.2 CONTINUED PRETRAINING

Open source and open weight models present an attractive option to conduct pretraining experiments cheaply. However, they also present challenges, since most such models do not natively support Arabic or other languages. We develop a simple approach to enhance any language model with capabilities in new languages (i.e., language expansion). The approach relies on two steps: (i) tokenizer augmentation, and (ii) expanded vocabulary learning. We demonstrate that this approach leads to minimal degradation of capabilities in the original language.

**Tokenizer Augmentation** Existing open weight language models (e.g., Llama-2) tokenize Arabic (and other languages) poorly,

Table 1: ALLaM’s pretraining data mixtures. The first four columns summarize the distribution of the continued pretraining mixed Arabic/English data. The English only pretraining from scratch mixture is shown in the last column. We upsample data to match the mixture rates when needed. Mixed English is a subset of English only.

| Domain   | Mixed Arabic & English |         |            |       | English Only |
|----------|------------------------|---------|------------|-------|--------------|
|          | English                | Arabic  |            | Mixed |              |
|          |                        | Natural | Translated |       |              |
| Web      | 31%                    | 71%     | 65%        | 48%   | 71%          |
| Books    | 9%                     | 13%     | 12%        | 11%   | 3%           |
| Wiki     | —                      | 0.70%   | 0.61%      | 0.3%  | 0.1%         |
| News     | —                      | 14%     | —          | 3%    | —            |
| Science  | 16%                    | —       | 22%        | 14%   | 6%           |
| Code     | 39%                    | —       | —          | 21%   | 17%          |
| Math     | 5%                     | —       | —          | 2.5%  | 0.9%         |
| Other    | —                      | 1.3%    | 0.39%      | 0.2%  | 2%           |
| Lang Mix | 55%                    | 22.5%   | 22.5%      | 100%  | 100%         |
| Tokens   | 660B                   | 270B    | 270B       | 1.2T  | 4T           |

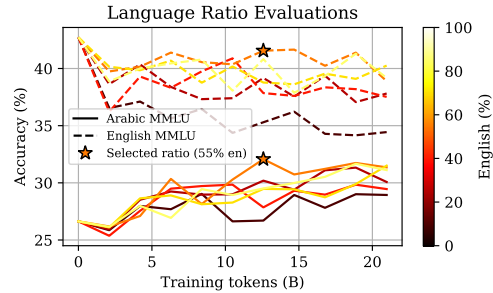


Figure 4: We determine the optimal Arabic/English language mixture that balances between acquiring Arabic understanding while retaining English proficiency by conducting ablations over 6 Arabic/English ratios (trained up to 20B tokens). We found that a 45/55 Arabic/English ratio achieves the best performance, as measured by English and translated Arabic MMLU.

<sup>2</sup>Our in-house translation system’s BLEU score is around 25.23 on IWSLT test set.

<sup>3</sup>Tokens counted by our merged tokenizer.

often splitting words down to the character level or even relying on byte-fallback mechanisms for tokenization. This results in: (i) inefficient training, as the pretraining corpus size is inflated, (ii) unoptimized inference, since the model must generate more tokens per word, and (iii) the effective context length is reduced, because it is based on a fixed number of tokens. To address these issues, we use a corpus of text in the target language to train a tokenizer specialized in that language. We then merge the original tokenizer with the language-specific tokenizer. Merging is accomplished by adding all tokens from the language-specific tokenizer that do not exist in the original tokenizer. As shown in Figure 2, this effectively reduces the fertility score in the target language of the merged tokenizer to the level of the language-specific tokenizer. We expanded Llama-2’s 32,000 token vocabulary to 61,568 tokens.

**Expanded Vocabulary Learning** Newly added tokens in the merged tokenizer have no associated embedding representations in the pretrained language model’s weights. To learn these representations, we experiment with two approaches: (i) random initialization and (ii) initialization from combined representations of tokens in the original tokenizer. Approach (ii) is accomplished by tokenizing each token in the vocabulary of the new tokenizer using the original tokenizer. The associated embedding representations of this tokenization are then averaged and assigned as the vector representation of the new token. Since we work with tokenizers with byte-fallback, such a tokenization is guaranteed to exist. Figure 5 provides an overview of our initialization method. Initializing the new embeddings from the combination of previously learned embeddings gives a significant boost to the learning of a new language.

**Experiment Details** Starting from Llama-2 pretrained model weights, we continue pretraining the ALLaM-7B and ALLaM-13B models on 1.2T tokens, covering both English and Arabic languages. For the ALLaM-70B model, we only train up to 600B tokens (using the same data mixture). In all of our continued pretraining experiments, we used the final learning rate of the pretrained language model (usually  $3 \times 10^{-5}$ ). We experimented with approaches to gradually increase and decay the learning rate with limited success, as such models typically exhibited catastrophic forgetting, indicated by significant drops in performance in the original language. We also considered optimizer state warm up, as open-weight models typically do not include the optimizer states, but found this had little effect on performance. Figure 6 provides an overview of adding dropout during continued pretraining. We observe that adding dropout helps the Arabic language, as it acts as a regularizer for the new distribution. However, Llama-2 was pretrained on 2T tokens without any dropout, and adding dropout negatively impacts the source language performance. Considering this trade-off, we decided not to add dropout in the continued pretraining stage. For Vocabulary expanded model with LLaMa-2 (7B, 13B, 70B models), unlike recent trends (AI2, 2024), we did not add any alignment data in this stage of training.

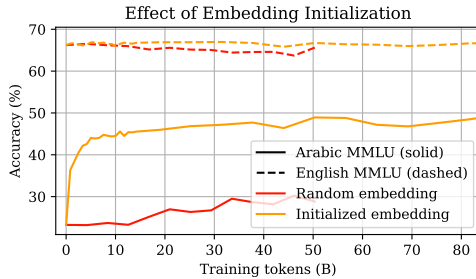


Figure 5: Effect of *random initialization* vs. *embedding initialization* during the start of continued pretraining. We find that initializing the embeddings for new tokens from combinations of existing embeddings speeds up learning dramatically.

### 2.3 PRETRAINING FROM SCRATCH

Following (Hoffmann et al., 2022; Touvron et al., 2023a), training a high-quality model from scratch requires a substantial amount of tokens. Even when pretraining from random initialization, we find it beneficial to train with a high-resource language for trillions of tokens (English) and then continue training with a mixture of Arabic and English tokens. On small scale experiments (with 1B

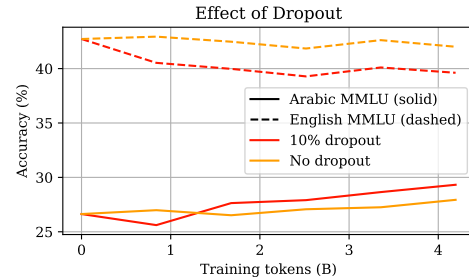


Figure 6: Effect of *dropout* during the start of continued pretraining experiments. While introducing dropout can marginally improve the second language acquisition, it negatively impacts the model’s capabilities in the original language.

parameter models) we find that beginning training with two languages can sometimes degrade the performance in English or result in slow learning of both language distributions. From this, we hypothesize that low-resource languages are diluted in the large volume of high-resource language data when pretraining from scratch, even with upsampling and careful tuning.

**Training Recipe** Our pretraining from scratch recipe consists of two steps: training on 4T English tokens followed by training on 1.2T mixed Arabic/English tokens. This retains the English capabilities of the model without catastrophic forgetting, effectively transferring knowledge from one language distribution to another. The only difference between pretraining from scratch and continued pretraining from an existing model is that vocabulary expansion is not required.

We match hyperparameters and architecture for pretraining from scratch with [Touvron et al. \(2023a\)](#), including 4M tokens per batch and max LR  $3 \times 10^{-4}$  decayed to  $3 \times 10^{-5}$  with a cosine schedule.

During the training of the 7B model (from scratch and vocab expanded models), we found that reducing the learning rate made it difficult to recover without hurting knowledge retrieval/retention capability of the model. To address this, we maintained a constant learning rate during the initial English training phase for the 30B model. In the second stage, we applied a cosine decay learning rate to fine-tune on a mix of English, Arabic, and SFT data. This approach allows for potential extended training with a constant learning rate, followed by shorter but reasonably large-scale cross-lingual alignment using high-quality English, Arabic, and SFT data.

**Data Mixture** The last column of Table 1 shows the domain mix of ALLaM-7B of the English only pretraining data. For ALLaM-34B, we made slight changes to the domain distribution and improved the quality of the Web data by deploying more aggressive filtering. As expected, web data represent the bulk of the mixture, followed by code and scientific articles.

While our 7B model followed the Arabic-English data mix depicted in Table 1, we made the following changes in ALLaM-34B. We introduced English and Arabic instruction data in our mix (12%). Additionally, we reduced Arabic translated content to 16% from 22.5%. Domain distribution remains close to the one shown in the table. Refer to Appendix H.4 for the training details.

For our 7B model, we adhered to the Arabic-English data mix as outlined in Table 1. However, in ALLaM-34B, we made several adjustments. Specifically, we introduced 12% English and Arabic instruction data into the mix and reduced the proportion of Arabic translated content from 22.5% to 16%. The domain distribution remains largely consistent with what is presented in the table. For further details on the training process, please refer to Appendix H.4.

### 3 ALIGNMENT

Building useful LLMs requires ensuring they are able to follow instructions while adhering to ethical standards and user expectations. This alignment process is especially crucial for models used in diverse linguistic and cultural contexts. In our setting, this means aligning models to the Arabic language and cultural context while also supporting English.

Supervised Fine-Tuning (SFT) (Section 3.1) refines a pretrained model using a carefully selected dataset relevant to specific tasks and domains. Preference training (Section 3.2), on the other hand, aligns the model’s outputs with human values and preferences by prioritizing responses that meet user expectations and ethical guidelines. These methods work together to create reliable and ethically sound LLMs for real-world use.

#### 3.1 SUPERVISED FINE-TUNING

**Data** Our SFT data is curated from a diverse array of sources. Given a piece of context from a source, we utilize humans and/or generative models ([Ding et al., 2023](#)) to identify if the text can be considered suitable for supervised fine-tuning or if we can generate instructions to create an SFT example from the context. For English, we primarily use public web content as our main source, offering a broad range of high-quality and especially diverse prompts. In contrast, our Arabic data comes from a combination of public and proprietary sources to ensure comprehensive coverage and relevance. To gather data from the source, we collect seed websites or data sources, which involves utilizing domain experts, prompt librarians, local institutes specializing in areas such as Arabic language, history, and politics, the use of commercially permissible licensed LLMs to generate data, and machine translation models to convert rich English SFT data into Arabic. Our datasets cover

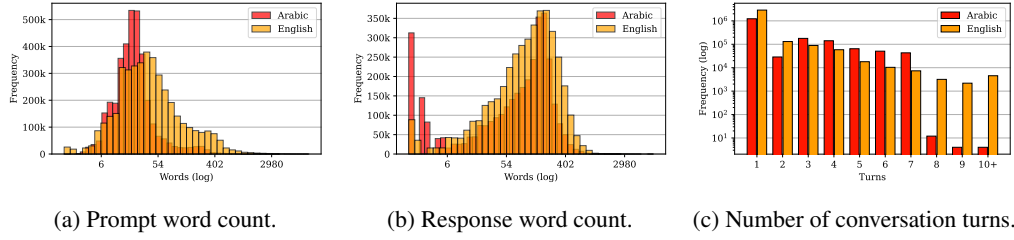


Figure 7: Word count and turn distributions of SFT data. There are two main differences in our Arabic and English SFT datasets: shorter responses are more frequent in our Arabic SFT dataset, while our English SFT dataset contains more dialogues with >8 turns.

various domains and capabilities, ensuring the model’s proficiency in handling tasks across education, history, Arabic linguistics, politics, religion, computer science, and other fields. The entire Arabic/English collection is called Ultra-Instinct, which is not *human generated*, but rather, *human driven*.

**Quality Filtering** Unlike Zhou et al. (2023); AI et al. (2024), we hypothesized that scaling SFT data can unlock diverse capability, as well as improve responsiveness to the prompts. Initially, we crawled the public web for SFT samples. The first version (v1) of Ultra-Instinct includes 12M samples evenly split between English and Arabic, while the second version (v2), is a reduced version with half the samples. Compared to v1, v2 underwent strict quality checks and human assessments of random subsamples. Our quality checks for v2 included (i) assessments based on instruction/response word length, (ii) lexical<sup>4</sup> and semantic diversity, exact and near-exact lexical deduplication, (iii) removal of low quality machine-translated Arabic data from English sources, and (iv) ensuring diversity in questions and commands. For detailed metrics on instruction and response lengths and lexical diversity, see Table 2.

Table 2: Comparison of average word length and lexical diversity of prompts and responses.

| Quality Metric    | Ultra-Instinct v1 |          | Ultra-Instinct v2 |          |
|-------------------|-------------------|----------|-------------------|----------|
|                   | Prompt            | Response | Prompt            | Response |
| Avg # of Word     | 146.94            | 97.19    | 60.81             | 136.47   |
| Lexical diversity | 76.34             | 75.25    | 85.29             | 69.53    |

Figures 7a and 7b show the distribution of the prompts and responses in v2, respectively. We focused on maximizing the number of multi-turn conversations in our dataset. Figure 7c shows the distribution of conversation turns from Ultra-Instinct.

To extrinsically evaluate the impact of higher quality SFT data, we trained two 13B models using our v1 and v2 SFT datasets. Even though v2 has half as many samples and v1, both versions performed equally well on English and Arabic evaluation benchmarks, as shown in Table 3. This reduction in data volume led to faster training times and reduced costs without compromising performance. It also clearly demonstrates the value of quality filtering for alignment.

### 3.2 PREFERENCE TRAINING

After SFT, models are able to converse in multi-turn conversations. However, they are not fully aligned with human preferences. For example, our SFT models were terse and had limited guardrails. To circumvent these issues, we performed preference tuning with human verified samples via Direct Preference Optimization (DPO) (Rafailov et al., 2024).

Table 3: Comparative results of Ultra Instinct v1 and v2, across various evaluation datasets.

| Version           | MMLU                |                    |      | Exams (ar) | ACVA | ETEC |
|-------------------|---------------------|--------------------|------|------------|------|------|
|                   | Huang et al. (2023) | Koto et al. (2024) | en   |            |      |      |
| Ultra-Instinct v1 | 51.0                | 68.0               | 63.8 | 56.8       | 79.8 | 66.8 |
| Ultra-Instinct v2 | 51.4                | 68.5               | 63.3 | 56.8       | 76.7 | 65.9 |

**Data** The inputs were sourced from early model testers and a manually curated selection of prompts from various domains or attack vectors. These include ethical dilemmas, middle eastern culture, religions, illegal activities, human rights, locale awareness, and personality.

<sup>4</sup>Lexical diversity is calculated by taking the ratio of the total number of unique words to the total number of words across all samples, excluding stop words.

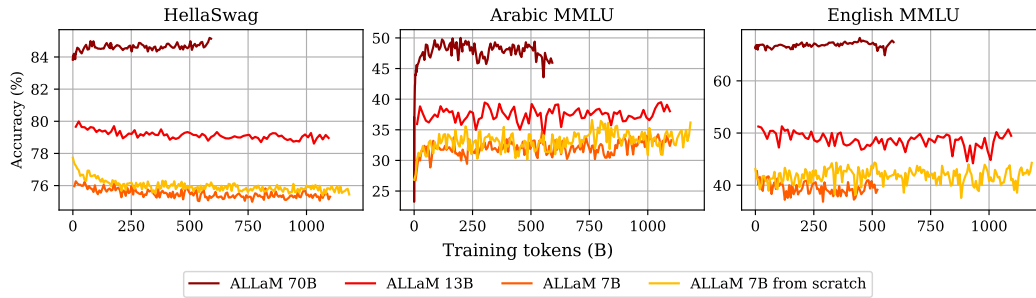


Figure 8: Selected benchmark evaluated through ALLaM’s training. Using HellaSwag as a proxy for language understanding, the performance of smaller models degrades when introducing Arabic, while larger models (70B) have enough capacity to improve simultaneously in English and Arabic. Arabic language acquisition is rapid in all models, as indicated by Arabic MMLU.

Preference training necessitates both negative and positive outputs for each input. We relied on the testers’ feedback to identify the positive outputs. In the absence of positive outputs, we used a model to generate an output and manually verified that the output was aligned. While (Tunstall et al., 2023) utilized preference data from AI Feedback (AIF) at scale, we adopt a more cautious approach in creating preference data. We generate a smaller volume of data, ensuring it is fully reviewed, edited, and verified by humans.

There are two approaches for generating negative outputs: (i) on-policy: use the generations of the model we are tuning as negative outputs, and (ii) off-policy: use another similar model to generate the negative outputs. We did not verify that the negative outputs were worse than the positive. However, we ensured that the positive outputs were of the highest quality, such that they were almost always better than the negative outputs.

Khan et al. (2023) demonstrated that model outputs can vary significantly depending on the sampling mechanism used. Building on this insight, we generate additional samples for each instance by varying temperature and nucleus sampling techniques. These additional samples are utilized to produce rejected samples, ensuring that ALLaM provides more grounded responses and generalizes well across various sampling mechanisms.

In total, we collected 25,854 samples (triplets of {prompt, accepted, rejected}) in English and Arabic language. Using the technique mentioned above, we sample 10 different response from the model to generate additional rejected responses for each sample. This results in a dataset of 245K samples (after filtering) for preference training.

## 4 EVALUATION

In this section, we describe the evaluation of our model and report the results of ALLaM 7B, 13B, 34B, and 70B models, as well as other relevant models, such as GPT-4, Command-R+ (Gomez, 2024), and Jais-30B (Sengupta et al., 2023). Our evaluations encompass three main types: (i) automatic evaluations, (ii) LLM-based evaluations, and (iii) human evaluations.

**Limitations** Recently, (Alzahrani et al., 2024) showed that multiple choice or cloze test based evaluation may not be robust. In addition, MT-Bench uses an LLM as a judge, and has likely leaked into training datasets. Unfortunately, human evaluation is time-consuming and requires well-trained human evaluators. In this work, we try to ensure robust evaluation and train a balanced assessment of the quantitative metrics and qualitative effectiveness of models in various applications and domains.

### 4.1 AUTOMATIC EVALUATIONS

The automatic evaluations cover Arabic and English benchmarks grouped into many categories. Detailed description of the evaluation dataset and benchmark can be found in Appendix I.1.

While serving as a good test bench, observing the dynamics of automatic evaluations during training is also interesting. Figure 8 shows the behavior of selected benchmarks during mixed Arabic/English pretraining while scaling up model size. In particular, we observe that smaller models tradeoff between capability in the new and original languages. However, larger models can simultaneously improve in both languages.

Table 4: Arabic benchmark results for instruction tuned models. Follow Table 10 for detailed results.

|                       |     | araSwag      | ACVA         | MMLU (ar)          |                     | Exams (ar)   | ETEC         | araTruthfulQA | araMath      |
|-----------------------|-----|--------------|--------------|--------------------|---------------------|--------------|--------------|---------------|--------------|
|                       |     |              |              |                    |                     |              |              |               |              |
|                       |     |              |              | Koto et al. (2024) | Huang et al. (2023) |              |              |               |              |
|                       |     | 10-shot      | 5-shot       | 0-shot             | 0-shot              | 5-shot       | 0-shot       | 0-shot        | 5-shot       |
| ALLaM-Instruct        | 7B  | <b>49.28</b> | <b>80.33</b> | <b>66.9</b>        | <b>49.6</b>         | <b>52.7</b>  | <b>62.95</b> | <b>36.4</b>   | 36.5         |
| AceGPT-Chat           | 7B  | 43.4         | 59.35        | 45.8               | 33.58               | 35.57        | 36.05        | <b>37.9</b>   | 22.5         |
| Llama 2-Chat          | 7B  | 24.44        | 52.46        | 33.33              | 26.45               | 25.33        | 26.69        | 29.9          | 21.5         |
| Mistral-Instruct-v0.3 | 7B  | 30.59        | 60.7         | 44.3               | 34.06               | 31.1         | 34.41        | 30.3          | 26.0         |
| Llama 3-Instruct      | 8B  | 33.99        | 75.21        | 53.98              | 41.49               | 44.32        | 49.42        | 34.0          | <b>38.3</b>  |
| ALLaM-Instruct        | 13B | 54.77        | <b>78.59</b> | <b>68.11</b>       | <b>51.03</b>        | <b>54.93</b> | <b>65.59</b> | <b>37.5</b>   | <b>46.8</b>  |
| Llama 2-Chat          | 13B | 25.75        | 60.14        | 35.84              | 28.73               | 22.91        | 30.44        | 31.4          | 22.3         |
| Jais-Chat             | 13B | <b>77.12</b> | 70.68        | 54.8               | 41.43               | 46.93        | 48.68        | 31.6          | 25.3         |
| ALLaM-Instruct        | 34B | 59.34        | <b>93.41</b> | <b>76.17</b>       | <b>46.36</b>        | <b>80.74</b> | <b>80.22</b> | <b>38.17</b>  | <b>74.6</b>  |
| Jais-Chat-v3          | 30B | <b>88.37</b> | 70.05        | 62.37              | 30.15               | 51.21        | 38.53        | 37.3          | 32.5         |
| ALLaM-Instruct        | 70B | 57.91        | 79.01        | <b>75.92</b>       | <b>62.23</b>        | 58.47        | <b>78.38</b> | 38.4          | 56.8         |
| Llama 2-Chat          | 70B | 30.72        | 59.49        | 40.77              | 32.86               | 28.68        | 30.6         | 32.3          | 25.5         |
| Llama 3-Instruct      | 70B | 45.75        | <b>80.26</b> | 36.27              | 60.11               | <b>58.47</b> | 71.41        | 37.7          | <b>59.70</b> |

Table 5: English benchmark results for instruction tuned models. Follow Table 11 for detailed results.

|                       |            | AGIEval      | MMLU<br>Average | MMLU-Pro     | Ethics       | TruthfulQA   | ARC<br>Challenge | HellaSwag    | MixEval            |                    |
|-----------------------|------------|--------------|-----------------|--------------|--------------|--------------|------------------|--------------|--------------------|--------------------|
|                       |            |              |                 |              |              |              |                  |              | Hard               | Standard           |
|                       |            |              |                 |              |              |              |                  |              | 5/0-shot (base/ft) | 5/0-shot (base/ft) |
|                       |            | 0-shot       | 0-shot          | CoT 5-shot   | 0-shot       | 0-shot       | 0-shot           | 0-shot       | 5/0-shot (base/ft) | 5/0-shot (base/ft) |
| ALLaM-Instruct        | 7B         | <b>47.09</b> | 58.31           | 27.78        | 69.8         | 42.11        | 51.45            | 75.2         | 28.9               | 67.6               |
| AceGPT-Chat           | 7B         | 26.33        | 44.53           | —            | 53.38        | 49.34        | 42.32            | 70.92        | —                  | —                  |
| Llama 2-Chat          | 7B         | 35.55        | 46.4            | 22.87        | 58.88        | 45.32        | 44.28            | 75.52        | 30.8               | 61.7               |
| Mistral-Instruct-v0.3 | 7B         | 42.22        | 59.75           | 36.33        | 73.59        | 59.65        | 58.7             | 82.88        | 36.2               | 70.0               |
| Llama 3-Instruct      | 8B         | 44.35        | <b>63.82</b>    | <b>41.32</b> | <b>68.07</b> | <b>51.72</b> | <b>56.83</b>     | <b>75.81</b> | <b>45.6</b>        | <b>75.0</b>        |
| ALLaM-Instruct        | 13B        | <b>48.42</b> | <b>61.8</b>     | <b>34.05</b> | <b>76.47</b> | <b>57.69</b> | <b>55.89</b>     | <b>81.14</b> | <b>37.2</b>        | <b>72.8</b>        |
| Llama 2-Chat          | 13B        | 37.73        | 53.3            | 27.19        | 70.52        | 43.95        | 50.17            | 79.66        | —                  | —                  |
| Jais-Chat             | 13B        | 31.45        | 49.46           | —            | 64.92        | 39.66        | 46.84            | 77.6         | —                  | —                  |
| ALLaM-Instruct        | <b>34B</b> | <b>52.47</b> | <b>71.24</b>    | <b>43.61</b> | <b>72.84</b> | <b>56.27</b> | <b>60.15</b>     | <b>81.25</b> | —                  | —                  |
| Jais-Chat-v3          | 30B        | 36.78        | 57.57           | 26.45        | 68.03        | 42.34        | 51.02            | 78.91        | —                  | —                  |
| ALLaM-Instruct        | 70B        | <b>65.67</b> | 75.43           | 48.61        | 76.16        | 58.78        | 59.56            | <b>84.97</b> | 51.60              | 83.5               |
| Llama 2-Chat          | 70B        | 46.0         | 61.15           | 35.16        | 68.5         | 52.77        | 54.27            | 82.14        | 38.0               | 74.6               |
| Llama 3-Instruct      | 70B        | 63.78        | <b>78.38</b>    | <b>59.52</b> | <b>77.09</b> | <b>61.79</b> | <b>64.33</b>     | 82.49        | <b>55.90</b>       | <b>84.00</b>       |

Another observation from automatic evaluations is that some evaluations provide more signal for training decisions than others, e.g., Hellaswag smoothly improves during training while improvements in GSM8k occur in discontinuous jumps. Other benchmarks show no improvement until 1.5T tokens have been seen (i.e., grokking) making them unreliable for early training decisions. Tables 4 and 5 give an overview of the performance of ALLaM instruct models.

In Arabic benchmarks, we can see that ALLaM-70B scores are the best in five (MMLU Arabic (natural and translated), Exams, ETEC, araTruthfulQA) out of the eight benchmark sets. On English, ALLaM is the second-best model in the majority of cases, following Llama 3-Instruct. We highlight the excellent performance of ALLaM on benchmarks released after training was completed (MMLU-Pro, MixEval) and benchmarks the training team did not have access to (ETEC), since they provide a clean evaluation signal. Table 10 and Table 11 in the appendix contain more detailed evaluation results for Arabic and English, respectively.

## 4.2 LLM-BASED EVALUATIONS

MT-Bench (Zheng et al., 2024) consists of 80 multi-turn questions to evaluate models’ capabilities on complex instruction-following. In addition to the English version, MT-Bench Arabic was created using GPT-4 to translate the original dataset and human annotators to review and align the prompts to Arabic culture. GPT-4 serves as the LLM judge, scoring responses as recommended in (Zheng et al., 2024). Model performance is compared turn by turn, with results shown in Table 6, where ALLaM-70B achieves the best Arabic performance.

Table 6: MT-Bench scores for Arabic and English. Each score is an average over 80 samples of the score ranging from 0 to 10 returned by the judge (GPT-4).

| Model              | English     |             |             | Arabic      |            |             |
|--------------------|-------------|-------------|-------------|-------------|------------|-------------|
|                    | Avg.        | Turn 1      | Turn 2      | Avg.        | Turn 1     | Turn 2      |
| AceGPT 13B-chat    | 5.44        | 6.76        | 4.12        | 6.33        | 7.01       | 5.64        |
| ALLaM 13B Instruct | 7.34        | 7.67        | 7.01        | 7.57        | 7.9        | 7.23        |
| ALLaM 70B Instruct | 7.44        | <b>7.91</b> | 6.96        | <b>8.19</b> | <b>8.4</b> | <b>7.97</b> |
| Jais 13B Chat      | 4.18        | 4.39        | 3.96        | 4.72        | 5.07       | 4.36        |
| Jais 30B Chat v1   | 3.89        | 4.13        | 3.64        | 3.54        | 4.13       | 2.95        |
| Jais 30B Chat v3   | 5.86        | 6.25        | 5.47        | 6.28        | 6.78       | 5.78        |
| Cohere Command R+  | 7.41        | 7.63        | 7.18        | 7.97        | 8.28       | 7.65        |
| Cohere Command R   | 6.99        | 7.19        | 6.79        | 7.47        | 7.82       | 7.12        |
| DBRX Instruct      | 7.16        | 7.33        | 6.98        | 7.83        | 8.19       | 7.46        |
| GPT 3.5 Turbo      | <b>7.55</b> | 7.79        | <b>7.31</b> | 8.12        | 8.39       | 7.84        |

486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539

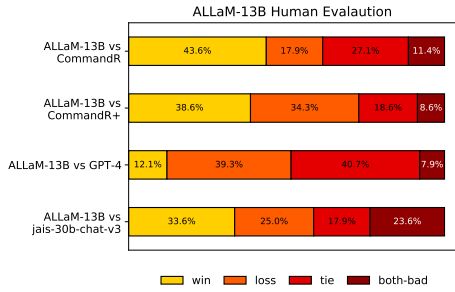


Figure 9: Pairwise win rates as judged by human evaluators. ALLaM-13B wins against many much larger models.

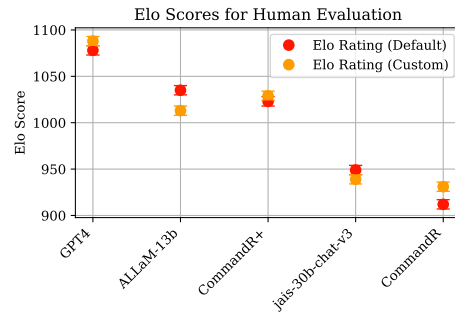


Figure 10: ELO scores from human evaluator preferences. ALLaM is tied with Command-R+ and lags only behind GPT-4.

### 4.3 HUMAN EVALUATION

We developed an Arabic multi-turn dataset spanning seven domains: linguistics, history, health, politics, coding, entertainment, and ethics, with each domain featuring ten two-turn questions. Human evaluators compared the responses from two models and were asked to choose the winning response with the following instructions:

- Choose a response as the winner if it is the best, tie if both responses are equally good, and both-bad if both responses are not good.
- A response is considered good if it is coherent, grammatically correct, and is a reasonable response to the question or previous turn in the conversation.
- Good responses should be in the correct language (the response should be in the same language as the previous turn, unless another language was requested).
- Good responses should not contain toxicity, hate speech, or bias.

Each pair of responses was inspected by three evaluators, and the winner was determined by majority voting. In case of a tie, a fourth evaluator was used to break the tie. Figure 9 presents the human evaluation results of the pair-wise comparisons of these models: ALLaM-13b, Jais-30b-chat-v3, Command-R-plus, and Command-R-v01. ALLaM-13b’s win rate was always higher than its loss rate compared with other models.

Finally, we gather votes from the human evaluators and calculated ELO scores for each model. ELO scoring had two configurations, the default scoring rewards the model for good responses with 1 point, tied responses (good and both-bad) with 0.5 points, and penalizes for bad responses with 0 point. The custom configuration penalizes the model with the bad response and both models if both provided bad responses with 0 point. Figure 10 shows the ELO scores based on the human evaluations. From the figure, GPT-4 achieved the highest score, followed by ALLaM-13b with the second-highest score, outperforming (or matching) larger models such as CommandR+.

## 5 CONCLUSION

The ALLaM model series marks a significant advancement in Arabic Language Technologies, achieving state-of-the-art performance across various Arabic benchmarks while maintaining or enhancing English performance. Through careful training that emphasizes language alignment and transferability, our models demonstrate effective second-language acquisition without catastrophic forgetting. The strategic use of translated data, knowledge encoding, and alignment with human preferences have been crucial in this success.

## REFERENCES

Ahmed Abdelali, Hamdy Mubarak, Younes Samih, Sabit Hassan, and Kareem Darwish. QADI: Arabic dialect identification in the wild. In Nizar Habash, Houda Bouamor, Hazem Hajj,

540 Walid Magdy, Wajdi Zaghouani, Fethi Bougares, Nadi Tomeh, Ibrahim Abu Farha, and Samia  
541 Touileb (eds.), *Proceedings of the Sixth Arabic Natural Language Processing Workshop*, pp.  
542 1–10, Kyiv, Ukraine (Virtual), April 2021. Association for Computational Linguistics. URL  
543 <https://aclanthology.org/2021.wanlp-1.1>.

544 Muhammad Abdul-Mageed, Abdelrahim Elmadany, Alcides Inciarte, Md Tawkat Islam Khondaker,  
545 et al. Jasmine: Arabic gpt models for few-shot learning. In *Proceedings of the 2023 Conference*  
546 *on Empirical Methods in Natural Language Processing*, pp. 16721–16744, 2023.

547 Muhammad Abdul-Mageed, Amr Keleg, AbdelRahim Elmadany, Chiyu Zhang, Injy Hamed, Walid  
548 Magdy, Houda Bouamor, and Nizar Habash. Nadi 2024: The fifth nuanced arabic dialect identi-  
549 fication shared task, 2024. URL <https://arxiv.org/abs/2407.04910>.

550 01. AI, :, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng  
551 Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue,  
552 Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao  
553 Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu,  
554 and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024.

555 AI2. Olmo 1.7–7b: A 24 point improvement on mmlu, 2024. URL <https://blog.allenai.org/olmo-1-7-7b-a-24-point-improvement-on-mmlu-92b43f7d269d>.

556 Asaad Alghamdi, Xinyu Duan, Wei Jiang, Zhenhai Wang, Yimeng Wu, Qingrong Xia, Zhefeng  
557 Wang, Yi Zheng, Mehdi Rezagholizadeh, Baoxing Huai, et al. Aramus: Pushing the limits of data  
558 and model scale for arabic natural language processing. *arXiv preprint arXiv:2306.06800*, 2023.

559 Reem Alghamdi, Zhenwen Liang, and Xiangliang Zhang. ArMATH: a dataset for solving Arabic  
560 math word problems. In Nicoletta Calzolari, Frédéric Béchet, Philippe Blache, Khalid Choukri,  
561 Christopher Cieri, Thierry Declerck, Sara Goggi, Hitoshi Isahara, Bente Maegaard, Joseph Mari-  
562 ani, Hélène Mazo, Jan Odijk, and Stelios Piperidis (eds.), *Proceedings of the Thirteenth Language*  
563 *Resources and Evaluation Conference*, pp. 351–362, Marseille, France, June 2022. European Lan-  
564 guage Resources Association. URL <https://aclanthology.org/2022.lrec-1.37>.

565 Norah Alzahrani, Hisham Abdullah Alyahya, Yazeed Alnumay, Sultan Alrashed, Shaykhah Al-  
566 subaie, Yusef Almushaykeh, Faisal Mirza, Nouf Alotaibi, Nora Altwairesh, Areeb Alowisheq,  
567 M Saiful Bari, and Haidar Khan. When benchmarks are targets: Revealing the sensitivity of large  
568 language model leaderboards, 2024.

569 Amazon. Sustainability in the cloud., 2021. URL <https://sustainability.aboutamazon.com/environment/the-cloud>.

570 Rohan Anil, Andrew M. Dai, Orhan Firat, Melvin Johnson, Dmitry Lepikhin, Alexandre Passos,  
571 Siamak Shakeri, Emanuel Taropa, Paige Bailey, Zhifeng Chen, Eric Chu, Jonathan H. Clark, Lau-  
572 rent El Shafey, Yanping Huang, Kathy Meier-Hellstern, Gaurav Mishra, Erica Moreira, Mark  
573 Omernick, Kevin Robinson, Sebastian Ruder, Yi Tay, Kefan Xiao, Yuanzhong Xu, Yujing Zhang,  
574 Gustavo Hernandez Abrego, Junwhan Ahn, Jacob Austin, Paul Barham, Jan Botha, James Brad-  
575 bury, Siddhartha Brahma, Kevin Brooks, Michele Catasta, Yong Cheng, Colin Cherry, Christo-  
576 pher A. Choquette-Choo, Aakanksha Chowdhery, Clément Crepy, Shachi Dave, Mostafa De-  
577 hghani, Sunipa Dev, Jacob Devlin, Mark Díaz, Nan Du, Ethan Dyer, Vlad Feinberg, Fangxi-  
578 aoyu Feng, Vlad Fienber, Markus Freitag, Xavier Garcia, Sebastian Gehrmann, Lucas Gonzalez,  
579 Guy Gur-Ari, Steven Hand, Hadi Hashemi, Le Hou, Joshua Howland, Andrea Hu, Jeffrey Hui,  
580 Jeremy Hurwitz, Michael Isard, Abe Ittycheriah, Matthew Jagielski, Wenhao Jia, Kathleen Ke-  
581 nealy, Maxim Krikun, Sneha Kudugunta, Chang Lan, Katherine Lee, Benjamin Lee, Eric Li,  
582 Music Li, Wei Li, YaGuang Li, Jian Li, Hyeontaek Lim, Hanzhao Lin, Zhongtao Liu, Freder-  
583 ick Liu, Marcello Maggioni, Aroma Mahendru, Joshua Maynez, Vedant Misra, Maysam Mous-  
584 salem, Zachary Nado, John Nham, Eric Ni, Andrew Nystrom, Alicia Parrish, Marie Pellat, Mar-  
585 tin Polacek, Alex Polozov, Reiner Pope, Siyuan Qiao, Emily Reif, Bryan Richter, Parker Riley,  
586 Alex Castro Ros, Aurko Roy, Brennan Saeta, Rajkumar Samuel, Renee Shelby, Ambrose Stone,  
587 Daniel Smilkov, David R. So, Daniel Sohn, Simon Tokumine, Dasha Valter, Vijay Vasudevan,  
588 Kiran Vodrahalli, Xuezhi Wang, Pidong Wang, Zirui Wang, Tao Wang, John Wieting, Yuhuai  
589 Wu, Kelvin Xu, Yunhan Xu, Linting Xue, Pengcheng Yin, Jiahui Yu, Qiao Zhang, Steven Zheng,

---

594 Ce Zheng, Weikang Zhou, Denny Zhou, Slav Petrov, and Yonghui Wu. Palm 2 technical report,  
595 2023.

596

597 Anthropic. The claude 3 model family: Opus, sonnet, haiku, 2022. URL [https://www-cdn.](https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf)  
598 [anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model\\_](https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf)  
599 [Card\\_Claude\\_3.pdf](https://www-cdn.anthropic.com/de8ba9b01c9ab7cbabf5c33b80b7bbc618857627/Model_Card_Claude_3.pdf).

600

601 Wissam Antoun, Fady Baly, and Hazem Hajj. Aragpt2: Pre-trained transformer for arabic language  
602 generation. *arXiv preprint arXiv:2012.15520*, 2020.

603

604 Mikel Artetxe, Gorka Labaka, and Eneko Agirre. Generalizing and improving bilingual word em-  
605 bedding mappings with a multi-step framework of linear transformations. In *Proceedings of the*  
606 *Thirty-Second AAAI Conference on Artificial Intelligence*, pp. 5012–5019, 2018.

607

608 Mikel Artetxe, Sebastian Ruder, and Dani Yogatama. On the cross-lingual transferability of mono-  
609 lingual representations, 2019.

610

611 Mohammad Gheshlaghi Azar, Mark Rowland, Bilal Piot, Daniel Guo, Daniele Calandriello, Michal  
612 Valko, and Rémi Munos. A general theoretical paradigm to understand learning from human  
613 preferences, 2023. URL <https://arxiv.org/abs/2310.12036>.

614

615 Stephen H. Bach, Victor Sanh, Zheng-Xin Yong, Albert Webson, Colin Raffel, Nihal V. Nayak,  
616 Abheesht Sharma, Taewoon Kim, M Saiful Bari, Thibault Fevry, Zaid Alyafeai, Manan Dey,  
617 Andrea Santilli, Zhiqing Sun, Srulik Ben-David, Canwen Xu, Gunjan Chhablani, Han Wang,  
618 Jason Alan Fries, Maged S. Al-shaibani, Shanya Sharma, Urmish Thakker, Khalid Almubarak,  
619 Xiangru Tang, Xiangru Tang, Mike Tian-Jian Jiang, and Alexander M. Rush. Promptsource: An  
620 integrated development environment and repository for natural language prompts, 2022.

621

622 Yuntao Bai, Saurav Kadavath, Sandipan Kundu, Amanda Askell, Jackson Kernion, Andy Jones,  
623 Anna Chen, Anna Goldie, Azalia Mirhoseini, Cameron McKinnon, Carol Chen, Catherine Ols-  
624 son, Christopher Olah, Danny Hernandez, Dawn Drain, Deep Ganguli, Dustin Li, Eli Tran-  
625 Johnson, Ethan Perez, Jamie Kerr, Jared Mueller, Jeffrey Ladish, Joshua Landau, Kamal Ndousse,  
626 Kamile Lukosuite, Liane Lovitt, Michael Sellitto, Nelson Elhage, Nicholas Schiefer, Noemi Mer-  
627 cado, Nova DasSarma, Robert Lasenby, Robin Larson, Sam Ringer, Scott Johnston, Shauna  
628 Kravec, Sheer El Showk, Stanislav Fort, Tamera Lanham, Timothy Telleen-Lawton, Tom Con-  
629 erly, Tom Henighan, Tristan Hume, Samuel R. Bowman, Zac Hatfield-Dodds, Ben Mann, Dario  
630 Amodei, Nicholas Joseph, Sam McCandlish, Tom Brown, and Jared Kaplan. Constitutional ai:  
631 Harmlessness from ai feedback, 2022. URL <https://arxiv.org/abs/2212.08073>.

632

633 M Saiful Bari, Shafiq Joty, and Prathyusha Jwalapuram. Zero-resource cross-lingual named entity  
634 recognition. In *Proceedings of the aaai conference on artificial intelligence*, volume 34, pp. 7415–  
635 7423, 2020.

636

637 M Saiful Bari, Tasnim Mohiuddin, and Shafiq Joty. Uxla: A robust unsupervised data augmentation  
638 framework for cross-lingual nlp. In *Proceedings of The Joint Conference of the 59th Annual Meet-*  
639 *ing of the Association for Computational Linguistics and the 11th International Joint Conference*  
640 *on Natural Language Processing (ACL-IJCNLP 2021)*, Online, 2021. Association for Computa-  
641 tional Linguistics.

642

643 Loubna Ben Allal, Niklas Muennighoff, Logesh Kumar Umapathi, Ben Lipkin, and Leandro von  
644 Werra. A framework for the evaluation of code generation models. [https://github.com/](https://github.com/bigcode-project/bigcode-evaluation-harness)  
645 [bigcode-project/bigcode-evaluation-harness](https://github.com/bigcode-project/bigcode-evaluation-harness), 2022.

646

647 Yoshua Bengio, Réjean Ducharme, Pascal Vincent, and Christian Janvin. A neural probabilis-  
tic language model. *J. Mach. Learn. Res.*, 3:1137–1155, 2003. URL [https://api.](https://api.semanticscholar.org/CorpusID:221275765)  
[semanticscholar.org/CorpusID:221275765](https://api.semanticscholar.org/CorpusID:221275765).

Yonatan Bisk, Rowan Zellers, Ronan Le Bras, Jianfeng Gao, and Yejin Choi. Piqa: Reasoning  
about physical commonsense in natural language. In *Thirty-Fourth AAAI Conference on Artificial  
Intelligence*, 2020.

- Houda Bouamor, Sabit Hassan, and Nizar Habash. The MADAR shared task on Arabic fine-grained dialect identification. In Wassim El-Hajj, Lamia Hadrich Belguith, Fethi Bougares, Walid Magdy, Imed Zitouni, Nadi Tomeh, Mahmoud El-Haj, and Wajdi Zaghoulani (eds.), *Proceedings of the Fourth Arabic Natural Language Processing Workshop*, pp. 199–207, Florence, Italy, August 2019. Association for Computational Linguistics. doi: 10.18653/v1/W19-4622. URL <https://aclanthology.org/W19-4622>.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020a.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020b. URL <https://arxiv.org/abs/2005.14165>.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, Harsha Nori, Hamid Palangi, Marco Tulio Ribeiro, and Yi Zhang. Sparks of artificial general intelligence: Early experiments with gpt-4, 2023.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, Parker Schuh, Kensen Shi, Sasha Tsvyashchenko, Joshua Maynez, Abhishek Rao, Parker Barnes, Yi Tay, Noam Shazeer, Vinodkumar Prabhakaran, Emily Reif, Nan Du, Ben Hutchinson, Reiner Pope, James Bradbury, Jacob Austin, Michael Isard, Guy Gur-Ari, Pengcheng Yin, Toju Duke, Anselm Levskaya, Sanjay Ghemawat, Sunipa Dev, Henryk Michalewski, Xavier Garcia, Vedant Misra, Kevin Robinson, Liam Fedus, Denny Zhou, Daphne Ippolito, David Luan, Hyeontaek Lim, Barret Zoph, Alexander Spiridonov, Ryan Sepassi, David Dohan, Shivani Agrawal, Mark Omernick, Andrew M. Dai, Thanumalayan Sankaranarayanan Pillai, Marie Pellat, Aitor Lewkowycz, Erica Moreira, Rewon Child, Oleksandr Polozov, Katherine Lee, Zongwei Zhou, Xuezhi Wang, Brennan Saeta, Mark Diaz, Orhan Firat, Michele Catasta, Jason Wei, Kathy Meier-Hellstern, Douglas Eck, Jeff Dean, Slav Petrov, and Noah Fiedel. Palm: Scaling language modeling with pathways. *CoRR*, abs/2204.02311, 2022. doi: 10.48550/arXiv.2204.02311. URL <https://doi.org/10.48550/arXiv.2204.02311>.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, Albert Webson, Shixiang Shane Gu, Zhuyun Dai, Mirac Suzgun, Xinyun Chen, Aakanksha Chowdhery, Alex Castro-Ros, Marie Pellat, Kevin Robinson, Dasha Valter, Sharan Narang, Gaurav Mishra, Adams Yu, Vincent Zhao, Yanping Huang, Andrew Dai, Hongkun Yu, Slav Petrov, Ed H. Chi, Jeff Dean, Jacob Devlin, Adam Roberts, Denny Zhou, Quoc V. Le, and Jason Wei. Scaling instruction-finetuned language models, 2022. URL <https://arxiv.org/abs/2210.11416>.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. BoolQ: Exploring the surprising difficulty of natural yes/no questions. In *Proceedings of NAACL-HLT 2019*, 2019.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *ArXiv*, abs/1803.05457, 2018.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems, 2021.

- Ronan Collobert and Jason Weston. A unified architecture for natural language processing: Deep neural networks with multitask learning. In *Proceedings of the 25th International Conference on Machine Learning*, ICML '08, pp. 160–167, New York, NY, USA, 2008. Association for Computing Machinery. ISBN 9781605582054. doi: 10.1145/1390156.1390177. URL <https://doi.org/10.1145/1390156.1390177>.
- Alexis Conneau, Guillaume Lample, Marc’Aurelio Ranzato, Ludovic Denoyer, and Hervé Jégou. Word translation without parallel data. *CoRR*, abs/1710.04087, 2017. URL <http://arxiv.org/abs/1710.04087>.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Un-supervised cross-lingual representation learning at scale. *arXiv preprint arXiv:1911.02116*, 2019.
- Yiming Cui, Ziqing Yang, and Xin Yao. Efficient and effective text encoding for chinese llama and alpaca. *arXiv preprint arXiv:2304.08177*, 2023.
- Tri Dao. FlashAttention-2: Faster attention with better parallelism and work partitioning. In *International Conference on Learning Representations (ICLR)*, 2024.
- Tri Dao, Daniel Y. Fu, Stefano Ermon, Atri Rudra, and Christopher Ré. FlashAttention: Fast and memory-efficient exact attention with IO-awareness. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2022.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: pre-training of deep bidirectional transformers for language understanding. In Jill Burstein, Christy Doran, and Thamar Solorio (eds.), *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, NAACL-HLT 2019, Minneapolis, MN, USA, June 2-7, 2019, Volume 1 (Long and Short Papers)*, pp. 4171–4186. Association for Computational Linguistics, 2019. doi: 10.18653/v1/n19-1423. URL <https://doi.org/10.18653/v1/n19-1423>.
- Ning Ding, Yulin Chen, Bokai Xu, Yujia Qin, Zhi Zheng, Shengding Hu, Zhiyuan Liu, Maosong Sun, and Bowen Zhou. Enhancing chat language models by scaling high-quality instructional conversations. *arXiv preprint arXiv:2305.14233*, 2023.
- Jesse Dodge, Taylor Prewitt, Remi Tachet Des Combes, Erika Odmark, Roy Schwartz, Emma Strubell, Alexandra Sasha Luccioni, Noah A. Smith, Nicole DeCario, and Will Buchanan. Measuring the carbon intensity of ai in cloud instances, 2022.
- Moussa Kamal Eddine, Nadi Tomeh, Nizar Habash, Joseph Le Roux, and Michalis Vazirgiannis. Arabart: a pretrained arabic sequence-to-sequence model for abstractive summarization. *arXiv preprint arXiv:2203.10945*, 2022.
- AbdelRahim Elmadany, Muhammad Abdul-Mageed, et al. Arat5: Text-to-text transformers for arabic language generation. In *Proceedings of the 60th annual meeting of the association for computational linguistics (Volume 1: Long papers)*, pp. 628–647, 2022.
- Kawin Ethayarajh, Winnie Xu, Niklas Muennighoff, Dan Jurafsky, and Douwe Kiela. Kto: Model alignment as prospect theoretic optimization, 2024. URL <https://arxiv.org/abs/2402.01306>.
- Leo Gao, Stella Biderman, Sid Black, Laurence Golding, Travis Hoppe, Charles Foster, Jason Phang, Horace He, Anish Thite, Noa Nabeshima, Shawn Presser, and Connor Leahy. The pile: An 800gb dataset of diverse text for language modeling. *CoRR*, abs/2101.00027, 2021. URL <https://arxiv.org/abs/2101.00027>.
- Leo Gao, Jonathan Tow, Baber Abbasi, Stella Biderman, Sid Black, Anthony DiPofi, Charles Foster, Laurence Golding, Jeffrey Hsu, Alain Le Noac’h, Haonan Li, Kyle McDonell, Niklas Muennighoff, Chris Ociepa, Jason Phang, Laria Reynolds, Hailey Schoelkopf, Aviya Skowron, Lintang Sutawika, Eric Tang, Anish Thite, Ben Wang, Kevin Wang, and Andy Zou. A framework for few-shot language model evaluation, 12 2023. URL <https://zenodo.org/records/10256836>.

- Aidan Gomez. Introducing Command R+: A Scalable LLM Built for Business, April 2024. URL <https://cohere.com/blog/command-r-plus-microsoft-azure>.
- Google. Carbon free energy for google cloud regions, 2021. URL <https://cloud.google.com/sustainability/region-carbon>.
- Google. Gemini: A family of highly capable multimodal models, 2024.
- Edouard Grave, Piotr Bojanowski, Prakhar Gupta, Armand Joulin, and Tomas Mikolov. Learning word vectors for 157 languages. In *Proceedings of the International Conference on Language Resources and Evaluation (LREC 2018)*, 2018.
- Momchil Hardalov, Todor Mihaylov, Dimitrina Zlatkova, Yoan Dinkov, Ivan Koychev, and Preslav Nakov. Exams: A multi-subject high school examinations dataset for cross-lingual and multilingual question answering. *arXiv preprint arXiv:2011.03080*, 2020.
- Dan Hendrycks and Mantas Mazeika. X-risk analysis for ai research, 2022.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint arXiv:2009.03300*, 2020.
- Dan Hendrycks, Collin Burns, Steven Basart, Andrew Critch, Jerry Li, Dawn Song, and Jacob Steinhardt. Aligning ai with shared human values. *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021a.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *NeurIPS*, 2021b.
- Sepp Hochreiter and Jürgen Schmidhuber. Long short-term memory. *Neural computation*, 9:1735–80, 12 1997. doi: 10.1162/neco.1997.9.8.1735.
- Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza Rutherford, Diego de Las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al. Training compute-optimal large language models. *arXiv preprint arXiv:2203.15556*, 2022. URL <https://arxiv.org/abs/2203.15556>.
- Jiwoo Hong, Noah Lee, and James Thorne. Orpo: Monolithic preference optimization without reference model, 2024. URL <https://arxiv.org/abs/2403.07691>.
- Jeremy Howard and Sebastian Ruder. Universal language model fine-tuning for text classification. In Iryna Gurevych and Yusuke Miyao (eds.), *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 328–339, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1031. URL <https://aclanthology.org/P18-1031>.
- Haoyang Huang, Yaobo Liang, Nan Duan, Ming Gong, Linjun Shou, Daxin Jiang, and Ming Zhou. Unicoder: A universal language encoder by pre-training with multiple cross-lingual tasks. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 2485–2494, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1252. URL <https://aclanthology.org/D19-1252>.
- Huang Huang, Fei Yu, Jianqing Zhu, Xuening Sun, Hao Cheng, Dingjie Song, Zhihong Chen, Abdulmohsen Alharthi, Bang An, Ziche Liu, et al. Acegpt, localizing large language models in arabic. *arXiv preprint arXiv:2309.12053*, 2023.
- Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics*, Vancouver, Canada, July 2017. Association for Computational Linguistics.

- Karthikeyan K, Zihan Wang, Stephen Mayhew, and Dan Roth. Cross-lingual ability of multilingual {bert}: An empirical study. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=HJeT3yrtDr>.
- Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B. Brown, Benjamin Chess, Rewon Child, Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models, 2020.
- Amr Keleg, Sharon Goldwater, and Walid Magdy. ALDi: Quantifying the Arabic level of dialectness of text. In Houda Bouamor, Juan Pino, and Kalika Bali (eds.), *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing*, pp. 10597–10611, Singapore, December 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.emnlp-main.655. URL <https://aclanthology.org/2023.emnlp-main.655>.
- Mohammad Abdullah Matin Khan, M Saiful Bari, Xuan Long Do, Weishi Wang, Md Rizwan Parvez, and Shafiq Joty. xcodeeval: A large scale multilingual multitask benchmark for code understanding, generation, translation and retrieval, 2023.
- Denis Kocetkov, Raymond Li, Loubna Ben Allal, Jia Li, Chenghao Mou, Carlos Muñoz Ferrandis, Yacine Jernite, Margaret Mitchell, Sean Hughes, Thomas Wolf, Dzmitry Bahdanau, Leandro von Werra, and Harm de Vries. The stack: 3 tb of permissively licensed source code, 2022.
- Fajri Koto, Haonan Li, Sara Shatnawi, Jad Doughman, Abdelrahman Boda Sadallah, Aisha Alraeesi, Khalid Almubarak, Zaid Alyafeai, Neha Sengupta, Shady Shehata, et al. Arabicmmlu: Assessing massive multitask language understanding in arabic. *arXiv preprint arXiv:2402.12840*, 2024.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Matthew Kelcey, Jacob Devlin, Kenton Lee, Kristina N. Toutanova, Llion Jones, Ming-Wei Chang, Andrew Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. Natural questions: a benchmark for question answering research. *Transactions of the Association of Computational Linguistics*, 2019.
- Imad Lakim, Ebtesam Almazrouei, Ibrahim Abualhaol, Merouane Debbah, and Julien Launay. A holistic assessment of the carbon footprint of noor, a very large arabic language model. In *Proceedings of BigScience Episode# 5—Workshop on Challenges & Perspectives in Creating Large Language Models*, pp. 84–94, 2022.
- Guillaume Lample and Alexis Conneau. Cross-lingual language model pretraining. *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- Md Tahmid Rahman Laskar, M Saiful Bari, Mizanur Rahman, Md Amran Hossen Bhuiyan, Shafiq Joty, and Jimmy Xiangji Huang. A systematic study and comprehensive evaluation of chatgpt on benchmark datasets, 2023.
- Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with language models, 2022.
- Peiqin Lin, Shaoxiong Ji, Jörg Tiedemann, André FT Martins, and Hinrich Schütze. Mala-500: Massive language adaptation of large language models. *arXiv preprint arXiv:2401.13303*, 2024.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods. *arXiv preprint arXiv:2109.07958*, 2021.
- Stephanie Lin, Jacob Hilton, and Owain Evans. TruthfulQA: Measuring how models mimic human falsehoods. In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 3214–3252, Dublin, Ireland, May 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-long.229. URL <https://aclanthology.org/2022.acl-long.229>.
- Alexandra Sasha Luccioni and Alex Hernandez-Garcia. Counting carbon: A survey of factors influencing the emissions of machine learning, 2023.

- 
- Gary Marcus. Is chatgpt really a “code red” for google search?, 2022. URL <https://garymarcus.substack.com/p/is-chatgpt-really-a-code-red-for>.
- Bryan McCann, James Bradbury, Caiming Xiong, and Richard Socher. Learned in translation: Contextualized word vectors. In *Advances in Neural Information Processing Systems*, pp. 6297–6308, 2017.
- Yu Meng, Mengzhou Xia, and Danqi Chen. Simpo: Simple preference optimization with a reference-free reward, 2024. URL <https://arxiv.org/abs/2405.14734>.
- Meta. Introducing meta llama 3: The most capable openly available llm to date, 2024. URL <https://ai.meta.com/blog/meta-llama-3/>.
- Tomas Mikolov, Ilya Sutskever, Kai Chen, Greg S Corrado, and Jeff Dean. Distributed representations of words and phrases and their compositionality. In C. J. C. Burges, L. Bottou, M. Welling, Z. Ghahramani, and K. Q. Weinberger (eds.), *Advances in Neural Information Processing Systems* 26, pp. 3111–3119. Curran Associates, Inc., 2013.
- Mistral. Au large, 2024. URL <https://mistral.ai/news/mistral-large/>.
- Tasnim Mohiuddin, M Saiful Bari, and Shafiq Joty. Lnmap: Departures from isomorphic assumption in bilingual lexicon induction through non-linear mapping in latent space, 2020. URL <https://arxiv.org/abs/2004.13889>.
- Hamdy Mubarak, Ahmed Abdelali, Sabit Hassan, and Kareem Darwish. *Spam Detection on Arabic Twitter*, pp. 237–251. 10 2020. ISBN 978-3-030-60974-0. doi: 10.1007/978-3-030-60975-7\_18.
- Niklas Muennighoff, Thomas Wang, Lintang Sutawika, Adam Roberts, Stella Biderman, Teven Le Scao, M Saiful Bari, Sheng Shen, Zheng-Xin Yong, Hailey Schoelkopf, Xiangru Tang, Dragomir Radev, Alham Fikri Aji, Khalid Almubarak, Samuel Albanie, Zaid Alyafeai, Albert Webson, Edward Raff, and Colin Raffel. Crosslingual generalization through multitask finetuning, 2022.
- El Moatez Billah Nagoudi, Muhammad Abdul-Mageed, AbdelRahim Elmadany, Alcides Alcoba Inciarte, and Md Tawkat Islam Khondaker. Jasmine: Arabic gpt models for few-shot learning. *arXiv preprint arXiv:2212.10755*, 2022.
- Tarek Naous, Michael J. Ryan, Alan Ritter, and Wei Xu. Having beer after prayer? measuring cultural bias in large language models, 2024.
- Xuan-Phi Nguyen, Wenxuan Zhang, Xin Li, Mahani Aljunied, Qingyu Tan, Liying Cheng, Guanzheng Chen, Yue Deng, Sen Yang, Chaoqun Liu, Hang Zhang, and Lidong Bing. Seallms – large language models for southeast asia, 2023.
- Jinjie Ni, Fuzhao Xue, Xiang Yue, Yuntian Deng, Mahir Shah, Kabir Jain, Graham Neubig, and Yang You. Mixeval: Deriving wisdom of the crowd from llm benchmark mixtures, 2024.
- OpenAI. Chatgpt: Optimizing language models for dialogue, 2022. URL <https://openai.com/blog/chatgpt/>.
- Aitor Ormazabal, Che Zheng, Cyprien de Masson d’Autume, Dani Yogatama, Deyu Fu, Donovan Ong, Eric Chen, Eugenie Lamprecht, Hai Pham, Isaac Ong, Kaloyan Aleksiev, Lei Li, Matthew Henderson, Max Bain, Mikel Artetxe, Nishant Relan, Piotr Padlewski, Qi Liu, Ren Chen, Samuel Phua, Yazheng Yang, Yi Tay, Yuqi Wang, Zhongkai Zhu, and Zhihui Xie. Reka core, flash, and edge: A series of powerful multimodal language models, 2024.
- Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kelton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike, and Ryan Lowe. Training language models to follow instructions with human feedback, 2022. URL <https://arxiv.org/abs/2203.02155>.
- Ryan Park, Rafael Rafailov, Stefano Ermon, and Chelsea Finn. Disentangling length from quality in direct preference optimization, 2024. URL <https://arxiv.org/abs/2403.19159>.

- Guilherme Penedo, Quentin Malartic, Daniel Hesslow, Ruxandra Cojocaru, Alessandro Cappelli, Hamza Alobeidli, Baptiste Pannier, Ebtesam Almazrouei, and Julien Launay. The RefinedWeb dataset for Falcon LLM: outperforming curated corpora with web data, and web data only. *arXiv preprint arXiv:2306.01116*, 2023. URL <https://arxiv.org/abs/2306.01116>.
- Guilherme Penedo, Hynek Kydlíček, Loubna Ben allal, Anton Lozhkov, Margaret Mitchell, Colin Raffel, Leandro Von Werra, and Thomas Wolf. The fineweb datasets: Decanting the web for the finest text data at scale, 2024.
- Jeffrey Pennington, Richard Socher, and Christopher Manning. Glove: Global vectors for word representation. In *EMNLP’14*, pp. 1532–1543, Doha, Qatar, October 2014. URL <http://www.aclweb.org/anthology/D14-1162>.
- Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. In *NAACL*, 2018a.
- Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations, 2018b.
- Telmo Pires, Eva Schlinger, and Dan Garrette. How multilingual is multilingual BERT? In Anna Korhonen, David Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 4996–5001, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1493. URL <https://aclanthology.org/P19-1493>.
- Alec Radford, Karthik Narasimhan, Tim Salimans, Ilya Sutskever, et al. Improving language understanding by generative pre-training. *OpenAI blog*, 2018.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, Ilya Sutskever, et al. Language models are unsupervised multitask learners. *OpenAI blog*, 1(8):9, 2019.
- Jack W. Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, H. Francis Song, John Aslanides, Sarah Henderson, Roman Ring, Susannah Young, Eliza Rutherford, Tom Hennigan, Jacob Menick, Albin Cassirer, Richard Powell, George van den Driessche, Lisa Anne Hendricks, Maribeth Rauh, Po-Sen Huang, Amelia Glaese, Johannes Welbl, Sumanth Dathathri, Saffron Huang, Jonathan Uesato, John Mellor, Irina Higgins, Antonia Creswell, Nat McAleese, Amy Wu, Erich Elsen, Siddhant M. Jayakumar, Elena Buchatskaya, David Budden, Esme Sutherland, Karen Simonyan, Michela Paganini, Laurent Sifre, Lena Martens, Xiang Lorraine Li, Adhiguna Kuncoro, Aida Nematzadeh, Elena Gribovskaya, Domenic Donato, Angeliki Lazaridou, Arthur Mensch, Jean-Baptiste Lespiau, Maria Tsimpoukelli, Nikolai Grigorev, Doug Fritz, Thibault Sottiaux, Mantas Pajarskas, Toby Pohlen, Zhitao Gong, Daniel Toyama, Cyprien de Masson d’Autume, Yujia Li, Tayfun Terzi, Vladimir Mikulik, Igor Babuschkin, Aidan Clark, Diego de Las Casas, Aurelia Guy, Chris Jones, James Bradbury, Matthew J. Johnson, Blake A. Hechtman, Laura Weidinger, Iason Gabriel, William Isaac, Edward Lockhart, Simon Osindero, Laura Rimell, Chris Dyer, Oriol Vinyals, Kareem Ayoub, Jeff Stanway, Lorraine Bennett, Demis Hassabis, Koray Kavukcuoglu, and Geoffrey Irving. Scaling language models: Methods, analysis & insights from training gopher. *CoRR*, abs/2112.11446, 2021. URL <https://arxiv.org/abs/2112.11446>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Stefano Ermon, Christopher D. Manning, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model, 2023. URL <https://arxiv.org/abs/2305.18290>.
- Rafael Rafailov, Archit Sharma, Eric Mitchell, Christopher D Manning, Stefano Ermon, and Chelsea Finn. Direct preference optimization: Your language model is secretly a reward model. *Advances in Neural Information Processing Systems*, 36, 2024.
- Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi Zhou, Wei Li, and Peter J. Liu. Exploring the limits of transfer learning with a unified text-to-text transformer. *J. Mach. Learn. Res.*, 21:140:1–140:67, 2020. URL <http://jmlr.org/papers/v21/20-074.html>.

- Szymon Ruciński. Efficient language adaptive pre-training: Extending state-of-the-art large language models for polish. *arXiv preprint arXiv:2402.09759*, 2024.
- Keisuke Sakaguchi, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Winogrande: An adversarial winograd schema challenge at scale. *arXiv preprint arXiv:1907.10641*, 2019.
- Victor Sanh, Albert Webson, Colin Raffel, Stephen H. Bach, Lintang Sutawika, Zaid Alyafeai, Antoine Chaffin, Arnaud Stiegler, Teven Le Scao, Arun Raja, Manan Dey, M Saiful Bari, Canwen Xu, Urmish Thakker, Shanya Sharma Sharma, Eliza Szczechla, Taewoon Kim, Gunjan Chhablani, Nihal Nayak, Debajyoti Datta, Jonathan Chang, Mike Tian-Jian Jiang, Han Wang, Matteo Manica, Sheng Shen, Zheng Xin Yong, Harshit Pandey, Rachel Bawden, Thomas Wang, Trishala Neeraj, Jos Rozen, Abheesht Sharma, Andrea Santilli, Thibault Fevry, Jason Alan Fries, Ryan Teehan, Tali Bers, Stella Biderman, Leo Gao, Thomas Wolf, and Alexander M. Rush. Multitask prompted training enables zero-shot task generalization, 2021. URL <https://arxiv.org/abs/2110.08207>.
- David Saxton, Edward Grefenstette, Felix Hill, and Pushmeet Kohli. Analysing mathematical reasoning abilities of neural models, 2019.
- Teven Le Scao, Angela Fan, Christopher Akiki, Ellie Pavlick, Suzana Ilić, Daniel Hesslow, Roman Castagné, Alexandra Sasha Luccioni, François Yvon, Matthias Gallé, Jonathan Tow, Alexander M. Rush, Stella Biderman, Albert Webson, Pawan Sasanka Ammanamanchi, Thomas Wang, Benoît Sagot, Niklas Muennighoff, Albert Villanova del Moral, Olatunji Ruwase, Rachel Bawden, Stas Bekman, Angelina McMillan-Major, Iz Beltagy, Huu Nguyen, Lucile Saulnier, Samson Tan, Pedro Ortiz Suarez, Victor Sanh, Hugo Laurençon, Yacine Jernite, Julien Launay, Margaret Mitchell, Colin Raffel, Aaron Gokaslan, Adi Simhi, Aitor Soroa, Alham Fikri Aji, Amit Alfassy, Anna Rogers, Ariel Kreisberg Nitzav, Canwen Xu, Chenghao Mou, Chris Emezue, Christopher Klamm, Colin Leong, Daniel van Strien, David Ifeoluwa Adelani, Dragomir Radev, Eduardo González Ponferrada, Efrat Levkovizh, Ethan Kim, Eyal Bar Natan, Francesco De Toni, Gérard Dupont, Germán Kruszewski, Giada Pistilli, Hady Elsahar, Hamza Benyamina, Hieu Tran, Ian Yu, Idris Abdulmumin, Isaac Johnson, Itziar Gonzalez-Dios, Javier de la Rosa, Jenny Chim, Jesse Dodge, Jian Zhu, Jonathan Chang, Jörg Froberg, Joseph Tobing, Joydeep Bhattacharjee, Khalid Almubarak, Kimbo Chen, Kyle Lo, Leandro Von Werra, Leon Weber, Long Phan, Loubna Ben allal, Ludovic Tanguy, Manan Dey, Manuel Romero Muñoz, Maraim Masmoud, María Grandury, Mario Šaško, Max Huang, Maximin Coavoux, Mayank Singh, Mike Tian-Jian Jiang, Minh Chien Vu, Mohammad A. Jauhar, Mustafa Ghaleb, Nishant Subramani, Nora Kassner, Nurulaqilla Khamis, Olivier Nguyen, Omar Espejel, Ona de Gibert, Paulo Villegas, Peter Henderson, Pierre Colombo, Priscilla Amuok, Quentin Lhoest, Rheza Harliman, Rishi Bommasani, Roberto Luis López, Rui Ribeiro, Salomey Osei, Sampo Pyysalo, Sebastian Nagel, Shamik Bose, Shamsuddeen Hassan Muhammad, Shanya Sharma, Shayne Longpre, Somaieh Nikpoor, Stanislav Silberberg, Suhas Pai, Sydney Zink, Tiago Timponi Torrent, Timo Schick, Tristan Thrush, Valentin Danchev, Vassilina Nikoulina, Veronika Laippala, Violette Lepercq, Vrinda Prabhu, Zaid Alyafeai, Zeerak Talat, Arun Raja, Benjamin Heinzerling, Chenglei Si, Davut Emre Taşar, Elizabeth Salesky, Sabrina J. Mielke, Wilson Y. Lee, Abheesht Sharma, Andrea Santilli, Antoine Chaffin, Arnaud Stiegler, Debajyoti Datta, Eliza Szczechla, Gunjan Chhablani, Han Wang, Harshit Pandey, Hendrik Strobelt, Jason Alan Fries, Jos Rozen, Leo Gao, Lintang Sutawika, M Saiful Bari, Maged S. Al-shaibani, Matteo Manica, Nihal Nayak, Ryan Teehan, Samuel Albanie, Sheng Shen, Srulik Ben-David, Stephen H. Bach, Taewoon Kim, Tali Bers, Thibault Fevry, Trishala Neeraj, Urmish Thakker, Vikas Raunak, Xiangru Tang, Zheng-Xin Yong, Zhiqing Sun, Shaked Brody, Yallow Uri, Hadar Tojarieh, Adam Roberts, Hyung Won Chung, Jaesung Tae, Jason Phang, Ofir Press, Conglong Li, Deepak Narayanan, Hatim Bourfoune, Jared Casper, Jeff Rasley, Max Ryabinin, Mayank Mishra, Minjia Zhang, Mohammad Shoeybi, Myriam Peyrounette, Nicolas Patry, Nouamane Tazi, Omar Sanseviero, Patrick von Platen, Pierre Cornette, Pierre François Lavallée, Rémi Lacroix, Samyam Rajbhandari, Sanchit Gandhi, Shaden Smith, Stéphane Requena, Suraj Patil, Tim Dettmers, Ahmed Baruwa, Amanpreet Singh, Anastasia Cheveleva, Anne-Laure Ligozat, Arjun Subramonian, Aurélie Névél, Charles Lovering, Dan Garrette, Deepak Tunuguntla, Ehud Reiter, Ekaterina Taktasheva, Ekaterina Voloshina, Eli Bogdanov, Genta Indra Winata, Hailey Schoelkopf, Jan-Christoph Kalo, Jekaterina Novikova, Jessica Zosa Forde, Jordan Clive, Jungo Kasai, Ken Kawamura, Liam Hazan, Marine Carpuat, Miruna Clinciu, Najoung Kim, Newton Cheng, Oleg Serikov, Omer Antverg, Oskar van der Wal,

Rui Zhang, Ruochen Zhang, Sebastian Gehrmann, Shachar Mirkin, Shani Pais, Tatiana Shavrina, Thomas Scialom, Tian Yun, Tomasz Limisiewicz, Verena Rieser, Vitaly Protasov, Vladislav Mikhailov, Yada Pruksachatkun, Yonatan Belinkov, Zachary Bamberger, Zdeněk Kasner, Alice Rueda, Amanda Pestana, Amir Feizpour, Ammar Khan, Amy Faranak, Ana Santos, Anthony Hevia, Antigona Unldreaj, Arash Aghagol, Arezoo Abdollahi, Aycha Tammour, Azadeh Haji-Hosseini, Bahareh Behroozi, Benjamin Ajibade, Bharat Saxena, Carlos Muñoz Ferrandis, Daniel McDuff, Danish Contractor, David Lansky, Davis David, Douwe Kiela, Duong A. Nguyen, Edward Tan, Emi Baylor, Ezinwanne Ozoani, Fatima Mirza, Frankline Ononiwu, Habib Rezanejad, Hessie Jones, Indrani Bhattacharya, Irene Solaiman, Irina Sedenko, Isar Nejadgholi, Jesse Passmore, Josh Seltzer, Julio Bonis Sanz, Livia Dutra, Mairon Samagaio, Maraim Elbadri, Margot Mieskes, Marissa Gerchick, Martha Akinlolu, Michael McKenna, Mike Qiu, Muhammed Ghauri, Mykola Burynok, Nafis Abrar, Nazneen Rajani, Nour Elkott, Nour Fahmy, Olanrewaju Samuel, Ran An, Rasmus Kromann, Ryan Hao, Samira Alizadeh, Sarmad Shubber, Silas Wang, Sourav Roy, Sylvain Viguier, Thanh Le, Tobi Oyeade, Trieu Le, Yoyo Yang, Zach Nguyen, Abhinav Ramesh Kashyap, Alfredo Palasciano, Alison Callahan, Anima Shukla, Antonio Miranda-Escalada, Ayush Singh, Benjamin Beilharz, Bo Wang, Caio Brito, Chenxi Zhou, Chirag Jain, Chuxin Xu, Clémentine Fourrier, Daniel León Perrián, Daniel Molano, Dian Yu, Enrique Manjavacas, Fabio Barth, Florian Fuhrmann, Gabriel Altay, Giyaseddin Bayrak, Gully Burns, Helena U. Vrabec, Imane Bello, Ishani Dash, Jihyun Kang, John Giorgi, Jonas Golde, Jose David Posada, Karthik Rangasai Sivaraman, Lokesh Bulchandani, Lu Liu, Luisa Shinzato, Madeleine Hahn de Bykhovetz, Maiko Takeuchi, Marc Pàmies, Maria A Castillo, Marianna Nezhurina, Mario Sängler, Matthias Samwald, Michael Cullan, Michael Weinberg, Michiel De Wolf, Mina Mihaljcic, Minna Liu, Moritz Freidank, Myungsun Kang, Natasha Seelam, Nathan Dahlberg, Nicholas Michio Broad, Nikolaus Muellner, Pascale Fung, Patrick Haller, Ramya Chandrasekhar, Renata Eisenberg, Robert Martin, Rodrigo Canalli, Rosaline Su, Ruisi Su, Samuel Cahyawijaya, Samuele Garda, Shlok S Deshmukh, Shubhanshu Mishra, Sid Kiblawi, Simon Ott, Sinee Sang-aaronsiri, Srishti Kumar, Stefan Schweter, Sushil Bharati, Tanmay Laud, Théo Gigant, Tomoya Kainuma, Wojciech Kusa, Yanis Labrak, Yash Shailesh Bajaj, Yash Venkatraman, Yifan Xu, Yingxin Xu, Yu Xu, Zhe Tan, Zhongli Xie, Zifan Ye, Mathilde Bras, Younes Belkada, and Thomas Wolf. Bloom: A 176b-parameter open-access multilingual language model, 2023. URL <https://arxiv.org/abs/2211.05100>.

Neha Sengupta, Sunil Kumar Sahu, Bokang Jia, Satheesh Katipomu, Haonan Li, Fajri Koto, Osama Mohammed Afzal, Samta Kamboj, Onkar Pandit, Rahul Pal, et al. Jais and jais-chat: Arabic-centric foundation and instruction-tuned open generative large language models. *arXiv preprint arXiv:2308.16149*, 2023.

Claude E Shannon. Prediction and entropy of printed english. *Bell system technical journal*, 30(1): 50–64, 1951.

Shaden Smith, Mostofa Patwary, Brandon Norick, Patrick LeGresley, Samyam Rajbhandari, Jared Casper, Zhun Liu, Shrimai Prabhumoye, George Zerveas, Vijay Korthikanti, Elton Zhang, Rewon Child, Reza Yazdani Aminabadi, Julie Bernauer, Xia Song, Mohammad Shoeybi, Yuxiong He, Michael Houston, Saurabh Tiwary, and Bryan Catanzaro. Using deepspeed and megatron to train megatron-turing nlg 530b, a large-scale generative language model, 2022. URL <https://arxiv.org/abs/2201.11990>.

Daria Soboleva, Faisal Al-Khateeb, Robert Myers, Jacob R Steeves, Joel Hestness, and Nolan Dey. SlimPajama: A 627B token cleaned and deduplicated version of RedPajama, June 2023. URL <https://huggingface.co/datasets/cerebras/SlimPajama-627B>.

Luca Soldaini, Rodney Kinney, Akshita Bhagia, Dustin Schwenk, David Atkinson, Russell Authur, Ben Bogin, Khyathi Chandu, Jennifer Dumas, Yanai Elazar, Valentin Hofmann, Ananya Harsh Jha, Sachin Kumar, Li Lucy, Xinxu Lyu, Nathan Lambert, Ian Magnusson, Jacob Morrison, Niklas Muennighoff, Aakanksha Naik, Crystal Nam, Matthew E. Peters, Abhilasha Ravichander, Kyle Richardson, Zejiang Shen, Emma Strubell, Nishant Subramani, Oyvind Tafjord, Pete Walsh, Luke Zettlemoyer, Noah A. Smith, Hannaneh Hajishirzi, Iz Beltagy, Dirk Groeneveld, Jesse Dodge, and Kyle Lo. Dolma: an open corpus of three trillion tokens for language model pretraining research. *CoRR*, abs/2402.00159, 2024. doi: 10.48550/ARXIV.2402.00159. URL <https://doi.org/10.48550/arXiv.2402.00159>.

---

1080 Saleh Soltan, Shankar Ananthakrishnan, Jack FitzGerald, Rahul Gupta, Wael Hamza, Haidar Khan,  
1081 Charith Peris, Stephen Rawls, Andy Rosenbaum, Anna Rumshisky, Chandana Satya Prakash,  
1082 Mukund Sridhar, Fabian Triefenbach, Apurv Verma, Gokhan Tur, and Prem Natarajan. Alexatm  
1083 20b: Few-shot learning using a large-scale multilingual seq2seq model, 2022. URL <https://arxiv.org/abs/2208.01448>.  
1084  
1085 Nisan Stiennon, Long Ouyang, Jeff Wu, Daniel M. Ziegler, Ryan Lowe, Chelsea Voss, Alec Radford,  
1086 Dario Amodei, and Paul F. Christiano. Learning to summarize from human feedback. *CoRR*,  
1087 abs/2009.01325, 2020. URL <https://arxiv.org/abs/2009.01325>.  
1088  
1089 Emma Strubell, Ananya Ganesh, and Andrew McCallum. Energy and policy considerations for deep  
1090 learning in nlp, 2019.  
1091  
1092 Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung,  
1093 Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, , and Jason Wei. Challenging big-  
1094 bench tasks and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*,  
1095 2022.  
1096  
1097 Merrill Swain and Sharon Lapkin. Problems in Output and the Cognitive Processes They Generate:  
1098 A Step Towards Second Language Learning. *Applied Linguistics*, 16(3):371–391, 09 1995. ISSN  
1099 0142-6001. doi: 10.1093/applin/16.3.371. URL [https://doi.org/10.1093/applin/](https://doi.org/10.1093/applin/16.3.371)  
1100 [16.3.371](https://doi.org/10.1093/applin/16.3.371).  
1101  
1102 THUDM. Codegeex: A multilingual code generation model. [https://github.com/THUDM/](https://github.com/THUDM/CodeGeeX)  
1103 [CodeGeeX](https://github.com/THUDM/CodeGeeX), 2022.  
1104  
1105 Together Computer. Redpajama: an open dataset for training large language models, October 2023.  
1106 URL <https://github.com/togethercomputer/RedPajama-Data>.  
1107  
1108 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Niko-  
1109 lay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher,  
1110 Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy  
1111 Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn,  
1112 Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel  
1113 Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee,  
1114 Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra,  
1115 Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi,  
1116 Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh  
1117 Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen  
1118 Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic,  
1119 Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models,  
1120 2023a.  
1121  
1122 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Niko-  
1123 lay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, Dan Bikel, Lukas Blecher,  
1124 Cristian Canton Ferrer, Moya Chen, Guillem Cucurull, David Esiobu, Jude Fernandes, Jeremy  
1125 Fu, Wenyin Fu, Brian Fuller, Cynthia Gao, Vedanuj Goswami, Naman Goyal, Anthony Hartshorn,  
1126 Saghar Hosseini, Rui Hou, Hakan Inan, Marcin Kardas, Viktor Kerkez, Madian Khabsa, Isabel  
1127 Kloumann, Artem Korenev, Punit Singh Koura, Marie-Anne Lachaux, Thibaut Lavril, Jenya Lee,  
1128 Diana Liskovich, Yinghai Lu, Yuning Mao, Xavier Martinet, Todor Mihaylov, Pushkar Mishra,  
1129 Igor Molybog, Yixin Nie, Andrew Poulton, Jeremy Reizenstein, Rashi Rungta, Kalyan Saladi,  
1130 Alan Schelten, Ruan Silva, Eric Michael Smith, Ranjan Subramanian, Xiaoqing Ellen Tan, Binh  
1131 Tang, Ross Taylor, Adina Williams, Jian Xiang Kuan, Puxin Xu, Zheng Yan, Iliyan Zarov, Yuchen  
1132 Zhang, Angela Fan, Melanie Kambadur, Sharan Narang, Aurelien Rodriguez, Robert Stojnic,  
1133 Sergey Edunov, and Thomas Scialom. Llama 2: Open foundation and fine-tuned chat models,  
2023b.

Lewis Tunstall, Edward Beeching, Nathan Lambert, Nazneen Rajani, Kashif Rasul, Younes Belkada,  
Shengyi Huang, Leandro von Werra, Cl  mentine Fourier, Nathan Habib, et al. Zephyr: Direct  
distillation of lm alignment. *arXiv preprint arXiv:2310.16944*, 2023.

- 1134 Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez,  
1135 Lukasz Kaiser, and Illia Polosukhin. Attention is all you need, 2017.
- 1136
- 1137 Yizhong Wang, Swaroop Mishra, Pegah Alipoormolabashi, Yeganeh Kordi, Amirreza Mirzaei, An-  
1138 jana Arunkumar, Arjun Ashok, Arut Selvan Dhanasekaran, Atharva Naik, David Stap, Eshaan  
1139 Pathak, Giannis Karamanolakis, Haizhi Gary Lai, Ishan Purohit, Ishani Mondal, Jacob Anderson,  
1140 Kirby Kuznia, Krma Doshi, Maitreya Patel, Kuntal Kumar Pal, Mehrad Moradshahi, Mihir Par-  
1141 mar, Mirali Purohit, Neeraj Varshney, Phani Rohitha Kaza, Pulkit Verma, Ravsehaj Singh Puri,  
1142 Rushang Karia, Shailaja Keyur Sampat, Savan Doshi, Siddhartha Mishra, Sujan Reddy, Sumanta  
1143 Patro, Tanay Dixit, Xudong Shen, Chitta Baral, Yejin Choi, Noah A. Smith, Hannaneh Hajishirzi,  
1144 and Daniel Khachabi. Super-naturalinstructions: Generalization via declarative instructions on  
1600+ nlp tasks, 2022. URL <https://arxiv.org/abs/2204.07705>.
- 1145
- 1146 Yubo Wang, Xueguang Ma, Ge Zhang, Yuansheng Ni, Abhranil Chandra, Shiguang Guo, Weiming  
1147 Ren, Aaran Arulraj, Xuan He, Ziyang Jiang, et al. Mmlu-pro: A more robust and challenging  
1148 multi-task language understanding benchmark. *arXiv preprint arXiv:2406.01574*, 2024.
- 1149
- 1150 Jason Wei, Maarten Bosma, Vincent Y. Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du,  
1151 Andrew M. Dai, and Quoc V. Le. Finetuned language models are zero-shot learners, 2021. URL  
<https://arxiv.org/abs/2109.01652>.
- 1152
- 1153 Laura Weidinger, John Mellor, Maribeth Rauh, Conor Griffin, Jonathan Uesato, Po-Sen Huang,  
1154 Myra Cheng, Mia Glaese, Borja Balle, Atoosa Kasirzadeh, Zac Kenton, Sasha Brown, Will  
1155 Hawkins, Tom Stepleton, Courtney Biles, Abeba Birhane, Julia Haas, Laura Rimell, Lisa Anne  
1156 Hendricks, William Isaac, Sean Legassick, Geoffrey Irving, and Iason Gabriel. Ethical and social  
1157 risks of harm from language models, 2021.
- 1158
- 1159 Orion Weller, Kevin Seppi, and Matt Gardner. When to use multi-task learning vs intermediate  
1160 fine-tuning for pre-trained encoder transfer learning. In Smaranda Muresan, Preslav Nakov,  
1161 and Aline Villavicencio (eds.), *Proceedings of the 60th Annual Meeting of the Association  
1162 for Computational Linguistics (Volume 2: Short Papers)*, pp. 272–282, Dublin, Ireland, May  
2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.acl-short.30. URL  
<https://aclanthology.org/2022.acl-short.30>.
- 1163
- 1164 Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán,  
1165 Armand Joulin, and Edouard Grave. Ccnet: Extracting high quality monolingual datasets from  
1166 web crawl data, 2019.
- 1167
- 1168 Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi,  
1169 Pierric Cistac, Tim Rault, Rémi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick  
1170 von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gug-  
1171 ger, Mariama Drame, Quentin Lhoest, and Alexander M. Rush. Transformers: State-of-the-art  
1172 natural language processing. In *Proceedings of the 2020 Conference on Empirical Methods in  
1173 Natural Language Processing: System Demonstrations*, pp. 38–45, Online, October 2020. As-  
1174 sociation for Computational Linguistics. URL [https://www.aclweb.org/anthology/  
2020.emnlp-demos.6](https://www.aclweb.org/anthology/2020.emnlp-demos.6).
- 1175
- 1176 Shijie Wu and Mark Dredze. Beto, bentz, becas: The surprising cross-lingual effectiveness of BERT.  
1177 In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing  
1178 and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*,  
pp. 833–844, Hong Kong, China, November 2019. Association for Computational Linguistics.  
1179 doi: 10.18653/v1/D19-1077. URL <https://www.aclweb.org/anthology/D19-1077>.
- 1180
- 1181 Linting Xue, Noah Constant, Adam Roberts, Mihir Kale, Rami Al-Rfou, Aditya Siddhant, Aditya  
1182 Barua, and Colin Raffel. mT5: A massively multilingual pre-trained text-to-text transformer.  
1183 In *Proceedings of the 2021 Conference of the North American Chapter of the Association for  
1184 Computational Linguistics: Human Language Technologies*, pp. 483–498, Online, June 2021.  
1185 Association for Computational Linguistics. doi: 10.18653/v1/2021.naacl-main.41. URL <https://aclanthology.org/2021.naacl-main.41>.
- 1186
- 1187 An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li,  
Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang,

---

1188 Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jin Xu, Jingren Zhou, Jinze Bai,  
1189 Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng  
1190 Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai  
1191 Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan  
1192 Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Yang Fan, Yang Yao, Yichang  
1193 Zhang, Yu Wan, Yunfei Chu, Zeyu Cui, Zhenru Zhang, and Zhihao Fan. Qwen2 technical report,  
1194 2024. URL <https://arxiv.org/abs/2407.10671>.

1195 Zhilin Yang, Zihang Dai, Yiming Yang, Jaime Carbonell, Russ R Salakhutdinov, and Quoc V Le.  
1196 Xlnet: Generalized autoregressive pretraining for language understanding. In *Advances in Neural*  
1197 *Information Processing Systems 32*, pp. 5753–5763. Curran Associates, Inc., 2019.

1198 Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine  
1199 really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for*  
1200 *Computational Linguistics*, 2019.

1201 Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang,  
1202 Zi Lin, Zhuohan Li, Dacheng Li, Eric Xing, et al. Judging llm-as-a-judge with mt-bench and  
1203 chatbot arena. *Advances in Neural Information Processing Systems*, 36, 2024.

1204 Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied,  
1205 Weizhu Chen, and Nan Duan. Agieval: A human-centric benchmark for evaluating foundation  
1206 models, 2023.

1207 Chunting Zhou, Pengfei Liu, Puxin Xu, Srini Iyer, Jiao Sun, Yuning Mao, Xuezhe Ma, Avia Efrat,  
1208 Ping Yu, Lili Yu, Susan Zhang, Gargi Ghosh, Mike Lewis, Luke Zettlemoyer, and Omer Levy.  
1209 Lima: Less is more for alignment, 2023.

1210 Xuhui Zhou, Zhe Su, Tiwalayo Eisape, Hyunwoo Kim, and Maarten Sap. Is this the real life? is this  
1211 just fantasy? the misleading success of simulating social interactions with llms, 2024.

1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241

|      |          |                                                               |           |
|------|----------|---------------------------------------------------------------|-----------|
| 1242 | A        | APPENDIX                                                      |           |
| 1243 |          |                                                               |           |
| 1244 |          |                                                               |           |
| 1245 |          | <b>Contents</b>                                               |           |
| 1246 |          |                                                               |           |
| 1247 | <b>1</b> | <b>Introduction</b>                                           | <b>1</b>  |
| 1248 |          |                                                               |           |
| 1249 | <b>2</b> | <b>Pretraining</b>                                            | <b>3</b>  |
| 1250 | 2.1      | Pretraining Data . . . . .                                    | 3         |
| 1251 | 2.2      | Continued Pretraining . . . . .                               | 4         |
| 1252 | 2.3      | Pretraining From Scratch . . . . .                            | 5         |
| 1253 |          |                                                               |           |
| 1254 | <b>3</b> | <b>Alignment</b>                                              | <b>6</b>  |
| 1255 | 3.1      | Supervised Fine-Tuning . . . . .                              | 6         |
| 1256 | 3.2      | Preference Training . . . . .                                 | 7         |
| 1257 |          |                                                               |           |
| 1258 |          |                                                               |           |
| 1259 | <b>4</b> | <b>Evaluation</b>                                             | <b>8</b>  |
| 1260 | 4.1      | Automatic Evaluations . . . . .                               | 8         |
| 1261 | 4.2      | LLM-Based Evaluations . . . . .                               | 9         |
| 1262 | 4.3      | Human Evaluation . . . . .                                    | 10        |
| 1263 |          |                                                               |           |
| 1264 | <b>5</b> | <b>Conclusion</b>                                             | <b>10</b> |
| 1265 |          |                                                               |           |
| 1266 | <b>A</b> | <b>Appendix</b>                                               | <b>24</b> |
| 1267 |          |                                                               |           |
| 1268 | <b>B</b> | <b>Frequently Asked Question</b>                              | <b>25</b> |
| 1269 |          |                                                               |           |
| 1270 | <b>C</b> | <b>Related Work</b>                                           | <b>26</b> |
| 1271 | C.1      | Language Modeling and Cross-lingual Representations . . . . . | 26        |
| 1272 | C.2      | Multitask Learning And Alignment . . . . .                    | 27        |
| 1273 | C.3      | Language Models for Arabic . . . . .                          | 27        |
| 1274 |          |                                                               |           |
| 1275 | <b>D</b> | <b>Limitations</b>                                            | <b>28</b> |
| 1276 |          |                                                               |           |
| 1277 | <b>E</b> | <b>Ethical Statement</b>                                      | <b>28</b> |
| 1278 |          |                                                               |           |
| 1279 | <b>F</b> | <b>Risk Statement</b>                                         | <b>28</b> |
| 1280 |          |                                                               |           |
| 1281 | <b>G</b> | <b>Processing Of English data for 30B parameter model</b>     | <b>29</b> |
| 1282 |          |                                                               |           |
| 1283 | <b>H</b> | <b>Training Details</b>                                       | <b>29</b> |
| 1284 | H.1      | Compute and Training Infrastructure . . . . .                 | 29        |
| 1285 | H.2      | Pretraining Details . . . . .                                 | 31        |
| 1286 | H.3      | Alignment Training Details . . . . .                          | 31        |
| 1287 | H.4      | DPO vs. PPO . . . . .                                         | 31        |
| 1288 |          |                                                               |           |
| 1289 | <b>I</b> | <b>Evaluation</b>                                             | <b>31</b> |
| 1290 |          |                                                               |           |
| 1291 | I.1      | Details of the evaluation datasets . . . . .                  | 32        |
| 1292 | I.2      | Detailed Arabic Evaluation . . . . .                          | 32        |
| 1293 | I.3      | Detailed English Evaluation . . . . .                         | 32        |
| 1294 | I.4      | Examples . . . . .                                            | 32        |
| 1295 |          |                                                               |           |

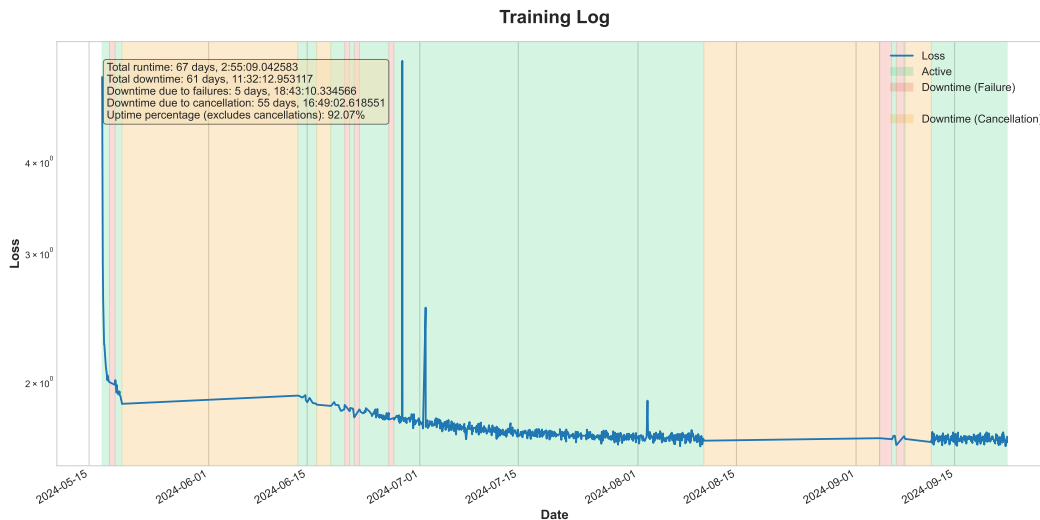


Figure 11: Annotated training log for ALLaM-30B showing uptime and downtime. Downtime due to cancellation indicates the training was paused to accommodate other jobs. Failures are marked in red. The model recovered from several loss spikes through the course of training without degrading performance.

## B FREQUENTLY ASKED QUESTION

**What is the difference between Alignment at Scale vs. Post-training** ALLaM is trained from a pretrained English language model (LLM). In a pretrained English-only language model, the language alignment between English and Arabic isn't sufficient. By the phrase "... language alignment and transferability of knowledge at scale..." we mean that we focused on English and Arabic co-learning (alignment and knowledge transfer) during the pretraining stage by jointly training both languages together. Note that when we mention "language alignment at scale" here, it refers to the pretraining stage, not the post-pretraining stage (fine-tuning or preference tuning). We will clarify this in the next version.

**Why did we change the training data distribution for 30B experiments** Not all the training was done at the same time. As the training progressed, we gained more knowledge about our process, data, and the entire ecosystem of our training engine. Iterating over a single training run incurred significant costs, so we always prioritized quality over ablations for large-scale training runs. Given the available compute and deadline, we were able to conduct only one training run of the 34B model. We discovered that we could apply custom filters to a large data collection based on our use cases and preferences. In the first phase, we used an open-source data collection, and in the second phase, we filtered a collection of 84 CC snapshots down to approximately 30T tokens. After filtering, we performed a manual check to verify the data quality.

**What was the uptime of the cluster** We didn't log the uptime of the cluster for all training runs, but we tracked the uptime for our 34B training runs. Figure 11 shows the cluster's uptime.

**Will you opensource/openweight our models?** We released our 13B model on the IBM WatsonX platform in May 2024. Our 7B model, pretrained from scratch, is now available on Microsoft Azure. As time progresses and we build more risk assessment tools with scalable oversight pipeline, we will open up more models to the community.

**Why did we report Instruct model result instead of base model result in the main paper?**

- Blurred distinction between base and instruct models: Modern pretraining often incorporates supervised fine-tuning (SFT) data, including alignment data aimed at improving user interactions. As a result, the clear separation between the base model and the instruct model

has become less distinct. Many models today are pre-trained with some degree of alignment, making it difficult to evaluate them purely as base models.

For instance, as shown in Table 11, the Qwen2-7B-base achieves a score of 77.94 on GSM8k, while ALLaM-7B-base (trained from scratch) achieves 16.98, with a significant delta of 60.96. After supervised fine-tuning, ALLaM-7B-instruct (from scratch) scores 53.6, while Qwen2-7B-instruct scores 77.86, reducing the delta to 24.26. Although ALLaM shows an improvement of 36.62 points during SFT, Qwen2 experiences no notable gain in performance in this phase. We suspect this is due to the inclusion of alignment data during Qwen2’s pretraining phase. Thus, while Qwen2 models are inherently better than ALLaM, the performance gap between Qwen2 and ALLaM at the base level does not necessarily reflect true model capabilities due to the suspected presence of alignment data in the base model.

- Focus on user interaction: The primary goal of building these models is to optimize them for user interaction. Since users will interact with the instruct version of the model, it makes sense to report the results of the model in its instruct phase. This ensures that the reported performance is reflective of the actual experience users will have, making the results more relevant and impactful for the paper’s audience.

**What is a fair comparison of different models?** Many models are released without information on the training dataset size, and of those that do, most do not provide a breakdown of tokens per language. Additionally, it is not clear how we should categorize models, based on (i) training FLOPs, (ii) model size, (iii) inference FLOPs, (iv) number of training tokens, or (v) quality of training tokens. Therefore, it is extremely difficult to control for all these factors. Instead, we opted to ensure a fair assessment by comparing our 13B models to larger models, such as Jais (30B), Command R+ (104B), and GPT-4 (unknown, but almost certainly larger than 13B), which actually puts our model at a disadvantage (see Figure 9).

## C RELATED WORK

Our work sits at the cross-section of research building language models that support multiple languages and scaling such techniques in terms of size and data. To successfully train a large language model in a language other than English requires a complete understanding of cross-lingual transferability between languages and a good understanding of scaling laws, as well as the fundamentals of training large language models. In this section, we discuss work on language modeling from the perspectives of cross-lingual alignment, multitask learning, and Arabic specialization.

### C.1 LANGUAGE MODELING AND CROSS-LINGUAL REPRESENTATIONS

In early work, word representations were derived using basic forms of the *skip-gram model* (Mikolov et al., 2013), wherein each word is assigned a representation that does not account for varying contexts (Grave et al., 2018; Pennington et al., 2014). Further work in this area developed word representations that are adaptive to the context surrounding the words (McCann et al., 2017; Peters et al., 2018a; Howard & Ruder, 2018; Devlin et al., 2019; Yang et al., 2019; Radford et al., 2019).

Peters et al. (2018a) introduced ELMo, a model built with a bidirectional LSTM-based language model (LM) for pretraining to obtain contextualized word representations. This technique combines the outputs from all layers linearly when targeting specific tasks. Nonetheless, the sequential nature of LSTM-based LM pretraining presents challenges in scaling training efficiently. Concurrently, Vaswani et al. (2017) developed the *Transformer* architecture, which leverages multi-headed self-attention and positional encoding to handle long-range dependencies and enable parallel processing. Following that Radford et al. (2019) introduced GPT, a model that pretrains a Transformer decoder using a conditional language model objective, with subsequent fine-tuning requiring only minimal modifications. Similarly, Devlin et al. (2019) unveiled BERT, which uses a Transformer encoder pretrained via a masked language modeling (MLM) objective. This approach excelled at task adaptation and benefited from the MLM’s ability to encode context bidirectionally, unlike the traditional unidirectional (conditional) LM that processes either the left or right context. Later Raffel et al. (2020) proposed a detailed hybrid encoder-decoder architecture based LLM with an implementation of many objective functions via autoregressive structure.

During the release of BERT, mBERT, a multilingual version of BERT is trained on 102 languages using a shared vocabulary of 110K subword tokens.<sup>5</sup> Despite the lack of explicit cross-lingual supervision, mBERT has demonstrated the ability to learn cross-lingual representations that generalize well across languages. Wu & Dredze (2019); Pires et al. (2019) evaluated the zero-shot cross-lingual transferability of mBERT on several NLP tasks and attributed its generalization capability to shared subword units. Pires et al. (2019) additionally identified structural similarity (e.g., word order) as another crucial factor for successful cross-lingual transfer. K et al. (2020), however, argued that shared subwords contribute minimally, and instead, structural similarity between languages is more critical for effective transfer. Artetxe et al. (2019) further showed that joint training might not be necessary and proposed an alternative method to transfer a monolingual model to a bilingual model by learning only the word embeddings in the target language. They also highlighted the vocabulary size per language as an important factor. Finally, Xue et al. (2021) showed that joint training on a large multilingual vocabulary can robustly map multilingual language models to the same latent space.

In the early days, *Cross-lingual alignment* from mono-lingual embeddings was tricky and often required complex adversarial training (Conneau et al., 2017), careful orthogonal mapping (Artetxe et al., 2018) or semi-supervised learning (Mohiuddin et al., 2020; Bari et al., 2020). With the introduction of mBERT, it became evident that learning joint distribution makes it easier for LLM to achieve cross-lingual alignment at scale. Lample & Conneau (2019) enhanced mBERT by incorporating a conditional LM and a translation LM (leveraging parallel data) objective along with a language embedding layer and trained a larger model utilizing more monolingual data. Huang et al. (2019) suggested employing auxiliary tasks like cross-lingual word recovery and paraphrase detection for pretraining. Subsequent work by Conneau et al. (2019) and Soltan et al. (2022) scaled up the training of multilingual language models. As well, Xue et al. (2021) scale the size and languages in the T5 architecture. In an effort to reproduce GPT-3, Scao et al. (2023) trained the first auto-regressive multilingual LLM.

## C.2 MULTITASK LEARNING AND ALIGNMENT

Early work has demonstrated that multitask learning can enhance the performance of NLP models (Collobert & Weston, 2008). In explicit multitask learning, augmenting all samples during training may introduce noise due to differing output distributions in a traditional full-model fine-tuning setup (Weller et al., 2022; Bari et al., 2021). For implicit multitask learning, Radford et al. (2019) showed that a language model can begin to learn downstream tasks without explicit supervision by pretraining alone. Large language models (Brown et al., 2020b; Smith et al., 2022; Chowdhery et al., 2022) at scale can perform few-shot in-context learning, making them effective multitask models. Additionally, Sanh et al. (2021); Wei et al. (2021); Muennighoff et al. (2022); Chung et al. (2022) found that these implicitly learned language models could be further improved by explicitly fine-tuning them with human instructions and prompts (Bach et al., 2022; Wang et al., 2022) in a multitask fashion. Unlike previous template-based prompting approaches, Ouyang et al. (2022) applied preference tuning with reinforcement learning (Stiennon et al., 2020) using naturally written prompts. Subsequently, Bai et al. (2022) introduced *Constitutional AI* to automate alignment using AI feedback. Recently, following the work of Rafailov et al. (2023), various efforts (Azar et al., 2023; Ethayarajh et al., 2024; Hong et al., 2024; Park et al., 2024; Meng et al., 2024) have been directed towards preference tuning without explicit reward models.

## C.3 LANGUAGE MODELS FOR ARABIC

As of the time of writing, the most prominent Arabic-focused LLMs are:

1. Jais (Sengupta et al., 2023): 13B and 30B base and chat models trained from scratch using a combination of natural and translated Arabic data along with English and code data.
2. AceGPT (Huang et al., 2023): 7B and 13B base and chat models trained from Llama-2 *without* vocabulary expansion.

<sup>5</sup><https://github.com/google-research/bert/blob/master/multilingual.md>

While Jais and AceGPT are currently the most prominent models, early open models such as AraGPT (Antoun et al., 2020), AraT5 (Elmadany et al., 2022), AraBART (Eddine et al., 2022), and Noon (Lakim et al., 2022)<sup>6</sup> pioneered the area with models developed with limited resources to serve Arabic.

Other models such as Jasmine (Abdul-Mageed et al., 2023) and Aramus (Alghamdi et al., 2023) also showed the need for building a language model for over 400 million speakers worldwide.

In addition to the language adaptation of models and multilingual models reviewed above, recent work has focused on building multilingual/bilingual language models from open weight language models. For example, Ruciński (2024) adapted Mistral 7B for the Polish without vocabulary expansion. Mala-500 is another effort to expand to 534 languages by expanding the vocabulary to 260K tokens and further pretrained Llama-2 using LoRA adaptors (Lin et al., 2024). Due to the number of languages they aimed to support, a small amount of data was included for each language and the evaluation of the approach was limited to measuring perplexity and automatic classification benchmarks. (Cui et al., 2023) introduced a Chinese Language adaptation of Llama and Alpaca models, where the vocabulary was increased to 50K tokens, then continued to pretrain the models and finally fine-tune them.

## D LIMITATIONS

ALLaM was trained on data that may potentially include toxic language, unsafe content, and societal biases originally sourced from the internet, leading to the possible amplification of these biases and toxic responses. Although ALLaM underwent comprehensive safety training during the alignment phase, more community feedback is needed to iteratively improve ALLaM. Additionally, inherent uncertainties in generative models mean that trials cannot encompass every possible use case, making it impossible to predict the model’s responses in all contexts. This can occasionally result in inaccurate, biased, or socially unacceptable outputs, even if the prompt itself is not explicitly offensive. Developers must conduct thorough safety evaluations and make specific adjustments to ensure that ALLaM is suitable for their intended purposes. Furthermore, the output generated by ALLaM should not be considered a statement from ALLaM’s creators or any affiliated organization.

## E ETHICAL STATEMENT

While conducting and presenting this research, we are committed to upholding the highest ethical standards. We recognize the potential impact of large language models on society and the importance of ensuring their responsible development and deployment. Our work adheres to principles of fairness, transparency, and inclusivity, striving to mitigate biases and ensure diverse representation in our training data. We are mindful of privacy concerns and have taken steps to anonymize and secure data used in our research. Additionally, we acknowledge the potential for misuse of language technologies and advocate for their ethical application, promoting beneficial use cases while being vigilant about unintended consequences. ALLaM models are made openly available to foster collaboration and further research, with the aim of contributing positively to the advancement of language technologies and supporting the cultural and technological growth of the Arabic-speaking world.

## F RISK STATEMENT

The deployment and use of LLMs in various applications poses significant risks, including data privacy and security concerns due to the inadvertent inclusion of sensitive information in training datasets. LLMs can perpetuate or amplify biases, resulting in unfair treatment and discrimination in critical decision-making processes. They can also generate convincing but inaccurate content, spreading misinformation and potentially influencing public opinion negatively. Over-reliance on LLMs may diminish human judgment, and the models’ susceptibility to adversarial attacks can compromise system integrity. To mitigate these risks, we follow robust governance, continuous monitoring, and iterative improvements. We also adhere to best practices in data handling and model training, fostering transparency and accountability in LLM development.

<sup>6</sup><https://huggingface.co/Naseej/noon-7b>

## G PROCESSING OF ENGLISH DATA FOR 30B PARAMETER MODEL

The RedPajama V2 <sup>7</sup> (RpV2) dataset is a large resource for training large language models:

**Size and Composition:** RpV2 is an open dataset that includes over 100B text documents sourced from 84 CommonCrawl snapshots. These documents have been processed using the CCNet Wenzek et al. (2019) pipeline, which is known for preparing web-crawled data. The dataset encompasses a massive **30T** tokens, making it, to the best of current knowledge, the largest public dataset released specifically for training language models.

**Quality Signals and Deduplication:** Of the documents included, 30B comes with 40+ pre-computed quality signals, and 20B documents are deduplicated. This ensures that the data is not only vast but also of high quality and relevance for training purposes, reducing redundancy, and improving the efficiency of learning.

Please refer to <https://www.together.ai/blog/redpajama-data-v2> for the complete list of existing quality signals.

**Multilingual Coverage:** The dataset includes documents in multiple languages, although the primary focus seems to be on English. The other languages are German (DE), French (FR), Spanish (ES), and Italian (IT). Table Appendix G shows detailed statistics of the multilingual breakdown of RpV2 dataset.

Table 7: Document and token counts for different languages

| Language | Document count | Estimated token count (deduped) |
|----------|----------------|---------------------------------|
| English  | 14.5B          | 20.5T                           |
| German   | 1.9B           | 3.0T                            |
| French   | 1.6B           | 2.7T                            |
| French   | 1.8B           | 2.8T                            |
| Italian  | 0.9B           | 1.5T                            |
| Total    | 20.8B          | 30.4T                           |

### Processing Steps Applied:

Out of the 40+ pre-computed quality signals, we applied the following to create a high-quality subset. Note that we focused on English only.

**Stats of the filtered data:** Applying all the steps above removed 85.9% of the documents, and 80% of the words.

In addition to the above steps, the CC-NET pipeline, which was used to download CC snapshots, applied language detection and exact-match paragraph deduplication.

After applying all processing steps outlined above, we ended up with:

3,431,217,579 (4.3B) total documents, with a total of 4,587,781,981,546 (4.5T) words, and 5.2T tokens.

The average doc length is X words and Y characters.

## H TRAINING DETAILS

### H.1 COMPUTE AND TRAINING INFRASTRUCTURE

Over the course of our development of ALLaM, we had access to 128-1024 A100 GPUs. Our GPU cluster was equipped with InfiniBand connections to enable high-speed communication between nodes. The all-reduce test on the cluster ranges around 1200-1400 Gbps (node-node interconnect (RoCE)). The entire training period of the models is estimated to be 5M GPU hours.

<sup>7</sup><https://github.com/togethercomputer/RedPajama-Data>

Table 8: Preprocessing steps to filter high-quality data from the Red-Pajama V2 dataset.

| Annotation Tag                       | Description                                                                                                                                  | Threshold                                      |
|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------|
| ccnet_language_score                 | Language identification model score.                                                                                                         | Keep $\geq 0.6$                                |
| ccnet_length                         | Number of characters in the document.                                                                                                        | Drop $< 150$ characters                        |
| ccnet_nlines                         | Number of lines in the document.                                                                                                             | Drop $< 3$ lines                               |
| rps_doc_ml_palm_score                | FastText classifier prediction for document classification as Wikipedia, OpenWebText, or RedPajama-V1 book (English only).                   | Sample according to distribution               |
| rps_doc_frac_lines_end_with_ellipsis | Fraction of lines ending with an ellipsis (“...” or “..”).                                                                                   | Drop $\geq 0.8$                                |
| rps_doc_frac_no_alph_words           | Fraction of words without any alphabetical characters.                                                                                       | Drop $\geq 0.9$                                |
| rps_doc_lorem_ipsum                  | Ratio of occurrences of “lorem ipsum” to total characters in content (after normalization).                                                  | Drop $\geq 0.5$                                |
| rps_doc_stop_word_fraction           | Ratio of stop words to total words in the document, using stop words from <a href="#">here</a> .                                             | Drop $\geq 0.9$                                |
| rps_doc_symbol_to_word_ratio         | Ratio of symbols (“#”, “...” or “..”) to words in content.                                                                                   | Drop $\geq 0.9$                                |
| rps_doc_ldnoobw_words                | Count of sequences from the List-of-Dirty-Naughty-Obscene-and-Otherwise-Bad-Words blocklist (see <a href="#">here</a> ).                     | Drop $\geq 0.9$<br>(ldnoobw_words/total_words) |
| minhash_signature                    | Minhash signature for fuzzy deduplication at Jaccard similarity of 0.7, based on 128 hash functions grouped into 14 bands of 9 rows for LSH. | 0.7<br>(ldnoobw_words/total_words)             |

Table 9: Document and word counts after each data processing Step

| Step                                 | Input (#docs) | Output (#docs) | Removal Ratio doc level (%) | Input (#words) | Output (#words) | Removal Ratio word level (%) |
|--------------------------------------|---------------|----------------|-----------------------------|----------------|-----------------|------------------------------|
| minhash_signature_0.7                | 24.38B        | 24.36B         | 0.11                        | 2.31T          | 2.30T           | 0.07                         |
| doc_level_exact_duplicates           | 24.36B        | 14.49B         | 40.5                        | 2.30T          | 1.30T           | 43.51                        |
| ccnet_language_score                 | 14.49B        | 14.30B         | 1.3                         | 1.30T          | 1.30T           | 0.44                         |
| ccnet_length                         | 14.30B        | 13.80B         | 3.51                        | 1.30T          | 1.30T           | 0.05                         |
| ccnet_nlines                         | 13.80B        | 12.87B         | 6.79                        | 1.30T          | 1.28T           | 1.37                         |
| rps_doc_frac_lines_end_with_ellipsis | 12.87B        | 12.87B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_frac_no_alph_words           | 12.87B        | 12.87B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_lorem_ipsum                  | 12.87B        | 12.87B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_stop_word_fraction           | 12.87B        | 12.87B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_symbol_to_word_ratio         | 12.87B        | 12.87B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_ldnoobw_words                | 12.84B        | 12.84B         | 0                           | 1.28T          | 1.28T           | 0                            |
| rps_doc_ml_palm_score                | 12.84B        | 343.12M        | 73.29                       | 1.28T          | 459B            | 64.03                        |

At the start of the project, we forked Megatron-LM<sup>8</sup> and applied our own customizations (including improving data iterators, adding metadata in the checkpoints, and custom data pipelines). We utilized data, tensor, and pipeline parallelism supported by Megatron-LM to efficiently train at a large scale as well as FlashAttention (Dao et al., 2022; Dao, 2024). By leveraging these techniques, we achieved significant improvements in training speed. The throughput per GPU varied from 135 to

<sup>8</sup><https://github.com/NVIDIA/Megatron-LM>

167 TFlop/s/GPU depending on the number of GPUs, number of nodes, batch size, and parallelism strategy. We trained ALLaM with bf16 mixed-precision.

## 1623 H.2 PRETRAINING DETAILS

1625 We fine-tune our base model, which was trained on 3.2 trillion (2T Llama-2 + 1.2T ALLaM) tokens, for 3 epochs using Ultra-Instinct-v2 with a learning rate of  $5 \times 10^{-6}$  and a batch size of 1024. The model is not trained to generate the prompt, as we mask out our prompt tokens when calculating the loss. Ultra-Instinct-v2 contains a substantial number of multi-turn conversations. To train on these multi-turn conversations, we performed turn-augmentation. Figure 12 visually explains the process of turn augmentation.

1631 While training the SFT model, we encountered tokenization issues. Specifically, Llama-2’s tokenizer was trained using sentencepiece<sup>9</sup>, which breaks the beginning and end of sequence tokens into multiple tokens and adversely affects long multi-turn conversations. To address this issue, we patched sentencepiece using the HuggingFace LlamaTokenizer wrapper (Wolf et al., 2020). Over many iterations of training, we saw that even having 1% noisy samples (e.g., empty responses or formatting issues) in alignment data can noticeably affect model quality.

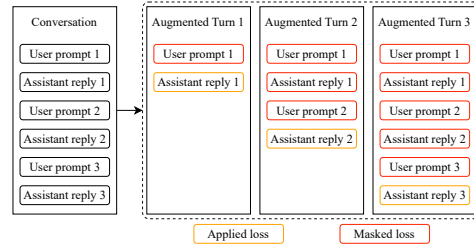


Figure 12: Augmentation process for conversations. The original conversation (left) is expanded into one sample per turn (right), with user prompts and assistant replies marked for training (red) and masking (orange) to enhance ALLaM’s language understanding and multi-turn response generation capabilities.

## 1645 H.3 ALIGNMENT TRAINING DETAILS

1647 For DPO, we used a batch size of 512 with  $KL_{penalty} = 0.1$  and a learning rate of  $9 \times 10^{-7}$  decayed to  $5 \times 10^{-7}$  using a cosine annealing learning rate schedule. We train ALLaM for a single epoch using all the preference data.

1652 From our initial experiments with small datasets, we observed issues with model quality even when a small fraction (0.1%) of the data was noisy. In this context, noise can be improper labeling of positive/negative pairs or low quality positive outputs. It is not clear, however, if after scaling up the DPO data whether the model can ignore this type of noise. In early DPO models, trained on data where we did not verify all the samples, we found that even a few moderately noisy samples resulted in broken models that repeatedly generate the same text or output incoherent text.

## 1658 H.4 DPO vs. PPO

1660 One of the fundamental differences between DPO and PPO is that PPO is always on-policy with an external reward model. In our experience with DPO, we did not encounter any significant issues with off-policy experiments. Additionally, DPO allows for faster iteration and easier understanding of the training dynamics. The decision to use DPO over PPO was based on logistical constraints rather than a performance comparison of the algorithms. Given our compute setup and time constraints, we chose to proceed with DPO. We plan to explore PPO in the future for alignment.

## 1667 I EVALUATION

1669 **Evaluation Framework** All evaluations were completed using the Language Model Evaluation Harness (Gao et al., 2023) with the following exceptions: HumanEval was evaluated using BigCode Evaluation Harness (Ben Allal et al., 2022). MMLU-Pro, MixEval, and Arabic MMLU (Koto et al., 2024) were evaluated using the repositories of the dataset creators.

<sup>9</sup><https://github.com/google/sentencepiece>

---

## I.1 DETAILS OF THE EVALUATION DATASETS

The automatic evaluations cover Arabic and English benchmarks grouped into the categories listed below:

1. Multi-domain: MixEval (Ni et al., 2024), MMLU-Pro (Wang et al., 2024), and BBH (Suzgun et al., 2022).
2. Reasoning and Commonsense: HellaSwag (Zellers et al., 2019), PIQA (Bisk et al., 2020), WinoGrande (Sakaguchi et al., 2019), and AraSwag (Nagoudi et al., 2022).
3. World Knowledge and Language Understanding: MMLU (Hendrycks et al., 2020), ARC Easy and Challenge (Clark et al., 2018), TriviaQA (Joshi et al., 2017), BoolQ (Clark et al., 2019), NQ Open (Kwiatkowski et al., 2019), AGIEval (Zhong et al., 2023), Exams-Ar (Hardalov et al., 2020), MMLU Arabic (tr) (Huang et al., 2023), MMLU Arabic (MBZU) (Koto et al., 2024), and ETEC (in-house curated).
4. Safety and Alignment: Hendrycks Ethics (Hendrycks et al., 2021a), ACVA (Huang et al., 2023), TruthfulQA (Lin et al., 2022), and AraTruthfulQA (in-house curated).
5. Conversation: MT-Bench (Zheng et al., 2024), and Arabic domain capability dataset (in-house curated).
6. Math: Minerva MATH (Lewkowycz et al., 2022; Hendrycks et al., 2021b), GSM8K (Cobbe et al., 2021) and AraMath (in-house curated).
7. Coding: HumanEval (THUDM, 2022)

The following benchmarks were curated and developed in-house:

- ETEC: a collection of 1891 multiple choice questions covering different exams performed by the Education and Training Evaluation Commission in Saudi Arabia<sup>10</sup>.
- AraMath: a set of 600 test samples that were post-processed and prepared from the AraMath (Alghamdi et al., 2022) dataset. These samples focus on testing the models’ performance on Arabic math problems.
- AraTruthfulQA: a dataset created using similar methodology to the TruthfulQA (Lin et al., 2021) dataset. It comprises a total of 541 samples, 285 samples were translated directly from TruthfulQA using GPT-4 and carefully validated and localized by human verifiers. Additionally, 256 questions were curated by humans to ensure their contextual relevance and cultural appropriateness.

## I.2 DETAILED ARABIC EVALUATION

Follow the Table 10 for details.

## I.3 DETAILED ENGLISH EVALUATION

Follow the Table 11 for details.

## I.4 EXAMPLES

An example of Arabic culture alignment improvements is illustrated in Appendix I.4.

---

<sup>10</sup><https://etec.gov.sa/home>

Table 10: Comprehensive Arabic benchmark results.

|                               |      | araSwag | ACVA   | MMLU (ar)          |                     | Exams (ar) | ETEC   | araTruthfulQA | araMath |
|-------------------------------|------|---------|--------|--------------------|---------------------|------------|--------|---------------|---------|
|                               |      |         |        | Koto et al. (2024) | Huang et al. (2023) |            |        |               |         |
|                               |      | 10-shot | 5-shot | 0-shot             | 0-shot              | 5-shot     | 0-shot | 0-shot        | 5-shot  |
| <b>Pretrained</b>             |      |         |        |                    |                     |            |        |               |         |
| ALLaM-Base (from scratch)     | 7B   | 52.68   | 68.46  | 44.45              | 36.28               | 42.09      | 41.7   | 29.4          | 25.5    |
| ALLaM-Base                    | 7B   | 51.63   | 66.18  | 41.52              | 34.42               | 38.55      | 36.58  | 29.9          | 11.5    |
| AceGPT                        | 7B   | 46.8    | 59.54  | 36.33              | 27.18               | 32.22      | 25.42  | 30.1          | 19.3    |
| Llama 2                       | 7B   | 25.62   | 62.93  | 33.61              | 26.64               | 23.09      | 27.85  | 25.7          | 24.8    |
| Mistral-v0.3                  | 7B   | 30.33   | 53.81  | 40.81              | 32.1                | 31.47      | 32.45  | 27.0          | 16.3    |
| OLMo-1.7                      | 7B   | 24.44   | 57.8   | 30.97              | 25.7                | 25.7       | 27.17  | 23.5          | 16.8    |
| OLMo                          | 7B   | 22.09   | 56.07  | 31.41              | 24.98               | 28.31      | 23.1   | 26.2          | 31.7    |
| Qwen2                         | 7B   | 40.26   | 78.74  | 52.91              | 47.16               | 46.0       | 55.23  | 29.9          | 51.2    |
| Gemma                         | 7B   | 25.36   | 54.82  | 46.33              | 26.04               | 22.91      | 25.48  | 24.0          | 39.3    |
| Llama 3                       | 8B   | 38.95   | 71.54  | 47.62              | 38.88               | 44.69      | 42.86  | 29.9          | 43.8    |
| ALLaM-Base                    | 13B  | 54.90   | 77.81  | 51.48              | 40.29               | 47.3       | 44.4   | 28.5          | 17.3    |
| Yi-1.5                        | 9B   | 28.76   | 61.19  | 46.36              | 34.11               | 34.82      | 40.01  | 24.0          | 44.8    |
| AceGPT-v1.5                   | 13B  | 48.89   | 73.47  | 42.24              | 33.18               | 40.6       | 33.56  | 30.3          | 18.8    |
| Llama 2                       | 13B  | 28.63   | 64.52  | 35.83              | 30.0                | 28.86      | 31.13  | 26.2          | 13.8    |
| Jais                          | 13B  | 49.28   | 60.76  | 32.2               | 29.23               | 33.33      | 27.96  | 28.7          | 28.5    |
| ALLaM-Base                    | 70B  | 59.35   | 79.67  | 59.21              | 49.34               | 53.82      | 55.97  | 33.5          | 38.7    |
| Jais-v1                       | 30B  | 54.51   | 68.25  | 37.6               | 32.94               | 43.39      | 34.04  | 29.6          | 19.3    |
| Jais-v3                       | 30B  | 53.86   | 70.49  | 45.19              | 38.31               | 50.28      | 45.61  | 30.5          | 25.2    |
| Qwen1.5                       | 32B  | 37.78   | 73.63  | 55.94              | 48.67               | 49.53      | 57.4   | 34.0          | 45.3    |
| Yi-1.5                        | 34B  | 32.16   | 65.25  | 42.93              | 36.26               | 33.71      | 36.21  | 23.7          | 52.0    |
| Mixtral-8x7B-v0.1             | 47B  | 38.43   | 75.64  | 51.25              | 39.74               | 44.32      | 44.61  | 25.5          | 39.8    |
| Llama 2                       | 70B  | 34.38   | 51.16  | 44.79              | 37.1                | 37.99      | 39.38  | 26.6          | 32.3    |
| Llama 3                       | 70B  | 54.51   | 74.17  | 36.67              | 59.39               | 55.31      | 64.27  | 31.4          | 53.70   |
| Qwen1.5                       | 72B  | 44.84   | 76.0   | 61.38              | 54.44               | 54.0       | 62.84  | 34.90         | 51.8    |
| Qwen2                         | 72B  | 51.76   | 68.7   | 69.94              | 65                  | 56.98      | 75.16  | 36            | 62.3    |
| DBRX                          | 132B | 47.58   | 72.38  | 53.24              | 47.2                | 47.11      | 51.96  | 26.8          | 49.3    |
| Mixtral-8x22B-v0.1            | 141B | 45.1    | 77.21  | 53.6               | 45.92               | 48.42      | 53.96  | 29.8          | 51.0    |
| <b>Fine-tuned</b>             |      |         |        |                    |                     |            |        |               |         |
| ALLaM-Instruct (from scratch) | 7B   | 50.98   | 79.59  | 69.16              | 51.38               | 52.89      | 67.34  | 30.7          | 42.2    |
| ALLaM-Instruct                | 7B   | 49.28   | 80.33  | 66.9               | 49.6                | 52.7       | 62.95  | 36.4          | 36.5    |
| AceGPT-Chat                   | 7B   | 43.4    | 59.35  | 45.8               | 33.58               | 35.57      | 36.05  | 37.9          | 22.5    |
| Llama 2-Chat                  | 7B   | 24.44   | 52.46  | 33.33              | 26.45               | 25.33      | 26.69  | 29.9          | 21.5    |
| Mistral-Instruct-v0.3         | 7B   | 30.59   | 60.7   | 44.3               | 34.06               | 31.1       | 34.41  | 30.3          | 26.0    |
| OLMo-Instruct                 | 7B   | 25.36   | 58.74  | 32.74              | 26.5                | 24.77      | 27.33  | 29.6          | 36.5    |
| Qwen2-Instruct                | 7B   | 37.78   | 79.3   | 49.82              | 48.07               | 47.3       | 56.18  | 35.1          | 51.3    |
| Gemma-it                      | 7B   | 25.62   | 58.03  | 41.48              | 23.15               | 22.91      | 23.73  | 34.8          | 37.0    |
| Llama 3-Instruct              | 8B   | 33.99   | 75.21  | 53.98              | 41.49               | 44.32      | 49.42  | 34.0          | 38.3    |
| Aya-23                        | 8B   | 51.11   | 73.65  | 54.37              | 36.39               | 43.76      | 42.28  | 31.6          | 32.0    |
| ALLaM-Instruct                | 13B  | 54.77   | 78.59  | 68.11              | 51.03               | 54.93      | 65.59  | 37.5          | 46.8    |
| Yi-1.5-Chat                   | 9B   | 29.8    | 67.57  | 45.5               | 36.02               | 31.47      | 43.6   | 28.7          | 47.8    |
| AceGPT-Chat-v1.5              | 13B  | 49.41   | 64.93  | 60.7               | 37.92               | 40.04      | 42.81  | 36.4          | 22.5    |
| Llama 2-Chat                  | 13B  | 25.75   | 60.14  | 35.84              | 28.73               | 22.91      | 30.44  | 31.4          | 22.3    |
| Jais-Chat                     | 13B  | 77.12   | 70.68  | 54.8               | 41.43               | 46.93      | 48.68  | 31.6          | 25.3    |
| ALLaM-Instruct                | 70B  | 57.91   | 79.01  | 75.92              | 62.23               | 58.47      | 78.38  | 38.4          | 56.8    |
| Jais-Chat-v1                  | 30B  | 80.52   | 71.14  | 60.4               | 43.99               | 48.6       | 48.52  | 32.9          | 26.0    |
| Jais-Chat-v3                  | 30B  | 88.37   | 70.05  | 62.37              | 30.15               | 51.21      | 38.53  | 37.3          | 32.5    |
| Qwen1.5-Chat                  | 32B  | 37.39   | 78.86  | 57.25              | 50.62               | 48.23      | 59.73  | 39.0          | 43.0    |
| Yi-1.5-Chat                   | 34B  | 30.85   | 65.96  | 45.6               | 35.47               | 35.2       | 40.22  | 25.3          | 49.8    |
| CommandR                      | 35B  | 55.42   | 78.34  | 60.19              | 48.38               | 50.65      | 55.44  | 33.8          | 47.2    |
| Aya-23                        | 35B  | 55.56   | 79.69  | 57.71              | 47.78               | 51.77      | 56.18  | 33.8          | 43.8    |
| Mixtral-8x7B-Instruct-v0.1    | 47B  | 37.91   | 77.27  | 52.66              | 41.09               | 42.64      | 49.37  | 32.5          | 39.7    |
| Llama 2-Chat                  | 70B  | 30.72   | 59.49  | 40.77              | 32.86               | 28.68      | 30.6   | 32.3          | 25.5    |
| Llama 3-Instruct              | 70B  | 45.75   | 80.26  | 36.27              | 60.11               | 58.47      | 71.41  | 37.7          | 59.70   |
| Qwen1.5-Chat                  | 72B  | 46.8    | 80.49  | 64.99              | 54.32               | 53.26      | 62.32  | 42.30         | 45.7    |
| Qwen2-Instruct                | 72B  | 51.9    | 79.98  | 71.51              | 66.18               | 58.66      | 75.16  | 47.70         | 61.70   |
| CommandR+                     | 104B | 59.35   | 80.37  | 66.33              | 52.98               | 52.89      | 62.1   | 37.0          | 50.2    |
| DBRX-instruct                 | 132B | 45.75   | 76.46  | 56.6               | 46.73               | 48.79      | 53.17  | 30.5          | 48.8    |
| Mixtral-8x22B-Instruct-v0.1   | 141B | 43.79   | 76.45  | 58.92              | 46.74               | 49.72      | 55.55  | 35.1          | 46.0    |

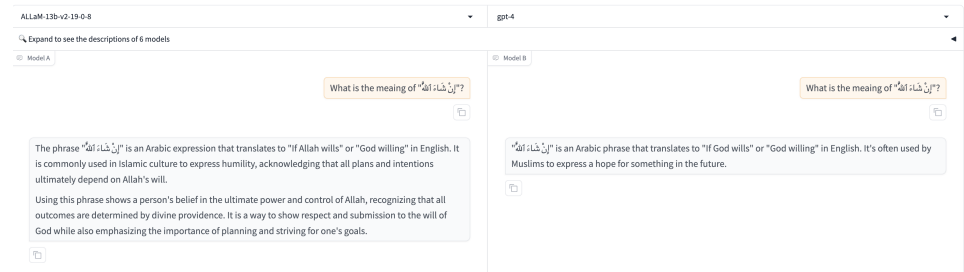


Figure 13: Example of Arabic cultural alignment between ALLaM and GPT-4.

Table 11: Comprehensive English benchmark results.

|                                | ACEval | STEM  | Humanities | MMLU            |       | Other | Average | MMMLU-Pro |           | Ethics | WingGrowth | TriviaQA | PIQA  | Easy  | ARC   | BoolQ | Hellaswag | TriviaQA | NQ Open | Minerva Math |        | GSM8K | BBH | MisEval |        | HumanEval |        |        |        |        |
|--------------------------------|--------|-------|------------|-----------------|-------|-------|---------|-----------|-----------|--------|------------|----------|-------|-------|-------|-------|-----------|----------|---------|--------------|--------|-------|-----|---------|--------|-----------|--------|--------|--------|--------|
|                                |        |       |            | Social Sciences | Other |       |         | Easy      | Challenge |        |            |          |       |       |       |       |           |          |         | 4-shot       | 8-shot |       |     | 4-shot  | 8-shot |           | 4-shot | 8-shot | 4-shot | 8-shot |
|                                |        |       |            |                 |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |
| Pretrained                     |        |       |            |                 |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |
| ALLaMA-Base (from scratch)     |        |       |            |                 |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |
| TB                             | 25.46  | 38.44 | 40.04      | 46.73           | 48.02 | 42.91 | 26.31   | 36.9      | 68.43     | 35.26  | 80.58      | 67.42    | 43.52 | 75.87 | 76.36 | 27.63 | 76.46     | 39.39    | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| TB                             | 21.19  | 34.73 | 37.43      | 45.53           | 46.96 | 40.71 | 20.43   | 44.15     | 68.9      | 35.22  | 79.0       | 73.96    | 45.05 | 74.77 | 76.17 | 42.1  | 41.28     | 16.08    | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| TB                             | 21.19  | 34.73 | 37.43      | 45.53           | 46.96 | 40.71 | 20.43   | 44.15     | 68.9      | 35.22  | 79.0       | 73.96    | 45.05 | 74.77 | 76.17 | 42.1  | 41.28     | 16.08    | 20.21   | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 2                        | TB     | 23.45 | 34.92      | 38.83           | 46.12 | 47.66 | 41.23   | 20.56     | 44.25     | 40.06  | 38.96      | 70.11    | 74.58 | 46.25 | 77.74 | 75.07 | 52.51     | 39.63    | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-v0.3                   | TB     | 32.85 | 40.54      | 52.84           | 68.57 | 68.85 | 58.65   | 31.67     | 64.49     | 70.56  | 42.57      | 82.13    | 72.13 | 82.14 | 80.38 | 60.68 | 20.42     | 12.88    | 27.82   | 42.12        | —      | —     | —   | —       | —      | —         |        |        |        |        |
| OLMo-1.7                       | TB     | 30.38 | 39.11      | 52.23           | 54.18 | 52.68 | 46.79   | 18.57     | 60.47     | 60.14  | 35.91      | 83.14    | 75.04 | 45.14 | 80.89 | 77.28 | 15.35     | 11.41    | 17.66   | 27.21        | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen2                          | TB     | 45.09 | 64.57      | 69.55           | 80.79 | 75.73 | 69.25   | 40.84     | 65.34     | 72.38  | 54.25      | 81.18    | 74.41 | 49.74 | 84.89 | 78.82 | —         | 77.94    | 15.26   | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Gemma                          | TB     | 38.6  | 53.89      | 54.67           | 71.14 | 68.49 | 61.16   | 34.24     | 66.09     | 73.01  | 81.23      | 80.81    | 53.24 | 82.84 | 80.72 | —     | —         | —        | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3                        | TB     | 33.57 | 52.93      | 54.62           | 72.9  | 71.13 | 61.9    | 35.54     | 73.48     | 73.48  | 41.03      | 80.9     | 77.78 | 52.99 | 81.13 | 73.47 | 63.35     | 16.4     | 15.96   | 50.72        | 62.91  | —     | —   | —       | —      | —         |        |        |        |        |
| ALLaMA-Base                    | TB     | 29.17 | 34.92      | 37.43           | 45.53 | 46.96 | 40.71   | 20.43     | 44.15     | 68.9   | 35.22      | 79.0     | 73.96 | 45.05 | 74.77 | 42.1  | 41.28     | 16.08    | 41.61   | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Yi-1.5                         | TB     | 37.8  | 63.88      | 69.91           | 79.1  | 73.61 | 68.37   | 49.58     | 63.35     | 73.01  | 59.25      | 72.38    | 80.2  | 76.26 | 50.77 | 80.1  | 57.43     | 15.6     | 23.96   | 46.32        | —      | —     | —   | —       | —      | —         |        |        |        |        |
| AceGPT-v1.5                    | TB     | 32.4  | 42.06      | 48.33           | 59.64 | 58.48 | 51.65   | 28.01     | 59.25     | 72.38  | 80.2       | 76.26    | 50.77 | 80.1  | 57.43 | 15.6  | 6.5       | 23.96    | 46.32   | 17.44        | 27.46  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 2                        | TB     | 24.15 | 29.27      | 33.38           | 41.23 | 42.91 | 33.32   | 25.66     | 61.77     | 68.51  | 35.39      | 77.91    | 70.08 | 41.81 | 67.74 | 71.76 | 33.45     | 31.45    | 17.67   | 28.97        | —      | —     | —   | —       | —      | —         |        |        |        |        |
| ALLaMA-Base                    | TB     | 42.90 | 57.09      | 60.36           | 77.97 | 72.74 | 66.22   | 39.84     | 57.79     | 77.43  | 43.99      | 83.19    | 78.83 | 55.46 | 83.3  | 85.22 | 51.91     | 26.13    | 40.20   | 77.00        | 73.97  | —     | —   | —       | —      | —         |        |        |        |        |
| Jais-v1                        | TB     | 25.81 | 36.22      | 39.94           | 46.34 | 44.29 | 41.47   | —         | 64.45     | 68.35  | 36.49      | 79.54    | 73.44 | 45.9  | 74.31 | 75.11 | 42.37     | 12.08    | 5.88    | 16.91        | 42.37  | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen1.5                        | TB     | 30.03 | 28.79      | 42.78           | 49.82 | 47.1  | 58.45   | 51.74     | 25.93     | 61.52  | 70.64      | 40.33    | 80.52 | 75.59 | 48.55 | 80.89 | 79.09     | 50.67    | 7.86    | 25.47        | 52.05  | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-87B-v1.5               | TB     | 47.02 | 66.07      | 66.06           | 81.47 | 77.95 | 71.62   | 44.7      | 67.37     | 74.27  | 52.46      | 73.38    | 51.02 | 67.31 | 83.7  | 80.7  | 16.39     | 6.6      | 35.32   | 33.02        | 53.72  | —     | —   | —       | —      | —         |        |        |        |        |
| Yi-1.5                         | TB     | 44.30 | 60.21      | 68.25           | 83.59 | 79.36 | 74.44   | 49.37     | 71.63     | 79.08  | 53.88      | 82.54    | 79.38 | 56.74 | 83.79 | 82.08 | 66.18     | 24.35    | 35.32   | 33.02        | 53.72  | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-Instruct-v0.1          | TB     | 37.9  | 39.02      | 42.09           | 60.62 | 78.26 | 74.22   | 61.13     | 41.76     | 63.31  | 75.61      | 48.5     | 83.57 | 83.38 | 59.81 | 85.26 | 71.39     | 29.25    | 27.18   | 58.53        | 69.36  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 2                        | TB     | 44.0  | 54.01      | 61.13           | 78.89 | 72.1  | 65.22   | 38.48     | 65.99     | 77.98  | 41.82      | 82.75    | 81.02 | 53.67 | 83.67 | 83.81 | 72.21     | 25.43    | 13.96   | 33.75        | 47.04  | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen1.5                        | TB     | 46.67 | 69.11      | 66.61           | 84.53 | 81.26 | 74.41   | 46.59     | 72.47     | 77.31  | 59.63      | 82.64    | 74.79 | 53.67 | 88.69 | 84.95 | 47.24     | 36.9     | 70.3    | 77.24        | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen2                          | TB     | 57.05 | 70.58      | 77.62           | 89.7  | 86.13 | 82.49   | 57.55     | 76.97     | 80.26  | 54.73      | 85.42    | 80.64 | 60.15 | 90.15 | 85.37 | —         | —        | 40.08   | 88.78        | 79.52  | —     | —   | —       | —      | —         |        |        |        |        |
| DRHX                           | TB     | 44.39 | 63.02      | 61.06           | 80.99 | 78.08 | 70.3    | 44.65     | 65.95     | 76.64  | 55.63      | 80.26    | 80.32 | 67.00 | 90.15 | 85.37 | —         | —        | 40.19   | 88.30        | 76.67  | —     | —   | —       | —      | —         |        |        |        |        |
| DRHX-8x2B-v0.1                 | TB     | 44.39 | 63.02      | 61.06           | 80.99 | 78.08 | 70.3    | 44.65     | 65.95     | 76.64  | 55.63      | 80.26    | 80.32 | 67.00 | 90.15 | 85.37 | —         | —        | 40.19   | 88.30        | 76.67  | —     | —   | —       | —      | —         |        |        |        |        |
| Finetuned                      | TB     | 46.54 | 66.57      | 65.11           | 83.88 | 79.21 | 71.38   | 51.11     | 66.71     | 79.53  | 52.2       | 84.53    | 84.18 | 61.14 | 87.89 | 85.28 | 77.32     | 23.7     | 25.7    | 73.97        | 50.13  | —     | —   | —       | —      | —         |        |        |        |        |
| Finetuned                      |        |       |            |                 |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |
| ALLaMA-Instruct (from scratch) |        |       |            |                 |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |
| TB                             | 46.35  | 53.77 | 55.77      | 71.95           | 69.36 | 61.99 | 30.34   | 60.35     | 69.95     | 41.31  | 80.3       | 75.04    | 52.05 | 82.94 | 75.4  | —     | —         | —        | 13.02   | 33.8         | 33.8   | —     | —   | —       | —      | —         |        |        |        |        |
| ALLaMA-Instruct                | TB     | 47.09 | 49.95      | 52.88           | 67.21 | 66.21 | 58.31   | 27.78     | 68.8      | 70.96  | 42.11      | 79.82    | 76.22 | 51.45 | 78.93 | 75.2  | —         | —        | 12.84   | 40.28        | 36.7   | —     | —   | —       | —      | —         |        |        |        |        |
| AceGPT-Instruct                | TB     | 35.55 | 36.41      | 43.19           | 53.01 | 54.84 | 46.4    | 22.87     | 58.88     | 66.38  | 45.32      | 77.26    | 69.74 | 44.28 | 79.76 | 75.52 | —         | —        | 4.29    | 40.28        | 36.7   | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3-Instruct               | TB     | 35.55 | 36.41      | 43.19           | 53.01 | 54.84 | 46.4    | 22.87     | 58.88     | 66.38  | 45.32      | 77.26    | 69.74 | 44.28 | 79.76 | 75.52 | —         | —        | 4.29    | 40.28        | 36.7   | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-Instruct-v0.3          | TB     | 42.22 | 50.68      | 54.56           | 69.62 | 67.14 | 59.75   | 36.33     | 73.59     | 71.8   | 59.65      | 82.59    | 82.62 | 58.7  | 85.81 | 82.88 | —         | —        | 13.28   | 48.67        | 56.78  | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen2-Instruct                 | TB     | 35.2  | 38.34      | 42.7            | 55.96 | 54.33 | 47.2    | —         | 63.54     | 66.77  | 45.55      | 76.77    | 64.1  | 43.43 | 78.62 | 78.54 | —         | —        | 1.5     | 11.52        | 33.31  | —     | —   | —       | —      | —         |        |        |        |        |
| Gemma-Instruct                 | TB     | 39.27 | 42.69      | 44.78           | 58.34 | 57.74 | 50.15   | 23.78     | 68.7      | 60.22  | 47.49      | 77.97    | 72.64 | 48.89 | 81.35 | 73.04 | —         | —        | —       | 2.29         | 59.39  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3-Instruct               | TB     | 44.35 | 54.71      | 57.96           | 74.13 | 71.67 | 63.82   | 41.32     | 68.07     | 71.67  | 51.72      | 79.67    | 79.76 | 56.83 | 83.09 | 75.48 | —         | —        | 27.02   | 74.4         | 67.67  | —     | —   | —       | —      | —         |        |        |        |        |
| Aya-23                         | TB     | 35.1  | 39.8       | 42.91           | 57.75 | 57.23 | 50.31   | 24.79     | 50.99     | 61.06  | 45.39      | 78.94    | 68.73 | 45.22 | 83.79 | 73.98 | —         | —        | 7.28    | 42.15        | 48.07  | —     | —   | —       | —      | —         |        |        |        |        |
| Yi-1.5-Instruct                | TB     | 55.03 | 64.51      | 62.66           | 79.4  | 72.9  | 69.46   | 47.29     | 71.46     | 74.43  | 52.49      | 80.58    | 77.06 | 55.46 | 86.01 | 79.22 | —         | —        | 38.28   | 78.45        | 68.61  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3-Instruct               | TB     | 37.73 | 43.07      | 49.78           | 61.94 | 60.44 | 53.3    | 27.19     | 70.32     | 70.96  | 43.95      | 79.11    | 73.7  | 59.17 | 81.65 | 79.66 | —         | —        | 7.2     | 31.08        | 49.09  | —     | —   | —       | —      | —         |        |        |        |        |
| AceGPT-Chat-v1.5               | TB     | 38.92 | 46.18      | 53.77           | 66.54 | 66.5  | 58.12   | 31.3      | 71.98     | 48.66  | 40.52      | 75.29    | 52.13 | 82.87 | 80.31 | —     | —         | —        | 5.48    | 35.56        | 47.44  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3-Chat                   | TB     | 37.73 | 43.07      | 49.78           | 61.94 | 60.44 | 53.3    | 27.19     | 70.32     | 70.96  | 43.95      | 79.11    | 73.7  | 59.17 | 81.65 | 79.66 | —         | —        | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Jais-Chat-v1                   | TB     | 35.52 | 36.41      | 43.19           | 53.01 | 54.84 | 46.4    | 22.87     | 58.88     | 66.38  | 45.32      | 77.26    | 69.74 | 44.28 | 79.76 | 75.52 | —         | —        | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| AceGPT-Chat-v1.5               | TB     | 36.78 | 47.99      | 53.37           | 66.4  | 64.92 | 57.57   | 26.45     | 68.05     | 70.69  | 42.34      | 73.18    | 76.3  | 51.02 | 90.0  | 78.91 | —         | —        | 30.72   | 83.5         | 83.5   | —     | —   | —       | —      | —         |        |        |        |        |
| Yi-1.5-Chat                    | TB     | 48.77 | 66.07      | 69.56           | 81.9  | 77.92 | 73.47   | 47.5      | 67.82     | 73.16  | 66.96      | 77.09    | 66.71 | 50.68 | 88.72 | 84.71 | —         | —        | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen1.5-Chat                   | TB     | 48.77 | 66.07      | 69.56           | 81.9  | 77.92 | 73.47   | 47.5      | 67.82     | 73.16  | 66.96      | 77.09    | 66.71 | 50.68 | 88.72 | 84.71 | —         | —        | —       | —            | —      | —     | —   | —       | —      | —         |        |        |        |        |
| CommandR                       | TB     | 46.7  | 52.78      | 56.68           | 73.74 | 70.68 | 63.31   | 38.98     | 60.3      | 70.24  | 56.35      | 81.23    | 77.99 | 57.25 | 86.15 | 82.34 | —         | —        | 11.96   | 59.29        | 62.54  | —     | —   | —       | —      | —         |        |        |        |        |
| Aya-23                         | TB     | 38.99 | 51.19      | 57.6            | 71.6  | 69.75 | 61.91   | 34.87     | 61.74     | 67.96  | 51.81      | 82.21    | 77.53 | 55.97 | 87.03 | 82.31 | —         | —        | 13.32   | 64.9         | 63.23  | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-87B-Instruct-v0.1      | TB     | 48.49 | 59.85      | 61.17           | 79.72 | 75.7  | 68.15   | 44.98     | 72.61     | 77.43  | 61.8       | 84.82    | 85.23 | 66.04 | 88.44 | 85.95 | —         | —        | 26.71   | 64.06        | 62.92  | —     | —   | —       | —      | —         |        |        |        |        |
| Llama 3-Instruct               | TB     | 63.78 | 72.03      | 72.82           | 84.68 | 83.56 | 78.25   | 59.52     | 77.03     | 75.53  | 61.79      | 82.05    | 84.81 | 64.33 | 87.49 | 82.49 | —         | —        | 44.12   | 93.05        | 83.15  | —     | —   | —       | —      | —         |        |        |        |        |
| Qwen1.5-Instruct               | TB     | 52.17 | 70.47      | 72.99           | 84.66 | 81.46 | 76.86   | 52.61     | 74.96     | 77.11  | 63.86      | 84.43    | 49.37 | 88.41 | 86.19 | —     | —         | —        | 21.88   | 81.12        | 52.19  | —     | —   | —       | —      | —         |        |        |        |        |
| Mistral-8x2B-Instruct          | TB     | 60.09 | 70.42      | 72.             |       |       |         |           |           |        |            |          |       |       |       |       |           |          |         |              |        |       |     |         |        |           |        |        |        |        |