

---

# GeoSVR: Taming Sparse Voxels for Geometrically Accurate Surface Reconstruction

---

Jiahe Li<sup>1</sup> Jiawei Zhang<sup>1</sup> Youmin Zhang<sup>2</sup> Xiao Bai<sup>1,✉</sup> Jin Zheng<sup>1,3,✉</sup> Xiaohan Yu<sup>4</sup> Lin Gu<sup>5</sup>

<sup>1</sup>School of Computer Science and Engineering, State Key Laboratory of Complex Critical Software Environment, Jiangxi Research Institute, Beihang University

<sup>2</sup>Rawmantic AI <sup>3</sup>State Key Laboratory of Virtual Reality Technology and Systems, Beijing

<sup>4</sup>Macquarie University <sup>5</sup>Tohoku University  
{lijiahe, baixiao, jinzheng}@buaa.edu.cn



Figure 1: **Geometric Sparse-Voxel Reconstruction.** Our method, abbreviated as GeoSVR, delivers high-quality surface reconstruction for intricate real-world scenes based on explicit sparse voxels. Our superiority is exhibited compared to the state-of-the-art approaches built upon Gaussian Splatting, which encounter rough, inaccurate, or incomplete recovery problems even with help from external estimators, excelling in delicate details capturing with high completeness and top-tier efficiency.

## Abstract

Reconstructing accurate surfaces with radiance fields has achieved remarkable progress in recent years. However, prevailing approaches, primarily based on Gaussian Splatting, are increasingly constrained by representational bottlenecks. In this paper, we introduce GeoSVR, an explicit voxel-based framework that explores and extends the under-investigated potential of sparse voxels for achieving accurate, detailed, and complete surface reconstruction. As strengths, sparse voxels support preserving the coverage completeness and geometric clarity, while corresponding challenges also arise from absent scene constraints and locality in surface refinement. To ensure correct scene convergence, we first propose a Voxel-Uncertainty Depth Constraint that maximizes the effect of monocular depth cues while presenting a voxel-oriented uncertainty to avoid quality degradation, enabling effective and robust scene constraints yet preserving highly accurate geometries. Subsequently, Sparse Voxel Surface Regularization is designed to enhance geometric consistency for tiny voxels and facilitate the voxel-based formation of sharp and accurate surfaces. Extensive experiments demonstrate our superior performance compared to existing methods across diverse challenging scenarios, excelling in geometric accuracy, detail preservation, and reconstruction completeness while maintaining high efficiency. Code is available at <https://github.com/Fictionarry/GeoSVR>.

# 1 Introduction

Surface reconstruction from multi-view images has been a critical long-term problem in computer vision and graphics. In recent years, with the development of Neural Radiance Fields (NeRF) [43], impressive performances [71, 59, 38, 60] have been shown by combining volume rendering with signed distance functions (SDF) to learn implicit fields from input images, yet are mostly computationally expensive. More recently, with the rise of 3D Gaussian Splatting (3DGS) [32], surface reconstruction with explicit sparse representation is making rapid progress [25, 28, 78, 15, 11, 62], enabling efficient and high-quality geometry learning for a wider range of scenarios.

While significant advancements have been achieved in these 3DGS-based approaches, the methodological limitations are emerging as a bottleneck. One critical problem lies in the reliance on well-structured point clouds initialization. Typically provided by multi-view geometry (MVG) approaches [51, 52], the point clouds inevitably contain inaccurate and uncovered regions due to appearance ambiguities, which further aggravates difficulties for 3DGS to refine these challenging areas accurately in geometry, becoming an inherent flaw. This spatial incompleteness further hinders the full potential of rapidly evolving geometry foundation models [17, 69, 2] in attempts [15, 14, 36, 64], obstructing their ability to drive a quality revolution in surface reconstruction. Another key issue is the lack of clearly defined edges in the Gaussian primitives, making the geometry ambiguous from both the representation clarity [28, 55] and the calculation precision trade-offs [55, 48, 42].

Exploring another possibility, this paper presents **GeoSVR** that tames sparse voxels to achieve accurate and delicate surface reconstruction. Unlike previous explicit approaches based on 3DGS, we start with a recently proposed SVRaster [55] that combines sparse voxels with rasterization to efficiently refine the scene via level of details. Initialized with fully covered coarse voxels constantly, the full potential can be maintained to model any part inside the scene with completeness. And with clearly bounded voxels, geometric details can be better identified compared to the Gaussians or smooth neural fields. However, while obtaining distinct characteristics, challenges come correspondingly.

Despite competitive surface quality yielded by vanilla SVRaster, significant geometric distortion persists during the sparse voxels optimization, due to the absence of a strong structure prior like the point clouds used in 3DGS, hindering further surface refinement. To fully exploit the strength of the densely covered representation, we resort to the current rapidly evolving and increasingly well-established monocular depth as the geometry cue to provide dense and easy-to-fetch scene constraints. However, a key problem arises for our highly accuracy-required surface reconstruction task: how to effectively utilize this good but not perfect external constraint, while preserving well-reconstructed geometries from being hurt by errors to avoid quality degradation. To address this, we first adopt the patch-wise depth regularizer [35] to facilitate local geometry learning, and based on which, a Voxel-Uncertainty Depth Constraint is proposed, evaluating the geometric uncertainty of each voxel and adaptively determining the degree of reliance on external cues at pixel level. By modulating internal photometric and external depth supervisions for confident and ambiguous regions, our approach enables effective and robust scene constraints, even for well-reconstructed geometries.

Investigating the voxel-based surface formation, we then focus on geometric accuracy refinement and develop Sparse Voxel Surface Regularization. Since the gradients are shared only with the nearest neighbors, challenges exist in composing these extremely local and tiny sparse voxels to ideal surfaces. First, inspired by previous MVG-regularized approaches [20, 16, 11, 50, 12], we try to adopt the widely used explicit multi-view geometry constraint [26] to help build geometrically correct surfaces. Nevertheless, the sparse voxel’s extreme locality made this plane-based geometry regularization less effective in enforcing a regional geometry constraint. To enlarge the refinement of per voxel, we conduct an interval sample to randomly drop out a portion of voxels to simplify the learned scene during geometry regularization, thus forcing each tiny voxel to keep a global geometry consistency. Second, from the perspective of voxel’s surface representation, we introduce two voxel-wise regularizations: A Surface Rectification to restrict the surface formation to be aligned with a unique voxel to reduce depth bias; and according to the mentioned voxel uncertainty, a Scaling Penalty to eliminate the participation of the geometrically inaccurate large voxel in the surface formation. With the help of both, sharp and accurate surfaces are facilitated in the reconstruction.

In summary, our main contributions are as follows:

- An exploration GeoSVR to build explicit voxel-based framework for accurate surface reconstruction, taming sparse voxels to enable delicate and complete geometry learning.

- A Voxel-Uncertainty Depth Constraint that maximizes the utilization of external depth cue while avoiding quality degradation by the proposed voxel uncertainty evaluation, enabling effective and robust scene constraints for highly accuracy-required surface reconstruction.
- A Sparse Voxel Surface Regularization for surface geometric accuracy refinement, which enlarges the global geometry consistency constraint for tiny voxels and facilitates reconstructing sharp and accurate surfaces by regularizing the voxel-based surface formation.
- Extensive experiments on DTU, Tanks and Temples, and Mip-NeRF 360 datasets demonstrate that the proposed GeoSVR achieves superior performance compared to the state-of-the-arts in reconstructing accurate surfaces across diverse challenging scenarios, excelling in detail preservation and high completeness while maintaining computational efficiency.

## 2 Related Works

**Differentiable Radiance Fields.** In recent years, radiance fields have made significant progress in 3D reconstruction by learning scenes directly with differentiable rendering. Neural Radiance Fields (NeRF) [43] is one of the most important foundations, which uses a large MLP to memorize 3D scene and renders through differentiable volume rendering, yet is weak in efficiency. Later, hybrid representations come by proposing neural grids [56, 45, 27], plane decompositions [9, 10, 18, 8], or sparse voxels [19, 39, 74] with or without neural networks. However, a weakness is that these methods always assume all the grids are uniform in scale, limiting the quality and scalability. More recently, 3D Gaussian Splatting (3DGS) [32] represents radiance fields by a set of anisotropic 3D Gaussians and renders with differentiable splatting using rasterization, achieving remarkably successful balances between fast and high-quality scene reconstruction [40, 76, 49]. However, due to the complexity of tremendous intersected Gaussians, a view-inconsistent rendering problem is exhibited, and is hard to fix without large efficiency trade-offs [48, 42, 44]. Also, the reliance on sparse point clouds brings additional uncertainty. To this end, SVRaster [55] combines efficient rasterization with explicit non-uniform sparse voxels to achieve definite, robust, and high-quality scene representation, with less mandatory dependency on structure prior as well. Nevertheless, its potential for accurate geometry learning has not been fully explored, which is an open yet invaluable problem for 3D reconstruction.

**Surface Reconstruction with Learnable Fields.** Reconstructing surfaces from multi-view images has been a long-standing problem. While multi-view stereo-based methods [26, 81, 52, 70] rely on a modular pipeline with multiple decoupled stages, earlier neural approaches [72, 47] are proposed to represent surfaces implicitly with an MLP to learn geometry directly from images. Further advancements such as UNISURF [46], NeuS [59], VolSDF [71] represent implicit surfaces by signed distance functions integrated with differentiable volume rendering and achieve better reconstructed details. Based on these, methods with improvements like geometry regularizations [16, 77, 20, 58] and efficient grid representations [38, 65] extended the quality and available scenarios. However, the trade-off between training time and quality for complex scenes is still a serious challenge.

More recently, Gaussian-based surface reconstruction has arisen with 3DGS by offering better explicit geometry with much higher efficiency. SuGaR [25] first focuses on extracting Gaussians as mesh surfaces with alignment regularization. Then, more efforts appear by integrating 3DGS with SDF [75, 13, 41, 66, 79, 36] or improved representations [28, 78, 15], significantly progressing the surface quality. Specifically, 2DGS [28] and GSurfel [15] propose squeezing Gaussians as 2D surfels for a better aligned surface, and GOF creates an opacity field to allow dense and detailed mesh extraction. However, due to the loose geometry constraint and photometric ambiguities, challenges in accuracy still exist. For the SDF-integrated approaches, since additional MLP and also grid are usually required, problems of over-smoothness [79] and limitations for large unbounded scenes [41] may occur. To conquer the accurate reconstruction on challenging regions, following previous successes [20, 16, 12], PGSR inherits the idea of surfels and incorporates the multi-view geometry constraint [26], which is widely used in multi-view stereo, to regularize planar accuracy, but the production leans to be over-smooth, due to the unsharp Gaussians similarly in 2DGS [41, 75]. Meanwhile, some works [15, 14, 36, 62] attempt to resort to external geometry cues from geometry foundation models [17, 2, 69] for regularization. However, the performance is still far from what the cues could fully provide, mainly caused by the methodological bottleneck in the strict demand of high-quality initial points, for which the effect of special densification is also limited [11, 14]. Instead, this work explores another sparse voxel representation to escape the strict initialization requirement and pursue a clearer geometry representation, achieving superior accurate, detailed, and complete surface reconstruction.

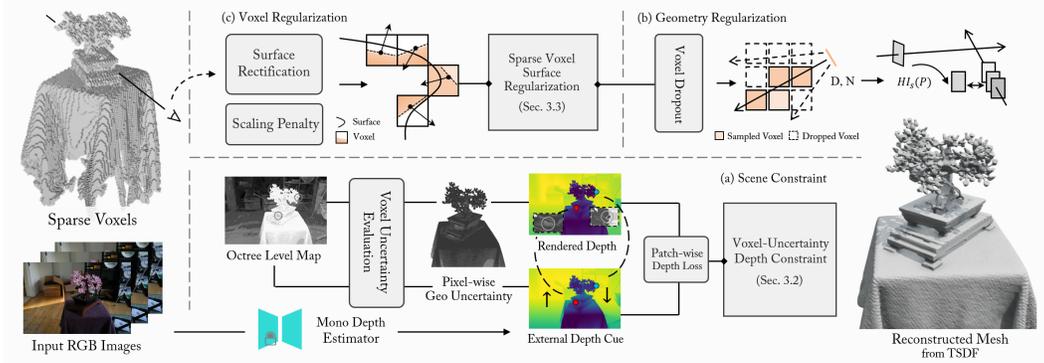


Figure 2: **Overview of GeoSVR.** Our method starts from constantly initialized sparse voxels, optimized with RGB images. (a) To enforce correct scene convergence while avoiding accuracy degradation, we apply Voxel-Uncertainty Depth Constraint by evaluating geometric uncertainty to determine the degree of reliance on monocular depth cue. (b) Voxel Dropout is introduced to enlarge the global geometry consistency for tiny voxels during the explicit geometry regularization. (c) For fine-grained surface refinement, we align the voxel-level density field to the surfaces with Voxel Regularization, facilitating accurate and sharp surface formation.

## 3 Method

### 3.1 Preliminaries: Sparse Voxels Rasterization

**Representation.** Sparse Voxels Rasterization (SVRaster) [55] represents scene with density field based on sparse voxels, which are organized in an Octree of the size  $\mathbf{w}_s \in \mathbb{R}$  and center  $\mathbf{w}_c \in \mathbb{R}^3$ . Each voxel keeps a set of SH coefficients  $\mathbf{v}_{sh}$  for voxel color, and densities  $\mathbf{v}_{geo} \in [0, +\infty]^{2 \times 2 \times 2}$ , separately on the eight voxel corners to model a trilinear inside density field for geometry. A voxel is identified with the index  $v = \{i, j, k\}$  at Octree level  $l$ , and its size  $\mathbf{v}_s$  and center  $\mathbf{v}_c$  are given as:

$$\mathbf{v}_s = \mathbf{w}_s \times 2^{-l}, \quad \mathbf{v}_c = \mathbf{w}_c - 0.5 \times \mathbf{w}_s + \mathbf{v}_s \times v \quad (1)$$

**Rendering.** During rendering, SVRaster adopts  $\alpha$ -blending similar to NeRF and 3DGS. Inside each voxel, SVRaster evenly samples  $K$  points in the ray segment of length  $\Delta t$  between the ray-voxel intersections, and composes voxel-wise  $\alpha$  with trilinear interpolation  $\text{interp}(\cdot)$  by volume rendering. Then, the  $\alpha$ -blending is available to render the pixel-wise color  $\mathbf{C}$  that corresponds to the ray:

$$\mathbf{C} = \sum_{i=1}^N T_i \alpha_i c_i, \quad T_i = \prod_{j=1}^{i-1} (1 - \alpha_j); \quad \alpha = 1 - \exp\left(-\frac{\Delta t}{K} \sum_{k=1}^K \text{interp}(\mathbf{v}_{geo}, \mathbf{q}_k)\right), \quad (2)$$

where  $\alpha_i$  and  $c_i$  are alpha and view-dependent color of the  $i$ -th intersected voxel, and  $\mathbf{q}_k$  is the local position of the  $k$ -th sample point in the voxel. According to  $\alpha$ -blending, we can render the pixel-wise normal  $\mathbf{N}$  and depth  $\mathbf{D}$ . The pixel-wise depth  $\mathbf{D}$  can be given similarly via per-point distance rendering. For voxel's normal, the analytical gradient is calculated at the voxel center  $\mathbf{q}_c$ :

$$\mathbf{n} = \text{normalize}(\nabla_{\mathbf{q}} \text{interp}(\mathbf{v}_{geo}, \mathbf{q}_c)). \quad (3)$$

**Adaptive Octree Control.** To adaptively adjust the scene Octree during training, SVRaster prunes the voxels with the least blending weight  $T\alpha$ , and accumulates an  $\alpha$ -weighted priority based on loss gradients to select the voxels that need to be subdivided to the next level to represent finer details.

**Challenges in Surface Reconstruction.** Despite strengths in geometric completeness and clarity, challenges exist correspondingly: **1)** With little native constraint, the optimization often encounters heavy geometry distortion and blocks further improvement. **2)** The impact scope of a single voxel could be quite local, which is unfavorable to accurate surface formation. Exploring tackling these two challenges, we present GeoSVR for high-quality voxel-based surface reconstruction, as in Figure 2

### 3.2 Voxel Geometric Uncertainty for Scene Constraint

Unlike previous approaches based on SDF [20, 77] or 3DGS [28, 78, 14, 11] that benefit from the structure constraints from geometric [1] or sparse points initialization [32], the highly expressive and constant-initialized sparse voxels require an essential scene constraint to effectively ensure the geometry converges to approximately correct surfaces, preparing for a further accuracy refinement.

**Problem in Monocular Depth Cue.** Inspired by previous works [77, 64], we turn attention to the increasingly well-established monocular depth [5, 21, 67, 69], which provides dense, efficient, and full-time available constraints for scene geometry optimization. Moreover, this dense cue natively matches the spatially complete voxels to fulfill its potential for compensating appearance ambiguities.

However, the problem of how to maximally utilize this attractive but not perfectly accurate prior in the highly accuracy-required surface reconstruction remains a long-standing difficulty. Despite considerable relevant studies [77, 58, 15, 14, 64, 62, 36], a solution is still absent to evaluate the learned geometry’s confidence to determine external cue reliance, which causes only over-conservative strategies to be available, but could still degrade the quality by the included errors [77, 14].

**Voxel Geometric Uncertainty.** In this work, we aim to solve the problem by evaluating geometric uncertainty from the representational capability: **1)** In SVRaster, each voxel contains a trilinear density field to represent the geometry of the cube space with length of  $\mathbf{v}_s = \mathbf{w}_s \times 2^{-l}$ . Then, the accuracy for an under-captured geometry is strictly limited, negatively related to the level  $l$  of corresponding voxels. **2)** During optimization, SVRaster progressively subdivides voxels at  $l$  with largest gradients to the next level  $l + 1$ . Consequently, the voxels at lower levels denote either regions with fewer texture constraints or less view coverage, both associated with high uncertainties.

Inspired by these two tight couplings of uncertainty and voxel’s level, we abstract a level-aware geometric uncertainty that explicitly correlates with Octree level  $l$  to guide identifying scene constraint targets. For a voxel  $v$  at level  $l$ , its base and geometric uncertainties  $U_{\text{base}}$  and  $U_{\text{geom}}$  are given by:

$$U_{\text{base}}(l) = \frac{\mathbf{w}_s}{\beta(l + l_0)}, \quad U_{\text{geom}}(v) = U_{\text{base}}(l) \cdot (1 - \exp(-\mathbf{v}_{\text{geo}})), \quad (4)$$

where  $\beta$  is a scaling factor, combined with Octree size  $\mathbf{w}_s$  as global scene scale.  $l_0$  is the starting level. Geometric uncertainty  $U_{\text{geom}}(v)$  is composed of the level-dependent base uncertainty  $U_{\text{base}}$  and the voxel density, indicating a voxel at low level with critical geometry leads to higher uncertainty. Derived in the Appendix Section B, we simplify powers and exponents while preserving the same trend to prevent numerical blowup in later applying.

**Voxel-Uncertainty Depth Constraint.** Based on the uncertainty, we next design the constraint to enable effective and reliable monocular depth integration. To effectively apply the monocular depth as supervision, we resort to a patch-wise global-local depth loss [35] for better scale alignment and facilitating the geometry knowledge learning. Then, integrating the geometric uncertainty into the pixel-wise constraint, we first render an Octree level map  $\mathbf{L}$  for efficient pixel-wise uncertainty calculation, directly gathering the volume density term of Eq. (4) with  $\alpha$  of Eq. (2) via rasterization:

$$\mathbf{L} = \sum_{i=1}^N T_i \alpha_i l_i, \quad \alpha = 1 - \exp\left(-\frac{\Delta t}{K} \sum_{k=1}^K \text{interp}(\mathbf{v}_{\text{geo}}, \mathbf{q}_k)\right). \quad (5)$$

Next, converting uncertainty to weight, we produce a pixel-wise modulation on depth constraint. To ensure adaptive and robust constraints for various stages and scenarios, we obtain statistics of  $\mathbf{L}$  to set the hyperparameters in Eq. (4). Specifically, for scale-independence, let the scale term of  $\mathbf{w}_s/\beta$  equal to per-view global level scale  $\mathbf{w}_1 = \max(\mathbf{L}) - \min(\mathbf{L})$ , and set  $l_0 = -\min(\mathbf{L})$  to define the coarsest level of the view. Then, derived from  $U_{\text{geom}}$ , the geometry uncertainty weight  $\mathbf{W}_{\text{unc}}$  follows:

$$\mathbf{W}_{\text{unc}} = \frac{\mathbf{w}_1}{\max(1, \mathbf{L} - \min(\mathbf{L}))}, \quad \mathbf{w}_1 = \max(\mathbf{L}) - \min(\mathbf{L}) \quad (6)$$

Finally, given the estimated monocular depth  $\tilde{\mathbf{D}}$  as the constraint for the rendered depth  $\mathbf{D}$ ,  $\mathbf{W}_{\text{unc}}$  is applied to the patch-wise depth loss  $\mathcal{L}_{\text{D-patch}}$  [35] for per-pixel constraint reweight:

$$\mathcal{L}_{\text{D-unc}}(\mathbf{D}, \tilde{\mathbf{D}}) = \mathbf{W}_{\text{unc}} \cdot \mathcal{L}_{\text{D-patch}}(\mathbf{D}, \tilde{\mathbf{D}}). \quad (7)$$

As a result, Voxel-Uncertainty Depth Constraint  $\mathcal{L}_{\text{D-unc}}$  pays minimal attention to the voxels with low uncertainty to be confident of the native photometric constraint, while enhancing highly uncertain ones to rely on external cue for solving geometry ambiguities. The effect can be illustrated in Figures 2 and 6, where level map  $\mathbf{L}$  is shown to obtain a more uniform range of values for better visual effect.

### 3.3 Sparse Voxel Surface Regularization

Despite the scene constraint exerted, a coarsely correct reconstruction does not exhibit the full potential of sparse voxels. Therefore, we next investigate the capability of sparse voxels for highly accurate surface formation under explicit geometry constraint and finer voxel-level regularizations.

**Geometry Regularization with Voxel Dropout.** Serving as an explicit and strict constraint, homography patch warping has shown great effect in classical MVS [22, 53, 81] and recent related works [20, 16, 11, 50, 12, 58], which we also try to apply in our method. Typically, considering a source view and a reference view with image  $\mathbf{I}_s$  and  $\mathbf{I}_r$ , we warp the image point  $\mathbf{x}'$  in the pixel patch  $P$  of  $\mathbf{I}_s$  to the image point  $\mathbf{x}$  in  $\mathbf{I}_r$  of the reference view by the plane-induced homography  $\mathbf{H}$  [53]:

$$\mathbf{x} = \mathbf{H}\mathbf{x}', \quad \mathbf{H} = \mathbf{K}_s(\mathbf{R}_s\mathbf{R}_r^T + \frac{\mathbf{R}_s(\mathbf{R}_s^T\mathbf{t}_s - \mathbf{R}_r^T\mathbf{t}_r)\mathbf{n}^T}{\mathbf{n}^T\mathbf{p}})\mathbf{K}_r^{-1}, \quad (8)$$

where  $\mathbf{p}$  is the intersected 3D point calculated from depth  $\mathbf{D}$ , and the normal  $\mathbf{n}$  is from Eq. 3.  $\mathbf{K}$  is camera intrinsics, and  $[\mathbf{R}, \mathbf{t}]$  is the extrinsics of each view. Then, an occlusion-aware NCC loss [11] is applied between the warped  $P$  and its target in  $\mathbf{I}_r$ . However, we observe that despite improvements brought, this technique does not work as ideally as in previous approaches. Due to the extreme locality of the tiny voxels that connect to only the nearest neighbors by a few corners, the planar constraint becomes less effective, leading to redundant wrong structures being produced.

To solve this problem, our idea is to enlarge the regularization for each voxel by breaking these incorrectly organized geometries, enforcing the tiny voxels to obey a more global geometry consistency instead of only their own tiny scopes. During the process, we conduct an interval sample of the voxels with a random ratio in  $[\gamma, 1]$  while calculating the full-scale depth  $\mathbf{D}$  and normal  $\mathbf{N}$ . Therefore, only a subset of voxels is used to represent the scene, while the others are temporally dropped out. Then, the regularization enforces each voxel to respond to the geometry consistency of a larger area, including where the dropped-out voxels belong, for a forced break and correction of the ill geometries.

**Surface Rectification.** Subsequently, we focus on the bias between the trilinear voxel density field and the weight contribution in rendering, which causes misaligned surfaces from rendering and voxel density. As in Figure 3, due to the trilinear local-linked voxel fields, the density increase of one voxel will implicate the neighbors, resulting in decentralized densities that makes the highest rendering weight  $w$  biased to the side regions but not the correct highest density position, like Figure 3 a.1.

To this end, we propose Surface Rectification, a voxel-level regularization conducted during rendering. In the process, we first calculate an enter voxel alpha  $\alpha_{p,e}$  and out  $\alpha_{p,o}$  from the density of the intersected enter and out points  $\mathbf{p}_e$ ,  $\mathbf{p}_o$ , denoted as red cross in Figure 3, to model the first-time intersection for surface checking, and select the voxels with critical change density between  $\mathbf{p}_e$  and  $\mathbf{p}_o$  cross a threshold  $T_\alpha$  (set to 0.5 in this work) as the surface voxels  $V_s$ :

$$V_s = \{v \mid \alpha_{p,e} < T_\alpha < \alpha_{p,o}\}, \quad \text{where } \alpha_{p,e/o} = 1 - \exp(-\Delta t \cdot \text{interp}(\mathbf{v}_{\text{geo}}, \mathbf{p}_{e/o})) \quad (9)$$

Then, for these voxels, we penalize the density at  $\mathbf{p}_e$  but encourage at  $\mathbf{p}_o$  to form a sharp segmentation of the surface and empty spaces, with a penalty term including the voxel’s rendering contribution  $w$ :

$$\mathcal{R}_{\text{rec}} = w \cdot \mathbb{I}(v \in V_s) \cdot (\text{interp}(\mathbf{v}_{\text{geo}}, \mathbf{p}_e) - \text{interp}(\mathbf{v}_{\text{geo}}, \mathbf{p}_o)), \quad w = T_\alpha. \quad (10)$$

Since then, the surface in rendering can be rectified to be aligned to the density, as in Figure 3 a.2.

**Scaling Penalty.** Inspired by the voxel geometric uncertainty in Sec. 3.2, we present a simple yet effective regularizer that penalizes the voxels occupying a long sampling distance, which denotes a less accurate geometry modeling. Normalized with globally minimal voxel size  $\min(\mathbf{v}_s)$ , it follows:

$$\mathcal{R}_{\text{sp}} = w \cdot \text{interp}(\mathbf{v}_{\text{geo}}, \mathbf{q}_c) \cdot \max(0, \log_2(\frac{\Delta t}{\min(\mathbf{v}_s)})), \quad \text{where } \mathbf{q}_c = (0.5, 0.5, 0.5). \quad (11)$$

### 3.4 Loss Function

The total objective is composed of the photometric loss  $\mathcal{L}_{\text{photo}}$  from SVRaster, the depth constraint  $\mathcal{L}_{\text{D-unc}}$  from Eq. (7), NCC loss for geometry regularization, and the voxel regularizations in Sec. 3.3:

$$\mathcal{L} = \mathcal{L}_{\text{photo}} + \eta\mathcal{L}_{\text{D-unc}} + \tau\mathcal{L}_{\text{NCC}} + \mu_1\mathcal{R}_{\text{rec}} + \mu_2\mathcal{R}_{\text{sp}}. \quad (12)$$

In this work, we set the weights of  $\eta = 0.1$ ,  $\tau = 0.01$ ,  $\mu_1 = 10^{-5}$ , and  $\mu_2 = 10^{-6}$ , respectively.

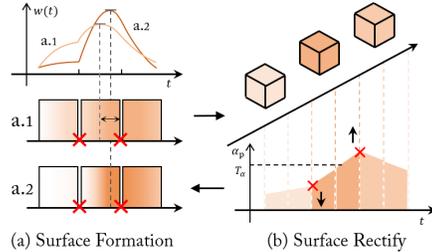


Figure 3: Illustration of Surface Rectification and the visualized process on voxels.

Table 1: **Quantitative Comparison on the DTU [31] Dataset.** Bests are in highlight. Our GeoSVR achieves the highest reconstruction quality on the Chamfer distance while retaining fast training.

	24	37	40	55	63	65	69	83	97	105	106	110	114	118	122	Mean	Time	
Implicit	VolSDF [71]	1.14	1.26	0.81	0.49	1.25	0.70	0.72	1.29	1.18	0.70	0.66	1.08	0.42	0.61	0.55	0.86	> 12h
	NeuS [59]	1.00	1.37	0.93	0.43	1.10	0.65	0.57	1.48	1.09	0.83	0.52	1.20	0.35	0.49	0.54	0.84	> 12h
	Neuralangelo [38]	0.37	0.72	0.35	0.35	0.87	0.54	0.53	1.29	0.97	0.73	0.47	0.74	0.32	0.41	0.43	0.61	> 128h
	Geo-NeuS [20]	0.38	0.54	0.34	0.36	0.80	0.45	0.41	1.03	0.84	0.55	0.46	0.47	0.29	0.36	0.35	0.51	> 12h
	MonoSDF [77]	0.66	0.88	0.43	0.40	0.87	0.78	0.81	1.23	1.18	0.66	0.66	0.96	0.41	0.57	0.51	0.73	6h
Explicit	2DGS [28]	0.48	0.91	0.39	0.39	1.01	0.83	0.81	1.36	1.27	0.76	0.70	1.40	0.40	0.76	0.52	0.80	0.2h
	GOF [78]	0.50	0.82	0.37	0.37	1.12	0.74	0.73	1.18	1.29	0.68	0.77	0.90	0.42	0.66	0.49	0.74	1h
	SVRaster [55]	0.61	0.74	0.41	0.36	0.93	0.75	0.94	1.33	1.40	0.61	0.63	1.19	0.43	0.57	0.44	0.76	0.1h
	GS2Mesh [62]	0.59	0.79	0.70	0.38	0.78	1.00	0.69	1.25	0.96	0.59	0.50	0.68	0.37	0.50	0.46	0.68	0.3h
	VCR-GauS [14]	0.55	0.91	0.40	0.43	0.97	0.95	0.84	1.39	1.30	0.90	0.76	0.92	0.44	0.75	0.54	0.80	~1h
	MonoGSDF [36]	0.45	0.65	0.36	0.36	0.94	0.70	0.67	1.27	0.99	0.63	0.49	0.84	0.39	0.53	0.47	0.65	hrs
	PGSR [11]	0.36	0.57	0.38	0.33	0.78	0.58	0.50	1.08	0.63	0.59	0.46	0.54	0.30	0.38	0.34	0.52	0.5h
	<b>GeoSVR (Ours)</b>	0.32	0.51	0.30	0.33	0.71	0.48	0.42	1.03	0.62	0.56	0.33	0.46	0.30	0.34	0.32	0.47	0.8h

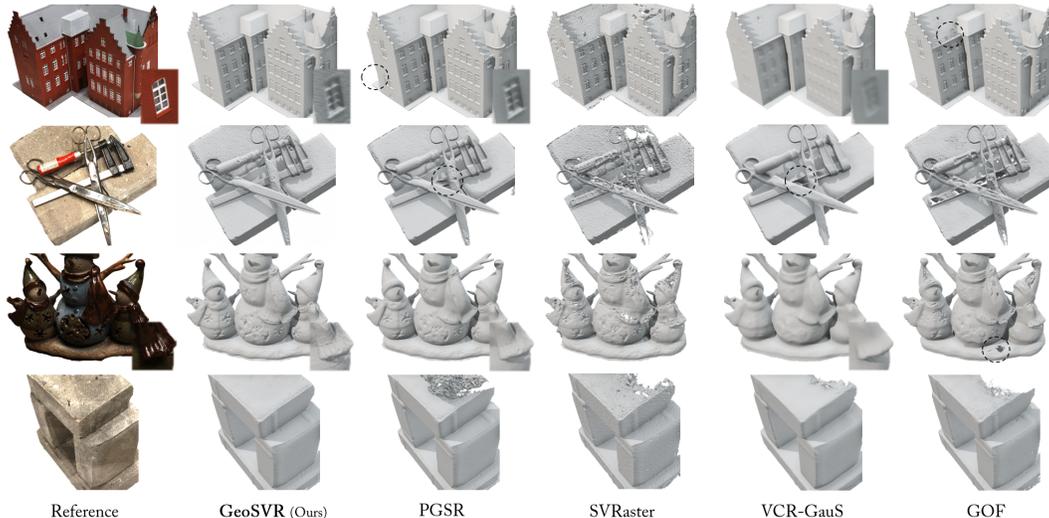


Figure 4: **Reconstructed Mesh Visualization on the DTU [31] Dataset.** Our GeoSVR achieves superior reconstruction both in accuracy and completeness, handling difficult regions well by geometry cue constraints while still preserving fine-grained details. Better visualized with zoom in.

## 4 Experiments

**Implementation Details.** Our code is implemented with PyTorch and CUDA kernels, built upon SVRaster [55]. In the experiments, we train each model with 20,000 iterations, with the learning rates for density and SHs at degree 0 and the others of 0.05, 0.01, and 0.00025 in Adam [33] optimizer. We use DepthAnythingV2 [69] to provide the depth cues. The patch size of  $7 \times 7$  is used for patch warping, and  $\gamma$  in voxel dropout is set to 0.5 and 0.3 for DTU and TnT datasets. The Octree setups keep the same as in [55], and the prune interval is increased to 2,000 for finer expression. In our method, we use TSDF for mesh extraction. All experiments are conducted on RTX 3090 Ti GPUs.

### 4.1 Comparison

**Dataset.** We use the prevailing DTU, Tanks and Temples (TnT), and Mip-NeRF 360 datasets for evaluation. The scene selections of DTU and TnT are consistent with previous works [71, 59, 38, 28], preprocessed following 2DGS [28] and Neuralangelo [38]. The voxel size of TSDF is set to 0.002 for DTU and is calculated for TnT following PGSR [11]. The images in DTU and TnT are downsampled  $2\times$ , and in Mip-NeRF 360 are downsampled  $2\times$  or  $4\times$  following [32] for indoor and outdoor scenes.

**Baselines.** We take the state-of-the-art surface reconstruction approaches as baselines, including implicit (e.g., NeuS [59], Neuralangelo [38], Geo-NeuS [20]) and explicit methods (e.g., 2DGS [28], GOF [78], PGSR [11]). Among them, MonoSDF [77], GSurfel [15], VCR-GauS [14], GS2Mesh [62], and MonoGSDF [36] take external geometry cues from pre-trained depth and/or normal models for regularization. Basic representations like 3DGS [32] and SVRaster [55] are also included.

Table 2: **Quantitative Comparison on the Tanks and Temples [34] Dataset.** GeoSVR achieves the best on the F1 score, demonstrating superior reconstruction quality on various real-world scenarios.

	Implicit				Explicit						
	NeuS	Neuralangelo	Geo-NeuS	MonoSDF	2DGS	GOF	SVRaster	VCR-GauS	MonoGSDF	PGSR	GeoSVR
Barn	0.29	0.70	0.33	0.49	0.41	0.51	0.35	0.62	0.56	0.66	0.68
Caterpillar	0.29	0.36	0.26	0.31	0.23	0.41	0.33	0.26	0.38	0.44	0.49
Courthouse	0.17	0.28	0.12	0.12	0.16	0.28	0.29	0.19	0.29	0.20	0.34
Ignatius	0.83	0.89	0.72	0.78	0.51	0.68	0.69	0.61	0.72	0.81	0.83
Meetingroom	0.24	0.32	0.20	0.23	0.17	0.28	0.19	0.19	0.25	0.33	0.37
Truck	0.45	0.48	0.45	0.42	0.45	0.59	0.54	0.52	0.62	0.66	0.66
Mean	0.38	0.50	0.35	0.39	0.30	0.46	0.40	0.40	0.47	0.52	0.56
Time	>24h	>128h	>12h	6h	16m	24m	11m	53m	3h	45m	68m

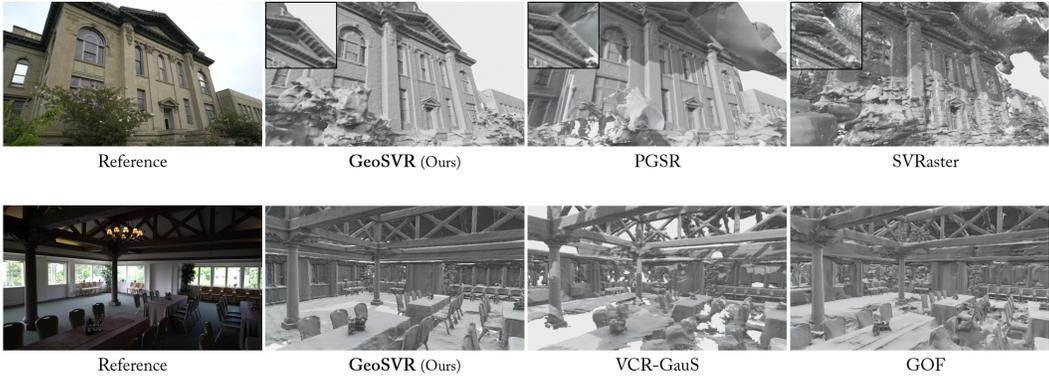


Figure 5: **Reconstructed Mesh Visualization on the Tanks and Temples [34] Dataset.** Our GeoSVR stands out by reconstructing accurate surfaces even for difficult scenes like complex buildings and weak texture regions, delivering intricate details as well as precise flats.

**Surface Reconstruction.** To evaluate surface reconstruction performance, we make comparisons on the DTU and TnT datasets with Chamfer distance and F1-score. The results are reported in Table 1 and 2. On the DTU dataset, our method outperforms all the baselines in the overall accuracy, exceeding previous SDF and 3DGS-based SOTA methods Geo-NeuS and PGSR, and also all the methods leveraging external geometry cues as well. On the TnT, our method also achieves the best in F1-score, and gets better results in most scenes compared to the SDF-based Neuralangelo, monocular depth-hinted (i.e., DepthAnythingV2) MonoGSDF, and geometry regularized PGSR. On the two datasets, our method also retains fast training comparable to the 3DGS-based methods. In Figure 4 and 5, we visualize the reconstructed meshes from ours and competitive baselines. Our productions obtain both the best accuracy and completeness. And due to the basis of the initial prior-free and densely covered sparse voxels, GeoSVR can handle the reflective regions and areas with insufficient coverage, where the 3DGS-based methods are limited, due to insufficient initialization points. Additionally, GeoSVR performs better than previous geometry cue-reliant methods (e.g., VCR-GauS) that may lead to oversmoothing and underfitting.

**Appearance Reconstruction.** Achieving accurate geometry reconstruction, our method maintains the capability for high-quality novel view synthesis as well. In Table 3, we compare our methods on the Mip-NeRF 360 dataset with the baselines in the aspect of rendering quality. Our method exhibits competitive performance among the surface reconstruction methods as well as the NVS-specific baselines such as our basis SVRaster. Due to the lack of geometry ground-truth, we do not evaluate the surface reconstruction quality. Qualitative comparisons can be found in the Appendix.

Table 3: **Quantitative Results on Mip-NeRF 360 Dataset.** The best scores for surface reconstruction methods are highlighted with colors.

	Outdoor Scene			Indoor Scene			
	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	PSNR $\uparrow$	SSIM $\uparrow$	LPIPS $\downarrow$	
NVS	NeRF	21.46	0.458	0.515	26.84	0.790	0.370
	Deep Blending	21.54	0.524	0.364	26.40	0.844	0.261
	Instant NGP	22.90	0.566	0.371	29.15	0.880	0.216
	Mip-NeRF 360	24.47	0.691	0.283	31.72	0.917	0.180
	3DGS	24.67	0.728	0.240	30.96	0.924	0.187
	SVRaster	24.68	0.738	0.206	30.65	0.927	0.161
Surface Recon.	BakedSDF	22.47	0.585	0.349	27.06	0.836	0.258
	SuGaR	22.93	0.629	0.356	29.43	0.906	0.225
	2DGS	24.34	0.717	0.246	30.40	0.916	0.195
	GOF	24.82	0.750	0.202	30.79	0.924	0.184
	VCR-GauS	24.31	0.707	0.280	30.53	0.921	0.184
	PGSR	24.76	0.752	0.203	30.36	0.934	0.147
GeoSVR (Ours)	24.83	0.738	0.218	30.46	0.921	0.172	

## 4.2 Ablation Study

In this section, we verify the effect of our designs on the Tanks and Temples [34] dataset and report the mesh reconstruction metrics. The quantitative scores are reported in Table 4. As references, the reproduced SVRaster and PGSR with TSDF are reported in the comparison. Additionally, we summarize the baselines with external cues in Table 5 to exhibit the effect of the methodology itself.

Table 4: **Ablation Study** on the TnT Dataset.

Items	Settings	Precision $\uparrow$	Recall $\uparrow$	F1-Score $\uparrow$
<b>A.</b>	SVRaster (Base)	0.383	0.421	0.397
	PGSR (Reference)	0.509	0.560	0.527
	PGSR + Patch-wise Depth (Reference)	0.517	0.576	0.538
<b>B.</b>	A. + Sparse Points	0.363	0.409	0.382
	A. + Inverse Depth	0.383	0.421	0.398
	A. + Patch-wise Depth	0.474	0.438	0.449
<b>C.</b>	B. + Multi-view Reg.	0.520	0.568	0.538
	B. + Multi-view Reg. + Voxel Dropout	0.533	0.569	0.546
<b>D.</b>	C. + Surface Rectif.	0.536	0.572	0.549
	C. + Surface Rectif. + Scaling Penalty	0.538	0.577	0.552
<b>E.</b>	D. + Voxel-Uncertainty Depth (Ours)	0.549	0.581	0.560

Table 5: **Accuracy Comparison** to Baselines with External Cues.

Method	Geo.	Init.& Cues	TnT F1. $\uparrow$	DTU Cf. $\downarrow$
MonoSDF [77]	SDF	Mono Depth & Normal	0.39	0.73
GSurfel [15]	GS	SfM pts	-	0.88
		Mono Normal	-	0.88
GS2Mesh [62]	GS	SfM pts	-	0.68
		Stereo Depth	-	0.68
VCR-GauS [14]	GS	SfM pts Mono Normal	0.40	0.80
MonoGSDF [36]	GS+SDF	SfM pts	0.47	0.65
		Mono Depth	0.47	0.65
<b>Ours</b>	Voxel	Mono Depth	<b>0.56</b>	<b>0.47</b>

**Scene Constraint.** Scene constraint dominates an essential start for further refinement. In Table 4, we observe that regularizations of sparse depth from SfM points and monocular depth with inverse loss both help less, while the patch-wise depth loss of Table 4 B breaks through to improve the geometry effectively. A step further, even though the reconstruction already achieves a high quality (0.552 in F1), our *Voxel-Uncertainty Depth Constraint* still remarkably recognizes the uncertain regions and refines the geometry and preserving the well-reconstructed parts, as shown in Figure 6 and Table 4 E.

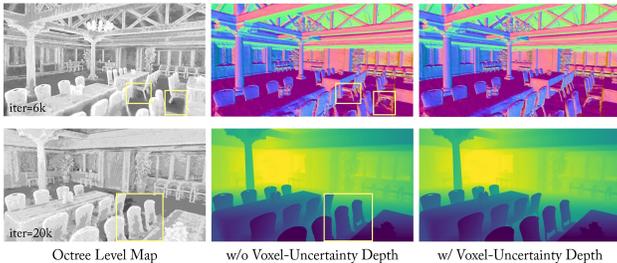


Figure 6: **Qualitative Studies** for the Voxel-Uncertainty Depth. Recognizing regions with uncertain voxel geometry, the challenging inaccurate surfaces can be effectively fixed.

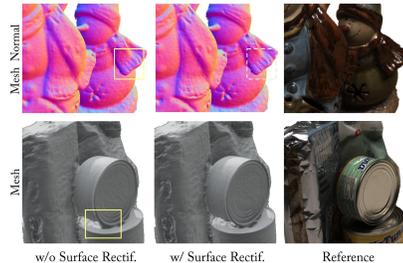


Figure 7: **Qualitative Studies** for the Surface Rectification. Facilitation for sharp and accurate surfaces is made.

**Multi-view Regularization.** Based on the scene constraint, we then analyse the multi-view regularization part. Consistent with the conclusions like in previous works [20, 16, 11], adding the explicit multi-view geometry objective can hugely improve the geometry accuracy, yet by relieving the local trap of sparse voxels, our *Voxel Dropout* strategy further improves the multi-view consistency to a higher level and exceeds the patch-warping regularized reference method with monocular depth.

**Voxel Regularization.** To further facilitate the surface-depth consistency, we apply the *Surface Rectification* and *Scaling Penalty* for the voxels to get finer surfaces. As shown in Table 4 D and Figure 7, the voxel regularization designs benefit the formation of accurate surfaces from the perspective of voxel-based representation, therefore improving the geometry both quantitatively and qualitatively.

## 5 Conclusion

In this work, we have presented GeoSVR, an explicit voxel-based framework that explores and extends the under-investigated potential of sparse voxels to deliver accurate, detailed, and complete surface reconstruction with high efficiency. Our study first analyzes voxel uncertainty in geometry representation to distinguish the confidence of learned geometry, enabling effective and robust scene constraint from external cues. Next, we investigate the problem of voxel-based surface refinement, reconstructing surfaces with superior quality by our solution. In the future, it will be interesting to explore enhancing voxel’s globality to conquer challenges like varying lights and textureless regions.

## Acknowledgments and Disclosure of Funding

This work is supported by the National Natural Science Foundation of China 62276016, 62372029, and Key R&D Program of Jiangxi Province, China (20232BBE50019). Lin Gu is supported by JST Moonshot R&D Grant Number JPMJMS2011 Japan.

## References

- [1] Matan Atzmon and Yaron Lipman. Sal: Sign agnostic learning of shapes from raw data. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 2565–2574, 2020.
- [2] Gwangbin Bae and Andrew J Davison. Rethinking inductive biases for surface normal estimation. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 9535–9545, 2024.
- [3] Jonathan T Barron, Ben Mildenhall, Dor Verbin, Pratul P Srinivasan, and Peter Hedman. Mipnerf 360: Unbounded anti-aliased neural radiance fields. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 5470–5479, 2022.
- [4] Luca Bartolomei, Fabio Tosi, Matteo Poggi, and Stefano Mattoccia. Stereo anywhere: Robust zero-shot deep stereo matching even where either stereo or mono fail. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 1013–1027, 2025.
- [5] Reiner Birkl, Diana Wofk, and Matthias Müller. Midas v3. 1—a model zoo for robust monocular relative depth estimation. *arXiv preprint arXiv:2307.14460*, 2023.
- [6] Aleksei Bochkovskii, Amaël Delaunoy, Hugo Germain, Marcel Santos, Yichao Zhou, Stephan R Richter, and Vladlen Koltun. Depth pro: Sharp monocular metric depth in less than a second. *arXiv preprint arXiv:2410.02073*, 2024.
- [7] Krzysztof Byrski, Marcin Mazur, Jacek Tabor, Tadeusz Dziarmaga, Marcin Kaźdźiołka, Dawid Baran, and Przemysław Spurek. Raysplats: Ray tracing based gaussian splatting. *arXiv preprint arXiv:2501.19196*, 2025.
- [8] Ang Cao and Justin Johnson. Hexplane: A fast representation for dynamic scenes. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 130–141, 2023.
- [9] Eric R Chan, Connor Z Lin, Matthew A Chan, Koki Nagano, Boxiao Pan, Shalini De Mello, Orazio Gallo, Leonidas J Guibas, Jonathan Tremblay, Sameh Khamis, et al. Efficient geometry-aware 3d generative adversarial networks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 16123–16133, 2022.
- [10] Anpei Chen, Zexiang Xu, Andreas Geiger, Jingyi Yu, and Hao Su. Tensorf: Tensorial radiance fields. In *Computer Vision—ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part XXXII*, pages 333–350. Springer, 2022.
- [11] Danpeng Chen, Hai Li, Weicai Ye, Yifan Wang, Weijian Xie, Shangjin Zhai, Nan Wang, Haomin Liu, Hujun Bao, and Guofeng Zhang. Pgsr: Planar-based gaussian splatting for efficient and high-fidelity surface reconstruction. *IEEE Transactions on Visualization and Computer Graphics*, 2024.
- [12] Decai Chen, Peng Zhang, Ingo Feldmann, Oliver Schreer, and Peter Eisert. Recovering fine details for neural implicit surface reconstruction. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer Vision*, pages 4330–4339, 2023.
- [13] Hanlin Chen, Chen Li, and Gim Hee Lee. Neusg: Neural implicit surface reconstruction with 3d gaussian splatting guidance. *arXiv preprint arXiv:2312.00846*, 2023.
- [14] Hanlin Chen, Fangyin Wei, Chen Li, Tianxin Huang, Yunsong Wang, and Gim Hee Lee. Vcr-gaus: View consistent depth-normal regularizer for gaussian surface reconstruction. *Advances in Neural Information Processing Systems*, 37:139725–139750, 2024.

- [15] Pinxuan Dai, Jiamin Xu, Wenxiang Xie, Xinguo Liu, Huamin Wang, and Weiwei Xu. High-quality surface reconstruction using gaussian surfels. In *ACM SIGGRAPH 2024 Conference Papers*, pages 1–11, 2024.
- [16] François Darmon, Bénédicte Bascle, Jean-Clément Devaux, Pascal Monasse, and Mathieu Aubry. Improving neural implicit surfaces geometry with patch warping. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 6260–6269, 2022.
- [17] Ainaz Eftekhari, Alexander Sax, Jitendra Malik, and Amir Zamir. Omnidata: A scalable pipeline for making multi-task mid-level vision datasets from 3d scans. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 10786–10796, 2021.
- [18] Sara Fridovich-Keil, Giacomo Meanti, Frederik Rahbæk Warburg, Benjamin Recht, and Angjoo Kanazawa. K-planes: Explicit radiance fields in space, time, and appearance. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12479–12488, 2023.
- [19] Sara Fridovich-Keil, Alex Yu, Matthew Tancik, Qinhong Chen, Benjamin Recht, and Angjoo Kanazawa. Plenoxels: Radiance fields without neural networks. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5501–5510, 2022.
- [20] Qiancheng Fu, Qingshan Xu, Yew Soon Ong, and Wenbing Tao. Geo-neus: Geometry-consistent neural implicit surfaces learning for multi-view reconstruction. *Advances in Neural Information Processing Systems*, 35:3403–3416, 2022.
- [21] Xiao Fu, Wei Yin, Mu Hu, Kaixuan Wang, Yuexin Ma, Ping Tan, Shaojie Shen, Dahua Lin, and Xiaoxiao Long. Geowizard: Unleashing the diffusion priors for 3d geometry estimation from a single image. In *European Conference on Computer Vision*, pages 241–258. Springer, 2024.
- [22] Yasutaka Furukawa and Jean Ponce. Accurate, dense, and robust multiview stereopsis. *IEEE transactions on pattern analysis and machine intelligence*, 32(8):1362–1376, 2009.
- [23] Jian Gao, Chun Gu, Youtian Lin, Zhihao Li, Hao Zhu, Xun Cao, Li Zhang, and Yao Yao. Relightable 3d gaussians: Realistic point cloud relighting with brdf decomposition and ray tracing. In *European Conference on Computer Vision*, pages 73–89. Springer, 2024.
- [24] Chun Gu, Xiaofei Wei, Zixuan Zeng, Yuxuan Yao, and Li Zhang. Irgs: Inter-reflective gaussian splatting with 2d gaussian ray tracing. *arXiv preprint arXiv:2412.15867*, 2024.
- [25] Antoine Guédon and Vincent Lepetit. Sugar: Surface-aligned gaussian splatting for efficient 3d mesh reconstruction and high-quality mesh rendering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5354–5363, 2024.
- [26] Richard Hartley and Andrew Zisserman. *Multiple view geometry in computer vision*. Cambridge university press, 2003.
- [27] Wenbo Hu, Yuling Wang, Lin Ma, Bangbang Yang, Lin Gao, Xiao Liu, and Yuewen Ma. Trimiprf: Tri-mip representation for efficient anti-aliasing neural radiance fields. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 19774–19783, 2023.
- [28] Binbin Huang, Zehao Yu, Anpei Chen, Andreas Geiger, and Shenghua Gao. 2d gaussian splatting for geometrically accurate radiance fields. In *ACM SIGGRAPH 2024 conference papers*, pages 1–11, 2024.
- [29] Letian Huang, Dongwei Ye, Jialin Dan, Chengzhi Tao, Huiwen Liu, Kun Zhou, Bo Ren, Yuanqi Li, Yanwen Guo, and Jie Guo. Transparentgs: Fast inverse rendering of transparent objects with gaussians. *arXiv preprint arXiv:2504.18768*, 2025.
- [30] Sergio Izquierdo, Mohamed Sayed, Michael Firman, Guillermo Garcia-Hernando, Daniyar Turmukhambetov, Javier Civera, Oisín Mac Aodha, Gabriel Brostow, and Jamie Watson. Mvsanywhere: Zero-shot multi-view stereo. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 11493–11504, 2025.

- [31] Rasmus Jensen, Anders Dahl, George Vogiatzis, Engin Tola, and Henrik Aanaes. Large scale multi-view stereopsis evaluation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 406–413, 2014.
- [32] Bernhard Kerbl, Georgios Kopanas, Thomas Leimkuehler, and George Drettakis. 3d gaussian splatting for real-time radiance field rendering. *ACM Transactions on Graphics (TOG)*, 42(4):1–14, 2023.
- [33] Diederik P Kingma. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*, 2014.
- [34] Arno Knapitsch, Jaesik Park, Qian-Yi Zhou, and Vladlen Koltun. Tanks and temples: Benchmarking large-scale scene reconstruction. *ACM Transactions on Graphics (ToG)*, 36(4):1–13, 2017.
- [35] Jiahe Li, Jiawei Zhang, Xiao Bai, Jin Zheng, Xin Ning, Jun Zhou, and Lin Gu. Dngaussian: Optimizing sparse-view 3d gaussian radiance fields with global-local depth normalization. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 20775–20785, 2024.
- [36] Kunyi Li, Michael Niemeyer, Zeyu Chen, Nassir Navab, and Federico Tombari. Monogsdf: Exploring monocular geometric cues for gaussian splatting-guided implicit surface reconstruction. *arXiv preprint arXiv:2411.16898*, 2024.
- [37] Mingwei Li, Pu Pang, Hehe Fan, Hua Huang, and Yi Yang. Tsqs: Improving gaussian splatting for transparent surface reconstruction via normal and de-lighting priors. *arXiv preprint arXiv:2504.12799*, 2025.
- [38] Zhaoshuo Li, Thomas Müller, Alex Evans, Russell H Taylor, Mathias Unberath, Ming-Yu Liu, and Chen-Hsuan Lin. Neuralangelo: High-fidelity neural surface reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 8456–8465, 2023.
- [39] Lingjie Liu, Jiatao Gu, Kyaw Zaw Lin, Tat-Seng Chua, and Christian Theobalt. Neural sparse voxel fields. *Advances in Neural Information Processing Systems*, 33:15651–15663, 2020.
- [40] Tao Lu, Mulin Yu, Linning Xu, Yuanbo Xiangli, Limin Wang, Dahua Lin, and Bo Dai. Scaffoldgs: Structured 3d gaussians for view-adaptive rendering. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 20654–20664, 2024.
- [41] Xiaoyang Lyu, Yang-Tian Sun, Yi-Hua Huang, Xiuzhe Wu, Ziyi Yang, Yilun Chen, Jiangmiao Pang, and Xiaojuan Qi. 3dgsr: Implicit surface reconstruction with 3d gaussian splatting. *ACM Transactions on Graphics (TOG)*, 43(6):1–12, 2024.
- [42] Alexander Mai, Peter Hedman, George Kopanas, Dor Verbin, David Futschik, Qiangeng Xu, Falko Kuester, Jonathan T Barron, and Yinda Zhang. Ever: Exact volumetric ellipsoid rendering for real-time view synthesis. *arXiv preprint arXiv:2410.01804*, 2024.
- [43] Ben Mildenhall, Pratul P Srinivasan, Matthew Tancik, Jonathan T Barron, Ravi Ramamoorthi, and Ren Ng. Nerf: Representing scenes as neural radiance fields for view synthesis. *Communications of the ACM*, 65(1):99–106, 2021.
- [44] Nicolas Moenne-Loccoz, Ashkan Mirzaei, Or Perel, Riccardo de Lutio, Janick Martinez Esturo, Gavriel State, Sanja Fidler, Nicholas Sharp, and Zan Gojcic. 3d gaussian ray tracing: Fast tracing of particle scenes. *ACM Transactions on Graphics (TOG)*, 43(6):1–19, 2024.
- [45] Thomas Müller, Alex Evans, Christoph Schied, and Alexander Keller. Instant neural graphics primitives with a multiresolution hash encoding. *ACM Transactions on Graphics (ToG)*, 41(4):1–15, 2022.
- [46] Michael Oechsle, Songyou Peng, and Andreas Geiger. Unisurf: Unifying neural implicit surfaces and radiance fields for multi-view reconstruction. In *Proceedings of the IEEE/CVF international conference on computer vision*, pages 5589–5599, 2021.

- [47] Jeong Joon Park, Peter Florence, Julian Straub, Richard Newcombe, and Steven Lovegrove. DeepSDF: Learning continuous signed distance functions for shape representation. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 165–174, 2019.
- [48] Lukas Radl, Michael Steiner, Mathias Parger, Alexander Weinrauch, Bernhard Kerbl, and Markus Steinberger. Stopthepop: Sorted gaussian splatting for view-consistent real-time rendering. *ACM Transactions on Graphics (TOG)*, 43(4):1–17, 2024.
- [49] Kerui Ren, Lihan Jiang, Tao Lu, Mulin Yu, Linning Xu, Zhangkai Ni, and Bo Dai. Octreegs: Towards consistent real-time rendering with lod-structured 3d gaussians. *arXiv preprint arXiv:2403.17898*, 2024.
- [50] Xinlin Ren, Chenjie Cao, Yanwei Fu, and Xiangyang Xue. Improving neural surface reconstruction with feature priors from multi-view images. In *European Conference on Computer Vision*, pages 445–463. Springer, 2024.
- [51] Johannes Lutz Schönberger and Jan-Michael Frahm. Structure-from-motion revisited. In *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2016.
- [52] Johannes Lutz Schönberger, Enliang Zheng, Marc Pollefeys, and Jan-Michael Frahm. Pixelwise view selection for unstructured multi-view stereo. In *European Conference on Computer Vision (ECCV)*, 2016.
- [53] Shuhan Shen. Accurate multiple view 3d reconstruction using patch-based stereo for large-scale scenes. *IEEE transactions on image processing*, 22(5):1901–1914, 2013.
- [54] Nitish Srivastava, Geoffrey Hinton, Alex Krizhevsky, Ilya Sutskever, and Ruslan Salakhutdinov. Dropout: a simple way to prevent neural networks from overfitting. *The journal of machine learning research*, 15(1):1929–1958, 2014.
- [55] Cheng Sun, Jaesung Choe, Charles Loop, Wei-Chiu Ma, and Yu-Chiang Frank Wang. Sparse voxels rasterization: Real-time high-fidelity radiance field rendering. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2025.
- [56] Cheng Sun, Min Sun, and Hwann-Tzong Chen. Direct voxel grid optimization: Super-fast convergence for radiance fields reconstruction. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 5459–5469, 2022.
- [57] Matias Turkulainen, Xuqian Ren, Iaroslav Melekhov, Otto Seiskari, Esa Rahtu, and Juho Kannala. Dn-splatter: Depth and normal priors for gaussian splatting and meshing. In *2025 IEEE/CVF Winter Conference on Applications of Computer Vision (WACV)*, pages 2421–2431. IEEE, 2025.
- [58] Jiepeng Wang, Peng Wang, Xiaoxiao Long, Christian Theobalt, Taku Komura, Lingjie Liu, and Wenping Wang. Neuris: Neural reconstruction of indoor scenes using normal priors. In *European conference on computer vision*, pages 139–155. Springer, 2022.
- [59] Peng Wang, Lingjie Liu, Yuan Liu, Christian Theobalt, Taku Komura, and Wenping Wang. Neus: Learning neural implicit surfaces by volume rendering for multi-view reconstruction. *Advances in Neural Information Processing Systems*, 34:27171–27183, 2021.
- [60] Yifan Wang, Di Huang, Weicai Ye, Guofeng Zhang, Wanli Ouyang, and Tong He. Neurodin: A two-stage framework for high-fidelity neural surface reconstruction. In *The Thirty-eighth Annual Conference on Neural Information Processing Systems*, 2024.
- [61] Bowen Wen, Matthew Trepte, Joseph Aribido, Jan Kautz, Orazio Gallo, and Stan Birchfield. Foundationstereo: Zero-shot stereo matching. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 5249–5260, 2025.
- [62] Yaniv Wolf, Amit Bracha, and Ron Kimmel. Gs2mesh: Surface reconstruction from gaussian splatting via novel stereo views. In *European Conference on Computer Vision*, pages 207–224. Springer, 2024.

- [63] Qi Wu, Janick Martinez Esturo, Ashkan Mirzaei, Nicolas Moenne-Loccoz, and Zan Gojic. 3dgt: Enabling distorted cameras and secondary rays in gaussian splatting. In *Proceedings of the Computer Vision and Pattern Recognition Conference*, pages 26036–26046, 2025.
- [64] Qianyi Wu, Jianmin Zheng, and Jianfei Cai. Surface reconstruction from 3d gaussian splatting via local structural hints. In *European Conference on Computer Vision*, pages 441–458. Springer, 2024.
- [65] Tong Wu, Jiaqi Wang, Xingang Pan, XU Xudong, Christian Theobalt, Ziwei Liu, and Dahua Lin. Voxurf: Voxel-based efficient and accurate neural surface reconstruction. In *The Eleventh International Conference on Learning Representations*, 2022.
- [66] Baixin Xu, Jiangbei Hu, Jiaze Li, and Ying He. Gsurf: 3d reconstruction via signed distance fields with direct gaussian supervision. *arXiv preprint arXiv:2411.15723*, 2024.
- [67] Lihe Yang, Bingyi Kang, Zilong Huang, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything: Unleashing the power of large-scale unlabeled data. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10371–10381, 2024.
- [68] Lihe Yang, Bingyi Kang, Zilong Huang, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything: Unleashing the power of large-scale unlabeled data. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 10371–10381, 2024.
- [69] Lihe Yang, Bingyi Kang, Zilong Huang, Zhen Zhao, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything v2. *Advances in Neural Information Processing Systems*, 37:21875–21911, 2024.
- [70] Yao Yao, Zixin Luo, Shiwei Li, Tian Fang, and Long Quan. Mvsnet: Depth inference for unstructured multi-view stereo. In *Proceedings of the European conference on computer vision (ECCV)*, pages 767–783, 2018.
- [71] Lior Yariv, Jiatao Gu, Yoni Kasten, and Yaron Lipman. Volume rendering of neural implicit surfaces. *Advances in Neural Information Processing Systems*, 34:4805–4815, 2021.
- [72] Lior Yariv, Yoni Kasten, Dror Moran, Meirav Galun, Matan Atzmon, Basri Ronen, and Yaron Lipman. Multiview neural surface reconstruction by disentangling geometry and appearance. *Advances in Neural Information Processing Systems*, 33:2492–2502, 2020.
- [73] Zongxin Ye, Wenyu Li, Sidun Liu, Peng Qiao, and Yong Dou. Absgs: Recovering fine details in 3d gaussian splatting. In *Proceedings of the 32nd ACM International Conference on Multimedia*, pages 1053–1061, 2024.
- [74] Alex Yu, Ruilong Li, Matthew Tancik, Hao Li, Ren Ng, and Angjoo Kanazawa. Plenotrees for real-time rendering of neural radiance fields. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pages 5752–5761, 2021.
- [75] Mulin Yu, Tao Lu, Linning Xu, Lihan Jiang, Yuanbo Xiangli, and Bo Dai. Gsdf: 3dgs meets sdf for improved neural rendering and reconstruction. *Advances in Neural Information Processing Systems*, 37:129507–129530, 2024.
- [76] Zehao Yu, Anpei Chen, Binbin Huang, Torsten Sattler, and Andreas Geiger. Mip-splatting: Alias-free 3d gaussian splatting. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 19447–19456, 2024.
- [77] Zehao Yu, Songyou Peng, Michael Niemeyer, Torsten Sattler, and Andreas Geiger. Monosdf: Exploring monocular geometric cues for neural implicit surface reconstruction. *Advances in neural information processing systems*, 35:25018–25032, 2022.
- [78] Zehao Yu, Torsten Sattler, and Andreas Geiger. Gaussian opacity fields: Efficient adaptive surface reconstruction in unbounded scenes. *ACM Transactions on Graphics (TOG)*, 43(6):1–13, 2024.
- [79] Wenyuan Zhang, Yu-Shen Liu, and Zhizhong Han. Neural signed distance function inference through splatting 3d gaussians pulled on zero-level set. *Advances in Neural Information Processing Systems*, 37:101856–101879, 2024.

- [80] Haoliang Zhao, Huizhou Zhou, Yongjun Zhang, Jie Chen, Yitong Yang, and Yong Zhao. High-frequency stereo matching network. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 1327–1336, 2023.
- [81] Enliang Zheng, Enrique Dunn, Vladimir Jovic, and Jan-Michael Frahm. Patchmatch based joint view selection and depthmap estimation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 1510–1517, 2014.

## NeurIPS Paper Checklist

### 1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper’s contributions and scope?

Answer: [\[Yes\]](#)

Justification: The main claims in the abstract and introduction are accurately consistent with the paper, and are validated through theoretical and experimental results.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

### 2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: Due to space limitations, we briefly discussed the potential improvements in the future in the conclusion, and discussed the limitations in the appendix.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.

- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

### 3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [Yes]

Justification: The proof and assumptions of the involved theoretical results are given in the main paper and the appendix.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

### 4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: The details of the implementation of our method, baselines, and experiments are well described in the main paper and the appendix.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
  - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
  - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.

- (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
- (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

## 5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: The code has been made open-source. The datasets in experiments are all from third parties and publicly open-access.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

## 6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: The details of the implementation of our method, baselines, and experiments are well described in the main paper and the appendix.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

## 7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: Consistent with previous works, considering the performance of surface reconstruction is stable, the experiments do not involve metrics related to the statistical significance.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

#### 8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: The experiment devices, time consumptions and other details are reported in the paper.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

#### 9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics [https://neurips.cc/public/EthicsGuidelines?](https://neurips.cc/public/EthicsGuidelines)

Answer: [Yes]

Justification: This work conforms to the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

## 10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: We have discussed the societal impacts in the appendix.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

## 11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [NA]

Justification: This paper does not contain these risks.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

## 12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We use the assets properly, following the corresponding requirements.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, [paperswithcode.com/datasets](https://paperswithcode.com/datasets) has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

### 13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: This paper does not release new assets in the submission.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

### 14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]

Justification: This paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

### 15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: This paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

**16. Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA]

Justification: The core method development in this research does not involve LLMs as any important, original, or non-standard components.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.

## Appendix

### A Ablation Study

#### A.1 Scene Constraint

To better verify and demonstrate the effect of scene constraint, we conduct an additional ablation study by solely disabling the scene constraint on our full GeoSVR and ablate its effect with more monocular models, including DepthAnything [68], DepthPro [6], and DepthAnythingV2 [69].

As analysed in our main paper, unlike 3DGS or SDF that natively obtain a geometric hypothesis for better convergence, the absence of scene constraint of SVRaster leads to undesirable and heavily distorted surfaces.

Although a competitive accuracy on partial regions can be gained after applying our efforts of Sparse Voxel Surface Regularization, the distorted geometry leads to a lot of inaccurate reconstructions and drags the overall performance improvement compared to the SOTA 3DGS-based approach PGSR [11], as quantitatively and qualitatively shown in Table 6 and Figure 8. By introducing monocular depth as a solution, it can be observed that this drawback of the representation has been well addressed.

Table 6: **Additional Ablation Study on Scene Constraint.** The absence of scene constraint leads to obvious distorted geometry (red). This drawback can be solved via our proposal.

Backbone	Monocular Model	Uncertainty	Precision $\uparrow$	Recall $\uparrow$	F1-Score $\uparrow$
PGSR	None	N/A	0.509	0.560	0.527
	DepthAnythingV2	N/A	0.517	0.576	0.538
	None	N/A	0.511	0.549	0.523
GeoSVR	DepthAnything	$\times$ $\checkmark$	0.526 0.539	0.568 0.574	0.540 0.551
	DepthPro	$\times$ $\checkmark$	0.537 0.546	0.574 0.579	0.549 0.557
	DepthAnythingV2	$\times$ $\checkmark$	0.538 0.549	0.577 0.581	0.552 0.560

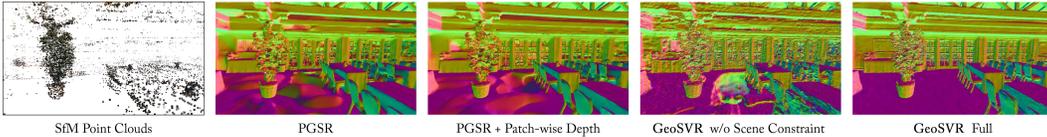


Figure 8: Comparison of Challenging Region Reconstruction without/with Scene Constraint.

Despite the rich geometric cues provided, previous 3DGS-based approaches are much more limited in exploiting monocular depths for improvements, which demonstrates the advantage of our explored sparse voxels. For demonstration, we apply the monocular depth with our used patch-wise loss to the SOTA PGSR and adjust the coefficient to fit the best F1-score, and visualize the reconstructed surfaces in Figure 8. It can be observed that for challenging areas that are difficult to reconstruct through multi-view consistency, 3DGS-based approaches can hardly recover the accurate geometry even when applying monocular depth constraints, mainly limited by their heavy reliance on the initial SFM points. Notably, PGSR also applies a specific densification technique AbsGS [73] to relieve this limitation, but this is still marginal for such cases. Instead, when just applying the less advanced DepthAnything, our method gets much larger improvements, especially equipped with the proposed Voxel-Uncertainty Depth Constraint. With DepthPro that is less robust for outdoor scenes, our method can still retain high-quality reconstruction, exhibiting the effectiveness and robustness of our method.

#### A.2 Voxel Dropout

In the main paper, we have quantitatively verified the effect of Voxel Dropout, which improves the release of the power of geometry regularization for the local voxels significantly. Due to the space limitation of the main paper, we supplement the qualitative comparisons here to help demonstrate its effect in Figure 9. As shown, different from the situations in SDF or 3DGS where smooth surfaces are reconstructed by applying the homography patch warping, several redundant geometric structures remain in our local voxel-based representation when not applying

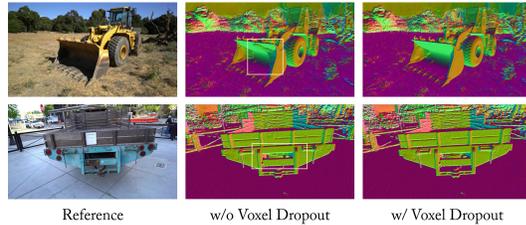


Figure 9: **Effect of Voxel Dropout Strategy.**

voxel dropout. Analysing these geometric artifacts, we found that despite the geometry regularization can recognize and penalize these regions, the effect is marginal because the effect scope is quite small for a tiny voxel and it does not receive the gradient from the distant neighbors, whereas it can not move as the primitives in 3DGS, making local minima between the appearance supervision and geometry regularization. Getting inspiration from the classic dropout [54] that solves the overfitting from complex parameters, which is similar to our problem, we simplify the voxel-based scene representation by dropping out parts of the voxels, and make each voxel obtain a large responsibility for geometric consistency during geometry regularization. This proposal finally relieves the problem.

### A.3 Surface Rectification

In Table 4, we ablate the Surface Rectification on the TnT datasets to show its effect, and report the comparison on DTU in Figure 7. Acting as a fine-grained regularization technique on tiny voxels with critical density changes, its effect can be better exhibited on the DTU dataset, which focuses on the evaluation for highly accurate surface reconstruction. For better demonstration, we report the quantitative ablation results on DTU in Table 7. Compared to the TnT dataset, the improvement on it is more significant to bring about a 0.01 improvement on Chamfer distance. This is even close to the entire gap between some previous methods (e.g., 0.51 from Geo-Neus v.s. 0.52 from PGSR) in Table 1, especially considering the quality is already quite close to the ground truth, which demonstrates our technique’s effectiveness in accurate surface refinement.

Table 7: Additional Ablation Study on Surface Rectification on the DTU [31] dataset.

Setting	d2s ↓	s2d ↓	cf-dist ↓
w/o Surface Rectif.	0.433	0.521	0.477
w/ Surface Rectif.	0.426	0.511	0.468

## B Derivation of Voxel Geometric Uncertainty

Here we provide the detailed derivation of the Voxel Geometric Uncertainty in Eq. (4).

**Derivation.** Review the representation, the scene geometry is represented with the composition of non-overlapping trilinear voxels, of which the density inside a voxel is trilinearly weighted by the 8 corner points with a density value of each. Therefore, the geometry representation capability for a single voxel is constant and scale-independent, which we denote as a constant value  $G_{\max}$  to indicate the maximum quantity of information of each voxel for geometry representation.

Then, consider a local region of the quantity of information  $\rho_{\text{geo}}$  in geometry per unit volume that needs to be learned. For a voxel with the length of  $\mathbf{v}_s$  in it, the desired quantity of information  $Q$  for representation should be:

$$Q = \rho_{\text{geo}} \cdot \mathbf{v}_s^3, \quad \text{s.t. } \mathbf{v}_s = \mathbf{w}_s \times 2^{-l} \Rightarrow Q = \rho_{\text{geo}} \cdot \left(\frac{\mathbf{w}_s}{2^l}\right)^3. \quad (13)$$

In most situations, the sparse voxel model can not fully capture the geometry information with unlimited resolutions due to the limited computational resources. Therefore, for the underfitted regions, the maximum information retention ratio  $\eta_{\max}$  can be given:

$$\eta_{\max} = \frac{G_{\max}}{Q} = \frac{G_{\max}}{\rho_{\text{geo}}} \cdot \left(\frac{2^l}{\mathbf{w}_s}\right)^3 \in (0, 1). \quad (14)$$

After getting the ideal upper-bound, we focus on the common cases for the uncertainty.

First, considering Eq. 14 only gives the maximum retention ratio, while we try to estimate the actual voxel uncertainty, the local target for different voxels should be considered. Then, based on the retention ratio  $\eta_{\max}$ , our goal is to model a proper base to weight the uncertainty that is only relevant to the voxel’s characteristic. Therefore, we build the voxel uncertainty based on an inverse  $\eta$  to indicate the information loss, which ensures the weight does not shrink to 0 to cause failure when the ideal  $G_{\max}$  meets the target  $Q$ , and introduce a coefficient  $g(v)$  to adjust the local target for different voxels. The voxel geometric uncertainty  $U$  in the initial follows:

$$\eta'_{\max} = \frac{G_{\max}}{Q \cdot g(v)} = \frac{G_{\max}}{\rho_{\text{geo}} \cdot g(v)} \cdot \left(\frac{2^l}{\mathbf{w}_s}\right)^3, \quad U(v) = \eta'_{\max}^{-1} = \frac{1}{G_{\max}} \cdot \left(\frac{\mathbf{w}_s}{2^l}\right)^3 \cdot \rho_{\text{geo}} \cdot g(v). \quad (15)$$

**Coefficient Definition and Approximation.** Turn to the real situations, since it’s difficult to precisely define the value of constants  $G_{\max}$  and  $\rho_{\text{geo}}$ , and variance  $g_v$ , we denote the constant  $G_{\max}$  as a

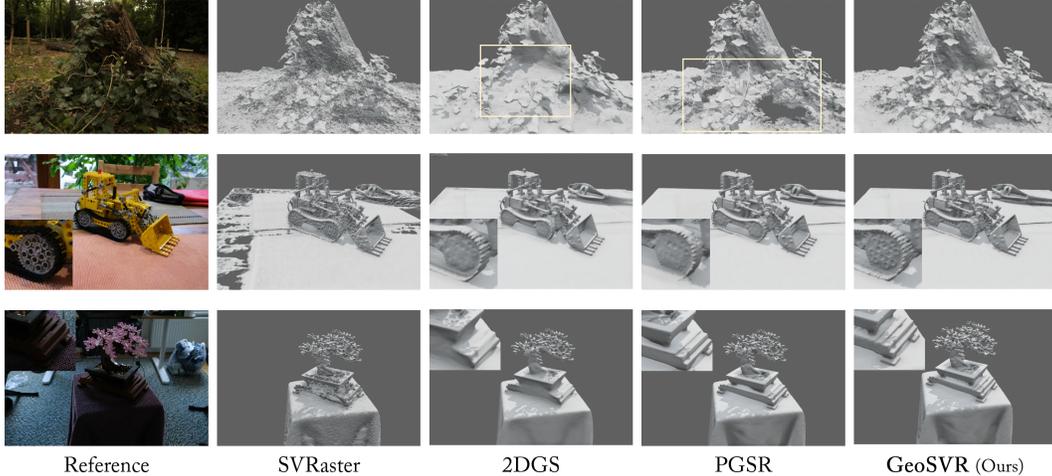


Figure 10: **Qualitative Comparison on Mip-NeRF 360 [3] dataset.** Our GeoSVR provides more detailed and complete surface reconstruction for the real-world captured scenes.

coefficient  $\beta$  that relates to a global geometry scale, and take the sampled voxel density to approximate represent the term  $\rho_{\text{geo}} \cdot g(v)$  to reflect the local quantity of geometric information, reasonably assuming the already learned densities in voxels have already been approximately accurate during the past optimization and are positively correlated to their local quantity of geometric information. Therefore, based on Eq. (15), the approximated voxel geometric uncertainty  $U_{\text{appr}}$  is given by:

$$U_{\text{appr}}(v) = \frac{1}{\beta} \cdot \left(\frac{\mathbf{w}_s}{2^l}\right)^3 \cdot (1 - \exp(-\mathbf{v}_{\text{geo}})), \quad (16)$$

where  $\text{interp}(\cdot)$  is not shown to indicate non-specific sampling. Considering further probable involvement in various calculations, given the values of Octree level  $l$  may increase to be up to 16 or even larger,  $U_{\text{appr}}$  can easily cause numerical blowup to an extremely extensive data range due to its contained power and exponent in  $(2^l)^3$ , and thus brings instability. Therefore, keeping the same trend and also a suitable data range as a weight for later, we cancel the overall power of 3 and replace the term  $1/2^l$  with  $1/l$ . To additionally compensate for the degree of value variation, we introduce a bias  $l_0$  on the Octree level to help control the shape of the function. Consequently, the final formulations of the Voxel Geometric Uncertainty in Eq. (4) are derived:

$$U_{\text{base}}(l) = \frac{\mathbf{w}_s}{\beta(l + l_0)}, \quad U_{\text{geom}}(v) = U_{\text{base}}(l) \cdot (1 - \exp(-\mathbf{v}_{\text{geo}})). \quad (17)$$

## C Qualitative Comparison on Mip-NeRF 360

Here we supplement the qualitative comparison on Mip-NeRF 360 [3] dataset. As shown in Figure 10, our GeoSVR provides more detailed and complete surface reconstruction for the real-world captured images. As discussed in the main paper, both 2DGS and PGSR suffer from the geometry representation ambiguity from the Gaussians, and thus lead to over-smooth surfaces and a lack of details. Instead, our method overcomes the geometry distortion in SVRaster while preserving high-quality details with completeness to deliver accurate surface reconstruction.

## D Experimental Details

### D.1 Datasets

We use the DTU <sup>1</sup>, Tanks and Temples (TnT) <sup>2</sup>, and Mip-NeRF 360 <sup>3</sup> datasets for evaluation. Specifically, we follow the previous works to select 15 scans with ids of 24, 37, 40, 55, 63, 65, 69,

<sup>1</sup>[https://roboimagedata.compute.dtu.dk/?page\\_id=36](https://roboimagedata.compute.dtu.dk/?page_id=36)

<sup>2</sup><https://www.tanksandtemples.org/>

<sup>3</sup><https://jonbarron.info/mipnerf360/>

83, 97, 105, 106, 110, 114, 118, 122, and use the half-resolution images as the training data. The DTU dataset used in the experiment is preprocessed from 2DGS [28] through COMLAP [52, 51]<sup>4</sup>. In TnT dataset, we follow previous work to use 6 high-quality scenes from the Training Data split that provides publicly accessible ground truth for evaluation. The camera poses and scene boundary are translated by the script provided by Neuralangelo [38]<sup>5</sup>. For Mip-NeRF 360, we use all 9 scenes for evaluation. The images are downsampled 2× or 4× following [32] for indoor scenes ("bonsai", "counter", "kitchen", "room") and outdoor scenes ("bicycle", "garden", "flowers", "stump", "treehill"). The camera poses are provided along with the dataset.

## D.2 Baselines

In experiments, our baselines mainly involve: 1) implicit SDF-based methods: NeuS [59], Neuralangelo [38], Geo-NeuS [20], MonoSDF [77], and 2) explicit methods: 2DGS [28], GOF [78], GS2Mesh [62], VCR-GauS [14], PGSR [11]), MonoGSDF [36] and SVRaster [55]. In the latter, SVRaster is based on sparse voxels and others are based on 3DGS, while MonoGSDF also uses a hybrid SDF.

**Baselines Involving Geometry Models.** Among them, MonoSDF [77], GSurfel [15], VCR-GauS [14], GS2Mesh [62], and MonoGSDF (named G2SDF in the earlier<sup>6</sup>) [36] take external geometry cues from pre-trained depth and/or normal models for regularization. Specifically, MonoSDF uses pre-trained Omnidata [17] models to estimate monocular depth and normal, and GSurfel uses normal from Omnidata for supervision. GS2Mesh takes a pre-trained stereo model [80] to extract surfaces from a well-trained 3DGS model directly from the synthesized views. VCR-GauS leverages monocular normal [2] and conducts a multi-view check to estimate the estimation confidence of the normal maps for better regularization. MonoGSDF takes monocular depth from DepthAnythingV2 [69], which is the same as we use, to supervise the rendered depth with some learnable adjustment terms.

**Source of Results.** For qualitative results, we report the official scores from the published or up-to-date arXiv papers if available. For Geo-NeuS that does not have an official score on TnT dataset, we take the results reported by Neuralangelo for comparison. For qualitative results, we prioritize using the officially provided checkpoints or results if available. Otherwise, we use the official codebase to reproduce the results following the corresponding scripts on the same processed datasets as used for our method, which does not contain error poses like the processed TnT from 2DGS and GOF, for fairness. The reported training time is from the corresponding papers. And since MonoGSDF has not reported the training time on DTU nor open-sourced their code, we marked it as "hrs" through an approximated estimation from the provided training time of TnT.

## D.3 Metrics

Following prevailing settings [71, 59, 38, 28, 78], we use Champer distance to measure the accuracy for DTU dataset, and F1-Score for the overall quality for TnT. Especially, we take the off-the-shelf evaluation toolkits<sup>7 8</sup> with the corresponding version of dependencies (e.g., Open3D 0.9.0 for TnT) in measurement for fairness. For Mip-NeRF 360 dataset, we inherit the metrics with implementations used in 3DGS [32] to keep aligned with previous works [78, 28, 14, 11].

## E Inference Speed

Besides delivering high-quality surface reconstruction, GeoSVR also retains high efficiency. While the training times are reported in the main paper, we list the rendering speed on different datasets in the experiments in Table 8. It's shown that our method achieves a fast inference speed, inheriting from SVRaster [55] by keeping its concise representation without introducing any heavy modules at inference. The typical time of mesh extraction is within minutes, depending on the required scale. Overall, GeoSVR achieves a top-tier efficiency competitive with GS-based methods.

Table 8: Average Rendering Speed.

Dataset	360 [3]	DTU [31]	TnT [34]
FPS	83.1	143.8	142.0

<sup>4</sup><https://huggingface.co/datasets/dylanebert/2DGS>

<sup>5</sup>[https://github.com/NVlabs/neuralangelo/blob/main/DATA\\_PROCESSING.md](https://github.com/NVlabs/neuralangelo/blob/main/DATA_PROCESSING.md)

<sup>6</sup><https://arxiv.org/abs/2411.16898v1>

<sup>7</sup>[https://github.com/is1-org/TanksAndTemples/tree/master/python\\_toolbox/evaluation](https://github.com/is1-org/TanksAndTemples/tree/master/python_toolbox/evaluation)

<sup>8</sup>[https://github.com/hbb1/2d-gaussian-splatting/tree/main/scripts/eval\\_dtu](https://github.com/hbb1/2d-gaussian-splatting/tree/main/scripts/eval_dtu)

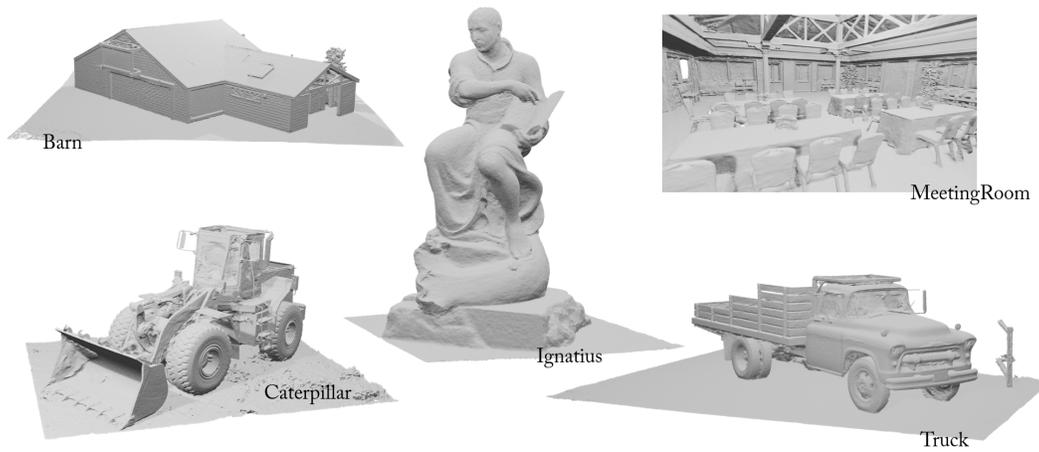


Figure 11: Visualization of Reconstructed Meshes on TnT [34] Dataset.

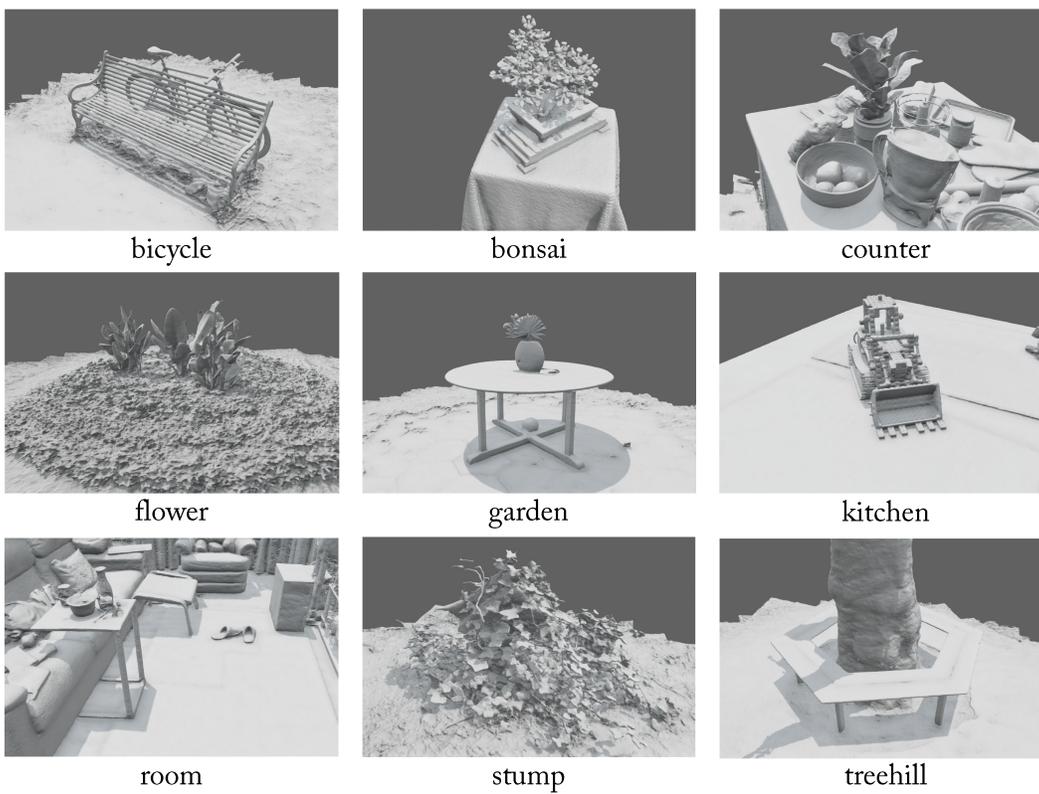


Figure 12: Visualization of Reconstructed Meshes on Mip-NeRF 360 [3] Dataset.



Figure 13: Visualization of Reconstructed Meshes on DTU [31] Dataset.



Figure 14: Visualization of Reconstructed Meshes with Vertex Color on DTU [31] Dataset.

## F Efficiency Analysis

In Table 9, we report the efficiency metrics corresponding to the ablation study Table 4. From the results, it can be observed that all of the components maintain high efficiency in all aspects, including inference FPS, memory, and the required number of voxels, except the multi-view regularization that contributes most to the increasing training time consumption. According to our analysis, this is mainly caused by the less efficient code implementation, which we plan to solve in the future.

In terms of GPU consumption, it can be observed that our proposed components exhibit superior efficiency, which seldom increases GPU memory occupancy under a similar number of voxels. Especially, this achievement is contributed by our efficiency-focused designs in constraint selection, restrained voxel-level regularizations, and combined with the efficient coding implementation. Moreover, while our proposed techniques effectively enforce a correct geometry to be learned, the artifacts, redundant voxels, and distorted surfaces can be removed or well corrected, therefore, the GPU memory requirement could even decrease along with the number of used voxels reduced.

Table 9: Efficiency Analysis of the Ablation Study.

Items	Settings	# Voxels (M) ↓	FPS ↑	Peak GPU Mem ↓	F1-Score ↑	Training Time ↓
A.	Base (SVRaster)	9.3	132.9	12.3 GB	0.397	23.8 min
B.	A. + Patch-wise Depth	9.1	138.2	10.5 GB	0.449	24.2 min
C.	B. + Multi-view Reg.	9.1	138.7	11.4 GB	0.538	65.1 min
	B. + Multi-view Reg. + Voxel Dropout	9.1	137.3	11.5 GB	0.546	68.3 min
D.	C. + Surface Rectif.	8.8	146.4	11.1 GB	0.549	64.4 min
	C. + Surface Rectif. + Scaling Penalty	9.0	142.4	11.2 GB	0.552	67.3 min
E.	D. + Voxel-Uncertainty Depth (Ours)	8.8	142.0	11.2 GB	0.560	67.5 min

## G Additional Visualization Results

Here we show the additional visualization of the reconstructed meshes on the three datasets. In Figure 11 and 12, we show the reconstructed scenes in the TnT and Mip-NeRF 360 datasets. Our proposed GeoSVR reconstructs high-quality meshes in these complex and intricate scenes. In Figure 13, we reported the reconstructed objects in DTU datasets, and additionally show the colored rendering in Figure 14. These results prove the capability of GeoSVR to reconstruct vivid objects with accurate detail, which further proves its practical value in real-world applications. For intuitive comparison, we additionally provide a supplementary video and kindly invite the reader to watch.

## H Societal Impacts

Our proposed method provides high-quality surface reconstruction from images. So far, we have not discovered the direct negative societal impact, but it’s notable that the accurate 3D reconstructions may be used maliciously. And the accurate reconstructions from real-world data may raise potential privacy concerns. During use, these societal impacts should be treated with caution.

## I Discussion

In this work, we present GeoSVR to achieve high-quality surface reconstruction with state-of-the-art accuracy, completeness, and detail preservation. Moreover, our investigation goes a further step for the possibility of recovering accurate geometry via the voxel-based representation, and also reveals a potential to better utilize the growingly important and well-established geometric foundation models [68, 69, 2, 61, 30, 4] besides the Gaussian Splatting-based approaches [57, 36, 14, 35, 15].

Nevertheless, the limitations still exist, mainly in 1) regions with serious reflections, 2) textureless areas, and 3) transparent surfaces. Due to the heavy misleading of the photometric inconsistency and the limited representation capability for ray tracing, these regions often cause suboptimal geometry.

Typically, it’s a common phenomenon that the rendering quality slightly drops when the model is forced to learn the accurate geometry. This mainly lies in that the captured multi-view images from

the real world do not always retain an ideal photometric multi-view consistency that matches the correct geometry, such as the reflective regions and transparent materials, especially the current radiance fields for surface reconstruction seldom consider complex ray tracing, but mostly only once forward. In that situation, a distorted geometry in a local minimum may be better than the correct one to express an approximately accurate appearance.

In the future, introducing more efficient ray tracing techniques [23, 44, 63, 24, 7], improved voxel globality, and solutions for transparency [37, 29] could be of help to solve these challenging issues.