
AlphaFold3, a secret sauce for predicting mutational effects on protein-protein interactions

Anonymous Author(s)

Affiliation

Address

email

Abstract

AlphaFold3 has set the new state-of-the-art in predicting protein-protein complex structures. However, the complete picture of biomolecular interactions cannot be fully captured by static structures alone. In the field of protein engineering and antibody discovery, the connection from structure to function is often mediated by binding energy. This work benchmarks AlphaFold3 against SKEMPI, a commonly used binding energy dataset. We demonstrate that AlphaFold3 learns unique information and synergizes with force field, profile-based, and other deep learning methods in predicting the mutational effects on protein-protein interactions. We hypothesize that AlphaFold3 captures a more global effect of mutations by learning a smoother energy landscape, but it lacks the modeling of full atomic details that are better addressed by force field methods, which possess a more rugged energy landscape. Integrating both approaches could be an interesting future direction.

1 Introduction

The development of AlphaFold and other deep learning methods has revolutionized the study of the protein complex structures [1–7], advancing beyond traditional physics-based docking methods [8–10]. With the advent of AlphaFold3, the success rate of predicting general protein complex structures has reached almost 80%, and that for protein-antibody pairs has exceeded 60%, significantly outperforming its predecessor, AF2-Multimer, previously considered the state-of-the-art [1, 2]. However, as Derek Lowe points out [11], "Structure is not everything." The complete picture of biomolecular interactions cannot be fully captured by static structures alone; it also involves the dynamic association and dissociation of one protein with another protein partner. In an equilibrium state, this interaction property is commonly measured as the binding affinity, K_d , or described as the change in binding free energy, ΔG . In addition, nature is constantly evolving, with mutations regularly introduced that modulate the magnitude of binding affinity, among many other properties, such as the stability of the proteins themselves. A key therapeutic goal is to design molecules that bind strongly enough to either prevent or promote a specific state of its binding partner, such as the inactive or active state of GPCRs. In the field of antibody discovery, the process of mutating a candidate antibody to improve its binding affinity with the target antigen protein is termed antibody maturation. Most antibody drugs in clinical use have picomolar affinity for the target protein [12], while antibodies found through immunization commonly exhibit affinities in the nanomolar or even micromolar range [13]. This means that, during the maturation step, we need to improve the affinity by more than a thousand times, or, if measured in $\Delta\Delta G$, by about 4 kcal/mol.

33 A variety of methods have been developed to estimate the effects of mutations, ranging from force
34 field-based methods [14–16], which derive forces from physical interactions such as van der Waals
35 and electrostatic, or from statistical energy, to profile-based methods [17], which query sequence
36 and structure databases. Additionally, there are hybrid methods [18] that combine force field and
37 profile-based information. More recently, deep learning methods [19–22] have emerged, where the
38 underlying energy landscapes are learned through unsupervised pre-training involving perturbations
39 of crystallized protein structures.

40 In this work, we demonstrate that AlphaFold, although trained as a structure prediction model,
41 learns critical information that is complementary to all types of current methods studying mutational
42 effects on protein-protein interactions. This observation aligns with findings from previous studies of
43 protein-small molecule and protein-peptide interactions [23–26], suggesting that models also trained
44 to predict complex structures demonstrate enhanced capabilities in predicting binding affinity.

45 2 Related Work

46 Many works have demonstrated that AlphaFold2 already learns important features useful for other
47 tasks. For example, in the protein design field, RFdiffusion [27] showed that fine-tuning from the
48 pre-trained structure prediction model, RoseTTAFold [4], significantly enhances performance in
49 protein design compared to starting without pre-training. Additionally, Roney [28] demonstrated that
50 AlphaFold2 discerns the underlying physics capable of differentiating decoy structures from native
51 structures, thereby effectively ranking candidate complex structures.

52 Other works utilize AF2 outputs directly as inputs for their models. Akdel [29] demonstrated that
53 the AF2-predicted structure could serve as the input for many popular structure-based predictors of
54 protein thermostability, such as FoldX and DynaMut2 [15, 30], achieving results comparable to those
55 obtained with crystal structures. Additionally, Lyu [31] showed that AlphaFold2 structures could be
56 used as inputs for docking programs in small molecule drug discovery. Although Buel [32] showed
57 that AlphaFold2 cannot predict key mutational effects in many cases, McBride [33] demonstrated that
58 with appropriately chosen metrics, such as effective strain in their study, AlphaFold2 can accurately
59 predict the effects of mutations on the intrinsic properties of single proteins, using three experimental
60 datasets: fluorescence, folding, and catalysis.

61 These works have explored the utility of AlphaFold in many research areas, but none of them have
62 studied the usefulness of AlphaFold in predicting the binding energy and the mutational effects of
63 mutations on protein-protein interactions.

64 3 Benchmark setups

65 A commonly used dataset for evaluating methods that predict mutation effects is SKEMPI [34],
66 which manually curates a list of crystallized protein complexes and their mutants with experimentally
67 measured changes in binding affinity, denoted as $\Delta\Delta G$ values, gathered through literature searches.
68 These values are measured using biochemical methods that, while relatively accurate, require con-
69 siderable effort for each mutant’s data. As a result, despite the intensive labor involved, this dataset
70 contains binding data for only 7085 mutations, which is significantly fewer than the total number of
71 crystallized structures, and even less than the number of sequences in the database that enabled the
72 development of AlphaFold. This scarcity of data underscores the value of leveraging information
73 learned from tasks beyond direct protein-protein binding data.

74 3.1 Dataset definition

75 In order to benchmark against a wide range of methods, we utilized the common subset of Test Set 1
76 from SKEMPI as defined in SSIPE [18] and the SKEMPI dataset as employed in DSMBind [20]. The
77 cases where the ranking score predicted by AlphaFold3 is below 0.8 are removed. As a result, our
78 benchmark comprises 475 mutants across 42 unique protein complexes.

79 3.2 Baselines

80 We include a comprehensive set of 17 baseline methods for benchmarking. These can be categorized
81 by their types of approaches.

82 **Protein Language-based Models** ESM2, ESM1v, and ProGen2 [35–37] are prominent protein
83 language models known for their robust zero-shot performance across multiple tasks, including
84 secondary structure prediction, and the classification of benign and pathogenic mutations. Given
85 that these models typically accept only a single sequence as input, we concatenated the sequences of
86 interacting proteins for our analysis.

87 **Force Field and Profile-based Models** Included in our baselines are three popular pure force
88 field-based models: FoldX, FlexddG, and EvoEF [15, 16, 38]; a structure-based profiling baseline,
89 BindProfX [17]; and one hybrid model that combines sequence and structure profiling with force
90 field methods, SSIpe [18]. These models are specifically designed to predict the mutational effects on
91 protein-protein interactions, with SSIpe considered the state-of-the-art model that utilizes the most
92 information available.

93 **Structure-based Deep Learning Models** ProteinMPNN [39] is a model that learns to design
94 sequences corresponding to a given input backbone structure, while DSMBind [20] predicts muta-
95 tional effects by learning to restore a perturbed crystal structure. Both models develop a scoring
96 function that can be used to estimate mutational effects for a given input structure and corresponding
97 sequences.

98 **AlphaFold3, AlphaFold2, and Strain** Protein sequences are submitted directly to the AlphaFold3
99 server in JSON format with the seed set to a fixed arbitrary number, 42, to ensure reproducibility. Five
100 results are downloaded, and the top one is used. For each mutant, the predicted score is calculated by
101 subtracting the ranking score of the wild type from its ranking score. AF2-Multimer v2.3.0 [2] is run
102 locally with default settings, and the ranking score for the top predicted model for each entry is used.
103 As a simple statistical baseline, effective strain, as defined in [33], is computed for each mutant.

104 4 Results

105 4.1 Comparison of binding energy estimation across all baselines

106 The results for each baseline are summarized in Table 1. Pearson and Spearman correlation coeffi-
107 cients are two commonly used metrics for assessing continuous variables. The Area under the ROC
108 Curve (AUC) is a statistic used in binary classification, computed by treating all $\Delta\Delta G$ values below
109 zero as positive and those above zero as negative. The results are sorted according to their Pearson
110 correlation coefficients within each category.

111 Table 1 indicates that protein language models are less effective at predicting the mutational effects
112 on protein-protein interactions. Similarly, AlphaFold2 and Strain show weak correlations with
113 experimentally measured binding affinities. In contrast, the ranking score produced by AlphaFold3
114 exhibits a significant correlation and is comparable to that of the widely-used FoldX method.

115 4.2 AlphaFold3 complements other baselines

116 As demonstrated by SSIpe [18], profile-based and force field-based methods complement each other,
117 producing the most accurate estimators. Similarly, if AlphaFold3 learns a different type of information,
118 it could also complement other models. As shown in Fig 1, a simple ensemble of AlphaFold3’s
119 ranking scores boosts performance across all baselines. The ensemble score is computed by adding
120 the equally weighted ranked scores of two models. Notably, the previous state-of-the-art, SSIpe,
121 which is already a combination of models, also experiences a performance boost. AlphaFold3 learns

Table 1: Comparison of $\Delta\Delta G$ estimation results on our SKEMPI test set using three different metrics.

Category	Method	Pearson	Spearman	AUC
Force Field and Profile-based	SSIPe	0.68	0.62	0.78
	FlexddG	0.62	0.58	0.77
	BindProfX	0.56	0.58	0.74
	EvoEF	0.55	0.51	0.72
	FoldX	0.49	0.54	0.74
Structure-based Deep Learning	DSMBind	0.62	0.53	0.73
	ProteinMPNN	0.51	0.45	0.65
AlphaFold	AF3 ranking_score	0.49	0.51	0.71
	AF3 iptm	0.49	0.50	0.72
	AF3 ptm	0.36	0.33	0.63
	AF3 mean_pae	0.32	0.37	0.64
	AF2 ranking_score	0.21	0.23	0.57
	Effective Strain	0.18	0.31	0.61
	AF2 mean_pae	0.05	0.22	0.54
Protein Language-based	ESM2	0.27	0.35	0.68
	ESM1v	-0.02	0.06	0.52
	ProGen2	-0.09	0.01	0.47

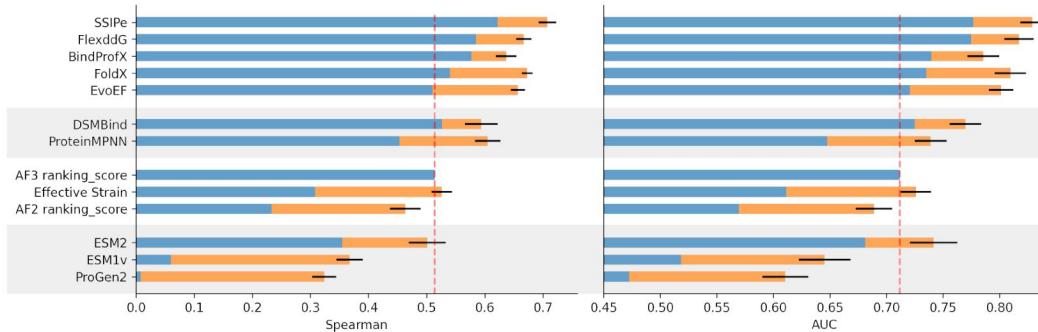


Figure 1: Ensemble with AlphaFold3 boosts performance across all baselines, as evaluated by Spearman correlation, **Left**, and AUC, **Right**, blue is the baseline score, orange is the boost in performance after ensemble with AlphaFold3 score. The dashed line indicates the AlphaFold3 performance.

122 complementary information that is orthogonal to current methods, thereby enhancing the estimation
123 of mutation effects on protein-protein interactions.

124 4.3 AlphaFold3 offers unique information

125 To investigate whether the predictions made by AlphaFold3 are correlated with those of other methods,
126 we computed the pairwise correlation among all methods, as shown on the left of Fig. 2. AlphaFold3
127 exhibits very weak correlations with other models, only showing slight correlation with DSMBind.
128 In contrast, other models, such as FlexddG and SSIPe, correlate with many other methods, indicating
129 that AlphaFold3 learns unique features that are orthogonal to those of other methods. As shown on
130 the right side of Fig. 2, protein language models, AlphaFold2, and strain do not provide additional
131 information beyond what AlphaFold3 provides. Conversely, structure-based deep learning, as well as
132 force field and profile-based methods, enhance the predictions made by AlphaFold3.

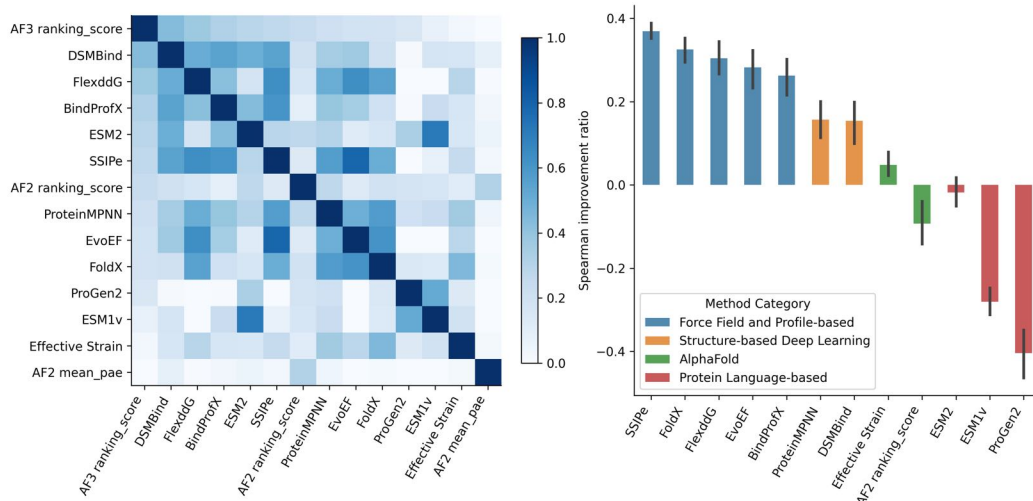


Figure 2: **Left**, correlation between model predictions, sorted by their correlation against AlphaFold3. **Right**, when AlphaFold3 is combined with other models, all methods except protein language models and AlphaFold2 get a significant boost. y axis measures the ratio of improvement relative to the AlphaFold3 baseline, $(r_{m+AF3} - r_{AF3})/r_{AF3}$

5 Discussion

Our results indicate that the performance of protein language models in predicting the mutational effects on binding affinity is relatively weak. This finding aligns with a recent study [40], which demonstrates that language models do not scale effectively with model size in prediction tasks that are less dependent on coevolutionary patterns.

An interesting distinction between AlphaFold3 and traditional all-atom force field methods lies in their sensitivity to protein complex conformations. Traditional force fields are highly sensitive to the exact conformation of the protein complex, whereas AlphaFold3 tends to predict similar scores for identical input sequences. This sensitivity to conformation and the difficulty in thoroughly sampling conformations make force field methods prone to inaccurate estimations of the entropy component of the total Gibbs free energy. In contrast, AlphaFold3, as a generative structure prediction model, is capable of learning a smoother energy landscape that more effectively captures the subtle influences of entropy. Fig 3 illustrates how the integration of AlphaFold3 scores can more accurately determine the global relative free energy, ΔG , compared to relying solely on force field methods, which exhibit a more rugged energy landscape.

6 Conclusion

In this study, we have demonstrated that AlphaFold3 learns unique features beneficial for estimating binding free energy and complements existing models. Looking ahead, a more integrated approach combining folding methods that predict complex structures with inverse-folding models that identify masked residues, along with traditional force field and profile-based models, could significantly revolutionize the field of predicting mutational effects on protein-protein interactions.

References

- [1] Josh Abramson, Jonas Adler, Jack Dunger, Richard Evans, Tim Green, Alexander Pritzel, Olaf Ronneberger, Lindsay Willmore, Andrew J Ballard, Joshua Bambrick, et al. Accurate structure prediction of biomolecular interactions with alphafold 3. *Nature*, pages 1–3, 2024.

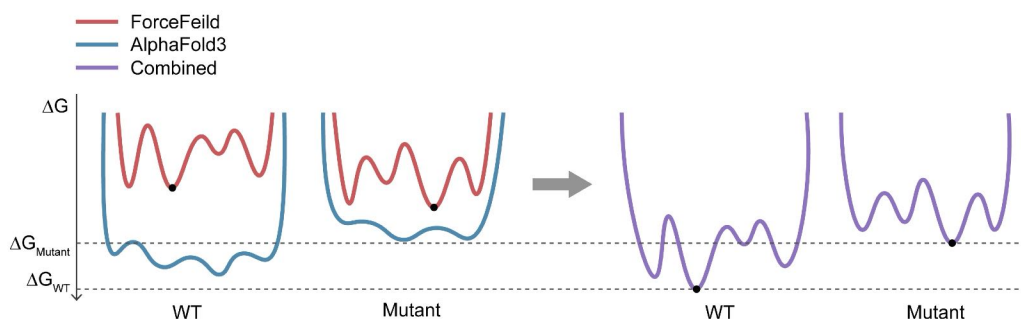


Figure 3: A schematic plot illustrating how the rugged energy landscapes of all-atom force fields (in red) when combined with the globally more accurate energy landscape of AlphaFold3 (in blue), result in a composite energy landscape (in purple) that more closely approximates the ground truth (dashed lines) for estimating ΔG .

- 158 [2] Richard Evans, Michael O'Neill, Alexander Pritzel, Natasha Antropova, Andrew Senior, Tim
159 Green, Augustin Žídek, Russ Bates, Sam Blackwell, Jason Yim, et al. Protein complex
160 prediction with alphafold-multimer. *bioRxiv*, pages 2021–10, 2021.
- 161 [3] John Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ron-
162 neberger, Kathryn Tunyasuvunakool, Russ Bates, Augustin Žídek, Anna Potapenko, et al.
163 Highly accurate protein structure prediction with alphafold. *Nature*, 596(7873):583–589, 2021.
- 164 [4] Minkyung Baek, Frank DiMaio, Ivan Anishchenko, Justas Dauparas, Sergey Ovchinnikov,
165 Gyu Rie Lee, Jue Wang, Qian Cong, Lisa N Kinch, R Dustin Schaeffer, et al. Accurate
166 prediction of protein structures and interactions using a three-track neural network. *Science*,
167 373(6557):871–876, 2021.
- 168 [5] Kolja Stahl, Andrea Graziadei, Therese Dau, Oliver Brock, and Juri Rappsilber. Protein
169 structure prediction with in-cell photo-crosslinking mass spectrometry and deep learning. *Nature*
170 *Biotechnology*, 41(12):1810–1819, 2023.
- 171 [6] David F Burke, Patrick Bryant, Inigo Barrio-Hernandez, Danish Memon, Gabriele Pozzati,
172 Aditi Shenoy, Wensi Zhu, Alistair S Dunham, Pascal Albanese, Andrew Keller, et al. Towards
173 a structurally resolved human protein interaction network. *Nature Structural & Molecular*
174 *Biology*, 30(2):216–225, 2023.
- 175 [7] Marc F Lensink, Guillaume Brysbaert, Nessim Raouraoua, Paul A Bates, Marco Giuliani,
176 Rodrigo V Honorato, Charlotte van Noort, Joao MC Teixeira, Alexandre MJJ Bonvin, Ren
177 Kong, et al. Impact of alphafold on structure prediction of protein complexes: the casp15-capri
178 experiment. *Proteins: Structure, Function, and Bioinformatics*, 91(12):1658–1683, 2023.
- 179 [8] Dima Kozakov, David R Hall, Bing Xia, Kathryn A Porter, Dzmitry Padhorny, Christine Yueh,
180 Dmitri Beglov, and Sandor Vajda. The cluspro web server for protein–protein docking. *Nature*
181 *protocols*, 12(2):255–278, 2017.
- 182 [9] Yumeng Yan, Huanyu Tao, Jiahua He, and Sheng-You Huang. The hdock server for integrated
183 protein–protein docking. *Nature protocols*, 15(5):1829–1852, 2020.
- 184 [10] Brian G Pierce, Kevin Wiehe, Howook Hwang, Bong-Hyun Kim, Thom Vreven, and Zhiping
185 Weng. Zdock server: interactive docking prediction of protein–protein complexes and symmetric
186 multimers. *Bioinformatics*, 30(12):1771–1773, 2014.
- 187 [11] Derek Lowe. Alphafold 3 debuts. [https://www.science.org/content/blog-post/](https://www.science.org/content/blog-post/alphafold-3-debuts)
188 [alphafold-3-debuts](https://www.science.org/content/blog-post/alphafold-3-debuts), 2023. Accessed: 2024-05-15.

- [12] Matthew IJ Raybould, Claire Marks, Alan P Lewis, Jiye Shi, Alexander Bujotzek, Bruck Taddese, and Charlotte M Deane. Thera-sabdab: the therapeutic structural antibody database. *Nucleic acids research*, 48(D1):D383–D388, 2020.
- [13] James Dunbar, Konrad Krawczyk, Jinwoo Leem, Terry Baker, Angelika Fuchs, Guy Georges, Jiye Shi, and Charlotte M Deane. Sabdab: the structural antibody database. *Nucleic acids research*, 42(D1):D1140–D1146, 2014.
- [14] Joost Schymkowitz, Jesper Borg, Francois Stricher, Robby Nys, Frederic Rousseau, and Luis Serrano. The foldx web server: an online force field. *Nucleic acids research*, 33(suppl_2):W382–W388, 2005.
- [15] Javier Delgado, Leandro G Radusky, Damiano Cianferoni, and Luis Serrano. Foldx 5.0: working with rna, small molecules and a new graphical interface. *Bioinformatics*, 35(20):4168–4169, 2019.
- [16] Julia Koehler Leman, Brian D Weitzner, Steven M Lewis, Jared Adolf-Bryfogle, Nawsad Alam, Rebecca F Alford, Melanie Aprahamian, David Baker, Kyle A Barlow, Patrick Barth, et al. Macromolecular modeling and design in rosetta: recent methods and frameworks. *Nature methods*, 17(7):665–680, 2020.
- [17] Peng Xiong, Chengxin Zhang, Wei Zheng, and Yang Zhang. Bindprofx: assessing mutation-induced binding affinity change by protein interface profiles with pseudo-counts. *Journal of molecular biology*, 429(3):426–434, 2017.
- [18] Xiaoqiang Huang, Wei Zheng, Robin Pearce, and Yang Zhang. Ssipe: accurately estimating protein–protein binding affinity change upon mutations using evolutionary profiles in combination with an optimized physical energy function. *Bioinformatics*, 36(8):2429–2437, 2020.
- [19] Anton Bushuiev, Roman Bushuiev, Anatolii Filkin, Petr Kouba, Marketa Gabrielova, Michal Gabriel, Jiri Sedlar, Tomas Pluskal, Jiri Damborsky, Stanislav Mazurenko, et al. Learning to design protein-protein interactions with enhanced generalization. *arXiv preprint arXiv:2310.18515*, 2023.
- [20] Wengong Jin, Xun Chen, Amrita Vetticaden, Siranush Sarzikova, Raktima Raychowdhury, Caroline Uhler, and Nir Hacohen. Dsmbind: Se (3) denoising score matching for unsupervised binding energy prediction and nanobody design. *bioRxiv*, pages 2023–12, 2023.
- [21] Shitong Luo, Yufeng Su, Zuofan Wu, Chenpeng Su, Jian Peng, and Jianzhu Ma. Rotamer density estimator is an unsupervised learner of the effect of mutations on protein-protein interaction. *bioRxiv*, pages 2023–02, 2023.
- [22] Shiwei Liu, Tian Zhu, Milong Ren, Chungong Yu, Dongbo Bu, and Haicang Zhang. Predicting mutational effects on protein-protein binding via a side-chain diffusion probabilistic model. *Advances in Neural Information Processing Systems*, 36, 2024.
- [23] Shuya Li, Fangping Wan, Hantao Shu, Tao Jiang, Dan Zhao, and Jianyang Zeng. Monn: a multi-objective neural network for predicting compound-protein interactions and affinities. *Cell Systems*, 10(4):308–322, 2020.
- [24] Wei Lu, Qifeng Wu, Jixian Zhang, Jiahua Rao, Chengtao Li, and Shuangjia Zheng. Tankbind: Trigonometry-aware neural networks for drug-protein binding structure prediction. *Advances in neural information processing systems*, 35:7236–7249, 2022.
- [25] Wei Lu, Jixian Zhang, Weifeng Huang, Ziqiao Zhang, Xiangyu Jia, Zhenyu Wang, Leilei Shi, Chengtao Li, Peter G Wolynes, and Shuangjia Zheng. Dynamicbind: predicting ligand-specific protein-ligand complex structure with a deep equivariant generative model. *Nature Communications*, 15(1):1071, 2024.

- [26] Amir Motmaen, Justas Dauparas, Minkyung Baek, Mohamad H Abedi, David Baker, and Philip Bradley. Peptide-binding specificity prediction using fine-tuned protein structure prediction networks. *Proceedings of the National Academy of Sciences*, 120(9):e2216697120, 2023.
- [27] Joseph L Watson, David Juergens, Nathaniel R Bennett, Brian L Trippe, Jason Yim, Helen E Eisenach, Woody Ahern, Andrew J Borst, Robert J Ragotte, Lukas F Milles, et al. De novo design of protein structure and function with rfdiffusion. *Nature*, 620(7976):1089–1100, 2023.
- [28] James P Roney and Sergey Ovchinnikov. State-of-the-art estimation of protein model accuracy using alphafold. *Physical Review Letters*, 129(23):238101, 2022.
- [29] Mehmet Akdel, Douglas EV Pires, Eduard Porta Pardo, Jürgen Jänes, Arthur O Zalevsky, Bálint Mészáros, Patrick Bryant, Lydia L Good, Roman A Laskowski, Gabriele Pozzati, et al. A structural biology community assessment of alphafold2 applications. *Nature Structural & Molecular Biology*, 29(11):1056–1067, 2022.
- [30] Carlos HM Rodrigues, Douglas EV Pires, and David B Ascher. Dynamut2: Assessing changes in stability and flexibility upon single and multiple point missense mutations. *Protein Science*, 30(1):60–69, 2021.
- [31] Jiankun Lyu, Nicholas Kapolka, Ryan Gumpfer, Assaf Alon, Liang Wang, Manish K Jain, Ximena Barros-Álvarez, Kensuke Sakamoto, Yoojoong Kim, Jeffrey DiBerto, et al. Alphafold2 structures guide prospective ligand discovery. *Science*, page eadn6354, 2024.
- [32] Gwen R Buel and Kylie J Walters. Can alphafold2 predict the impact of missense mutations on structure? *Nature structural & molecular biology*, 29(1):1–2, 2022.
- [33] John M McBride, Konstantin Plev, Amirbek Abdirasulov, Vladimir Reinharz, Bartosz A Grzybowski, and Tsvi Tlusty. Alphafold2 can predict single-mutation effects. *Physical Review Letters*, 131(21):218401, 2023.
- [34] Justina Jankauskaitė, Brian Jiménez-García, Justas Dapkūnas, Juan Fernández-Recio, and Iain H Moal. Skempi 2.0: an updated benchmark of changes in protein–protein binding energy, kinetics and thermodynamics upon mutation. *Bioinformatics*, 35(3):462–469, 2019.
- [35] Zeming Lin, Halil Akin, Roshan Rao, Brian Hie, Zhongkai Zhu, Wenting Lu, Allan dos Santos Costa, Maryam Fazel-Zarandi, Tom Sercu, Sal Candido, et al. Language models of protein sequences at the scale of evolution enable accurate structure prediction. *BioRxiv*, 2022:500902, 2022.
- [36] Joshua Meier, Roshan Rao, Robert Verkuil, Jason Liu, Tom Sercu, and Alex Rives. Language models enable zero-shot prediction of the effects of mutations on protein function. *Advances in neural information processing systems*, 34:29287–29303, 2021.
- [37] Erik Nijkamp, Jeffrey A Ruffolo, Eli N Weinstein, Nikhil Naik, and Ali Madani. Progen2: exploring the boundaries of protein language models. *Cell systems*, 14(11):968–978, 2023.
- [38] Xiaoqiang Huang, Robin Pearce, and Yang Zhang. Evoef2: accurate and fast energy function for computational protein design. *Bioinformatics*, 36(4):1135–1142, 2020.
- [39] Justas Dauparas, Ivan Anishchenko, Nathaniel Bennett, Hua Bai, Robert J Ragotte, Lukas F Milles, Basile IM Wicky, Alexis Courbet, Rob J de Haas, Neville Bethel, et al. Robust deep learning–based protein sequence design using proteinmpnn. *Science*, 378(6615):49–56, 2022.
- [40] Francesca-Zhoufan Li, Ava P Amini, Yisong Yue, Kevin K Yang, and Alex X Lu. Feature reuse and scaling: Understanding transfer learning with protein language models. *bioRxiv*, pages 2024–02, 2024.