ELIMINATING VAE FOR FAST AND HIGH-RESOLUTION GENERATIVE DETAIL RESTORATION

Anonymous authorsPaper under double-blind review

000

001

002003004

006

008 009

010 011

012

013

014

016

017

018

019

021

024

025

026

027

028

029

031

032033034

037

040

041

042

043

044

046

047

048

051

052

ABSTRACT

Diffusion models have attained remarkable breakthroughs in the real-world superresolution (SR) task, albeit at slow inference and high demand on devices. To accelerate inference, recent works like GenDR adopt step distillation to minimize the step number to one. However, the memory boundary still restricts the maximum processing size, necessitating tile-by-tile restoration of high-resolution images. Through profiling the pipeline, we pinpoint that the variational autoencoder (VAE) is the bottleneck of latency and memory. To completely solve the problem, we leverage pixel-(un)shuffle operations to eliminate the VAE, reversing the latent-based GenDR to pixel-space GenDR-Pix. However, upscale with ×8 pixelshuffle may induce artifacts of repeated patterns. To alleviate the distortion, we propose a multi-stage adversarial distillation to progressively remove the encoder and decoder. Specifically, we utilize generative features from the previous stage models to guide adversarial discrimination. Moreover, we propose random padding to augment generative features and avoid discriminator collapse. We also introduce a masked Fourier space loss to penalize the outliers of amplitude. To improve inference performance, we empirically integrate a padding-based self-ensemble with classifier-free guidance to improve inference scaling. Experimental results show that GenDR-Pix performs 2.8× acceleration and 60% memory-saving compared to GenDR with negligible visual degradation, surpassing other one-step diffusion SR. Against all odds, GenDR-Pix can restore 4K image in only 1 second and 6 GB.

1 Introduction

Super-resolution (SR) is widely exploited to reconstruct missing high-quality (HQ) details from the degraded low-quality (LQ) image for better visual experiences. Existing studies (Dong et al., 2016; Lim et al., 2017; Wang et al., 2022a; Liang et al., 2021; Wang et al., 2024c) have gained a comprehensive understanding of synthesized degradation, *e.g.*, bicubic downscaling. To develop generality and visual quality under real-world scenarios, prevalent researches (Ledig et al., 2017; Zhang et al., 2021; Wang et al., 2024b) exploit generative models to recover structural information and replenish details. Recently, diffusion models have become the new paradigm for text-to-image (Rombach et al., 2022b; Esser et al., 2024) and image-to-image tasks (Brooks et al., 2023; Wang et al., 2024b), bringing a new trend for the SR task. Nevertheless, diffusion-based SR methods struggle with slow inference and intensive memory consumption, restricting their usage in real-world scenes.

To accelerate inference of diffusion SR, recent work (Xie et al., 2024; Wu et al., 2024b; Zhang et al., 2024; Yue et al., 2024a) has discovered one-step diffusion via step distillation to minimize the overhead of diffusion inversion processing. Despite achieving the theoretically lowest complexity, existing one-step diffusion SRs easily exceed the memory upper bound for high-resolution input, requiring to crop into tiles, which is executed in serial and results in an unavoidable increase in elapsed time. Thus, reducing both runtime and memory footprint is of equal importance for practical employment. More recent attempts (Hu et al., 2024; Chen et al., 2025a) explore structural pruning or distillation to simplify or remove complex modules. They have put a lot of effort into simplifying the variational auto-encoder (VAE) since it costs more memory and even longer time in a few-step diffusion inference. However, these trials still execute the reconstruction from latent to pixel, simplifying VAE and intensifying the dilemma between generation and reconstruction, particularly in the SR task. For instance, eliminating the attention of the decoder carries a harmful impact on high-

frequency details, leading to texture loss and sharpness decrease. Hence, the core problem of further slimming diffusion-based SR is to *replace the VAE with simpler fidelity-guaranteed operations*.

We revisit LDM (Rombach et al., 2022a) employing latent space rather than pixel space (Ho et al., 2020), *i.e.*, to reduce training and inference consumption by representing images with smaller features. However, there is a similar operation in the pixel space, *i.e.* pixel-shuffle. Existing SR models (Shi et al., 2016; Wang et al., 2022b) use pixel-shuffle operation to upsample in the last stage, which allows most computations to be performed under the smaller shape. Inspired by Chen et al. (2025a;b) and the similar role between VAE and pixel(un)shuffle, we unveil a new path to lighten the diffusion SR model, which reverses the latent-based diffusion SR to pixel-based by replacing VAE with pixel-unshuffle and pixel-shuffle operation.

Despite its intuitiveness, eliminating VAE faces several problems. Firstly, VAE conducts large-scale representation compression for input images. Nevertheless, the model with the same factor pixelshuffle hardly converges and will cause visual artifacts, such as checkerboard and repeated pattern artifacts. The pixel-space model can barely learn from latent-based generative priors without VAE. To overcome these drawbacks, this work introduces both training and inference innovations.

- To eliminate the VAE without heavy performance drops, we introduce multi-stage adversarial distillation that gradually replaces the encoder and decoder with pixel-unshuffle and pixel-shuffle operations. In the first stage, we remove the encoder by utilizing latent matching and adversarial learning on features extracted by GenDR. In the second stage, we remove the decoder by using the stage-I model as the discriminator. Moreover, we propose random padding (RandPad) augmentation to avoid discriminator collapse and improve diversity by randomly padding SR and HQ images.
- To alleviate artifacts arising from large-scale pixel(un)shuffle, we propose masked Fourier space loss to impose a penalty for anomalous spike amplitudes.
- To improve inference performance, we propose padding-based classifier-free guidance (PadCFG), which empirically integrates the self-ensemble strategy and classifier-free guidance.

Through applying these strategies to remove the VAE of the recent state-of-the-art GenDR (Wang et al., 2025), we obtain an end-to-end model, named GenDR-Pix, which directly restores high-quality images in shuffled pixel space. Compared to the GenDR prototype, GenDR-Pix achieves about $2.8 \times$ acceleration and saves over 60% GPU memory.


2 RELATED WORK

2.1 GENERATIVE IMAGE SUPER-RESOLUTION

Since pioneer works (Lim et al., 2017; Zhang et al., 2018b; Wang et al., 2024c) have exhaustively explored the potential of deep-learning-based methods in the classic SR task with synthesised LQ, prevailing research (Ledig et al., 2017; Cai et al., 2019; Zhang et al., 2021) concentrates on wild images under real-world degradations. To produce real-world-like LQ-HQ image pairs, Real-ESRGAN (Wang et al., 2021) introduced a practicable datapipe that mixed multiple degradations and utilized adversarial learning to boost the model to recover images with more real details. APISR (Wang et al., 2024a) further expanded the degradation types with more image and video compressions. Recently, diffusion models (Rombach et al., 2022a;b; Esser et al., 2024) have surpassed the GAN in both text-to-image and image-to-image tasks. Following the trend, diffusion-based SR models (Wang et al., 2024b; Yu et al., 2024; Ai et al., 2025) proposed using controllable modules, e.g., ControlNet Zhang et al. (2023a), to guide the diffusion model regenerating HQ images according to LQ condition. Then, (Wu et al., 2024b; Zhang et al., 2024; Yue et al., 2024a; Wang et al., 2025) distill the diffusion steps to improve throughout by examining the predicted latent with additional score networks (Wang et al., 2024e; Zhou et al., 2024) or discriminators (Sauer et al., 2024).

2.2 DIFFUSION DISTILLATION

To accelerate the diffusion model, existing distillation approaches reduce steps (Poole et al., 2022; Wang et al., 2024e; Zhou et al., 2024) and simplify the architecture (Kim et al., 2024; Hu et al., 2024; Zhu et al., 2024). DreamFusion (Poole et al., 2022) introduced score distillation sampling (SDS),

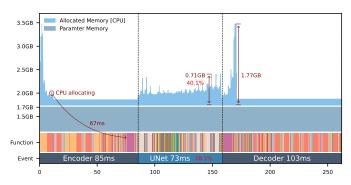

T' 1	D C1' C	C DD '		C 1 0 2 4 2
Figure 1:	Profiling for	(ienl)R wif	h inniif size	of 1074*nx
i iguic i.	1 Tomming Tor	OCHER WIL	ii iiiput size	01 102 i px.

Size	Time	(ms)	Mem (GB)		
Size	UNet	VAE	UNet	VAE	
512 ²	66	46	2.0	2.5	
720^{2}	66	101	2.2	2.8	
1024^{2}	73	191	2.7	3.5	
1440^{2}	187	419	3.0	5.1	
2048^{2}	534	1087	4.1	8.3	
2880^{2}	1710	3228	6.3	14.7	
4096^{2}	6201	OOM	11.1	OOM	

Table 1: Comparison of varied input sizes. The memory is the maximum active memory after allocation for UNet or VAE.

which leverages a pre-trained diffusion model to guide an arbitrary generator producing results satisfying the pre-trained distribution. ProlificDreamer (Wang et al., 2024e) and SiD (Zhou et al., 2024) developed SDS with variational score distillation (VSD) and identity transformation, which further improve stability and robustness. In the SR task, OSEDiff (Wu et al., 2024b) leveraged VSD and GenDR (Wang et al., 2025) developed CiD based on SiD to tailor a one-step SR model. For structural distillation, since disactivating parts of blocks or channels negligibly affects model performance, BK-SDM (Kim et al., 2024) and flux.1-lite-8B (Freepik, 2025) removed intermediate blocks of SD1.5 and FLUX and used feature distilling loss to train lighter version models. Diffusion2GAN (Kang et al., 2024) conducted knowledge distillation from diffusion to GAN via adversarial learning and LatentLPIPS. In the SR task, to lighten one-step diffusion, AdcSR (Chen et al., 2025a) performed knowledge distillation for a channel-pruned model.

3 MOTIVATION: REPLACING VAE WITH PIXEL(UN)SHUFFLE

Efficiency bottleneck. For the one-step diffusion model like GenDR (Wang et al., 2025), the diffusion process is conducted in the latent space, thereby necessitating a VAE to encode or decode latents. As shown in Fig. 1 and Tab. 1, we profiled the whole process with torch.profiler and visualized allocated GPU memory and latencies of different functions. We found that for the one-step model, VAE is the bottleneck for latency and GPU memory, which limits throughput, especially for high-resolution input. In detail, for a 2880^2 px image (*i.e.*, 720×720 LR input for $\times 4$ SR), VAE induces additional growths of $1.82 \times$ and $0.89 \times$ for memory and latency, respectively. In practice, due to VAE and UNet trained under fixed small resolution (*e.g.*, 512×512) and GPU memory boundary, existing diffusion-based SR has to split the input image into multiple tiles, further stalling reasoning speed. To this end, modifying VAE is more profitable than modifying UNet.

Fidelity bottleneck. The existing VAEs conduct lossy compression that loses high-frequency details for input images. Even for the 16-channel VAE, the reconstruction results are far from reliable (Esser et al., 2024; Wang et al., 2025) (*e.g.*, PSNR is below 35 dB). For the SR task that chases pixel-wise fidelity, the VAE is the bottleneck restricting the reconstruction.

Key and problem. Based on the above findings, we pinpoint VAE as the bottleneck for both efficiency and fidelity, but *can we replace VAE with more efficient and loss-free functions? The answer is Yes!* We substitute the encoder with pixel-unshuffle and decoder with pixel-shuffle to reverse the latent-space diffusion processing into pixel-space. Despite intuitionistic, removing VAE faces two tricky problems:

- Pixel(un)shuffle with a large scale factor induces repeated pattern artifacts. Compared to AdcSR (Chen et al., 2025a) merely employing ×2 pixel-unshuffle to replace the encoder, we remove both encoder and decoder with ×8 pixel(un)shuffle to chase the ultimate efficiency in terms of both latency and memory occupancy. However, using pixelshuffle for ×8 upscaling is challenging since one inappropriate value of weight/bias in tail layers results in artifacts for all repeated 8×8 patches.
- Lack of a suitable discriminator for the pixelfuffled feature. Existing works (Chen et al., 2025a; Sauer et al., 2024) utilize pretrained diffusion models (UNet/DiT) as discriminators to adversarially distill the step/architecture by examining the generated latents. However, for pixel-unshuffled






Figure 2: We remove the entire VAE for GenDR for higher efficiency. The bars are model MUSIQ score on RealLQ250. The hatched bar means the modification has not been adopted. The dotted curve shows runtime with 2560×1440 output.

Figure 3: We visualize the effect of our modifications step by step. The left-top corner shows the operation types corresponding to Fig. 2, and the left-down numbers are the operation order. The proposed strategies can effectively remove most artifacts.

images, there exists no proper large model to guide distillation, further increasing the difficulty of reverse latent to pixel space.

Relation to AdcSR. The AdcSR (Chen et al., 2025a) has explored replacing the encoder with $\times 2$ pixel-unshuffle and established an end-to-end $\times 4$ SR model. However, there remain several limitations:

- AdcSR utilizes fixed ×2 pixel-unshuffle to encode images, which enforces the model to generate
 more pixels, limiting its extension in other upscaling factors or low-level tasks. We utilize the ×8
 pixel-(un)shuffle to substitute VAE for flexibility and practicality.
- AdcSR only removes the encoder, while the decoder still costs more memory and latency than UNet. Moreover, removing the decoder results in more performance drops. This work studies the path to eliminating both the encoder and decoder for ideal efficiency.
- Compared to AdcSR with complex pruning and distillation strategies, this work only removes VAE and can achieve a comparable or even higher acceleration ratio.

4 Methodology

To overcome the above-mentioned issues, we propose a multi-stage adversarial distillation to fundamentally train a robust VAE-free model and a padding-based classifier-free guidance for stable inference in pixel space. In practice, we remove the VAE of GenDR to reverse the SR task to pixel space to propose **GenDR-Pix**. In Figs. 2 and 3, we present the roadmap from latent-based GenDR to pixel-based GenDR-Pix, which eliminates the entire VAE with slight performance drops.

4.1 MULTI-STAGE ADVERSARIAL DISTILLATION

To remove VAE and avoid repeated pattern artifacts, we propose multi-stage adversarial distillation schema. In Fig. 4, we exhibit an overview procedure for eliminating VAE. In Appendix A.1, we provide the detailed algorithm of the training schema.

Stage I: Remove encoder. We first replace the encoder with $\times 8$ pixel-shuffle layer and utilize UNet from GenDR as the feature extractor of the discriminator. Given input image \mathbf{x}_{10} , the teacher latents

Figure 4: Illustration of training processes of **GenDR-Pix**. In Stage I, we replace the encoder with $\times 8$ pixel-unshuffle and utilize half of the teacher (gray) to generate discriminative features, and blue blocks are trainable. In Stage II, we further remove the decoder with pixel-shuffle and utilize the Stage I model (blue), and the purple blocks are trainable.

 \mathbf{z}_{tea} , HQ latents \mathbf{z}_{hq} , and discriminator \mathcal{D} , the overall training target for generator $\mathbf{z}_{stu} = \mathcal{G}_1(\mathbf{x}_{lq})$ is:

$$\mathcal{L}_{\mathcal{G}_{1}} = ||\mathbf{z}_{tea} - \mathbf{z}_{stu}||_{1} + \lambda_{1} \cdot softplus(-\mathcal{D}(\mathbf{z}_{stu})),$$

$$\mathcal{L}_{\mathcal{D}} = softplus(-\mathcal{D}(\mathbf{z}_{ho})) + softplus(\mathcal{D}(\mathbf{z}_{stu})).$$
(1)

In this stage, we obtain GenDR-Adc that maps low-quality pixels directly to high-quality latents.

Stage II: Remove decoder. Based on GenDR-Adc, we further replace the decoder with a pixel-shuffle layer. In practice, we find that using the Eq. (1) encounters severe performance drops due to the appearance of repeated pattern artifacts and the inappropriate latent-based discriminator.

To investigate and alleviate artifacts, we visualize several typical examples in Fig. 5. Specifically, we observe that the patterns are in the same repeated mode among all images with 8×8 patches. Moreover, we exhibit frequency-domain results where highlight points appear periodically, aligning with the pixel-shuffle scale. Thus, we identify that the distortion is caused by upscale, similar to artifacts raised by 2×2 embedding in FluxSR (Li et al., 2025). As the frequency characteristic of the artifacts is certain, we introduce a masked Fourier space (MFS) loss based on a band-rejection filter. In detail, given the SR/HQ image y_{stu} and y_{tea} , we first calcu-

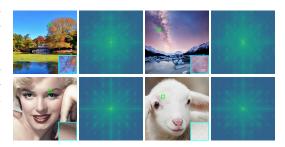


Figure 5: Illustration of artifacts in reconstructed image and their magnitude spectrum. (Zoom in for best view.)

late their amplitudes $|\mathcal{F}\{y\}_{u,v}|$ through FFT transformation. Then, we can compute the loss via the following formulation:

$$\mathcal{L}_{\mathcal{F}} = ||\mathcal{M} \cdot (|\mathcal{F}\{\mathbf{y}_{\text{stu}}\}_{\mathbf{u}, \mathbf{v}}| - |\mathcal{F}\{\mathbf{y}_{\text{tea}}\}_{\mathbf{u}, \mathbf{v}}|)||_{1}, \tag{2}$$

where \mathcal{M} is the mask inistialized from zero and satisfies $\mathcal{M}[:,i-s:i+s]=1$ and $\mathcal{M}[j-s:j+s,:]=1$ where $i\in\{0,\lfloor h/8\rfloor,\ldots,h\}$ and $j\in\{0,\lfloor w/8\rfloor,\ldots,w\}$, 2s is band width.

As to the discriminator, we utilize the first-stage generator \mathcal{G}_1 to evaluate the generated shuffled image since \mathcal{G}_1 natively uses pixel-unshuffle to encode inputs. Despite \mathcal{G}_1 being qualified for representation, as shown in Fig. 3, the detail generation still suffers performance degradation since the discriminator focuses on the discrete distribution embedded by a fixed pixel-unshuffle mode, which is susceptible to adversarial perturbations and easily induces model collapse. Inspired by E-LPIPS (Kettunen et al., 2019), we introduce random padding (RandPad) augmentation strategy to help the discriminator extract continuous representations for shuffled SR and HQ images. In detail, we randomly sample $p_h, p_w \in \{0, 1, \cdots, 7\}$ and execute padding for \mathbf{y}_{stu} and \mathbf{y}_{hq} before sending them to discriminator:

$$randpad(\mathbf{y}) = pad(\mathbf{y}, [p_h, 8 - p_h, p_w, 8 - p_w]), \tag{3}$$

where $[p_h, 8 - p_h, p_w, 8 - p_w]$ are padding element numbers for left, right, top, and bottom sides.

Following previous work in pixel space (Kang et al., 2023; 2024), we add perceptual loss $\mathcal{L}_{\mathcal{P}}$ (Ding et al., 2020) to improve subjective fidelity. Given the input \mathbf{x}_{lq} , the teacher images \mathbf{y}_{tea} , the high-quality images \mathbf{y}_{hq} , we can optimize $\mathbf{y}_{stu} = \mathcal{G}_2(\mathbf{x}_{lq})$ by:

$$\begin{split} \mathcal{L}_{\mathcal{G}_2} &= ||\mathbf{y}_{\text{tea}} - \mathbf{y}_{\text{stu}}||_1 + \lambda_1 \cdot \text{softplus}(-\mathcal{G}_1(\mathbf{y}_{\text{stu}})) + \lambda_2 \mathcal{L}_{\mathcal{P}} + \lambda_3 \mathcal{L}_{\mathcal{F}}, \\ \mathcal{L}_{\mathcal{G}_1} &= \text{softplus}(-\mathcal{G}_1(\text{randpad}(\mathbf{y}_{\text{hq}}))) + \text{softplus}(\mathcal{G}_1(\text{randpad}(\mathbf{y}_{\text{stu}}))). \end{split}$$
 (4)

In this stage, we reverse \mathcal{G}_2 in pixel space, which directly generates high-quality pixels.

4.2 PADDING CLASSIFIER-FREE GUIDANCE

To enable classifier-free (CFG) guidance in pixel space as well as erasing artifacts, we propose a padding-based classifier-free guidance (PadCFG) via incorporating self-ensemble and CFG strategies. Following Ho & Salimans (2022), we formulate the CFG prediction of GenDR-Pix \mathcal{G}_2 as:

$$\mathbf{y} = \omega \times \mathcal{G}_2(\mathbf{x}, \mathbf{c}_{pos}) + (1 - \omega) \times \mathcal{G}_2(\mathbf{x}, \mathbf{c}_{neg}), \tag{5}$$

where ω denotes the guidance scale. \mathbf{c}_{pos} and \mathbf{c}_{neg} are positive and negative condition, respectively. Since $\mathcal{G}_2(\mathbf{x})$ is a shuffled image, directly employing CFG in the pixel space will exacerbate artifacts, as shown in Fig. 3. A simple but effective solution is the self-ensemble strategy that combines restoration results from multiple augmented inputs, *e.g.*, rotation and flipping. Hence, we implement a self-ensemble by fusing results with various padding steps. Given the *n* pairs padding setting $\{p_{h,i}, p_{w,i}\}$, the final ensembles result $\bar{\mathbf{y}}$ is calculated by:

$$\bar{\mathbf{y}} = \frac{1}{n} \sum_{i=1}^{n} \mathcal{G}_2(\text{pad}(\mathbf{x}, [p_{h,i}, 8 - p_{h,i}, p_{w,i}, 8 - p_{w,i}]))[p_{h,i} : h + p_{h,i}, p_{w,i} : w + p_{w,i}], \quad (6)$$

While effective in reducing artifacts, self-ensemble increases the inference batches and induces perceptual performance drops. To solve the problem, we empirically integrate Eqs. (5) and (6) by:

$$\bar{\mathbf{y}} = \omega \times \mathcal{G}_2(\operatorname{pad}(\mathbf{x}, [4, 4, 4, 4]), \mathbf{c}_{\operatorname{pos}}) + (1 - \omega) \times \mathcal{G}_2(\operatorname{pad}(\mathbf{x}, [3, 5, 3, 5]), \mathbf{c}_{\operatorname{neg}}). \tag{7}$$

To further improve visual quality in the inference phase, we try to enlarge the processing size and use an extra post-fixing module consisting of several convolution layers. More details and results can be found in Appendix A.1.

5 EXPERIMENTS

5.1 EXPERIMENTAL SETUP

Datasets. Following Wang et al. (2025), we adopt LSDIR (Li et al., 2023), FFHQ (Karras et al., 2019), DiffusionDB (Wang et al., 2022c), and select high-quality data from Laion (Schuhmann et al., 2022) to construct training set. To generate HQ-LQ image pairs, we use the Real-ESRGAN (Wang et al., 2021) and APISR (Wang et al., 2024a) degradation pipelines. We randomly crop 512×512 LQ/HQ images with dynamic scaling factor. During testing phase, we employ ImageNet-Test (Yue et al., 2024b), RealSR (Cai et al., 2019), RealSet80 (Yue et al., 2024b), and RealLR250 (Ai et al., 2025) to evaluate the effectiveness of the proposed GenDR-Pix under synthesised and real-world degradations.

Metrics. Following existing work (Wang et al., 2025; Yue et al., 2024a), we leverage several full-reference and non-reference IQA metrics to evaluate restoration quality, including PSNR, SSIM (Wang et al., 2004), LPIPS (Zhang et al., 2018a), NIQE (Mittal et al., 2012), LIQE (Zhang et al., 2023b), CLIPIQA (Wang et al., 2023), MUSIQ (Ke et al., 2021), Q-Align (Quality) (Wu et al., 2024a), and DeQA (You et al., 2025).

Implementation details. GenDR-Pix is based on GenDR (Wang et al., 2025), which employs SD2.1 UNet (Rombach et al., 2022b) and vae-kl-f8-d16 ¹. To eliminate VAE, we reinitialized the 16-channel head and tail convolutions of GenDR with 192-channel ones in stages I and II, respectively. For the discriminator, we used frozen GenDR and GenDR-Adc as the feature extractor module and extra learnable MLP heads as LADD (Sauer et al., 2024). During the training procedure, we use the default

¹https://huggingface.co/ostris/vae-kl-f8-d16

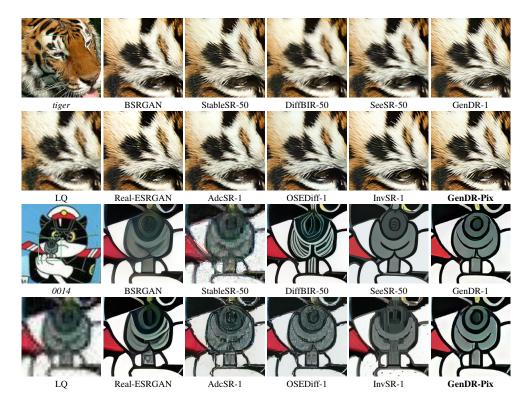


Figure 6: Visual comparison of GenDR-Pix with other methods for ×4 task on RealSet80 dataset.

AdamW (Loshchilov & Hutter, 2018) optimizer and a constant learning rate $1e^{-5}$ under BFloat16 precision. The loss hyperparameters $\lambda_{1,2,3}$ are 0.05, 1, 0.1, respectively. The batch and patch sizes are 512 and 512×512. All models are trained on 8 NVIDIA A100 GPUs and the PyTorch (Paszke et al., 2019) framework with the help of deepspeed ZeRO2 (Rajbhandari et al., 2020). During the inference phase, we set PadCFG 1.8 for better restoration quality.

5.2 Comparision with State-of-the-Arts

To examine the restoration and inference performance of the proposed GenDR-Pix, we compare it with multiple models, including 1) **GAN**: BSRGAN (Zhang et al., 2021), Real-ESRGAN (Wang et al., 2021), and RealESRHAT (Chen et al., 2023); 2) **one-step diffusion**: SinSR (Wang et al., 2024d), OSEDiff (Wu et al., 2024b), InvSR (Yue et al., 2024a), AdcSR (Chen et al., 2025a), and GenDR (Wang et al., 2025); 3) **multi-step diffusion**: StableSR (Wang et al., 2024b), DiffBIR (Luo et al., 2023), SeeSR (Wu et al., 2024c), and DreamClear (Ai et al., 2025).

Quantitative comparison. In Tabs. 2 and 3, we compare the proposed GenDR-Pix with existing SOTA methods in terms of both restoration quality and inference performance. Generally, GenDR is the fastest model among all methods, even surpassing GAN-based models. Compared to OSEDiff and SeeSR, GenDR-Pix gains acceleration of 3.2× and 198.7×, respectively. Moreover, GenDR-Pix stands as the runner-up for both FR-IQA and NR-IQA metrics. In detail, GenDR-Pix advances OSEDiff by 0.6dB (PSNR) and 0.04 (CLIPIQA) on ImageNet-Test. Compared to the original GenDR, GenDR-Pix improves the PSNR/SSIM by a large margin while slightly decreasing perceptual quality. On RealSet80 benchmark, GenDR-Pix exhibits competitive performance with OSEDiff and InvSR. In Appendix A.2.2, we extend more results on real-world image datasets, including **4K benchmark**.

Qualitative comparison. In Fig. 6, we depict the visual comparison of GenDR against other approaches. GenDR-Pix obtains comparable results to GenDR and surpasses other approaches. Specifically, our model faithfully restores the tiger hair with more delicacy. For image 0014, GenDR-Pix removes the heavy compression artifact and maintains the semantical structure.

Table 2: Quantitative comparison (average Parameters, MACs, and IQA metrics) on ImageNet-Test. The sampling step number is marked in the format of "Method name-Steps" for diffusion-based methods. The efficiency metrics are calculated with 512×512 input on NVIDIA A100 GPUs. The best results for all methods are highlighted in **bold** and <u>underlined</u>, while the best *one-step* diffusion methods are reported in <u>red</u> and <u>blue</u>.

Methods	#Params↓	#MACs↓				Metrics			
Methods	πι ai aiiis↓	#IVIACS	PSNR↑	SSIM↑	LPIPS↓	NIQE↓	CLIPIQA↑	MUSIQ↑	Q-Align↑
BSRGAN	16.70M	293G	27.05	0.7453	0.2437	4.5345	0.5703	67.72	3.6057
Real-ESRGAN	16.70M	293G	26.62	0.7523	0.2303	4.4909	0.5090	64.81	3.4230
Real-HATGAN	20.77M	417G	27.15	0.7690	0.2044	4.7834	0.4594	63.43	3.3244
StableSR-50	1410M	79940G	26.00	0.7317	0.2327	4.9378	0.5768	64.54	3.4378
DiffBIR-50	1717M	24234G	25.45	0.6651	0.2876	4.9289	0.7486	73.04	4.3228
SeeSR-50	2524M	65857G	25.73	0.7072	0.2467	4.3530	0.6981	72.25	4.2412
*DreamClear-50	2212M	-	24.76	0.6672	0.2463	5.3787	0.7646	70.08	4.0919
SinSR-1	119M	2649	26.98	0.7308	0.2288	5.2506	0.6607	67.70	3.8090
OSEDiff-1	1775M	2265G	24.82	0.7017	0.2431	4.2786	0.6778	71.74	4.0674
AdcSR-1	456M	496G	25.07	0.6982	0.2432	4.1947	0.7055	72.21	4.1382
InvSR-1	1298M	1820G	23.81	0.6777	0.2547	4.3935	0.7114	72.38	3.9867
GenDR-1	933M	1637G	24.14	0.6878	0.2652	4.1336	0.7395	74.68	4.3612
GenDR-Pix	866M	344G/744G	25.49	0.7286	0.2252	4.1892	0.7168	72.85	4.2082

^{*:} inference using 3 A100 GPU to run an image.

Table 3: Quantitative comparison (average Inference time and IQA metrics) on RealSet80.

Methods	#Runtime↓ -				Metrics			
Methods	#Kulltilliet -	NIQE↓	PI↓	LIQE↑	CLIPIQA↑	MUSIQ↑	Q-Align↑	DeQA↑
BSRGAN	36ms	4.4428	4.0276	3.8449	0.6262	66.63	4.1207	3.8825
Real-ESRGAN	36ms	4.1517	3.8843	3.7392	0.6190	64.49	4.1696	3.8906
Real-HATGAN	116ms	4.4705	3.8843	3.4927	0.5502	63.21	4.1077	3.8444
StableSR-50	3731ms	3.3999	3.0314	3.8516	0.7399	67.58	4.0870	3.8787
DiffBIR-50	6213ms	5.1389	3.9544	4.0472	0.7404	68.72	4.3206	4.0668
SeeSR-50	6359ms	4.3749	3.7454	4.2797	0.7124	69.74	4.3056	4.0728
*DreamClear-50	6892ms	<u>3.7257</u>	<u>3.4157</u>	3.9628	0.7242	67.22	4.1206	3.9429
SinSR-1	120ms	5.6103	4.2697	3.5957	0.6634	63.79	4.0954	3.9713
OSEDiff-1	103ms	3.9763	3.6894	4.1298	0.7037	69.19	4.3057	4.0916
AdcSR-1	33ms	4.0005	3.5688	4.2313	0.7079	69.73	4.2298	4.0530
InvSR-1	115ms	4.0266	3.4524	4.2906	0.7271	69.79	4.3014	4.0045
GenDR-Pix	32ms	4.1010	3.6709	4.3078	0.7190	69.92	4.2891	<u>4.0747</u>




Figure 7: User studies on image quality.

User study. We conducted a user study to evaluate our model's restoration quality. Users were asked to select the higher-quality image from two images, one restored by GenDR-Pix and the other restored by AdcSR, OSED-iff, or GenDR. As shown in Fig. 7, our model received comparable votes as the original GenDR and OSEDiff, and led AdcSR by quarter, demonstrating the effectiveness of the proposed distillation strategy to preserve the ability to produce high-quality images.

5.3 ABLATION STUDIES

Effect of removing VAE. In Tab. 6, we compare the original GenDR (Wang et al., 2025), GenDR-Adc (Chen et al., 2025a) (Removing Encoder), and GenDR-Pix (Removing VAE) in terms of both quality and runtime performance. Compared to the GenDR baseline, the proposed GenDR-Pix maintains the restoration quality but saves approximately 65% time, 61% GPU memory, and 55% computations. Moreover, if we allow for a slight performance drop, the runtime for 4K image can be reduced to less than 1 second by disabling CFG. The Fig. 9 shows the visual comparison in which GenDR-Pix can maintain detail and sharpness as the baseline. We also provide extended performance comparison in Fig. 8, where GenDR-Pix remarkably improves the throughput and lowers the maximum memory employment. Moreover, GenDR is the only model supporting SR to 8K, dispensing with the cropping strategy. The results demonstrate the effectiveness of removing VAE to improve efficiency.

Table 6: Quantitative comparison between GenDR, GenDR-Adc, and GenDR-Pix on RealLR250. The inference performances are tested with 4K (3840×2160) output on A100 GPU, except for #MACs tested with 512×512 output. " \star " represents model without PadCFG strategy.

Model	VAE	#Runtime	#Memory	#MACs	#Params	MUSIQ	CLIPIQA
GenDR	VAE	4.92s	20.75GB	1637G	933M	70.96	0.6891
GenDR-Adc	Remove Encoder	2.69s (-45.3%)	17.75GB (-14.5%)	1097G (-33.0%)	894M	70.44	0.6714
GenDR-Pix	Remove VAE	1.75s (-64.5%)	8.01GB (-61.4%)	744G (-54.6%)	866M	70.23	0.6843
GenDR-Pix*	Remove VAE	0.87s (-82.3%)	5.03GB (-75.8%)	344G (-78.9%)	866M	68.64	0.6615

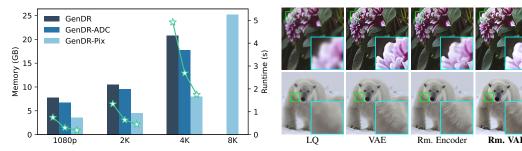


Figure 8: Performance evaluation (1080p to 8K). Figure 9: Visual comparison of varied VAE set.

Method	Fomulation	#Runtime	LPIPS	MUSIQ	CLIPIQA
w/o CFG	p	0.87s	0.2391	58.23	0.4924
CFG	$\omega \times \mathbf{p} + (1 - \omega) \times \mathbf{n}$	1.73s	0.2425	58.67	0.5005
CFG + Ensemble	$\frac{1}{n} \sum \left[\omega \times \mathbf{p}_{(p_h, p_w)} + (1 - \omega) \times \mathbf{n}_{(p_h, p_w)} \right]$	3.54s	0.2273	56.31	0.4800
PadCFG	$\omega \times \mathbf{p}_{(4,4)} + (1-\omega) \times \mathbf{n}_{(1,1)}$	1.75s	0.2575	58.13	0.5119
PadCFG	$\omega \times \mathbf{p}_{(4,4)} + (1-\omega) \times \mathbf{n}_{(2,2)}$	1.75s	0.2474	58.85	0.5161
PadCFG	$\omega \times \mathbf{p}_{(4,4)} + (1-\omega) \times \mathbf{n}_{(3,3)}$	1.75s	0.2413	59.12	0.5066

Table 7: Ablation study of PadCFG with varied pad settings. $\{\mathbf{p}, \mathbf{n}\}$ represents results with positive and negative prompts and the subscripts (p_h, p_w) are padding hyparameters for each side.

Effect of Multi-Stage Adversarial Distillation. Since training GenDR-Pix within one stage is unavailable and AdcSR has discussed similar results of Stage I, we conduct ablation studies for Stage II.

In detail, we validate the effectiveness of discriminator, RandPad augmentation, and MFS loss. We first examine the discriminator in Tab. 4, in which the disablement of adversarial learning degrades the perceptual quality by 0.12 and 0.0533 in MUSIQ and CLIPIQA. Compared to our schema using GenDR-Adc for adversarial feature, directly using GenDR will induce 2.20 (MUSIQ) and 0.0307 (CLIPIQA) drops. Employing RandPand improves CLIPIQA by 0.0191 and decreases NIQE by 0.17. Tab. 5 discusses the impact of MFC loss, where omitting frequency loss leads to huge performance drops among all IQA metrics.

Table 4: Ablation study on discriminator.

Discriminator	RandPad	NIQE	MUSIQ	CLIPIQA
w/o Dis.	-	4.8343	60.95	0.4924
GenDR	-	6.0660	61.07	0.5457
GenDR-Adc	X	4.8380	63.87	0.5764
GenDR-Adc	✓	4.6648	63.89	0.5937

Table 5: Ablation study on MFC Loss.

	NIQE	LIQE	MIOSIQ	CLIPIQA
w/o Freq loss 4	.8380	2.9055	63.87	0.5764
MFC loss 4	.1121	3.2062	65.77	0.5700

Effect of PadCFG. To evaluate PadCFG, we compare several variants and different settings in Tab. 7, disabling other optimizations for fairness. The proposed Eq. (7) maintains latency and fidelity as vanilla CFG but advances 0.45 and 0.0061 in MUSIQ and CLIPIQ, achieving better trade-offs between fidelity and perceptual quality. We also validate the guidance scales in Appendix A.2.1.

6 Conclusion

This work introduces a guideline to remove the entire VAE for diffusion-based SR. In detail, we replace the encoder and decoder with $\times 8$ pixel-unshuffle and pixel-shuffle, respectively. To alleviate the artifacts brought by pixel(un)shuffle, we introduce a multi-stage adversarial distillation for training and PadCFG for inference. Based on GenDR and proposed strategies, we obtain GenDR-Pix, which accelerates by $2.8\times$ and saves 60% GPU memory with negligible quality degradation.

REFERENCES

- Yuang Ai, Xiaoqiang Zhou, Huaibo Huang, Xiaotian Han, Zhengyu Chen, Quanzeng You, and Hongxia Yang. Dreamclear: High-capacity real-world image restoration with privacy-safe dataset curation. *NeurIPS*, 37:55443–55469, 2025. 2, 6, 7
- Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 18392–18402, 2023. 1
- Jianrui Cai, Hui Zeng, Hongwei Yong, Zisheng Cao, and Lei Zhang. Toward real-world single image super-resolution: A new benchmark and a new model. In *ICCV*, pp. 3086–3095, 2019. 2, 6, 15
- Bin Chen, Gehui Li, Rongyuan Wu, Xindong Zhang, Jie Chen, Jian Zhang, and Lei Zhang. Adversarial diffusion compression for real-world image super-resolution. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2025a. 1, 2, 3, 4, 7, 8, 16
- Junyang Chen, Jinshan Pan, and Jiangxin Dong. Faithdiff: Unleashing diffusion priors for faithful image super-resolution. *arXiv preprint arXiv:2411.18824*, 2024. 16
- Shoufa Chen, Chongjian Ge, Shilong Zhang, Peize Sun, and Ping Luo. Pixelflow: Pixel-space generative models with flow. *arXiv* preprint arXiv:2504.07963, 2025b. 2
- Xiangyu Chen, Xintao Wang, Jiantao Zhou, Yu Qiao, and Chao Dong. Activating more pixels in image super-resolution transformer. In *CVPR*, pp. 22367–22377, June 2023. 7
- Keyan Ding, Kede Ma, Shiqi Wang, and Eero P Simoncelli. Image quality assessment: Unifying structure and texture similarity. *IEEE transactions on pattern analysis and machine intelligence*, 44(5):2567–2581, 2020. 6, 14
- Chao Dong, Chen Change Loy, and Xiaoou Tang. Accelerating the super-resolution convolutional neural network. In Bastian Leibe, Jiri Matas, Nicu Sebe, and Max Welling (eds.), *ECCV*, volume 9906, pp. 391–407, 2016. 1
- Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *ICML*, 2024. 1, 2, 3
- Freepik. flux.1-lite-8b, 2025. URL https://huggingface.co/Freepik/flux.1-lite-8B.3
- Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022. 6
- Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. *Advances in neural information processing systems*, 33:6840–6851, 2020. 2
- Dongting Hu, Jierun Chen, Xijie Huang, Huseyin Coskun, Arpit Sahni, Aarush Gupta, Anujraaj Goyal, Dishani Lahiri, Rajesh Singh, Yerlan Idelbayev, et al. Snapgen: Taming high-resolution text-to-image models for mobile devices with efficient architectures and training. *arXiv* preprint *arXiv*:2412.09619, 2024. 1, 2
- Minguk Kang, Jun-Yan Zhu, Richard Zhang, Jaesik Park, Eli Shechtman, Sylvain Paris, and Taesung Park. Scaling up gans for text-to-image synthesis. In *CVPR*, pp. 10124–10134, 2023. 6
- Minguk Kang, Richard Zhang, Connelly Barnes, Sylvain Paris, Suha Kwak, Jaesik Park, Eli Shechtman, Jun-Yan Zhu, and Taesung Park. Distilling diffusion models into conditional gans. In *European Conference on Computer Vision*, pp. 428–447. Springer, 2024. 3, 6
- Tero Karras, Samuli Laine, and Timo Aila. A style-based generator architecture for generative adversarial networks. In *CVPR*, pp. 4401–4410, 2019. 6
 - Junjie Ke, Qifei Wang, Yilin Wang, Peyman Milanfar, and Feng Yang. Musiq: Multi-scale image quality transformer. In *CVPR*, pp. 5148–5157, 2021. 6

- Markus Kettunen, Erik Härkönen, and Jaakko Lehtinen. E-lpips: robust perceptual image similarity via random transformation ensembles. *arXiv preprint arXiv:1906.03973*, 2019. 5
 - Bo-Kyeong Kim, Hyoung-Kyu Song, Thibault Castells, and Shinkook Choi. Bk-sdm: A lightweight, fast, and cheap version of stable diffusion. In *European Conference on Computer Vision*, pp. 381–399. Springer, 2024. 2, 3
 - Christian Ledig, Lucas Theis, Ferenc Huszár, Jose Caballero, Andrew Cunningham, Alejandro Acosta, Andrew Aitken, Alykhan Tejani, Johannes Totz, Zehan Wang, et al. Photo-realistic single image super-resolution using a generative adversarial network. In *CVPR*, pp. 4681–4690, 2017. 1, 2
 - Jianze Li, Jiezhang Cao, Yong Guo, Wenbo Li, and Yulun Zhang. One diffusion step to real-world super-resolution via flow trajectory distillation. *arXiv preprint arXiv:2502.01993*, 2025. 5
 - Yawei Li, Kai Zhang, Jingyun Liang, Jiezhang Cao, Ce Liu, Rui Gong, Yulun Zhang, Hao Tang, Yun Liu, Denis Demandolx, et al. Lsdir: A large scale dataset for image restoration. In *CVPRW*, pp. 1775–1787, 2023. 6
 - Jingyun Liang, Jiezhang Cao, Guolei Sun, Kai Zhang, Luc Van Gool, and Radu Timofte. Swinir: Image restoration using swin transformer. In *ICCVW*, pp. 1833–1844, 2021. 1
 - Bee Lim, Sanghyun Son, Heewon Kim, Seungjun Nah, and Kyoung Mu Lee. Enhanced deep residual networks for single image super-resolution. In *CVPRW*, pp. 1132–1140, 2017. 1, 2
 - Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. In ICLR, 2018. 7
 - Weijian Luo, Tianyang Hu, Shifeng Zhang, Jiacheng Sun, Zhenguo Li, and Zhihua Zhang. Diffinstruct: A universal approach for transferring knowledge from pre-trained diffusion models. *NeurIPS*, 36:76525–76546, 2023. 7
 - Anish Mittal, Rajiv Soundararajan, and Alan C Bovik. Making a "completely blind" image quality analyzer. *IEEE Sign. Process. Letters*, 20(3):209–212, 2012. 6
 - Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, et al. Pytorch: An imperative style, high-performance deep learning library. In *NeurIPS*, pp. 8024–8035, Vancouver, Canada, 2019. 7
 - Ben Poole, Ajay Jain, Jonathan T Barron, and Ben Mildenhall. Dreamfusion: Text-to-3d using 2d diffusion. *arXiv preprint arXiv:2209.14988*, 2022. 2
 - Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. Zero: Memory optimizations toward training trillion parameter models. In *SC20: International Conference for High Performance Computing, Networking, Storage and Analysis*, pp. 1–16. IEEE, 2020. 7
 - Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 10684–10695, 2022a. 2
 - Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *CVPR*, pp. 10684–10695, 2022b. 1, 2, 6
 - Axel Sauer, Frederic Boesel, Tim Dockhorn, Andreas Blattmann, Patrick Esser, and Robin Rombach. Fast high-resolution image synthesis with latent adversarial diffusion distillation. In *SIGGRAPH Asia*, pp. 1–11, 2024. 2, 3, 6
 - Christoph Schuhmann, Romain Beaumont, Richard Vencu, Cade Gordon, Ross Wightman, Mehdi Cherti, Theo Coombes, Aarush Katta, Clayton Mullis, Mitchell Wortsman, et al. Laion-5b: An open large-scale dataset for training next generation image-text models. *NeurIPS*, 35:25278–25294, 2022. 6

- Wenzhe Shi, Jose Caballero, Ferenc Huszár, Johannes Totz, Andrew P Aitken, Rob Bishop, Daniel
 Rueckert, and Zehan Wang. Real-time single image and video super-resolution using an efficient
 sub-pixel convolutional neural network. In *Proceedings of the IEEE conference on computer vision* and pattern recognition, pp. 1874–1883, 2016. 2
 - Boyang Wang, Fengyu Yang, Xihang Yu, Chao Zhang, and Hanbin Zhao. Apisr: anime production inspired real-world anime super-resolution. In *CVPR*, pp. 25574–25584, 2024a. 2, 6
 - Jianyi Wang, Kelvin CK Chan, and Chen Change Loy. Exploring clip for assessing the look and feel of images. In *AAAI*, volume 37, pp. 2555–2563, 2023. 6
 - Jianyi Wang, Zongsheng Yue, Shangchen Zhou, Kelvin CK Chan, and Chen Change Loy. Exploiting diffusion prior for real-world image super-resolution. *IJCV*, 132(12):5929–5949, 2024b. 1, 2, 7
 - Xintao Wang, Liangbin Xie, Chao Dong, and Ying Shan. Real-esrgan: Training real-world blind super-resolution with pure synthetic data. In *CVPR*, pp. 1905–1914, 2021. 2, 6, 7
 - Yan Wang, Yusen Li, Gang Wang, and Xiaoguang Liu. Multi-scale attention network for single image super-resolution. *arXiv preprint arXiv:2209.14145*, 2022a. 1
 - Yan Wang, Tongtong Su, Yusen Li, Jiuwen Cao, Gang Wang, and Xiaoguang Liu. Ddistill-sr: Reparameterized dynamic distillation network for lightweight image super-resolution. *IEEE Transactions on Multimedia*, 2022b. 2
 - Yan Wang, Yi Liu, Shijie Zhao, Junlin Li, and Li Zhang. Camixersr: Only details need more "attention". In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 25837–25846, 2024c. 1, 2
 - Yan Wang, Shijie Zhao, Kai Chen, Kexin Zhang, Junlin Li, and Li Zhang. Gendr: Lightning generative detail restorator. *arXiv preprint arXiv:2503.06790*, 2025. 2, 3, 6, 7, 8, 16
 - Yufei Wang, Wenhan Yang, Xinyuan Chen, Yaohui Wang, Lanqing Guo, Lap-Pui Chau, Ziwei Liu, Yu Qiao, Alex C Kot, and Bihan Wen. Sinsr: diffusion-based image super-resolution in a single step. In *CVPR*, pp. 25796–25805, 2024d. 7
 - Zhengyi Wang, Cheng Lu, Yikai Wang, Fan Bao, Chongxuan Li, Hang Su, and Jun Zhu. Prolificdreamer: High-fidelity and diverse text-to-3d generation with variational score distillation. *NeurIPS*, 36, 2024e. 2, 3
 - Zhou Wang, Alan C. Bovik, Hamid R. Sheikh, and Eero P. Simoncelli. Image quality assessment: from error visibility to structural similarity. *IEEE TIP*, 13(4):600–612, 2004. 6
 - Zijie J Wang, Evan Montoya, David Munechika, Haoyang Yang, Benjamin Hoover, and Duen Horng Chau. Diffusiondb: A large-scale prompt gallery dataset for text-to-image generative models. *arXiv* preprint arXiv:2210.14896, 2022c. 6
 - Haoning Wu, Zicheng Zhang, Weixia Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Yixuan Gao, Annan Wang, Erli Zhang, Wenxiu Sun, et al. Q-align: teaching lmms for visual scoring via discrete text-defined levels. In *ICML*, pp. 54015–54029, 2024a. 6
 - Rongyuan Wu, Lingchen Sun, Zhiyuan Ma, and Lei Zhang. One-step effective diffusion network for real-world image super-resolution. *NeurIPS*, 2024b. 1, 2, 3, 7
 - Rongyuan Wu, Tao Yang, Lingchen Sun, Zhengqiang Zhang, Shuai Li, and Lei Zhang. Seesr: Towards semantics-aware real-world image super-resolution. In *CVPR*, pp. 25456–25467, 2024c. 7
 - Rui Xie, Chen Zhao, Kai Zhang, Zhenyu Zhang, Jun Zhou, Jian Yang, and Ying Tai. Addsr: Accelerating diffusion-based blind super-resolution with adversarial diffusion distillation. *arXiv* preprint arXiv:2404.01717, 2024. 1
 - Zhiyuan You, Xin Cai, Jinjin Gu, Tianfan Xue, and Chao Dong. Teaching large language models to regress accurate image quality scores using score distribution. *arXiv preprint arXiv:2501.11561*, 2025. 6

- Fanghua Yu, Jinjin Gu, Zheyuan Li, Jinfan Hu, Xiangtao Kong, Xintao Wang, Jingwen He, Yu Qiao, and Chao Dong. Scaling up to excellence: Practicing model scaling for photo-realistic image restoration in the wild. In *CVPR*, pp. 25669–25680, 2024. 2
- Zongsheng Yue, Kang Liao, and Chen Change Loy. Arbitrary-steps image super-resolution via diffusion inversion. *arXiv* preprint arXiv:2412.09013, 2024a. 1, 2, 6, 7
- Zongsheng Yue, Jianyi Wang, and Chen Change Loy. Resshift: Efficient diffusion model for image super-resolution by residual shifting. *NeurIPS*, 36, 2024b. 6
- Aiping Zhang, Zongsheng Yue, Renjing Pei, Wenqi Ren, and Xiaochun Cao. Degradation-guided one-step image super-resolution with diffusion priors. *arXiv preprint arXiv:2409.17058*, 2024. 1, 2
- Kai Zhang, Jingyun Liang, Luc Van Gool, and Radu Timofte. Designing a practical degradation model for deep blind image super-resolution. In *ICCV*, pp. 4791–4800, 2021. 1, 2, 7, 16
- Lymin Zhang, Anyi Rao, and Maneesh Agrawala. Adding conditional control to text-to-image diffusion models. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 3836–3847, 2023a. 2
- Richard Zhang, Phillip Isola, Alexei A Efros, Eli Shechtman, and Oliver Wang. The unreasonable effectiveness of deep features as a perceptual metric. In *CVPR*, pp. 586–595, 2018a. 6
- Weixia Zhang, Guangtao Zhai, Ying Wei, Xiaokang Yang, and Kede Ma. Blind image quality assessment via vision-language correspondence: A multitask learning perspective. In *CVPR*, pp. 14071–14081, 2023b. 6
- Yulun Zhang, Kunpeng Li, Kai Li, Lichen Wang, Bineng Zhong, and Yun Fu. Image super-resolution using very deep residual channel attention networks. In *ECCV*, volume 11211, pp. 294–310, 2018b. 2
- Mingyuan Zhou, Huangjie Zheng, Zhendong Wang, Mingzhang Yin, and Hai Huang. Score identity distillation: Exponentially fast distillation of pretrained diffusion models for one-step generation. In *ICML*, 2024. 2, 3
- Yuanzhi Zhu, Xingchao Liu, and Qiang Liu. Slimflow: Training smaller one-step diffusion models with rectified flow. In European Conference on Computer Vision, pp. 342–359. Springer, 2024.

A APPENDIX

A.1 ALOGRORITHM DETAILS

Overall scheme. In Algorithm 1, we summarize the training schema of the proposed GenDR-Pix. We first remove the encoder and then remove the decoder via adversarial learning. The $\mathcal{L}_{\mathcal{F}}$ is calculated according to Eq. (2), and we utilize DISTS (Ding et al., 2020) as $\mathcal{L}_{\mathcal{P}}$ to estimate the perceptual similarity between the reference teacher results and student results.

Algorithm 1: Training Scheme of GenDR-Pix

Hyper-patameters: $\lambda_1 = 0.05, \lambda_2 = 1, \lambda_3 = 0.1, t = 499$

> Stage I: Remove Encoder

Input: Pretrained GenDR network \mathcal{G}_{μ} , GenDR-Adc \mathcal{G}_{θ} , discriminative head h_{ϕ} **Initialization** $\theta \leftarrow \mu$, initialize ϕ **repeat**

Sample HR and LR image pairs $(\mathbf{x}_h, \mathbf{x}_l)$ and prompt c from batch \mathcal{B} ; calculate the latent \mathbf{z}_h and \mathbf{z}_l ; let $\mathbf{z}_g = \mathcal{G}_{\theta}(\mathbf{x}_l; t, c)$ and reference model generate $\mathbf{z}_r = \mathcal{G}_{\mu}(\mathbf{z}_l; t, c)$; then calculate adversarial features $\mathbf{d}_g = \mathcal{G}_{\mu}(\mathbf{z}_g; t, c)$ and $\mathbf{d}_h = \mathcal{G}_{\mu}(\mathbf{z}_h; t, c)$; sg $[\cdot]$ and sp $[\cdot]$ are stop gradient and softplus operations Update ϕ with $\phi = \phi - \eta \nabla_{\phi} \mathcal{L}_{\phi}$, where

$$\mathcal{L}_{\phi} = \operatorname{sp}[-h_{\phi}(\operatorname{sg}[\mathbf{d}_h])] + \operatorname{sp}[h_{\phi}(\operatorname{sg}[\mathbf{d}_g])]$$

Update \mathcal{G}_{θ}^1 with $\theta = \theta - \eta \nabla_{\theta} \mathcal{L}_{\theta}$, where

$$\mathcal{L}_{\theta} = ||\mathbf{z}_r - \mathbf{z}_g||_1 + \lambda_1 \cdot \operatorname{sp}[-h_{\operatorname{sg}[\phi]}(\mathbf{z}_g)]$$

until achieving convergence or processing 20M image

Output: \mathcal{G}_{θ}

> Stage II: Remove Decoder

Input: Pretrained GenDR network \mathcal{G}_{μ} , GenDR-Adc \mathcal{G}_{θ} , GenDR-Pix \mathcal{G}_{ψ} , discriminative head h_{ϕ} Initialization $\psi \leftarrow \theta$, initialize ϕ repeat

Sample HR and LR image pairs $(\mathbf{x}_h, \mathbf{x}_l)$, and prompt c from batch \mathcal{B} ; calculate the latent \mathbf{z}_l ; let $\mathbf{x}_g = \mathcal{G}_{\psi}(\mathbf{x}_l; t, c)$ and reference model generate $\mathbf{z}_r = \mathcal{G}_{\mu}(\mathbf{z}_l; t, c)$; decode \mathbf{z}_r to image \mathbf{x}_r , then calculate adversarial features $\mathbf{d}_g = \mathcal{G}_{\theta}(\mathbf{x}_g; t, c)$ and $\mathbf{d}_h = \mathcal{G}_{\theta}(\mathbf{x}_h; t, c)$; RandPad augument $\hat{\mathbf{d}}_h$ and $\hat{\mathbf{d}}_g$ Update ϕ with $\phi = \phi - \eta \nabla_{\phi} \mathcal{L}_{\phi}$, where

$$\mathcal{L}_{\phi} = \operatorname{sp}[-h_{\phi}(\operatorname{sg}[\hat{\mathbf{d}}_h])] + \operatorname{sp}[h_{\phi}(\operatorname{sg}[\hat{\mathbf{d}}_g])]$$

Update \mathcal{G}_{ψ} with $\psi = \psi - \eta \nabla_{\psi} \mathcal{L}_{\psi}$, where

$$\mathcal{L}_{\psi} = ||\mathbf{x}_r - \mathbf{x}_q||_1 + \lambda_1 \cdot \text{sp}[-h_{\text{sq}[\phi]}(\mathbf{x}_q)] + \lambda_2 \mathcal{L}_{\mathcal{P}}(\mathbf{x}_r, \mathbf{x}_q) + \lambda_3 \mathcal{L}_{\mathcal{F}}(\mathbf{x}_r, \mathbf{x}_q)$$

until achieving convergence or processing 20M image

Output: \mathcal{G}_{ψ}

RandPad. As we also employ RandPad to augment the discriminative features, we provide its pseudocode in Fig. 10. The padding dimensions pad_h and pad_w are randomly chosen. We use the 'reflect' mode to perform padding on input images to avoid boundary misalignment of image_neg and image_pos.

PadCFG. In Fig. 11, we present the pseudocode of PadCFG. Based on Eq. (7), we implement the PadCFG in the same manner as the vanilla CFG, yet we introduce extra padding operations before concatenation. Since the computational complexity of the padding operation is almost negligible, our method can earn a "free lunch" for qualitative improvement.

FixMod. We realize a simple post-fix module (FixMod) to avoid the aberration and further reduce the influence of artifacts. Precisely, we construct it by combining the wavelet color fix and a small pretrained UNet. We also conduct jointly training of FixMod and GenDR-Pix to improve robustness and generality.

Figure 10: Pseudocode for RandPad.

```
image_neg = pad(image, (4, 4, 4, 4), mode='reflect')
image_pos = pad(image, (3, 5, 3, 5), mode='reflect')

image_input = concat([image_neg, image_pos], dim=0)

# encode with pixel-unshuffle
latents = pixelunshuffle(image_input, 8)

pred = unet(latents, t, prompt)
pred_neg, pred_pos = pred.chunk(2, dim=0)

# PadCFG
latents = pred_neg + guidence_scale*(pred_pos - pred_neg)

# encode with pixel-shuffle
image_output = pixelshuffle(latents, 8)[:,:,4:-4,4:-4]
```

Figure 11: Pseudocode for PadCFG.

A.2 ADDITIONAL RESULTS FOR GENDR-PIX

A.2.1 ABLATION STUDIES

Effects of guidance scale. Similar to vanilla CFG, the proposed PadCFG can balance the detail diversity and fidelity of generated samples by adjusting the guidance scale. In Fig. 13, we test varied guidance scales from 1.0 to 2.0 and compute PSNR and MUSIQ. Specifically, as PadCFG guidance increases, PSNR decreases while MUSIQ (perceptual quality) improves, indicating an inverse relationship where higher guidance enhances perceptual quality (as measured by MUSIQ) at the cost of PSNR reduction. In Fig. 12, we compare visual results under different guidance scales. Increasing the guidance scale leads to enhanced sharpness and more intricate details.

Effects of FixMod. In Tab. 8, we conduct an ablation study on the effects of FixMod. Overall, FixMod significantly improves perceptual scores by 3.15 and 0.0097 on MUSIQ and CLIP-IQA, respectively, outperforming processed images at larger resolutions. Additionally, FixMod is a lightweight module, introducing only 0.02 seconds of latency increase, as demonstrated in

Table 8: Ablation study on FixMod.

Method	Color Fix	ARNIQA	MUSIQ	CLIPIQA
Baseline	-	0.6700	67.13	0.6013
Large Res.	-	0.6854	69.81	0.6843
FixMod	Х	0.6935	70.23	0.6975
FixMod	✓	0.7033	70.28	0.7010

Fig. 2. In Fig. 14, we visualize the results of varied post-processing configurations. Notably, while post-processing introduces metrics improvement, it provides no additional details but alleviates certain artifacts in the outputs.

A.2.2 QUANTITATIVE RESULTS

In Tab. 9, we present additional results for RealSR (Cai et al., 2019). Specifically, GenDR-Pix achieves higher SSIM and LPIPS values than any other one-step diffusion method, benefiting from

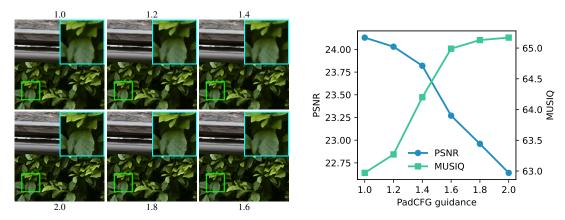


Figure 12: Visual comparison of varied PacCFG guidance scales on "Nikon_005_LR4" from RealSR.

Figure 13: Ablation study on guidance scale.



Figure 14: Visual comparison between baseline, larger resolution processing, and FixMod.

lossless pixelshuffle and pixelunshuffle operations. Regarding NR-IQA, GenDR-Pix achieves a score of 4.18, surpassing OSEDiff by 0.1150. Specifically, GenDR-Pix can compete with some multi-step diffusion models like DiffBIR by accelerating by 194.2×.

Moreover, we examine GenDR-Pix with the real-world SR for 4K images on RealDeg (Chen et al., 2024) benchmarks. Since most methods need to process 4K SR with a tiling strategy, which is extremely slow, we only include GenDR as a representative latent-based method during testing. Tab. 10 presents the efficiency and restoration comparison of proposed GenDR-Pix with BSRGAN (Zhang et al., 2021), AdcSR (Chen et al., 2025a), and GenDR (Wang et al., 2025). Specifically, only BSR-GAN and GenDR-Pix can process 4K images without failure and tile strategy. In general, GenDR-Pix is slightly behind GenDR but surpasses the other method by a large margin.

Notably, we observe that the performance gap between GenDR and GenDR-Pix slightly widens, which may be attributed to the overlap introduced by the tiling strategy. For efficiency performance, compared to AdcSR and GenDR, GenDR-Pix performs $4.29\times$ and $12.99\times$ acceleration, respectively. Compared to BSRGAN and AdcSR, GenDR saves 49.1% and 64.8% memory consumption.

A.2.3 QUALITATIVE RESULTS

In Fig. 15, we depict the visual comparison of GenDR against other approaches. GenDR-Pix obtains comparable results to GenDR and surpasses other approaches. Specifically, GenDR-Pix faithfully restores the plate number "BJI4 CUE" and grille. For *flower2*, our method presents more meticulous details for the stamen, despite suffering sequela of repeated patterns.

Table 9: Quantitative comparison (average Parameters, Inference time, and IQA metrics) on RealSR.

Methods	#Runtime↓ -				Metrics			
Methods	#Kulltille -	PSNR↑	SSIM↑	LPIPS↓	NIQE↓	CLIPIQA↑	MUSIQ↑	Q-Align†
BSRGAN	36ms	26.51	0.7746	0.2685	4.6501	0.5439	63.59	3.8277
Real-ESRGAN	36ms	25.85	0.7734	0.2729	4.6788	0.4901	59.69	3.9185
Real-HATGAN	116ms	26.22	0.7894	0.2409	5.1189	0.4336	58.41	3.8353
StableSR-50	3731ms	24.52	0.6733	0.3658	3.4665	0.6897	66.87	3.9862
DiffBIR-50	6213ms	26.28	0.7251	0.3187	5.8009	0.6743	64.28	3.9182
SeeSR-50	6359ms	26.19	0.7555	0.2809	4.5366	0.6826	66.31	3.9862
*DreamClear-50	6892ms	24.14	0.6963	0.3155	3.9661	0.6730	63.74	3.9705
SinSR-1	120ms	25.99	0.7072	0.4022	6.2412	0.6670	59.22	3.8800
OSEDiff-1	103ms	24.57	0.7202	0.3036	4.3408	0.6829	67.30	4.0664
AdcSR-1	33ms	25.69	0.7362	0.2825	4.1846	0.6695	67.47	4.0772
InvSR-1	115ms	24.50	0.7262	0.2872	4.2218	0.6919	<u>67.47</u>	4.2085
GenDR-1	77ms	23.18	0.7135	0.2859	4.1588	0.7014	68.36	4.2388
GenDR-Pix	32ms	25.03	0.7513	0.2702	4.0751	0.6816	66.29	4.1815

^{*:} inference using 3 A100 GPU to run an image.

Table 10: Quantitative comparison (average Parameters, Inference time, and IQA metrics) on Social Media subset from RealDeg. The runtime and memory are measured on RealDeg with an A100 GPU.

Methods	Status	#Runtime↓	#Memory↓			Metrics		
Methods		#IVICIIIOI y \	NIQE↓	LIQE↑	ARNIQA↑	MANIQA↑	CLIPIQA↑	
BSRGAN	Pass	2.10s	29.65GB	4.1816	2.9022	0.5847	0.3649	0.5787
AdcSR-1	Partial	15.37s	42.91GB	4.0064	3.4083	0.6304	0.4001	0.6523
GenDR-1	Pass	46.51s	8.47GB	3.6740	3.8478	0.6968	0.4199	0.6968
GenDR-Pix	Pass	3.58s	15.10GB	3.5701	3.7172	0.6612	0.4092	0.6570

^{*:} inference using tiling strategy for an image.

A.3 LIMITATIONS

Our method removes the entire VAE of a one-step diffusion-based SR model to chase the best efficiency. In situations of the multiple-step model, while the MFS loss and RandPad still work, the encoder and decoder are inapplicable to be removed through multiple stages.

Another limitation lies in the native unet in SD2.1, which executes most computations under lossy downsampled resolution, ignoring the local high-frequency structure. This may intensify the repeated artifacts. In future work, we will consider structure adaptation based on both UNet and DiT.

This paper is an explorative work to replace VAE with pixel (un)shuffle in the real-world SR task. However, considering our methods being theoretically competent in other low-level tasks, we believe there would be more following work to simplify the diffusion model by removing VAE.

B THE USE OF LARGE LANGUAGE MODELS (LLMS)

We use Large Language Models in this research project to assist with various aspects of the writing and research process, including text polishing and refinement, and grammar enhancement.

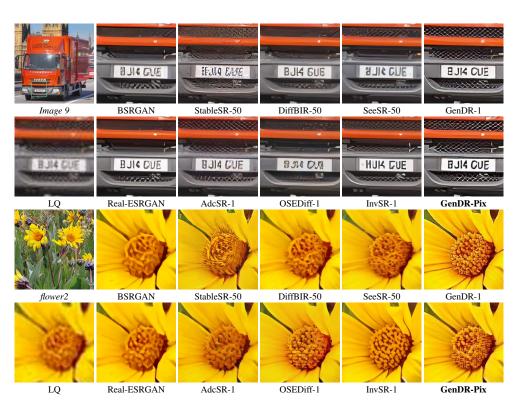


Figure 15: Visual comparison of GenDR-Pix with other methods for ×4 task on RealSet80 dataset.