

# Stacking Diverse Architectures to Improve Machine Translation

Anonymous authors

Paper under double-blind review

## Abstract

Repeated applications of the same neural block primarily based on self-attention characterize the current state-of-the-art in neural architectures for machine translation. In such architectures the decoder adopts a masked version of the same encoding block. Although simple this strategy doesn't encode the various inductive biases such as locality that arise from alternative architectures and that are central to the modelling of translation. We propose Lasagna, an encoder-decoder model that aims to combine the inductive benefits of different architectures by layering multiple instances of different blocks. Lasagna's encoder first grows the representation from local to mid-sized using convolutional blocks and only then applies a pair of final self-attention blocks. Lasagna's decoder uses only convolutional blocks that attend to the encoder representation. On a large suit of machine translation tasks, we find that Lasagna not only matches or outperforms the Transformer baseline, but it does so more efficiently thanks to widespread use of the efficient convolutional blocks. These findings suggest that the widespread use of uniform architectures may be suboptimal in certain scenarios and exploiting the diversity of inductive architectural biases can lead to substantial gains.

## 1 Introduction

Transformers (Vaswani et al., 2017) have become the standard architecture for most natural language tasks and improvements attributed to architectural modifications to the vanilla Transformer do not often generalize across tasks and implementations (Narang et al., 2021). The key component of Transformers is self-attention which is regarded as a useful inductive bias that aggregates a global context through pair-wise interactions between the elements in the sequence. While recent work on architectures (Tolstikhin et al., 2021; Wu et al., 2019; Liu et al., 2021; Tay et al., 2021) is questioning the necessity of self-attention, in general such architectures need to be combined in some way with self-attention to close the ensuing quality gap with the Transformer (Liu et al., 2021; Tay et al., 2021). Both the vanilla Transformer and these alternatives are made of repeated applications of the same layer block, such that all layers have the same structure and self-attention appears as a sub-component in each layer.

From a computational standpoint, operations simpler than self-attention lead to a better computational efficiency while from a theoretical point of view one wishes to better understand why self-attention is often necessary to achieve SOTA results in these language tasks. We propose however an additional motivation to study the effects of simpler operations on language tasks. Different layers can offer different, but complementary inductive biases that can prove useful. For example, convolutions provide a strong bias for local contexts around each element of the sequence, which improves performance in tasks such as speech recognition (Gulati et al., 2020), text summarization (Aksenov et al., 2020) and character-level machine translation (Kalchbrenner et al., 2016). From a historical perspective, locality is one of the main motivations for n-gram language models and of early neural probabilistic language models (Bengio et al., 2003). Additional evidence comes from modern language models that have access to global context but often default to primarily using the local one (Khandelwal et al., 2018).

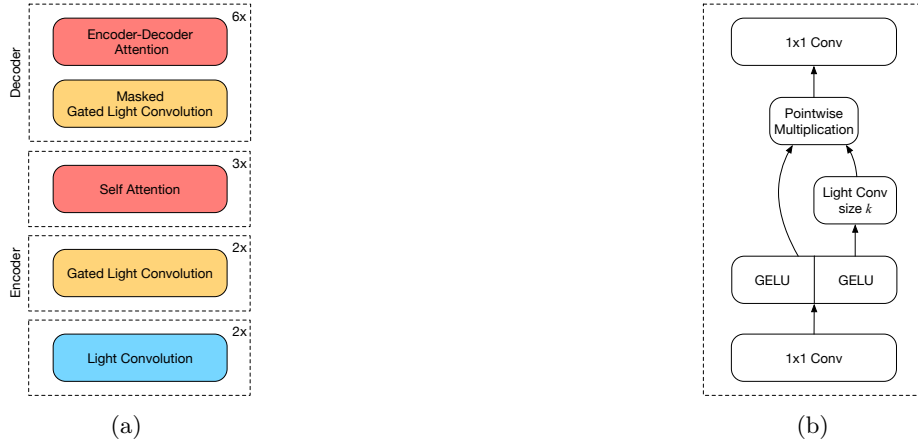


Figure 1: (a) Lasagna architecture that stacks diverse architectures to capture multiple inductive biases. (b) Diagram of the Gated Light Convolution layer used in Lasagna.

We propose to combine complementary inductive biases into a heterogeneous architecture, called Lasagna, to efficiently improve the performance of machine translation models. The architecture is heterogenous in that it does not repeat the same layer block multiple times like prior approaches, but stacks different layers onto each other capturing the respective inductive biases. We analyse the inductive biases of various layers based on two dimensions: the degree of interaction between the elements in the sequence, on the one hand, and the size of the context, on the other. Based on this categorization we propose a new layer block, the Gated Light Convolution. Light Convolutions (LConv), Gated Light Convolutions (GLConv) and Self-Attention (SA) are the three main building blocks of Lasagna and they are stacked on top of each other in sequence. We conjecture that early layers might prefer to focus on a local context whereas later layers might prefer a global one. This suggests stacking layers according to a local-to-global pattern starting with convolutions and ending with self-attention. The sequential stacking of the different blocks in Lasagna allows the model to achieve greater efficiency than homogeneous approaches that channel different operations in parallel within the same block and repeat the block multiple times (Liu et al., 2021; Tay et al., 2021; So et al., 2019).

We design and apply Lasagna to machine translation and we see that it outperforms the Transformer on both translation quality and inference speed. We achieve improved results in three different task settings that involve, respectively, autoregressive left-to-right generation, non-autoregressive parallel generation, and the intermediate setting that uses a parallel deep encoder and a left-to-right, but shallow decoder (Kasai et al., 2021). Our results show that Lasagna improves translation quality by up to +0.9 BLEU points depending on language pair and setting, while maintaining an inference speed that is, respectively, up to +30%, up to +40% and up to +60% higher than the baseline Transformer. Ablation studies give additional insight on the contributions of each part of Lasagna.

## 2 Related work

We summarize related work in different fields. In computer vision, the Mixer architecture (Tolstikhin et al., 2021) proposes an alternative simpler architecture to the SA used in Vision Transformers (Dosovitskiy et al., 2021). Similarly, the more recent gMLP architecture (Liu et al., 2021) outperforms the Mixer on image classification and uses fewer parameters. In machine translation, there have been various attempts at reducing or removing SA. Average Attention Networks (AANs) (Zhang et al., 2018) increase inference speed, while incurring a small drop in translation performance, by replacing the SA in the decoder with an averaging mechanism. This is in line with the findings of (Domhan, 2018) that show that SA is less important in the decoder than in the encoder. Light and dynamic Convolutions (Wu et al., 2019) replace the SA in the encoder and the decoder with separable convolutions. While both outperform AANs on inference speed, light convolutions can incur a significant drop in translation quality and in some cases dynamic convolutions are shown to outperform the Transformer. Approaches that channel SA with other operations within the same



Figure 2: BLEU scores on (EnDe) at model size Big as a function of the number of Light Convolution and Gate Light Convolution layers. Encoder on the left and Decoder on the right. For the Encoder the complement to 7 gives the number of Self-Attention Layers, e.g. 2 for the dashed green line. The variance of scores is 0.1.

blocks include (Tay et al., 2021) that proposes a general family of models, called the Synthetizers, that use “synthetic” attention matrices. However (Tay et al., 2021) finds that for machine translation Synthetizers require channel-level combining with SA to close the gap with the Transformer. (Liu et al., 2021) also studies gMLPs on natural language tasks. They consider encoder-only models and do not study generative tasks. While on pre-training perplexity gMLPs match the Transformer, on downstream tasks combining gMLPs with a “tiny” Self-Attention module in the same layer is necessary to close the gap with the Transformer. Enhancing the Transformer by running SA-layers in parallel with convolutional ones has been explored in automated speech recognition (Gulati et al., 2020), machine translation and language modeling (So et al., 2019) and computer vision (Li et al., 2021). Note that we do not run convolutions and SA in parallel in each block, but instead replace SA-layers with simpler and more local operations and stack the operations sequentially. The hybrid strategy of running convolutional layers instead of the MLP layers directly in the SA blocks (Lei et al., 2018) proved not to be competitive in our experiments (see Appendix F). Our work is thus closer to the Sandwich Transformer (Press et al., 2020) that reorders the operations in the Transformer resulting in a non homogeneous stacking strategy. The (Press et al., 2020) uses only SA as a sequence operation and does not improve over the Transformer baseline on machine translation. Finally, hybrid architectures with RNN-decoders and Transformer Encoders were considered in (Chen et al., 2018); moreover (Chen et al., 2018) considered also hybrid Encoders combining RNNs and SA either at channel level or in subsequent layers.

### 3 Model Description

While several operations have been proposed to replace SA, a more thorough categorization of the features of these operations is missing. For example, (Tay et al., 2021) introduces a framework that relies heavily on the notion of self-alignments and thus does not cover operations such as gMLPs (Liu et al., 2021) or light and dynamic Convolutions (Wu et al., 2019). Similarly, (Domhan, 2018) introduces a language to describe models, layers and sequence operations, but treats each sequence operation as a black-box without trying to compare different operations in terms of interaction order, locality or computational complexity. On the other hand, (Liu et al., 2021) suggests that gMLPs have interaction order 2 looking at their polynomial expansion. We start from this observation and look at a sequence operation from two different angles:

1. When building the new representation of a time step, how many interactions appear in the calculation?  
For example SA requires combining together a query, a key and a value, resulting in an interaction of

Layer	Degree	Local
Attention	3	No
Mixer	1	No
Light Convolution	1	Yes
Dynamic Convolution	2	Yes
Random Synthetizer	1	No
Dense Synthetizer	2	No
gMLP	2	No

Table 1: Classification of sequence operations by degree and locality.

order 3. LConv directly averages the time steps via a convolution, so the interaction order is 1. We will make this idea more precise in the next subsection.

2. What is the size of the sequential context that can be used to build the new representation for a given time step? For example in LConv this range is related to the size of the kernel, whereas in SA it is naturally global over the whole sequence.

### 3.1 Interaction degree

The interaction degree of a layer is the degree of the polynomial obtained by replacing its non-linearities with the identity function. Let us consider some concrete examples starting with the Multi-Head Attention (Vaswani et al., 2017). The input here is a triplet  $(q, k, v)$  of embedded sequences. We use the superscript  $h$  to denote the head, and the subscripts  $t$  and  $c$  to index, respectively, the location in the sequence and the specific channel. The operation is then defined as:

$$\text{Attn}(q, k, v)_{t,c}^h = \sum_{\sigma} \text{softmax} \left( \sum_{\alpha} q_{t,\alpha}^h k_{\sigma,\alpha}^h \right) v_{\sigma,c}^h$$

If we replace the softmax with the identity we obtain a linear combination of the monomials  $q_{t,\alpha}^h k_{\sigma,\alpha}^h v_{\sigma,c}^h$ , leading to the operation having a degree of order 3. Now let us consider LConv (Wu et al., 2019). The input is a single embedded sequence  $z$ . Let  $W_j^h$  denote the convolutional kernel of width  $2k+1$  for the head  $h$ ; then:

$$\text{LConv}(z)_{t,c}^h = \sum_{j=-k}^k W_j^h z_{t+j,c}^h,$$

So we see that the operation LConv has order 1.

### 3.2 Locality

Besides the interaction degree, we can analyze operations in terms of the second criterion, that is the size of the context each operation takes as input. A global operation allows all the time steps to interact, while a local one allows only the time steps within a window of size  $K$  to interact. Self-attention (SA), Mixer and Synthetizer are examples of global operations, while LConv and Dynamic Convolutions are examples of local ones. Besides capturing a local inductive bias, such operations can benefit from a reduction in the number of memory accesses during the computation, which is one of the bottlenecks of modern accelerators (Ma et al., 2018). We summarize our classification of existing layers in Table 1.

### 3.3 Gated Light Convolutions

The gMLP operation stands out as it achieves an interaction degree of 2 with a cheap point-wise product, and without using additional operations that act along the sequence dimension, as it is the case, for example,

in the Dense Synthetizer and the Dynamic Convolutions. The other ingredient of gMLPs is the use of gating through a GELU non-linearity (Hendrycks & Gimpel, 2016). Note that in Table 1 the only degree 2 local operation is the Dynamic Convolution and there is no local analogue for gMLPs. We thus propose to obtain a local version of gMLPs by proposing the Gated Light Convolution (GLConv):

$$\text{GLConv}(z, w)_{t,c}^h = z_{t,c}^h \cdot \text{gelu}(\text{LConv}(w)_{t,c}^h),$$

which is local and has interaction degree 2. Note that while standard gMLPs do not use heads, we partition the channel dimension into heads as in the case of LConv. See Figure 1b for a diagrammatic description of the layer.

### 3.4 Lasagna Architecture

The goal of Lasagna is to stack diverse layers onto each other in order to optimize inductive biases, performance and efficiency. Lasagna’s decoder is made up entirely of GLConv layers. The reasons for this are twofold. First, in both autoregressive (AR) and non-autoregressive (NAR) machine translation, the decoder is called repeatedly and therefore its efficiency has an oversized effect on the model’s overall efficiency. Lasagna’s decoder aims to minimize use of the relatively inefficient SA operation, while using a convolutional operation instead. Previous work (Zhang et al., 2018; Domhan, 2018) also shows that it is possible to simplify the operations in the decoder without hurting overall performance. As a second reason, we found that among the various convolutional variants, GLConv had the highest degree of interaction of 2, while being still relatively cheap to compute with respect to alternatives like Dynamic Convolution.

Lasagna’s encoder is formed by stacking 2 initial LConv blocks, followed by 2 GLConv blocks and then by 3 SA blocks. Besides the efficiency of the convolutional blocks, the encoder also captures a crucial local-to-global inductive bias, whereby the initial layers build up representations for short sequences of tokens in the input sentence and the final SA layers create a fully global representation of the sentence. See Figure 1a for a diagram. In initial experiments we found the local-to-global scheme to perform better than an inverse global-to-local scheme. The Encoder-Decoder attention is still used as in the standard Transformer architecture by letting each decoder layer attend to the last encoder layer (Vaswani et al., 2017). We also experiment with two versions of Lasagna that have more layers in the encoder: Lasagna-9 that has 3 layers of each kind and Lasagna-12 that has 4 layers of each kind.

## 4 Experiments

### 4.1 General setup

To obtain a fair comparison between the performance of various architectures we use the same code base, Fairseq (Ott et al., 2019), for benchmarking all models and, after fine-tuning the training hyper-parameters on the baseline Transformer, we keep the hyperparameters fixed for all architectures (Narang et al., 2021). As recommended by (Marie et al., 2021) we reproduce rather than copy results from published work, we report sacreBLEU<sup>1</sup> (Post, 2018) and we do not use adhoc post-processing steps. For each model we select the best checkpoint based on the perplexity on validation data and use 3 training runs with different seeds to estimate BLEU scores. Except for English to Turkish (EnTr), we find the variance of different runs to be 0.1 BLEU points, while for (EnTr) we estimate it to be 0.3. A complete hyper-parameter setup can be found in the Appendix C. For estimating inference speed we always decode 128 sentences in a single batch 1) to avoid the inference speed artefacts that might arise with very smaller batch sizes such as 1 and 2) to consider a more realistic bulk-inference setting (Kasai et al., 2021). We train models at two scales, Base and Big, as defined in terms of the number of heads and channel dimensions in (Vaswani et al., 2017). Obviously, the parameter count will vary compared to the Transformer when considering a different architecture. We train and evaluate autoregressive Base models on V100 GPUs, whereas the use GPUs A100 for models of size Big. We plan to release our code.

<sup>1</sup>signature in Appendix D

## 4.2 Optimizing the stacking pattern

We first fix a 6-layer decoder consisting of GLConv and optimize the stacking scheme in the encoder. We consider the English to German (EnDe) task (see 4.3 for more details) at a model size corresponding to that of Transformer Big, matching the same number of heads and the embedding dimensions. To approximately match the parameter count of Transformer Big, Lasagna uses 7 layers in the Encoder instead of 6, but still stays faster. In the search, we allocate the first  $x$  layers to LConv, the following  $y$  layers to GLConv and the remaining layers to SA; see grid search space in Figure 2(a). Having two or fewer SA layers decreases the BLEU scores compared to the baseline Transformer. Most models that interleave some LConvs and some GLConvs perform similarly, with BLEU scores in the range [29.0, 29.3]. We choose the stacking scheme in Lasagna as it has the highest BLEU score (see Fig. 2(a)). Note also that the plausible assumption that one could just use GLConvs instead of LConv is contradicted by our experimental results as scores degrade more quickly on the line  $x = 0$  than the line  $y = 0$  as one moves away from the origin.

We then fix the layers in Lasagna’s encoder and optimize layer configurations for the decoder. Results are reported in Figure 2(b). As we can match or outperform the Transformer baseline without using SA, we run fewer experiments that include SA and focus instead on the edges of the search space. The horizontal edge corresponds to replacing SA with LConv, the vertical edge to replacing SA with GLConv, while the diagonal edge corresponds to combining different numbers of LConv and GLConv blocks. As expected, in terms of inference speed we observe that it is preferable not to include SA in the decoder search space, see Appendix G for more details. However we do not find a clear pattern in terms of BLEU scores, suggesting that the specific configuration of layers in the Decoder might matter less.

## 4.3 Autoregressive Machine Translation

For this task we consider four data benchmarks and two model sizes, where the baselines are, respectively, the Base Transformer and the Big Transformer. As standard benchmarks we consider WMT’14 English to German (EnDe) and English to French (EnFr) as in (Vaswani et al., 2017). We prepare the data using the scripts in the Fairseq translation examples<sup>2</sup>. To test more distant language pairs, that could benefit from more global inductive bias as captured by SA, we consider the WMT’17 Chinese to English (ZhEn) benchmark, following the preprocessing in (Wu et al., 2019; Hassan et al., 2018) (about 20M pairs), and the WMT’17 English to Turkish (EnTr) benchmark following the preprocessing in (Zhang et al., 2018) (about 0.2M pairs). For both benchmarks the evaluation is performed on *newstest17*.

On (EnDe) at model size Base (Table 2) we find that our Lasagna architecture improves by 0.4 BLEU points over the Transformer baseline with a 27% higher inference speed. By making the encoder deeper we can improve up to 0.7 BLEU points with a 30% higher inference speed. Note that using LConvs in the encoder and the decoder results in a significant drop of almost 1.5 BLEU points. Lasagna matches Dynamic convolutions on parameter count and inference speed with a gain of +0.2 BLEU points over Dynamic Convolutions. On this task and model size we also considered Mixer (Tolstikhin et al., 2021) and the original gMLP with the “tiny” Self-Attention (Liu et al., 2021). We find that Mixer incurs a significant drop in translation quality, while gMLPs (using the “tiny” SA) can close the gap with the Transformer but incur a big drop in inference speed. When we move to model size Big (Table 4) we observe that models perform comparably on translation quality except for LConvs and Mixer. For Mixer the situation improves at this model size, with just a small drop in translation quality, but there is no significant improvement on the inference speed compared to the baseline. Note that in the case of Lasagna models we can slightly improve the BLEU score (up to +0.4) while increasing the inference speed by about 20%. Note also that at model size Big we did not observe an increased decoding speed by using Dynamic Convolutions. Finally, in both settings we saw that inference speed correlates well with training speed and Lasagna reduces the training time by about 25%. While we evaluate models on BLEU, for (EnDe) at model size Big we also ran an evaluation on model-based metrics, using the framework COMET (Rei et al., 2020); we find that Lasagna and Transformer are on par, while Lasagna(12) outperforms the Transformer, see Appendix A.

<sup>2</sup><https://github.com/pytorch/fairseq/examples/translation>

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(12)	<b>27.2</b> (+0.7)	81	<b>3.73</b> (+30%)
Lasagna	26.9 (+0.4)	67	3.65 (+27%)
Lasagna(9)	26.8 (+0.3)	72	3.58 (+24%)
Dynamic Conv.	26.7 (+0.2)	67	3.69 (+28%)
Transformer	26.5 (+0.0)	66	2.88 (+0%)
gMLP as in (Liu et al., 2021)	26.4 (-0.1)	67	1.62 (-44%)
Mixer	25.7 (-0.8)	<b>65</b>	3.71 (+29%)
Light Conv.	25.1 (-1.4)	66	<b>4.12</b> (+43%)

Table 2: (EnDe) Base Model. Our Lasagna models outperform the Transformer baseline on Translation quality, while achieving the same inference speed as Dynamic Convolutions. The original gMLP (Liu et al., 2021) architecture with tiny attention is substantially slower than the Transformer. Mixer and Light Convolutions achieve lower BLEU scores than the baseline. For details see 4.3.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(12)	<b>23.3</b> (+0.8)	118	3.70 (+9%)
Lasagna	22.9 (+0.4)	104	4.01 (+19%)
Lasagna(9)	22.7 (+0.2)	109	3.77 (+12%)
Dynamic Conv.	22.6 (+0.1)	105	3.64 (+8%)
Transformer	22.5 (+0.0)	104	3.38 (+0%)
Light Conv.	22.5 (+0.0)	<b>100</b>	3.98 (+18%)

Table 3: (ZhEn) Base Model. Our Lasagna models outperform the Transformer and Dynamic Convolutions baselines both on Translation quality and inference speed. For details see 4.3

For (ZhEn) we observe a similar picture. At model size Base (Table 3) we find that Lasagna and Lasagna-12 achieve +0.4 and +0.8 over the baseline while maintaining a higher decoding speed. At model size Big (Table 5) Lasagna can still outperform the baseline on BLEU score (+0.3) and inference speed (+10%). Here we observe that using LConvs in the Decoder results in a decrease in BLEU.

For (EnFr) and (EnTr) we report the complete experimental results in the Appendix B and summarize here the main findings. For (EnFr), at model size Base we can improve BLEU by +0.9 and inference speed by 30%, while at model size Big we can improve BLEU by +0.3 and inference speed by +28%. For (EnTr), we find that the Transformer achieves a test BLEU of 17.7 while Lasagna-9 achieves 18.2 at comparable inference speed.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(12)	<b>29.5</b> (+0.4)	277	3.77 (+18%)
Lasagna	29.3 (+0.2)	221	3.86 (+21%)
Lasagna(9)	29.1 (+0.0)	243	4.00 (+25%)
Transformer	29.1 (+0.0)	221	3.19 (+0%)
Dynamic Conv.	29.0 (-0.1)	224	3.30 (+3%)
Mixer	28.8 (-0.3)	<b>206</b>	3.14 (-1%)
Light Conv.	28.6 (-0.5)	<b>206</b>	3.22 (+1%)

Table 4: (EnDe) Big Model. Increasing the scale the differences on Translation quality as measured by BLEU become smaller. Even Mixer and Light Convolutions almost match the Transformer and Dynamic Convolution baselines. Our Lasagna models outperform the baselines in terms of inference speed and BLEU. For details see 4.3.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna	<b>24.7</b> (+0.3)	296	3.78 (+10%)
Lasagna(9)	24.6 (+0.2)	318	<b>3.89</b> (+13%)
Lasagna(12)	24.6 (+0.2)	353	3.65 (+6%)
Transformer	24.4 (+0.0)	296	3.45 (+0%)
Dynamic Conv.	24.2 (-0.2)	299	3.31 (-4%)
Lasagna(9) + LConv Decoder	24.0 (-0.4)	312	3.79 (+10%)
Light Conv.	24.0 (-0.4)	<b>281</b>	3.46 (+0%)

Table 5: (ZhEn) Big Model. Our Lasagna models slightly outperform the Transformer baseline on BLEU and both the Transformer and Dynamic Convolutions on inference speed. Note how using Light Convolutions instead of a Light gMLP Decoder results in a -0.4 drop in BLEU. For details see 4.3.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(12)	25.3 (+0.9)	80	5.29 (+39%)
Lasagna(9) + LConv Decoder	24.9 (+0.5)	71	5.56 (+46%)
Lasagna(9)	24.7 (+0.3)	71	5.47 (+44%)
Lasagna	24.6 (+0.2)	66	5.26 (+38%)
Dynamic Conv.	24.5 (+0.1)	66	5.05 (+33%)
Transformer	24.4 (+0.0)	66	3.81 (+0%)
Light Conv.	23.8 (-0.6)	<b>62</b>	<b>5.81</b> (+52%)

Table 6: (EnDe) using the Levenshtein Transformer. Our Lasagna models improve Translation quality over the Levenshtein Transformer baseline (Gu et al., 2019) up to +0.9 BLEU points with a +40% increase in decoding speed. For details see 4.4.

#### 4.4 Non-Autoregressive Machine Translation

For non-autoregressive Machine Translation we took as baseline the Levenshtein Transformer (Gu et al., 2019) using the Fairseq implementation<sup>3</sup>. This model uses the decoder to iteratively refine the translations using a post-editing process learned through imitation learning. We were unable to reproduce the original result of (Gu et al., 2019), where the non-autoregressive model matches the auto-regressive baseline. This was the case both when training with our own distillation data, obtained from our best (EnDe) model at size Big, as well as with the distillation data released with Fairseq; we report results based on the latter. We find that the Lasagna model outperforms the Transformer also in this setting (Table 6) with improvements up to +0.9 BLEU points and about +40% increase in decoding speed. Note that in the case of the Levenshtein Transformer the decoder is called for a fixed number of iterations on the whole sequence, so the complexity analysis is different from the auto-regressive case; see (Kasai et al., 2021) for details.

#### 4.5 Deep-shallow models

Recent work (Kasai et al., 2021) questions whether non-autoregressive Machine Translation is actually faster than auto-regressive one; they propose auto-regressive models with a Deep Encoder and a Shallow Decoder as a faster alternative for larger batch sizes, corresponding to the bulk-inference case. Specifically, they propose a Transformer Encoder with 12 layers and a Transformer Decoder with a single layer. So far we measured speed-ups for models where the encoder and the decoder have comparable depth, and the difference might become negligible when the decoder consists of a single layer. Moreover, a decoder using only local operations might take a considerable hit on Translation quality compared to one using SA. We thus test Lasagna also in this setting.

<sup>3</sup>[https://github.com/pytorch/fairseq/examples/nonautoregressive\\_translation](https://github.com/pytorch/fairseq/examples/nonautoregressive_translation)



Encoder	Decoder	BLEU	Params (M)	tokens/s (k)
Transformer(6)	Transformer(6)	24.4 (+0.0)	296	3.45 (+0%)
Transformer(12)	GLConv(1)	<b>23.8</b> (-0.6)	286	<b>10.71</b> (+210%)
Lasagna(12)	GLConv (1)	23.6 (-0.8)	<b>274</b>	<b>10.69</b> (+210%)
Lasagna(12)	Transformer (1)	23.5 (-0.9)	275	10.16 (+194%)
Transformer(12)	Transformer(1)	23.5 (-0.9)	288	8.65 (+150%)

Table 7: (ZhEn), Deep Encoder / Shallow Decoder as in (Kasai et al., 2021). Using a Light gMLP decoder increases decoding speed by 60%. Replacing a Deep Transformer Encoder with a Lasagna one increases decoding speed by 40% without affecting the BLEU score. Note however, how the original Deep Encoder / Shallow Decoder using SA suffers a loss of almost 1 BLEU point to the Transformer baseline. For details see 4.5.

Encoder	Decoder	BLEU	Params (M)	tokens/s (k)
Lasagna	GLConv	26.9 (+0.4)	67	3.65 (+27%)
Lasagna	LConv	26.7 (+0.2)	66	3.81 (+32%)
Lasagna, GLConv $\rightarrow$ LConv	GLConv	26.7 (+0.2)	66	4.04 (+40%)
Dynamic Conv.	Dynamic Conv.	26.7 (+0.2)	67	3.69 (+28%)
Transformer	LConv	26.5 (+0.0)	<b>63</b>	4.07 (+41%)
Transformer	GLConv	26.5 (+0.0)	65	4.04 (+40%)
Transformer	Transformer	26.5 (+0.0)	66	2.88 (+0%)
Inverted Lasagna	GLConv	26.3 (-0.2)	67	3.97 (+38%)
Lasagna, SA $\rightarrow$ GLConv	GLConv	26.2 (-0.3)	66	3.71 (+29%)
LConv	LConv	25.1 (-1.4)	66	<b>4.12</b> (+43%)

Table 8: Ablations on design choices for the Lasagna. We show that both the order of layers (from local to global) and the use of GLConvs matter. We show that the Transformer Decoder can be replaced by one using GLConvs or LConvs without affecting the BLEU score. For details see 4.6.

We observe (Table 7) that replacing the Transformer encoder with Lasagna-12 (with just one layer in the decoder) results in the same BLEU score but an increased inference speed (+60%). Note also that the best BLEU score was not achieved by Lasagna, but by combining a standard Transformer encoder with an GLConv-decoder, i.e. a decoder consisting of a single layer employing a Gated Light Convolution; on the other hand, using a decoder with a single Transformer layer results in a decrease of -0.3.

#### 4.6 Ablation studies

We evaluate the impact of various choices that we made in Table 8. We use (EnDe) at model size Base. We first invert the order of the layers in the encoder (Inverted Lasagna) to compare what happens if we decide to first work with global operations and then use local ones. This has a big negative impact as the performance decreases by  $-0.6$  BLUE points relative to Lasagna. Secondly we consider what happens if we replace the SA layers in the encoder with GLConvs. In this case the performance also decreases by  $-0.7$  points. However, note that in both cases the performance drop compared to the Transformer baseline is small. This ablation suggests that the locality prior of LConv and GLConv complements the global attention prior of SA when LConv and GLConv are used before SA. Both inverting the order of layers in Lasagna as well as removing SA from Lasagna hurt translation quality.

We then look at the role of the GLConvs in the encoder and the decoder. If we replace them with LConvs there is a small impact of  $-0.2$  points. Note however that for (ZhEn) at model size Big (Table 5) the impact was larger with a  $-0.4$  drop compared to the Transformer baseline (Table 5). Combining a Transformer encoder with a decoder using LConvs or GLConvs does not improve the BLEU score over the baseline.

## 5 Conclusions

We have proposed a novel architecture for machine translation that improves over the Transformer in terms of translation performance and inference speed across a large number of benchmarks and model sizes. The architecture stacks different layers onto each other in order to capture multiple inductive biases and increase performance while increasing inference speed; as a result, most of the self-attention layers that are standard in the Transformer are replaced by lower degree and more local operations. We hope that our work can spur more interest in this sort of heterogeneous architectures and result in models that are more efficient to train and deploy than the Transformer.

### Broader Impact Statement

The architecture proposed here can reduce the energy consumption for training and deploying Neural Machine Translation Models, as training time is reduced and inference speed is increased. Despite the advances in Machine Translation, such systems may still produce incorrect translations, and this can negatively affect their users. However this negative impact affects Neural Machine Translation in general, and is not specific to the methodology proposed here.

### Acknowledgments

### References

- Dmitrii Aksenov, Julian Moreno-Schneider, Peter Bourgonje, Robert Schwarzenberg, Leonhard Hennig, and Georg Rehm. Abstractive text summarization based on language model conditioning and locality modeling. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pp. 6680–6689, Marseille, France, May 2020. European Language Resources Association. ISBN 979-10-95546-34-4. URL <https://aclanthology.org/2020.lrec-1.825>.
- Yoshua Bengio, Rejean Ducharme, Pascal Vincent, and Christian Jauvin. A neural probabilistic language model. *Journal of Machine Learning Research*, 2003.
- Mia Xu Chen, Orhan Firat, Ankur Bapna, Melvin Johnson, Wolfgang Macherey, George Foster, Llion Jones, Mike Schuster, Noam Shazeer, Niki Parmar, Ashish Vaswani, Jakob Uszkoreit, Lukasz Kaiser, Zhifeng Chen, Yonghui Wu, and Macduff Hughes. The best of both worlds: Combining recent advances in neural machine translation. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 76–86, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1008. URL <https://aclanthology.org/P18-1008>.
- Tobias Domhan. How much attention do you need? a granular analysis of neural machine translation architectures. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1799–1808, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1167. URL <https://aclanthology.org/P18-1167>.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An Image is Worth 16x16 Words: Transformers for Image Recognition at Scale. *ICLR*, 2021.
- Jiatao Gu, Changhan Wang, and Jake Zhao. Levenshtein Transformer. *NeurIPS*, 2019.
- Anmol Gulati, James Qin, Chung-Cheng Chiu, Niki Parmar, Yu Zhang, Jiahui Yu, Wei Han, Shibo Wang, Zhengdong Zhang, Yonghui Wu, and Ruoming Pang. Conformer: Convolution-augmented Transformer for Speech Recognition. *InterSpeech*, 2020.
- Hany Hassan, Anthony Aue, Chang Chen, Vishal Chowdhary, Jonathan Clark, Christian Federmann, Xuedong Huang, Marcin Junczys-Dowmunt, William Lewis, Mu Li, Shujie Liu, Tie-Yan Liu, Renqian Luo, Arul Menezes, Tao Qin, Frank Seide, Xu Tan, Fei Tian, Lijun Wu, Shuangzhi Wu, Yingce Xia, Dongdong Zhang, Zhirui Zhang, and Ming Zhou. Achieving Human Parity on Automatic Chinese to English News Translation. *arXiv e-prints*, art. arXiv:1803.05567, March 2018.

- Dan Hendrycks and Kevin Gimpel. Gaussian Error Linear Units (GELUs). *arXiv e-prints*, art. arXiv:1606.08415, June 2016.
- Nal Kalchbrenner, Lasse Espeholt, Karen Simonyan, Aaron van den Oord, Alex Graves, and Koray Kavukcuoglu. Neural machine translation in linear time. *arXiv preprint arXiv:1610.10099*, 2016.
- Jungo Kasai, Nikolaos Pappas, Hao Peng, James Cross, and Noah A. Smith. Deep Encoder, Shallow Decoder: Reevaluating Non-autoregressive Machine Translation. *ICLR*, 2021.
- Urvashi Khandelwal, He He, Peng Qi, and Dan Jurafsky. Sharp nearby, fuzzy far away: How neural language models use context. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 284–294, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1027. URL <https://aclanthology.org/P18-1027>.
- Tao Lei, Yu Zhang, Sida I. Wang, Hui Dai, and Yoav Artzi. Simple recurrent units for highly parallelizable recurrence. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 4470–4481, Brussels, Belgium, October–November 2018. Association for Computational Linguistics. doi: 10.18653/v1/D18-1477. URL <https://aclanthology.org/D18-1477>.
- Yawei Li, Kai Zhang, Jiezhong Cao, Radu Timofte, and Luc Van Gool. LocalViT: Bringing Locality to Vision Transformers. *arXiv e-prints*, art. arXiv:2104.05707, April 2021.
- Hanxiao Liu, Zihang Dai, David R. So, and Quoc V. Le. Pay attention to mlps. In *NeurIPS*, 2021.
- Ningning Ma, Xiangyu Zhang, Hai-Tao Zheng, and Jian Sun. Shufflenet v2: Practical guidelines for efficient cnn architecture design. In *Proceedings of the European conference on computer vision (ECCV)*, pp. 116–131, 2018.
- Benjamin Marie, Atsushi Fujita, and Raphael Rubino. Scientific credibility of machine translation research: A meta-evaluation of 769 papers. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pp. 7297–7306, Online, August 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.acl-long.566. URL <https://aclanthology.org/2021.acl-long.566>.
- Sharan Narang, Hyung Won Chung, Yi Tay, Liam Fedus, Thibault Fevry, Michael Matena, Karishma Malkan, Noah Fiedel, Noam Shazeer, Zhenzhong Lan, Yanqi Zhou, Wei Li, Nan Ding, Jake Marcus, Adam Roberts, and Colin Raffel. Do transformer modifications transfer across implementations and applications? In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 5758–5773, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.465. URL <https://aclanthology.org/2021.emnlp-main.465>.
- Myle Ott, Sergey Edunov, Alexei Baevski, Angela Fan, Sam Gross, Nathan Ng, David Grangier, and Michael Auli. fairseq: A fast, extensible toolkit for sequence modeling. In *Proceedings of NAACL-HLT 2019: Demonstrations*, 2019.
- Matt Post. A call for clarity in reporting BLEU scores. In *WMT*, 2018. URL <https://www.aclweb.org/anthology/W18-6319>.
- Ofir Press, Noah A. Smith, and Omer Levy. Improving transformer models by reordering their sublayers. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 2996–3005, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.270. URL <https://aclanthology.org/2020.acl-main.270>.
- Ricardo Rei, Craig Stewart, Ana C Farinha, and Alon Lavie. Unbabel’s participation in the WMT20 metrics shared task. In *Proceedings of the Fifth Conference on Machine Translation*, pp. 911–920, Online, November 2020. Association for Computational Linguistics. URL <https://aclanthology.org/2020.wmt-1.101>.

Model	wmt20-comet-da	pval	wmt21-comet-mqm	pval
Lasagna(12)	<b>0.3731</b>	0.002	<b>0.0310</b>	0.0005
Lasagna(9)	0.3622	0.2564	0.0308	0.2329
Lasagna	0.3585	0.56	0.0307	0.9
Transformer	0.3553	-	0.0307	-

Table 9: (EnDe) Big Model. Our Lasagna(12) models outperform the Transformer on model-based metrics and where the difference is statistically significant. We report p-values of a comparison test between each model and the Transformer; this is based on bootstrap resampling and performed automatically by COMET.

David So, Quoc Le, and Chen Liang. The evolved transformer. In Kamalika Chaudhuri and Ruslan Salakhutdinov (eds.), *Proceedings of the 36th International Conference on Machine Learning*, volume 97 of *Proceedings of Machine Learning Research*, pp. 5877–5886. PMLR, 09–15 Jun 2019. URL <https://proceedings.mlr.press/v97/so19a.html>.

Yi Tay, Dara Bahri, Donald Metzler, Da-Cheng Juan, Zhe Zhao, and Che Zheng. Synthesizer: Rethinking self-attention in transformer models. *ICML*, 2021.

Ilya Tolstikhin, Neil Houlsby, Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Thomas Unterthiner, Jessica Yung, Andreas Steiner, Daniel Keysers, Jakob Uszkoreit, Mario Lucic, and Alexey Dosovitskiy. Mlp-mixer: An all-mlp architecture for vision. *NeurIPS*, 2021.

Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *NIPS*, 2017.

Felix Wu, Angela Fan, Alexei Baevski, Yann N. Dauphin, and Michael Auli. Pay less attention with lightweight and dynamic convolutions. In *ICLR*, 2019.

Biao Zhang, Deyi Xiong, and Jinsong Su. Accelerating neural transformer via an average attention network. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 1789–1798, Melbourne, Australia, July 2018. Association for Computational Linguistics. doi: 10.18653/v1/P18-1166. URL <https://www.aclweb.org/anthology/P18-1166>.

## A Appendix: Model-based evaluation.

While we use BLEU as main evaluation metric, and report the variance of the scores, we evaluated (EnDe) models at size Big on model-based metrics. These metrics are the output of models that learn to predict human evaluations. We use the COMET implementation (Rei et al., 2020) reporting the scores from the models `wmt20-comet-da` and `wmt21-comet-mqm`. We also run significance tests, reporting the p-values that a model score is significantly higher than that of the Transformer, see Table 9.

## B Appendix: Tables for English to French and Turkish.

We report our experimental results on (EnFr) at model size Base in Table 10 and Big in Table 12. We report our experimental results on (EnTr) at model size Base in Table 11. Note that Light Convolutions perform competitively on (EnFr) but experience a significant drop on (EnTr), perhaps because these are more distant language pairs and Turkish word order is less rigid than English.

## C Appendix: Training Hyper-parameters

We preprocess the data with Fairseq (Ott et al., 2019) using BPE vocabularies with splits and training hyper-parameters reported in Table 13. Note that we sometimes simulate training on a larger number of GPUs by using gradient accumulation steps, which in Fairseq are specified with the `-update-freq` parameter.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(12)	<b>38.3</b> (+0.9)	81	3.83 (+30%)
Lasagna(9)	37.9 (+0.5)	72	3.92 (+33%)
Dynamic Conv.	37.9 (+0.5)	69	4.00 (+36%)
Lasagna	37.8 (+0.4)	67	3.76 (+28%)
Transformer	37.4 (+0.0)	67	2.94 (+0%)
Light Conv.	37.2 (-0.2)	<b>63</b>	<b>4.30</b> (+46%)

Table 10: (EnFr) Base Model. Our Lasagna models outperform the Transformer on BLEU and inference speed. Light convolutions are also a good baseline, probably because of the closeness between language pairs.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(9)	<b>18.2</b> (+0.5)	66	3.13 (+4%)
Lasagna	18.0 (+0.3)	<b>60</b>	3.18 (+5%)
Lasagna(12)	17.8 (+0.1)	75	3.25 (+8%)
Transformer	17.7 (+0.0)	<b>60</b>	3.02 (+0%)
Dynamic Conv.	17.5 (-0.2)	<b>60</b>	3.19 (+6%)
Light Conv.	16.8 (-0.9)	<b>60</b>	3.31 (+10%)

Table 11: (EnTr) Base Model. Differences  $\leq 0.3$  on BLEU are not significant. Lasagna(9) improves over the Transformer while Light Convolutions drop by almost 1 BLEU point.

Model	BLEU	Params (M)	tokens/s (k)
Lasagna(9)	<b>42.1</b> (+0.3)	245	4.22 (+28%)
Lasagna(12)	<b>42.1</b> (+0.3)	279	4.13 (+25%)
Lasagna	41.8 (+0.0)	222	4.15 (+26%)
Dynamic Conv.	41.8 (+0.0)	225	3.93 (+19%)
Transformer	41.8 (+0.0)	222	3.30 (+0%)
Light Conv.	41.6 (-0.2)	<b>207</b>	4.20 (+27%)

Table 12: (EnFr) Big Model. Our Lasagna models improve over the Transformer for BLEU and inference speed.

Model size	Task	GPUs	Steps	Tok. in Batch	Grad Acc.	Lr schedule	Peak lr	Vocab splits
Base	(EnDe)	8 V100	120k	4k	1	inverse square root	$5 \times 10^{-4}$	32k (shared)
Base	(EnFr)	8 V100	120k	4k	1	inverse square root	$5 \times 10^{-4}$	40k (shared)
Base	(ZhEn)	8 V100	120k	4k	1	inverse square root	$5 \times 10^{-4}$	32k (separate)
Base	(EnTr)	4 V100	10k	4k	4	inverse square root	$10^{-3}$	32k (shared)
Big	(EnDe)	16 A100	30k	3.6k	4	cosine decay	$10^{-3}$	32k (shared)
Big	(ZhEn)	16 A100	40k	3.6k	4	cosine decay	$10^{-3}$	32k (separate)
Big	(EnFr)	16 A100	120k	5k	2	inverse square root	$5 \times 10^{-4}$	40k (shared)
NAT	(EnDe)	8 A100	300k	8k	1	inverse square root	$5 \times 10^{-4}$	32k (shared)

Table 13: Hyperparameters for Training. Tok. in Batch is the maximum number of tokens in a batch on a single accelerator, while grad accumulation is the number of gradient accumulation steps to reach a desired number of tokens to update on. When the vocabulary splits are shared it means there is a single shared vocabulary between source and target languages.

There are three dropouts: one for the MLPs, one for attention and one for the convolutional weights. For (EnDe) we use, respectively, 0.3, 0.1 and 0.1; for (EnFr) 0.1, 0.1, 0.1; for (ZhEn) 0.2, 0.2, 0.2; for (EnTr) 0.3, 0.1, 0.1.

For the learning rate warmup we use a linear schedule to the peak rate with 4k steps at model size Base and (EnFr) at model size Big, 10k at model size Big for (EnDe) and (ZhEn) and NAT.

The embedding dimensions and the number of heads are the standard ones for model Base and Big. For Base we use 512 embedding dimensions and 8 heads, for Big 1024 embedding dimensions and 16 heads. The kernel sizes for Light and Dynamic Convolutions are like those in (Wu et al., 2019).

## D Appendix: Inference Hyper-parameters

We use beam size 4. For (EnDe), (ZhEn) and (EnFr) we fine-tuned the length penalty for the Transformer on the validation set and use the same one across all models. We use 0.6 for (EnDe) and (EnFr) and 1.4 for (ZhEn). For (EnTr) we fine-tune the length penalty on the validation set *for each model*, we consider the range 0.4 to 1.8, in increments of 0.1. For sacreBLEU we use the signature `case.mixed+nrefs.1+smooth.exp+tok.13a+v.1.5.1`.

## E Appendix: Speed Gains and Batch Size

In Figure 3 we plot the relative speed gain over the Transformer measured at different batch sizes. We take the tokens/s of each model relative to the tokens/s of the Transformer. We see that the relative gains can change with the batch size. However, the oscillations tend to be less than 10%. We report 128 to simulate a bulk-inference case in which predictions are batched together.

## F Appendix: Gating-augmented Feed Forward Layers

We compare the approach using the Lasagna model with an alternative route that enhances SA, motivated by the hypothesis that one should *complement* rather than replace SA, compare (Tay et al., 2021; Lei et al., 2018). In (Lei et al., 2018) the feed-forward layers were augmented with recurrent operations, but it was found that increasing translation quality would result into slightly decreasing inference speed. We observe that the recurrent operation of SRUs relies on two main ingredients: 1) usage of two gating operations, 2) a light recurrent operation based on a sort of averaging mechanism (compare with (Zhang et al., 2018)). However, an efficient implementation of SRUs requires a somewhat-involved ad-hoc CUDA kernel and an adhoc initialization scheme. We thus investigate enhancing the feed-forward layers with the simpler GLConvs, which also uses gating and an averaging mechanism through the convolutions, and has also a straightforward

Model	BLEU	Task	Params (M)	tokens/s (k)
Lasagna	<b>24.7</b>	(ZhEn)	<b>296</b> (-12%)	<b>3.78</b> (+42%)
gating-augmented	24.6	(ZhEn)	337	2.60
Lasagna	<b>29.3</b>	(EnDe)	<b>221</b> (-17%)	<b>3.86</b> (+69%)
gating-augmented	29.2	(EnDe)	259	2.29
gating-augmented	<b>42.0</b>	(EnFr)	260	3.39
Lasagna	41.8	(EnFr)	<b>222</b> (-17%)	<b>4.15</b> (+22%)

Table 14: Our Lasagna model is more effective than augmenting the feed-forwards with Gated Light Convolutions. Less parameters are required to match the same BLEU score and inference speed improves significantly. For details see Appendix F

implementation. In order not to slow down too much the decoder, we opt for the following architecture: a Transformer encoder with GLConvs replacing the forward layers and the Lasagna decoder.

## G Appendix: Optimizing layers

We report in Figure 4 the results on speed for the layering search for the decoder. The Lasagna encoder already results in a speed gain over the Transformer, even when the decoder uses only SA. However, after removing a few layers of SA most speed results are comparable, given a variance of  $\pm 0.1k$  tokens/s.

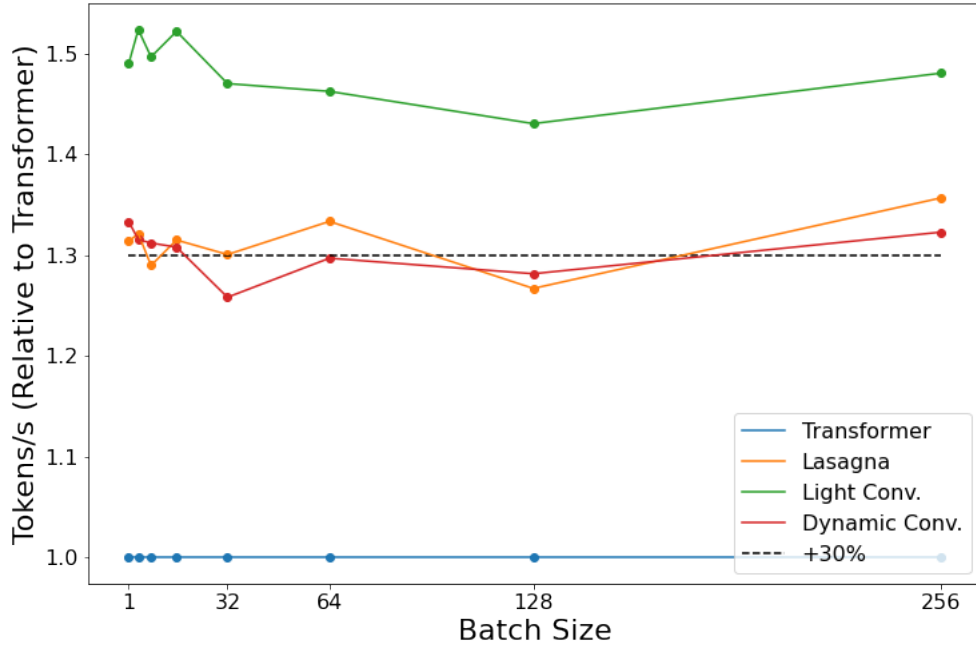


Figure 3: The speed gains over the Transformer do not depend much on the batch size.

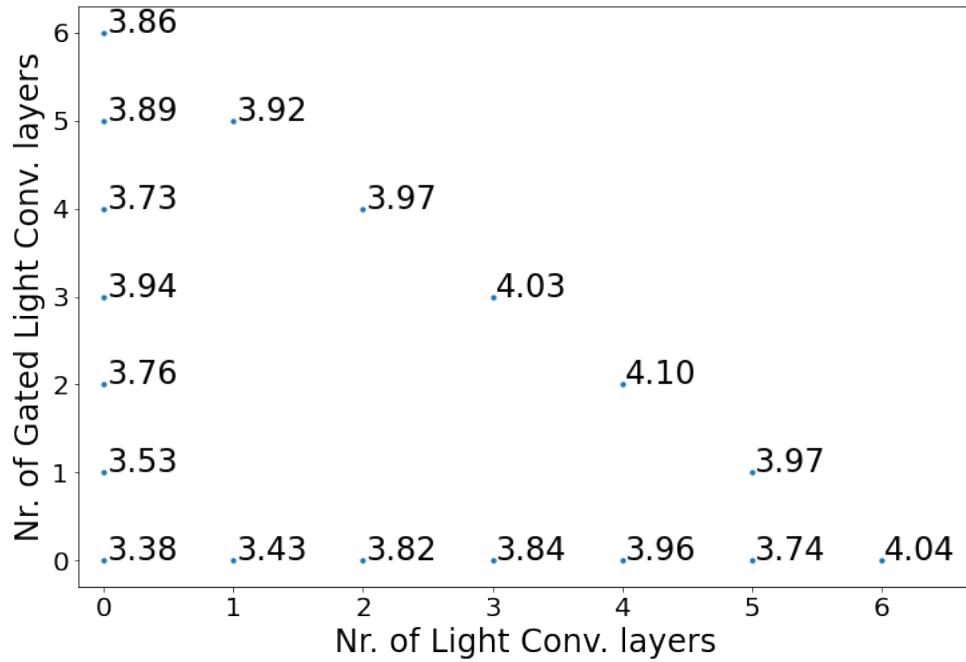


Figure 4: The speed results corresponding to Figure 2(b)