

# Unlocking Multilingual Reasoning Capabilities of LLMs and LVLMs via Representation Engineering

Anonymous ACL submission

## Abstract

Large Language Models (LLMs) and Large Vision-Language Models (LVLMs) demonstrate strong reasoning capabilities, yet their performance in English significantly outperforms that in low-resource languages, raising fairness concerns in multilingual applications. Existing approaches either rely on costly multilingual training or employ prompting with external translation tools, both of which are resource-intensive and sensitive to translation quality. To address these limitations, we propose a training-free inference-time method to enhance Multilingual Reasoning capabilities via Representation Engineering (MRRE) without using any additional training data or tools. MRRE sequentially injects two precomputed vectors at specific layers during inference processing: cross-lingual reasoning enhancement vectors, which steer non-English reasoning representations toward English space to unlock multilingual reasoning, and target-language output anchoring vectors, which restore the distribution of the target language to preserve input-output language consistency. Comprehensive experiments across six advanced LLMs and LVLMs on four reasoning benchmarks demonstrate MRRE consistently enhances non-English reasoning by an average gain of 5.48% and up to 7.54% in low-resource languages (e.g., Thai and Swahili), while improving input-output language consistency by 3.78%.

## 1 Introduction

With the rapid development of Large Language Models (LLMs) and Large Vision-Language Models (LVLMs), foundational models such as Llama-3.1-8B-Instruct (Grattafiori et al., 2024) and Qwen2.5-VL-7B-Instruct (Team, 2025) have demonstrated impressive capabilities in complex reasoning. However, high-resource languages such as English exhibit substantially stronger reasoning capabilities compared to low-resource languages,

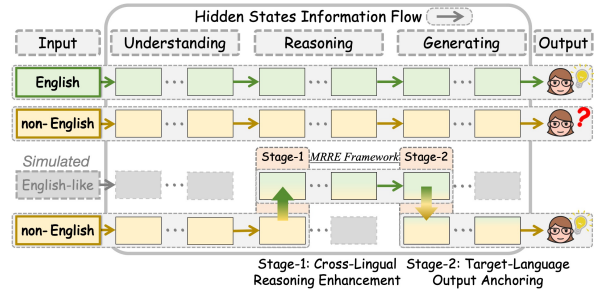


Figure 1: MRRE adopts a two-stage intervention strategy to unlock multilingual reasoning capabilities.

raising concerns about fairness in multilingual applications under global deployment. To address the above issues, prior works primarily focus on two directions to enhance non-English reasoning capabilities: (1) Data-driven training methods, which align multilingual embeddings (Arora et al., 2024) or construct multilingual reasoning datasets for instruction tuning (Fan et al., 2025), but inevitably depend on expensive data and incur considerable computational costs. (2) Prompting-based methods, which rely on external translation tools or models (Khandelwal et al., 2024; Liu et al., 2024), but are highly sensitive to translation quality and prompt design, accompanied by high latency. Moreover, existing methods are rarely effective across both LLMs and LVLMs. Therefore, establishing a unified and efficient paradigm for enhancing multilingual reasoning across both LLMs and LVLMs remains further exploration.

Prior studies (Zhao et al., 2024; Tang et al., 2025; Li et al., 2025a,b) have revealed the internal mechanism of multilingual reasoning: hidden states are transformed into high-resource language representations (e.g., English) in early layers, then exploited for reasoning from middle to later layers, and finally restored target language features in late layers. However, as shown in Figure 2, we observe that hidden states in reasoning-related layers of both LLMs and LVLMs still exhibit significant differences be-

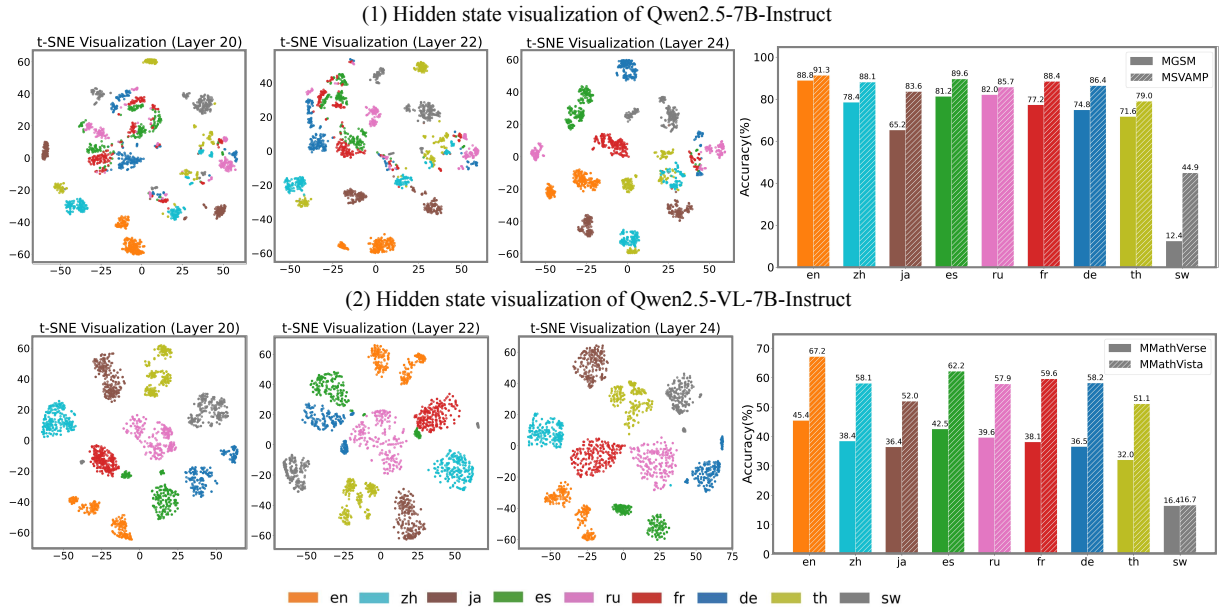


Figure 2: t-SNE hidden state visualization and reasoning performance of Qwen2.5-7B-Instruct and Qwen2.5-VL-7B-Instruct. The reasoning capability in English exhibits substantially stronger than in other languages.

071 between English and non-English inputs. This con- 100  
072 sistent cross-architecture phenomenon motivates 101  
073 us to steer the distribution of non-English hidden 102  
074 states toward English, endowing both LLMs and 103  
075 LVLMs with English-level reasoning capabilities 104  
076 under a general framework. As shown in Figure 1, 105  
077 we propose a training-free inference-time method 106  
078 to enhance **Multilingual Reasoning** capabilities via 107  
079 **Representation Engineering (MRRE)** without using 108  
080 any additional training data or tools. **MRRE** 109  
081 sequentially injects two precomputed vectors at spe- 110  
082 cific layers during forward passing: *cross-lingual* 111  
083 *reasoning enhancement vectors*, which steer non- 112  
084 English reasoning representations toward English 113  
085 distributions to strengthen reasoning, and *target-*  
086 *language output anchoring vectors*, which restore  
087 the distribution of the target language to preserve  
088 input-output language consistency.

089 Experimental results of six advanced LLMs and 100  
090 LVLMs on four reasoning benchmarks demonstrate 101  
091 that MRRE enhances non-English reasoning by an 102  
092 average gain of 5.48% and up to 7.54% in low- 103  
093 source languages (Thai & Swahili), while improv- 104  
094 ing input-output language consistency by 3.78%. 105

## 095 2 Related Works

### 096 2.1 Multilingual Foundation Models

097 To address the multilingual demands of real-world 100  
098 global applications, recent studies have extended 101  
099 foundation models to multilingual models. Ad- 102

103 vanced LLMs like Qwen3-8B (Yang et al., 2025) 104  
105 and Llama-3.1-8B-Instruct (Grattafiori et al., 2024), 106  
107 are pretrained and instruction-tuned on massive 108  
109 multilingual data, enabling them to respond across 110  
111 diverse languages. Furthermore, advanced LVLMs 112  
113 like Qwen2.5-VL-7B-Instruct (Team, 2025) and 114  
115 InternVL3.5-8B-Chat (Wang et al., 2025a), inte- 116  
117 grate visual encoders with these language back- 118  
119 bones, thereby inheriting comparable multilingual 120  
121 capabilities. However, the unbalanced distribution 122  
123 of training data across languages results in a signif- 124  
125 icant performance disparity between high-resource 126  
127 languages (e.g., English) and low-resource lan- 128  
129 guage (e.g., Swahili), raising concerns of fairness. 129

### 125 2.2 Multilingual Reasoning Enhancement

126 To enhance multilingual reasoning, previous re- 100  
127 search can be divided into two categories: (1) **Data-** 101  
128 **driven training** methods enhance multilingual rea- 102  
129 soning by aligning cross-lingual representations or 103  
104 fine-tuning with multilingual supervision, includ- 105  
106 ing contrastive alignment (Li et al., 2023; Huang 106  
107 et al., 2024; Arora et al., 2024) and reasoning- 107  
108 specific instruction tuning (Zhang et al., 2024a; 108  
109 Geng et al., 2024; Lai and Nissim, 2024; Fan et al., 109  
110 2025). Although effective, these approaches incur 110  
111 substantial data and computational costs. (2) **Prompting** 111  
112 methods mitigate language imbalance without pa- 112  
113 rameter updates, including through direct multilingual 113  
114 inputs (Sakai et al., 2024; Khandelwal et al., 2024), 114  
115 pivot-language translation (Liu 115  
116 2024), 116  
117 117  
118 118  
119 119  
120 120  
121 121  
122 122  
123 123  
124 124  
125 125  
126 126  
127 127  
128 128  
129 129

et al., 2024), or diverse chain-of-thought prompting (Wang et al., 2024), although effectiveness remain sensitive to translation quality and prompt design, accompanying by high latency. In contrast to previous work, MRRE is the first training-free inference-time method via representation engineering without using any additional data or tools, which clearly distinguishes MRRE from existing methods.

### 3 Methods

#### 3.1 Task Formulation

We restrict our scope to models that are based on auto-regressive Transformer architecture (Vaswani et al., 2017), as it is adopted by most SOTA LLMs and LVLMs. The input sequence of LLMs and LVLMs are processed through  $L$  transformer layers of the language decoder, each consisting of multi-head self-attention (MHSA), feed-forward network (FFN) that is usually a multilayer perceptron (MLP), and a residual stream is applied between each component. The hidden state  $\mathbf{h}^{(l)} \in \mathbb{R}^d$  for token  $t$  at layer  $l$  under input sequence  $R(x)$  can be computed from the previous layer:

$$\mathbf{h}^{(l)}(R(x), t) = \mathbf{h}^{(l-1)}(R(x), t) + \mathbf{a}^{(l)} + \mathbf{m}^{(l)}, \quad (1)$$

where  $\mathbf{a}^{(l)}$  and  $\mathbf{m}^{(l)}$  are the outputs of the MHSA and FFN component at layer  $l$ . Finally, the model predicts the next token in an auto-regressive manner based on the hidden state of the last layer.

In this paper, to bridge the significant performance gap between English and non-English languages in reasoning tasks, we propose a representation engineering approach that applies a two-stage hierarchical intervention on the hidden states of specific layers within the language decoder, unlocking non-English reasoning capabilities while preserving input-output language consistency.

#### 3.2 Cross-Lingual Reasoning Enhancement

Prior studies (Zhao et al., 2024; Tang et al., 2025) have shown that the mid-layer hidden states play a critical role in shaping reasoning latent representation. Furthermore, as shown in Figure 2, we observe that the hidden states from middle to deeper layers under different languages exhibit significant differences in the latent space across both LLMs and LVLMs. These findings motivate us to propose a representation engineering strategy that aligns the reasoning capability of non-English with English, which exhibits stronger reasoning performance.

Since LLMs and LVLMs generate tokens in an auto-regressive manner, we focus on the hidden state of the last token, which aggregates the most comprehensive visual and textual information. To precisely estimate the reasoning enhancement direction for hidden states, we define ***cross-lingual reasoning enhancement vectors***, which align the hidden states of the reasoning chain in the target non-English language with the stronger reasoning chain in English. These vectors are computed by comparing the output last token’s hidden states on a set of reasoning problems  $\mathcal{X}$ . For each problem  $x \in \mathcal{X}$ , we feed the model with both English prompt and parallel non-English prompt, generating the corresponding reasoning responses,  $R_{\mathcal{E}}(x)$  and  $R_{\mathcal{T}}(x)$ . We define a difference vector  $\Delta\mathbf{h}_x^{(l)}$  to estimate the latent difference between English and non-English:

$$\Delta\mathbf{h}_x^{(l)} = \mathbf{h}^{(l)}(R_{\mathcal{E}}(x), t_{\text{last}}) - \mathbf{h}^{(l)}(R_{\mathcal{T}}(x), t_{\text{last}}), \quad (2)$$

The ***cross-lingual reasoning enhancement vector*** at  $l$ -th layer,  $\mathbf{v}_r^{(l)}$ , is then computed as the mean of these difference vectors over the entire set  $\mathcal{X}$ :

$$\mathbf{v}_r^{(l)} = \frac{1}{|\mathcal{X}|} \sum_{x \in \mathcal{X}} \Delta\mathbf{h}_x^{(l)}. \quad (3)$$

By steering the target-language hidden states along  $\mathbf{v}_r^{(l)}$ , we shift the non-English reasoning chain to a stronger reasoning chain shaped by English. This intervention enables the model to exhibit English-level reasoning capability when answering questions in the non-English language.

#### 3.3 Target-Language Output Anchoring

However, merely applying the ***cross-lingual enhancement vectors*** may compromise input-output language consistency. When the steered hidden states pass through the layers responsible for constructing the output language representation, the models process them as if they were English inputs, resulting in English outputs rather than the target language. To address this issue, we propose ***target-language output anchoring vectors***, which guide the model to steer the English-like output distribution toward the target non-English language in the layers responsible for constructing the output language representation, thereby ensuring input-output language consistency. The ***target-language output anchoring vector*** at  $l'$ -th layer,  $\mathbf{v}_a^{(l')}$ , is computed by taking the difference between the last token representations of two fixed language forcing

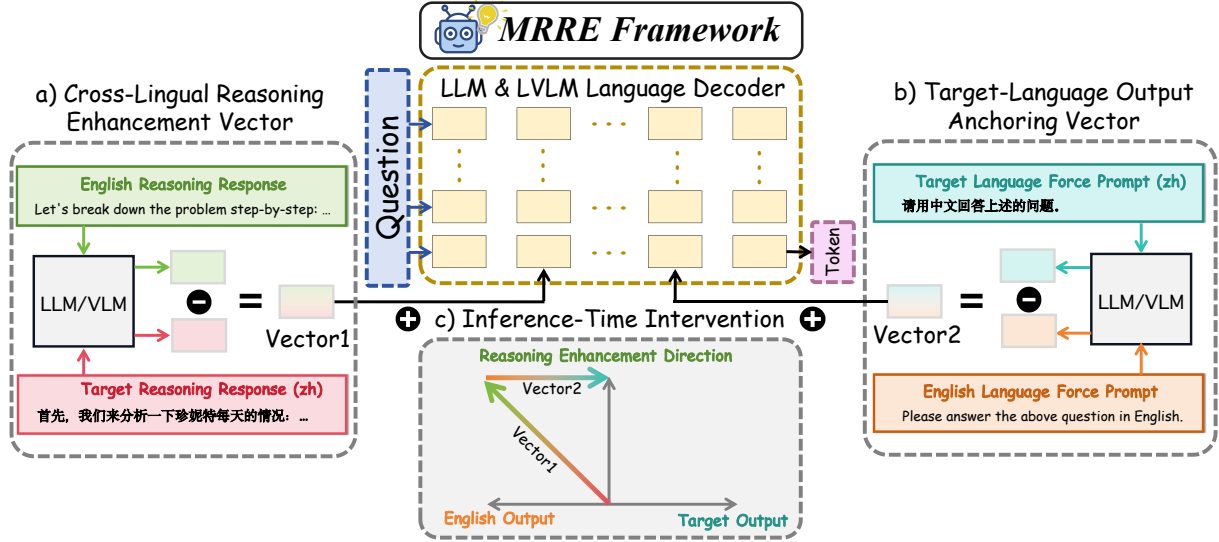


Figure 3: An overview of our proposed MRRE method. Each rectangle represents the model’s hidden state during the forward passing. MRRE consists of three key stages: **a) Cross-Lingual Reasoning Enhancement Vectors** §3.2 are derived from the hidden state differences between English and non-English reasoning responses. **b) Target-Language Output Anchoring Vectors** §3.3 are derived from the hidden state differences between non-English and English language forcing prompts. **c) Hierarchical Inference-Time Intervention** §3.4: Precomputed vectors are sequentially injected into the last-token representations at specific layers during forward passing, thereby enhancing non-English reasoning capabilities while preserving input-output language consistency.

prompts:  $P_{\mathcal{T}}$  ("Please answer this question in  $\langle target\ language \rangle$ " translated into  $\langle target\ language \rangle$ ), and  $P_{\mathcal{E}}$  ("Please answer this question in English"):

$$\mathbf{v}_a^{(l')} = \mathbf{h}^{(l')}(P_{\mathcal{T}}, t_{last}) - \mathbf{h}^{(l')}(P_{\mathcal{E}}, t_{last}). \quad (4)$$

This vector provides a precise estimate of the hidden state distribution shift from English to the target language, enabling the model to recover output target-language distribution in later layers and ensuring input-output language consistency.

### 3.4 Hierarchical Inference-Time Intervention

Considering the autoregressive decoding mechanism of language models, we propose a two-stage, hierarchical inference-time intervention method. First we apply *cross-lingual enhancement vectors* to the last token of the current reasoning response at middle layer, steering non-English hidden state  $\mathbf{h}_t^{(l')}$  to an English-like hidden state  $\tilde{\mathbf{h}}^{(l')}$ :

$$\hat{\mathbf{h}}^{(l')} = \mathbf{h}^{(l')} + \alpha_1 \cdot \tilde{\mathbf{v}}_r^{(l')}, \tilde{\mathbf{h}}^{(l')} = \hat{\mathbf{h}}^{(l')} \cdot \frac{\|\mathbf{h}^{(l')}\|_2}{\|\hat{\mathbf{h}}^{(l')}\|_2}, \quad (5)$$

where  $\alpha_1$  denotes scaling coefficients and  $\|\cdot\|$  represents the  $\ell_2$  norms of the activation vectors. The normalization strategy ensures that the vector scale remains consistent before and after intervention, preventing undesired magnitude shifts that may distort downstream representations.

The model exhibits English-level reasoning capability from middle to later layers as if processing an English problem, producing English output hidden states  $\mathbf{h}^{(l')}$  at  $l'$ -th layer. Then we apply the *target-language output anchoring vectors* to steer English output hidden state back to the target  $\tilde{\mathbf{h}}^{(l')}$ :

$$\hat{\mathbf{h}}^{(l')} = \mathbf{h}^{(l')} + \alpha_2 \cdot \tilde{\mathbf{v}}_a^{(l')}, \tilde{\mathbf{h}}^{(l')} = \hat{\mathbf{h}}^{(l')} \cdot \frac{\|\mathbf{h}^{(l')}\|_2}{\|\hat{\mathbf{h}}^{(l')}\|_2}, \quad (6)$$

Finally, the newly generated token is then appended to the current input sequence. In the middle layers, the hidden state of updated input sequence can be “translated” into English, activating stronger reasoning capabilities under English-like states; and in later layers, it can be “back-translated” to the target language, ensuring input-output language consistency. This information flow continues until end-of-sequence token is produced.

## 4 Experiments

### 4.1 Experimental Setup

To thoroughly evaluate our proposed MRRE’s performance and generalization across models and languages, we construct systematic experiments. **Baseline Models.** We evaluate our proposed MRRE method on six SOTA models to demonstrate its broad applicability across LLM and LVLMS.

Model	En	Zh	Ja	Es	Ru	Fr	De	Th	Sw	LC	En	Zh	Ja	Es	Ru	Fr	De	Th	Sw	LC
<b>LLMs</b>																				
<b>MGSM</b>											<b>MSVAMP</b>									
Qwen2.5-7B-Instruct	88.8	78.4	65.2	<b>81.2</b>	82.0	77.2	74.8	71.6	12.4	84.7	91.3	88.1	83.6	89.6	85.7	88.4	86.4	79.0	44.9	86.3
+ Few-Shot	-	79.1	66.8	80.2	82.5	77.8	75.6	72.3	14.9	87.6	-	88.6	84.1	<b>90.1</b>	86.2	89.0	87.1	80.4	46.8	88.9
+ SFT	-	76.4	64.9	78.6	80.8	75.9	74.2	70.1	13.7	86.0	-	86.9	82.3	88.7	84.6	87.5	85.9	78.8	45.1	87.4
+ Multilingual-CoT	-	80.6	68.9	80.4	83.9	78.6	77.3	73.9	15.3	82.1	-	88.4	85.2	91.3	86.5	90.0	<b>88.2</b>	81.6	49.3	84.8
+ Language forcing	-	77.2	67.6	79.2	82.0	76.0	76.8	71.6	16.0	92.2	-	86.2	82.0	88.8	85.1	87.8	86.4	79.6	45.7	89.4
+ MRRE	-	<b>81.6</b>	<b>71.2</b>	<b>81.2</b>	<b>84.7</b>	<b>79.2</b>	<b>78.4</b>	<b>74.8</b>	<b>17.2</b>	<b>92.7</b>	-	<b>88.7</b>	<b>84.7</b>	90.0	<b>86.5</b>	<b>90.1</b>	87.4	<b>82.6</b>	<b>52.3</b>	<b>90.3</b>
Qwen3-8B	90.8	80.4	76.4	83.2	88.4	82.4	84.0	85.6	40.4	89.3	91.9	88.1	87.4	90.7	87.0	90.1	89.1	83.1	67.8	89.4
+ Language forcing	-	82.0	76.8	84.0	<b>88.8</b>	79.6	82.0	84.0	37.6	93.2	-	88.6	86.8	90.0	87.7	89.5	88.7	83.1	62.3	91.8
+ MRRE	-	<b>84.7</b>	<b>81.4</b>	<b>84.2</b>	<b>88.8</b>	<b>84.1</b>	<b>85.5</b>	<b>86.0</b>	<b>45.8</b>	<b>95.6</b>	-	<b>89.1</b>	<b>88.2</b>	<b>90.9</b>	<b>88.3</b>	<b>90.3</b>	<b>89.4</b>	<b>85.4</b>	<b>73.4</b>	<b>92.5</b>
Llama-3.1-8B-Instruct	77.2	61.2	38.0	64.8	53.2	63.6	67.2	54.4	44.8	95.3	78.4	65.7	53.8	71.4	56.6	76.4	72.9	55.8	50.8	94.9
+ Language forcing	-	57.6	44.8	63.6	62.4	68.0	66.4	53.2	45.6	95.1	-	58.5	59.0	71.5	<b>66.0</b>	73.0	69.9	56.5	50.5	95.1
+ MRRE	-	<b>66.6</b>	<b>47.7</b>	<b>68.7</b>	<b>64.5</b>	<b>70.0</b>	<b>71.2</b>	<b>64.3</b>	<b>53.9</b>	<b>96.6</b>	-	<b>70.6</b>	<b>64.3</b>	<b>73.2</b>	65.4	<b>76.4</b>	<b>74.2</b>	<b>63.9</b>	<b>57.6</b>	<b>96.4</b>
<b>LVLMS</b>																				
<b>MMathVerse</b>											<b>MMathVista</b>									
Qwen2.5-VL-7B-Instruct	45.4	38.4	36.4	42.5	39.6	38.1	36.5	32.0	16.4	92.5	67.2	58.1	52.0	62.2	57.9	59.6	58.2	51.1	16.7	94.1
+ Few-Shot	-	45.3	40.0	45.2	44.1	42.7	43.1	35.5	23.0	92.6	-	56.9	57.4	60.9	59.7	61.6	56.9	52.7	34.8	94.0
+ SFT	-	34.0	33.4	33.9	34.5	30.4	31.7	28.3	17.0	92.7	-	51.5	49.1	54.3	54.7	53.9	51.7	44.9	18.2	94.5
+ Multilingual-CoT	-	44.9	42.0	46.7	44.5	44.9	44.0	37.8	22.4	90.4	-	61.7	57.4	63.9	62.5	59.7	61.2	52.8	30.3	92.6
+ Language forcing	-	36.8	37.7	43.6	40.6	39.6	40.0	43.5	17.8	91.8	-	60.0	53.0	61.2	58.3	59.4	56.9	53.7	10.1	94.4
+ MRRE	-	<b>45.9</b>	<b>44.6</b>	<b>47.5</b>	<b>44.6</b>	<b>45.8</b>	<b>45.7</b>	<b>48.4</b>	<b>33.8</b>	<b>93.1</b>	-	<b>62.3</b>	<b>61.1</b>	<b>64.2</b>	<b>62.8</b>	<b>61.2</b>	<b>64.1</b>	<b>57.3</b>	<b>28.6</b>	<b>95.5</b>
LLaVA-Onevision-7B	29.9	28.9	25.8	29.2	26.2	26.8	25.3	23.5	11.3	76.9	61.9	51.1	43.7	<b>58.0</b>	49.2	55.8	48.0	41.7	16.3	75.0
+ Language forcing	-	26.6	22.7	25.9	22.9	20.3	22.0	26.3	4.0	<b>77.8</b>	-	44.6	38.6	45.1	41.1	41.8	37.1	26.7	10.8	78.4
+ MRRE	-	<b>32.9</b>	<b>30.0</b>	<b>30.0</b>	<b>28.2</b>	<b>30.0</b>	<b>29.5</b>	<b>26.5</b>	<b>19.1</b>	<b>77.8</b>	-	<b>52.3</b>	<b>48.2</b>	57.0	<b>55.7</b>	<b>56.6</b>	<b>54.7</b>	<b>48.3</b>	<b>32.1</b>	<b>80.3</b>
InternVL3.5-VL-8B-Chat	57.6	52.3	48.9	52.3	49.0	48.5	46.6	34.4	32.3	76.3	72.2	59.7	60.2	67.9	68.7	67.9	68.7	62.5	40.6	79.6
+ Language forcing	-	54.7	50.8	51.4	49.4	49.1	49.8	35.5	36.3	<b>84.2</b>	-	62.4	61.1	64.1	62.9	61.5	64.1	57.8	34.8	85.6
+ MRRE	-	<b>55.6</b>	<b>51.2</b>	<b>53.3</b>	<b>50.1</b>	<b>50.3</b>	<b>52.3</b>	<b>44.6</b>	<b>42.3</b>	81.9	-	<b>63.5</b>	<b>66.9</b>	<b>70.7</b>	<b>70.5</b>	<b>70.1</b>	<b>69.2</b>	<b>66.3</b>	<b>46.6</b>	<b>86.4</b>

Table 1: Accuracy (%) and Language Consistency (LC, %) of three advanced LLMs and three advanced LVLMS with different settings across 8 languages (Zh, Ja, Es, Ru, Fr, De, Th, Sw) and 4 reasoning benchmarks: *MGSM*, *MSVAMP*, *MMathVerse*, *MMathVista*. Best performances for each experimental settings are **bolded**.

Model	<i>MMathVerse</i>					<i>MMathVista</i>			
	T-D	T-L	V-I	V-D	V-O	Overall	General	Math	Overall
Qwen2.5-VL-7B	39.9	35.1	32.1	32.5	34.6	34.9	53.5	50.7	52.0
+ Few-Shot	46.2	40.4	37.8	37.2	37.8	39.9	55.0	55.2	55.1
+ SFT	35.6	31.6	28.5	28.2	28.1	30.4	42.8	48.0	45.8
+ Multilingual-CoT	47.3	41.6	39.9	39.9	40.3	41.8	57.0	55.5	56.2
+ Language forcing	44.0	37.2	34.9	35.1	37.0	37.7	52.6	50.8	51.6
+ MRRE	<b>51.2(+11.3)</b>	<b>45.8(+10.7)</b>	<b>42.2(+10.1)</b>	<b>41.2(+8.7)</b>	<b>41.9(+7.3)</b>	<b>44.5(+9.6)</b>	<b>55.5(+2.0)</b>	<b>58.5(+7.8)</b>	<b>57.1(+5.1)</b>
LLaVA-Onevision-7B	27.5	28.4	24.8	22.6	<b>22.4</b>	24.6	44.7	46.1	45.5
+ Language forcing	28.4	25.7	24.2	19.8	8.5	29.3	21.3	41.0	35.8
+ MRRE	<b>37.4(+9.9)</b>	<b>32.1(+3.7)</b>	<b>30.9(+6.1)</b>	<b>28.3(+5.7)</b>	<b>21.2(-1.2)</b>	<b>30.0(+5.4)</b>	<b>48.6(+3.9)</b>	<b>52.3(+6.2)</b>	<b>50.6(+5.1)</b>
InternVL3.5-8B	48.3	41.4	33.3	39.4	37.5	40.1	62.0	61.0	61.5
+ Language forcing	47.8	40.3	36.1	38.1	41.7	40.8	60.8	61.8	61.4
+ MRRE	<b>53.0(+4.7)</b>	<b>47.2(+5.8)</b>	<b>41.7(+8.4)</b>	<b>44.3(+4.9)</b>	<b>48.0(+10.5)</b>	<b>46.8(+6.7)</b>	<b>65.3(+3.3)</b>	<b>64.0(+3.0)</b>	<b>63.8(+2.3)</b>

Table 2: Mean performance (%) of three advanced LVLMS with diverse experimental settings across 8 languages (Zh, Ja, Es, Ru, Fr, De, Th, Sw) and 2 benchmarks: *MMathVerse* (*Text-Dominant*, *Text-Lite*, *Vision-Integrated*, *Vision-Dominant*, and *Vision-Only* categories, *Overall*), *MathVista* (*General*, and *Math-related* categories, *Overall*).

**LLMs:** Qwen2.5-7B-Instruct (Team, 2024), Qwen3-8B (Yang et al., 2025), and Llama-3.1-8B-Instruct (Grattafiori et al., 2024).

**LVLMS:** Qwen2.5-VL-7B-Instruct (Team, 2025), LLaVA-OneVision (Li et al., 2024) and InternVL3.5-8B-Chat (Wang et al., 2025a).

**Baseline Methods.** We select several methods that are effective for multilingual reasoning tasks in both LLMs and VLMS, including Few-Shot, SFT, Multilingual-CoT (Barua et al., 2025), and Language forcing (Wang et al., 2025b).

**Benchmarks.** We select four challenging benchmarks to evaluate multilingual reasoning of both LLMs and LVLMS, covering both mathematical and general reasoning capabilities, including *MGSM* (Shi et al., 2022), *MSVAMP* (Chen et al., 2023), *MMathVerse* (Zhang et al., 2024b) and *MMathVista* (Lu et al., 2023).

We adopt *Accuracy* as the evaluation metric. Language Consistency (LC) denotes the proportion of responses generated in the target language.

**Implementation Details.** We randomly sample 100 instances from MGSM and MathVerse to construct MRRE vectors for LLMs and LVLMs, respectively. All experiments are conducted on  $8 \times$  NVIDIA A100 80GB. See Appendix B for details.

## 4.2 Main Results

Based on experimental results presented in Table 1 & 2, we can draw the following key conclusions:

**(1) Effective multilingual reasoning enhancement performance.** MRRE achieves effective performance across high-resource and low-resource non-English languages on LLMs and LVLMs, leading to an average improvement of 5.48% on four benchmarks, **while improving input-output language consistency by 3.78%**. Notably, improvements are significantly enhanced in low-resource languages (Th, Sw) by 7.54%.

**(2) Multimodal generalizability.** MRRE consistently improves performance across purely textual and vision-language reasoning tasks. Notably, results on MMathVerse demonstrate that MRRE enhances reasoning in all five categories, including *Text-Dominant*, *Text-Lite*, *Vision-Integrated*, *Vision-Dominant*, and *Vision-Only* tasks, proving MRRE’s effectiveness regardless of modality composition.

**(3) Cross-model generalizability.** By systematically evaluating diverse LLM and LVLM backbones, we find that MRRE does not rely on a particular model architecture. In contrast, MRRE benefits from universal cross-lingual difference in hidden states, ensuring broad application across other SOTA open-source models.

**(4) Cross-dataset generalizability.** Although the construction of MRRE vectors relies on reasoning data from MGSM and MMathVerse, these vectors remain effective on out-of-distribution datasets such as MSVAMP and MMathVista, suggesting that the intervention represents a generalizable direction rather merely tailored to a specific dataset. Moreover, the improvement on MMathVista *General* subset indicates that MRRE not only enhances mathematical reasoning, but also strengthens general reasoning capabilities.

## 5 Analysis and Discussions

### 5.1 Analysis of Intervention

To thoroughly visualize the effect of MRRE on hidden states, we conduct a stepwise analysis along

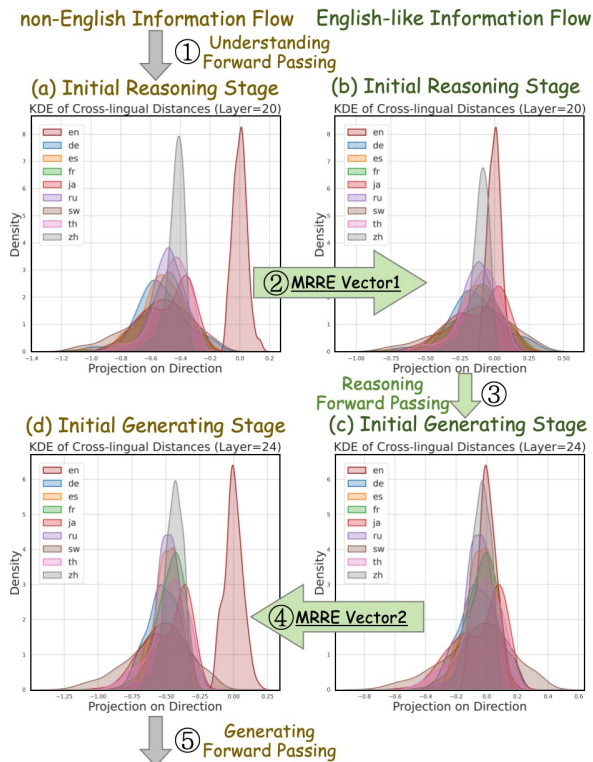


Figure 4: Kernel Density Estimate (KDE) visualization plots of cross-lingual hidden states within Qwen2.5-7B-Instruct before and after two types of intervention. The x-axis represents the SVM-derived signed distance to the mean English representation; and the y-axis represents the estimated probability density.

the information flow of token generation: ① the model first receives non-English input and undergoes understanding forward passing until the initial reasoning stage. As shown in Figure 4 (a), we observe a significant difference between English and non-English representations in the latent space. Moreover, since Qwen2.5-7B-Instruct is trained on large amounts of English and Chinese data, the hidden states of these two high-resource languages exhibit much more densely clustered than others. ② Under the intervention of the *cross-lingual enhancement vectors*, as shown in Figure 4 (b) non-English hidden states shift closer to English. ③ The English-like states then undergo reasoning forward passing until initial generating stage critical for language outputs. At this stage, the model reasons as if it were processing an English query, ultimately producing English-like representations. As illustrated in Figure 4 (c), English and non-English hidden states become highly aligned. ④ Under the intervention of the *target-language output anchoring vectors*, as shown in Figure 4 (d), the hidden states restore the standard output distribution of the

Model	Zh	Ja	Es	Ru	Fr	De	Th	Sw
Qwen2.5-7B as <i>Language Backbone</i>								
Qwen2.5-VL-7B	58.1	52.0	62.2	57.9	59.6	58.2	51.1	16.7
+ MRRE <i>Vanilla</i>	<b>62.3</b>	<b>61.1</b>	<b>64.2</b>	<b>62.8</b>	61.2	<b>64.1</b>	<b>57.3</b>	28.6
+ MRRE <i>L-B</i>	58.9	55.7	62.0	59.6	<b>61.4</b>	62.7	54.9	<b>33.1</b>
Qwen3-8B as <i>Language Backbone</i>								
InternVL3.5-8B	59.7	60.2	67.9	68.7	67.9	68.7	62.5	40.6
+ MRRE <i>Vanilla</i>	<b>63.5</b>	<b>66.9</b>	<b>70.7</b>	<b>70.5</b>	<b>70.1</b>	69.2	<b>66.3</b>	46.6
+ MRRE <i>L-B</i>	61.2	62.1	68.5	69.0	68.8	<b>69.4</b>	64.5	<b>49.4</b>

Table 3: Performance (%) of the MathVista benchmark across languages. *Vanilla* represents standard MRRE method, and *L-B* represents MRRE method using vectors from responding LVLN’s *Language Backbone*.

Model	Zh	Ja	Es	Ru	Fr	De	Th	Sw
LLM on MGSM								
Qwen2.5-7B	78.4	65.2	<b>81.2</b>	82.0	77.2	74.8	71.6	12.4
+ MRRE <i>Vanilla</i>	81.6	<b>71.2</b>	<b>81.2</b>	<b>84.7</b>	<b>79.2</b>	<b>78.4</b>	74.8	17.2
+ MRRE <i>Debias</i>	<b>83.2</b>	68.8	<b>81.2</b>	83.6	77.2	77.2	<b>76.4</b>	<b>19.2</b>
LVLM on MMathVista								
Qwen2.5-VL-7B	58.1	52.0	62.2	57.9	59.6	58.2	51.1	16.7
+ MRRE <i>Vanilla</i>	<b>62.3</b>	<b>61.1</b>	<b>64.2</b>	<b>62.8</b>	<b>61.2</b>	<b>64.1</b>	<b>57.3</b>	<b>28.6</b>
+ MRRE <i>Debias</i>	54.3	48.0	56.6	54.4	54.8	56.1	48.5	11.9

Table 4: Performance (%) of the MGSM and MMathVista benchmark across languages. *Vanilla* represents standard MRRE method, and *Debias* represents MRRE method using *latent english debiasing vectors*.

target language, ensuring input and output language consistency. ⑤ Finally, the anchored hidden states continue forward passing until generate the next token in target language. This lifetime visualization of token generation demonstrates that MRRE achieves the foundational motivation we set forth.

## 5.2 Cross-modal Generalization of Vectors

In this subsection, we thoroughly explore the cross-modal generalization of MRRE vectors. LVLNs are trained by a *Language Backbone (L-B)* LLM jointly with a specific visual encoder, which results in high similarity between their output hidden states in the latent space. Furthermore, current language backbone LLMs exhibit stronger reasoning capabilities than corresponding LVLNs (Chen et al., 2025). Building on these two observations, we hypothesize that cross-lingual reasoning enhancement vectors derived from language backbones can also enhance reasoning capability of LVLNs. To validate this hypothesis, we conduct experiments with Qwen2.5-VL-7B-Instruct and InternVL3.5-8B, replacing the cross-lingual reasoning enhancement vectors with those vectors derived from their language backbone, Qwen2.5-7B-Instruct and Qwen3-8B. As shown in Table 3, MRRE *L-B* consistently improves the reasoning performance across all non-English languages. Remarkably, MRRE *L-B* even surpasses MRRE *Vanilla* in French and Swahili. These findings indicate that vectors from language backbones generalize well to LVLNs, highlighting MRRE’s cross-modal generalization capability. They also suggest that LVLNs inherit multilingual reasoning capabilities from their language backbones LLMs to some extent, leading to similar multilingual shift directions.

## 5.3 Mitigating English Bias in Latent Space

In this subsection, we further explore how to enhance multilingual reasoning capabilities during the understanding forward passing. Prior study (Zhao et al., 2024) indicates that hidden states encode low-level semantic representations and exhibit strong linguistic characteristics at this stage. Since a substantial portion of the training data is in English, when the model processes non-English queries, the hidden-state distribution during forward passing tends to shift toward the default English distribution. We hypothesize these shifts in early layers may distort the encoded low-level semantic representations, leading to performance drops. To address this issue, we introduce an alternative multilingual reasoning enhancement method, which only leverages the *cross-lingual enhancement vectors* in an reversed direction. We denote these vectors as the *latent english debiasing vectors*, designed to mitigate English bias in latent space during understanding forward passing:

$$\mathbf{v}_{debias}^{(l)} = -\frac{1}{|\mathcal{X}|} \sum_{x \in \mathcal{X}} \Delta \mathbf{h}_x^{(l)}. \quad (7)$$

To validate this hypothesis, we conduct experiments with Qwen2.5-7B-Instruct and Qwen2.5-VL-7B-Instruct and apply *latent english debiasing vectors* for each model. As illustrated in Table 4, the MRRE *Debias* method consistently improves cross-lingual performance on the Qwen2.5-7B-Instruct across all evaluated languages, and even surpasses the vanilla MRRE *Vanilla* on Chinese, Thai, and Swahili. However, when applied to the Qwen2.5-VL-7B-Instruct, MRRE *Debias* exhibits a consistent performance decline. According to prior study (Ye et al., 2025), we posit that LVLNs rely predom-

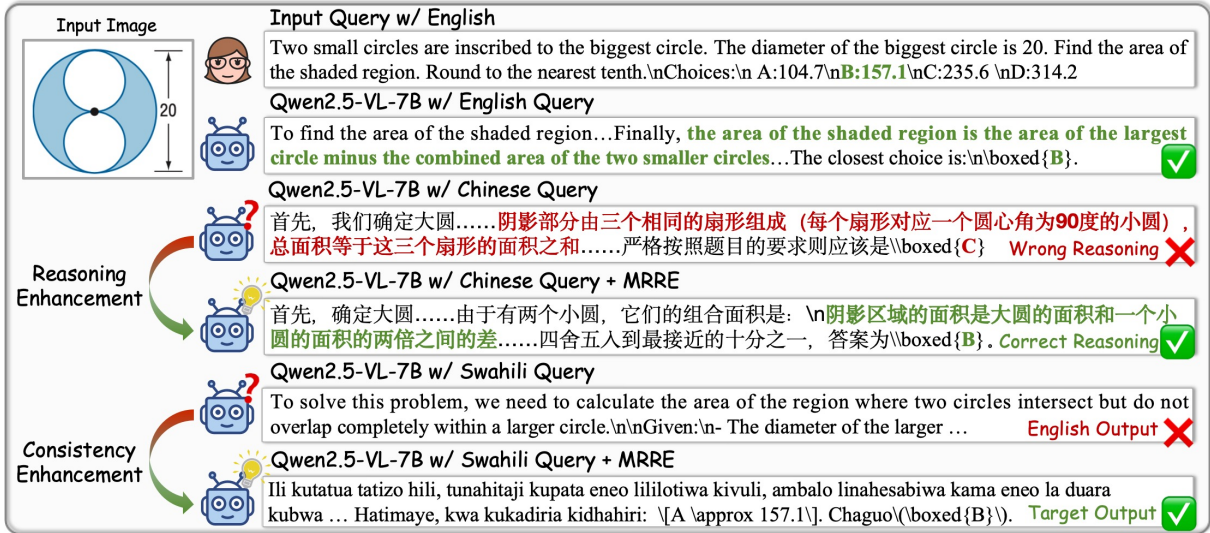


Figure 5: Case study of Qwen2.5-VL-7B-Instruct on the MathVerse benchmark.

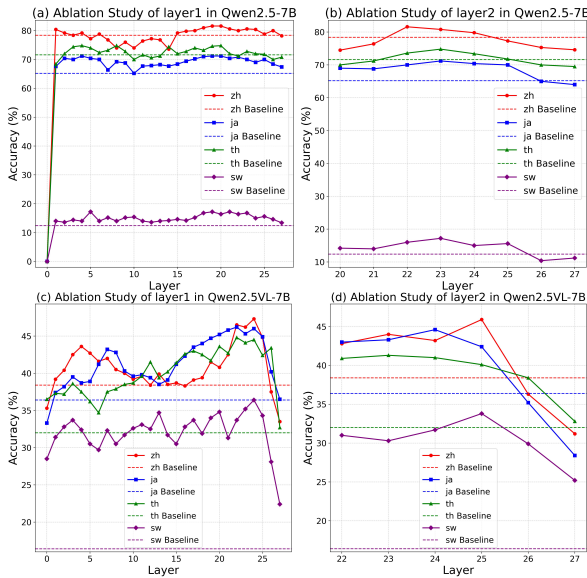


Figure 6: Analysis of layer selections of MRRE.

Model	Zh	Ja	Es	Ru	Fr	Th	Sw	LC
Qwen2.5-7B	78.4	65.2	81.2	82.0	77.2	71.6	12.4	84.7
+ MRRE <i>Vector1</i>	<b>83.2</b>	<b>73.7</b>	<b>82.3</b>	<b>85.2</b>	<b>80.1</b>	<b>75.2</b>	<b>19.2</b>	26.2
+ MRRE <i>Vanilla</i>	81.6	71.2	81.2	84.7	79.2	74.8	17.2	<b>92.7</b>
Qwen2.5VL-7B	58.1	52.0	62.2	57.9	59.6	51.1	16.7	94.1
+ MRRE <i>Vector1</i>	<b>63.4</b>	<b>62.3</b>	<b>64.9</b>	<b>64.2</b>	<b>63.9</b>	<b>62.5</b>	<b>35.4</b>	30.0
+ MRRE <i>Vanilla</i>	62.3	61.1	64.2	62.8	61.2	57.3	28.6	<b>95.5</b>

Table 5: Ablation studies of MRRE vectors.

achieves the next optimal boost. LVLMs exhibit a similar pattern, with the optimal layers being 22 and 24, respectively. As shown in Table 5, the second vector exhibits a trade-off strategy, which decreases little reasoning capabilities but significantly increases the consistency. Furthermore, we find MRRE achieves optimal results when  $\alpha_1 = 1$  and  $\alpha_2 = 0.75$ . See Appendix B.3 for more ablation studies of intervention strengths  $\alpha_1$  and  $\alpha_2$ .

## 5.5 Case Study

As shown in Figure 5, MRRE enhances non-English reasoning capability while maintaining input-output consistency. See more in Appendix C.

## 6 Conclusion

We propose a training-free inference-time method to enhance Multilingual Reasoning capabilities via Representation Engineering (MRRE), which applies cross-lingual reasoning enhancement vectors and target-language output anchoring vectors sequentially at specific layers of LLMs and LVLMs during forward passing. Comprehensive results demonstrate its effectiveness and generalizability.

inantly on English data during the image–text alignment stage of pre-training, which ends English with stronger multimodal representations. Consequently, injecting *latent english debiasing vectors* into non-English hidden states disrupts multimodal representations, leading to performance drops.

## 5.4 Analysis of Hyperparameters

This subsection systematically examines the influence of the intervention layer1  $l$  and layer2  $l'$  for two designed vectors, respectively. As shown in Figure 6, applying the first MRRE vector near layer 20 yields the best improvement in the model’s reasoning ability. Given the first intervention at layer 20, applying the second vector near layer 23

469  
470  
471  
472  
473  
474  
475  
  
476  
  
477  
478  
479  
480  
481  
  
482  
483  
484  
  
485  
486  
487  
488  
  
489  
490  
491  
492  
493  
  
494  
495  
496  
497  
498  
  
499  
500  
501  
502  
503  
  
504  
505  
506  
507  
508  
  
509  
510  
511  
512  
513  
  
514  
515  
516  
517  
518

## Limitations

One limitation of our work is that MRRE requires access to the internal representations of the model, making it infeasible for closed-source LLMs or LVLMs. Furthermore, due to the constraints of cost and resources, we only conduct experiments on these widely used benchmarks and models.

## References

Gaurav Arora, Srjana Merugu, Shreya Jain, and Vaibhav Saxena. 2024. Towards robust knowledge representations in multilingual llms for equivalence and inheritance based consistent reasoning. *arXiv preprint arXiv:2410.14235*.

Josh Barua, Seun Eisape, Kayo Yin, and Alane Suhr. 2025. [Long chain-of-thought reasoning across languages](#).

Nuo Chen, Zinan Zheng, Ning Wu, Ming Gong, Dongmei Zhang, and Jia Li. 2023. Breaking language barriers in multilingual mathematical reasoning: Insights and observations. *arXiv preprint arXiv:2310.20246*.

Shiqi Chen, Jinghan Zhang, Tongyao Zhu, Wei Liu, Siyang Gao, Miao Xiong, Manling Li, and Junxian He. 2025. Bring reason to vision: Understanding perception and reasoning through model merging. *arXiv preprint arXiv:2505.05464*.

Yuchun Fan, Yongyu Mu, Yilin Wang, Lei Huang, Junhao Ruan, Bei Li, Tong Xiao, Shujian Huang, Xiaocheng Feng, and Jingbo Zhu. 2025. Slam: Towards efficient multilingual reasoning via selective language alignment. *arXiv preprint arXiv:2501.03681*.

Xiang Geng, Ming Zhu, Jiahuan Li, Zhejian Lai, Wei Zou, Shuaijie She, Jiaxin Guo, Xiaofeng Zhao, Yinglu Li, Yuang Li, et al. 2024. Why not transform chat large language models to non-english? *arXiv preprint arXiv:2405.13923*.

Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, et al. 2024. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*.

Zixian Huang, Wenhao Zhu, Gong Cheng, Lei Li, and Fei Yuan. 2024. Mindmerger: Efficiently boosting llm reasoning in non-english languages. *Advances in Neural Information Processing Systems*, 37:34161–34187.

Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. 2024. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*.

Aditi Khandelwal, Utkarsh Agarwal, Kumar Tanmay, and Monojit Choudhury. 2024. Do moral judgment and reasoning capability of llms change with language? a study using the multilingual defining issues test. *arXiv preprint arXiv:2402.02135*.

Huiyuan Lai and Malvina Nissim. 2024. mcot: Multilingual instruction tuning for reasoning consistency in language models. *arXiv preprint arXiv:2406.02301*.

Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei Liu, and Chunyuan Li. 2024. [Llava-onevision: Easy visual task transfer](#). *Preprint*, arXiv:2408.03326.

Chong Li, Shaonan Wang, Jiajun Zhang, and Chengqing Zong. 2023. Improving in-context learning of multilingual generative language models with cross-lingual alignment. *arXiv preprint arXiv:2311.08089*.

Qiming Li, Zekai Ye, Xiaocheng Feng, Weihong Zhong, Weitao Ma, and Xiachong Feng. 2025a. Causal tracing of object representations in large vision language models: Mechanistic interpretability and hallucination mitigation. *arXiv preprint arXiv:2511.05923*.

Qiming Li, Zekai Ye, Xiaocheng Feng, Weihong Zhong, Libo Qin, Ruihan Chen, Baohang Li, Kui Jiang, Yaowei Wang, Ting Liu, et al. 2025b. Cai: Caption-sensitive attention intervention for mitigating object hallucination in large vision-language models. *arXiv preprint arXiv:2506.23590*.

Chaoqun Liu, Wenxuan Zhang, Yiran Zhao, Anh Tuan Luu, and Lidong Bing. 2024. Is translation all you need? a study on solving multilingual tasks with large language models. *arXiv preprint arXiv:2403.10258*.

Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. 2023. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. *arXiv preprint arXiv:2310.02255*.

Yusuke Sakai, Hidetaka Kamigaito, and Taro Watanabe. 2024. mcsqa: Multilingual commonsense reasoning dataset with unified creation strategy by language models and humans. *arXiv preprint arXiv:2406.04215*.

Freda Shi, Mirac Suzgun, Markus Freitag, Xuezhi Wang, Suraj Srivats, Soroush Vosoughi, Hyung Won Chung, Yi Tay, Sebastian Ruder, Denny Zhou, et al. 2022. Language models are multilingual chain-of-thought reasoners. *arXiv preprint arXiv:2210.03057*.

Xinyu Tang, Xiaolei Wang, Zhihao Lv, Yingqian Min, Wayne Xin Zhao, Binbin Hu, Ziqi Liu, and Zhiqiang Zhang. 2025. Unlocking general long chain-of-thought reasoning capabilities of large language models via representation engineering. *arXiv preprint arXiv:2503.11314*.

Qwen Team. 2024. [Qwen2.5: A party of foundation models](#).

574 Qwen Team. 2025. [Qwen2.5-vl](#).

575 Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob  
576 Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz  
577 Kaiser, and Illia Polosukhin. 2017. Attention is all  
578 you need. *Advances in neural information processing*  
579 *systems*, 30.

580 Hongyu Wang, Jiayu Xu, Senwei Xie, Ruiping Wang,  
581 Jialin Li, Zhaojie Xie, Bin Zhang, Chuyan Xiong,  
582 and Xilin Chen. 2024. M4u: Evaluating multilingual  
583 understanding and reasoning for large multimodal  
584 models. *arXiv preprint arXiv:2405.15638*.

585 Weiyun Wang, Zhangwei Gao, Lixin Gu, Hengjun Pu,  
586 Long Cui, Xingguang Wei, Zhaoyang Liu, Linglin  
587 Jing, Shenglong Ye, Jie Shao, et al. 2025a. In-  
588 ternvl3.5: Advancing open-source multimodal mod-  
589 els in versatility, reasoning, and efficiency. *arXiv*  
590 *preprint arXiv:2508.18265*.

591 Yiming Wang, Pei Zhang, Jialong Tang, Haoran Wei,  
592 Baosong Yang, Rui Wang, Chenshu Sun, Feitong  
593 Sun, Jiran Zhang, Junxuan Wu, et al. 2025b. Poly-  
594 math: Evaluating mathematical reasoning in multi-  
595 lingual contexts. *arXiv preprint arXiv:2504.18428*.

596 An Yang, Anfeng Li, Baosong Yang, Beichen Zhang,  
597 Binyuan Hui, Bo Zheng, Bowen Yu, Chang Gao,  
598 Chengen Huang, Chenxu Lv, et al. 2025. Qwen3  
599 technical report. *arXiv preprint arXiv:2505.09388*.

600 Zekai Ye, Qiming Li, Xiaocheng Feng, Libo Qin, Yi-  
601 chong Huang, Baohang Li, Kui Jiang, Yang Xiang,  
602 Zhirui Zhang, Yunfei Lu, et al. 2025. Claim: Mitigat-  
603 ing multilingual object hallucination in large vision-  
604 language models with cross-lingual attention inter-  
605 vention. *arXiv preprint arXiv:2506.11073*.

606 Hongbin Zhang, Kehai Chen, Xuefeng Bai, Yang Xiang,  
607 and Min Zhang. 2024a. Lingularift: An effective two-  
608 stage instruction tuning framework for low-resource  
609 language tasks. *arXiv e-prints*, pages arXiv–2412.

610 Renrui Zhang, Dongzhi Jiang, Yichi Zhang, Haokun  
611 Lin, Ziyu Guo, Pengshuo Qiu, Aojun Zhou, Pan Lu,  
612 Kai-Wei Chang, Yu Qiao, et al. 2024b. Mathverse:  
613 Does your multi-modal llm truly see the diagrams in  
614 visual math problems? In *European Conference on*  
615 *Computer Vision*, pages 169–186. Springer.

616 Yiran Zhao, Wenxuan Zhang, Guizhen Chen, Kenji  
617 Kawaguchi, and Lidong Bing. 2024. How do large  
618 language models handle multilingualism? *Advances*  
619 *in Neural Information Processing Systems*, 37:15296–  
620 15319.

## A Translation Quality

To evaluate the translation quality of our constructed **MMathVerse** and **MMathVista** benchmarks, we sample 500 translated queries from each benchmark for each language and back-translate them into English using Google Translate. The back-translated English queries are then input into LVLMS to test whether their predictions align with those generated from the original English queries. High prediction consistency indicates that the translated data maintains superior benchmark quality. As shown in Table 6, these results demonstrate the reliability of our constructed multilingual dataset.

Lang.	Zh	Ja	Es	Ru	Fr	De	Th	Sw
APC	100.0	100.0	100.0	99.8	100.0	100.0	99.8	99.7

Table 6: Average Predicted Consistency (APC, %) MMathVerse and MMathVista across eight languages.

## B Experimental Details

In this section, we present the experimental details, including inference settings, design of experimental prompts, fine-grained results of MathVerse & MathVista, and ablation of intervention strength.

### B.1 Inference Settings

To ensure that the reasoning parameters are better aligned with reasoning tasks and to guarantee the reproducibility of results, we carefully design inference settings for each model, as shown in Table 7.

Model	Setting
Qwen2.5-7B-Instruct	do_sample=True, temperature=0.7, top_p=0.8, top_k=20
Qwen3-8B	do_sample=True, temperature=0.7, top_p=0.8, top_k=20, enable_thinking=False
Llama-3.1-8B-Instruct	do_sample=True
LLaVA-Onevision-7B	do_sample=True, temperature=0.6
Qwen2.5-VL-7B-Instruct	do_sample=True, temperature=0.1, top_p=0.001, repetition_penalty=1.1
InternVL3.5-VL-8B-Chat	do_sample=True, temperature=0.1, top_p=0.001, repetition_penalty=1.1

Table 7: Inference settings for each LLM and LVLMS.

## B.2 Design of Experimental Prompts

In this section, we provide a detailed description of each type of prompt, along with intended purposes.

**Language Forcing Prompts** are designed to enforce the model to generate outputs in the same language as the input. Following prior work (Wang et al., 2025b), we adopt a similar strategy, with the detailed prompt contents provided in Table 8.

Lang.	Prompts
En	Use English to think and answer.
Zh	使用中文进行思考和回答。
Ja	日本を使って考え、回答してください。
Es	Usa espaol para pensar y responder.
Fr	Utilisez le franais pour penser et r é pondre.
De	Verwende Deutsch, um zu denken und zu antworten.
Sw	Tumia Kiswahili kufikiri na kujibu.

Table 8: Language forcing prompts contents.

**Prompts for MGSM and MSVAMP** These two datasets primarily adopt free-form formats to evaluate the reasoning capabilities of LLMs. As shown in Table 9, we ask the model to first generate reasoning responses and then mark final answers using the `\boxed{}` format.

Lang.	Prompts
En	Please first reason through the problem, then provide the final answer, expressed as a number using the <code>\boxed{}</code> format.
Zh	请首先进行推理，然后给出最后的答案，用 <code>\boxed{}</code> 的形式表示最后的数字。
Ja	まず推理を行ってください。その後、最的な答えを <code>\boxed{}</code> の形式で表示してください。
Es	Por favor, primero realice el razonamiento y luego d é la respuesta final, representando el n ú mero final en forma de <code>\boxed{}</code> .
Fr	Veillez d’abord raisonner, puis donner la r é ponse finale sous la forme <code>\boxed{}</code> .
De	Bitte f ü hren Sie zunchst Ihre berlegungen durch und geben Sie dann die endg ü ltige Antwort an. Verwenden Sie zur Darstellung der endg ü ltigen Zahl die Form <code>\boxed{}</code> .
Sw	Tafadhali fanya hoja kwanza, kisha toa jibu la mwisho kwa kuandika nambari ya mwisho katika umbo la <code>\boxed{}</code> .

Table 9: Reasoning prompts for MGSM and MSVAMP.

**Prompts for MathVerse and MathVista** These two benchmarks are employed to evaluate the reasoning capability of LVLMS, covering two categories of tasks: (1) multiple-choice and (2) free-form. As shown in Table 10, we design tailored reasoning prompts to guide the model’s response for multiple-choice queries. The prompts for free-form are the same as the prompts for MGSM and MSVAMP benchmarks.

Lang. Prompts	
En	Please first conduct reasoning, then answer the question and put the correct option letter into $\boxed{\quad}$ , e.g., $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ , at the end.
Zh	请先进行推理, 然后回答问题, 并在最后将正确的选项字母填入 $\boxed{\quad}$ 中, 例如: $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ .
Ja	まず推を行い、次にに答えて、正しいオプション文字を $\boxed{\quad}$ に入れます。例: $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ , 最後に。
Es	Primero realice el razonamiento, luego responda la pregunta y coloque la letra de la opción correcta en $\boxed{\quad}$ , por ejemplo, $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ , al final.
Fr	Veuillez d’abord effectuer un raisonnement, puis répondre à la question et mettre la lettre d’option correcte dans $\boxed{\quad}$ , par exemple, $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ , à la fin.
De	Bitte führen Sie zuerst eine Argumentation durch, beantworten Sie dann die Frage und setzen Sie am Ende den richtigen Optionsbuchstaben in $\boxed{\quad}$ , z. B. $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ .
Sw	Tafadhali kwanza elekeza hoja, kisha ujibu swali na uweke herufi ya chaguo sahihi kwenye $\boxed{\quad}$ , k.m., $\boxed{A}$ , $\boxed{B}$ , $\boxed{C}$ , $\boxed{D}$ , mwishoni.

Table 10: Multi-choice reasoning prompts for MathVerse and MathVista.

### B.3 Ablation of Intervention Strength

In this subsection, we conduct a detailed analysis of how the intervention strengths  $\alpha_1$  and  $\alpha_2$  influence the performance of MRRE.

We first analyze the intervention strength of the cross-lingual enhancement vectors,  $\alpha_1$ , which aim to align non-English reasoning hidden states with English in the latent space. As shown in Table 11, the optimal performance is achieved when  $\alpha_1 = 1$ , while weaker or stronger interventions fail to minimize the distribution gap in the latent space, limiting the effectiveness of MRRE.

Then we analyze the intervention strength of the cross-lingual enhancement vectors,  $\alpha_2$ , which aim to align English-like generating hidden states with the original non-English in the latent space. As shown in Table 12, the optimal performance is achieved when  $\alpha_2 = 0.75$ , while too weaker interventions may lead to English responses rather than target non-English responses and too strong interventions may result in performance drops in reasoning tasks. Notably,  $\alpha_2$  functions as a trade-off strategy, effectively **balancing multilingual reasoning performance with input-output language consistency**.

$\alpha_1$	0.00	0.25	0.50	0.75	<b>1.00</b>	1.25
Zh	78.4	79.3	80.5	82.3	<b>83.2</b>	82.5
Ja	65.2	67.1	68.3	71.0	<b>73.7</b>	70.8
Th	71.6	72.3	73.1	74.2	<b>75.2</b>	73.9

Table 11: Ablation study of  $\alpha_1$  on MGSM benchmark using Qwen2.5-7B-Instruct. Layer1 is set to be 20.

$\alpha_2$	0.00	0.50	<b>0.75</b>	1.00
Zh	83.2 (26.5)	82.5 (78.7)	<b>81.6 (99.2)</b>	79.5 (99.5)
Ja	73.7 (19.8)	71.9 (69.9)	<b>71.2 (99.1)</b>	70.0 (99.6)
Th	75.2 (7.9)	75.0 (54.1)	<b>74.8 (99.2)</b>	72.1 (99.4)

Table 12: Ablation study of  $\alpha_2$  on MGSM benchmark using Qwen2.5-7B-Instruct. The first numbers denote accuracies (%) and the second numbers denote Language Consistency (LC, %). Layer1 is set to be 20,  $\alpha_1$  is set to be 1.0, and Layer2 is set to be 23.

### B.4 Fine-grained Results of MathVerse and MathVista Benchmarks

To further elucidate how MRRE improves LVLMS reasoning, we perform a fine-grained analysis across eight languages, five visual task families (*text-dominant*, *text-lite*, *vision-integrated*, *vision-dominant*, and *vision-only*), and two domains (*general* and *math*). We disaggregate performance and consistency metrics by language, task category, and domain to identify where MRRE yields the largest gains; results are reported in Tables 13.


### C Fine-grained Case Studies

To better illustrate the improvements in reasoning capabilities and input-output language consistency achieved by MRRE, we provide additional comprehensive case studies.

Model	<i>MMathVerse</i>					<i>MathVista</i>			
	T-D	T-L	V-I	V-D	V-O	Overall	General	Math	Overall
Language-Zh									
Qwen2.5-VL-7B	44.4	39.5	35.5	36.0	36.5	38.4	59.3	57.0	58.1
+ Language forcing	41.8	35.3	33.4	34.6	38.7	36.8	<b>60.8</b>	59.8	60.0
+ MRRE	<b>54.2</b>	<b>47.0</b>	<b>43.8</b>	<b>42.9</b>	<b>41.9</b>	<b>45.9</b>	60.7	<b>63.7</b>	<b>62.3</b>
Language-Ja									
Qwen2.5-VL-7B	42.8	35.3	33.5	34.5	35.0	36.4	55.0	49.4	52.0
+ Language forcing	44.2	39.2	36.8	36.5	39.6	37.7	54.8	51.5	53.0
+ MRRE	<b>51.6</b>	<b>46.2</b>	<b>42.5</b>	<b>42.4</b>	<b>40.5</b>	<b>44.6</b>	<b>59.3</b>	<b>62.6</b>	<b>61.1</b>
Language-Es									
Qwen2.5-VL-7B	49.5	43.5	40.9	38.1	40.4	42.5	63.0	61.5	62.2
+ Language forcing	51.8	43.4	40.5	42.3	40.1	43.6	62.2	60.4	61.2
+ MRRE	<b>55.5</b>	<b>49.5</b>	<b>46.4</b>	<b>45.1</b>	<b>40.7</b>	<b>47.5</b>	<b>64.1</b>	<b>64.3</b>	<b>64.2</b>
Language-Ru									
Qwen2.5-VL-7B	45.1	39.0	35.8	35.8	37.6	38.6	60.4	55.7	57.9
+ Language forcing	46.7	41.2	39.6	38.1	37.4	40.6	61.3	55.7	58.3
+ MRRE	<b>52.0</b>	<b>45.3</b>	<b>41.8</b>	<b>42.3</b>	<b>42.4</b>	<b>44.7</b>	<b>62.8</b>	<b>62.8</b>	<b>62.8</b>
Language-Fr									
Qwen2.5-VL-7B	43.0	38.6	35.8	36.8	36.4	38.1	61.5	58.0	59.6
+ Language forcing	46.6	40.0	36.9	36.5	37.9	39.6	61.1	58.0	59.4
+ MRRE	<b>51.9</b>	<b>47.5</b>	<b>44.7</b>	<b>42.0</b>	<b>42.9</b>	<b>45.8</b>	<b>62.2</b>	<b>60.2</b>	<b>61.2</b>
Language-De									
Qwen2.5-VL-7B	42.5	38.2	32.5	33.4	36.0	36.5	58.9	57.6	58.2
+ Language forcing	50.5	39.0	35.3	36.9	38.2	40.0	56.1	57.6	56.9
+ MRRE	<b>52.9</b>	<b>47.0</b>	<b>42.9</b>	<b>43.8</b>	<b>41.6</b>	<b>45.7</b>	<b>63.5</b>	<b>64.6</b>	<b>64.1</b>
Language-Th									
Qwen2.5-VL-7B	36.8	33.1	31.2	31.2	27.5	32.0	52.0	50.4	51.1
+ Language forcing	50.3	43.8	41.8	40.6	41.0	43.5	55.9	51.9	53.7
+ MRRE	<b>56.7</b>	<b>51.0</b>	<b>43.8</b>	<b>43.8</b>	<b>46.9</b>	<b>48.4</b>	<b>58.7</b>	<b>55.8</b>	<b>57.3</b>
Language-Sw									
Qwen2.5-VL-7B	15.1	13.8	11.8	14.0	27.3	16.4	17.6	15.9	16.7
+ Language forcing	20.1	16.0	15.0	15.0	22.8	17.8	8.7	11.3	10.1
+ MRRE	<b>34.4</b>	<b>32.5</b>	<b>31.6</b>	<b>32.4</b>	<b>38.2</b>	<b>33.8</b>	<b>20.4</b>	<b>35.6</b>	<b>28.6</b>

Table 13: Fine-grained Results on Qwen2.5-VL-7B-Instruct across eight languages.

### Input Image

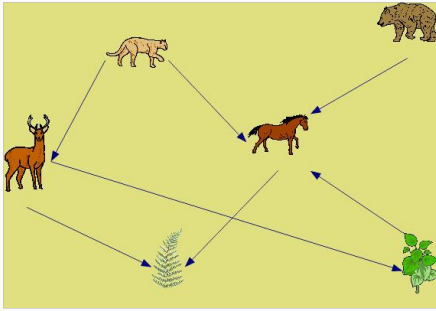

### Input Query w/ English

In the diagram of the food web shown what will most directly be affected by the loss of the trees?

Choices:

- (A) horses
- (B) cats
- (C) nothing
- (D) bears



### Qwen2.5-VL-7B w/ Es Query

Para responder esta pregunta, debemos analizar cómo los árboles están conectados en la red trófica mostrada. Los árboles son una fuente de alimento para los animales herbívoros. En este diagrama, los animales herbívoros son los ciervos (que comen hojas de árbol). Los caballos también comen hojas de árbol, pero no están directamente conectados a los árboles como lo están los ciervos. Los gatos y los osos no tienen conexión directa con los árboles en este diagrama. Por lo tanto, la pérdida de árboles tendrá un impacto más directo en los ciervos, ya que son los únicos animales que dependen directamente de los árboles como fuente de alimentación. La respuesta correcta es: **B**.



### Qwen2.5-VL-7B+MRRE w/ Es Query

Para determinar qué organismo se verá más directamente afectado por la pérdida de árboles en el diagrama de la red alimentaria dada, necesitamos analizar las flechas que van desde los árboles hacia otros organismos. Estas flechas indican la dirección del flujo de energía y quién consume a quién. Los árboles tienen flechas que apuntan hacia ellos desde los ciervos y las plantas, lo que indica que estos organismos consumen los árboles. Hay una flecha que va desde los árboles hacia las plantas, lo que sugiere que las plantas también consumen los árboles. Las plantas tienen flechas que apuntan hacia los caballos, lo que indica que los caballos consumen las plantas. Los caballos tienen una flecha que apunta hacia los osos, lo que indica que los osos consumen a los caballos. Los gatos tienen una flecha que apunta hacia los ciervos, lo que indica que los ciervos consumen a los gatos. Los osos no tienen ninguna flecha que apunte hacia ellos desde los árboles, por lo que no se ven directamente afectados por la pérdida de árboles. A partir de este análisis, está claro que las plantas se ven directamente afectadas por la pérdida de árboles porque hay una flecha que va desde los árboles hacia las plantas. Sin embargo, dado que la pregunta pide el organismo que se verá más directamente afectado, y las plantas son consumidas por los caballos, los caballos se verán afectados indirectamente a través de las plantas. Por lo tanto, la respuesta es: **A**.



### Qwen2.5-VL-7B w/ Ru Query

Для ответа на этот вопрос нужно внимательно рассмотреть схему пищевой цепи. Деревья являются основным источником питания для травоядных животных (лошадь и олень). Лошадь и олень, в свою очередь, становятся пищей для хищников (кошка). Таким образом, если исчезнут деревья, то это приведет к недостатку пищи для лошадей и оленей, а следовательно, и для кошек. Медведи не указаны в этой пищевой цепи как потребители растительной пищи. Ответ: **C**.




### Qwen2.5-VL-7B+MRRE w/ Ru Query

Чтобы определить ответ на этот вопрос, нам нужно проанализировать пищевую сеть, изображённую на рисунке, и понять, какой организм напрямую пострадает от исчезновения деревьев (продуцентов в основании пищевой сети). Определение продуцентов: Растения в нижней части диаграммы представляют собой основных продуцентов, таких как деревья и кустарники. Определение прямых потребителей: Организмы, которые питаются этими продуцентами, — это травоядные, в частности лошади и, возможно, другие мелкие животные, не показанные на схеме, но подразумеваемые из контекста. Определение хищников: Хищники на диаграмме включают кошку и медведя, которые охотятся на травоядных, таких как лошадь. Учитывая эту информацию, если деревья исчезнут, прямое воздействие будет на травоядных, которые зависят от них в питании. В данной диаграмме таким травоядным является лошадь. Таким образом, правильный ответ: **A**.

Figure 7: Case study of *General* problem on Qwen2.5-VL-7B-Instruct.

### Input Image

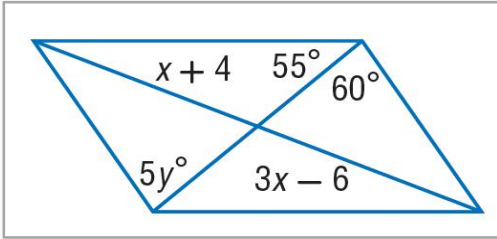

### Input Query w/ English

Find  $x$  so that the quadrilateral is a parallelogram.

Choices:

A:3

B:5

C:12

D:18



### Qwen2.5-VL-7B w/ Chinese Query

为了判断这个图形是否是一个平行四边形，我们需要利用平行四边形的性质和角度关系。

首先，我们知道平行四边形对角相等且邻角互补（即两个相邻的角度之和等于180度）。

观察图中的角度信息：一个角是  $60^\circ$ ，另一个与它相邻的角是  $55^\circ + (x+4)$  或者  $3x - 6$ ，因为它们是平行线上的同旁内角，所以这两个角应该互补，即  $60^\circ + [55^\circ + (x+4)] = 180^\circ$  或者  $60^\circ + [(3x - 6)] = 180^\circ$ 。

我们来解第一个方程：

$$60^\circ + 55^\circ + (x + 4) = 180^\circ$$

$$119^\circ + x + 4 = 180^\circ$$

$$x + 123 = 180^\circ$$

$$x = 180^\circ - 123^\circ$$

$$x = 57^\circ - 123^\circ$$

显然，上面的计算有误，因为我们没有正确地应用补角的概念。实际上，我们应该直接使用第二个方程来解决这个问题，因为它更直接反映了一个邻角的关系。

现在考虑第二个方程：

$$60^\circ + (3x - 6) = 180^\circ$$

$$60^\circ + 3x - 6 = 180^\circ$$

$$3x + 54 = 180^\circ$$

$$3x = 180^\circ - 54^\circ$$

$$3x = 126^\circ$$

$$x = 42^\circ$$

但是，根据题目给出的答案选项来看，我们的目标是找到一个合适的  $x$  值使得图形成为平行四边形。因此，我们需要重新审视原始条件并确保选择正确的答案。考虑到题目提供的选项，我们可以尝试验证每个选项是否满足条件。但基于上述分析，最近的答案应该是通过验证选项得出的。

最终答案应为 **D**。



### Qwen2.5-VL-7B+MRRE w/ Chinese Query

为了确定使给定四边形成为平行四边形的  $x$  的值，我们需要利用平行四边形的性质。具体来说，在平行四边形中，**对边长度相等**。

已知边长为  $(x + 4)$ 、 $(5y)$ 、 $(3x - 6)$ ，以及另一条未标记但可根据问题设置推断的边，我们需要根据对边相等的性质来建立方程。

从图表中，我们有：

- 一条边是  $(x + 4)$ 。

- 其对边是  $(3x - 6)$ 。

将这两个表达式设为相等，得到：

$$x + 4 = 3x - 6$$

现在，求解  $x$ ：

1. 两边同时减去  $(x)$ ：

$$4 = 2x - 6$$

2. 两边同时加上 6：

$$10 = 2x$$


3. 两边同时除以 2：

$$x = 5$$

因此，使该四边形成为平行四边形的  $x$  的值是 **B**。

Figure 8: Case study of *Text Lite* problem on Qwen2.5-VL-7B-Instruct.

### Input Image



### Input Query w/ English

As shown in the figure, triangle ABC is the inscribed triangle of circle O, angle OAB = 35.0, then the degree of angle ACB is ()

Choices:

- A: 35 °
- B: 55 °
- C: 60 °
- D: 70 °



### Qwen2.5-VL-7B w/ Zh Query

首先，我们知道在圆中，如果一个角的顶点在圆心上，则这个角所对的弧等于该角的一半。  
题目给出的是角OAB = 35.0°，这是一个圆周角，它所对的弧是AB。根据圆周角定理，圆周角等于它所对的圆心角的一半，所以角AOB = 2 \* 角OAB = 2 \* 35.0° = 70.0°。  
接下来，我们需要找出角ACB的度数。由于角ACB是一个圆周角，它所对的弧也是AB。因此，角ACB也等于角AOB的一半，即角ACB = 1/2 \* 角AOB = 1/2 \* 70.0° = 35.0°。  
所以，正确答案是 A: 35°。




### Qwen2.5-VL-7B+MRRE w/ Zh Query

为了解决这个问题，我们需要利用圆和三角形的性质。  
1. 确定已知条件：三角形ABC内接于圆O，角OAB = 35°。  
2. 理解圆心角与内接角的关系：内接角的度数等于它所对的圆心角度数的一半。  
3. 在本题中，角ACB是一个内接角，它所对的弧与圆心角AOB相同。  
4. 求角AOB的度数：因为角OAB属于三角形OAB，且已知OA = OB（都是圆的半径），所以三角形OAB是等腰三角形，且角OAB = 角OBA = 35°。因此，三角形OAB的内角和应为180°：  
 $\angle AOB + \angle OAB + \angle OBA = 180^\circ$   
代入已知数值：  
 $\angle AOB + 35^\circ + 35^\circ = 180^\circ$   
化简：  
 $\angle AOB + 70^\circ = 180^\circ$   
解得：  
 $\angle AOB = 110^\circ$   
5. 求角ACB的度数：因为角ACB是一个内接角，它所对的弧与圆心角AOB相同，所以角ACB的度数是角AOB的一半：  
 $\angle ACB = \frac{1}{2} \times \angle AOB$   
代入角AOB的数值：  
 $\angle ACB = \frac{1}{2} \times 110^\circ = 55^\circ$   
因此，正确答案是：B: 55°

Figure 9: Case study of Text Dominant problem on Qwen2.5-VL-7B-Instruct.

### Input Image



### Input Query w/ English

In  $\odot P$ , find the length of  $\widehat{RS}$ . Round to the nearest hundredth.

Choices:

- A:2.27
- B:3.91
- C:4.54
- D:7.82



### Qwen2.5-VL-7B w/ Ja Query

この問題では、円周角の定理と弧の長さの公式を使用します。  
 1. **円周角の定理**: 円周角は中心角の半分になります。つまり、 $\angle RPS = \frac{1}{2} \times 130^\circ = 65^\circ$  です。  
 2. **弧の長さの公式**: 弧の長さ  $L$  は、次の式で計算できます:  
 $L = r \theta$   
 ここで、 $r$  は半径、 $\theta$  は中心角 (ラジアン) です。  
 $r = 2$ 、中心角  $\theta = 65^\circ$  をラジアンに変換します。  
 $1^\circ = \frac{\pi}{180}$  ラジアンなので、  
 $\theta = 65^\circ \times \frac{\pi}{180} = \frac{65\pi}{180} = \frac{13\pi}{36}$   
 $L = 2 \times \frac{13\pi}{36} = \frac{26\pi}{36} = \frac{13\pi}{18}$   
 約数を計算すると、  
 $\frac{13\pi}{18} \approx \frac{13 \times 3.1416}{18} \approx \frac{40.8708}{18} \approx 2.2706$   
 小数点第1位を四捨五入すると約 2.3 ですが、最も近い選択肢は A:2.27 です。  
 したがって、答えは **A** です。




### Qwen2.5-VL-7B+MRRE w/ Ja Query

円  $\odot P$  でアーク RS の長さを見つけるには、中央の角度とそれが切断するアークの関係を使用する必要があります。弧の測定は、その対応する中央角に比例します。アークの長さの公式は:  
 $L = \frac{\theta}{360^\circ} \times 2\pi r$   
 ここで、 $\theta$  は中央角度の測定値、 $r$  は円の半径です。ダイアグラムから、中心角  $\angle RPS$  は  $130^\circ$  として与えられていることがわかります。半径  $r$  は 2 単位として与えられます。これらの値を公式に置き換える:  
 $L = \frac{130^\circ}{360^\circ} \times 2\pi \times 2$   
 表現を簡単にします:  
 $L = \frac{130}{360} \times 4\pi$   
 $L = \frac{13}{36} \times 4\pi$   
 $L = \frac{52\pi}{36}$   
 $L = \frac{13\pi}{9}$   
 次に、 $\pi \approx 3.14159$   
 $L \approx \frac{13 \times 3.14159}{9}$   
 $L \approx \frac{40.84477}{9}$   
 $L \approx 4.54$   
 最寄りの100番目にめること (必要に応じて最寄りの10番目にめることが必要であるため。

Figure 10: Case study of Vision Dominant problem on Qwen2.5-VL-7B-Instruct.

### Input Image



### Input Query w/ English

As shown in the figure, angle  $ACB = 25.0$ , then the degree of angle  $BAO$  is ()

Choices:

- A:  $50^\circ$
- B:  $55^\circ$
- C:  $60^\circ$
- D:  $65^\circ$



### Qwen2.5-VL-7B w/ Sw Query

Kuna njia za mbili kuhusu hii. **\*\*Naangalia kutumika namba za maelezo\*\***: Angaliwezi kuongeza anasema kwamba angle  $ACB = 25^\circ$ . **\*\*Kutumika namba za maelezo\*\***: - Angaliwezi kuongeza anasema kwamba basi kiwango cha angle  $BAO$  ni angle  $AOB$ . - Kwa sababu angle  $AOB$  ni angle inscribed (kujulikana kama angle subtended by the arc  $AB$ ) ambayo ni equal to twice the angle at the circumference that subtends the same arc. **\*\*Kutumika namba za maelezo\*\***: - Angaliwezi kuongeza anasema kwamba basi kiwango cha angle  $BAO$  ni  $2 * \text{angle } ACB$ . - Tofauti na angle  $ACB = 25^\circ$ , basi kiwango cha angle  $BAO$  ni  $2 * 25^\circ = 50^\circ$ . Kwa hivyo, basi kiwango cha angle  $BAO$  ni  $50^\circ$ . Jinsi yote, angaliwezi kuongeza anasema kwamba:  **$A$**




### Qwen2.5-VL-7B+MRRE w/ Sw Query

Ili kutatua tatizo hili, tunahitaji kutumia mali za duara na pembe katika pembetatu. Given:  $\angle ACB = 25^\circ$ . Tunahitaji kupata kipimo cha  $\angle BAO$ . Ufafanuzi wa hatua kwa hatua: Tambua aina ya pembetatu: Kwa kuwa  $O$  ni kituo cha duara,  $OA$  na  $OB$  ni nusu kipenyo cha duara. Hivyo basi,  $\triangle AOB$  ni pembetatu ya isosceles yenye  $OA = OB$ . Jumla ya pembe katika pembetatu: Jumla ya pembe za ndani katika pembetatu yoyote ni  $180^\circ$ . Katika  $\triangle AOB$ , pembe kwenye  $O$  ni sawa kwa sababu ni pembetatu ya isosceles. Tuita hizi pembe  $\angle OAB$  na  $\angle OBA$ . Kwa hiyo, tunayo:  $\angle OAB + \angle OBA + \angle AOB = 180^\circ$ . Uhusiano kati ya pembe ya katikati na pembe kwenye duara: Pembe ya katikati  $\angle AOB$  inakaa kwenye upinde ule ule kama pembe kwenye duara  $\angle ACB$ . Uhusiano ni kwamba pembe ya katikati ni mara mbili ya pembe ya duara. Kwa hivyo:  $\angle AOB = 2 * \angle ACB$ . Tukibadilisha thamani iliyotolewa:  $\angle AOB = 2 * 25^\circ = 50^\circ$ . Jumla ya pembe katika  $\triangle AOB$ : Sasa tunajua moja ya pembe katika  $\triangle AOB$ :  $\angle AOB = 50^\circ$ . Kwa kuwa  $\triangle AOB$  ni ya isosceles, basi:  $\angle OAB = \angle OBA$ . Tuita kila moja ya hizi pembe  $x$ . Kisha:  $x + x + 50^\circ = 180^\circ$ . Tukirahisisha:  $2x + 50^\circ = 180^\circ$ . Tukitua kwa  $x$ :  $2x = 130^\circ$ .  $x = 65^\circ$ . Kwa hivyo, kipimo cha  $\angle BAO$  ni  $65^\circ$ . Jibu sahihi ni:  **$D$**

Figure 11: Case study of *Vision Intensive* problem on Qwen2.5-VL-7B-Instruct.

### Input Image

As shown in the figure, AB parallel CD, EG bisects angle BEF, then angle 2 is equal to ()  
 Choices: A:50° B:60° C:65° D:90°

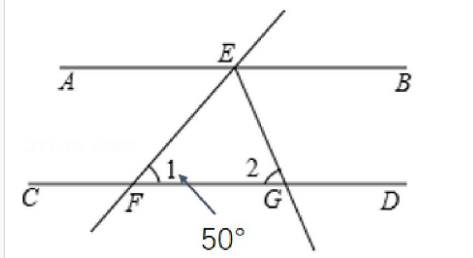

No Input Query



Qwen2.5-VL-7B w/ Fr Query

Pour résoudre ce problème, nous devons utiliser les propriétés des angles formés par deux droites parallèles coupées par une transversale.  
 1. Identifiez les angles correspondants : Les angles 1 et  $50^\circ$  sont des angles alternes-internes car ils sont situés de part et d'autre de la ligne transversale EG et sur le même côté du plan par rapport aux droites AB et CD.  
 2. Utilisez la propriété des angles alternes-internes : Si deux droites sont parallèles, alors les angles alternes-internes sont égaux. Donc, angle 1 =  $50^\circ$ .  
 3. Angle bisecteur : EG est un angle bisecteur qui divise l'angle BEF en deux angles égaux. Donc, angle BEG = angle FEG = (angle BEF) / 2.  
 4. Calculer l'angle BFG : Angle BFG est l'angle supplémentaire de l'angle 1 (car ils forment un angle droit avec l'angle  $50^\circ$ ). Donc, angle BFG =  $180^\circ - 50^\circ = 130^\circ$ .  
 5. Angle 2 : Angle 2 est l'angle interne adjacent à l'angle BFG. Donc, angle 2 =  $180^\circ - \text{angle BFG} = 180^\circ - 130^\circ = 50^\circ$ .  
 Donc, l'angle 2 est égal à  $50^\circ$ .  
 La réponse est: **A**.



Qwen2.5-VL-7B+MRRE w/ Fr Query

Pour résoudre le problème, nous devons utiliser les propriétés des droites parallèles et des bissectrices d'angles.  
 1. Identifier les informations données : (AB // CD), (EG) est la bissectrice de (angle BEF), (angle 1 =  $50^\circ$ ).  
 2. Comprendre la relation entre les angles : Puisque (AB // CD), (angle BFE) est un angle extérieur pour (triangle EFG) et il est égal à la somme des deux angles intérieurs non adjacents. Le théorème de la bissectrice stipule que la bissectrice d'un angle divise le côté opposé en segments proportionnels aux côtés adjacents. Cependant, dans ce contexte, nous pouvons utiliser le fait que la bissectrice divise l'angle en deux parties égales.  
 3. Calculer (angle BEF) : Comme (angle 1 =  $50^\circ$ ) et que (EG) est la bissectrice de (angle BEF), posons (angle BEG = angle GEF = x). Donc, (angle BEF =  $2x$ ).  
 4. Utiliser la propriété des angles correspondants : Comme (AB // CD), (angle BFE = angle 1 =  $50^\circ$ ). Donc, ( $2x = 50^\circ$ ). En résolvant pour (x), on obtient ( $x = 25^\circ$ ).  
 5. Trouver (angle 2) : (angle 2) est le même que (angle GEF) car ce sont des angles correspondants formés par la sécante (EG) coupant les droites parallèles (AB) et (CD). Donc, (angle 2 =  $25^\circ$ ).  
 Cependant, les options fournies ne correspondent pas directement à notre valeur calculée. Réévaluons le problème avec l'approche correcte :  
 Puisque (angle BFE =  $50^\circ$ ) et que (EG) est la bissectrice de (angle BEF), le calcul correct devrait être :  
 $\text{angle BEF} = 180^\circ - 50^\circ = 130^\circ$ .  
 Mais comme (angle 2) est l'angle de l'autre côté du segment (EG), il doit être égal à la moitié de l'angle restant après avoir soustrait l'angle bisecté de 180 degrés (puisque la somme des angles sur une ligne droite est 180 degrés) :  
 $\text{angle 2} = \frac{180^\circ - 50^\circ}{2} = \frac{130^\circ}{2} = 65^\circ$ .  
 Donc, la réponse correcte est : **C**.

Figure 12: Case study of Vision Only problem on Qwen2.5-VL-7B-Instruct.

## 709 **D Usage of LLMs**

710 We used GPT-4o ([Hurst et al., 2024](#)) to assist in  
711 language refinement and readability improvement  
712 of the manuscript. All ideas, experiments, analyses,  
713 and conclusions are developed and verified by the  
714 authors.