

# SCALING SPEECH-TEXT PRE-TRAINING WITH SYNTHETIC INTERLEAVED DATA

Anonymous authors

Paper under double-blind review

## ABSTRACT

Speech language models (SpeechLMs) accept speech input and produce speech output, allowing for more natural human-computer interaction compared to text-based large language models (LLMs). Traditional approaches for developing SpeechLMs are constrained by the limited availability of unsupervised speech data and parallel speech-text data, which are significantly less abundant than text pre-training data, thereby limiting their scalability as LLMs. We propose a novel approach to scaling speech-text pre-training by leveraging large-scale synthetic interleaved data derived from text corpora, eliminating the need for parallel speech-text datasets. Our method efficiently constructs speech-text interleaved data by sampling text spans from existing text corpora and synthesizing corresponding speech spans using a text-to-token model, bypassing the need to generate actual speech. We also employ a supervised speech tokenizer derived from an automatic speech recognition (ASR) model by incorporating a vector-quantized bottleneck into the encoder. This supervised training approach results in discrete speech tokens with strong semantic preservation even at lower sampling rates (e.g. 12.5Hz), while still maintaining speech reconstruction quality. Starting from a pre-trained language model and scaling our pre-training to 1 trillion tokens (with 600B synthetic interleaved speech-text data), we achieve state-of-the-art performance in speech language modeling and spoken question answering, improving performance on spoken questions tasks from the previous SOTA of 13% (Moshi) to 31%. We further demonstrate that by fine-tuning the pre-trained model with speech dialogue data, we can develop an end-to-end spoken chatbot that achieves competitive performance comparable to existing baselines in both conversational abilities and speech quality, even operating exclusively in the speech domain.

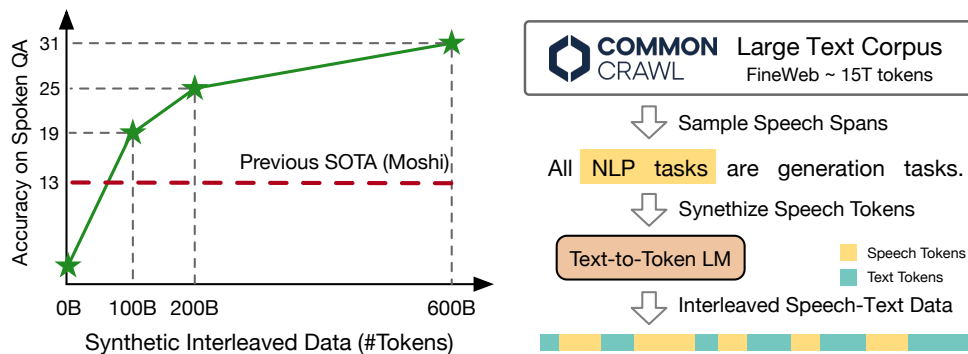


Figure 1: (Left) The performance on Spoken QA continuously improves as the amount of synthetic interleaved data increases, significantly surpassing the previous SOTA (Moshi). (Right) The pipeline for synthesizing interleaved speech-text data.

# 1 INTRODUCTION

Large language models (LLMs) have significantly advanced natural language processing, demonstrating capabilities beyond traditional language tasks. Trained on vast internet corpora, they exhibit emergent abilities such as instruction following (Ouyang et al., 2022), logical reasoning (Wei et al., 2022), and tool utilization (Schick et al., 2023). These advancements have enabled applications like interactive chatbots and personalized digital assistants. However, an ideal AI assistant should not rely solely on text. Voice-based interaction offers a more natural and intuitive interface for human-AI interaction. Traditional voice-based systems combine Automatic Speech Recognition (ASR), LLMs, and Text-to-Speech (TTS) models in a cascading manner. This approach, however, suffers from information loss during ASR and TTS processes, limiting the ability to capture and express the rich nuances of speech.

Speech language models (SpeechLMs) have emerged as a promising approach for building general-purpose voice assistants capable of processing speech input and output end-to-end. Several methods have been explored to construct SpeechLMs. Lakhota et al. (2021) proposed unsupervised learning on speech corpora using discrete semantic tokens. Hassid et al. (2023) improved performance by initializing from pre-trained language models, while Moshi (Défossez et al., 2024) utilized large-scale training on private speech data. However, a key challenge remains: the scarcity of speech data compared to text data. While text corpora like FineWeb (Penedo et al., 2024) offer 15 trillion high-quality tokens, large unsupervised speech datasets like VoxPopuli (Wang et al., 2021) provide only 400K hours of speech, equivalent to 36 billion tokens at 25Hz. This disparity limits the scalability and performance of SpeechLMs relative to LLMs.

A straightforward idea to address this limitation is to synthesize speech from text pre-training corpora using TTS models. However, this approach faces three major challenges. First, the lower information density of speech tokens leads to significant token expansion, drastically reducing training efficiency. Second, the process of synthesizing speech for large-scale text corpora is computationally expensive. Third, training on pure speech data fails to align with the text modality, preventing the model from leveraging the capabilities of existing LLMs. Recently, Nguyen et al. (2024) has explored the use of *interleaved speech-text data* for training. This approach improves alignment between speech and text modalities, leading to better speech language modeling performance. However, their method requires parallel speech-text datasets to construct the interleaved data, which significantly limits its scalability for large-scale pre-training.

In this paper, we propose a novel approach to scaling speech-text pre-training by synthesizing interleaved speech-text data from text corpora. The interleaved data is generated by sampling text spans and converting them into speech tokens using a text-to-token model. This efficient process bypasses the need to generate actual speech, enabling large-scale pre-training without relying on extensive speech datasets. Inspired by Du et al. (2024), we train the tokenizer in a supervised manner using ASR models and datasets. Experiments with sampling rates from 6.25Hz to 50Hz revealed trade-offs between semantic retention, model efficiency, speech reconstruction quality, and pre-training performance. We selected 12.5Hz as the optimal rate for balancing these factors. To synthesize large-scale interleaved data, we used existing TTS datasets to train a text-to-token model, generating 600B tokens of interleaved speech-text data and expanding the pre-training to 1 trillion tokens. Finally, through fine-tuning on speech dialogue data, we developed an end-to-end spoken chatbot operating entirely in the speech domain. The main contributions of this paper are as follows:

- We propose a novel method to effectively synthesize high-quality interleaved speech-text data from text corpora, addressing data limitation challenges in speech-text pre-training.
- We design a SpeechLLM architecture featuring a 12.5Hz single-codebook speech tokenizer trained in a supervised manner, along with a flow-matching based decoder for speech reconstruction, achieving both robust semantic preservation and high-quality speech synthesis.
- We scale our pre-training to 1 trillion tokens using synthesized interleaved speech-text data, significantly advancing capabilities in speech language modeling and spoken question answering.
- We develop an end-to-end spoken chatbot by fine-tuning pre-trained models with speech dialogue data, achieving competitive performance in conversational abilities and speech quality while operating exclusively in the speech domain.

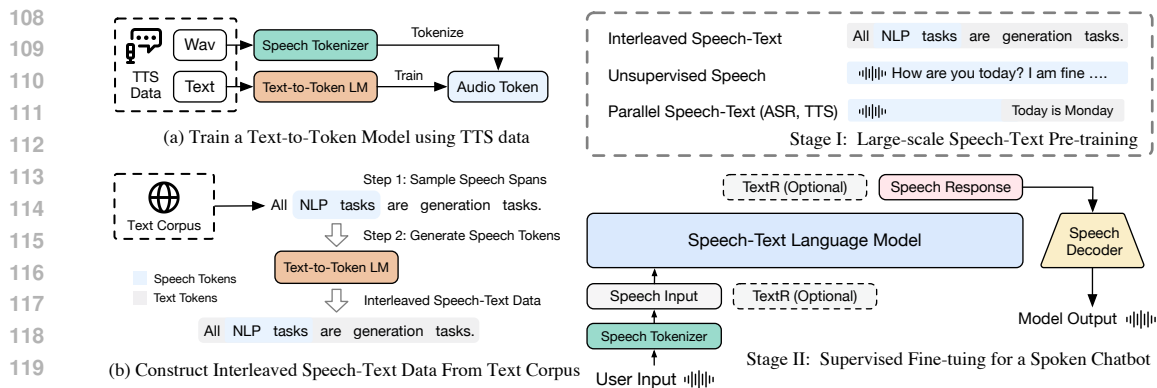


Figure 2: **Overview of our method.** First we train a text-to-token model to construct interleaved speech-text data. The speech language model’s training contains two stages. In the stage 1 the model is pre-trained with synthetic speech-text interleaved data. In the stage 2 the the model is fine-tuned with a speech dialogue dataset.

## 2 OUR APPROACH

Current approaches for build SpeechLMs typically fall into two categories. One method (Fang et al., 2024; Défossez et al., 2024) involves the language model for speech input but outputs embeddings for an additional non-autoregressive (NAR) model to generate speech tokens, which limits the modeling capacity and potentially reduces the upper bound of performance. The other method (Xie & Wu, 2024) uses inconsistent audio representations for input and output, leading to misalignment between input and output modality.

In this section, we present our approach for developing an end-to-end spoken chatbot using a unified speech-text modeling framework. Our method integrates a supervised speech tokenizer, a technique for synthesizing interleaved speech-text data, and a two-stage training process to extend pre-trained language models to the speech domain. This comprehensive approach enables us to leverage large-scale text data for speech modeling, effectively aligning speech and text modalities within a single model.

### 2.1 SPEECH TOKENIZATION

**Supervised Speech Tokenizer** Previous methods of discrete speech tokenizers are either trained with reconstruction/adversarial objectives of speech waveform (Wang et al., 2023; Chen et al., 2024) or self-supervised learning on automatically discovered acoustic units (Hsu et al., 2021). Following recent advance in text-to-speech synthesis (Du et al., 2024), we train the discrete speech tokenizer by fine-tuning a pretrained automatic speech recognition (ASR) model with an additional pooling layer and a vector quantization layer in the middle of the encoder.

The pooling layer is a 1D average pooling operator of window size  $k$ , which reduces the sampling rate to a fraction of  $1/k$ . The vector quantization layer approximates the continuous intermediate representations in the encoder with the closest vectors in the codebook. The selected indices in the codebook are used as the speech token indices. The codebook vectors are learned with exponential moving average (EMA) and we add a commitment loss to restrict the volume of continuous representations before quantization. To overcome codebook collapse, we apply the random restart trick (Dhariwal et al., 2020) to reset vectors whose mean usage falls below a certain threshold.

We also adapt the Whisper architecture to support streaming inference, which is important to reduce latency for online speech interaction. We replace the convolution layer before the encoder Transformer with the causal convolution layer (van den Oord et al., 2016). We also replace the bidirectional attention in the encoder with block causal attention: the input audios are divided into segments of equal intervals and positions in a segment and attend to all the positions in the current segment and previous segments, but not positions in the following segments. Empirically we set the segment interval to 2 seconds (100 tokens before the average pooling). We find this can match

Table 1: **Speech Reconstruction Results.** We evaluate semantic retention with Word Error Rate (WER) and reconstruction quality with VisQOL (Hines et al., 2015) and MOSNet (Lo et al., 2019) for different speech tokenizers across various sample rates. The baseline results are independently evaluated by us.

Model	Sample Rate	Bitrate	Causal	LibriSpeech		
				WER↓	VisQOL↑	MOSNet↑
Ground Truth	-	-	-	4.62	-	3.27
RVQGAN	75Hz	1.50K	✗	-	1.74	2.74
SemantiCodec	50Hz	1.30K	✗	-	2.43	3.12
SpeechTokenizer	50Hz	1.50K	✗	-	1.53	2.67
SpeechTokenizer	50Hz	4.00K	✗	-	3.07	3.10
Spirit-Base	25Hz	225.0	✗	11.66	-	-
Spirit-Expressive	38.5Hz	307.0	✗	10.60	-	-
Moshi (Mimi)	12.5Hz	1.10K	✓	8.36	2.82	2.89
Ours	50Hz	180.6	✓	6.24	2.67	3.38
	25Hz	90.3	✓	6.80	2.60	3.33
	12.5Hz	52.7	✓	8.43	2.52	3.39
	6.25Hz	30.1	✓	14.41	2.34	3.24

the ASR performance of bidirectional attention. For more details about speech tokenizer training, please refer to Appendix B.1.

**Speech Decoder** Given discrete speech tokens, we synthesize speech through the speech decoder. We follow the decoder architecture of CosyVoice (Du et al., 2024), which consists of a speech token encoder, a conditional flow matching model (Mehta et al., 2024), and a HiFi-GAN vocoder (Kong et al., 2020). The speech token encoder converts a sequence of discrete tokens into a sequence of contextual vectors with a Transformer encoder. To facilitate the streaming synthesis of speech, we adapt the speech token encoder to use the same block causal attention as the speech tokenizer. The flow matching model generates Mel spectrograms conditioned on the speech token representations. Finally, the generated Mel spectrograms converted into the speech waveforms through the HiFi-GAN vocoder (Kong et al., 2020). To train the speech decoder, we use the unsupervised speech data described in Section 2.3.1, which consists of various speakers. For more details about speech decoder training, please refer to Appendix B.2.

We evaluate the content preservation and quality of generated speech by our speech decoder on LibriSpeech (Panayotov et al., 2015). The results are shown in Table 1. We measure the content preservation by the Word Error Rate (WER) between the transcription with an ASR model provided in Nguyen et al. (2023) and the true transcription. For speech quality, following Défossez et al. (2024), we compute VisQOL (Hines et al., 2015) and MOSNet (Lo et al., 2019) of the reconstructed speech. Our tokenizer performs well across various sampling rates, with the 12.5Hz variant offering an optimal balance between efficiency and quality. It maintains high quality scores (MOSNet 3.39) and content preservation (WER 8.43) while significantly reducing bitrate (52.7). Our ablation study on sampling rates during pre-training (Cf. Section 3.3.2) shows that lower rates improve performance, but gains plateau at 12.5Hz. Based on these results, we select the 12.5Hz variant for our subsequent experiments.

## 2.2 SYNTHESIZE INTERLEAVED SPEECH-TEXT DATA

Interleaved speech-text data consists of tokens where speech and text sequences are interleaved at the word level. For example, a sequence might look like: “Today is <Speech\_24> <Speech\_5> ... <Speech\_128> day”. We hypothesize that training on interleaved speech-text data encourages the model to learn an alignment between speech and text, facilitating the transfer of text-based knowledge to speech representations. Previous methods for creating interleaved speech-text data rely on aligned speech-text parallel datasets (Nguyen et al., 2024), which are challenging to obtain. We propose a novel and efficient approach for constructing interleaved speech-text data using existing text

216 datasets. The process consists of two main steps. First, we train a text-to-token model that directly  
 217 converts text into corresponding speech tokens, eliminating the need to synthesize actual speech.  
 218 This approach avoids the error accumulation associated with text-to-speech-to-token pipelines and  
 219 significantly improves synthesis efficiency, making it practical and scalable for large-scale data gen-  
 220 eration. Next, we sample text spans from existing text datasets and transform them into speech spans  
 221 using the trained text-to-token model. This enables the efficient and scalable creation of interleaved  
 222 speech-text data without requiring aligned speech-text parallel datasets.

223  
 224 **Text-to-Token Model** We train a 1.5B text-to-token model based on standard transformer archi-  
 225 tecture to convert text into corresponding speech tokens. While these tokens can be further synthe-  
 226 sized into actual speech using our speech decoder, this step is unnecessary for constructing inter-  
 227 leaved speech-text data. To prepare the training data, we first tokenize speech from text-to-speech  
 228 datasets into discrete speech tokens. The text-to-token model is then trained to predict these speech  
 229 token sequences based on the input text. The training objective is to minimize the negative log-  
 230 likelihood of the predicted speech tokens conditioned on the corresponding text input:

$$231 \mathcal{L} = - \sum_{i=1}^N \sum_{j=1}^{M_i} \log P(a_{i,j} | T_i, a_{i,<j}; \theta) \quad (1)$$

232 where  $T_i$  is the  $i$ -th input text,  $a_{i,j}$  is the  $j$ -th  
 233 audio token in the  $i$ -th sample,  $M_i$  is the length  
 234 of the  $i$ -th speech token sequence,  $\theta$  represents  
 235 the model parameters, and  $N$  is the number of  
 236 training samples.

237 We use a multi-speaker text-to-speech datasets  
 238 to train this model (see Appendix A.3 for de-  
 239 tailed data distribution). We also include addi-  
 240 tional high-quality text-speech pairs generated  
 241 using the CosyVoice (Du et al., 2024) model to  
 242 improve accuracy for short or incomplete text  
 243 spans. The architecture and the training details  
 244 about the text-to-token model training can be found in Appendix B.3. To speedup the speech to-  
 245 ken generation process, we deployed the model using the SGLang framework (Zheng et al., 2024),  
 246 achieving a generation speed of 25k tokens per second on a single H800 instance.

247  
 248 **Interleaved Data Construction** To construct interleaved data from a text document, we apply a  
 249 span corruption technique that randomly selects spans from the text sequence. Span lengths are  
 250 drawn continuously from a Poisson distribution ( $\lambda = 10$ ) until the total length of selected spans  
 251 reaches the predefined ratio  $\eta$  of the original text length. Next, text spans corresponding to the  
 252 drawn lengths are randomly selected from the document. These spans are converted into speech  
 253 tokens using the text-to-token model, producing an interleaved speech-text sequence. The span  
 254 corruption ratio  $\eta$  plays a crucial role in enabling effective knowledge transfer between the speech  
 255 and text modalities, as demonstrated in our ablation study (Cf. Section 3.3.3). Based on the find-  
 256 ings of this study, we set  $\eta$  to 0.3 for optimal performance. We selected high quality text datasets  
 257 (FineWeb-Edu (Penedo et al., 2024) for English and Chinese-Fineweb-Edu (OpenCSG Commu-  
 258 nity) for chinese) to apply the previously mentioned synthesis process, generating a total of 600B  
 259 tokens, with a 2:1 ratio of English to Chinese. Appendix D.3 provides samples of interleaved data  
 260 constructed.

261 We evaluated the performance of the text-to-token model on the VCTK (Yamagishi et al., 2019)  
 262 dataset and the interleaved data using word error rate (WER) as the evaluation metric. To compute  
 263 WER, we used our speech decoder to synthesize real speech from the speech tokens generated by  
 264 the text-to-token model, and then transcribed using `whisper-large-v3` (Radford et al., 2023).  
 265 The results are summarized in Table 2. For the standard VCTK dataset, we observed a lower WER  
 266 of 3.20. However, the WER for speech spans generated from the text pre-training data was higher.  
 267 We attribute this discrepancy primarily to some spans in the text pre-training data being difficult to  
 268 pronounce accurately.

269  
 Table 2: **Word Error Rate (WER) of the text-to-token model.** The dataset labeled "Interleaved Data" refers to text and speech pairs generated during the construction of interleaved speech-text data.

Dataset	Language	WER (%)
VCTK	English	3.20
Interleaved Data	English	11.62
	Chinese	9.34

## 2.3 TRAINING

We initialize the speech language model with a pre-trained large language models’ parameters to leverage its existing knowledge. In order to support speech processing, we extend the model’s vocabulary and embedding space. Specifically, we augment the original language model vocabulary,  $V_{\text{lang}}$ , with a discrete speech vocabulary,  $V_{\text{speech}}$ , resulting in a combined vocabulary,  $V = V_{\text{lang}} \cup V_{\text{speech}}$ . This expansion allows the model to accept both text and speech tokens as input and output. However, the ability to effectively understand and generate these tokens relies on subsequent training to align the text and speech modalities.

The training process consists of two stages. In the first stage, the model is pre-trained on synthetic interleaved data to learn the alignment between text and speech. In the second stage, fine-tuning is performed using speech dialogue data to enable the model to handle speech interactions.

### 2.3.1 SPEECH-TEXT PRE-TRAINING

To extend LLMs’ capabilities in speech-text tasks, we introduce a speech-text pre-training stage. This stage enables the model to process and represent discrete speech tokens. We utilize four data types, each serving a specific purpose:

- **Interleaved speech-text data:** As described in Section 2.2, these datasets facilitate cross-modal knowledge transfer between text and speech.
- **Unsupervised text data:** We use a diverse corpus, similar to GLM et al. (2024), containing 10T tokens from webpages, Wikipedia, books, code, and research papers to maintain the model’s language understanding.
- **Unsupervised speech data:** Using the Emilia pipeline (He et al., 2024), we collected 700k hours of high-quality English and Chinese speech data, filtered by DNSMOS P.835 scores above 2.75, ensuring diverse and clean speech inputs.
- **Supervised speech-text data:** This includes ASR and TTS data, teaching the model to learn bidirectional relationships between speech and text.

Both text and speech are represented as discrete tokens. The model is trained the next-token prediction objective with cross-entropy loss function. For text, speech, and interleaved data, the model is trained to predict all the tokens. For supervised speech-text data, the model is only trained to predict tokens in the target parts (text in ASR data and speech in TTS data). We set text data at 30% of each batch to preserve language ability. Unsupervised speech and supervised speech-text data were trained for one epoch each, while interleaved data filled the remaining capacity, balancing language comprehension and speech processing. The detailed training data distribution can be found in Appendix A.

### 2.3.2 SUPERVISED FINE-TUNING

Following speech-text pre-training, we fine-tune our model for speech dialogue tasks using a dataset derived from Magpie (Xu et al., 2024). We use GPT-4 to adapt the original text-based dialogues for speech scenarios by filtering examples, shortening responses, and avoiding outputting text that cannot be read aloud. The detailed prompt for this adaptation process can be found in the Appendix E. This curation process results in our SpeechDialog-90K dataset, which contains 90K triplets (SpeechI, TextR, SpeechR), where SpeechI is the speech instruction, TextR is the text response, and SpeechR is the corresponding speech response synthesized from TextR using MeloTTS (Zhao et al., 2023). For train hyper-paramaters, we use a batch size of 64, a sequence length of 4096 tokens, and train for 10 epochs with a learning rate decaying from  $5e-5$  to  $5e-6$ . We use the AdamW optimizer.

## 2.4 INFERENCE

During inference, our framework supports two modes: speech-to-speech and text-guided speech generation. In speech-to-speech mode, the model directly processes speech input to generate speech output. Our streaming tokenizer converts the user’s speech into discrete tokens, which the model then processes to generate output speech tokens. These output tokens are synthesized into continuous speech by our block-wise decoder, operating on 2-second blocks (25 tokens at 12.5Hz). The

Table 3: **Pre-training Results.** ‘S’: speech input and output. ‘S→T’: speech input and text output. ‘T→S’: text input and speech output. Results for Spirit-LM are taken from Nguyen et al. (2024) and other results are from Défossez et al. (2024). We use  $\emptyset$  to indicate tasks and modalities not supported by the model, and - to indicate scores that are not publicly available.

Model	Speech Language Modeling						Spoken Question Answering					
	sTopic-StoryCloze			sStoryCloze			Web Questions		Llama Questions		TriviaQA	
	S	T→S	S→T	S	T→S	S→T	S	S→T	S	S→T	S	S→T
GSLM	66.6	$\emptyset$	$\emptyset$	53.3	$\emptyset$	$\emptyset$	1.5	$\emptyset$	4.0	$\emptyset$	-	-
AudioLM	-	$\emptyset$	$\emptyset$	-	$\emptyset$	$\emptyset$	2.3	$\emptyset$	7.0	$\emptyset$	-	-
TWIST	76.4	$\emptyset$	$\emptyset$	55.4	$\emptyset$	$\emptyset$	1.1	$\emptyset$	0.5	$\emptyset$	-	-
Spirit-LM	82.9	72.7	88.6	61.0	59.6	64.6	-	-	-	-	-	-
SpeechGPT	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	$\emptyset$	6.5	$\emptyset$	21.6	$\emptyset$	14.8
Spectron	-	-	-	-	-	-	$\emptyset$	6.1	$\emptyset$	21.9	$\emptyset$	-
Moshi	<b>83.0</b>	$\emptyset$	$\emptyset$	60.8	$\emptyset$	$\emptyset$	9.2	26.6	21.0	62.3	7.3	22.8
Ours (9B)	82.9	<b>85.0</b>	<b>93.6</b>	<b>62.4</b>	<b>63.2</b>	<b>76.3</b>	<b>15.9</b>	<b>32.2</b>	<b>50.7</b>	<b>64.7</b>	<b>26.5</b>	<b>39.1</b>

block-wise encoder computes representations which are then used by the conditional flow matching model to generate Mel spectrograms. Finally, these spectrograms are converted into continuous speech using the HiFi-GAN vocoder. For text-guided speech generation, given the speech input (SpeechI), the model generates both a text response (TextR) and the corresponding speech response (SpeechR) in a single forward pass. The text response is generated as an intermediate step, which then guides the production of the final speech output. The corresponding template for two modes can be found in appendix F.

### 3 EXPERIMENTS

#### 3.1 EXPERIMENTAL SETUP

**Configuration** We employ GLM-4-9B-Base (GLM et al., 2024) as our base LLM for experiments. For ablation, we also use a smaller LLM with 1.5 billion parameters detailed in Table 13. Our speech-text pre-training stage processes a total of 1T tokens, with a fixed sampling of 30% text data, one epoch each of unsupervised speech and supervised speech-text data, and the remainder consisting of interleaved data. Throughout the pre-training stage, we maintain a sequence length of 8192 tokens and use a learning rate that linearly decays from 6e-5 to 6e-6. For the fine-tuning phase, we use a batch size of 64, a sequence length of 4096 tokens, and train for 10 epochs on the fine-tuning dataset with a learning rate decaying from 5e-5 to 5e-6. We use the AdamW optimizer for both pre-training and fine-tuning stages.

**Baselines** For pre-trained models, We compare our method with GSLM (Lakhotia et al., 2021), AudioLM (Borsos et al., 2023), TWIST (Hassid et al., 2023), Spirit-LM (Nguyen et al., 2024), SpeechGPT (Zhang et al., 2023), Spectron (Nachmani et al., 2024), and Moshi (Défossez et al., 2024). Except GSLM and AudioLM, other baselines are based on a text pretrained language model. Note that Moshi is pretrained on a speech collection of 7 million hours, an order of magnitude larger than our unsupervised speech data. For chat, we only compare end-to-end spoken chatbots supporting speech as both input and output, we choose SpeechGPT (Zhang et al., 2023), Llama-Omni (Fang et al., 2024), Mini-Omni (Xie & Wu, 2024) and Moshi (Défossez et al., 2024). Moshi is fine-tuned for full duplex conversations and each conversation must begin with a greeting from the model. Therefore, we wait 3 seconds for the greeting to end before asking the speech query. For Mini-Omni, we use the default AT mode for evaluation.

**Speech Language Modeling** We first evaluate the pretrained model’s ability to model speech by the accuracy of selecting the correct continuation of a given context according to the predicted likelihood. We consider three different settings: from speech context to speech continuation (denoted as ‘S’), from text context to speech continuation (denoted as ‘T→S’), and from speech context to text continuation (denoted as ‘S→T’). We use two datasets proposed by Hassid et al. (2023), Spoken

Table 4: **Evaluation results for end-to-end spoken chatbots.** All baseline results in this table were obtained through our own evaluation.

	w/o Text	Content Quality		Speech Quality	
		General QA $\uparrow$	Knowledge $\uparrow$	UTMOS $\uparrow$	ASR-WER $\downarrow$
SpeechGPT	$\times$	1.40	2.20	3.86	66.57
Mini-Omni	$\times$	2.44	1.10	3.17	25.28
Llama-Omni	$\times$	3.50	3.90	3.92	9.18
Moshi	$\times$	2.42	3.60	3.90	7.95
9B + Text-guided	$\times$	<b>3.69</b>	<b>4.70</b>	<b>4.33</b>	7.83
- No Interleaving	$\times$	2.48	1.00	4.31	10.34
- No Pre-training	$\times$	2.20	0.90	4.32	<b>6.11</b>
9B	$\checkmark$	3.18	3.20	4.33	$\emptyset$
- No Interleaving	$\checkmark$	1.21	0.01	4.33	$\emptyset$
- No Pre-training	$\checkmark$	1.10	0.00	4.32	$\emptyset$

StoryCloze and Spoken TopicStoryCloze. The baseline results are taken from Nguyen et al. (2024); Défossez et al. (2024).

**Spoken Question Answering** Similar to closed-book question answering in NLP, spoken question answering requires the speech-language model to answer spoken questions about broad factual knowledge without access to external knowledge. We consider two settings for the model: from spoken questions to spoken answers (denoted as ‘S’), and from spoken questions to textual answers (denoted as ‘S $\rightarrow$ T’). We evaluate our model on 3 datasets in Défossez et al. (2024): Web Questions (Berant et al., 2013), Llama Questions (Nachmani et al., 2024), and TriviaQA (Joshi et al., 2017). The baseline results are taken from Défossez et al. (2024).

**Evaluating Spoken Chatbots** To evaluate the spoken chatbot’s capabilities we select two aspects: general question answering and knowledge. For general question answering, we utilized prompts from AlpacaEval’s (Li et al., 2023b) `helpful_base` and `vicuna` categories, which are more suitable for voice interactions. The knowledge assessment drew 100 questions from Web Questions, Llama Questions, and TriviaQA datasets. The generated speech was transcribed into text using `whisper-large-v3`, and GPT-4 was used to score the responses on a scale of 1 to 10, with the detailed prompt provided in Appendix G. Additionally, we measured ASR-WER to assess the alignment between generated speech and text, as well as UTMOS (Saeki et al., 2022) to evaluate overall speech quality following Fang et al. (2024).

### 3.2 MAIN RESULTS


The evaluation results for the pretrained model are shown in Table 3. On speech language modeling, our method outperforms baselines on all the tasks except the ‘S’ setting of spoken Topic-StoryCloze, on which our model achieves comparable accuracy to SpiRit-LM and Moshi. Compared with SpiRit-LM, our method achieves significant improvements on the ‘T $\rightarrow$ S’ and ‘S $\rightarrow$ T’ setting, indicating that our synthetic interleaved data effectively aligns text and speech modalities. On spoken question answering, our method significantly outperforms all the baselines on both the ‘S’ and ‘S $\rightarrow$ T’ setting of three datasets. The improvements are especially substantial on the speech-to-speech setting. On Llama Questions, our method considerably reduces the previous gap between the speech-to-speech and speech-to-text settings, indicating that it effectively transfers the knowledge in the text modality to the speech modality. Overall, our method achieves better performance than the best baseline Moshi, with only a tenth of Moshi’s natural speech data.

Table 4 shows the evaluation results for spoken chatbots. Our 9B text-guided model outperforms all baseline models in general question-answering and knowledge-based tasks. It also achieves better results in speech quality evaluation compared to others. Notably, even without text guidance, the 9B model still performs comparably with text-guided baselines, highlighting our method’s effectiveness in aligning text and speech modalities.



Table 5: **Ablation study on interleaved data scaling and pre-training data composition.** ‘S’: speech input and output. ‘S→T’: speech input and text output. ‘T→S’: text input and speech output. ‘Web Q.’ stands for Web Questions. ‘Llama Q.’ stands for Llama Questions.

Model	Speech Language Modeling						Spoken Question Answering					
	sTopic-StoryCloze			sStoryCloze			Web Q.		Llama Q.		Trivia QA	
	S	T→S	S→T	S	T→S	S→T	S	S→T	S	S→T	S	S→T
9B (600B Interleave)	<b>82.9</b>	<b>85.0</b>	<b>93.6</b>	<b>62.4</b>	<b>63.2</b>	<b>76.3</b>	<b>15.9</b>	<b>32.2</b>	<b>50.7</b>	<b>64.7</b>	<b>26.5</b>	<b>39.1</b>
- No Interleaving	72.8	53.3	53.3	51.7	51.4	53.7	0.1	0.3	2.3	2.3	0.2	0.5
- 100B Interleave	80.9	83.6	93.3	59.4	61.3	73.4	9.3	25.4	37.0	60.0	11.7	26.9
- 200B Interleave	82.1	84.7	93.2	61.5	62.6	76.0	13.3	29.7	44.0	63.0	18.7	31.3
1.5B	77.5	81.4	<b>90.1</b>	55.4	58.6	64.0	5.4	<b>17.6</b>	18.3	<b>42.7</b>	4.6	15.6
- No Interleaving	74.6	55.3	51.3	51.7	53.4	52.8	0.0	0.1	1.3	4.3	0.0	0.2
- No Speech	78.0	82.1	89.5	55.9	59.3	64.4	4.9	17.3	17.7	38.3	4.6	15.5
- No Text	78.5	<b>83.2</b>	89.0	54.8	58.3	63.4	<b>6.3</b>	17.4	20.3	42.3	<b>7.0</b>	<b>16.3</b>
- No ASR & TTS	<b>78.7</b>	81.4	89.5	<b>56.7</b>	<b>59.5</b>	<b>68.5</b>	6.1	17.0	<b>23.0</b>	41.0	5.4	14.0

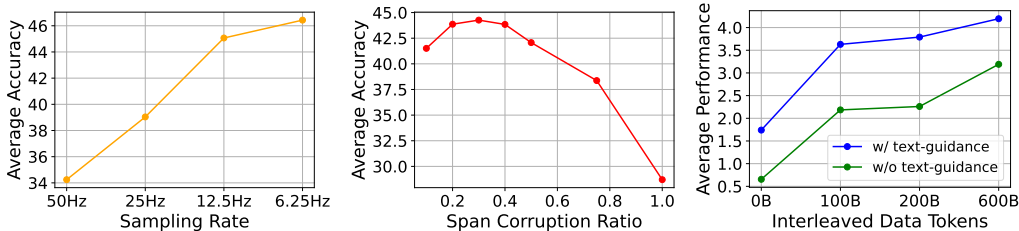

(a) Sampling Rate

(b) Span Corruption Ratio

(c) Interleaved Data Tokens

Figure 3: (a) Sampling rate vs average accuracy. (b) Span corruption ratio vs average accuracy. The accuracy is averaged over datasets of speech language modeling and spoken question answering. (c) Interleaved data tokens vs average performance after supervised fine-tuning.

### 3.3 ABLATION STUDY

#### 3.3.1 DATA SCALING AND COMPOSITION

Our pre-training corpus consists of text, speech data, speech-text interleaved data, and speech-text parallel data (from ASR and TTS tasks). We study the effects of data scaling and composition. First, we evaluate how scaling interleaved data impacts model performance. We train the 9B model with interleaved data sizes of 0, 100B, and 200B tokens, keeping other parts of the pre-training corpus unchanged. Table 5 compares these results with the best model trained on 600B interleaved data. Without interleaved data, the model performs poorly, but as interleaved data scales up, performance improves consistently. This demonstrates the effectiveness of scaling synthetic speech-text interleaved data. Figure 3c further shows that increasing interleaved data improves chatbot performance after supervised fine-tuning, both with and without text guidance. Next, we analyze the contributions of different parts of the pretraining corpus using a 1.5B model. Results in Table 5 show that removing synthetic interleaved data significantly degrades performance. Removing unsupervised speech data slightly reduces spoken question answering accuracy, while removing text or speech-text parallel data improves performance on most benchmarks, likely due to capacity competition among modalities in smaller models. For the 9B models, we retain all data types as they represent essential tasks for downstream applications, and larger models alleviate this competition.

#### 3.3.2 SAMPLING RATE

The sampling rate of the speech tokenizer refers to the number of speech tokens generated per second. Hassid et al. (2023) observed that reducing HuBERT’s sampling rate from 50Hz to 25Hz improved performance on speech language modeling tasks. We trained 1.5B models with tokenizers at different sampling rates using the same number of training tokens, excluding ASR and TTS datasets

486 for simplicity, and analyzed the relationship between sampling rate and accuracy (Figure 3a). The  
487 results show that lower sampling rates improve average accuracy. We hypothesize two reasons: (1)  
488 lower sampling rates allow the model to process more speech data within the same training token  
489 budget, and (2) shorter token sequences for the same audio reduce modeling difficulty. We selected a  
490 12.5Hz sampling rate for our main model, as the 6.25Hz tokenizer showed a trade-off where speech  
491 information loss outweighed accuracy gains.

### 492 3.3.3 SPAN CORRUPTION RATIO

493  
494 The span corruption ratio decides the proportions of text and speech tokens in interleaved samples.  
495 With extreme corruption ratios close to 0 or 1 the interleaved samples are dominated by text or  
496 speech tokens. To study the effect of the ratio and determine the best value, we train multiple 1.5B  
497 models with interleaved data from different span corruption ratios and plot the results in Figure 3b.  
498 Overall, we find that the corruption ratios from 0.2 to 0.4 works well. Larger or smaller ratios result  
499 in a significant degradation of performance. Based on the results, we select 0.3 as the corruption  
500 ratio for our main model.

## 501 4 RELATED WORK

502  
503 **Speech Tokenization** Speech tokenizers, which transform a audio clip into discrete tokens, can  
504 be categorized into two directions. The neural acoustic codecs (Zeghidour et al., 2022; Défossez  
505 et al., 2023; Kumar et al., 2023; Ji et al., 2024) target at reconstructing high-quality audio at low  
506 bitrates. The semantic tokens (Hsu et al., 2021; Chung et al., 2021) are extracted from speech  
507 representations learned with self-supervised learning on speech data. Speechookenizer (Zhang et al.,  
508 2024) unifies semantic and acoustic tokens as different residual vector quantization (RVQ) layers,  
509 but it also suffers from expansion of sequence length. Cosyvoice (Du et al., 2024) proposes the  
510 supervised semantic tokenizer derived from a speech recognition model, and successfully apply the  
511 tokenizer to text-to-speech synthesis. The application of the tokenizer on speech language modeling  
512 is not explored.

513 **Speech-Text Pre-training** GSLM (Lakhotia et al., 2021) proposes the generative spoken language  
514 modeling task, which trains the next-token-prediction objective on discrete semantic tokens pro-  
515 duced by self-supervised learning. AudioLM (Borsos et al., 2023) proposes a hybrid tokenization  
516 scheme that combines semantic tokens with acoustic tokens from a neural audio codec (Zeghidour  
517 et al., 2022). TWIST (Hassid et al., 2023) trains the speech language model using a warm-start from  
518 a pretrained text language model, specifically OPT (Zhang et al., 2022). Moshi (Défossez et al.,  
519 2024) scales up the size of natural speech data in TWIST to 7 million hours. Spirit-LM (Nguyen  
520 et al., 2024) further extends TWIST by adding speech-text interleaving data curated from speech-text  
521 parallel corpus. However, the scarcity of parallel corpus restricts the scale of interleaving data.

522 **End-to-End Spoken Chatbots** Early works in speech-to-speech models mainly focus on processing  
523 tasks like speech translation (Chen et al., 2021b; Ao et al., 2022). Since success of ChatGPT in  
524 text-based chatbots, many works have explored methods to develop speech-based chatbots that can  
525 understand and respond in speech. Speechgpt (Zhang et al., 2023) proposes to combine existing  
526 large language models (LLM) with discrete speech representations to obtain speech conversational  
527 abilities. Moshi (Défossez et al., 2024) proposes a full-duplex spoken dialogue framework based  
528 on their pretrained speech language model. Llama-omni (Fang et al., 2024) and Mini-omni (Xie  
529 & Wu, 2024) both propose light-weight alignment methods that transform an open language model  
530 into spoken chatbots.

## 531 5 CONCLUSION

532  
533 This paper introduced a novel approach for scaling speech-text pre-training using supervised se-  
534 mantic tokens and synthetic interleaved data. By employing a supervised speech tokenizer and  
535 generating 600B tokens of interleaved data, we scaled our speech pre-training to 1 trillion tokens,  
536 achieving state-of-the-art performance in speech language modeling and spoken question answer-  
537 ing tasks. We also developed an end-to-end spoken chatbot by fine-tuning our pre-trained model,  
538 demonstrating competitive performance in both conversational abilities and speech quality. Future  
539 work could explore more efficient training techniques, investigate larger model sizes, and expand  
multilingual capabilities.

## REFERENCES

- 540  
541  
542 Junyi Ao, Rui Wang, Long Zhou, Chengyi Wang, Shuo Ren, Yu Wu, Shujie Liu, Tom Ko, Qing  
543 Li, Yu Zhang, et al. Specht5: Unified-modal encoder-decoder pre-training for spoken language  
544 processing. In *Proceedings of the 60th Annual Meeting of the Association for Computational*  
545 *Linguistics (Volume 1: Long Papers)*, pp. 5723–5738, 2022.
- 546 Rosana Ardila, Megan Branson, Kelly Davis, Michael Kohler, Josh Meyer, Michael Henretty,  
547 Reuben Morais, Lindsay Saunders, Francis M. Tyers, and Gregor Weber. Common voice: A  
548 massively-multilingual speech corpus. In *Proceedings of The 12th Language Resources and Eval-*  
549 *uation Conference, LREC 2020, Marseille, France, May 11-16, 2020*, pp. 4218–4222. European  
550 Language Resources Association, 2020.
- 551 Jonathan Berant, Andrew Chou, Roy Frostig, and Percy Liang. Semantic parsing on freebase from  
552 question-answer pairs. In *Proceedings of the 2013 Conference on Empirical Methods in Natural*  
553 *Language Processing, EMNLP 2013, 18-21 October 2013, Grand Hyatt Seattle, Seattle, Wash-*  
554 *ington, USA, A meeting of SIGDAT, a Special Interest Group of the ACL*, pp. 1533–1544. ACL,  
555 2013.
- 556 Zalán Borsos, Raphaël Marinier, Damien Vincent, Eugene Kharitonov, Olivier Pietquin, Matthew  
557 Sharifi, Dominik Roblek, Olivier Teboul, David Grangier, Marco Tagliasacchi, and Neil Zeghi-  
558 dour. Audiolm: A language modeling approach to audio generation. *IEEE ACM Trans. Audio*  
559 *Speech Lang. Process.*, 31:2523–2533, 2023.
- 560 Hui Bu, Jiayu Du, Xingyu Na, Bengu Wu, and Hao Zheng. AISHELL-1: an open-source mandarin  
561 speech corpus and a speech recognition baseline. In *20th Conference of the Oriental Chapter*  
562 *of the International Coordinating Committee on Speech Databases and Speech I/O Systems and*  
563 *Assessment, O-COCOSDA 2017, Seoul, South Korea, November 1-3, 2017*, pp. 1–5. IEEE, 2017.
- 564 Guoguo Chen, Shuzhou Chai, Guan-Bo Wang, Jiayu Du, Wei-Qiang Zhang, Chao Weng, Dan Su,  
565 Daniel Povey, Jan Trmal, Junbo Zhang, Mingjie Jin, Sanjeev Khudanpur, Shinji Watanabe, Shuai-  
566 jiang Zhao, Wei Zou, Xiangang Li, Xuchen Yao, Yongqing Wang, Zhao You, and Zhiyong Yan.  
567 Gigaspeech: An evolving, multi-domain ASR corpus with 10, 000 hours of transcribed audio.  
568 In *22nd Annual Conference of the International Speech Communication Association, Interspeech*  
569 *2021, Brno, Czechia, August 30 - September 3, 2021*, pp. 3670–3674. ISCA, 2021a.
- 570 Sanyuan Chen, Shujie Liu, Long Zhou, Yanqing Liu, Xu Tan, Jinyu Li, Sheng Zhao, Yao Qian, and  
571 Furu Wei. VALL-E 2: Neural codec language models are human parity zero-shot text to speech  
572 synthesizers. *CoRR*, abs/2406.05370, 2024.
- 573 Yi-Chen Chen, Po-Han Chi, Shu-wen Yang, Kai-Wei Chang, Jheng-hao Lin, Sung-Feng Huang,  
574 Da-Rong Liu, Chi-Liang Liu, Cheng-Kuang Lee, and Hung-yi Lee. Speechnet: A universal  
575 modularized model for speech processing tasks. *arXiv preprint arXiv:2105.03070*, 2021b.
- 576 Yu-An Chung, Yu Zhang, Wei Han, Chung-Cheng Chiu, James Qin, Ruoming Pang, and Yonghui  
577 Wu. w2v-bert: Combining contrastive learning and masked language modeling for self-  
578 supervised speech pre-training. In *IEEE Automatic Speech Recognition and Understanding Work-*  
579 *shop, ASRU 2021, Cartagena, Colombia, December 13-17, 2021*, pp. 244–250. IEEE, 2021.
- 580 Alexandre Défossez, Jade Copet, Gabriel Synnaeve, and Yossi Adi. High fidelity neural audio  
581 compression. *Trans. Mach. Learn. Res.*, 2023, 2023.
- 582 Alexandre Défossez, Laurent Mazaré, Manu Orsini, Amélie Royer, Patrick Pérez, Hervé Jégou,  
583 Edouard Grave, and Neil Zeghidour. Moshi: a speech-text foundation model for real-time dia-  
584 logue. Technical report, Kyutai, September 2024. URL <http://kyutai.org/Moshi.pdf>.
- 585 Prafulla Dhariwal, Heewoo Jun, Christine Payne, Jong Wook Kim, Alec Radford, and Ilya Sutskever.  
586 Jukebox: A generative model for music. *CoRR*, abs/2005.00341, 2020.
- 587 Zhihao Du, Qian Chen, Shiliang Zhang, Kai Hu, Heng Lu, Yexin Yang, Hangrui Hu, Siqi Zheng,  
588 Yue Gu, Ziyang Ma, Zhifu Gao, and Zhijie Yan. Cosyvoice: A scalable multilingual zero-shot  
589 text-to-speech synthesizer based on supervised semantic tokens, 2024. URL <https://arxiv.org/abs/2407.05407>.
- 590  
591  
592  
593

- 594 Qingkai Fang, Shoutao Guo, Yan Zhou, Zhengrui Ma, Shaolei Zhang, and Yang Feng. Llama-omni:  
595 Seamless speech interaction with large language models, 2024. URL [https://arxiv.org/  
596 abs/2409.06666](https://arxiv.org/abs/2409.06666).  
597
- 598 Zhifu Gao, Zerui Li, Jiaming Wang, Haoneng Luo, Xian Shi, Mengzhe Chen, Yabin Li, Lingyun  
599 Zuo, Zhihao Du, and Shiliang Zhang. Funasr: A fundamental end-to-end speech recognition  
600 toolkit. In *24th Annual Conference of the International Speech Communication Association,  
601 Interspeech 2023, Dublin, Ireland, August 20-24, 2023*, pp. 1593–1597. ISCA, 2023.
- 602 Team GLM, Aohan Zeng, Bin Xu, Bowen Wang, Chenhui Zhang, Da Yin, Dan Zhang, Diego Rojas,  
603 Guanyu Feng, Hanlin Zhao, Hanyu Lai, Hao Yu, Hongning Wang, Jiadai Sun, Jiajie Zhang, Jiale  
604 Cheng, Jiayi Gui, Jie Tang, Jing Zhang, Jingyu Sun, Juanzi Li, Lei Zhao, Lindong Wu, Lucen  
605 Zhong, Mingdao Liu, Minlie Huang, Peng Zhang, Qinkai Zheng, Rui Lu, Shuaiqi Duan, Shudan  
606 Zhang, Shulin Cao, Shuxun Yang, Weng Lam Tam, Wenyi Zhao, Xiao Liu, Xiao Xia, Xiaohan  
607 Zhang, Xiaotao Gu, Xin Lv, Xinghan Liu, Xinyi Liu, Xinyue Yang, Xixuan Song, Xunkai Zhang,  
608 Yifan An, Yifan Xu, Yilin Niu, Yuantao Yang, Yueyan Li, Yushi Bai, Yuxiao Dong, Zehan Qi,  
609 Zhaoyu Wang, Zhen Yang, Zhengxiao Du, Zhenyu Hou, and Zihan Wang. Chatglm: A family of  
610 large language models from glm-130b to glm-4 all tools, 2024. URL [https://arxiv.org/  
611 abs/2406.12793](https://arxiv.org/abs/2406.12793).
- 612 Michael Hassid, Tal Remez, Tu Anh Nguyen, Itai Gat, Alexis Conneau, Felix Kreuk, Jade Copet,  
613 Alexandre Défossez, Gabriel Synnaeve, Emmanuel Dupoux, Roy Schwartz, and Yossi Adi. Tex-  
614 tually pretrained speech language models. In *Advances in Neural Information Processing Systems  
615 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Or-  
616 leans, LA, USA, December 10 - 16, 2023*, 2023.
- 617 Haorui He, Zengqiang Shang, Chaoren Wang, Xuyuan Li, Yicheng Gu, Hua Hua, Liwei Liu, Chen  
618 Yang, Jiaqi Li, Peiyang Shi, Yuan Cheng Wang, Kai Chen, Pengyuan Zhang, and Zhizheng Wu.  
619 Emilia: An extensive, multilingual, and diverse speech dataset for large-scale speech generation.  
620 *CoRR*, abs/2407.05361, 2024.
- 621 Andrew Hines, Jan Skoglund, Anil Kokaram, and Naomi Harte. Visqol: an objective speech quality  
622 model. *EURASIP Journal on Audio, Speech, and Music Processing*, 2015 (13):1–18, 2015.  
623
- 624 Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhotia, Ruslan Salakhutdinov,  
625 and Abdelrahman Mohamed. Hubert: Self-supervised speech representation learning by masked  
626 prediction of hidden units. *IEEE ACM Trans. Audio Speech Lang. Process.*, 29:3451–3460, 2021.
- 627 Shengpeng Ji, Ziyue Jiang, Xize Cheng, Yifu Chen, Minghui Fang, Jialong Zuo, Qian Yang, Ruiqi  
628 Li, Ziang Zhang, Xiaoda Yang, Rongjie Huang, Yidi Jiang, Qian Chen, Siqi Zheng, Wen Wang,  
629 and Zhou Zhao. Wavtokenizer: an efficient acoustic discrete codec tokenizer for audio language  
630 modeling. *CoRR*, abs/2408.16532, 2024.
- 631
- 632 Mandar Joshi, Eunsol Choi, Daniel S. Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly  
633 supervised challenge dataset for reading comprehension. In *Proceedings of the 55th Annual Meet-  
634 ing of the Association for Computational Linguistics, ACL 2017, Vancouver, Canada, July 30 -  
635 August 4, Volume 1: Long Papers*, pp. 1601–1611. Association for Computational Linguistics,  
636 2017.
- 637 J. Kahn, M. Riviere, W. Zheng, E. Kharitonov, Q. Xu, P.E. Mazare, J. Karadayi, V. Liptchinsky,  
638 R. Collobert, C. Fuegen, T. Likhomanenko, G. Synnaeve, A. Joulin, A. Mohamed, and E. Dupoux.  
639 Libri-light: A benchmark for asr with limited or no supervision. In *ICASSP 2020 - 2020 IEEE  
640 International Conference on Acoustics, Speech and Signal Processing (ICASSP)*. IEEE, May  
641 2020. doi: 10.1109/icassp40776.2020.9052942. URL [http://dx.doi.org/10.1109/  
642 ICASSP40776.2020.9052942](http://dx.doi.org/10.1109/ICASSP40776.2020.9052942).
- 643 Jungil Kong, Jaehyeon Kim, and Jaekyoung Bae. Hifi-gan: Generative adversarial  
644 networks for efficient and high fidelity speech synthesis. In H. Larochelle,  
645 M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural In-  
646 formation Processing Systems*, volume 33, pp. 17022–17033. Curran Associates, Inc.,  
647 2020. URL [https://proceedings.neurips.cc/paper\\_files/paper/2020/  
file/c5d736809766d46260d816d8dbc9eb44-Paper.pdf](https://proceedings.neurips.cc/paper_files/paper/2020/file/c5d736809766d46260d816d8dbc9eb44-Paper.pdf).

- 648 Rithesh Kumar, Prem Seetharaman, Alejandro Luebs, Ishaan Kumar, and Kundan Kumar. High-  
649 fidelity audio compression with improved RVQGAN. In *Advances in Neural Information Process-*  
650 *ing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS*  
651 *2023, New Orleans, LA, USA, December 10 - 16, 2023*, 2023.
- 652 Kushal Lakhotia, Eugene Kharitonov, Wei-Ning Hsu, Yossi Adi, Adam Polyak, Benjamin Bolte,  
653 Tu-Anh Nguyen, Jade Copet, Alexei Baeviski, Abdelrahman Mohamed, and Emmanuel Dupoux.  
654 On generative spoken language modeling from raw audio. *Transactions of the Association for*  
655 *Computational Linguistics*, 9:1336–1354, 2021.
- 657 Xinjian Li, Shinnosuke Takamichi, Takaaki Saeki, William Chen, Sayaka Shiota, and Shinji Watan-  
658 abe. Yodas: Youtube-oriented dataset for audio and speech. In *IEEE Automatic Speech Recog-*  
659 *nition and Understanding Workshop, ASRU 2023, Taipei, Taiwan, December 16-20, 2023*, pp.  
660 1–8. IEEE, 2023a. doi: 10.1109/ASRU57964.2023.10389689. URL [https://doi.org/](https://doi.org/10.1109/ASRU57964.2023.10389689)  
661 [10.1109/ASRU57964.2023.10389689](https://doi.org/10.1109/ASRU57964.2023.10389689).
- 662 Xuechen Li, Tianyi Zhang, Yann Dubois, Rohan Taori, Ishaan Gulrajani, Carlos Guestrin, Percy  
663 Liang, and Tatsunori B. Hashimoto. AlpacaEval: An automatic evaluator of instruction-following  
664 models. [https://github.com/tatsu-lab/alpaca\\_eval](https://github.com/tatsu-lab/alpaca_eval), 5 2023b.
- 665 Chen-Chou Lo, Szu-Wei Fu, Wen-Chin Huang, Xin Wang, Junichi Yamagishi, Yu Tsao, and Hsin-  
666 Min Wang. Mosnet: Deep learning-based objective assessment for voice conversion. In Gernot  
667 Kubin and Zdravko Kacic (eds.), *20th Annual Conference of the International Speech Communi-*  
668 *cation Association, Interspeech 2019, Graz, Austria, September 15-19, 2019*, pp. 1541–1545.  
669 ISCA, 2019. doi: 10.21437/INTERSPEECH.2019-2003. URL [https://doi.org/10.](https://doi.org/10.21437/Interspeech.2019-2003)  
670 [21437/Interspeech.2019-2003](https://doi.org/10.21437/Interspeech.2019-2003).
- 671 Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization, 2019. URL [https:](https://arxiv.org/abs/1711.05101)  
672 [//arxiv.org/abs/1711.05101](https://arxiv.org/abs/1711.05101).
- 673 Shivam Mehta, Ruiho Tu, Jonas Beskow, Éva Székely, and Gustav Eje Henter. Matcha-TTS: A fast  
674 TTS architecture with conditional flow matching. In *Proc. ICASSP*, 2024.
- 675 Eliya Nachmani, Alon Levkovitch, Roy Hirsch, Julian Salazar, Chulayuth Asawaroengchai, Soroosh  
676 Mariooryad, Ehud Rivlin, R. J. Skerry-Ryan, and Michelle Tadmor Ramanovich. Spoken ques-  
677 tion answering and speech continuation using spectrogram-powered LLM. In *The Twelfth Inter-*  
678 *national Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*.  
679 OpenReview.net, 2024.
- 680 Tu Anh Nguyen, Wei-Ning Hsu, Antony D’Avirro, Bowen Shi, Itai Gat, Maryam Fazel-Zarandi, Tal  
681 Remez, Jade Copet, Gabriel Synnaeve, Michael Hassid, Felix Kreuk, Yossi Adi, and Emmanuel  
682 Dupoux. Espresso: A benchmark and analysis of discrete expressive speech resynthesis. In  
683 Naomi Harte, Julie Carson-Berndsen, and Gareth Jones (eds.), *24th Annual Conference of the*  
684 *International Speech Communication Association, Interspeech 2023, Dublin, Ireland, August 20-*  
685 *24, 2023*, pp. 4823–4827. ISCA, 2023.
- 686 Tu Anh Nguyen, Benjamin Muller, Bokai Yu, Marta R. Costa-jussa, Maha Elbayad, Sravya Popuri,  
687 Paul-Ambroise Duquenne, Robin Algayres, Ruslan Mavlyutov, Itai Gat, Gabriel Synnaeve, Juan  
688 Pino, Benoit Sagot, and Emmanuel Dupoux. Spirit-lm: Interleaved spoken and written language  
689 model, 2024. URL <https://arxiv.org/abs/2402.05755>.
- 690 OpenCSG Community. Chinese fineweb edu dataset. [https://huggingface.co/](https://huggingface.co/datasets/opencsg/chinese-fineweb-edu)  
691 [datasets/opencsg/chinese-fineweb-edu](https://huggingface.co/datasets/opencsg/chinese-fineweb-edu).
- 692 Long Ouyang, Jeff Wu, Xu Jiang, Diogo Almeida, Carroll L. Wainwright, Pamela Mishkin, Chong  
693 Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, John Schulman, Jacob Hilton, Fraser Kel-  
694 ton, Luke Miller, Maddie Simens, Amanda Askell, Peter Welinder, Paul Christiano, Jan Leike,  
695 and Ryan Lowe. Training language models to follow instructions with human feedback, 2022.
- 696 Vassil Panayotov, Guoguo Chen, Daniel Povey, and Sanjeev Khudanpur. Librispeech: An asr corpus  
697 based on public domain audio books. In *2015 IEEE International Conference on Acoustics,*  
698 *Speech and Signal Processing (ICASSP)*, pp. 5206–5210, 2015. doi: 10.1109/ICASSP.2015.  
699 [7178964](https://doi.org/10.1109/ICASSP.2015.7178964).

- 702 Guilherme Penedo, Hynek Kydlíček, Loubna Ben allal, Anton Lozhkov, Margaret Mitchell, Colin  
703 Raffel, Leandro Von Werra, and Thomas Wolf. The fineweb datasets: Decanting the web for the  
704 finest text data at scale, 2024. URL <https://arxiv.org/abs/2406.17557>.
- 705  
706 Vineel Pratap, Qiantong Xu, Anuroop Sriram, Gabriel Synnaeve, and Ronan Collobert. MLS: A  
707 large-scale multilingual dataset for speech research. In *21st Annual Conference of the Interna-*  
708 *tional Speech Communication Association, Interspeech 2020, Virtual Event, Shanghai, China,*  
709 *October 25-29, 2020*, pp. 2757–2761. ISCA, 2020.
- 710 Alec Radford, Jong Wook Kim, Tao Xu, Greg Brockman, Christine McLeavey, and Ilya Sutskever.  
711 Robust speech recognition via large-scale weak supervision. In Andreas Krause, Emma Brunskill,  
712 Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *International*  
713 *Conference on Machine Learning, ICML 2023, 23-29 July 2023, Honolulu, Hawaii, USA*, volume  
714 202 of *Proceedings of Machine Learning Research*, pp. 28492–28518. PMLR, 2023.
- 715 Takaaki Saeki, Detai Xin, Wataru Nakata, Tomoki Koriyama, Shinnosuke Takamichi, and Hiroshi  
716 Saruwatari. Utmos: Utokyo-sarulab system for voicemos challenge 2022, 2022. URL <https://arxiv.org/abs/2204.02152>.
- 717  
718  
719 Timo Schick, Jane Dwivedi-Yu, Roberto Dessì, Roberta Raileanu, Maria Lomeli, Luke Zettlemoyer,  
720 Nicola Cancedda, and Thomas Scialom. Toolformer: Language models can teach themselves to  
721 use tools, 2023.
- 722  
723 Aäron van den Oord, Sander Dieleman, Heiga Zen, Karen Simonyan, Oriol Vinyals, Alex Graves,  
724 Nal Kalchbrenner, Andrew W. Senior, and Koray Kavukcuoglu. Wavenet: A generative model  
725 for raw audio. In *The 9th ISCA Speech Synthesis Workshop, SSW 2016, Sunnyvale, CA, USA,*  
726 *September 13-15, 2016*, pp. 125. ISCA, 2016.
- 727 Changan Wang, Morgane Rivière, Ann Lee, Anne Wu, Chaitanya Talnikar, Daniel Haziza, Mary  
728 Williamson, Juan Pino, and Emmanuel Dupoux. Voxpopuli: A large-scale multilingual speech  
729 corpus for representation learning, semi-supervised learning and interpretation, 2021. URL  
730 <https://arxiv.org/abs/2101.00390>.
- 731 Chengyi Wang, Sanyuan Chen, Yu Wu, Ziqiang Zhang, Long Zhou, Shujie Liu, Zhuo Chen, Yanqing  
732 Liu, Huaming Wang, Jinyu Li, Lei He, Sheng Zhao, and Furu Wei. Neural codec language models  
733 are zero-shot text to speech synthesizers. *CoRR*, abs/2301.02111, 2023.
- 734  
735 Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny  
736 Zhou, et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in*  
737 *Neural Information Processing Systems*, 35:24824–24837, 2022.
- 738 Zhifei Xie and Changqiao Wu. Mini-omni: Language models can hear, talk while thinking in  
739 streaming, 2024. URL <https://arxiv.org/abs/2408.16725>.
- 740  
741 Zhangchen Xu, Fengqing Jiang, Luyao Niu, Yuntian Deng, Radha Poovendran, Yejin Choi, and  
742 Bill Yuchen Lin. Magpie: Alignment data synthesis from scratch by prompting aligned llms with  
743 nothing, 2024. URL <https://arxiv.org/abs/2406.08464>.
- 744 Junichi Yamagishi, Christophe Veaux, Kirsten MacDonald, et al. Cstr vctk corpus: English multi-  
745 speaker corpus for cstr voice cloning toolkit (version 0.92). *University of Edinburgh. The Centre*  
746 *for Speech Technology Research (CSTR)*, pp. 271–350, 2019.
- 747  
748 Zhuoyuan Yao, Di Wu, Xiong Wang, Binbin Zhang, Fan Yu, Chao Yang, Zhendong Peng, Xiaoyu  
749 Chen, Lei Xie, and Xin Lei. Wenet: Production oriented streaming and non-streaming end-to-  
750 end speech recognition toolkit. In *22nd Annual Conference of the International Speech Com-*  
751 *munication Association, Interspeech 2021, Brno, Czechia, August 30 - September 3, 2021*, pp.  
752 4054–4058. ISCA, 2021.
- 753 Neil Zeghidour, Alejandro Luebs, Ahmed Omran, Jan Skoglund, and Marco Tagliasacchi. Sound-  
754 stream: An end-to-end neural audio codec. *IEEE ACM Trans. Audio Speech Lang. Process.*, 30:  
755 495–507, 2022. doi: 10.1109/TASLP.2021.3129994. URL <https://doi.org/10.1109/TASLP.2021.3129994>.

756 Dong Zhang, Shimin Li, Xin Zhang, Jun Zhan, Pengyu Wang, Yaqian Zhou, and Xipeng Qiu.  
757 Speechgpt: Empowering large language models with intrinsic cross-modal conversational abil-  
758 ities, 2023. URL <https://arxiv.org/abs/2305.11000>.  
759

760 Susan Zhang, Stephen Roller, Naman Goyal, Mikel Artetxe, Moya Chen, Shuohui Chen, Christo-  
761 pher Dewan, Mona T. Diab, Xian Li, Xi Victoria Lin, Todor Mihaylov, Myle Ott, Sam Shleifer,  
762 Kurt Shuster, Daniel Simig, Punit Singh Koura, Anjali Sridhar, Tianlu Wang, and Luke Zettle-  
763 moyer. OPT: open pre-trained transformer language models. *CoRR*, abs/2205.01068, 2022.

764 Xin Zhang, Dong Zhang, Shimin Li, Yaqian Zhou, and Xipeng Qiu. Speeche tokenizer: Unified  
765 speech tokenizer for speech language models. In *The Twelfth International Conference on Learn-*  
766 *ing Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net, 2024.  
767

768 Wenliang Zhao, Xumin Yu, and Zengyi Qin. Melotts: High-quality multi-lingual multi-accent text-  
769 to-speech, 2023. URL <https://github.com/myshell-ai/MeloTTS>.

770 Lianmin Zheng, Liangsheng Yin, Zhiqiang Xie, Chuyue Sun, Jeff Huang, Cody Hao Yu, Shiyi Cao,  
771 Christos Kozyrakis, Ion Stoica, Joseph E. Gonzalez, Clark Barrett, and Ying Sheng. Sglang:  
772 Efficient execution of structured language model programs, 2024. URL <https://arxiv.org/abs/2312.07104>.  
773  
774  
775  
776  
777  
778  
779  
780  
781  
782  
783  
784  
785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809

## A TRAINING DATASETS

### A.1 INTERLEAVED SPEECH-TEXT DATA

Table 6: Statistics on interleaved pre-training data. Tokens measured in billion.

Dataset	Tokenizer	Corruption Ratio	Text Tokens	Speech Tokens	Speech Ratio	Total Tokens
Fineweb-Edu	Text-60k Speech-50Hz	0.30	56.21	343.79	0.86	400
	Text-60k Speech-25Hz	0.30	98.78	301.22	0.75	400
		0.10	282.82	117.18	0.29	400
		0.20	209.05	190.95	0.48	400
		0.30	158.43	241.57	0.60	400
		0.40	121.54	278.46	0.70	400
		0.50	93.48	306.52	0.77	400
		0.75	46.15	353.85	0.88	400
		1.00	0.10	399.90	1.00	400
		Text-60k Speech-6.25Hz	0.30	226.50	173.50	0.43
	Text-150k Speech-12.5Hz	0.30	150.51	249.49	0.62	400
Chinese-Fineweb-Edu	Text-60k Speech-12.5Hz	0.30	78.80	121.20	0.61	200
	Text-150k Speech-12.5Hz	0.30	77.59	122.41	0.61	200

### A.2 SUPERVISED SPEECH DATA

Table 7: TTS training data of text-to-token LLM with 12.5Hz speech tokenizer. Tokens measured in billions.

Language	Speech Hours	Speech Tokens	Text Tokens	Total Tokens
Chinese	94,980	4.27B	1.18B	5.45B
English	42,726	1.92B	0.56B	2.49B

Table 8: Training data breakdown of ASR task for 12.5Hz speech tokenizer. Tokens measured in billion.

Language	Speech Hours	Speech Tokens	Text Tokens	Total Tokens
Chinese	21,624	0.97B	0.42B	1.39B
English	68,733	3.09B	1.06B	4.16B



### A.3 TEXT-TO-TOKEN MODEL DATA

Table 9: Training data of text-to-token LLM with 12.5Hz speech tokenizer synthesized by CosyVoice model on span-corruption data.

Language	Speech Hours	Speech Tokens	Text Tokens	Total Tokens
Chinese	9,895	0.45B	0.13B	0.58B
English	11,074	0.50B	0.16B	0.65B

The data used to train the text-to-token model consists of two parts: the TTS data presented in Table 7 and the synthesized data of incomplete text spans the generated by CosyVoice, as detailed in Table 9.

## B TRAINING DETAILS

### B.1 SPEECH TOKENIZER

We fine-tune the vector-quantized Whisper model with a collection of ASR datasets, including LibriSpeech (Panayotov et al., 2015), GigaSpeech (Chen et al., 2021a), MLS-Eng (Pratap et al., 2020), Wenet (Yao et al., 2021), CommonVoice (Ardila et al., 2020), AISHELL-1 (Bu et al., 2017), and a proprietary Chinese ASR dataset of 10k hours. We also include the unsupervised speech data with pseudo labels generated by Whisper (Radford et al., 2023) for English and FunASR (Gao et al., 2023) for Chinese.

All of our speech tokenizers in Table 1 are fine-tuned from `whisper-large-v3` for 2 epochs with batch size 4096 and learning rate  $1e-5$ . The ratio of supervised samples to pseudo-labeled samples is 1:3. The codebook vectors are updated with exponential moving average with decay coefficient 0.99 and the commitment loss coefficient is 10.0. To reduce the information loss of average pooling, we increase the codebook size as the sampling rate decreases.

Table 10: **ASR results of Whisper models with pooling layers and vector quantization.** The LibriSpeech (English) is measured with word-error-rate (WER) and AISHELL-1 (Chinese) is measured with character-error-rate (CER). The first model is the original `whisper-large-v3` without fine-tuning.

Model	Sampling Rate	VQ Codebook	Finetuned	LibriSpeech		AISHELL-1 test
				test-clean	test-other	
<code>whisper-large-v3</code>	50Hz	-	No	2.50	4.53	9.31
<code>whisper-large-v3</code>	50Hz	4,096	Yes	1.85	3.78	2.70
<code>whisper-large-v3</code>	25Hz	4,096	Yes	1.94	4.16	2.86
<code>whisper-large-v3</code>	12.5Hz	16,384	Yes	2.10	4.90	3.02
<code>whisper-large-v3</code>	6.25Hz	65,536	Yes	2.48	6.34	3.33

During training of speech tokenizers, we measure the semantic information with accuracy of automatic speech recognition (ASR) datasets. We evaluate the finetuned Whisper on LibriSpeech (Panayotov et al., 2015) and AISHELL-1 (Bu et al., 2017), along with the original Whisper model. The results are shown in Table 10. Overall all the tokenizers reserve enough semantic information to achieve accurate ASR performance.

Table 11: Ablation study on block sizes in the block causal attention of speech tokenizers.

Model	Attention Type	Block Size	LibriSpeech		AISHELL-1 test
			test-clean	test-other	
whisper-large-v3	Bidirectional	-	3.45	5.82	4.71
whisper-large-v3	Causal	-	3.13	7.10	6.27
whisper-large-v3	Block Causal	0.5s	3.85	7.30	5.70
whisper-large-v3	Block Causal	1s	3.37	6.50	5.14
whisper-large-v3	Block Causal	2s	3.39	6.16	4.76

We also conduct an ablation study on the effect of block size in the block causal attention. In the ablation study we fine-tune the Whisper model with only the supervised ASR datasets for 20,000 steps with batch size 1024. For all the models we use VQ codebook size 4096 and sampling rate 25Hz. The results are shown in Table 11.

## B.2 SPEECH DECODER

The speech decoder uses the same architecture as the flow matching model in CosyVoice (Du et al., 2024). The decoder is trained from scratch for 2 epochs with dynamic batching of 20000 frames in a batch and learning rate 1e-3. For simplicity, we remove the speaker embeddings from the flow model. The training datasets include Emilia (He et al., 2024), Yodas2 (Li et al., 2023a), Libri-Light (Kahn et al., 2020) and a proprietary Chinese speech dataset.

## B.3 TEXT-TO-TOKEN MODEL

The text-to-token model is initialized from a 1.5B pre-trained text LM of the same architecture (further experiments indicate that training from scratch yields the same performance). The training dataset consists of the TTS corpus in Table 7 and Table 9, with sampling ratio proportionate to the number of samples in each subset. We use the AdamW (Loshchilov & Hutter, 2019) optimizer with  $\beta_1 = 0.9$  and  $\beta_2 = 0.95$ . The model is trained for 300B tokens with sequence length of 4096 and batch size of 256, learning rate that decays from  $4 \times 10^{-4}$  to  $4 \times 10^{-5}$ , and weight decay 0.1. The architecture of the text-to-token model is shown in Table 12 (number of speech tokens not included in the vocab size).

Table 12: Model architecture of the text-to-token language model.

Hyper-parameters	Value
Number of layers	28
Hidden size	2048
FFN inter hidden size	6144
Activation function	SwiGLU
Attention heads	16
Attention head size	128
Attention group size	4
Maximum sequence length	8192
Vocab size	59264

## B.4 SPEECH LANGUAGE MODEL

Table 13: Model architecture of the speech language model.

	9B	1.5B
Number of layers	40	28
Hidden size	4096	2048
FFN inter hidden size	13696	6144
Activation function	SwiGLU	SwiGLU
Attention heads	32	16
Attention head size	128	128
Attention group size	2	4
Maximum sequence length	8192	8192
Vocab size	151552	59264

## C EVALUATION DETAILS

For Spoken StoryCloze and Spoken TopicStoryCloze, we synthesize the speech for contexts and continuations with the provided texts with the TTS engine. When selecting the most probable continuation, the likelihood is normalized by the number of tokens in each continuation.

For Llama Questions, we use the audio files provided in the dataset<sup>1</sup>. We synthesize the speech for Web Questions and TriviaQA with the TTS engine. For TriviaQA, we randomly sample 1,000 samples from the test set of the ‘rc’ setting to match the size of the other two datasets. For all the three datasets of spoken question answering, we add the text prompt “the answer is” after the question for both the ‘S’ and ‘S→T’ settings. For the ‘S’ setting the model generates speech of at most 10 seconds, and for the ‘S→T’ setting the model generates at most 128 tokens.

## D CASE STUDY

### D.1 SPOKEN QUESTION ANSWERING

Here we provide examples of spoken question answering from Llama Questions, Web Questions, and TriviaQA. Given a question in speech, the speech language model predicts speech tokens, which are then fed into the speech decoder to get the output audio. We utilize *whisper-large-v3* to transcribe the audio into text.

Dataset: Llama Questions

**Question:** What is the capital of France? The answer is  
**Ground Truth:** Paris  
**Prediction:** Paris. The capital of France is Paris. Paris is the capital of the, the, the, the,

Dataset: Web Questions

**Question:** Who is governor of ohio 2011? The answer is  
**Ground Truth:** John Kasich  
**Prediction:** John Kasich. What is the name of the governor? 2012. The answer. John Kasich. What is

Dataset: TriviaQA

<sup>1</sup><https://github.com/google-research-datasets/LLAMA1-Test-Set>

1026 **Question:** Who plays the role of Bubble in Absolutely Fabulous? The  
1027 answer is  
1028 **Ground Truth:** Jane Horrocks  
1029 **Prediction:** Julia Steiner Julia Steiner is an American actor, singer and  
1030 dancer. He S he S he

1031  
1032 For the examples above we can observe that our model can answer questions about world knowledge.  
1033

## 1034 D.2 SPOKEN CHATBOT EVALUATION

1035  
1036 Here we provide examples of spoken chatbot evaluation. The question and response are transcrip-  
1037 tions of the speech input and output.

1038 Task: General QA

1039  
1040 **Question:** I need to get my nephew a birthday gift. I'm thinking of  
1041 giving him a game for his Nintendo Switch. Can you give me a few options  
1042 that came out recently?  
1043 **Response:** What a great nephew you are. Giving a game for his Nintendo  
1044 Switch is a fantastic idea. Here are some amazing options that just  
1045 released. Super Mario Odyssey, The Legend of Zelda Tears of the Kingdom,  
1046 Bookman Sword and Shield, Just Dance, Minecraft, The Elder Scrolls Five  
1047 Skyrim Anniversary Edition, Portal Knights, Shovel Knight, Celeste, and  
1048 Overcooked two. These games are highly rated and perfect for any  
1049 Nintendo Switch player. Choose one that matches his interests and enjoy  
1050 his birthday.  
1051 **Score:** 3

1052 Task: Knowledge

1053  
1054 **Question:** How many days does Hanukkah last?  
1055 **Ground Truth:** Eight  
1056 **Response:** Hanukkah, also known as the Festival of Lights, is an eight-  
1057 day Jewish holiday that commemorates the rededication of the Temple in  
1058 Jerusalem during the Maccabean Revolt. It typically falls in November or  
1059 December, depending on the Hebrew lunar calendar, the festival is  
1060 observed for eight days and nights, with each day corresponding to one  
1061 of the eight brands of the menorah. Traditional activities include  
1062 lighting the menorah, being frayed foods like lakes and sufkat,  
1063 exchanging gift, playing dreidel and reciting the Hanukkah prayers. The  
1064 lighting of the menorah is a central ritual. With the first candle lit  
1065 on the earth's day, additional candles added each day. A festival  
1066 includes on the eighth day with the lighting of the final candle and the  
1067 sabration of Shemini Atzeret and Simkat Torah. Some cultures celebrate  
1068 Hanukkah for Nidaz, including the Ishan al-Dev, Shemini Atzeret and  
1069 Simkat Torah.  
1070 **Judgment:** Correct

## 1071 D.3 INTERLEAVED PRE-TRAINING DATA

1072 Here we provide examples of speech-text interleaved pre-training data. The following examples  
1073 are sampled from FineWeb interleaved pre-training dataset with 150k text tokenizer and 12.5Hz  
1074 speech tokenizer. The speech tokens are transcribed by the corresponding ASR model of the speech  
1075 tokenizer and are displayed in **blue** and the special token in **bold**. An extra new line is added before  
1076 and after the audio segment for clarity.

1077 Eugene Van Reed  
1078 - Died: 1873  
1079

1080 <|begin.of.audio|> [53 speech tokens] originally from san francisco, van  
 1081 reed first traveled to japan in <|end.of.audio|>  
 1082 1859, where he established his own trading company, dealing in arms  
 1083 among other goods. Named Consul General of  
 1084 <|begin.of.audio|> [34 speech tokens] the hawaiian kingdom in eighteen  
 1085 sixty six <|end.of.audio|>  
 1086 he played a key role in  
 1087 <|begin.of.audio|> [43 speech tokens] organizing for the first japanese  
 1088 immigrants to travel to hawaii in <|end.of.audio|>  
 1089 1868. This first group of 148, known as the gannenmono, encountered  
 1090 severely harsh working conditions on the sugar plantations, leading to  
 1091 considerable tension between the governments of Japan, Hawaii,  
 1092 <|begin.of.audio|> [40 speech tokens] and the united states, resulting in  
 1093 official japanese, <|end.of.audio|>  
 1094 immigration to  
 1095 <|begin.of.audio|> [71 speech tokens] hawaii at not beginning until 1885,  
 1096 after lengthy negotiations <|end.of.audio|>  
 1097 .  
 1098 Van Reed died in 187 3 , aboard a ship called Japan , which he had been  
 1099 taking home to San Francisco from Japan .

1099 According to declarations from the sector Chambers, Argentina consumed  
 1100 340 million litres of pesticides and herbicides in the last year; and  
 1101 this quantity is increasing 15% to 20% each year. These poisons are  
 1102 sprayed, fumigated and applied to areas inhabited by 12 million people.  
 1103 For  
 1104 <|begin.of.audio|> [20 speech tokens] a long time the  
 1105 residents <|end.of.audio|>  
 1106 of the affected localities have been denouncing to suffer from serious  
 1107 diseases as a consequence of their being contaminated by  
 1108 <|begin.of.audio|> [52 speech tokens] the pestatites this situation was  
 1109 confirmed at the first <|end.of.audio|>  
 1110 and 2nd Meeting  
 1111 <|begin.of.audio|> [73 speech tokens] of physicians of the fumigated  
 1112 towns, at the cordoba medical cns of faculty, and, <|end.of.audio|>  
 1113 Medical Sciences Faculty of the Rosario National University , in 2010  
 1114 and 2011, respectively.  
 1115 There is  
 1116 <|begin.of.audio|> [62 speech tokens] substantial public demand to  
 1117 reclassify pesticides in arginina. this demand <|end.of.audio|>  
 1118 is sound: depending on how pesticides  
 1119 <|begin.of.audio|> [77 speech tokens] are classified the provincial and  
 1120 municipal regulations determine the distances between  
 1121 fumigated <|end.of.audio|>  
 1122 (sprayed) and inhabited areas.  
 1123 Currently, the classification is made according to the quantity in  
 1124 milligrams of poison that, when fed to rats, kills 50% of the population  
 1125 tested (Lethal Dose test or LD50); the less the quantity of poisonous  
 1126 substance is required,  
 1127 <|begin.of.audio|> [34 speech tokens] the higher the level of toxicity is  
 1128 attributed <|end.of.audio|>  
 1129 to that substance. As such, this form of measurement ignores medium and  
 1130 long term effects, including oncogenic, reproductive  
 1131 <|begin.of.audio|> [43 speech tokens] immunological and endocrine ones in  
 1132 the light of <|end.of.audio|>  
 1133 these facts,  
 1134 <|begin.of.audio|> [38 speech tokens] glyphosate should be reclassified  
 1135 as level ib <|end.of.audio|>  
 1136 (highly hazardous; the WHO recommended classification of pesticides by  
 1137 hazard), particularly because of the scientific and epidemiological  
 1138 data, showing that its accumulation in the body is connected to  
 1139 <|begin.of.audio|> [49 speech tokens] continental malformations and  
 1140 spontaneous abortions 1 <|end.of.audio|>

1134 3].  
 1135 Furthermore, the current toxicological classification of acute effects  
 1136 of pesticides  
 1137 <|begin\_of\_audio|> [24 speech tokens] done taking to account  
 1138 a <|end\_of\_audio|>  
 1139 new set of information and scientific data, which show the acute damage  
 1140 of these poisons for agricultural use on humans, and that are  
 1141 different from  
 1142 <|begin\_of\_audio|> [38 speech tokens] the findings in rodents  
 1143 highlighting patterns <|end\_of\_audio|>  
 1144 specific to humans.

## 1145 E PROMPT FOR CONSTRUCTING SPEECH DIALOGUE DATASET

1147  
 1148 You are an AI assistant designed to convert text SFT data into SFT data  
 1149 adjusted for speech synthesis tasks. Your task is to generate a modified  
 1150 response suitable for text-to-speech synthesis under the following  
 1151 conditions:

- 1152 - Exclusion of Unreadable Characters and Number Conversion: Remove any  
 1153 characters that text-to-speech (TTS) systems cannot synthesize, such as  
 1154 \*, parentheses (), bullet points, or other special symbols. Convert all  
 1155 numbers into their English word equivalents. For example, convert one to  
 1156 one, twenty to twenty, and so on. Do not include lists or line breaks;  
 1157 the response should be a single paragraph.
- 1158 - Specificity in Response: Make the response more specific and to the  
 1159 point, avoiding lengthy explanations. Focus on delivering the key  
 1160 message concisely.
- 1161 - Clarity: Ensure that the response is clear and easy to understand when  
 1162 spoken aloud.
- 1163 - Avoidance of Code Content: If the prompt suggests writing or  
 1164 generating code, return an empty JSON object. If the prompt only  
 1165 inquires about knowledge related to code without requiring code  
 1166 generation, provide a modified response.

1167 Below is the the conversation input:

```
1168 [Prompt]: {prompt}
1169 [Response]: {response}
```

1170 Please output in the following JSON format if the conditions are met:

```
1171 ```json
1172 {"response": "<modified_response>"}
1173 ```
```

1174  
 1175 If the prompt is filtered out, output: {}  
 1176

## 1177 F PROMPT TEMPLATE FOR SPOKEN DIALOGUE

### 1180 Direct Generation

```
1181 <|system|>
1182 User will provide you with a speech instruction. Think about the
1183 instruction and speak the response aloud directly.
1184 <|user|>
1185 <|begin_of_audio|>{Speech Instruction}<|end_of_audio|>
1186 <|assistant|>
1187 <|begin_of_audio|>{Speech Response}<|end_of_audio|>
```

1188  
1189  
1190  
1191  
1192  
1193  
1194  
1195  
1196  
1197  
1198  
1199  
1200  
1201  
1202  
1203  
1204  
1205  
1206  
1207  
1208  
1209  
1210  
1211  
1212  
1213  
1214  
1215  
1216  
1217  
1218  
1219  
1220  
1221  
1222  
1223  
1224  
1225  
1226  
1227  
1228  
1229  
1230  
1231  
1232  
1233  
1234  
1235  
1236  
1237  
1238  
1239  
1240  
1241

### Text-guided Generation

```
<|system|>
User will provide you with a speech instruction. Think about the
instruction and speak the response aloud directly.
<|user|>
<|begin_of_audio|>{Speech Instruction}<|end_of_audio|>
<|assistant|>transcript
{Text Response}
<|assistant|>
<|begin_of_audio|>{Speech Response}<|end_of_audio|>
```

## G PROMPT FOR EVALUATING SPOKEN CHATBOTS

### General QA

```
[Instruction]
Please act as an impartial judge and evaluate the quality of the
response provided by an AI assistant to the user question displayed
below. Your evaluation should consider factors such as the helpfulness,
relevance, accuracy, depth, creativity, and level of detail of the
response. Begin your evaluation by providing a short explanation. Be as
objective as possible. After providing your explanation, you must rate
the response on a scale of 1 to 10 by strictly following this format:
"[[rating]]", for example: "Rating: [[5]]".
```

```
[Question]
{instruction}

[The Start of Assistant's Answer]
{response}
[The End of Assistant's Answer]
```

### Knowledge

```
Your will be given a question, the reference answers to that question,
and an answer to be judged. Your tasks is to judge whether the answer to
be judged is correct, given the question and reference answers. An
answer considered correct expresses or contains the same meaning as at
least one of the reference answers. The format and the tone of the
response does not matter.
```

```
You should respond in JSON format. First provide a one-sentence concise
analysis for the judgement in field 'analysis', then your judgment in
field 'judgment'. For example,
```json
{"analysis": <a one-sentence concise analysis for the judgement>, "
judgment": <your final judgment, "correct" or "incorrect">}}
```
```

```
# Question
{instruction}

# Reference Answer
{targets}

# Answer To Be Judged
{answer_to_be_judged}
```