

# ON THE COMPLETENESS OF INVARIANT GEOMETRIC DEEP LEARNING MODELS

**Anonymous authors**

Paper under double-blind review

## ABSTRACT

Invariant models, one important class of geometric deep learning models, are capable of generating meaningful geometric representations by leveraging informative geometric features in point clouds. These models are characterized by their simplicity, good experimental results and computational efficiency. However, their theoretical expressive power still remains unclear, restricting a deeper understanding of the potential of such models. In this work, we concentrate on characterizing the theoretical expressiveness of a wide range of invariant models **under fully-connected conditions**. We first rigorously characterize the expressiveness of the most classic invariant model, message-passing neural networks incorporating distance (DisGNN), restricting its unidentifiable cases to be only highly symmetric point clouds. We then prove that GeoNGNN, the geometric counterpart of one of the simplest subgraph graph neural networks, can effectively break these corner cases' symmetry and thus achieve E(3)-completeness. By leveraging GeoNGNN as a theoretical tool, we further prove that: 1) most subgraph GNNs developed in traditional graph learning can be seamlessly extended to geometric scenarios with E(3)-completeness; 2) DimeNet, GemNet and SphereNet, three well-established invariant models, are also all capable of achieving E(3)-completeness. Our theoretical results fill the gap in the expressive power of invariant models, contributing to a rigorous and comprehensive understanding of their capabilities.

## 1 INTRODUCTION

Learning geometric structural information from 3D point clouds constitutes a fundamental requirement for various real-world applications, including molecular property prediction, physical simulation, and point cloud classification/segmentation (Schmitz et al., 2019; Sanchez-Gonzalez et al., 2020; Jumper et al., 2021; Guo et al., 2020).

In the context of designing geometric models for point clouds, a pivotal consideration involves ensuring that the model respects both permutation symmetry and Euclidean symmetry (i.e., symmetry of SE(3) or E(3) group). This requirement necessitates the incorporation of appropriate inductive biases into the architecture, ensuring that the model's output remains invariant or equivariant to point reordering and Euclidean transformation.

However, these restrictions on symmetry can impose limitations on the ability of models to approximate a broad range of functions. For example, Message Passing Neural Networks (MPNNs) (Gilmer et al., 2017), a representative class of Graph Neural Networks (GNNs), learn permutation symmetric functions over graphs. However, it has been shown that such functions are not universal (Xu et al., 2018a; Morris et al., 2019), leading to the development of more expressive GNN frameworks (Maron et al., 2018; Morris et al., 2019; Zhang et al., 2023). Similar challenges arise in the geometric setting, where models must additionally respect the Euclidean symmetry, and thus achieving geometric universality (E(3)-completeness) becomes a non-trivial task as well.

In this work, we systematically investigate the expressiveness of a wide range of invariant models **under fully-connected conditions**<sup>1</sup>, where interactions occur among all points. We begin by revisiting DisGNN, the simplest invariant model augmenting MPNNs with Euclidean distances between nodes

<sup>1</sup>Unlike analyses of *equivariant* methods, where sparse connections can be assumed, fully-connected conditions are commonly adopted in studies of *invariant* methods due to the substantial local information loss

as additional edge features. We want to ask a question: how close is DisGNN to completeness? Through theoretical analysis, we show **DisGNN is nearly-E(3)-complete** whose unidentifiable cases can be restricted to a 0-measure subset which only contains well-defined highly-symmetric point clouds. Our results extend the findings of previous works that solely concentrated on individual hand-crafted counterexamples illustrating the incompleteness of DisGNN (Li et al., 2024; Pozdnyakov & Ceriotti, 2022; Pozdnyakov et al., 2020), and a contemporary work that provided a strictly coarser characterization of DisGNN’s expressiveness (Hordan et al., 2024b).

We then show that **GeoNGNN**, the geometric counterpart of NGNN (Zhang & Li, 2021) (one simplest subgraph GNN), can effectively break all DisGNN’s unidentifiable cases’ symmetry through node marking, thereby achieving **E(3)-completeness**. We then leverage GeoNGNN as a theoretical tool, proceeding to establish the E(3)-completeness of a wide range of invariant models by showcasing their ability to implement GeoNGNN. Specifically, we systematically define the geometric counterparts of all subgraph GNNs within Zhang et al. (2023)’s framework by generalizing their local operations to incorporate geometric information, and then prove that **all of these geometric subgraph GNNs are E(3)-complete**. Furthermore, we establish that three well-established invariant geometric models, **DimeNet** (Gasteiger et al., 2019), **SphereNet** (Liu et al., 2021) and **GemNet** (Gasteiger et al., 2021), are also all **capable of achieving E(3)-completeness**.

These established E(3)-complete models, except for GemNet (Gasteiger et al., 2021), are either known to be strictly weaker than 2FWL (Cai et al., 1992) in traditional graph learning setting, or utilize less informative aggregation schemes than 2FWL-like geometric models (Li et al., 2024; Delle Rose et al., 2023; Hordan et al., 2024b;a) (See Section 5 for details). However, our investigation reveals that in the geometric setting, these models are equally E(3)-complete. These surprising findings can deepen our understanding of the power of invariant models, while also suggesting that the bottleneck of invariant models may lie in generalization instead of expressiveness. As a side effect, by generalizing subgraph GNNs to the geometric setting, we greatly enlarge the design space of geometric deep learning models, which we hope could inspire future, more powerful model designs.

## 2 RELATED WORKS

Designing complete invariant descriptors for point clouds plays a crucial role for scientific problems (Nigam et al., 2024), since complete invariants directly allow universal function approximations when coupled with MLPs (Hordan et al., 2024b; Li et al., 2024). Previous works, such as Widdowson & Kurlin (2022; 2023); Kurlin (2023), have proposed polynomial-time algorithms to compute and compare complete invariants that uniquely determine point clouds. However, these invariants are often highly structured, such as sets of matrices (Kurlin, 2023), and the absence of corresponding neural-network formulations limits their practical applicability.

In the neural-network context, most prior works propose powerful models but typically with “weaker completeness” (Wang et al., 2022; Puny et al., 2021; Duval et al., 2023; Du et al., 2024; Villar et al., 2021). For example, ComENet (Wang et al., 2022) uses nearest neighbors as references for computing higher-order geometric information, which is infeasible for symmetric point clouds where nodes can have multiple nearest neighbors, thereby limiting its completeness over a non-symmetric subset of point clouds<sup>2</sup>. Frame-based methods, such as FAENet (Duval et al., 2023), LEFTNet (Du et al., 2024), and others (Wang & Zhang, 2022; Puny et al., 2021), project coordinates or vector features onto local or global equivariant frames and employ powerful structures like MLPs (Hornik et al., 1989) to ensure expressiveness. However, these frames can degenerate in symmetric structures (e.g., structures with non-distinct eigenvectors (Puny et al., 2021; Duval et al., 2023)), a limitation that these methods do not carefully address and theoretically characterize. Although symmetric point clouds often represent zero-measure cases (Hordan et al., 2024b), they can significantly impact downstream continuous function learning, as demonstrated in (Pozdnyakov & Ceriotti, 2022; Hordan et al., 2024b).

Several previous works (Dym & Maron, 2020; Joshi et al., 2023; Hordan et al., 2024b; Li et al., 2024; Delle Rose et al., 2023; Hordan et al., 2024a) have characterized geometric models’ expressiveness

**inherent in invariant message passing. Despite this setup, the problem remains highly significant and unsolved; we provide detailed discussion of this condition in Section 5.4.**

<sup>2</sup>Arbitrarily selecting one when multiple nearest neighbors exist could break permutation invariance, a fundamental principle ensuring stable outputs. We focus only on invariant models.

in a more rigorous sense. The seminal work (Dym & Maron, 2020) proved the universality of structures like TFN (Thomas et al., 2018), while such universality requires arbitrarily high-order tensors that are computationally expensive in practice. Another related work, GWL (Joshi et al., 2023), offers many insightful theoretical conclusions, such as that GWL provides upper bounds on the expressiveness of many equivariant models (Batatia et al., 2022; Satorras et al., 2021). However, GWL relies on injective multiset functions involving equivariant features, which do not exhibit practical polynomial-time neural forms like scalar multiset functions proposed in (Dym & Gortler, 2024; Amir et al., 2024), thus serving more as conceptual upper bounds. Joshi et al. (2023) also does not directly address completeness of models as we do. Notably, recent works (Li et al., 2024; Delle Rose et al., 2023; Hordan et al., 2024b;a) have proposed provably complete geometric models that can produce complete invariant features. Nevertheless, these methods are predominantly built upon the 2-FWL framework (Cai et al., 1992), and the completeness of a broader class of invariant models—many of which employ weaker aggregation schemes (Gasteiger et al., 2019)—remains an open question. In this work, we focus on a significantly broader range of invariant methods (Schütt et al., 2018; Gasteiger et al., 2019; 2021; Liu et al., 2021; Zhang & Li, 2021; Zhang et al., 2023), some of which are newly proposed based on subgraph GNNs in traditional graph learning (Zhang & Li, 2021; Zhang et al., 2023), with the aim to fully characterize their completeness rigorously.

### 3 PRELIMINARY

#### 3.1 NOTATIONS AND DEFINITIONS

We investigate the expressiveness of invariant models for unlabeled point clouds consisting of  $n$  nodes<sup>3</sup>, denoted by  $P \in \mathbb{R}^{n \times 3}$ . The coordinates of the  $i$ -th node in  $P$  are represented by  $p_i$ . We denote sets using  $\{ \}$  and multisets using  $\{ \{ \}$ , and represent the set  $\{1, 2, \dots, n\}$  by  $[n]$ . The Euclidean distance between nodes  $i$  and  $j$  is denoted as  $d_{ij}$ .

Two point clouds  $P_1 \in \mathbb{R}^{n_1 \times 3}$  and  $P_2 \in \mathbb{R}^{n_2 \times 3}$  are *isomorphic* if  $n_1 = n_2 = n$ , and there exists a rotation matrix  $\mathbf{R} \in O(3)$ , a translation vector  $\mathbf{t} \in \mathbb{R}^3$ , and a permutation matrix  $\mathbf{P} \in \mathbb{R}^{n \times n}$  such that  $(\mathbf{P}P_1)\mathbf{R} + \mathbf{t} = P_2$ . Invariant models considered in this study are all *permutation- and E(3)-invariant*, meaning they embed isomorphic point clouds into the same  $k$ -dimensional representation  $s \in \mathbb{R}^k$ .

**Definition 3.1** (Distinguish, Identify, and E(3)-Completeness). Let  $f : \bigcup_{N=1}^{\infty} \mathbb{R}^{N \times 3} \rightarrow \mathbb{R}^k$  be a permutation- and E(3)-invariant function that maps point clouds to a  $k$ -dimensional representation. We define the following concepts:

- **Distinguish:** Given two non-isomorphic point clouds  $P_1$  and  $P_2$ , if  $f(P_1) \neq f(P_2)$ , we say  $f$  can distinguish  $P_1$  and  $P_2$ .
- **Identify:** For a point cloud  $P_1$ , if for any non-isomorphic  $P_2$ , we always have  $f(P_1) \neq f(P_2)$ , we say  $f$  can identify  $P_1$ .
- **E(3)-Completeness:** If for any pair of non-isomorphic point clouds  $P_1$  and  $P_2$ , we always have  $f(P_1) \neq f(P_2)$ , we say  $f$  is E(3)-complete.

Notably, we introduce the novel concept of “Identify”, which allows for a *finer-grained* analysis of model expressiveness than commonly adopted “Distinguish”: By definition, each “identify” operation encompasses an infinite number of “distinguish” pairs. It is evident that identifying all point clouds implies E(3)-completeness. Furthermore, since distinguishing point clouds with different node counts is straightforward, we focus solely on the case where point clouds have the same finite size.

For a parametric model  $f_\theta$ , we investigate its maximal expressive form where all intermediate functions are injective, following typical ways (Delle Rose et al., 2023; Li et al., 2024). Notably, recent work by Dym & Gortler (2024); Amir et al. (2024) proves the existence of neural function forms and parametrizations that ensure injectivity for multiset functions commonly used in geometric models (Gasteiger et al., 2019; 2021; Li et al., 2024), allowing us to achieve such completeness in polynomial time and under (for Lebesgue) almost every parametrization.

<sup>3</sup>Unlabeled point clouds represent one of the most complex and general cases in geometric expressiveness (Kurlin, 2023; Widdowson & Kurlin, 2023), surpassing the complexity of point clouds with initial features (e.g., molecules). We consider cases where  $P$  contains more than one point, as trivial cases arise otherwise.

### 3.2 DISGNN

To leverage the rich geometric information present in point clouds, a straightforward approach is to model the point cloud as a *distance graph*, where edges are present between nodes if their Euclidean distance is below a certain cutoff  $r_{\text{cutoff}}$ , and edge weights are Euclidean distance  $d_{ij}$ . Then, an MPNN is applied to it. We call models with such framework as DisGNN, and SchNet (Schütt et al., 2018) is a representative of such works.

To be specific, DisGNN models first embed nodes based on their initial node features  $X \in \mathbb{R}^{n \times d}$  (if there exists), such as atomic numbers, obtaining  $h_i^{(0)}$  for node  $i$ . They then perform message passing according to the following equation iteratively:

$$h_i^{(l+1)} = f_{\text{update}}^{(l)} \left( h_i^{(l)}, f_{\text{aggr}}^{(l)} \left( \{ \{ h_j^{(l)}, d_{ij} \} \mid j \in \mathcal{N}(i) \} \right) \right), \quad (1)$$

where  $h_i^{(l)}$  represents the node embedding for node  $i$  at layer  $l$ ,  $\mathcal{N}(i)$  denotes the neighbor set of node  $i$ . The global graph embedding is then obtained by aggregating the representations of all nodes using a permutation-invariant function  $f_{\text{out}}(\{ \{ h_i^L \mid i \in [n] \} \})$ , where  $L$  is the total number of layers and  $n$  is the total number of nodes.

In the theoretical analysis for DisGNN (Section 4), we assume *fully-connected* distance graph modeling for point clouds, i.e.,  $\mathcal{N}(i)$  is  $[n]$  by default, and sufficient iterations until convergence. This ensures maximal geometric expressiveness of DisGNN and aligns with existing works (Pozdnyakov & Ceriotti, 2022; Hordan et al., 2024b; Li et al., 2024).

## 4 HOW POWERFUL IS DISGNN?

In Pozdnyakov & Ceriotti (2022); Li et al. (2024), researchers have carefully constructed pairs of symmetric point clouds that DisGNN cannot distinguish to illustrate its E(3)-incompleteness. However, rather than relying on hand-crafted finite pairs of counterexamples and intuitive illustration, a more significant question arises: *what properties do the point clouds that DisGNN cannot identify share in common?* Only after theoretically characterizing these corner cases can we describe and bound the expressiveness of DisGNN in a rigorous way, and then design more powerful geometric models accordingly by “solving” these corner cases.

Naively, to determine whether a point cloud  $P$  can be identified by DisGNN requires iterating through all other point clouds  $P'$  within the entire cloud set  $\mathbb{R}^{n \times 3}$  according to its definition. Here, we propose a simple sufficient condition for a point cloud to be identifiable by DisGNN, which focuses *solely on P*. To achieve this, we first rigorously define the concept of  $\mathcal{A}$ -symmetry.

**Definition 4.1** ( $\mathcal{A}$ -symmetry). Given a point cloud  $P \in \mathbb{R}^{n \times 3}$ , let  $\mathcal{A}$  be a permutation-equivariant and E(3)-invariant algorithm taking  $P$  as input and produces node-level features  $X^{\mathcal{A}} = \mathcal{A}(P) \in \mathbb{R}^{n \times d}$  (we use  $x_i^{\mathcal{A}} \in \mathbb{R}^d$  to denote the  $i$ -th nodes’ feature). We define  $\mathcal{A}$  center set of  $P$  as  $\mathcal{A}^{\text{set}}(P) = \{ \frac{\sum_{i \in [n]} m(x_i^{\mathcal{A}}) p_i}{\sum_{i \in [n]} m(x_i^{\mathcal{A}})} \mid m : \mathbb{R}^d \rightarrow \mathbb{R}, \sum_{i \in [n]} m(x_i^{\mathcal{A}}) \neq 0 \}$ . If  $|\mathcal{A}^{\text{set}}(P)| = 1$ , then we say  $P$  is  $\mathcal{A}$ -symmetric; otherwise, we say  $P$  is  $\mathcal{A}$ -unsymmetric.

Intuitively,  $\mathcal{A}$  assigns features to nodes of the point cloud based on their spatial properties, while  $m$  represents a “mass” function that maps these features to corresponding “masses”.<sup>4</sup> Thus,  $\mathcal{A}^{\text{set}}(P)$  denotes the collection of “barycenters” associated with different “mass” assignments. For example, we can consider  $\mathcal{A}$  as the distance encoding function, denoted as  $\mathcal{C}$ , which computes the distance from each node to the geometric center as the node feature. A  $\mathcal{C}$ -unsymmetric case is shown in Figure 1(a).

Obviously, the cardinality of  $\mathcal{A}^{\text{set}}(P)$  is solely dependent on the *partition* of node features  $\mathcal{A}(P)$  and is independent of the specific feature values. We also propose a more powerful algorithm, DisGNN encoding, denoted as  $\mathcal{D}$ , which applies DisGNN to point clouds iteratively until the partition of node features stabilizes. Notably, earlier studies by Delle Rose et al. (2023); Li et al. (2024) have shown that  $\mathcal{D}$  guarantees a node feature partition that is no coarser than that of  $\mathcal{C}$ . Consequently,  $\mathcal{D}$ -symmetry always implies  $\mathcal{C}$ -symmetry, representing a stricter form of symmetry.

Based on these definitions, we now present the primary theorem demonstrating that all such unsymmetric point clouds can be identified by DisGNN.

<sup>4</sup>Note that the geometric center of  $P$  is always included in  $\mathcal{A}^{\text{set}}(P)$  by defining  $m$  as a constant function.

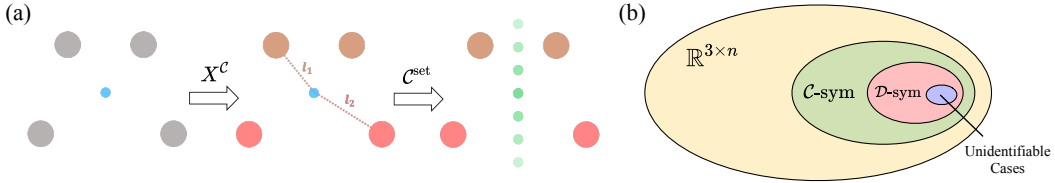


Figure 1: (a) A  $\mathcal{C}$ -unsymmetric point cloud. The blue small node represents the geometric center, and each green node represents an element in  $\mathcal{C}^{\text{set}}(P)$ . The large nodes constitute the point cloud, with different node colors denoting different node features. (b) Illustration of the relations among different subsets of the point cloud.  $\mathcal{A}$ -sym parts encompass all  $\mathcal{A}$ -symmetric graphs. Each subset has a measure of 0 and strictly contains their sub-parts (proper subset relation).

**Theorem 4.2** (Unsymmetric point clouds are identifiable). *Let  $\mathcal{C}$  denote the center distance encoding and  $\mathcal{D}$  the DisGNN encoding. Then, given an arbitrary point cloud  $P \in \mathbb{R}^{n \times 3}$ ,  $P$  is not  $\mathcal{C}$ -symmetric  $\Rightarrow P$  is not  $\mathcal{D}$ -symmetric  $\Rightarrow P$  can be identified by DisGNN.*

**Key idea.** Given a point cloud  $P$ , when it has two global-level *distinct anchors*, such as geometric center or other centers that can be determined in a permutation-invariant and  $E(3)$ -equivariant way, DisGNN has the potential to learn *triangular distance encoding* for each node  $i$  w.r.t.  $i$  and these two global anchors, and produces complete representation for  $P$  by leveraging such encoding information (Lemma H.6). For  $\mathcal{C}$ - or  $\mathcal{D}$ -unsymmetric point clouds, their center sets  $\mathcal{C}^{\text{set}}(P)$  or  $\mathcal{D}^{\text{set}}(P)$  have more than 1 element, within which any pair of distinct centers can be utilized by DisGNN for such encoding (Lemma H.4), thereby facilitating DisGNN to fully represent and identify  $P$ .

We provide rigorous proof in Appendix H.2 and *highly encourage readers to refer to it*, where we show the superior global geometric learning ability of DisGNN and can inspire the development of new complete model designs in the triangular distance encoding perspective, as exemplified by GeoNGNN proposed in the following section.

Theorem 4.2 shows that to test if a point cloud is identifiable by DisGNN, one can first check its  $\mathcal{C}$ -symmetry, which is quick and intuitive. If it is not  $\mathcal{C}$ -symmetric, it is identifiable; otherwise, one can test for the more powerful but costlier  $\mathcal{D}$ -symmetry. Notably, although the latter test still requires running DisGNN, it demonstrates that a single execution of DisGNN on  $P$  can provide an indication of identifiability, offering insights without necessitating an exhaustive search over all  $P' \in \mathbb{R}^{n \times 3}$ .

Importantly, Theorem 4.2 restricts the unidentifiable set of DisGNN to a constrained, highly symmetric subset, as illustrated in Figure 1(b). In Theorem 4.3, we provide a rigorous analysis demonstrating that the unidentifiable set of DisGNN has zero measure. These results sufficiently demonstrate that, despite its extremely simple and naive design, DisGNN is **nearly  $E(3)$ -complete**. Rigorous proof is provided in Appendix B.2.

**Theorem 4.3** (Unidentifiable set of DisGNN has measure zero). *The Lebesgue measure on  $\mathbb{R}^{n \times 3}$  of the  $\mathcal{C}$ -symmetric,  $\mathcal{D}$ -symmetric, and unidentifiable point cloud sets is zero.*

Finally, we note that a recent study (Hordan et al., 2024b) also indicates the near-completeness of DisGNN, by showing that it can distinguish arbitrary pairs of point clouds from an unsymmetric point cloud  $\mathbb{R}_{\text{distinct}}^{n \times 3}$ . Nevertheless, our findings represent a significant advancement by introducing two strictly larger unsymmetric subsets and employing the concept of “identify” instead of “pair-wise distinguish”. This provides a much finer characterization of the near completeness of DisGNN. Please refer to Appendix B.2 for a detailed comparison.

## 5 ON THE COMPLETENESS OF INVARIANT GEOMETRIC MODELS

In this section, we move on to demonstrate and prove the  $E(3)$ -completeness of a broad range of invariant models that leverage more geometric features or more complicated aggregation schemes than DisGNN **under fully-connected conditions**. These models can effectively identify all those highly-symmetric point clouds that DisGNN can not. We first introduce a new simple invariant model design, which can precisely break such symmetry and achieve completeness. Consequently, we show how this new design serves as a theoretical tool for proving a wide range of invariant models’ expressiveness. Proof for this section is provided in Appendix H.

## 270 5.1 GEONGNN: BREAKING SYMMETRY THROUGH NODE MARKING

271  
272 According to Theorem 4.2 (along with the lemmas emphasized in its key idea), the essential factor in  
273 identifying a point cloud by DisGNN is the existence of two distinct anchors. Although every point  
274 cloud inherently possesses one, i.e., the geometric center, the other may not exist in some highly  
275 symmetric cases, such as a sphere. This hinders DisGNN from achieving completeness. In this  
276 subsection, we show that GeoNGNN, the geometric counterpart of Nested GNN (NGNN) (Zhang  
277 & Li, 2021)<sup>5</sup>, can fill in this last piece of the puzzle by applying DisGNN on point clouds with an  
278 additionally marked node, which breaks the symmetry and exactly acts as the other anchor.

279 GeoNGNN employs a two-level hierarchical framework by *nesting* DisGNN. Specifically, it processes  
280 a given point cloud as follows: **1)** The first level, termed the inner GNN, operates independently on  
281 each point’s  $r_{\text{sub}}$ -sized sub-point cloud, and aggregates the local sub-point cloud’s information into  
282 an initial embedding for the corresponding point in the original point cloud. **2)** The second level,  
283 termed the outer GNN, processes the original point cloud based on the embeddings generated by the  
284 inner GNN, thereby producing final point-level and cloud-level representations.

285 Formally, for the inner GNN, the representation of the node  $j$  in node  $i$ ’s sub-point cloud at the  $l$ -th  
286 layer, denoted as  $h_{ij}^{(l)}$ , is updated as:

$$287 \quad h_{ij}^{(l+1)} = f_{\text{update, inner}}^{(l)} \left( h_{ij}^{(l)}, f_{\text{aggr, inner}}^{(l)} \left( \{ \{ h_{ik}^{(l)}, d_{kj} \} \mid k \in \mathcal{N}(j), d_{ik} \leq r_{\text{sub}} \} \right) \right), \quad (2)$$

290 for all  $h_{ij}$  such that  $d_{ij} \leq r_{\text{sub}}$ . Here,  $\mathcal{N}(j)$  represents all points  $k$  satisfying  $d_{jk} \leq r_{\text{cutoff}}$ , and  $h_{ij}^{(0)}$   
291 is initialized as:

$$292 \quad h_{ij}^{(0)} = f_{\text{init, inner}}(x_j, d_{ij}, \mathbb{1}_{i=j}), \quad (3)$$

293 where  $x_j$  is the raw feature of node  $j$ , and  $d_{ij}$  and  $\mathbb{1}_{i=j}$  denote the position encoding and marking of  
294 the center point, respectively. After  $N_{\text{in}}$  iterations, the inner GNN summarizes the sub-point cloud as:

$$295 \quad h_i^{(0)} = f_{\text{output, inner}}(\{ \{ h_{ij}^{(N_{\text{in}})} \} \mid j \in [N], d_{ij} \leq r_{\text{sub}} \}), \quad (4)$$

297 producing the initial point representations for the outer GNN. The outer GNN then updates these  
298 representations over  $N_{\text{out}}$  iterations following the framework in Equation (1).

300 By representing point clouds as distance graphs, GeoNGNN captures *subgraph* patterns instead of  
301 *subtree* patterns, which have been shown to be more expressive in traditional graph learning (Zhang  
302 & Li, 2021). We now show that GeoNGNN achieves geometric completeness under fully-connected  
303 conditions, thereby effectively addressing expressiveness limitations of DisGNN.

304 **Theorem 5.1** (E(3)-Completeness of GeoNGNN). *When the following conditions are met, GeoNGNN*  
305 *is E(3)-complete:*

- 306 •  $N_{\text{in}} \geq 5$  and  $N_{\text{out}} \geq 0$  (where 0 indicates that the outer GNN only performs final pooling).
- 307 • The distance graph is fully-connected ( $r_{\text{cutoff}} = +\infty$ ).
- 308 • All subgraphs are the original graph ( $r_{\text{sub}} = +\infty$ ).

309 **Key idea.** Given an arbitrary point cloud  $P$ , consider a specific node  $i$  within it that differs from the  
310 geometric center. As node  $i$  is explicitly marked within its own subgraph, there are now two anchors  
311 in this subgraph, namely node  $i$  and the geometric center, that facilitate triangular distance encoding  
312 by DisGNN. Consequently, DisGNN can fully represent and identify  $P$  through the representation of  
313 node  $i$ ’s subgraph, as underscored in the key idea of Theorem 4.2. Notice that in a point cloud with  
314 more than two nodes, a node that is distinct from the geometric center always exists, and through the  
315 outer pooling, overall completeness and permutation invariance are guaranteed.

316 While Theorem 5.1 establishes that infinite subgraph radius and distance cutoff guarantee com-  
317 pleteness over all point clouds, in Appendix C.2 we show that finite values also lead to boosted  
318 expressiveness compared to DisGNN. And we notice that the conditions specified in Theorem 5.1  
319 ultimately result in *polynomial-time* complexity w.r.t. the size of the point cloud even when consider-  
320 ing the complexity involved in obtaining intermediate injective functions, which aligns with prior  
321 studies (Kurlin, 2023; Widdowson & Kurlin, 2023; Hordan et al., 2024b; Li et al., 2024; Delle Rose  
322 et al., 2023). The detailed complexity analysis is provided in Appendix C.1.

323 <sup>5</sup>We provide detailed design of NGNN (Zhang & Li, 2021) in Appendix G.2 for self-containment.

## 5.2 COMPLETENESS OF GEOMETRIC SUBGRAPH GNNs

GeoNGNN provides a simple approach to extend traditional subgraph GNNs to geometric scenarios with remarkable geometric expressiveness. Indeed, the realm of traditional graph learning literature contains a multitude of subgraph GNNs such as DSS-GNN (Bevilacqua et al., 2021), GNN-AK (Zhao et al., 2021), OSAN (Qian et al., 2022) and so on (You et al., 2021; Frasca et al., 2022). Extending these models to geometric settings can significantly *enlarge the design space* of geometric models, and potentially introduce *valuable inductive biases*. In this section, we take a pioneering step to do this, subsequently establishing the geometric completeness of all these models.

We first define the *general geometric subgraph GNN*, a broad family of geometric models, by slightly adapting the unweighted graph models from Zhang et al. (2023) to handle geometric scenarios. For simplicity, we provide an intuitive overview and outline the modifications here, while self-contained and formal definitions can be found in Appendix E.

**Definition 5.2** (General geometric subgraph GNN, *informal*). A general geometric subgraph GNN takes point clouds  $P \in \mathbb{R}^{n \times 3}$  (potentially with node features  $X \in \mathbb{R}^{n \times d}$ , such as atomic numbers) as input, treats it as a distance graph with cutoff  $r_{\text{cutoff}}$ , and:

- Utilizes node marking with  $r_{\text{sub}}$ -size ego subgraph as the subgraph generation policy.
- Stacks multiple geometric subgraph GNN layers, each following *general subgraph GNN layer* defined in Zhang et al. (2023), which could arbitrarily include single-point, global, and local operations for aggregating graph information at different levels. The only modification is to the local operations: when updating  $h_{uv}$  (the representation of node  $v$  in  $u$ 's subgraph), distance information is additionally integrated, thus the local operations aggregate information  $\{(h_{uw}, d_{vw}) \mid w \in \mathcal{N}(v)\}$  and  $\{(h_{uv}, d_{uw}) \mid w \in \mathcal{N}(u)\}$  respectively.
- It adopts vertex-subgraph or subgraph-vertex pooling schemes (Zhang et al., 2023) to summarize node and subgraph features and produce the final graph representation.

It is noteworthy that GeoNGNN (without outer layers) represents a particular instance of general geometric subgraph GNNs, focusing solely on *intra-subgraph* message propagation. Beyond this scope, general geometric subgraph GNNs have the capability to engage in *inter-subgraph* message passing in diverse manners and adopt different pooling schemes. Now, we show that the whole family, *with at least one local aggregation*, is complete under exactly the same conditions as GeoNGNN.

**Theorem 5.3** (Completeness for general geometric subgraph GNNs). *Under the conditions specified in Theorem 5.1, all general geometric subgraph GNNs in Definition 5.2 with at least one local aggregation are E(3)-complete.*

**Key idea.** It can be shown that any type of general geometric subgraph GNNs, which could employ any combination of aggregation and pooling schemes, can implement (Frasca et al., 2022) GeoNGNN, which is established as an E(3)-complete model in Theorem 5.1. Consequently, any general geometric subgraph GNN can also achieve E(3)-completeness under the same conditions as GeoNGNN.

Concerning prior research on traditional subgraph GNNs (Bevilacqua et al., 2021; Zhao et al., 2021; Qian et al., 2022; You et al., 2021; Frasca et al., 2022), their geometric counterparts can be defined correspondingly, by substituting all local aggregation schemes with *distance-aware* counterparts. We denote their geometric counterpart by prefixing *Geo* to their original names, for instance, GeoSUN Frasca et al. (2022). Consequently, it can be established that some of them precisely fall into the general definition 5.2, such as GeoOSAN (Qian et al., 2022), and for the others such as GeoGNN-AK (Zhao et al., 2021) and GeoSUN Frasca et al. (2022), while even though they do not exactly match the general definition, they can still implement GeoNGNN, thereby exhibiting E(3)-completeness (Theorem E.2). Please refer to Appendix E.2 for details about all of these.

We note that all subgraph GNNs in this section have been proven to be strictly weaker than 2FWL (Cai et al., 1992) *in traditional graph learning context* (Zhang et al., 2023). Specifically, there exist pairs of unweighted graphs that can be distinguished by 2FWL but remain indistinguishable by these subgraph GNNs. Moreover, these subgraph GNNs themselves establish a strict expressiveness hierarchy (Zhang et al., 2023). Interestingly, our findings reveal that *all of these discrepancies diminish* when these models are extended to geometric scenarios with point clouds by leveraging distance graphs. This phenomenon could be attributed to the low-rank nature of distance graphs, whose intrinsic dimension is less than the point cloud space dimension  $3n$  rather than equals to their ambient dimension  $n^2$ .

### 5.3 COMPLETENESS OF WELL-ESTABLISHED INVARIANT MODELS

Based on the completeness of GeoNGNN, we move on to establish the E(3)-completeness of several well-established invariant models, including DimeNet (Gasteiger et al., 2019), GemNet (Gasteiger et al., 2021) and SphereNet (Liu et al., 2021). These models do not exactly learn on subgraphs, however, can still be mathematically aligned with GeoNGNN. Formal descriptions of these models can be found in Appendix H.5.

**Theorem 5.4** (E(3)-Completeness of DimeNet, SphereNet, GemNet). *When the following conditions are met, DimeNet, SphereNet<sup>6</sup> and GemNet are E(3)-complete.*

- *The aggregation layer number is larger than some constant  $C$ , which is irrelevant to the node number.*
- *They initialize and update all edge representations, i.e.,  $r_{embed} = +\infty$ .*
- *They interact with all neighbors, i.e.,  $r_{int} = +\infty$ .<sup>7</sup>*

**Key idea.** The key insight underlying is that all these models track edge representations ( $h_{ij}^{edge}$  for edge  $(i, j)$ ), which can be mathematically aligned with the node-subgraph representations tracked in GeoNGNN ( $h_{ij}^{subg}$  for node  $j$  in subgraph  $i$ ). Moreover, the additionally incorporated features, such as angles, can all be equivalently expressed by multiple distances. Consequently, these three models can all implement GeoNGNN, and thereby achieving completeness.

Note that DimeNet is a relatively simpler invariant model that aggregates neighbor information in a *weaker manner* compared to existing 2FWL-like complete geometric models such as 2F-DisGNN (Li et al., 2024). Specifically, when updating  $h_{ij}$ , DimeNet can be equivalently considered as aggregating  $(h_{ki}, d_{kj})$  for a specific neighbor  $k$ , while 2F-DisGNN aggregates  $(h_{ik}, h_{kj})$ . The latter incorporates a more informative hidden representation  $h_{kj}$ , which is essential in the proof of 2F-DisGNN’s completeness (Li et al., 2024; Delle Rose et al., 2023), instead of  $d_{kj}$  in the former. Nevertheless, our findings first show that these models are equally E(3)-complete under fully-connected conditions. Consequently, future developments like GemNet that integrate higher-order geometry could be unnecessary in terms of boosting theoretical expressiveness under such conditions.

### 5.4 SUMMARIZATION AND DISCUSSION

**Fully-Connected Condition.** Thus far, we have characterized a broad collection of E(3)-complete invariant models under similar conditions. Among these conditions, the condition of *fully-connected* geometric graphs (or equivalently, *infinite* cutoffs) is required. Notably, this condition is consistent with all prior works that rigorously characterize invariant models/descriptors in the same sense, including (Kurlin, 2023; Widdowson & Kurlin, 2022; 2023; Li et al., 2024; Delle Rose et al., 2023; Hordan et al., 2024b;a). And due to significant local information loss during invariant message passing (Joshi et al., 2023; Du et al., 2024), even under this condition the characterization remains highly nontrivial, as evidenced in our theoretical proofs in Appendix H. Indeed, removing the fully-connected condition would require conditions about specific forms of sparsity, which would be considerably more demanding than the overall connectivity typically required by equivariant models (Joshi et al., 2023; Du et al., 2024; Wang et al., 2024; Sverdlow & Dym, 2024) that can maintain local information through equivariant features. Such characterization is left for future work.

**Theoretical Characterization vs. Practical Use.** In practical scenarios, *efficiency* and *generalization* are often prioritized, and local/sparse connectivity can typically offer empirical advantages in these aspects (Musaelian et al., 2023). Thus, strictly adhering to the complete condition which requires full connectivity is unnecessary, and finding a balance is crucial, as demonstrated in our additional experiments in Appendix D (Figure 6). However, this does not diminish the importance of theoretical characterization, since theoretical completeness provides an *upper bound* for the parametric model’s potential—when combined with MLPs (Hornik et al., 1989), complete models can achieve universal approximation over continuous invariant functions (Hordan et al., 2024b; Li et al., 2024). This is

<sup>6</sup>Here in SphereNet we do not consider the relative azimuthal angle  $\varphi$ , since SphereNet with  $\varphi$  is not E(3)-invariant, while E(3)-completeness is defined on E(3)-invariant models. Note that the exclusion of  $\varphi$  only results in weaker expressiveness.

<sup>7</sup>In DimeNet and GemNet, nodes  $i$  or  $j$  are excluded when aggregating neighbors for edge  $ij$ . The condition requires the inclusion of these end nodes.



analogous to the universal approximation property for MLPs (Hornik et al., 1989) and the Turing completeness for RNNs (Siegelmann & Sontag, 1992), where practical implementations do not (and typically cannot) satisfy all theoretical conditions, yet these results indicate their superiority over weaker structures that cannot achieve certain approximations even with unlimited resources. Furthermore, for models like GeoNGNN, relaxing the fully-connected condition still leads to better expressiveness compared to DisGNN (Appendix C.2), indicating potential for superior performance.

**SE(3)-complete Counterpart.** Finally, we present a provable SE(3)-complete variant of GeoNGNN, capable of distinguishing chiral molecules, by making a minor modification to the distance features through the addition of an orientation sign. This is further detailed in Appendix F.

## 6 EXPERIMENTS

In this section, we conduct additional assessments to validate our theoretical claims. The first experiment aims to verify the conclusion that DisGNN is nearly complete by assessing the proportion of its unidentifiable cases in real-world point clouds. The second experiment is designed to evaluate whether the complete models consistently demonstrate separation power for challenging pairs of point clouds, where numerical precision may influence the outcomes. We provide more evaluations of GeoNGNN on practical molecular-relevant tasks in Appendix D, which could offer further insights.

### 6.1 ASSESSMENT OF UNIDENTIFIABLE CASES OF DISGNN

In Theorem 4.3, we have rigorously shown the rarity of symmetric point cloud sets, which are supersets of the unidentifiable set of DisGNN. However, since real-world point clouds are typically subject to *slight noise*, requiring exact symmetry would be overly restrictive. Therefore, we address a more challenging setting by explicitly accounting for noise and evaluating the rarity of **relaxed symmetric** point clouds in practical scenarios. To this end, we first define two noise tolerances that allow us to relax the exact  $\mathcal{C}$ - and  $\mathcal{D}$ -symmetry.

**Noise Tolerances.** 1) The *rounding number*  $r$  for distance-related calculations. When applying algorithms  $\mathcal{C}$  and  $\mathcal{D}$ , we round the distance values to  $r$  decimal places for robustness to noise. 2) The *deviation error*  $\epsilon$ . In Definition 4.1, we define symmetry by the set of extended "mass" centers. We provide an equivalent definition in Proposition B.4, which shows that a point cloud is  $\mathcal{A}$ -symmetric if and only if the geometric centers of all sub-point clouds, partitioned by distinct node features of  $\mathcal{A}$ , coincide. This alternative definition allows us to define another noise tolerance: we now consider a point cloud as symmetric if all sub-point clouds' centers described above lie within a ball of radius  $\epsilon$ . Together,  $r$  and  $\epsilon$  define a relaxed symmetry that accounts for noise in real-world point clouds. When  $r \rightarrow +\infty$  and  $\epsilon \rightarrow 0$ , the relaxed symmetry becomes the exact theoretical symmetry.

We are now ready to evaluate the proportion of relaxed symmetric point clouds in real-world datasets. We select two representative datasets, namely QM9 (Ramakrishnan et al., 2014; Wu et al., 2018) and ModelNet40 (Wu et al., 2015), for this assessment. The QM9 dataset comprises approximately 130K molecules, while the ModelNet40 dataset consists of roughly 12K real-world point clouds categorized into 40 classes, including objects such as chairs. We first rescale all point clouds, and then fix the rounding number to small values and evaluate the proportion of symmetric point clouds with respect to different values of  $\epsilon$ . Please refer to Appendix B.3 for detailed settings.

Results are shown in Figure 2. Here are several key observations: 1) For the QM9 dataset, even with the largest deviation error ( $10^{-1}$ ), the proportion of  $\mathcal{C}$ - and  $\mathcal{D}$ -symmetric point clouds is less than  $\sim 0.15\%$  of the entire dataset. Since  $\mathcal{C}$ - and  $\mathcal{D}$ -symmetric point cloud sets are supersets of the unidentifiable set of DisGNN, the unidentifiable proportion is therefore no more than  $\sim 0.15\%$ . With the strictest deviation error, only 0.0046% of the graphs (6 out of  $\sim 130\text{K}$ ) exhibit  $\mathcal{D}$ -symmetry. 2) For the ModelNet40 dataset, when the deviation error is less than  $10^{-2}$ , only 1 point cloud exhibit  $\mathcal{C}$ -symmetry. Moreover, no  $\mathcal{D}$ -symmetric point clouds are found across all deviation errors.

To summarize, the statistical results suggest that the occurrence of unidentifiable graphs in DisGNN is practically negligible in real-world scenarios, even when the criteria are significantly relaxed. This supports the conclusion that DisGNN is almost E(3)-complete.

486  
487  
488  
489  
490  
491  
492  
493  
494  
495  
496  
497  
498  
499  
500  
501  
502  
503  
504  
505  
506  
507  
508  
509  
510  
511  
512  
513  
514  
515  
516  
517  
518  
519  
520  
521  
522  
523  
524  
525  
526  
527  
528  
529  
530  
531  
532  
533  
534  
535  
536  
537  
538  
539

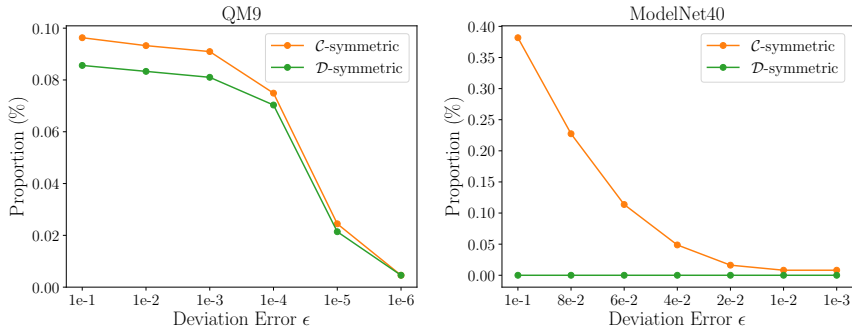


Figure 2: Assessment of symmetric point clouds in real-world datasets. (a) Proportion of symmetric point clouds in QM9 ( $r = 2$ ). (b) Proportion of symmetric point clouds in ModelNet40. The proportion of  $\mathcal{D}$ -symmetric point clouds in ModelNet40 is zero across all deviation errors ( $r = 1$ ).

## 6.2 SEPARATION POWER ON SYNTHETIC POINT CLOUD PAIRS

To construct hard-to-distinguish counterexamples, we develop a geometric expressiveness dataset based on the counterexamples proposed by Li et al. (2024). The synthetic dataset consists of 10 isolated and 7 combinatorial counterexamples. Each counterexample is composed of a pair of highly symmetric point clouds (all of which are  $\mathcal{D}$ -symmetric, as described in Section 4), which are non-isomorphic yet *indistinguishable by DisGNN*. We provide some examples in Figure 7, and please refer to Appendix G for further settings.

Table 1: Separation results on the constructed geometric expressiveness dataset. Models for which we have theoretically established completeness are highlighted in gray.

	Invariant						Equivariant	
	SchNet	DisGNN	DimeNet	SphereNet	GemNet	GeoNGNN	PaiNN	MACE
Isolated (10 cases)	0%	0%	100%	100%	100%	100%	100%	100%
Combined (7 cases)	0%	0%	100%	100%	100%	100%	100%	100%

Results are presented in Table 1. As shown, our established complete models can all distinguish these challenging pairs effectively, whereas DisGNN and SchNet cannot. This supports our theory and indicates that numerical precision is not impacting these complete models’ separation ability here. Interestingly, two equivariant models, PaiNN (Schütt et al., 2021) and MACE (Batatia et al., 2022) that leverages vectors and high-order tensors respectively, also effectively distinguish all the pairs. This prompts further question of whether they are also complete, especially under sparse connections or *finite* tensor orders, and requires further investigation.

## 7 CONCLUSION AND LIMITATION

**Conclusion.** In this study, we thoroughly analyze a wide range of invariant models’ theoretical expressiveness **under fully-connected condition**. Specifically, we rigorously characterize the expressiveness of DisGNN, showcasing that all its unidentifiable cases exhibit  $\mathcal{D}$ -symmetry and have a measure of 0. We then establish a large family of  $E(3)$ -complete models, which encompasses GeoNGNN, geometric subgraph GNNs, as well as three established models - DimeNet, GemNet, and SphereNet. This contributes significantly to a comprehensive understanding of invariant geometric models. Moreover, the newly introduced geometric subgraph GNNs notably enlarge the design space of expressive geometric models. Experiments further validate our theoretical findings.

**Limitation.** The rigorous  $E(3)$ -completeness characterization for invariant models is under the conditions of fully connected graphs, which can be limited and have been throughout discussed in Section 5.4. The extent to which invariant models can exhibit high expressiveness on general *sparse* graphs remains an open question that needs further investigation. Additionally, future research is needed to characterize the expressiveness of vector models that rely solely on 1-order equivariant representations and adopt atom-level representations, such as PaiNN (Schütt et al., 2021), which show promising experimental results but still lack theoretical expressiveness characterization.

## REFERENCES

- 540  
541  
542 Keir Adams, Lagnajit Pattanaik, and Connor W Coley. Learning 3d representations of molecular chi-  
543 rality with invariance to bond rotations. In *International Conference on Learning Representations*,  
544 2021.
- 545 Tal Amir, Steven Gortler, Ilai Avni, Ravina Ravina, and Nadav Dym. Neural injective functions  
546 for multisets, measures and graphs via a finite witness theorem. *Advances in Neural Information*  
547 *Processing Systems*, 36, 2024.
- 548 Ilyes Batatia, David P Kovacs, Gregor Simm, Christoph Ortner, and Gábor Csányi. Mace: Higher  
549 order equivariant message passing neural networks for fast and accurate force fields. *Advances in*  
550 *Neural Information Processing Systems*, 35:11423–11436, 2022.
- 551 Simon Batzner, Albert Musaelian, Lixin Sun, Mario Geiger, Jonathan P Mailoa, Mordechai Kornbluth,  
552 Nicola Molinari, Tess E Smidt, and Boris Kozinsky. E (3)-equivariant graph neural networks for  
553 data-efficient and accurate interatomic potentials. *Nature communications*, 13(1):1–11, 2022.
- 554 Beatrice Bevilacqua, Fabrizio Frasca, Derek Lim, Balasubramaniam Srinivasan, Chen Cai, Gopinath  
555 Balamurugan, Michael M Bronstein, and Haggai Maron. Equivariant subgraph aggregation  
556 networks. In *International Conference on Learning Representations*, 2021.
- 557 Jin-Yi Cai, Martin Fürer, and Neil Immerman. An optimal lower bound on the number of variables  
558 for graph identification. *Combinatorica*, 12(4):389–410, 1992.
- 559 Stefan Chmiela, Alexandre Tkatchenko, Huziel E Sauceda, Igor Poltavsky, Kristof T Schütt, and  
560 Klaus-Robert Müller. Machine learning of accurate energy-conserving molecular force fields.  
561 *Science advances*, 3(5):e1603015, 2017.
- 562 Stefan Chmiela, Valentin Vassilev-Galindo, Oliver T Unke, Adil Kabylda, Huziel E Sauceda, Alexan-  
563 dre Tkatchenko, and Klaus-Robert Müller. Accurate global machine learning force fields for  
564 molecules with hundreds of atoms. *Science Advances*, 9(2):eadf0873, 2023.
- 565 Valentino Delle Rose, Alexander Kozachinskiy, Cristóbal Rojas, Mircea Petrache, and Pablo Barceló.  
566 Three iterations of  $(d - 1)$ -wl test distinguish non isometric clouds of  $d$ -dimensional points. *arXiv*  
567 *e-prints*, pp. arXiv-2303, 2023.
- 568 Yuanqi Du, Limei Wang, Dieqiao Feng, Guifeng Wang, Shuiwang Ji, Carla P Gomes, Zhi-Ming Ma,  
569 et al. A new perspective on building efficient and expressive 3d equivariant graph neural networks.  
570 *Advances in Neural Information Processing Systems*, 36, 2024.
- 571 Alexandre Agm Duval, Victor Schmidt, Alex Hernández-García, Santiago Miret, Fragkiskos D  
572 Malliaros, Yoshua Bengio, and David Rolnick. Faenet: Frame averaging equivariant gnn for  
573 materials modeling. In *International Conference on Machine Learning*, pp. 9013–9033. PMLR,  
574 2023.
- 575 Nadav Dym and Steven J Gortler. Low-dimensional invariant embeddings for universal geometric  
576 learning. *Foundations of Computational Mathematics*, pp. 1–41, 2024.
- 577 Nadav Dym and Haggai Maron. On the universality of rotation equivariant point cloud networks. In  
578 *International Conference on Learning Representations*, 2020.
- 579 Matthias Fey and Jan Eric Lenssen. Fast graph representation learning with pytorch geometric. *arXiv*  
580 *preprint arXiv:1903.02428*, 2019.
- 581 Fabrizio Frasca, Beatrice Bevilacqua, Michael Bronstein, and Haggai Maron. Understanding and ex-  
582 tending subgraph gnns by rethinking their symmetries. *Advances in Neural Information Processing*  
583 *Systems*, 35:31376–31390, 2022.
- 584 Piotr Gaiński, Michał Koziarski, Jacek Tabor, and Marek Śmieja. Chienn: Embracing molecular  
585 chirality with graph neural networks. In *Joint European Conference on Machine Learning and*  
586 *Knowledge Discovery in Databases*, pp. 36–52. Springer, 2023.

- 594 Johannes Gasteiger, Janek Groß, and Stephan Günnemann. Directional message passing for molecular  
595 graphs. In *International Conference on Learning Representations*, 2019.
- 596
- 597 Johannes Gasteiger, Shankari Giri, Johannes T Margraf, and Stephan Günnemann. Fast and  
598 uncertainty-aware directional message passing for non-equilibrium molecules. *arXiv preprint*  
599 *arXiv:2011.14115*, 2020.
- 600 Johannes Gasteiger, Florian Becker, and Stephan Günnemann. Gemnet: Universal directional graph  
601 neural networks for molecules. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and  
602 J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp.  
603 6790–6802. Curran Associates, Inc., 2021. URL [https://proceedings.neurips.cc/  
604 paper/2021/file/35cf8659cfcb13224cbd47863a34fc58-Paper.pdf](https://proceedings.neurips.cc/paper/2021/file/35cf8659cfcb13224cbd47863a34fc58-Paper.pdf).
- 605
- 606 Johannes Gasteiger, Muhammed Shuaibi, Anuroop Sriram, Stephan Günnemann, Zachary Ward  
607 Ulissi, C Lawrence Zitnick, and Abhishek Das. Gemnet-oc: Developing graph neural networks  
608 for large and diverse molecular simulation datasets. *Transactions on Machine Learning Research*,  
609 2022.
- 610 Justin Gilmer, Samuel S Schoenholz, Patrick F Riley, Oriol Vinyals, and George E Dahl. Neural  
611 message passing for quantum chemistry. In *International conference on machine learning*, pp.  
612 1263–1272. PMLR, 2017.
- 613
- 614 Yulan Guo, Hanyun Wang, Qingyong Hu, Hao Liu, Li Liu, and Mohammed Bennis. Deep  
615 learning for 3d point clouds: A survey. *IEEE transactions on pattern analysis and machine*  
616 *intelligence*, 43(12):4338–4364, 2020.
- 617 Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs.  
618 *Advances in neural information processing systems*, 30, 2017.
- 619 Snir Hordan, Tal Amir, and Nadav Dym. Weisfeiler leman for euclidean equivariant machine learning.  
620 *arXiv preprint arXiv:2402.02484*, 2024a.
- 621
- 622 Snir Hordan, Tal Amir, Steven J Gortler, and Nadav Dym. Complete neural networks for complete  
623 euclidean graphs. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 38, pp.  
624 12482–12490, 2024b.
- 625 Kurt Hornik, Maxwell Stinchcombe, and Halbert White. Multilayer feedforward networks are  
626 universal approximators. *Neural networks*, 2(5):359–366, 1989.
- 627
- 628 Chaitanya K Joshi, Cristian Bodnar, Simon V Mathis, Taco Cohen, and Pietro Lio. On the expressive  
629 power of geometric graph neural networks. In *International Conference on Machine Learning*, pp.  
630 15330–15355. PMLR, 2023.
- 631 John Jumper, Richard Evans, Alexander Pritzel, Tim Green, Michael Figurnov, Olaf Ronneberger,  
632 Kathryn Tunyasuvunakool, Russ Bates, Augustin Žídek, Anna Potapenko, et al. Highly accurate  
633 protein structure prediction with alphafold. *Nature*, 596(7873):583–589, 2021.
- 634
- 635 Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint*  
636 *arXiv:1412.6980*, 2014.
- 637
- 638 Thomas N Kipf and Max Welling. Semi-supervised classification with graph convolutional networks.  
639 *arXiv preprint arXiv:1609.02907*, 2016.
- 640 Dávid Péter Kovács, Cas van der Oord, Jiri Kucera, Alice EA Allen, Daniel J Cole, Christoph Ortner,  
641 and Gábor Csányi. Linear atomic cluster expansion force fields for organic molecules: beyond  
642 rmse. *Journal of chemical theory and computation*, 17(12):7696–7711, 2021.
- 643
- 644 David Peter Kovacs, Ilyes Batatia, Eszter Sara Arany, and Gabor Csanyi. Evaluation of the mace force  
645 field architecture: from medicinal chemistry to materials science. *arXiv preprint arXiv:2305.14247*,  
646 2023.
- 647 Vitaliy Kurlin. Polynomial-time algorithms for continuous metrics on atomic clouds of unordered  
points. *Match: Communications in Mathematical and in Computer Chemistry*, 2023.

- 648 Yunyang Li, Yusong Wang, Lin Huang, Han Yang, Xinran Wei, Jia Zhang, Tong Wang, Zun Wang,  
649 Bin Shao, and Tie-Yan Liu. Long-short-range message-passing: A physics-informed framework  
650 to capture non-local interaction for scalable molecular dynamics simulation. *arXiv preprint*  
651 *arXiv:2304.13542*, 2023.
- 652 Zian Li, Xiyuan Wang, Yinan Huang, and Muhan Zhang. Is distance matrix enough for geometric  
653 deep learning? *Advances in Neural Information Processing Systems*, 36, 2024.
- 654 Yi-Lun Liao and Tess Smidt. Equiformer: Equivariant graph attention transformer for 3d atomistic  
655 graphs. In *The Eleventh International Conference on Learning Representations*, 2022.
- 656 Yi Liu, Limei Wang, Meng Liu, Yuchao Lin, Xuan Zhang, Bora Oztekin, and Shuiwang Ji. Spherical  
657 message passing for 3d molecular graphs. In *International Conference on Learning Representations*,  
658 2021.
- 659 Haggai Maron, Heli Ben-Hamu, Nadav Shamir, and Yaron Lipman. Invariant and equivariant graph  
660 networks. In *International Conference on Learning Representations*, 2018.
- 661 Christopher Morris, Martin Ritzert, Matthias Fey, William L Hamilton, Jan Eric Lenssen, Gaurav  
662 Rattan, and Martin Grohe. Weisfeiler and leman go neural: Higher-order graph neural networks.  
663 In *Proceedings of the AAAI conference on artificial intelligence*, volume 33, pp. 4602–4609, 2019.
- 664 Albert Musaelian, Simon Batzner, Anders Johansson, Lixin Sun, Cameron J Owen, Mordechai  
665 Kornbluth, and Boris Kozinsky. Learning local equivariant representations for large-scale atomistic  
666 dynamics. *Nature Communications*, 14(1):579, 2023.
- 667 Jigyasa Nigam, Sergey N Pozdnyakov, Kevin K Huguenin-Dumittan, and Michele Ceriotti. Com-  
668 pleteness of atomic structure representations. *APL Machine Learning*, 2(1), 2024.
- 669 Lagnajit Pattanaik, Octavian-Eugen Ganea, Ian Coley, Klavs F. Jensen, William H. Green, and  
670 Connor W. Coley. Message passing networks for molecules with tetrahedral chirality, 2020.
- 671 Sergey N Pozdnyakov and Michele Ceriotti. Incompleteness of graph convolutional neural networks  
672 for points clouds in three dimensions. *arXiv preprint arXiv:2201.07136*, 2022.
- 673 Sergey N Pozdnyakov, Michael J Willatt, Albert P Bartók, Christoph Ortner, Gábor Csányi, and  
674 Michele Ceriotti. Incompleteness of atomic structure representations. *Physical Review Letters*,  
675 125(16):166001, 2020.
- 676 Omri Puny, Matan Atzmon, Edward J Smith, Ishan Misra, Aditya Grover, Heli Ben-Hamu, and  
677 Yaron Lipman. Frame averaging for invariant and equivariant network design. In *International*  
678 *Conference on Learning Representations*, 2021.
- 679 Chendi Qian, Gaurav Rattan, Floris Geerts, Mathias Niepert, and Christopher Morris. Ordered  
680 subgraph aggregation networks. *Advances in Neural Information Processing Systems*, 35:21030–  
681 21045, 2022.
- 682 Raghunathan Ramakrishnan, Pavlo O Dral, Matthias Rupp, and O Anatole Von Lilienfeld. Quantum  
683 chemistry structures and properties of 134 kilo molecules. *Scientific data*, 1(1):1–7, 2014.
- 684 Alvaro Sanchez-Gonzalez, Jonathan Godwin, Tobias Pfaff, Rex Ying, Jure Leskovec, and Peter  
685 Battaglia. Learning to simulate complex physics with graph networks. In *International Conference*  
686 *on Machine Learning*, pp. 8459–8468. PMLR, 2020.
- 687 Victor Garcia Satorras, Emiel Hoogeboom, and Max Welling. E (n) equivariant graph neural networks.  
688 In *International conference on machine learning*, pp. 9323–9332. PMLR, 2021.
- 689 Gunnar Schmitz, Ian Heide Godtliebsen, and Ove Christiansen. Machine learning for potential energy  
690 surfaces: An extensive database and assessment of methods. *The Journal of chemical physics*, 150  
691 (24):244113, 2019.
- 692 Kristof Schütt, Oliver Unke, and Michael Gastegger. Equivariant message passing for the prediction  
693 of tensorial properties and molecular spectra. In *International Conference on Machine Learning*,  
694 pp. 9377–9388. PMLR, 2021.

- 702 Kristof T Schütt, Huziel E Sauceda, P-J Kindermans, Alexandre Tkatchenko, and K-R Müller.  
703 Schnet—a deep learning architecture for molecules and materials. *The Journal of Chemical Physics*,  
704 148(24):241722, 2018.
- 705 Hava T Siegelmann and Eduardo D Sontag. On the computational power of neural nets. In  
706 *Proceedings of the fifth annual workshop on Computational learning theory*, pp. 440–449, 1992.  
707
- 708 Yonatan Sverdlov and Nadav Dym. On the expressive power of sparse geometric mpnns. *arXiv*  
709 *preprint arXiv:2407.02025*, 2024.
- 710 Philipp Thölke and Gianni De Fabritiis. Equivariant transformers for neural network based molecular  
711 potentials. In *International Conference on Learning Representations*, 2021.  
712
- 713 Nathaniel Thomas, Tess Smidt, Steven Kearnes, Lusann Yang, Li Li, Kai Kohlhoff, and Patrick Riley.  
714 Tensor field networks: Rotation-and translation-equivariant neural networks for 3d point clouds.  
715 *arXiv preprint arXiv:1802.08219*, 2018.
- 716 Soledad Villar, David W Hogg, Kate Storey-Fisher, Weichi Yao, and Ben Blum-Smith. Scalars are  
717 universal: Equivariant machine learning, structured like classical physics. *Advances in Neural*  
718 *Information Processing Systems*, 34:28848–28863, 2021.
- 719 Limei Wang, Yi Liu, Yuchao Lin, Haoran Liu, and Shuiwang Ji. Comenet: Towards complete and  
720 efficient message passing for 3d molecular graphs. *Advances in Neural Information Processing*  
721 *Systems*, 35:650–664, 2022.
- 722 Shih-Hsin Wang, Yung-Chang Hsu, Justin Baker, Andrea L Bertozzi, Jack Xin, and Bao Wang.  
723 Rethinking the benefits of steerable features in 3d equivariant graph neural networks. In *The*  
724 *Twelfth International Conference on Learning Representations*, 2024.  
725
- 726 Xiyuan Wang and Muhan Zhang. Graph neural network with local frame for molecular potential  
727 energy surface. In *Learning on Graphs Conference*, pp. 19–1. PMLR, 2022.
- 728 Daniel Widdowson and Vitaliy Kurlin. Resolving the data ambiguity for periodic crystals. *Advances*  
729 *in Neural Information Processing Systems*, 35:24625–24638, 2022.
- 730 Daniel Widdowson and Vitaliy Kurlin. Recognizing rigid patterns of unlabeled point clouds by  
731 complete and continuous isometry invariants with no false negatives and no false positives. In  
732 *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp.  
733 1275–1284, 2023.  
734
- 735 Zhenqin Wu, Bharath Ramsundar, Evan N Feinberg, Joseph Gomes, Caleb Geniesse, Aneesh S  
736 Pappu, Karl Leswing, and Vijay Pande. Moleculenet: a benchmark for molecular machine learning.  
737 *Chemical science*, 9(2):513–530, 2018.
- 738 Zhirong Wu, Shuran Song, Aditya Khosla, Fisher Yu, Linguang Zhang, Xiaoou Tang, and Jianxiong  
739 Xiao. 3d shapenets: A deep representation for volumetric shapes. In *Proceedings of the IEEE*  
740 *conference on computer vision and pattern recognition*, pp. 1912–1920, 2015.
- 741 Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural  
742 networks? In *International Conference on Learning Representations*, 2018a.
- 743 Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural  
744 networks? *arXiv preprint arXiv:1810.00826*, 2018b.  
745
- 746 Jiaxuan You, Jonathan M Gomes-Selman, Rex Ying, and Jure Leskovec. Identity-aware graph  
747 neural networks. In *Proceedings of the AAAI conference on artificial intelligence*, volume 35, pp.  
748 10737–10745, 2021.
- 749 Bohang Zhang, Guhao Feng, Yiheng Du, Di He, and Liwei Wang. A complete expressiveness  
750 hierarchy for subgraph gnns via subgraph weisfeiler-lehman tests. *arXiv preprint arXiv:2302.07090*,  
751 2023.
- 752 Muhan Zhang and Pan Li. Nested graph neural networks. *Advances in Neural Information Processing*  
753 *Systems*, 34:15734–15747, 2021.  
754
- 755 Lingxiao Zhao, Wei Jin, Leman Akoglu, and Neil Shah. From stars to subgraphs: Uplifting any gnn  
with local structure awareness. In *International Conference on Learning Representations*, 2021.

756 A EXTENDED DISCUSSION OF RELATED WORK

757  
758 **Invariant geometric models** To leverage the rich 3D geometric information contained in point  
759 clouds in permutation- and  $E(3)$ -invariant manner, early work Schütt et al. (2018) integrated 3D Eu-  
760 clidean distance into the MPNN framework (Gilmer et al., 2017) and aggregate geometric information  
761 iteratively. Nevertheless, this model exhibits a restricted capacity to distinguish non-isomorphic point  
762 clouds even on fully-connected graphs as substantiated by Li et al. (2024); Pozdnyakov & Ceriotti  
763 (2022); Pozdnyakov et al. (2020); Hordan et al. (2024b). Subsequent invariant models (Gasteiger  
764 et al., 2019; 2020; 2021; 2022; Liu et al., 2021; Wang et al., 2022; Li et al., 2024) have endeavored to  
765 enhance their geometric expressiveness through the incorporation of carefully designed high-order  
766 geometric features (Gasteiger et al., 2019; 2020; 2021; 2022), adopting local spherical representa-  
767 tions (Wang et al., 2022) or higher-order distance features (Li et al., 2024) These designs have greatly  
768 improved the models’ performance on downstream tasks, however, most of them lack theoretical  
769 guarantees of geometric completeness over the whole point cloud spaces.

770  
771 B EXTENDED ANALYSIS OF DISGNN


772  
773 B.1 THE PROPER SUBSET RELATION IN FIGURE 1(B)

774  
775 **Proposition B.1.** (*Proper Subset*)

- 776 •  $\mathcal{D}$ -symmetric point cloud set is a proper subset of  $\mathcal{C}$ -symmetric point cloud set.
- 777 • The unidentifiable point cloud set is a proper subset of  $\mathcal{D}$ -symmetric point cloud set.

778  
779 *Proof.* The first  $\subseteq$  relation is a direct consequence of results in Delle Rose et al. (2023); Li et al.  
780 (2024), and reformulated in Proposition H.3. While the second  $\subseteq$  relation is a direct consequence  
781 of Theorem 4.2. Therefore, we only need to prove the  $\subset$  relation for the two cases. To see this, we  
782 construct a point cloud  $P$  for each case, showing that  $P$  is in the second set but not in the first set.

783  
784 The first constructed  $P$  is shown in Figure 3. This point cloud  $P$  is  $\mathcal{C}$ -symmetric but not  $\mathcal{D}$ -symmetric.

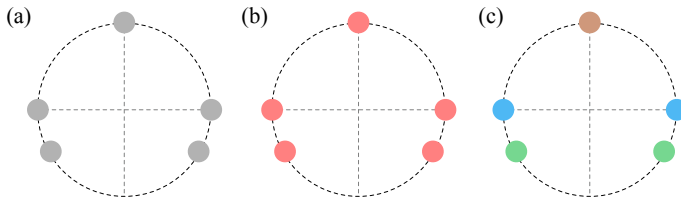

785  
786  
787  
788  
789  
790  
791  
792  
793  
794  
795  
796  
797  
798  
799  
800  
801  
802  
803  
804  
805  
806  
807  
808  
809  
810  
811  
812  
813  
814  
815  
816  
817  
818  
819  
820  
821  
822  
823  
824  
825  
826  
827  
828  
829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863  
864  
865  
866  
867  
868  
869  
870  
871  
872  
873  
874  
875  
876  
877  
878  
879  
880  
881  
882  
883  
884  
885  
886  
887  
888  
889  
890  
891  
892  
893  
894  
895  
896  
897  
898  
899  
900  
901  
902  
903  
904  
905  
906  
907  
908  
909  
910  
911  
912  
913  
914  
915  
916  
917  
918  
919  
920  
921  
922  
923  
924  
925  
926  
927  
928  
929  
930  
931  
932  
933  
934  
935  
936  
937  
938  
939  
940  
941  
942  
943  
944  
945  
946  
947  
948  
949  
950  
951  
952  
953  
954  
955  
956  
957  
958  
959  
960  
961  
962  
963  
964  
965  
966  
967  
968  
969  
970  
971  
972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000

Figure 3: A point cloud  $P$  that exhibits  $\mathcal{C}$ -symmetry but not  $\mathcal{D}$ -symmetry. (a) The point cloud  $P$ , which consists of an equilateral triangle and two additional nodes. (b) The labeled point cloud  $(P, X^{\mathcal{C}})$  after calculating  $\mathcal{C}$  features. Note that each node has the same distance to the geometric center, therefore the nodes still remain undivided. (c) The labeled point cloud  $(P, X^{\mathcal{D}})$  after calculating  $\mathcal{D}$  features.

We describe the second case as follows. Consider an equilateral triangle  $P$  of arbitrary side length. For any other point cloud  $P'$  consisting of three points and non-isomorphic to  $P$ , there are only two possible scenarios: (1)  $P'$  consists of three nodes forming an equilateral triangle with a side length distinct from that of  $P$ ; (2)  $P'$  consists of 3 nodes arranged in a manner that does not form an equilateral triangle. Importantly, DisGNN possesses the capability to distinguish between  $P$  and  $P'$  for both cases, due to its ability to embed node numbers and all distance lengths. Consequently, DisGNN successfully identifies  $P$  (i.e.,  $P$  is not in the unidentifiable set). However, it’s easy to check that  $P$  is  $\mathcal{D}$ -symmetric.

□

## B.2 MEASURE OF SYMMETRIC AND UNIDENTIFIABLE POINT CLOUDS

In this subsection, we aim to prove the Lebesgue measure on  $\mathbb{R}^{n \times 3}$  of  $\mathcal{C}$ -symmetric point cloud set,  $\mathcal{D}$ -symmetric point cloud set and unidentifiable point cloud set are all 0. Since the subset relation has already been proved in Proposition B.1, showing that the largest  $\mathcal{C}$ -symmetric point cloud set has 0 measure is sufficient. We denote the complement of the  $\mathcal{C}$ -symmetric point cloud set with respect to  $\mathbb{R}^{n \times 3}$  as  $\mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ , which contains all  $\mathcal{C}$ -*unsymmetric* point clouds.

To prove this, we first revisit the results from Hordan et al. (2024b), which defines an unsymmetric point cloud subset  $\mathbb{R}_{\text{distinct}}^{n \times 3}$  and shows that its complementary set has a measure of 0. Consequently, to prove  $\mathcal{C}$ -symmetric point cloud set has 0 measure, it suffices to show that  $\mathbb{R}_{\text{distinct}}^{n \times 3} \subset \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ .

**Definition B.2.** ( $\mathbb{R}_{\text{distinct}}^{n \times 3}$  set (Hordan et al., 2024b)) We define  $\mathbb{R}_{\text{distinct}}^{n \times 3} \subset \mathbb{R}^{n \times 3}$  as  $\mathbb{R}_{\text{distinct}}^{n \times 3} := \{P \in \mathbb{R}^{n \times 3} \mid d(i, P) \neq d(j, P) \forall i, j \in [n], i \neq j\}$ , where the geometric degree of  $i$  is defined as  $d(i, X) = \{\|p_1 - p_i\|, \dots, \|p_n - p_i\|\}$ .

It is obvious that the point clouds from  $\mathbb{R}_{\text{distinct}}^{n \times 3}$  exhibit a high degree of unsymmetry: all points within the point cloud are “different”. Therefore, one can expect that DisGNN can easily distinguish two point clouds  $P_1, P_2 \in \mathbb{R}_{\text{distinct}}^{n \times 3}$ , as shown in Theorem 2 from Hordan et al. (2024b). In the following proposition, we show that our defined unsymmetry is strictly *milder* than that defined in  $\mathbb{R}_{\text{distinct}}^{n \times 3}$ .

**Proposition B.3.**  $\mathbb{R}_{\text{distinct}}^{n \times 3} \subset \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ .

*Proof.* We first prove that  $\mathbb{R}_{\text{distinct}}^{n \times 3} \subseteq \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ . It suffices to show that, given an arbitrary point cloud  $P \in \mathbb{R}_{\text{distinct}}^{n \times 3}$ ,  $P \in \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ .

Denote the geometric center of  $P$  as  $c$ , and denote the distance from  $i$  to  $c$  as  $d_{ic}$ . From the Barycenter Lemma presented in Delle Rose et al. (2023), we have:

$$d_{ic}^2 = \frac{1}{n} \left( f(i) - \frac{1}{2n} \sum_{j \in [n]} f(j) \right) \quad (5)$$

where  $f(i) = \sum_{j \in [n]} d_{ij}^2$ .

Obviously, given arbitrary  $i, j \in [n]$ ,  $P \in \mathbb{R}_{\text{distinct}}^{n \times 3}$  implies  $f(i) \neq f(j)$ . Consequently,  $d_{ic} \neq d_{jc}$ , which means that the center distance encoding  $\mathcal{C}(P)$  will give  $n$  distinct node features. Since we consider point clouds with node number  $n > 1$ , it directly implies that  $|\mathcal{C}^{\text{set}}(P)| > 1$  (simply consider two “mass” functions  $m_1, m_2$  such that  $m_1(d) = 1$  only when  $d = d_{1c}$  and 0 otherwise, and  $m_2(d) = 1$  only when  $d = d_{2c}$  and 0 otherwise; these two functions can already contribute two elements in  $\mathcal{C}^{\text{set}}(P)$ ). Therefore,  $P \in \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ .

Now, we prove that  $\mathbb{R}_{\text{distinct}}^{n \times 3} \subset \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ . It suffices to give an example of a point cloud  $P \in \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$  but  $P \notin \mathbb{R}_{\text{distinct}}^{n \times 3}$ . For instance, consider the case shown in the leftmost of Figure 1(a). This point cloud is already shown as  $\mathcal{C}$ -unsymmetric, i.e.,  $P \in \mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ . However, it is easy to see that  $P \notin \mathbb{R}_{\text{distinct}}^{n \times 3}$ , since the two upper points share the same geometric degree.

Actually, other examples can be very easily constructed, such as isosceles triangles whose leg length is different from the base length. The key reason that  $\mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$  contains much more point clouds than  $\mathbb{R}_{\text{distinct}}^{n \times 3}$  is that  $\mathbb{R}_{\text{distinct}}^{n \times 3}$  restricts too much on the unsymmetry of point clouds, requiring **all pairs** of nodes to be distinct, while  $\mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$  cares more about the **global** unsymmetry of the whole point cloud.  $\square$

**Theorem 4.3.** (*Unidentifiable set of DisGNN has measure zero*) Let  $\mathcal{C}$  denote the center distance encoding and  $\mathcal{D}$  the DisGNN encoding. The set of point clouds  $P \in \mathbb{R}^{n \times 3}$  that are both  $\mathcal{C}$ -symmetric and  $\mathcal{D}$ -symmetric, and hence unidentifiable by DisGNN, has Lebesgue measure zero.

*Proof.* This theorem is a direct consequence of Proposition B.1, Proposition B.3 and Theorem 8 in Hordan et al. (2024b), which shows that the Lebesgue measure of the complementary set of  $\mathbb{R}_{\text{distinct}}^{n \times 3}$  is 0.  $\square$



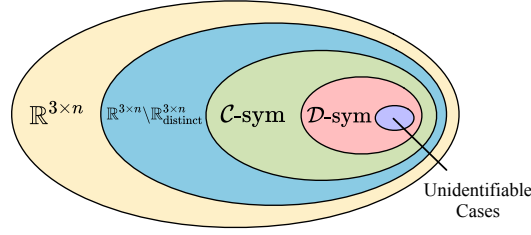


Figure 4: The relation of our proposed symmetric point cloud sets with the symmetric set  $\mathbb{R}^{n \times 3} \setminus \mathbb{R}_{\text{distinct}}^{n \times 3}$  characterized in prior work (Hordan et al., 2024b). The  $\mathcal{C}$ -symmetric point cloud set is a proper subset of  $\mathbb{R}^{n \times 3} \setminus \mathbb{R}_{\text{distinct}}^{n \times 3}$ , as indicated in Proposition B.3.

To conclude, we notice that Theorem 4.2 indicates much more pairs of distinguishable point clouds than Theorem 2 in Hordan et al. (2024b) (which shows that given any two point clouds  $P_1, P_2 \in \mathbb{R}_{\text{distinct}}^{n \times 3}$ , DisGNN can distinguish them). Strictly:

- Theorem 4.2 shows that arbitrary pairs of point clouds  $P_1, P_2$  from  $\mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ , and even from a strictly larger unsymmetric point cloud set  $\mathbb{R}_{\text{not } \mathcal{D}}^{n \times 3}$ , can be distinguished by DisGNN. These two sets are both strictly larger than  $\mathbb{R}_{\text{distinct}}^{n \times 3}$ , as indicated in Proposition B.1 and Proposition B.3 and illustrated in Figure 4.
- Theorem 4.2 further shows **identifiability**. This further implies, for arbitrary  $P_1$  from  $\mathbb{R}_{\text{not } \mathcal{C}}^{n \times 3}$ , or even from the larger set  $\mathbb{R}_{\text{not } \mathcal{D}}^{n \times 3}$ , and any  $P_2$  from **the entire point cloud set**  $\mathbb{R}^{n \times 3}$ , DisGNN can still distinguish them.

### B.3 ASSESSMENT OF UNIDENTIFIABLE CASES OF DISGNN

Here, we provide further details about the experiment in Section 6.1.

We first give a simple proposition, which can determine whether a given point cloud is  $\mathcal{A}$ -symmetric without the need to consider “mass” functions  $m$ , and subsequently facilitate the noise tolerance setting.

**Proposition B.4.** (Equivalent definition for  $\mathcal{A}$ -symmetry) Given an arbitrary point cloud  $P \in \mathbb{R}^{n \times 3}$  and a  $E(3)$ -invariant and permutation-equivariant algorithm  $\mathcal{A}$ , let  $K$  denote the number of distinct node features in  $\mathcal{A}(P)$ , and we consider  $K$  sub-point clouds each only contain nodes from  $P$  with the same node feature. Then we have:  $P$  is  $\mathcal{A}$ -symmetric  $\iff$  all these  $K$  sub-point clouds’ geometric centers coincide.

*Proof.* We first prove that  $P$  is  $\mathcal{A}$ -symmetric  $\implies$  all these  $K$  sub-point clouds’ geometric centers coincide. This is actually a direct consequence of the original definition of  $\mathcal{A}$ -symmetry: each geometric center of the  $K$  point clouds is in  $\mathcal{A}^{\text{set}}(P)$ , and  $P$  is  $\mathcal{A}$ -symmetric means that  $\mathcal{A}^{\text{set}}(P)$  contains only one element, therefore all  $\mathcal{A}(P)_k^*$ -type nodes’ geometric centers coincide.

We then prove the reverse direction. We denote  $I_k$  as the index set of the nodes with the  $k$ -th kind of node features in  $\mathcal{A}(P)$ . For an arbitrary element  $\mathcal{A}(G)^m$  from collections  $\mathcal{A}^{\text{set}}(P)$  calculated by function  $m$ , we have  $\mathcal{A}(G)^m = \frac{\sum_{i \in [n]} m(x_i^{\mathcal{A}}) p_i}{\sum_{i \in [n]} m(x_i^{\mathcal{A}})}$  by definition, which can be decomposed as follows:

$$\begin{aligned}
 \mathcal{A}(G)^m &= \frac{\sum_{i \in [n]} m(x_i^{\mathcal{A}}) p_i}{\sum_{i \in [n]} m(x_i^{\mathcal{A}})} \\
 &= \frac{\sum_{k \in [K]} \sum_{i \in I_k} m(x_i^{\mathcal{A}}) p_i}{\sum_{k \in [K]} \sum_{i \in I_k} m(x_i^{\mathcal{A}})} \\
 &= \frac{\sum_{k \in [K]} M_k c_k}{\sum_{k \in [K]} M_k}, \tag{6}
 \end{aligned}$$

where  $c_k \in \mathbb{R}^3$  denotes the geometric center of the  $k$ -th point cloud,  $M_k = \sum_{i \in I_k} m(x_i^A)$  denotes the sum of “masses” associated with the  $k$ -th sub-point cloud. Since all  $c_k$  coincide, i.e.,  $c_1 = c_2 = \dots = c_K$ , we have:  $\mathcal{A}(G)^m = \frac{c_1 \sum_{k \in [K]} M_k}{\sum_{k \in [K]} M_k} = c_1$ . Thus, all the possible elements from  $\mathcal{A}^{\text{set}}(P)$  coincide with  $c_1$ . Obviously, since the geometric center  $c$  of the whole point cloud is also in  $\mathcal{A}^{\text{set}}(P)$ ,  $c_1 = c$ . Therefore,  $P$  is  $\mathcal{A}$ -symmetric.  $\square$

**Rescaling and criteria settings** Since the two datasets under consideration exhibit different scales, making the use of fixed tolerance errors inapplicable. To address this, a preprocessing step is performed on both datasets by rescaling all point clouds to ensure that the distance between the geometric center and the farthest node is 1. We then fix the rounding number to 2 for QM9 and 1 for ModelNet40 (which is thus quite robust against noise in this scale), and conduct the assessment with the deviation error ranging from 1e-6 to 1e-1. Note that a deviation error of 1e-1 is quite large for a point cloud located within a unit sphere. As a result, many non-symmetric clouds may still be determined as symmetric under such criteria. We use this as a rough upper bound only for reference.

## C EXTENDED ANALYSIS OF GEONGNN

### C.1 COMPLEXITY ANALYSIS

For a  $n$ -sized point cloud, without considering the complexity of achieving injective intermediate functions, GeoNGNN achieves theoretical completeness with an asymptotic time complexity of  $O(n^3)$ . This complexity arises from the fact that there are  $n$  subgraphs, each of which undergoes the complete-version DisGNN operation, resulting in an overall complexity of  $O(n^2)$  per subgraph. Importantly, this time complexity is consistent with that of 2-F-DisGNN (Li et al., 2024), DimeNet (Gasteiger et al., 2019), and SphereNet (Liu et al., 2021), when their conditions for achieving E(3)-completeness are met.

We leverage the findings introduced by Amir et al. (2024) to analyze the complexity involving the realization of *injective* neural functions.<sup>8</sup> Within each aggregation layer, GeoNGNN embeds the multiset  $\{(h_{ij}^{(l)}, d_{ij}) \mid j \in [n]\}$  to update the representation of  $h_{ij}^{(l)}$ . As per the study conducted by Amir et al. (2024), an embedding dimension of  $O(kn)$  is sufficient for injectively embedding such a multiset, with  $k$  representing the embedding dimension of  $(h_{ij}^{(l)}, d_{ij})$ . In the initial layer,  $(h_{ij}^{(0)}, d_{ij})$  possesses a constant dimension independent of  $n$ . Therefore, the sufficient embedding dimension for  $h_{ij}^{(1)}$  is  $O(n)$ . Though it seems that the sufficient embedding dimension will grow exponentially with respect to the layer number  $l$ , Hordan et al. (2024b) has demonstrated that the crucial dimension is the *intrinsic dimension* of the multiset, which maintains  $O(n)$  throughout all layers, rather than  $kn$ , the ambient dimension. Consequently, the sufficient embedding dimension for any given layer is  $O(n)$ . By following the neural function form proposed by Amir et al. (2024), we apply a shallow MLP individually to each element within the multiset and sum them up to obtain the multiset embedding. This leads to a complexity of  $O(n^2) \times n = O(n^3)$ , where  $O(n^2)$  represents the complexity of forwardness of MLP whose input and output dimension are both  $O(n)$ , and  $n$  represents the  $n$  elements in the multiset. Considering the updating of all  $h_{ij}^{(l)}, i, j \in [n]$ , the complexity in each layer becomes  $O(n^3) \times n^2 = O(n^5)$ . During the final pooling stage, the nodes are initially pooled into subgraph representations, resulting in  $n \times O(n^2) \times n = O(n^4)$ , where the first  $n$  denotes  $n$  subgraphs, and the last  $n$  denotes  $n$  nodes within each subgraph. Subsequently, all subgraph representations are further pooled into a graph-level representation, culminating in a complexity of  $O(n^2) \times n = O(n^3)$ , where  $n$  represents  $n$  nodes. Consequently, the overall complexity amounts to  $O(n^5)$ .

GeoNGNN with practical implementations achieves an asymptotic time complexity of  $O(n)$  by restricting the subgraph cutoff, the message passing cutoff and the hidden neuron number to finite and fixed values. Experiments show that practical GeoNGNN exhibits good inductive bias through capturing local subgraph environments. In the following subsection, we provide a demonstration that practical GeoNGNN also possesses better theoretical expressiveness compared to DisGNN.

<sup>8</sup>We note that for tractability, “E(3)-completeness” now should refer to the model’s ability to distinguish between any pairs of non-isomorphic point clouds of size *less than or equal to*  $n$ .

## C.2 THEORETICAL EXPRESSIVENESS WITH FINITE SUBGRAPH RADIUS AND DISTANCE CUTOFF

While Theorem 5.1 establishes that infinite subgraph radius and distance cutoff guarantees completeness over all point clouds, this section explores how finite values can also enhance geometric expressiveness compared to DisGNN. We demonstrate this through an example.

Take the left pair of point clouds in Figure 7 for example, and note that this pair of point clouds cannot be distinguished by DisGNN even when taking fully-connected point cloud as input. Assuming that the subgraph radius and distance cutoff for each node are finite, only covering nodes’ one-hop neighbors, as illustrated in Figure 5. The representation of the green node produced by inner DisGNN will differ between the two point clouds, due to the presence of long-distance information on the left point cloud, whereas it is absent on the right point cloud. Therefore, GeoNGNN with such a small subgraph radius and distance cutoff can easily distinguish the two point clouds.

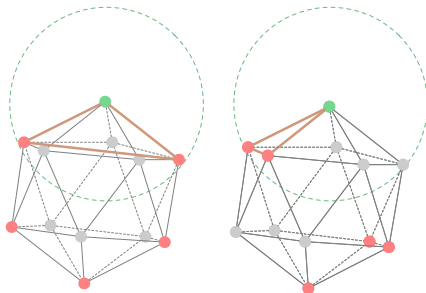


Figure 5: An example that illustrates the separation power of finite-subgraph-size GeoNGNN. The green node represents the central node, while the green *sphere* depicts the subgraph environment surrounding the central node. The brown line signifies the distance information that will be aggregated during the message passing.

## D EXTENDED EVALUATION OF GEONGNN

In this section, we further evaluate GeoNGNN on various datasets, including rMD17 (Chmiela et al., 2017), which assesses the model’s ability to predict high-precision energy and forces based on molecular conformations; MD22 (Chmiela et al., 2023), which requires models to efficiently handle large point clouds; 3BPA (Kovács et al., 2021), which assesses the model’s ability to generalize well on out-of-domain datasets; and QM9 (Ramakrishnan et al., 2014; Wu et al., 2018), which contains diverse properties for evaluating the models’ universal learning capabilities. Please refer to Appendix G for further model architecture and experimental settings.

Since GeoNGNN is built upon DisGNN, a direct comparison is made to DisGNN, which we implement as an enhanced SchNet (Schütt et al., 2018) with additional residual layers. Additionally, we include two other complete models: DimeNet (Gasteiger et al., 2019) and GemNet (Gasteiger et al., 2021), as well as the recent advanced invariant model 2-F-DisGNN (Li et al., 2024). Furthermore, we incorporate equivariant models that leverage vectors or higher-order tensors, including PaiNN (Schütt et al., 2021), NequIP (Batzner et al., 2022), and MACE (Batatia et al., 2022).

Overall, GeoNGNN demonstrates good experimental results, and in some cases, performs comparably to advanced models that incorporate equivariant high-order tensors, such as Allegro (Musaelian et al., 2023), MACE (Batatia et al., 2022), and PaiNN (Schütt et al., 2021), on specific tasks. This validates the effectiveness of capturing *subgraph representations* in molecular-relevant tasks, which may provide even better inductive bias or generalization ability in this scenario than the design like directional message passing in DimeNet (Gasteiger et al., 2019), which is also complete in our proof yet did not catch up with GeoNGNN’s downstream performance.

However, it does not consistently achieve the best performance, which may be attributed to its simple design, relying solely on distance features and the weak base GNN it employs. Therefore, future improvements could focus on integrating vectors (Schütt et al., 2021; Thölke & De Fabritiis, 2021) or

Table 2: MAE loss on revised MD17. Energy (E) is in kcal/mol, and force (F) is in kcal/mol/Å. The best and second-best results are shown in **bold** and underline. Results for GeoNGNN are **highlighted in green** if they outperform their base model, DisGNN, while models are **grayed** if they are our characterized powerful models. The average rank is computed as the mean rank across all rows.

Molecule	Target	Equivariant models			Invariant models				
		PaiNN	NequIP	MACE	DisGNN	2F-Dis.	DimeNet	GemNet	GeoNGNN
Aspirin	E	0.1591	0.0530	0.0507	0.1565	<b>0.0465</b>	0.1321	-	<u>0.0502</u>
	F	0.3713	0.1891	<u>0.1522</u>	0.4855	<b>0.1515</b>	0.3549	0.2191	<u>0.1720</u>
Azobenzene	E	-	<b>0.0161</b>	<u>0.0277</u>	0.2312	0.0315	0.1063	-	0.0315
	F	-	<b>0.0669</b>	<u>0.0692</u>	0.5050	0.1121	0.2174	-	0.1157
Benzene	E	-	<b>0.0009</b>	0.0092	0.0308	0.0013	0.0061	-	0.0014
	F	-	0.0069	<u>0.0069</u>	0.2209	<u>0.0085</u>	0.0170	0.0115	<b>0.0065</b>
Ethanol	E	0.0623	0.0092	<u>0.0092</u>	0.0117	<b>0.0065</b>	0.0345	-	<u>0.0074</u>
	F	0.2306	0.0646	0.0484	0.0774	<b>0.0379</b>	0.1859	0.0830	<u>0.0482</u>
Malonaldehyde	E	0.0899	0.0184	0.0184	0.2814	<b>0.0129</b>	0.0507	-	<u>0.0143</u>
	F	0.3182	0.1176	0.0945	0.1661	<b>0.0782</b>	0.2743	0.1522	<u>0.0875</u>
Naphthalene	E	0.1176	0.0208	0.0115	0.1269	0.0103	0.0445	-	<b>0.0069</b>
	F	0.0830	<b>0.0300</b>	0.0369	0.4144	<u>0.0478</u>	0.1105	0.0438	0.0377
Paracetamol	E	-	0.0323	<b>0.0300</b>	0.1534	0.0310	0.1176	-	0.0352
	F	-	0.1361	<b>0.1107</b>	0.4698	<u>0.1178</u>	0.3028	-	0.1385
Salicylic acid	E	0.1130	<b>0.0161</b>	0.0208	0.0791	0.0174	0.0590	-	<u>0.0168</u>
	F	0.2099	0.0922	<b>0.0715</b>	0.3481	<u>0.0860</u>	0.2428	0.1222	<u>0.0881</u>
Toluene	E	0.0969	0.0069	0.0115	0.0918	<b>0.0051</b>	0.0228	-	<u>0.0069</u>
	F	0.1015	0.0369	<u>0.0346</u>	0.3070	<b>0.0284</b>	0.1085	0.0507	<u>0.0375</u>
Uracil	E	0.1038	<b>0.0092</b>	0.0115	0.0363	0.0139	0.0338	-	<u>0.0096</u>
	F	0.1407	0.0715	<b>0.0484</b>	0.1973	0.0828	0.1634	0.0876	<u>0.0577</u>
AVG RANK		6.71	2.80	2.50	6.55	2.25	5.70	5.00	2.55

higher-order tensors (Thomas et al., 2018) into GeoNGNN’s base model, as these have been shown to enhance model generalization (Du et al., 2024; Musaelian et al., 2023).

Nevertheless, GeoNGNN shows promise, leaving open opportunities for future research by incorporating more powerful base architectures within its nested framework to improve empirical performance, or developing theoretically more powerful models analogous to its underlying principles.

#### D.1 MOLECULE STRUCTURE LEARNING: REVISED MD17

We first evaluate on the rMD17 dataset (Chmiela et al., 2017), which poses a substantial challenge to models’ geometric learning ability. This dataset encompasses trajectories from molecular dynamics simulations of several small molecules, and the objective is to predict the energy and atomic forces of a given molecule conformation, which contains all atoms’ positions and atomic numbers.

The comprehensive results and comparison is shown in Table 2. There are several important observations: 1) GeoNGNN exhibits substantial improvements over DisGNN, demonstrating the effectiveness of higher expressiveness and the significance of capturing subgraph representations on practical tasks. 2) Though equally being E(3)-complete, with practical implements, DimeNet and GemNet show worse performance than GeoNGNN. This finding suggests that different inductive biases of different model designs can impact significantly on *generalization ability*, while learning more refined *subgraph representations* like GeoNGNN may be superior to directional message passing in certain molecule-relevant tasks. 3) GeoNGNN shows competitive performance in comparison to other well-designed advanced models. However, it does not consistently achieve the best performance.

#### D.2 SCALING TO LARGE GRAPHS: MD22

Geometric models face challenges in scaling to larger point clouds. Here, we evaluate GeoNGNN on MD22 (Chmiela et al., 2023), a dataset of molecules with up to 370 atoms. To enhance efficiency, we apply GeoNGNN with a *finite* subgraph cutoff  $r_{\text{sub}}$  (5 Å) and message passing cutoff  $r_{\text{cutoff}}$  (5 Å), and assess its practical performance.

In this table, we further include a recent SOTA model VisNet-LSRM (Li et al., 2023). As shown in Table 3, GeoNGNN consistently outperforms DisGNN across all targets. It also delivers *competitive results* compared to other SOTA models, including MACE and VisNet-LSRM, ranking 2nd on average.

Table 3: MAE loss on MD22. Energy (E) in meV/atom, force (F) in meV/Å. The best and the second best results are shown in **bold** and underline. We **color** the cell if GeoNGNN outperforms DisGNN. The average rank is the average of the rank of each row.

Mol	# atoms	Target	Equivariant models							Invariant models	
			sGDML	PaiNN	TorchMD-NET	Allegro	Equiformer	MACE	VisNet-LSRM	DisGNN	GeoNGNN
Ac-Ala3-NHMe	42	E	0.4	0.121	0.116	0.105	0.106	<b>0.064</b>	<u>0.070</u>	0.153	0.093
		F	34	10.0	8.1	4.6	3.9	3.8	3.9	9.2	<b>3.6</b>
Docosahexaenoic acid	56	E	1	0.089	0.093	0.089	0.214	0.102	<b>0.070</b>	0.281	<u>0.072</u>
		F	33	5.9	5.2	3.2	<b>2.5</b>	2.8	2.6	11.3	<b>2.5</b>
Stachyose	87	E	2	0.076	0.069	0.124	0.078	0.062	<b>0.050</b>	0.077	<u>0.057</u>
		F	29	10.1	8.3	4.2	<b>3.0</b>	3.8	3.3	4.1	<b>2.4</b>
AT-AT	60	E	0.52	0.121	0.139	0.103	0.109	0.079	<b>0.060</b>	0.109	<u>0.078</u>
		F	30	10.3	8.8	4.1	4.3	4.3	<b>3.4</b>	8.221	5.0
AT-AT-CG-CG	118	E	0.52	0.097	0.193	0.145	<u>0.055</u>	0.058	<b>0.040</b>	0.098	0.081
		F	31	16.0	20.4	5.6	<u>5.4</u>	5	<b>4.6</b>	9.8	6.4
Buckyball catcher	148	E	0.34	-	-	-	-	<u>0.141</u>	-	0.157	<b>0.112</b>
		F	29	-	-	-	-	<b>3.7</b>	-	17.6	4.3
Double-walled nanotube	370	E	0.47	-	-	-	-	<b>0.194</b>	-	0.387	<u>0.219</u>
		F	23	-	-	-	-	12	-	12.3	<b>10.6</b>
AVG RANK			7.57	6.50	6.50	4.80	3.80	2.64	<b>1.80</b>	5.50	2.29

These results demonstrate the *effectiveness of subgraph enhancement* in practical GeoNGNN with finite configurations.

To explore how subgraph size affects experimental performance, we selected three molecules of different representative scales and observed the effects, as depicted in Figure 6. As anticipated, performance generally improves with increased subgraph size, roughly matching the improved theoretical expressiveness. However, the rule does not always hold: there are cases where increasing the subgraph size leads to degraded performance, which can be attributed to the potential noise and redundant information. It implies that practically, there could exist a conflict between theoretical expressiveness and experimental performance, and striking a balance between them is important.

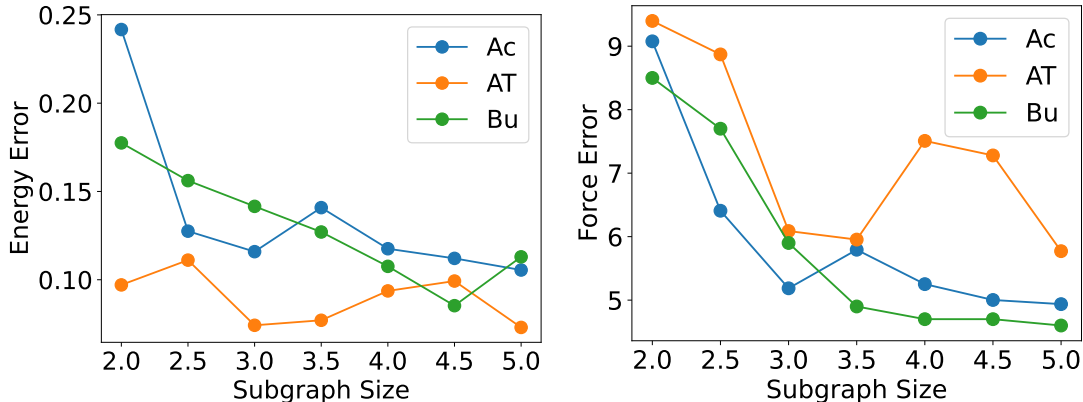


Figure 6: Effect of subgraph size for energy and force prediction on Ac-Ala3-NHMe, AT-AT and Buckyball catcher in MD22. Subgraph size in Å, energy (E) in meV/atom, force (F) in meV/Å.

We further evaluated the inference time and GPU memory consumption of GeoNGNN and several high-performance models. As shown in Table 4, GeoNGNN is more than 2x faster than MACE and more than 8x faster than Equiformer, which both utilize high-order equivariant representations and perform tensor products. Additionally, GeoNGNN demonstrates *efficient memory usage*, particularly when compared to Equiformer. This could be attributed to the invariant representation and the simple architecture GeoNGNN adopts.

### D.3 GENERALIZATION ON OUT-OF-DOMAIN DATA: 3BPA

GeoNGNN has demonstrated remarkable expressiveness. However, higher expressiveness only implies a better capability to fit data, and whether this leads to improved inductive bias and generalization power remains uncertain. Therefore, we conducted further evaluations of GeoNGNN on the 3BPA dataset (Kovács et al., 2021), which includes lots of *out-of-domain* data in its test set, providing a good assessment of the generalization power of geometric models. The dataset comprises molecular

Table 4: Efficiency Analysis of Models. The batch size for all molecules is set to 16, except for Bu and Do where it is 4. Models marked with an asterisk (\*) utilize a batch size of 8, except for Bu and Do, which use a batch size of 2. The evaluation is conducted on Nvidia A100.

Molecule	# atoms	MACE	Equiformer*	GeoNGNN
Ac-Ala3-NHMe	42	0.166	0.305	<b>0.070</b>
		13400	38895	<b>12997</b>
Docosaheptaenoic acid	56	0.209	0.397	<b>0.088</b>
		17875	51565	<b>16980</b>
Stachyose	87	0.388	OOM	<b>0.161</b>
		33146	OOM	<b>32430</b>
AT-AT	60	0.195	0.361	<b>0.083</b>
		17310	50032	<b>15864</b>
AT-AT-CG-CG	118	0.437	OOM	<b>0.175</b>
		38090	OOM	<b>34951</b>
Buckyball catcher	148	0.183	0.382	<b>0.074</b>
		14466	47702	<b>13891</b>
Double-walled nanotube	370	0.545	OOM	<b>0.180</b>
		44923	OOM	<b>36849</b>

dynamic simulations of the molecule 3-(benzyloxy)pyridin-2-amine, with the training set consisting of samples from the trajectory at 300K, and the test sets containing samples from trajectories at 300K, 600K, and 1200K.

Table 5: Root-mean-square errors (RMSE) on 3BPA. Energy (E) in meV, force (F) in meV/Å. Standard deviations are computed over three runs.

		NequIP	Allegro	MACE	GeoNGNN
300K	E	3.1±0.1	3.84±0.08	3±0.2	3.76±0.29
	F	11.3±0.2	12.98±0.7	8.8±0.3	11.77±0.34
600K	E	11.3±0.31	12.07±0.45	9.7±0.5	12.49±0.38
	F	27.3±0.3	29.17±0.22	21.8±0.6	28.91±0.71
1200K	E	40.8±1.3	42.57±1.46	29.8±1.0	44.82±0.88
	F	86.4±1.5	82.96±1.77	62±0.7	89.62±1.58

Consistent with prior studies, we present the Root Mean Square Error for energy and force predictions, comparing GeoNGNN with MACE (Batatia et al., 2022), NequIP (Batzner et al., 2022), and Allegro (Musaelian et al., 2023). The results are detailed in Table 5. GeoNGNN demonstrates competitiveness with Allegro, an equivariant model equipped with high-order tensors for learning local equivariant representations. However, when compared to the SOTA method MACE, GeoNGNN exhibits relatively worse performance, especially under higher temperatures, which signifies a greater distribution shift between the testing and training sets. This underscores that despite GeoNGNN’s strong theoretical expressiveness, its generalization power may lag behind that of those well-designed equivariant models. As stated in the main text Section 6, this discrepancy could potentially be attributed to the fact that GeoNGNN only adopts invariant representations, whereas equivariant representations could offer superior generalization abilities, particularly in sparse graph cases, as demonstrated in Du et al. (2024).

#### D.4 HANDLING VARIOUS PROPERTY PREDICTIONS: QM9

Finally, we evaluate GeoNGNN on QM9 (Ramakrishnan et al., 2014; Wu et al., 2018), which contains approximately 13k well-annotated small molecules, each paired with 12 properties to predict. The results, shown in Table 6, indicate that GeoNGNN performs particularly well in energy-related predictions, such as  $U_0$  and  $H$ .

## E GEOMETRIC SUBGRAPH GRAPH NEURAL NETWORKS

In this section, we provide self-contained definitions of general geometric subgraph GNNs as delineated in Definition 5.2 as well as definitions of the geometric counterparts of well-established traditional subgraph GNNs, all of which are proven to be E(3)-complete under specific conditions.

Table 6: MAE loss on QM9. The best and the second best results are shown in **bold** and underline. We color the cell if GeoNGNN outperforms DisGNN. GeoNGNN demonstrates competitive performance across all models and ranks first in terms of average ranking.

Target	Unit	SchNet	PhysNet	ComENet	SphereNet	2F-Dis.	PaiNN	Torchmd	DisGNN	GeoNGNN
$\mu$	D	0.033	0.053	0.025	0.025	0.010	0.012	<b>0.002</b>	0.015	0.012
$\alpha$	$a_0^3$	0.235	0.062	0.045	0.045	<u>0.043</u>	0.045	<b>0.010</b>	0.057	0.044
$\epsilon_{HOMO}$	meV	41.0	32.9	23.1	22.8	<u>21.8</u>	27.6	<b>21.2</b>	34.0	23.8
$\epsilon_{LUMO}$	meV	34.0	24.7	19.8	18.9	<u>21.2</u>	20.4	<b>17.8</b>	28.3	21.5
$\Delta\epsilon$	meV	63.0	42.5	32.4	<b>31.1</b>	<u>31.3</u>	45.7	38.0	45.2	33.3
$\langle R^2 \rangle$	$a_0^2$	0.073	0.765	0.259	0.268	<u>0.030</u>	0.066	<b>0.015</b>	0.160	0.046
ZPVE	meV	1.7	1.39	<u>1.20</u>	<b>1.12</b>	<u>1.26</u>	1.28	2.12	1.88	1.4
$U_0$	meV	14	8.15	6.59	6.26	7.33	<u>5.85</u>	6.24	9.60	<b>5.29</b>
$U$	meV	19	8.34	6.82	6.36	7.37	<u>5.83</u>	6.30	9.88	<b>5.35</b>
$H$	meV	14	8.42	6.86	6.33	7.36	<u>5.98</u>	6.48	9.82	<b>5.35</b>
$G$	meV	14	9.40	7.98	7.78	8.56	<u>7.35</u>	7.64	11.06	<b>7.04</b>
$c_v$	cal/mol/K	0.033	0.028	0.024	<b>0.022</b>	<u>0.023</u>	<u>0.024</u>	0.026	0.031	<u>0.023</u>
AVG RANK		8.42	7.25	4.58	3.42	<u>3.67</u>	3.92	3.17	7.42	2.92

## E.1 BASIC DEFINITIONS

We first notice that the main definition of general geometric subgraph GNN is based on the general definitions of subgraph GNNs in traditional graph settings from Zhang et al. (2023), where the input graphs are unweighted graphs. The difference is that the geometric subgraph GNN is applied to point clouds, treating it as distance graphs with distance cutoff  $r_{\text{cutoff}}$ , and applies geometric aggregations.

We separately introduce the main components in Definition 5.2. We will use  $G = (\mathcal{V}_G, \mathcal{E}_G)$  to denote the original distance graph, where  $\mathcal{V}_G = [n]$  contains all the nodes in the distance graph, and  $\mathcal{E}_G = \{(u, v) \mid u, v \in \mathcal{V}_G, d_{uv} \leq r_{\text{cutoff}}\}$  contains all the weighted edges with weight (distance) less than  $r_{\text{cutoff}}$ , by definition of distance graph. We use  $G^u = (\mathcal{V}_{G^u}, \mathcal{E}_{G^u})$  to denote node  $u$ 's subgraph. We use  $\mathcal{N}_{G^v}(u)$  to denote  $u$ 's neighbor in  $v$ 's subgraph, i.e.,  $\mathcal{N}_{G^v}(u) = \{i \mid i \in \mathcal{V}_{G^v}, (i, u) \in \mathcal{E}_{G^v}\}$ .

**Subgraph generation** General geometric subgraph GNNs adopt node marking with  $r_{\text{sub}}$ -size ego subgraph as the subgraph generation policy. This essentially means that node  $u$ 's subgraph,  $G^u = (\mathcal{V}_{G^u}, \mathcal{E}_{G^u})$ , contains all the nodes and edges within Euclidean distance  $r_{\text{sub}}$ , i.e.,  $\mathcal{V}_{G^u} = \{i \mid i \in \mathcal{V}_G, d_{iu} \leq r_{\text{sub}}\}$ ,  $\mathcal{E}_{G^u} = \{(i, j) \mid (i, j) \in \mathcal{E}_G, i, j \in \mathcal{V}_{G^u}\}$ . And node  $v$  in  $u$ 's subgraph's initial representation is  $h_{uv}^{(0)} = f^{\text{init}}(\mathbb{1}_{u=v}, x_u, x_v)$ , where  $\mathbb{1}_{u=v}$  represents indicator function that equals 1 when  $u = v$  and 0 otherwise, and  $x_u, x_v$  are the potential node features.

**Geometric aggregation schemes** As defined in Definition 5.2, geometric subgraph GNN adopts *general geometric subgraph GNN layers* as the basic aggregation layer, which is formally defined as follows:

**Definition E.1.** A general geometric subgraph GNN layer has the form

$$h_{uv}^{(l+1)} = f^{(l+1)}(h_{uv}^{(l)}, \text{op}_1(u, v, h^{(l)}, G), \dots, \text{op}_r(u, v, h^{(l)}, G)),$$

where  $f^{(l+1)}$  is an arbitrary parameterized continuous function, and each atomic operation  $\text{op}_i(u, v, h, G)$  can take any of the following expressions:

- Single-point:  $h_{vu}, h_{uu}$ , or  $h_{vv}$ ;
- Global:  $\{\{h_{uw} \mid w \in \mathcal{V}_G\}\}$  or  $\{\{h_{vw} \mid w \in \mathcal{V}_G\}\}$ ;
- Local:  $\{\{h_{uw}, d_{vw} \mid w \in \mathcal{N}_{G^u}(v)\}\}$  or  $\{\{h_{vw}, d_{uw} \mid w \in \mathcal{N}_{G^v}(u)\}\}$

Notice that  $h(u, v)$  is always in the input to ensure that geometric subgraph GNN can always *refine* the node feature partition. These operations are denoted as  $\text{agg}_{uu}^P, \text{agg}_{vv}^P, \text{agg}_{vu}^P, \text{agg}_u^G, \text{agg}_v^G, \text{Geoagg}_u^L, \text{Geoagg}_v^L$ , respectively. Here, we color the local operations with blue and name it with an additional ‘‘Geo’’ prefix since all the aggregation schemes do not incorporate geometric information and are the same as those in Zhang et al. (2023), except for the local operations, which additionally incorporates distance information.

**Pooling layer** After  $L$  geometric aggregation layers, geometric subgraph GNN outputs a graph-level representation  $f(G)$  through a two-level pooling of the collected features  $\{\{h_{uv}^{(L)} : u, v \in \mathcal{V}_G\}\}$  the

1242 same as Zhang et al. (2023) do. Specifically, there are two approaches, named *VS* (vertex-subgraph  
 1243 pooling) and *SV* (subgraph-vertex pooling). The first approach first pools all node features in each  
 1244 subgraph  $G^u$  to obtain the subgraph representation, i.e.,  $h_u = f^S(\{\{h_{uv}^{(L)} \mid v \in \mathcal{V}_G\}\})$ , and then  
 1245 pools all subgraph representations to obtain the final output  $h_G = f^G(\{\{h_u \mid u \in \mathcal{V}_G\}\})$ . Here,  $f^S$   
 1246 and  $f^G$  can be any parameterized function. The second approach first generates node representations  
 1247  $h_u = f^V(\{\{h_{uv}^{(L)} \mid u \in \mathcal{V}_G\}\})$ , and then pools all these node representations to obtain the graph  
 1248 representation, i.e.,  $h_G = f^G(\{\{h_u \mid u \in \mathcal{V}_G\}\})$ .

1249 We denote a general geometric subgraph GNN with  $L$  layers, each with aggregation scheme  $\mathcal{A} =$   
 1250  $\mathcal{B} \cup \text{agg}_{uv}^P$ , and with parameters  $r_{\text{sub}}, r_{\text{cutoff}}$  as  $\text{GeoA}(\mathcal{A}, \text{Pool}, L, r_{\text{sub}}, r_{\text{cutoff}})$ , where  $\text{Pool} \in \{\text{VS}, \text{SV}\}$ ,  
 1251 and

$$1252 \mathcal{B} \subset \{\text{agg}_{uu}^P, \text{agg}_{vv}^P, \text{agg}_{vu}^P, \text{agg}_u^G, \text{agg}_v^G, \text{Geoagg}_u^L, \text{Geoagg}_v^L\}.$$

1253 It is obvious that GeoNGNN without outer GNN, defined in Definition ??, is a specific kind of  
 1254 general subgraph GNN, which can be denoted as  $\text{GeoA}(\{\text{agg}_{uv}^P, \text{Geoagg}_u^L\}, \text{VS}, N_{\text{inner}}, r_{\text{sub}}, r_{\text{cutoff}})$ .

## 1255 E.2 GEOMETRIC COUNTERPARTS OF WELL-KNOWN TRADITIONAL SUBGRAPH GNNs

1256 In the main body, we have extended one of the simplest subgraph GNNs, NGNN, to geometric  
 1257 scenarios, and shown that GeoNGNN is already E(3)-complete. Similar efforts can be made to other  
 1258 well known subgraph GNNs, including DS-GNN (Bevilacqua et al., 2021), DSS-GNN (Bevilacqua  
 1259 et al., 2021), GNN-AK (Zhao et al., 2021), OSAN (Qian et al., 2022) and so on. We now give a  
 1260 general definition of the geometric counterparts of these subgraph GNNs, and show that they, even  
 1261 though does not exactly match the general forms in Definition 5.2, are also E(3)-complete under  
 1262 exactly the same conditions as Theorem 5.3.

1263 Similar to Zhang et al. (2023), we consider the following well-known subgraph GNNs: IDGNN (You  
 1264 et al., 2021), DS-GNN (Bevilacqua et al., 2021), OSAN (Qian et al., 2022), GNN-AK (Zhao et al.,  
 1265 2021), DSS-GNN (ESAN) (Bevilacqua et al., 2021), GNN-AK-ctx (Zhao et al., 2021), SUN (Frasca  
 1266 et al., 2022). Generally, all these traditional subgraph GNNs involve local aggregations. In a manner  
 1267 akin to the modification detailed in Definition 5.2, to get the geometric counterpart of these models,  
 1268 we replace the node representations aggregated by local operations with *node representations that*  
 1269 *integrate the distances between the aggregated node and the base node* (i.e., the node performing the  
 1270 aggregation).

1271 Notably, GNN-AK, GNN-AK-ctx, IDGNN, OSAN, DS-GNN, and DSS-GNN all employ base  
 1272 GNNs, which can operate on graphs, subgraphs, or a combination of subgraphs (as in DSS-GNN).  
 1273 In these cases, the proposed adjustment simply involves replacing these base GNNs with DisGNN.  
 1274 In certain architectures like SUN, they may have more complicated operations, such as aggregating  
 1275  $\{\{h_{ww'} \mid w' \in \mathcal{N}(v), w \in \mathcal{V}_G\}\}$  to update  $h_{uv}$ , which involve a combination of global ( $w$ )  
 1276 and local ( $w'$ ) aggregation. Consistent with the modification rule, we selectively incorporate distance  
 1277 information solely for these local operations. Therefore, the featured geometric counterpart aggregates  
 1278  $\{\{(h_{w,w'}, d_{w'v}) \mid w' \in \mathcal{N}(v), w \in \mathcal{V}_G\}\}$  instead. One can also incorporate distance information  
 1279 into those global operations. However, they are unnecessary in terms of boosting expressiveness, as  
 1280 current modifications are enough for them to achieve completeness, as shown in the following. We  
 1281 name all the geometric counterparts with a *Geo* prefix, such as *GeoSun*.

1282 **Theorem E.2.** (Completeness for geometric counterparts of well-known subgraph GNNs) *Under the*  
 1283 *node marking with  $r_{\text{sub}}$ -size ego subgraph policy, when the conditions described in Theorem 5.3 are*  
 1284 *met, GeoIDGNN, GeoDS-GNN, GeoOSAN, GeoGNN-AK, GeoDSS-GNN (ESAN), GeoGNN-AK-ctx,*  
 1285 *GeoSUN are all E(3)-complete.*

1286 *Proof.*

- 1287 • Among these models, *GeoIDGNN*, *GeoDS-GNN*, *GeoOSAN* fall under the general defini-  
 1288 tion of geometric subgraph GNNs (see Definition 5.2), and they all incorporate at least one  
 1289 local operation, therefore they are inherently complete given these conditions according to  
 1290 Theorem 5.3.



- Under node marking with original graph ( $r_{\text{sub}} = \infty$ ) policy, the other models can all be well abstracted and summarized, which have been done by Zhang et al. (2023). We list here for convenience (non-blue parts represent the geometric modification):

GeoGNN-AK (Zhao et al., 2021).

$$h_{uv}^{(l+1)} = \begin{cases} f^{(l)}(h_{uv}^{(l)}, h_{vv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}) & \text{if } u \neq v, \\ f^{(l)}(h_{vv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}, \{h_{uv}^{(l)}\}) & \text{if } u = v. \end{cases}$$

It adopts VS pooling.

GeoGNN-AK-ctx (Zhao et al., 2021). The GNN aggregation scheme can be written as

$$h_{uv}^{(l+1)} = \begin{cases} f^{(l)}(h_{uv}^{(l)}, h_{vv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}) & \text{if } u \neq v, \\ f^{(l)}(h_{vv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}, \{h_{uv}^{(l)}\}, \{h_{uv}^{(l)}\}) & \text{if } u = v. \end{cases}$$

It adopts VS pooling.

GeoDSS-GNN (Bevilacqua et al., 2021). The aggregation scheme of DSS-GNN can be written as

$$h_{uv}^{(l+1)} = f^{(l)}(h_{uv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}, \{h_{uv}^{(l)}\}, \{(h_{w,w'}^{(l)}, d_{w'v}) : w \in \mathcal{V}_G, w' \in \mathcal{N}_G(v)\}).$$

It adopts VS pooling.

GeoSUN (Frasca et al., 2022). The WL aggregation scheme can be written as

$$h_{uv}^{(l+1)} = f^{(l)}(h_{uv}^{(l)}, h_{uu}^{(l)}, h_{vv}^{(l)}, \{(h_{uw}^{(l)}, d_{vw}) : w \in \mathcal{N}_G(v)\}, \{h_{uv}^{(l)}\}, \{h_{uv}^{(l)}\}, \{(h_{w,w'}^{(l)}, d_{w'v}) : w \in \mathcal{V}_G, w' \in \mathcal{N}_G(v)\}).$$

It can adopt VS or SV pooling.

Regarding these models, it is observed that they all exhibit the local operation  $\text{Geoagg}_u^L$ , thus enabling them to implement the GeoNGNN inner layer with a single aggregation layer, as demonstrated in the proof of Theorem 5.3. Moreover, irrespective of whether they employ SV or VS pooling, they are all capable of implementing VS pooling, which is adopted by GeoNGNN, as evidenced in the proof of Theorem 5.3. Hence, under the given conditions, these models can also implement GeoNGNN under the given conditions and consequently achieve completeness, as GeoNGNN itself is complete.

□

## F GEONGNN-C: SE(3)-COMPLETE VARIANT OF GEONGNN

### F.1 DEFINITION AND THEORETICAL ANALYSIS OF GEONGNN-C

In certain chemical-related scenarios, it is important to guarantee that the outputs of models exhibit invariance under permutations, transformations, and rotations of point clouds, while **exhibiting differentiation when the point cloud undergoes mere reflection**. This distinction is crucial as pairs of enantiomers, may demonstrate vastly contrasting properties, such as binding affinity. In this section, we propose the SE(3)-complete invariant of GeoNGNN, which is capable of embracing chirality and producing complete representations for downstream tasks.

Generally speaking, GeoNGNN-C is designed by simply replacing the undirected distance in GeoNGNN with the directed distance. The formal definition is:

**Definition F.1.** The fundamental architecture of GeoNGNN remains the same, with the exception that the inner GNN for node  $k$ 's subgraph performs the subsequent message-passing operation:

$$h_{ki}^{(l+1)} = f_{\text{mp}}(h_{ki}^{(l)}, \{(h_{kj}^{(l)}, d_{k,ij}) \mid j \in N_k(i)\}),$$

where  $h_{ki}^{(l)}$  represents node  $i$ 's representation at layer  $l$  in node  $k$ 's subgraph, and the directed distance,  $d_{k,ij}$ , is defined as:

$$d_{k,ij} = f_{\text{dist}}(\text{sign}(\vec{r}_{ci} \times \vec{r}_{cj} \cdot \vec{r}_{ck}), d_{ij}),$$

where  $c$  is the geometric center of the point cloud.

As can be easily validated, directed distance is invariant under SE(3)-transformation while undergoing a sign reversal after reflecting the point cloud. Consequently, GeoNGNN-C retains SE(3)-invariance while possessing the potential to discriminate enantiomers. Significantly, we show that GeoNGNN-C is SE(3)-complete, able to distinguish all pairs of enantiomers:

**Theorem F.2.** (*SE(3)-Completeness of GeoNGNN-C*) When the conditions described in Theorem 5.1 are met, GeoNGNN-C is SE(3)-complete.

*Proof.* We first note that the proof is highly similar to that in the proof of Theorem 5.1.

Let us consider a subgraph containing a node  $i$ , where we assume that  $i$  is distinct from the geometric center  $c$ . By imitating the proof of Theorem 5.1, we can ascertain the following:

After three rounds of the Chiral DisGNN (i.e., the DisGNN that incorporates the directed distance as a geometric representation as described in Definition F.1), node representations  $h_j^{(3)}$  for any node  $j$  can encode the directed distances  $d_{ji}$ ,  $d_{jc}$ , and  $d_{ic}$ . This enables the completion of the triangular distance encoding necessary for reconstruction in Lemma H.6.

Next, we employ a modified version of the proof from Lemma H.6 to demonstrate that with an additional two rounds of the Chiral DisGNN, we can derive the SE(3)- and permutation-invariant identifier of the point cloud  $P$ .

In the proof of Lemma H.6, we first search across all the nodes to find two nodes  $a$  and  $b$  that form the minimal dihedral angles  $\theta(aic, bic)$ , and then identifies the coordinates of  $a, b, i, c$  up to Euclidean isometry from the all-pair distances  $D = \{(m, n, d_{mn}) \mid m, n \in \{a, b, i, c\}\}$ . However, since Chiral DisGNN embeds the geometry using directed distance, we now have  $D_i = \{(m, n, d_{i,mn}) \mid m, n \in \{a, b, i, c\}\}$  instead. We are now able to identify the coordinates of  $a, b, i, c$  up to SE(3)-transformation (i.e., Euclidean isometry without reflection) from  $D_i$  in the following way:

1. Fix  $x_i = (0, 0, 0)$ .
2. Fix  $x_c = (d_{ic}, 0, 0)$ .
3. Fix  $x_a$  in plane  $xOy+$  and calculate its coordinates using  $d_{ia}, d_{ca}$ .
4. Calculate the coordinates of  $x_b$  using  $d_{ib}, d_{cb}, d_{ab}$ , and determine whether  $b$  is on  $z+$  side or  $z-$  side using the signal embedded in  $d_{i,ab}$ .

Table 7: Results on chiral-sensitive tasks compared to reference models. We **bold** the best result among models and underline the second best ones.

Model	R/S	Enantiomer ranking	Binding affinity
	Accuracy $\uparrow$	R. Accuracy $\uparrow$	MAE $\downarrow$
DMPNN+tags	-	0.701 $\pm$ 0.003	0.285 $\pm$ 0.001
SphereNet	<u>0.982<math>\pm</math>0.002</u>	0.686 $\pm$ 0.003	-
Tetra-DMPNN	0.935 $\pm$ 0.001	0.690 $\pm$ 0.006	0.324 $\pm$ 0.02
ChiRo	0.968 $\pm$ 0.019	0.691 $\pm$ 0.006	0.359 $\pm$ 0.009
ChiENN	<b>0.989<math>\pm</math>0.000</b>	<b>0.760<math>\pm</math>0.002</b>	<u>0.275<math>\pm</math>0.003</u>
GeoNGNN-C	0.980 $\pm$ 0.002	<u>0.751<math>\pm</math>0.003</u>	<b>0.254<math>\pm</math>0.000</b>

Note that the orientation relevant to SE(3) transformation is already determined at this stage. We proceed with the remaining steps of the proof outlined in Lemma H.6 and reconstruct the whole geometry in a *deterministic* way based on the known 4-tuple *abic*, and therefore reconstruct the whole geometry up to permutation and SE(3)-transformation.

Similarly, note that such subgraphs  $i$ , where  $i$  is distinct from the geometric center  $c$ , always exist as GeoNGNN-C traverses all node subgraphs. Hence, we have established the SE(3)-Completeness of GeoNGNN-C.

□

## F.2 EXPERIMENTAL EVALUATION OF GEONGNN-C

**Datasets and tasks** We evaluate the ability of GeoNGNN-C to distinguish enantiomers and learn meaningful chirality-relevant representations through three tasks on two datasets (Adams et al., 2021; Gaiński et al., 2023): 1) Classification of tetrahedral chiral centers as R/S. R/S offers a fundamental measure of molecular chirality, and this classification task serves as an initial evaluation of the model’s capacity to discriminate enantiomers. The underlying dataset contains a total of 466K conformers of 78K enantiomers with a single tetrahedral chiral center. 2) Enantiomer ranking task and binding affinity prediction task. The two tasks share the same underlying dataset, while the second task requires models to predict the binding affinity value for each enantiomer directly, and the first requires the model to predict which enantiomer between the corresponding pair exhibits higher such values. Chirality is essential here because enantiomers often exhibit distinct behaviors when docking in a chiral protein pocket, thus leading to differences in binding affinity. The underlying dataset contains 335K conformers from 69K enantiomers carefully selected and labeled by Adams et al. (2021).

**Model architecture and training/evaluation details** In the task of R/S classification, GeoNGNN-C adopts a three-layer outer GNN positioned *before* the inner GNNs. This configuration is designed to enhance the node features first, facilitating the subsequent extraction of chirality-related properties within the inner GNNs. For the other two tasks, GeoNGNN-C consists of five inner layers and one outer layer, with the outer GNN placed after the inner GNN. The model is trained with L1 loss. Specifically, if predicted affinity difference between two enantiomers falls below the threshold of 0.001, it is considered that the model lacks the capability to discriminate between the two enantiomers. Note that all the evaluation criteria are consistent with previous works Adams et al. (2021); Gaiński et al. (2023) for fair comparisons.

**Models to compare with** We compare GeoNGNN-C against previous high-performance models, SphereNet (Liu et al., 2021), ChiRo (Adams et al., 2021), ChiENN (Gaiński et al., 2023), and other baseline models in (Pattanaik et al., 2020; Adams et al., 2021; Gaiński et al., 2023). It is worth noting that, for the last two tasks, the docking scores are labeled at the stereoisomer level, meaning that all different conformers of a given enantiomer are assigned the same label, specifically the best score, by Adams et al. (2021). As a result, 2D Graph Neural Networks (GNNs) such as DMPNN+tags and models that possess **invariance to conformer-level transformations**, such as bond rotations, including ChiRo (Adams et al., 2021), Tetra-DMPNN (Pattanaik et al., 2020) and ChiENN (Gaiński et al., 2023), inherently exhibit significantly better data efficiency and usually exhibit better performance. GeoNGNN-C and SphereNet do not exhibit such invariance, and are trained on 5 conformers for each enantiomer as data augmentation.

**Results** The experimental results for the three tasks are presented in Table 7. It can be observed that GeoNGNN-C demonstrates a competitive performance compared to SOTA methods on the R/S classification task. Importantly, despite the simple and general model design, GeoNGNN-C outperforms models specifically tailored for the last two tasks, such as ChIRO and ChiENN, which incorporates invariance to bond rotations. It successfully learns the *approximate invariance* from only 5 conformers per enantiomer and achieves the second-best result (very close to the best one) on the enantiomer ranking task and new SOTA results on the binding affinity prediction task. These results reveal the potential of GeoNGNN-C as a simple but theoretically chirality-aware expressive geometric model.

## G EXPERIMENT SETTINGS

### G.1 DATASET SETTINGS

**Synthetic dataset** We generate the synthetic dataset by implementing the counterexamples proposed by Li et al. (2024).

The dataset includes 10 isolated cases and 7 combinatorial cases, where each case consists of a pair of symmetric point clouds that cannot be distinguished by DisGNN. Figure 7 shows two pairs of selected counterexamples, and more counterexamples are provided in Figure G.1.

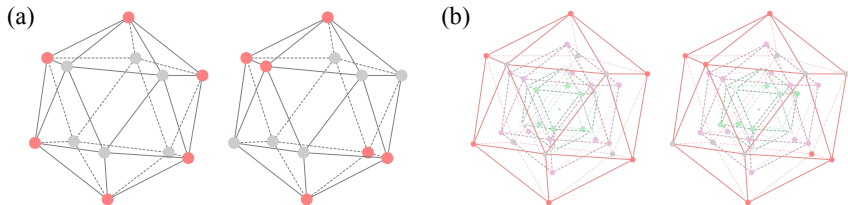


Figure 7: Selected counterexamples in the synthetic dataset. Only colored nodes belong to the point clouds. The grey nodes and “edges” are for visualization purposes only. (a) One isolated case. (b) One combinatorial case.

The 10 isolated cases comprise the following: 6 pairs of point clouds sampled from regular dodecahedrons, 1 pair from icosahedrons, 2 pairs from a combination of one cube and one regular octahedron, and 1 pair from a combination of two cubes. In the combination cases, the relative size is set to 1/2.

The 7 combinatorial cases are obtained through the augmentation of the 6 pairs of point clouds sampled from regular dodecahedrons and 1 pair from icosahedrons, using the method outlined in Theorem A.1 of Li et al. (2024). When augmenting the base point cloud, we consider the *original*, *complementary*, and *all* types of the base graph (Li et al., 2024), respectively.

Given that the counterexamples are designed to test the maximal expressiveness of geometric models, we configure all point clouds in the dataset to be fully connected.

**rMD17 and MD22** The data split (training/validation/testing) in rMD17 is 950/50/the rest, following related works such as Batatia et al. (2022); Gasteiger et al. (2021). For MD22, we adopt the data split specified in Chmiela et al. (2023), which is also consistent with the other works. We train the models using a batch size of 4.

To optimize the parameters  $\theta$  of the model  $f_\theta$ , we use a weighted loss function:

$$\mathcal{L}(\mathbf{X}, \mathbf{z}) = (1 - \rho)|f_\theta(\mathbf{X}, \mathbf{z}) - \hat{t}(\mathbf{X}, \mathbf{z})| + \frac{\rho}{N} \sum_{i=1}^N \sqrt{\sum_{\alpha=1}^3 \left(-\frac{\partial f_\theta(\mathbf{X}, \mathbf{z})}{\partial \mathbf{x}_{i\alpha}} - \hat{F}_{i\alpha}(\mathbf{X}, \mathbf{z})\right)^2},$$

where  $\mathbf{X} \in \mathbb{R}^{N \times 3}$  and  $\mathbf{z} \in \mathbb{R}^N$  represents the  $n$  atoms’ coordinates and atomic number respectively,  $\hat{t}$  and  $\hat{F}$  represents the molecule’s energy and forces acting on atoms respectively. The force ratio  $\rho$  is chosen as 0.99 or 0.999.

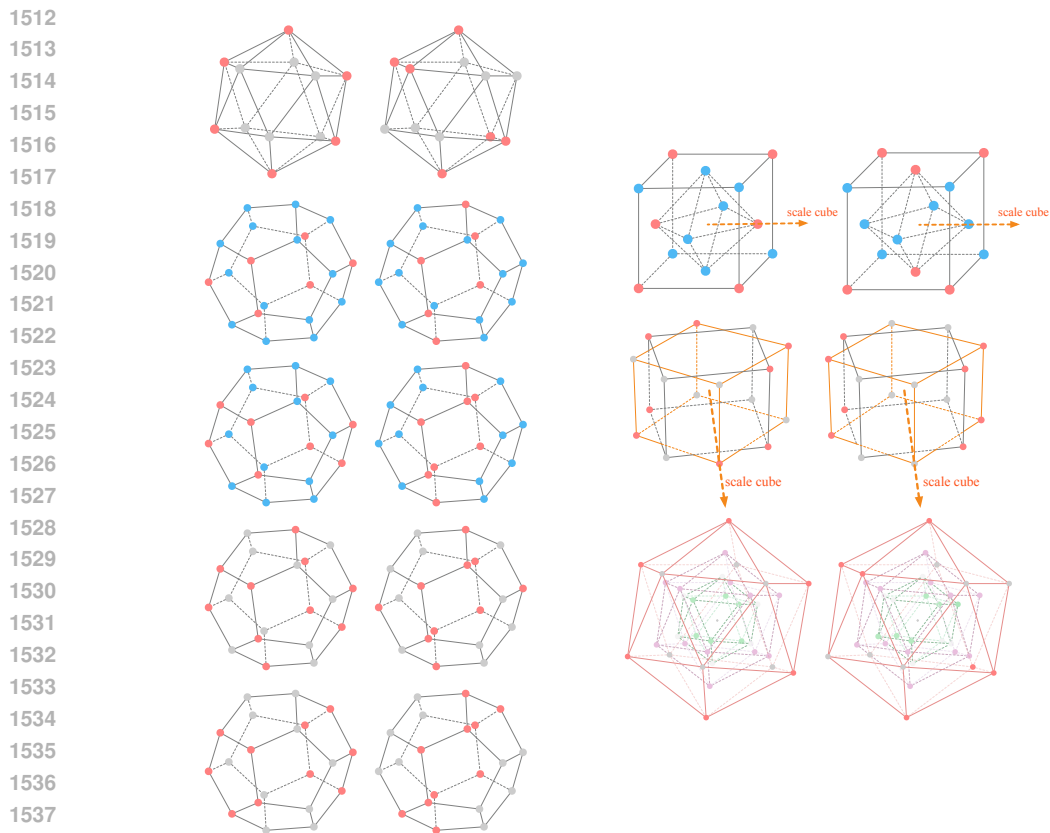


Figure 8: Pairs of point clouds that cannot be distinguished by DisGNN, taken from Li et al. (2024). The nodes are arranged on the surfaces of regular polyhedra, only red or blue nodes are part of point clouds; the grey nodes and the “edges” are included solely for visualization purposes. For those subfigures with two node colors, nodes of the same color in the left and right point clouds represent one specific pair of indistinguishable point clouds by GeoNGNN. The label "Scale cube" signifies that the relative sizes of the two regular polyhedra can vary arbitrarily. Each subfigure, except the bottom-rightmost one, represents an isolated counterexample. The bottom-rightmost case illustrates a combinatorial counterexample, constructed by combining multiple instances of the top-left pair in an "origin-all-complementary" pattern. Comprehensive explanations of these counterexamples are provided in Li et al. (2024).

In rMD17, the experimental results of NequIP (Batzner et al., 2022), GemNet (Gasteiger et al., 2021), are sourced from Musaelian et al. (2023). The result of PaiNN (Schütt et al., 2021) is sourced from Batatia et al. (2022). The results of 2-F-DisGNN (Li et al., 2024) and MACE (Batatia et al., 2022) are reported by their original papers. We trained and evaluated DimeNet (Gasteiger et al., 2019) using its implementation in Pytorch Geometric (Fey & Lenssen, 2019) since the original paper did not report results on this dataset, and we use the default parameters (We find that the default parameters produce the best performance).

In MD22, the results of sGDML and MACE (Kovacs et al., 2023) are sourced from Kovacs et al. (2023). The results of PaiNN (Schütt et al., 2021), TorchMD-Net (Thölke & De Fabritiis, 2021), Allegro (Musaelian et al., 2023), and Equiformer (Liao & Smidt, 2022) are obtained from the work presented by Li et al. (2023).

**3BPA** Following Batatia et al. (2022), we split the training set and validation set at a ratio of 450/50, utilizing pre-split test sets for evaluation. We use a batch size of 4, an identical objective function to that in rMD17 and MD22, and a force ratio of 0.999 were employed. The results of all other models are sourced from Batatia et al. (2022).

1566 **QM9** Following Li et al. (2024), we split the training set and validation set at a ratio of 110K/10K,  
 1567 utilizing pre-split test sets for evaluation. We use a batch size of 32. See the following for details of  
 1568 model hyper-parameters.  
 1569


1570 G.2 MODEL SETTINGS

1571 **RBF** Following previous work, we use radial basis functions (RBF)  $f_e^{\text{rbf}} : \mathbb{R} \rightarrow \mathbb{R}^{H_{\text{rbf}}}$  to expand  
 1572 the euclidean distance between two nodes into a vector, which is shown to be beneficial for inductive  
 1573 bias Gasteiger et al. (2019); Li et al. (2024). We use the same expnorm RBF function as Li et al.  
 1574 (2024), defined as  
 1575

$$f_e^{\text{rbf}}(e_{ij})_k = e^{-\beta_k(\exp(-e_{ij}) - \mu_k)^2}, \tag{7}$$

1576 where  $\beta_k, \mu_k$  are coefficients of the  $k^{\text{th}}$  basis.  
 1577

1578 **DisGNN** In each stage of the DisGNN, we augment its expressiveness and experimental perform-  
 1579 ance by stacking dense layers or residual layers DisGNN’s architecture is described in Figure 9.  
 1580

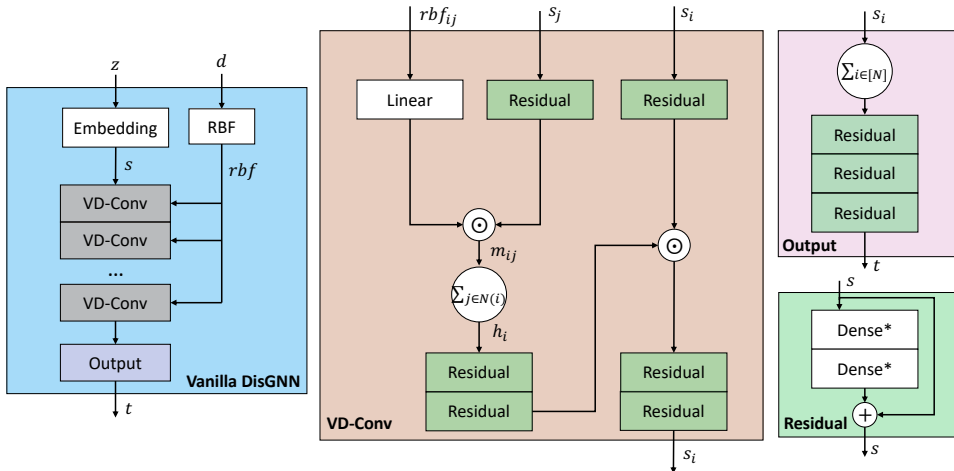

1581  
 1582  
 1583  
 1584  
 1585  
 1586  
 1587  
 1588  
 1589  
 1590  
 1591  
 1592  
 1593  
 1594  
 1595  
 1596  
 1597  
 1598 Figure 9: Architecture of DisGNN.  $z, d, t$  represent the atomic number, euclidean distance and the  
 1599 target output, respectively. Each Linear block represents an affine transformation with learnable  
 1600 parameters  $W, b$ , while the Dense\* block extends the Linear block by incorporating a non-linear  
 1601 activation function (pre-activation).  $\odot$  represents Hadamard product.

1602 We set the number of VD-Conv layers to 7 for rMD17 and 6 for MD22. The hidden dimension is set  
 1603 to 512 and the dimension of radial basis functions (RBF) is set to 16. The message passing cutoff  
 1604 is set to  $13\text{\AA}$  for rMD17 and  $7\text{\AA}$  for MD22. We employ the polynomial envelope with  $p = 6$ , as  
 1605 proposed in Gasteiger et al. (2019), along with the corresponding cutoff.  
 1606

1607 **NGNN** GeoNGNN is based on the high-level framework of NGNN proposed in (Zhang & Li,  
 1608 2021). NGNN learns over topological graphs by nesting a base GNN such as GCN (Kipf & Welling,  
 1609 2016), GIN (Xu et al., 2018b), or GraphSAGE (Hamilton et al., 2017), as illustrated in Figure 10. For  
 1610 completeness, we include formal descriptions provided in (Zhang & Li, 2021).

1611 Formally, given a topological graph  $G = (V, E)$ , where  $V = \{1, 2, \dots, n\}$  represents the set of  
 1612 nodes and  $E \subseteq V \times V$  represents the set of edges, NGNN first defines  $k$ -hop ego subgraphs  $G_k^v$   
 1613 for each node  $v \in V$ . Each  $k$ -hop ego subgraph  $G_k^v$  is induced by the nodes within  $k$ -hops from  $v$   
 1614 (including  $v$  itself) and the edges connecting these nodes.

1615 For each rooted subgraph  $G_k^w$ , NGNN applies a base GNN to perform  $T^{\text{in}}$ -rounds of message passing.  
 1616 Let  $v$  be any node appearing in  $G_k^w$ . Denote the hidden state of  $v$  at time  $t$  in subgraph  $G_k^w$  as  $h_{v, G_k^w}^t$ .  
 1617 The initial hidden state  $h_{v, G_k^w}^0$  is typically set to the node’s raw features, such as embeddings of  
 1618 atomic numbers. When explicit node marking is adopted, which is the default in GeoNGNN,  $h_{v, G_k^w}^0$   
 1619 is further fused with a unique mark embedding to distinguish the root node within its subgraph.

After  $T^{\text{in}}$ -rounds of message passing, a subgraph pooling operation aggregates the node embeddings  $\{h_{v, G_k^w}^{T^{\text{in}}} \mid v \in G_k^w\}$  into a single subgraph representation  $h_{G_k^w}$ :

$$h_{G_k^w} = R_{\text{subgraph}} \left( \{h_{v, G_k^w}^{T^{\text{in}}} \mid v \in G_k^w\} \right),$$

where  $R_{\text{subgraph}}$  is the subgraph pooling function that summarizes all node-level information within the subgraph. This subgraph representation  $h_{G_k^w}$  serves as the final representation of the root node  $w$  in the original graph.

Subsequently, an outer GNN performs  $T^{\text{out}}$ -rounds of message passing, obtaining the hidden representation  $h_v^t$  of node  $v$  at step  $t$ , where the initial representation is  $h_v^0 = h_{G_k^w}$ . Finally, the graph-level representation  $h_G$  is produced:

$$h_G = R_{\text{graph}} \left( \{h_v^{T^{\text{out}}} \mid v \in V\} \right),$$

where  $R_{\text{graph}}$  is a global pooling function that aggregates node-level embeddings into a comprehensive graph-level representation. This process enables NGNN to capture hierarchical representations of the graph, leveraging both local (subgraph-level) and global (graph-level) features.

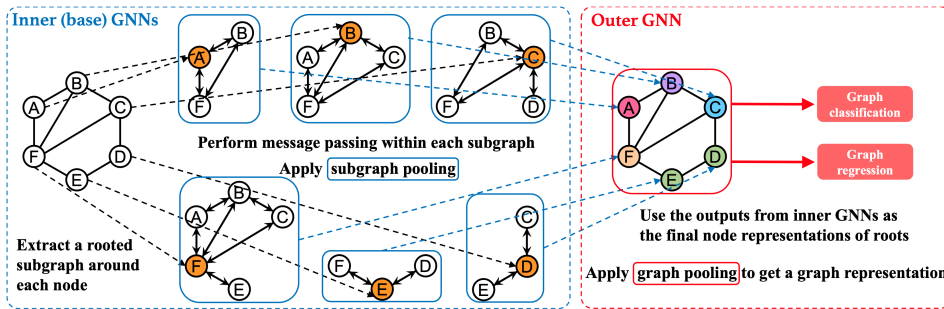


Figure 10: Illustration of NGNN (Zhang & Li, 2021), taken from (Zhang & Li, 2021). NGNN operates by first extracting rooted subgraphs around each node in the original graph. A base GNN with a subgraph pooling layer is then applied independently to each rooted subgraph to compute its representation. The resulting subgraph representation serves as the original feature for the root node in the original graph. Subsequently, an outer GNN is applied to the original graph, leveraging these node features and original graph structures to extract final graph-level representations.

**GeoNGNN** GeoNGNN serves as the geometric counterpart to NGNN, operating on point clouds rather than topological graphs in Figure 10. The high-level architecture of GeoNGNN is described in Definition ???. The inner DisGNN, which runs on the ego subgraph of each node, is similar to the DisGNN block shown in Figure 9. However, the inner DisGNN additionally performs node marking and distance encoding for each node  $j$  in node  $i$ 's subgraph *before* passing their representations to VD-Conv layers:

$$h_{ij} \leftarrow h_j \odot \text{MLPs}(\text{RBF}(d_{ij})) \odot \text{MLPs}(\text{Emb}(\mathbb{1}_{j=i})) \tag{8}$$

where  $h_{ij}$  represents node  $j$ 's representation in  $i$ 's subgraph.

The outer DisGNN additionally fuses the subgraph representation  $t_i$  produced by the inner DisGNN for node  $i$  with  $h_i$  obtained from the embedding layer:

$$h_i \leftarrow \text{MLPs}([h_i, t_i]) \tag{9}$$

The hidden dimension and message passing cutoff are set to the same values as those in DisGNN. The subgraph size is set to 13 Å for rMD17, 5 Å for MD22, 6 Å for 3BPA, 13 Å for QM9 and the maximal subgraph size is set to 25. We set  $(N_{\text{in}}, N_{\text{out}})$  as (5, 2) for rMD17, (3, 3) for MD22, (6, 2) for 3BPA and (4, 1) for QM9. It is worth mentioning that the total number of convolutional layers is the same as that of DisGNN. This ensures that the receptive field of the two models is roughly the same, thereby guaranteeing a relatively fair comparison.

We optimize all models using the Adam optimizer (Kingma & Ba, 2014), incorporating exponential decay and plateau decay learning rate schedulers, as well as a linear learning rate warm-up. To mitigate

the risk of overfitting, we employ early stopping based on validation loss and apply exponential moving average (EMA) with a decay rate of 0.99 to the model parameters during the validation and testing phases. The models are trained on Nvidia RTX 4090 and Nvidia A100 (80GB) GPUs. For rMD17, training hours for each molecule range from 20 to 70. For MD22, the training hours ranged from 35 to 150 on Nvidia 4090 for all molecules except Stachyose (due to longer convergence time) and Double-walled nanotube (the largest molecule necessitating an A100), which required about 210 and 70 GPU hours on the Nvidia 4090 and 80GB A100, respectively. For 3BPA, the training hours is around 10 GPU hours on Nvidia 4090. For QM9, the training hour is around 36 to 100 on the Nvidia 4090.

## H PROOF OF MAIN CONCLUSIONS IN MAIN BODY

### H.1 PREPARATION

In the following proof, we particularly focus on models’ ability to encode input representations without significant information loss. We provide a formal definition of an important concept *derive* below:

**Definition H.1. (Derive)** Given input representations  $P \in \mathbb{P}$ , let  $f : \mathbb{P} \rightarrow \mathbb{O}_1$  and  $g : \mathbb{P} \rightarrow \mathbb{O}_2$  be two property encoders defined on  $\mathbb{P}$ . If there exists a function  $h : \mathbb{O}_1 \rightarrow \mathbb{O}_2$  such that for all  $P \in \mathbb{P}$ ,  $h(f(P)) = g(P)$ , we say that  $f$  can derive  $g$ . With a slight abuse of notation, we say that  $f(P)$  can derive  $g(P)$ , denoted as  $f(P) \rightarrow g(P)$ .

For example, consider the space  $\mathbb{P} = \mathbb{R}^{n \times 3}$  comprising all point clouds of size  $n$ . Let  $f$  denote an encoder that computes  $f(P) = (\sum_{i=0}^{n-1} p_i, n)$ , which represents the sum of the nodes’ coordinates and the number of nodes, while  $g$  being an encoder calculating the geometric center of  $P$ , it follows that  $f(P) \rightarrow g(P)$ , since we can calculate the geometric center from the sum of the nodes’ coordinates and the number of nodes. In the following analysis, we consider  $\mathbb{P} = \mathbb{R}^{n \times 3}$  by default. Notice that derivation exhibits transitivity: if  $f_1 \rightarrow f_2$  and  $f_2 \rightarrow f_3$ , it follows that  $f_1 \rightarrow f_3$ .

Intuitively, “derive” is a concept describing the relation of two properties, i.e., whether property  $f(P)$  contains all the information needed to calculate  $g(P)$ . Obviously, if an encoder  $f$  can embed all the information needed for reconstructing a given point cloud, then it is E(3)-complete:

**Proposition H.2.** Consider  $\mathbb{P} = \mathbb{R}^{n \times 3}$  being the space of all point clouds of size  $n$ , and  $f$  satisfying permutation- and E(3)-invariance, then:  $f(P) \rightarrow P$  up to permutation and Euclidean isometry  $\iff f$  is E(3)-complete.

*Proof.* We first prove the reverse direction. Since  $f$  is E(3)-complete, it will give distinct graph embeddings/features  $s \in \mathbb{R}^d$  for non-isomorphic finite-size point clouds. We can thus let  $h : \mathbb{R}^d \rightarrow \mathbb{R}^{n \times 3}$  be a mapping which exactly maps the graph embeddings to the original point clouds up to permutation and Euclidean isometry. The existence of such  $h$  implies that  $f(P) \rightarrow P$  up to permutation and Euclidean isometry.

For the forward direction, we prove by contradiction. Assume that  $f$  is not E(3)-complete, i.e., there exists two non-isomorphic point clouds  $P_1, P_2$  such that  $f(P_1) = f(P_2)$ . Since  $f(P) \rightarrow P$  up to permutation and Euclidean isometry, we have that there exists a function  $h$  that can reconstruct the point cloud from the embedding. However, since  $f(P_1) = f(P_2)$ , their reconstruction  $h(f(P_1)), h(f(P_2))$  will be the same up to permutation and Euclidean isometry, which contradicts the assumption that  $P_1$  and  $P_2$  are non-isomorphic. Therefore,  $f$  is E(3)-complete.  $\square$

### H.2 PROOF OF THEOREM 4.2

As indicated in Figure 1(b), all  $\mathcal{D}$ -symmetric point clouds are also  $\mathcal{C}$ -symmetric, and therefore. Here, we first formally prove it.

**Proposition H.3. ( $\mathcal{D}$ -symmetry implies  $\mathcal{C}$ -symmetry)** For any point cloud  $P \in \mathbb{R}^{n \times 3}$ , if  $P$  is  $\mathcal{D}$ -symmetric, then  $P$  is  $\mathcal{C}$ -symmetric.

*Proof.* As indicated by the conclusions of Delle Rose et al. (2023); Li et al. (2024), with the “derive” notations we introduced in the previous subsection, we have that:  $x_i^{\mathcal{D}} \rightarrow x_i^{\mathcal{C}}$ , where  $P \in \mathbb{R}^{n \times 3}$ . This



essentially implies that DisGNN’s node-level output contains the information of the distance between nodes to the geometric center. As a direct consequence, for any point cloud  $P$ , the node partition based on node features  $X^{\mathcal{D}}$  will be no coarser than that based on  $\mathcal{C}(P)$ . (Otherwise, assume that there exists some  $P'$  and nodes  $i, j$  such that  $x_i^{\mathcal{D}} = x_j^{\mathcal{D}}$  but  $x_i^{\mathcal{C}} \neq x_j^{\mathcal{C}}$ . Then the implicit function  $h$  that takes  $x_i^{\mathcal{D}}$  as input and output  $x_i^{\mathcal{C}}$  will not exist, which contradicts the assumption that  $x_i^{\mathcal{D}} \rightarrow x_i^{\mathcal{C}}$ .)

If  $P$  is  $\mathcal{D}$ -symmetric, the center set  $\mathcal{D}^{\text{set}}(P)$  will obtain only one element. By definition, the cardinality of the center sets only depends on the node features partitions, and no coarser partition will lead to no smaller center set. Therefore,  $\mathcal{C}^{\text{set}}(P)$  will also contain only one element, and thus  $P$  is  $\mathcal{C}$ -symmetric.  $\square$

Based on Proposition H.3, to prove Theorem 4.2, it suffices to prove that point clouds that are not  $\mathcal{D}$ -symmetric are identifiable. To prove this, we first show the ability of DisGNN to learn global geometric information:

**Lemma H.4.** (*Locate  $\mathcal{A}$  centers*) Given a point cloud  $P \in \mathbb{R}^{n \times 3}$  with node features calculated by algorithm  $\mathcal{A}$ ,  $X^{\mathcal{A}}$ . Denote the  $\mathcal{D}$ -center calculated by mass function  $m$  as  $c^m \in \mathbb{R}^{n \times 3}$ . With a bit notation abuse, we use  $d_{ic^m}$  to represent the distance between node  $i$  and  $c^m$ .

We now run a DisGNN on  $(P, X^{\mathcal{A}})$ , and denote the node  $i$ ’s representations at layer  $l$  as  $h_i^{(l)}$  (we let  $h_i^{(0)} = x_i^{\mathcal{A}}$ ). Then we have:

- (*Node-center distance*) Given an arbitrary mass function  $m$ ,  $h_i^{(2)}$  can derive  $d_{i,c^m}$ .
- (*Center-center distance*) Given two arbitrary mass functions  $m_1$  and  $m_2$ ,  $\{\{h_i^{(2)} \mid i \in [n]\}\}$  can derive  $d_{c^{m_1}, c^{m_2}}$ .
- (*Counting centers*)  $\{\{h_i^{(2)} \mid i \in [n]\}\}$  can derive  $\mathbb{1}_{|\mathcal{A}^{\text{set}}(P)|=1}$ .

This proposition essentially extends the Barycenter Lemma in Delle Rose et al. (2023); Li et al. (2024) to the general case of centers defined by  $\mathcal{D}$  features. Such information can enable DisGNN to obtain many global geometric features, facilitating it to distinguish non-isomorphic point clouds. Moreover, the ability to count centers is crucial for DisGNN to distinguish any point cloud that is not  $\mathcal{A}$ -symmetric from a  $\mathcal{A}$ -symmetric one, thereby achieving “identifiability”. Now we give the formal proof.

*Proof.*

**Node-center distance** We first denote the weighted distance profile of node  $i$  as  $f(m, i)$ , which is defined as  $f(m, i) = \sum_{j \in [n]} m(x_j^{\mathcal{A}}) d_{ij}^2$ . According to the aggregation scheme of DisGNN,  $f(m, i)$  can be derived from  $h_i^{(1)}$ , since when  $m$  is given:  $h_i^{(1)} \rightarrow (h_i^{(0)}, \{\{h_j^{(0)}, d_{ij}\} \mid j \in [n]\}\} \rightarrow \{\{x_j^{\mathcal{A}}, d_{ij}\} \mid j \in [n]\}\} \rightarrow \sum_{j \in [n]} m(x_j^{\mathcal{A}}) d_{ij}^2$ . All the  $\rightarrow$  here hold because we assume that DisGNN uses injective function forms and parameterizations (thereby resulting in no information loss), and  $j \in [n]$  since DisGNN treats point clouds as fully connected distance graphs, as mentioned at the beginning of the main body.

1782  $f(m, i)$  can be further decomposed as:

$$\begin{aligned}
1783 & \\
1784 & f(m, i) = \sum_{j \in [n]} m(x_j^A) d_{ij}^2 \\
1785 & \\
1786 & = \sum_{j \in [n]} m(x_j^A) \|p_i - p_j\|^2 \\
1787 & \\
1788 & = \sum_{j \in [n]} m(x_j^A) \|p_i - c^m + c^m - p_j\|^2 \\
1789 & \\
1790 & = \sum_{j \in [n]} m(x_j^A) (\|p_i - c^m\|^2 + \|p_j - c^m\|^2 - 2\langle p_i - c^m, p_j - c^m \rangle) \\
1791 & \\
1792 & = M \|p_i - c^m\|^2 + \sum_{j \in [n]} m(x_j^A) \|p_j - c^m\|^2 - 2\langle p_i - c^m, \sum_{j \in [n]} m(x_j^A) (p_j - c^m) \rangle \\
1793 & \\
1794 & \\
1795 & 
\end{aligned}$$

1796 where  $M = \sum_{j \in [n]} m(x_j^A)$  and  $\langle \cdot \rangle$  denotes the inner product.

1797 By definition of  $c^m$ ,  $\sum_{j \in [n]} m(x_j^A) (p_j - c^m) = 0$ . Therefore, we have:

$$1798 \quad f(m, i) = M \|p_i - c^m\|^2 + \sum_{j \in [n]} m(x_j^A) \|p_j - c^m\|^2$$

1800 Therefore, the distance from  $i$  to  $c^m$  can be calculated as:

$$1801 \quad \frac{1}{M} \left( f(m, i) - \frac{1}{2M} \sum_{j \in [n]} m(x_j^A) f(m, j) \right) = \|p_i - c^m\|^2 = d_{i, c^m}^2 \quad (10)$$

1802 And since

$$\begin{aligned}
1803 & h_i^{(2)} \rightarrow (h_i^{(1)}, \{ \{ (h_j^{(1)}, d_{ij}) \mid j \in [n] \} \}) \\
1804 & \rightarrow (f(m, i), \{ \{ (m(x_j^A), f(m, j)) \mid j \in [n] \} \}), \quad (11)
\end{aligned}$$

1805 we finally have:  $h_i^{(2)} \rightarrow d_{i, c^m}$ .

1806 **Center-center distance** Based on the conclusion of Node-center distance, at round 2, each node is aware of its distance to the two centers defined by  $m_1$  and  $m_2$ :

$$1807 \quad h_i^{(2)} \rightarrow (d_{i, c^{m_1}}, d_{i, c^{m_2}}). \quad (12)$$

1808 Therefore,

$$\begin{aligned}
1809 & h_i^{(2)} \rightarrow \|p_i - c^{m_1}\|^2 - \|p_i - c^{m_2}\|^2 \\
1810 & = \langle c^{m_2} - c^{m_1}, 2p_i - c^{m_1} - c^{m_2} \rangle
\end{aligned}$$

1811 Therefore, the multiset of all node representations at round 2 can derive the distance between the two centers:

$$\begin{aligned}
1812 & \{ \{ h_i^{(2)} \mid i \in [n] \} \} \rightarrow \{ \{ (h_i^{(2)}, m_1(x_i^A)) \mid i \in [n] \} \} \\
1813 & \rightarrow \frac{1}{M_1} \sum_{i \in [n]} m_1(x_i^A) \langle -c^{m_1} + c^{m_2}, 2p_i - c^{m_1} - c^{m_2} \rangle \\
1814 & = \langle -c^{m_1} + c^{m_2}, (\frac{2}{M_1} \sum_{i \in [n]} m_1(x_i^A) p_i) - c^{m_1} - c^{m_2} \rangle \\
1815 & = \langle -c^{m_1} + c^{m_2}, 2A^{m_1} - c^{m_1} - c^{m_2} \rangle \\
1816 & = \langle -c^{m_1} + c^{m_2}, c^{m_1} - c^{m_2} \rangle \\
1817 & = -\|c^{m_1} - c^{m_2}\|^2, \quad (13)
\end{aligned}$$

1818 where  $M_1 = \sum_{i \in [n]} m_1(x_i^A)$ .

**Counting centers** In this case, we are not given any specific mass function  $m$ . It seems like we need to iterate all possible mass functions to determine the number of centers, which is infeasible due to the infinite number of mass functions. However, thanks to Proposition B.4, we can determine whether  $\mathcal{A}^{\text{set}}(P)$ 's cardinality is 1 (i.e., whether  $P$  is  $\mathcal{A}$ -symmetric) by checking whether the geometric centers of all corresponding sub point clouds coincide with each other.

Now, assume that there are  $K$  types of node features in  $X^{\mathcal{A}}$ , and we use  $m_k$  to represent the mass function that maps all  $x_i^{\mathcal{A}}$  to 1 if  $x_i^{\mathcal{A}} = X_k^*$  and 0 otherwise, and use  $m_c$  to represent the mass function that maps all  $x_i^{\mathcal{A}}$  to 1.

Based on the conclusion of center-center distance part, we know that  $\{h_i^{(2)} \mid i \in [n]\}$  can derive the distance between  $c^{m_c}$  to all  $c^{m_k}$ ,  $k \in [K]$ , i.e.,  $\{h_i^{(2)} \mid i \in [n]\} \rightarrow \{d_{c^{m_c}, c^{m_k}} \mid k \in [K]\}$ . We can easily check the cardinality of the set  $\{d_{c^{m_c}, c^{m_k}} \mid k \in [K]\}$  to determine whether the geometric centers of all these  $K$  sub point clouds coincide, and according to Proposition B.4, this is equivalent to determining whether  $|\mathcal{A}^{\text{set}}(P)| = 1$ .

Therefore,  $\{h_i^{(2)} \mid i \in [n]\} \rightarrow \mathbb{1}_{|\mathcal{A}^{\text{set}}(P)|=1}$ .  $\square$

Notice that DisGNN can itself calculate  $\mathcal{C}$  and  $\mathcal{D}$  feature, therefore, it can simply take **unlabeled point clouds as input**, and eventually is able to learn distance information related to all centers in set  $\mathcal{D}^{\text{set}}(P)$ . This is concluded in the following corollary:

**Corollary H.5.** *Given an unlabelled point cloud  $P \in \mathbb{R}^{n \times 3}$ . DisGNN can derive the “node-center”, “center-center” and “center count” information defined in Lemma H.4 w.r.t. center sets  $\mathcal{A}^{\text{set}}(P)$  after  $k$  rounds, where  $\mathcal{A}$  and  $k$  can be:*

- $\mathcal{A} = \text{NULL}$ ,  $k = 2$ . In such case,  $\mathcal{A}^{\text{set}}(P)$  contains only the geometric center of  $P$ .
- $\mathcal{A} = \mathcal{C}$ ,  $k = 4$ .
- $\mathcal{A} = \mathcal{D}$ ,  $k$ 's upper bound is  $(n + 2)$  ( $n$  means that we need to first ensure that DisGNN stabilizes).

In the case of where  $\mathcal{A}$  is NULL, the conclusion degenerates to the Barycenter Lemma in Delle Rose et al. (2023); Li et al. (2024).

We now give an essential lemma. In previous work (Pozdnyakov & Ceriotti, 2022; Li et al., 2024), it has been shown that DisGNN is E(3)-incomplete, i.e., there exist pairs of non-isomorphic point clouds that DisGNN cannot distinguish. This essentially means that we cannot prove that DisGNN's output  $s$  can derive the point cloud  $P$  up to permutation and Euclidean isometry. However, in the following lemma and corollary, we will show that, if we restrict the **underlying space  $\mathbb{P}$  to be all point clouds that are not  $\mathcal{A}$ -symmetric** for arbitrary  $\mathcal{A}$  algorithm, we can prove that DisGNN's output can derive the input point cloud up to permutation and Euclidean isometry. This implies that DisGNN is complete on such subsets.

**Lemma H.6.** *Given a point cloud  $P \in \mathbb{R}_{\text{not } \mathcal{A}}^{n \times 3}$  with node features calculated by algorithm  $\mathcal{A}$ ,  $X^{\mathcal{A}}$ , where  $\mathbb{R}_{\text{not } \mathcal{A}}^{n \times 3}$  contains all  $\mathcal{A}$ -unsymmetric point clouds in  $\mathbb{R}^{n \times 3}$ . Then, 4-round DisGNN's output  $s$  can derive  $P$  up to permutation and Euclidean isometry.*

*Proof.* By definition of “derive”, we describe the reconstruction function that takes DisGNN's output  $s$  as input and produces the point cloud  $P$  up to permutation and Euclidean isometry. We initially assume that the point cloud *does not degenerate into 2D*, which is a trivial case and will be discussed at the end of the proof.

Since  $P$  is not  $\mathcal{A}$ -symmetric, *there are at least two centers* in  $\mathcal{A}^{\text{set}}(P)$ . We now take two arbitrary such centers and denote them as  $c_1$  and  $c_2$ . According to Corollary H.5, 2-round DisGNN's node-level features can derive the distance information related to these two centers, namely,  $h_i^{(2)} \rightarrow (d_{i, c_1}, d_{i, c_2}, d_{c_1, c_2})$ . In the following, we show how **DisGNN can reconstruct the whole geometry based on triangular distance encoding**.

By definition of DisGNN and the injectivity assumption, its output  $s$  can derive the multiset  $\{h_i^{(4)} \mid i \in [n]\}$ . And since  $h_i^{(4)} \rightarrow h_i^{(3)} \rightarrow h_i^{(2)} \rightarrow (d_{i, c_1}, d_{i, c_2}, d_{c_1, c_2})$ , we know that from  $h_i^{(4)}$  we can

reconstruct the triangle formed by  $i, c_1, c_2$ . Consequently, it is feasible to determine the following dihedral angle list from  $h_i^{(4)}$ :

$$\begin{aligned} h_i^{(4)} &= \text{HASH}(h_i^{(3)}, \{(h_j^{(3)}, d_{ij}) \mid j \in [n]\}) \\ &\rightarrow \{(h_i^{(3)}, h_j^{(3)}, d_{ij}) \mid j \in [n]\} \\ &\rightarrow \{(h_i^{(2)}, h_j^{(2)}, d_{ij}) \mid j \in [n]\} \\ &\rightarrow \{(d_{ij}, d_{i,c_1}, d_{i,c_2}, d_{j,c_1}, d_{j,c_2}, d_{c_1,c_2}) \mid j \in [n]\} \\ &\rightarrow \{\theta(ic_1c_2, jc_1c_2) \mid j \in [n]\}. \end{aligned}$$

Here,  $\theta(ic_1c_2, jc_1c_2)$  represents the dihedral angle formed by plane  $ic_1c_2$  and plane  $jc_1c_2$ . If  $i$  or  $j$  lies on the line  $c_1c_2$ , or the angle  $\theta$  is 0, we define/overwrite  $\theta$  as  $+\infty$ .

Given this observation, we now conduct a search across the multiset  $\{h_i^{(4)} \mid i \in [n]\}$  to find the node  $x$  which can derive the smallest  $\theta(xc_1c_2, yc_1c_2)$  relative to some other node  $y$  (In case of multiple minimal angles, an arbitrary  $x$  is chosen). Denote the minimal angle as  $\alpha$ , and we record the corresponding  $h_x^{(4)}$ . And note that since  $\theta(xc_1c_2, yc_1c_2)$  is derived from  $(h_x^{(4)}, h_y^{(3)}, d_{xy})$ , the corresponding  $(h_y^{(3)}, d_{xy})$  in the calculation of  $h_x^{(4)}$  can also be recorded. We now aim to prove that the entire geometry can be reconstructed using  $h_x^{(4)}$  and the corresponding  $(h_y^{(3)}, d_{xy})$ .

First of all, having found the node  $y$  in the multiset, we can calculate the exact 3D coordinates of nodes  $x, y, c_1, c_2$  up to *Euclidean isometry* given  $(h_x^{(4)}, h_y^{(3)}, d_{xy})$ . This is because  $(h_x^{(4)}, h_y^{(3)}, d_{xy}) \rightarrow (d_{xy}, d_{x,c_1}, d_{x,c_2}, d_{y,c_1}, d_{y,c_2}, d_{c_1,c_2})$ . At this stage, the coordinates of  $n - 2$  nodes remain undetermined.

We proceed to traverse all nodes in the multiset  $\{(h_j^{(1)}, d_{xj}) \mid j \in [n]\}$  that can be derived from  $h_x^{(4)}$  by definition. For each node  $j$ , with information  $(h_x^{(1)}, h_j^{(1)}, d_{xj})$ , we can derive  $(d_{jx}, d_{j,c_1}, d_{j,c_2})$ . Consequently, we can determine the 3D coordinates of  $j$  to at most two positions, which are symmetrically mirroring w.r.t. the plane  $xc_1c_2$ . Notably,  $j$ 's position is unique if and only if it lies on the plane  $xc_1c_2$  (denoted as  $x$ -plane). We first identify all nodes on the  $x$ -plane, since their calculated positions are unique.

Additionally, from  $h_y^{(3)}$ , we can also derive  $(d_{jy}, d_{j,c_1}, d_{j,c_2})$  for each node  $j$ , allowing us to identify all nodes on the  $y$ -plane.

The coordinates of these nodes are added to the ‘‘known’’ set of nodes  $K$ , while the remaining nodes are labeled as ‘‘unknown.’’

It is established that there are no ‘‘unknown’’ nodes in the interior (as  $\theta_{xc_1c_2, yc_1c_2}$  is minimal) and border (since we have identified these points) of the  $x$ -plane and  $y$ -plane. We denote the interior and border of the two planes as  $P_0$ .

Now, we reflect the  $y$ -plane mirrorly w.r.t. the  $x$ -plane which yields the  $p_{-1}$ -plane. The interior and border formed by  $p_{-1}$ -plane and  $x$ -plane are denoted as  $P_{-1}$ . Since there are no ‘‘unknown’’ nodes in  $P_0$ , the remaining undetermined nodes in  $P_{-1}$  can be determined from  $h_x^{(4)}$ , as their another possible position calculated by  $h_x^{(4)}$  lie in the ‘‘dead area’’  $P_0$ , where it is ensured to be empty (no undetermined nodes left). Similarly, reflecting the  $x$ -plane w.r.t. the  $y$ -plane produces the  $p_1$ -plane, and the corresponding area by  $p_1$ -plane and  $y$ -plane is denoted as  $P_1$ . Nodes in  $P_1$  are determined likewise from  $h_y^{(3)}$ . This process continues by reflecting the  $p_1$ -plane w.r.t. the  $x$ -plane to obtain the  $p_{-2}$ -plane, determining the nodes in  $P_{-2}$ , and so forth, until all  $P$  areas collectively cover the entire 3D space. Consequently, all nodes can be determined, and the geometric structure can be reconstructed.

When the point cloud degenerates into 2D, we can initially derive a node  $i$ 's representation  $h_i^{(4)}$  from the output  $s$  of DisGNN that does not lie on the line  $c_1c_2$ . By leveraging  $h_i^{(4)}$ , we can extract the necessary distance information to compute the coordinates of  $i, c_1$ , and  $c_2$  up to Euclidean isometry. Given that  $h_i^{(4)} \rightarrow \{(h_j^{(3)}, d_{ij}) \mid j \in [n]\}$ , we can derive  $(d_{ij}, d_{jA_1}, d_{jA_2})$  from each  $(h_j^{(3)}, d_{ij})$ . Consequently, the coordinates of node  $j$  can be uniquely determined (2D setting). And therefore, the complete geometry can be reconstructed up to Euclidean isometry.

1944  
 1945  
 1946  
 1947  
 1948  
 1949  
 1950  
 1951  
 1952  
 1953  
 1954  
 1955  
 1956  
 1957  
 1958  
 1959  
 1960  
 1961  
 1962  
 1963  
 1964  
 1965  
 1966  
 1967  
 1968  
 1969  
 1970  
 1971  
 1972  
 1973  
 1974  
 1975  
 1976  
 1977  
 1978  
 1979  
 1980  
 1981  
 1982  
 1983  
 1984  
 1985  
 1986  
 1987  
 1988  
 1989  
 1990  
 1991  
 1992  
 1993  
 1994  
 1995  
 1996  
 1997

□

As an insightful takeaway from Lemma H.6, we notice that the key in reconstruction is the initial **triangular distance encoding** that can be captured by DisGNN. The triangular distance encoding enhances each node  $i$ 's feature with distance information  $(d_{ic_1}, d_{ic_2}, d_{c_1c_2})$ , where  $c_1$  and  $c_2$  are two global *anchors*. In Lemma H.6, the two anchors are from  $\mathcal{A}$  center sets, and DisGNN can capture the corresponding distance encoding according to Lemma H.4. In Section 5.1, we show that we can mark a node as an additional anchor, which can also be captured by DisGNN due to the distinct mark. *Other designs may also be proposed by considering this insightful idea.*

Similarly to Corollary H.5, DisGNN can take **unlabelled point clouds** as input and finally reconstruct them when the unlabelled point clouds are  $\mathcal{C}$ -unsymmetric or  $\mathcal{D}$ -unsymmetric.

**Corollary H.7.** *Given a point cloud  $P \in \mathbb{R}^{n \times 3}$ , assume that  $P$  is  $\mathcal{A}$ -unsymmetric. Then,  $k$ -round DisGNN's output  $s$  can derive  $P$  up to permutation and Euclidean isometry, where  $\mathcal{A}$  and  $k$  can be:*

- $\mathcal{A} = \mathcal{C}$ ,  $k = 6$ .
- $\mathcal{A} = \mathcal{D}$ ,  $k$ 's upper bound is  $(n + 4)$ .

Now, we are ready to prove Theorem 4.2 based on all the above propositions and theorems.

**Theorem 4.2.** *(Unsymmetric point clouds are identifiable) Let  $\mathcal{C}$  denote the center distance encoding and  $\mathcal{D}$  the DisGNN encoding. Then, given an arbitrary point cloud  $P \in \mathbb{R}^{n \times 3}$ ,  $P$  is not  $\mathcal{C}$ -symmetric  $\Rightarrow P$  is not  $\mathcal{D}$ -symmetric  $\Rightarrow P$  can be identified by DisGNN.*

*Proof.* The first  $\Rightarrow$  is proved in Proposition H.3.

It suffices to show that  $P$  is not  $\mathcal{D}$ -symmetric  $\Rightarrow P$  can be identified by DisGNN.

Now, given another  $P' \in \mathbb{R}^{n \times 3}$ , there are two cases:

- $P'$  is not  $\mathcal{D}$ -symmetric. As a direct consequence of Lemma H.6 and Remark H.2, DisGNN can distinguish  $P$  and  $P'$ .
- $P'$  is  $\mathcal{D}$ -symmetric. According to Lemma H.4 and Corollary H.5, DisGNN's output for  $P$  and  $P'$  can derive  $\mathbb{1}_{|\mathcal{D}^{\text{set}}(P)|=1}$  and  $\mathbb{1}_{|\mathcal{D}^{\text{set}}(P')|=1}$  respectively. Since  $P$  is not  $\mathcal{D}$ -symmetric while  $P'$  is, by definition, we know that  $\mathbb{1}_{|\mathcal{D}^{\text{set}}(P)|=1} \neq \mathbb{1}_{|\mathcal{D}^{\text{set}}(P')|=1}$ , and thus DisGNN can distinguish  $P$  and  $P'$ .

□

### H.3 PROOF OF THEOREM 5.1

**Theorem 5.1** *(E(3)-Completeness of GeoNGNN) When the following conditions are met, GeoNGNN is E(3)-complete:*

- $N_{in} \geq 5$  and  $N_{out} \geq 0$  (where 0 indicates that the outer GNN only performs final pooling).
- The distance graph is fully-connected ( $r_{\text{cutoff}} = +\infty$ ).
- All subgraphs are the original graph ( $r_{\text{sub}} = +\infty$ ).

*Proof.* Based on the condition that  $r_{\text{sub}} = \infty$ , all subgraphs are exactly the original distance graph, with the exception that the central node (the subgraph around which is generated) is explicitly marked.

We consider the GeoNGNN with exactly 5 inner layers and 0 outer layers, and since we assume the injectiveness of intermediate functions, more layers will only lead to no-worse expressiveness.

Now consider node  $i$ 's subgraph. We first assume that node  $i$  is distinct to the geometric center  $c$ . We denote node  $j$ 's representation in subgraph  $i$  using  $h_j$  instead of  $h_{ij}$  for brevity when the context is clear. We can now prove the following:

1. After 1 round of DisGNN, for all  $j \in [n]$ ,  $h_j^{(1)} \rightarrow d_{ij}$  (since node  $i$  is explicitly marked in its subgraph).
2. After 2 rounds of DisGNN, according to Lemma H.4, for all  $j \in [n]$ ,  $h_j^{(2)} \rightarrow d_{jc}$ .
3. After 3 rounds of DisGNN, for all  $j \in [n]$ ,  $h_j^{(3)} \rightarrow h_i^{(2)} \rightarrow d_{ic}$ .

At this point, for all nodes  $j$ ,  $h_j^{(3)}$  can derive  $d_{ji}$ ,  $d_{jc}$ , and  $d_{ic}$ , thus completing the *triangular distance encoding* necessary for reconstruction in Lemma H.6. Therefore, similar to the proof of Lemma H.6, with another two more rounds of DisGNN, the output can derive the point cloud up to permutation and Euclidean isometry.

4. At round 5, the output of DisGNN w.r.t. the subgraph of node  $i$ ,  $s_i = f_{\text{output}}(\{\{h_j^{(5)} \mid j \in [n]\}\})$ , can derive the point cloud up to permutation and Euclidean isometry.

There is still a potential problem with the above proof: node  $i$  may coincide with the geometric center. In such case, we can not anymore obtain triangle distance information formed by each node  $j$  and  $i, c$ , which is essential in Lemma H.6 for reconstruction. However, since  $P$  has more than 2 nodes, there is at least one node that satisfies the assumption.

Notice that GeoNGNN injectively pools all the subgraph representations in the outer GNN and obtains the final output  $s = f_{\text{outer}}(\{\{s_i \mid i \in [n]\}\})$ . Each subgraph representation  $s_i$  can derive the distance between node  $i$  and the geometric center  $c$  as following:  $s_i \rightarrow h_i^{(5)} \rightarrow h_i^{(4)} \rightarrow \dots \rightarrow h_i^{(2)} \rightarrow d_{ic}$ , according to Lemma H.4. This can be leveraged as an indicator, telling us whether node  $i$  coincides with the  $c$ . As a consequence, we can derive the point cloud from  $s$  as follows: first, search across all subgraph representations  $s_i$  to find the one that does not coincide with the geometric center, then reconstruct the point cloud based on this subgraph representation according to Lemma H.6. This finishes the proof.

□

#### H.4 PROOF OF THEOREM 5.3

**Theorem 5.3** (*Completeness for general geometric subgraph GNNs*) Under the conditions specified in Theorem 5.1, all general geometric subgraph GNNs in Definition 5.2 with at least one local aggregation are  $E(3)$ -complete.

*Proof.* We establish by demonstrating that all general geometric subgraph GNNs  $\text{GeoA}(\mathcal{A}, \text{Pool}, L, r_{\text{sub}} = +\infty, r_{\text{cutoff}} = +\infty)$ , abbreviated as GeoA hereafter, are capable of implementing (Frasca et al., 2022) GeoNGNN (with  $N_{\text{inner}}$  inner layers,  $r_{\text{sub}} = +\infty, r_{\text{cutoff}} = +\infty$  and without outer GNN) – denoted as complete GeoNGNN – with a fixed number of layers  $L$ . Since complete GeoNGNN is  $E(3)$ -complete when  $N_{\text{inner}} \geq 5$ , GeoA can also achieve  $E(3)$ -completeness when  $L$  is larger than some constant.

Two scenarios are considered: when  $\text{Geoagg}_u^L \in \mathcal{A}$  and when  $\text{Geoagg}_u^L \notin \mathcal{A}$ .

In the scenario where  $\text{Geoagg}_u^L \in \mathcal{A}$ , a single aggregation layer in GeoA can implement a complete GeoNGNN layer by learning an aggregation function  $f^{(l)}$ , defined in Section E, that only maintains  $\text{Geoagg}_{u,v}^P$  and  $\text{Geoagg}_u^L$  while disregarding other aggregation operations.

Notably, complete GeoNGNN utilizes VS pooling, while Pool in GeoA encompasses the options of VS or SV pooling. If Pool is VS, then consequently GeoA with  $L = N_{\text{inner}}$  has the capability to implement complete GeoNGNN.

On the other hand, should Pool be SV, GeoA can deploy an additional aggregation layer in conjunction with SV pooling to implement VS pooling. In the following, we mainly elaborate on this simulation process.

First, it is crucial to note that SV pooling learns the global representation  $h_G$  through the function  $f^{\text{SV}}$  as follows:

$$h_G = f^{\text{SV}}(\{\{h_{uv}^{(L_{\text{sv}})} \mid u \in \mathcal{V}_G\} \mid v \in \mathcal{V}_G\}),$$

and VS pooling learns through  $f^{\text{VS}}$  in the subsequent manner:

$$h_G = f^{\text{VS}}(\{\{h_{uv}^{(L_{\text{vs}})} \mid v \in \mathcal{V}_G\} \mid u \in \mathcal{V}_G\}).$$

With  $L_{\text{SV}} = L_{\text{VS}} + 1$ , the last aggregation layer can be utilized to accumulate all subgraph information to the central node representation, i.e.,  $h^{(L_{\text{sv}})}(u, u) = h^{(L_{\text{vs}}+1)}(u, u) \rightarrow \{\{h_{uv}^{(L_{\text{vs}})} \mid v \in \mathcal{V}_G\}\}$ , given that  $\text{Geoagg}_u^{\text{L}} \in \mathcal{A}$ . Notice that this is feasible since each subgraph is the original graph and is fully connected. Consequently:

$$\begin{aligned} & \{\{h_{uv}^{(L_{\text{sv}})} \mid u \in \mathcal{V}_G\} \mid v \in \mathcal{V}_G\} \\ \rightarrow & \{\{h^{(L_{\text{sv}})}(v, v) \mid v \in \mathcal{V}_G\}\} \\ \rightarrow & \{\{h^{(L_{\text{vs}})}(v, u) \mid u \in \mathcal{V}_G\} \mid v \in \mathcal{V}_G\} \\ = & \{\{h_{uv}^{(L_{\text{vs}})} \mid v \in \mathcal{V}_G\} \mid u \in \mathcal{V}_G\}, \end{aligned}$$

indicating that  $f^{\text{SV}}$  can acquire a function that initially converts  $\{\{h_{uv}^{(L_{\text{sv}})} \mid u \in \mathcal{V}_G\} \mid v \in \mathcal{V}_G\}$  to  $\{\{h_{uv}^{(L_{\text{vs}})} \mid v \in \mathcal{V}_G\} \mid u \in \mathcal{V}_G\}$ , and subsequently emulates  $f^{\text{VS}}$ . Thus, GeoA with  $L = N_{\text{inner}} + 1$  has the capability to implement complete GeoNGNN.

Finally, consider the case where  $\text{Geoagg}_u^{\text{L}} \notin \mathcal{A}$ . And since we assume the existence of at least one local operation, it follows that  $\text{Geoagg}_v^{\text{L}} \in \mathcal{A}$ . By presenting a proposition that essentially underscores symmetry, we can affirm that this case is equivalent to the first case, and therefore the conclusion still holds.

**Proposition H.8.** *Let GeoA be any general geometric subgraph GNN defined in Section E. Denote  $\mathcal{A}^{u \leftrightarrow v}$  as the aggregation scheme obtained from  $\mathcal{A}$  by exchanging the element  $\text{agg}_{uu}^{\text{P}}$  with  $\text{agg}_{vv}^{\text{P}}$ , exchanging  $\text{Geoagg}_u^{\text{L}}$  with  $\text{Geoagg}_v^{\text{L}}$ , and exchanging  $\text{agg}_u^{\text{G}}$  with  $\text{agg}_v^{\text{G}}$ . Then,  $\text{GeoA}(\mathcal{A}, \text{VS}, L, r_{\text{sub}}, r_{\text{cutoff}})$  and  $\text{GeoA}(\mathcal{A}^{u \leftrightarrow v}, \text{SV}, L, r_{\text{sub}}, r_{\text{cutoff}})$  can implement each other.*

*Proof.* Similar to the original proof of Proposition 4.5. in Zhang et al. (2023), the proof is almost trivial by symmetry: All functions within  $\text{GeoA}(\mathcal{A}, \text{VS})$  can inherently learn to ensure that  $h_{uv}^{(l)}$  in  $\text{GeoA}(\mathcal{A}, \text{VS})$  precisely corresponds to  $h^{(l)}(v, u)$  in  $\text{GeoA}(\mathcal{A}^{u \leftrightarrow v}, \text{SV})$  for any arbitrary  $u, v, l$ , with the reverse equivalence also holding. Additionally, given the symmetry of the pooling method, consistency in the output can be guaranteed.  $\square$

As a direct consequence of Proposition H.8, all of the general subgraph GNN with  $\text{Geoagg}_v^{\text{L}}$  can implement another one with  $\text{Geoagg}_u^{\text{L}}$ , and according to the previous proof, they are also E(3)-complete under the conditions specified in Theorem. This ends the proof.  $\square$

## H.5 PROOF OF THEOREM 5.4

**Theorem 5.4** (E(3)-Completeness of DimeNet, SphereNet, GemNet) *When the following conditions are met, DimeNet, SphereNet<sup>9</sup> and GemNet are E(3)-complete.*

- The aggregation layer number is larger than some constant  $C$ , which is irrelevant to the node number.
- They initialize and update all edge representations, i.e.,  $r_{\text{embed}} = +\infty$ .
- They interact with all neighbors, i.e.,  $r_{\text{int}} = +\infty$ .<sup>10</sup>

<sup>9</sup>Here in SphereNet we do not consider the relative azimuthal angle  $\varphi$ , since SphereNet with  $\varphi$  is not E(3)-invariant, while E(3)-completeness is defined on E(3)-invariant models. Note that the exclusion of  $\varphi$  only results in weaker expressiveness.

<sup>10</sup>In DimeNet and GemNet, nodes  $i$  or  $j$  are excluded when aggregating neighbors for edge  $ij$ . The condition requires the inclusion of these end nodes.

The main idea to prove this theorem is to also show that DimeNet, SphereNet and GemNet can implement (Frasca et al., 2022) GeoNGNN, which is E(3)-complete, and thus they are E(3)-complete as well. We elaborate on these models in separate subsections.

### H.5.1 E(3)-COMPLETENESS OF DIME NET

To begin, let us abstract the functions utilized in DimeNet. Fundamentally, DimeNet employs edge representations, iteratively updating these representations based on the neighbors of edges within a specified neighbor cutoff. During aggregation, DimeNet incorporates angle information formed by the center edge and its neighbor edges. Finally, all these edge representations are aggregated to produce a graph-level output.

We formally state these procedures:

**Initialization (DimeNet)** In DimeNet, the initial representation  $h_{ij}$  of the edge  $ij$  is initialized based on the tuple  $(x_i, x_j, d_{ij})$ , where  $x_i$  and  $x_j$  are the features of nodes  $i$  and  $j$ , and  $d_{ij}$  is the distance between these nodes:

$$h_{ij} = f_{\text{init}}^{\text{DimeNet}}(x_i, x_j, d_{ij}) \quad (14)$$

**Message Passing (DimeNet)** The message passing in DimeNet updates the edge representation  $h_{ij}$  based on the features of neighboring edges and their respective geometric information. It aggregates information from all neighbors  $k$  of node  $i$ :

$$h_{ij} = f_{\text{update}}^{\text{DimeNet}}(h_{ij}, \{\{\theta_{kij}, h_{ki}, d_{ij} \mid k \in \mathcal{N}(i)\}\})$$

Note that  $h_{ij}$  is initialized by fusing  $d_{ij}$  and atomic information, therefore we have:  $h_{ij} \rightarrow d_{ij}$ . And clearly  $d_{ij}, d_{ik}, d_{kj} \rightarrow \theta_{kij}$ . Therefore, the above function is expressively equivalent to:

$$h_{ij} = f_{\text{update}}^{\text{DimeNet}}(h_{ij}, \{\{d_{kj}, h_{ki} \mid k \in \mathcal{N}(i)\}\})$$

When the interaction cutoff of DimeNet is infinite,  $\mathcal{N}(i) = [n]$ , giving the final update function:

$$h_{ij} = f_{\text{update}}^{\text{DimeNet}}(h_{ij}, \{\{h_{ki}, d_{kj} \mid k \in [n]\}\}) \quad (15)$$

**Output Pooling (DimeNet)** Finally, DimeNet pools over all node pairs to obtain the final representation  $t$ :

$$t = f_{\text{output}}^{\text{DimeNet}}(\{\{\{h_{ij} \mid i \in [n]\} \mid j \in [n]\}\}) \quad (16)$$

GeoNGNN, as a subtype of subgraph GNN, initializes and updates the node  $j$ 's representation in node  $i$ 's subgraph based on its atomic number and its distance to node  $i$ . Representing the node  $j$ 's representation in node  $i$ 's subgraph as  $h_{ij}$ , then we can samely abstract its function forms.

**Initialization (GeoNGNN)** GeoNGNN initializes  $h_{ij}$  based on node  $j$ 's initial node feature and distance encoding w.r.t.  $i$ :

$$h_{ij} = f_{\text{init}}^{\text{GeoNGNN}}(x_j, d_{ij}) \quad (17)$$

**Message Passing (GeoNGNN)** GeoNGNN's inner GNN iteratively updates  $h_{ij}$  based on the following procedure:

$$h_{ij} = f_{\text{update}}^{\text{GeoNGNN}}(h_{ij}, \{\{h_{ik}, d_{kj} \mid k \in [n]\}\}) \quad (18)$$

Note that  $k$  iterates all nodes, because according to Theorem 5.1, the complete version GeoNGNN has infinite subgraph size and message passing cutoff.

**Output Pooling (GeoNGNN)** In the absence of an outer GNN, GeoNGNN produces the scalar output by respectively aggregating all in-subgraph nodes' representations as the subgraph representation, and then aggregating all subgraphs' representations:

$$t = f_{\text{output}}^{\text{GeoNGNN}}(\{\{\{h_{ij} \mid j \in [n]\} \mid i \in [n]\}\}) \quad (19)$$



**Implementing GeoNGNN with DimeNet** Now we show how to use DimeNet to implement GeoNGNN. Since GeoNGNN is E(3)-complete, it can be observed that if DimeNet can successfully implement GeoNGNN, then DimeNet is also E(3)-complete.

Let us start by examining the initialization step. Note that  $f_{\text{init}}^{\text{DimeNet}}$  (Eq. 14) takes more information than  $f_{\text{init}}^{\text{GeoNGNN}}$  (Eq. 17) as input. Therefore, by learning a function  $f_{\text{init}}^{\text{DimeNet}}$  that simply disregards the  $x_i$  term,  $f_{\text{init}}^{\text{DimeNet}}$  can achieve the same function form as  $f_{\text{init}}^{\text{GeoNGNN}}$ .

Next, we move on to the update (message passing) step. The only difference between  $f_{\text{update}}^{\text{DimeNet}}$  (Eq. 15) and  $f_{\text{update}}^{\text{GeoNGNN}}$  (Eq. 18) lies in their input arrangements. Specifically,  $f_{\text{update}}^{\text{DimeNet}}$  takes  $h_{ki}, k \in [n]$  as part of input, while  $f_{\text{update}}^{\text{GeoNGNN}}$  takes  $h_{ik}, k \in [n]$  as the corresponding part of input. This index swap can be mathematically aligned: We can stack two DimeNet update layers to implement one GeoNGNN update layer. The first DimeNet layer, starting from  $h_{ij}^{(l)}$ , calculates  $h_{ij}^{(l+\frac{1}{2})}$  to store the information of  $h_{ji}^{(l)}$ , i.e.,  $h_{ij}^{(l+\frac{1}{2})} \rightarrow h_{ji}^{(l)}$ . This is feasible due to the property that in Eq.15,  $(d_{jj}, h_{ji})$  can be selected uniquely from the multiset by  $f_{\text{update}}^{\text{DimeNet}}$ , as  $d_{kj} = 0$  if and only if  $k = j$ . Subsequently, the second DimeNet layer swaps the indices within the multiset, transforming  $(h_{ij}^{(l+\frac{1}{2})}, \{(d_{kj}, h_{ki}^{(l+\frac{1}{2})}) \mid k \in [n]\})$  into  $(h_{ij}^{(l)}, \{(d_{kj}, h_{ik}^{(l)}) \mid k \in [n]\})$ . At this stage, the function form aligns with that of  $f_{\text{update}}^{\text{GeoNGNN}}$  (Eq.18).

Finally, we consider the output step. Similarly, the only distinction between  $f_{\text{output}}^{\text{DimeNet}}$  (Eq.16) and  $f_{\text{update}}^{\text{GeoNGNN}}$  (Eq.19) lies in the swapping of input indices. By stacking one DimeNet update layer and one DimeNet output layer, we can similarly implement the GeoNGNN output layer, as discussed in the prior paragraph.

In conclusion, we have shown that DimeNet’s layers can be utilized to implement GeoNGNN’s layers. By doing so, we establish that DimeNet is also E(3)-complete with a constant number of layers.

### H.5.2 E(3)-COMPLETENESS OF SPHERENET

We aim to demonstrate the E(3)-completeness of SphereNet by illustrating that SphereNet can implement DimeNet, which has already been established as E(3)-complete in the preceding subsection. We begin by abstracting the layers of SphereNet.

**Initialization (SphereNet)** Similar to DimeNet, SphereNet also initializes edge representations by integrating atom properties and distance information:

$$h_{ij} = f_{\text{init}}^{\text{SphereNet}}(x_i, x_j, d_{ij}) \quad (20)$$

**Message Passing (SphereNet)** During message passing, SphereNet aggregates neighbor edge information into the center edge, while additionally considering end nodes’ embeddings and spherical coordinates. Since we consider SphereNet\*, which drops the relative azimuthal angle  $\varphi_k$  of end node  $k$ , the function form is highly similar to that of DimeNet:

$$h_{ij} = f_{\text{update}}^{\text{SphereNet}}(h_{ij}, v_i, v_j, \{(h_{ki}, d_{ki}, \theta_{kij}) \mid k \in [n]\})$$

Note that the original SphereNet can only be more powerful than SphereNet\*.

Since  $h_{ij} \rightarrow d_{ij}, (d_{ij}, d_{ki}, \theta_{kij}) \rightarrow d_{kj}$ , the above function is equivalently expressive as

$$h_{ij} = f_{\text{update}}^{\text{SphereNet}}(h_{ij}, v_i, v_j, \{(h_{ki}, d_{kj}) \mid k \in [n]\}) \quad (21)$$

**Output (SphereNet)** The output block of SphereNet first aggregates edge representations into node representations as follows:

$$v_j = f_{\text{node}}^{\text{SphereNet}}(\{h_{ij} \mid i \in [n]\})$$

Then, in order to calculate graph/global embedding, it further aggregates node representations as follows:

$$t = f_{\text{graph}}^{\text{SphereNet}}(\{v_j \mid j \in [n]\})$$

Therefore, the overall output function can be abstracted as:

$$t = f_{\text{output}}^{\text{SphereNet}}(\{\{h_{ij} \mid i \in [n]\} \mid j \in [n]\}) \quad (22)$$

2214 **Implementing DimeNet with SphereNet** Now we show how to use SphereNet to implement  
 2215 DimeNet.

2216 At the initialization step,  $f_{\text{init}}^{\text{SphereNet}}$  (Eq. 20) and  $f_{\text{init}}^{\text{DimeNet}}$  (Eq. 14) exhibit exactly the same function  
 2217 form.

2218 At the update step,  $f_{\text{update}}^{\text{SphereNet}}$  (Eq. 21) takes strictly more information, i.e., the node representa-  
 2219 tions, than  $f_{\text{update}}^{\text{DimeNet}}$  (Eq. 15). Therefore, by learning a function  $f_{\text{update}}^{\text{SphereNet}}$  that simply ignores node  
 2220 representations  $v_i, v_j$ ,  $f_{\text{update}}^{\text{SphereNet}}$  and  $f_{\text{update}}^{\text{DimeNet}}$  can share the same function form.  
 2221

2222 At the output step,  $f_{\text{output}}^{\text{SphereNet}}$  (Eq. 22) and  $f_{\text{output}}^{\text{DimeNet}}$  (Eq. 16) share exactly the same function form.  
 2223

2224 In conclusion, we have shown that SphereNet’s layers can be utilized to implement DimeNet’s layers.  
 2225 By doing so, we establish that SphereNet is also E(3)-complete with a constant number of layers.  
 2226

### 2227 H.5.3 E(3)-COMPLETENESS OF GEMNET

2228 GemNet(-Q) and DimeNet share the same initialization and output block. The difference between  
 2229 them lies in the update block. Specifically, GemNet adopts a three-hop message passing to incorporate  
 2230 higher-order geometric information, dihedral angle. The update function can be abstracted as:  
 2231

$$2232 \quad h_{ij} = f_{\text{update}}^{\text{GemNet}}(h_{ij}, \{(h_{ab}, d_{ij}, d_{bj}, d_{ab}, \theta_{ijb}, \theta_{jba}, \theta_{ijba}) \mid b \in [n], a \in [n]\})$$

2233 Here,  $\theta_{ijba}$  that has 4 subscripts represents the dihedral angle of plane  $ijb$  and  $jba$ . By learning a  
 2234 function that simply selects all  $b = i$  from the multiset and ignores some terms (Note that this is  
 2235 feasible, since  $(h_{ab}, d_{ij}, \theta_{ijb}, \theta_{ijba}, d_{bj}, \theta_{jba}, d_{ab}) \rightarrow (d_{ij}, \theta_{ijb}, d_{bj}) \rightarrow d_{bi}$ , while only  $b = i$  results  
 2236 in  $d_{bi} = 0$ ),  $f_{\text{update}}^{\text{GemNet}}$  can be simplified as follows:  
 2237

$$2238 \quad h_{ij} = f_{\text{update}}^{\text{GemNet}}(h_{ij}, \{(\theta_{aij}, h_{ai}, d_{ij}) \mid a \in [n]\}) \quad (23)$$

2239 Now, the simplified  $f_{\text{update}}^{\text{GemNet}}$  has the same form as  $f_{\text{update}}^{\text{DimeNet}}$  (Eq. 15), indicating that GemNet can  
 2240 implement DimeNet, and therefore is also E(3)-complete.  
 2241  
 2242  
 2243  
 2244  
 2245  
 2246  
 2247  
 2248  
 2249  
 2250  
 2251  
 2252  
 2253  
 2254  
 2255  
 2256  
 2257  
 2258  
 2259  
 2260  
 2261  
 2262  
 2263  
 2264  
 2265  
 2266  
 2267