

Context-faithful Prompting for Large Language Models

Wenxuan Zhou¹, Sheng Zhang², Hoifung Poon², Muhao Chen¹

¹University of Southern California ²Microsoft Research

¹{zhouwenx,muhaoche}@usc.edu ²{zhang.sheng,hoifung}@microsoft.com

Abstract

Large language models (LLMs) encode parametric knowledge about world facts and have shown remarkable performance in knowledge-driven NLP tasks. However, their reliance on parametric knowledge may cause them to overlook contextual cues, leading to incorrect predictions in context-sensitive NLP tasks (e.g., knowledge acquisition tasks). In this paper, we seek to assess and enhance LLMs’ contextual faithfulness in two aspects: knowledge conflict and prediction with abstention. We demonstrate that LLMs’ faithfulness can be significantly improved using carefully designed prompting strategies. In particular, we identify opinion-based prompts and counterfactual demonstrations as the most effective methods. Opinion-based prompts reframe the context as a narrator’s statement and inquire about the narrator’s opinions, while counterfactual demonstrations use instances containing false facts to improve faithfulness in knowledge conflict situations. Neither technique requires additional training. We conduct experiments on three datasets of two standard NLP tasks, machine reading comprehension and relation extraction, and the results demonstrate significant improvement in faithfulness to contexts.¹

1 Introduction

Large language models (LLMs; Brown et al. 2020; Wei et al. 2022; Chowdhery et al. 2022; Chung et al. 2022) have made remarkable advances in solving various NLP problems, particularly in (context-free) knowledge-driven tasks such as question answering (Joshi et al., 2017; Kwiatkowski et al., 2019) and commonsense reasoning (Clark et al., 2018; Mihaylov et al., 2018). Without external context, LLMs can answer factual questions and achieve comparable results to supervised approaches (Brown et al., 2020; Wei et al., 2022), in-

¹Code and data are released at <https://github.com/wzhouad/context-faithful-llm>.

Knowledge Conflict

Context: *Elon Musk is a business magnate and investor. He is the owner and CEO of Twitter.*

Question: Who is the CEO of Twitter?

Answer: *Elon Musk*

GPT-3.5: *Jack Dorsey*

Prediction with Abstention

Context: *Bill Gates was born in Seattle, Washington.*

Question: Is Bill Gates the founder of Microsoft?

Answer: *I don’t know*

GPT-3.5: *yes*

Figure 1: Examples of knowledge conflict and prediction with abstention. LLMs may ignore the provided context and make unfaithful predictions based on their parametric knowledge before Q4 2021.

dicating that LLMs encode *parametric knowledge* about open-world facts.

Although parametric knowledge can be beneficial for knowledge-driven tasks, overly relying on it can cause problems in context-specific NLP tasks. First, LLMs may encode misconceptions (Lin et al., 2022) or obsolete facts (Lazaridou et al., 2021; Liska et al., 2022; Kasai et al., 2022), in which case we expect LLMs to update their predictions when provided with relevant context. Second, when using LLMs for knowledge acquisition tasks such as machine reading comprehension (MRC; Clark et al. 2019; Rajpurkar et al. 2016) and information extraction (IE; Sang and De Meulder 2003; Zhang et al. 2017; Zhou and Chen 2022; Lu et al. 2022), LLMs should always extract the *knowledge in context* instead of relying solely on their parametric knowledge. In such context-specific application scenarios, we expect LLMs to make decisions faithful to the context and avoid simply parroting answers from pretraining. However, studies have discovered that LLMs can overlook or ignore context (Kasai et al., 2022; Li et al., 2022; Si et al.,

2023), posing a significant challenge for their application in these scenarios.

In this paper, we aim to investigate techniques for improving the faithfulness of LLMs in context-specific NLP tasks. Conceptually, faithfulness is not simply about how much accuracy the model can offer. Instead, it should concern the validity and reliability of its extraction process. Specifically, when there is decision-related information (e.g., a concept or a relation) to extract, a faithful LLM should *genuinely* induce what is described in the context but not give *trivial guesses* based on parametric knowledge or statistical biases. Besides, when no known decision-related information is described in the context, the model should *selectively* abstain from predicting. Accordingly, to provide a realistic assessment of LLMs in terms of faithfulness, we narrow our focus to two sub-problems, namely entity-based knowledge conflict (Longpre et al., 2021; Wang et al., 2022) and prediction with abstention (Rajpurkar et al., 2018), examples of which are shown in Fig. 1. In cases of knowledge conflict, where the given context contains facts different from the pretraining data, LLMs need to return the facts locally described in the context instead of the globally memorized ones. For example, in Fig. 1, text-davinci-003 identifies *Jack Dorsey* instead of *Elon Musk* as the CEO of Twitter, based on its pretrained data before Q4 2021. In cases of prediction with abstention, where the context does not provide information to answer the questions, LLMs should abstain from making predictions and notify the users, rather than answering the questions that become a trivial guess. For example, in Fig. 1, when asked about the founder of Microsoft based on an irrelevant context, LLMs should admit that, from here, they cannot infer the answer.

We present various prompting strategies to improve the faithfulness of LLMs, including designing effective prompts and choosing appropriate in-context demonstrations. We find that constraining the scope of questions to the context by adding phrases (e.g., based on the given context) or natural language instructions improve faithfulness in both facets. Particularly, we find that reformulating the context and questions to opinion-based question-answering problems (Gupta et al., 2019; Bjerva et al., 2020), where the context is expressed in terms of a narrator’s statement, and the question asks about this narrator’s opinion, delivers the most gains. Additionally, we find that adding counter-

factual demonstrations to prompts improves faithfulness in the aspect of knowledge conflict, while using the original (factual) demonstrations leads to limited or negative effects. Finally, combining both techniques delivers the largest gain than using each one independently.

We evaluate our methods based on three datasets, including Re-TACRED (Stoica et al., 2021) for relation extraction, and natural questions (Kwiatkowski et al., 2019) and RealTime QA (Kasai et al., 2022) for MRC. We find that the proposed strategies can largely improve faithfulness, e.g., reducing the memorization ratio² of text-davinci-003 from 35.2% to 3.0% on natural questions. Additionally, we evaluate our methods across LLMs of different scales, finding that larger LLMs are more likely to update memorized answers than smaller ones, both with and without the application of our methods.

2 Related Work

We discuss two topics of related work that are closely relevant to this work.

Knowledge conflicts. LLMs (Brown et al., 2020; Wei et al., 2022; Chowdhery et al., 2022) have shown promising results in closed-book QA tasks, indicating their ability to memorize facts about the world. However, as the world is constantly evolving, memorized facts may become outdated (Lazaridou et al., 2021; Liska et al., 2022; Kasai et al., 2022), emphasizing the need to update LLMs’ predictions with new facts. To address this challenge, some studies (Zhu et al., 2020; De Cao et al., 2021; Mitchell et al., 2022; Meng et al., 2022, 2023) have explored ways to identify and edit the facts stored in model parameters. However, it remains unclear whether memory editing methods allow sufficient capacity to encompass all new factual knowledge. Another promising direction is to augment LLM prompting with external context containing relevant knowledge (Lazaridou et al., 2022; Izacard et al., 2022; Khattab et al., 2022). Coupled with retrieval systems (Karpukhin et al., 2020; Santhanam et al., 2022; Gao and Callan, 2022), such methods have the potential to update LLMs with large amounts of new facts. However, such methods face the challenge that LLMs may persist with the memorized facts and ignore the provided context (Longpre et al., 2021). To tackle this challenge, recent works (Neeman et al., 2022; Li et al., 2022) fine-

²The percentage of times that LLMs return memorized answers versus answers in the context (Longpre et al., 2021).

tune LLMs on counterfactual contexts, where the original facts are replaced with counterfactual ones. They find that such finetuning processes can effectively improve the LLMs’ utilization of contexts. In this study, we propose a novel approach using prompting to improve context faithfulness in LLMs without additional finetuning, which offers a more general and cost-effective method for LLMs.

Prediction with abstention. Selective prediction with abstention (Chow, 1970; Fumera and Roli, 2002; Cortes et al., 2016) is an important problem in trustworthy AI. When models are uncertain about their predictions, it is critical that they should admit the uncertainty instead of returning incorrect predictions. Selective prediction may be adopted in different scenarios, such as when instances are close to the decision boundary (Gal and Ghahramani, 2016; Lakshminarayanan et al., 2017; Xin et al., 2021), or when instances are from different domains to training (Hendrycks and Gimpel, 2017; Hendrycks et al., 2020; Zhou et al., 2021). In the scope of context-specific NLP, abstention is preferred when the context is irrelevant to the question. For example, SQuAD 2.0 (Rajpurkar et al., 2018) introduces unanswerable questions to extractive MRC, while Yatskar (2019) finds it focused on questions of extreme confusion and thus is less relevant to the focus of our study. CoQA (Reddy et al., 2019) and QuAC (Choi et al., 2018) introduce unanswerable questions to conversational question answering. RealTime QA (Kasai et al., 2022) finds that GPT-3 still generates outdated answers when provided with irrelevant documents. To address the problem, Neeman et al. (2022) propose the answerability augmentation where LLMs should predict *Unanswerable* when presented with an empty or randomly sampled document. Several other work employ variants of confidence calibration techniques to encourage the NLP model to avoid giving a high confidence on any decisions when encountering a case to abstain (Wang et al., 2023, 2022), which however request white-box accessibility of the incorporated models. We tackle this problem with a part of our prompting method, which we find to significantly enhance the LLMs’ ability to make selective predictions without need re-calibration or white-box accessibility of the model.

3 Method

We focus on context-specific NLP tasks. The input of these tasks is formulated as (c, q) for free-form

generation tasks, where c is the context and q is the question, or (c, q, o) for tasks with close decision spaces (e.g., multi-choice tasks), where o is the set of decisions/choices. The desired output can be either a free-form text or a choice. We solve these tasks by prompting LLMs and study ways of designing prompting templates and demonstrations that are dedicated to improving the faithfulness of LLMs. Specifically, we find two proposed methods, opinion-based prompts and counterfactual demonstrations, to be the most effective ones. Our methods only change the prompts without finetuning the LLMs (Longpre et al., 2021; Li et al., 2022; Neeman et al., 2022), targeting a more general and affordable solution.

3.1 Opinion-based Prompting

Given an input (c, q, o) , we begin with the following *base* prompting template:³

Base prompt

$\{c\}$ Q: $\{q\}$? Options: $\{o\}$ A:

Here, $\{.\}$ serves as a placeholder to be filled with specific content during prompting. We investigate two types of prompting templates for context-specific NLP, namely *opinion-based* prompts and *instructed* prompts. Opinion-based prompts transform original questions into opinion-seeking questions, which naturally demand more attention to the context. Instructed prompts, on the other hand, explicitly instruct LLMs to read the context by natural language. Details of these templates are discussed in the remaining section.

Opinion-based prompts. We propose to transform the context to a narrator’s statement and the question to enquire about the narrator’s opinion in this statement. This approach is motivated by our own cognitive process for answering different types of questions. When answering questions that seek factual information, we can often rely on our own memory and answer without needing to refer to the context, as these questions typically have only one correct answer. However, when questions are seeking opinions from someone else (in this context, the narrator), it is important to comprehend the narrator’s words before answering the questions, as opinions may vary from person to person. Besides, as opinions are inherently subjective,

³Options only apply to multiple-choice tasks and are removed in free-form text generation tasks.

tive and can be influenced by many factors such as personal experiences and beliefs, opinion-seeking questions are sometimes difficult to answer solely based on the narrator’s statement compared to a fact-seeking question that typically has definite and verifiable answer(s). As a result, transforming factual questions into opinion-seeking questions can lead to more attention to the context, as memorized answers alone may not suffice. It also helps the model more selectively predict under cases where contexts do not describe answers. Both factors lead to improved faithfulness with LLMs. The *opinion*-based prompting template is as follows:

Opinion-based prompt

Bob said, “{c}” Q: {q} in Bob’s opinion? Options: {o} A:

Throughout our experiments, we consistently use Bob to represent the narrator for the context, although other names could be utilized as well.

Instructed prompts. We also explicitly instruct LLMs to read context by natural language. We start by extending questions in prompts with attributive phrases such as “based on the given text”, leading to the following *attributed* prompting template:

Attributed prompt

{c} Q: {q} based on the given text? Options: {o} A:

We also augment the prompts with natural language instructions. Since manually writing instructions can be laborious and often fails to account for the compatibility between instructions and LLMs, we leverage automatic prompt engineering (APE; Zhou et al. 2022) to generate the prompts. Using a few instances and their desired outputs as demonstrations, APE uses LLMs to automatically generate candidate instructions and select the best one based on the results on a dev set (see Appx. §A for generated instructions). We then use the following *instruction*-based prompting template:

Instruction-based prompt

Instruction: {Instruction} {c} Q: {q}? Options: {o} A:

Experiments show that all prompting templates perform better than the base prompting template. Specifically, opinion-based prompts outperform instructed prompts in both knowledge conflict and

prediction with abstention facets, and combining these two prompting methods results in the most significant improvements.

3.2 Counterfactual Demonstration

Using demonstrations is a standard way to perform few-shot inference on LLMs (Brown et al., 2020). To enhance the faithfulness of language models in knowledge conflict scenarios, previous studies (Li et al., 2022; Neeman et al., 2022) propose to fine-tune the models using counterfactual instances, where the facts in the context are substituted with false ones, and the model learns to update its predictions accordingly. Following this strategy, we propose to use counterfactual instances as demonstrations for LLMs. To do so, we start with a labeled set of counterfactual instances and a test instance and then use KATE (Liu et al., 2022) to retrieve the most relevant counterfactual instances as demonstrations. We encode both the test instance and counterfactual instances with RoBERTa_{nli+sts-b} (Liu et al., 2019; Reimers and Gurevych, 2019) and select the top counterfactual instances based on cosine similarity. As a part of our analysis, we also experimented with using the original (factual) instances as demonstrations but found this approach to underperform counterfactual demonstrations and sometimes even zero-shot inference.

4 Experiments

This section presents our experimental setups (§4.1) for the evaluation of the proposed methods concerning two aspects of faithfulness: knowledge conflict (§4.2) and prediction with abstention (§4.3). We provide additional analysis (§4.4) on results across different model sizes and results on the original datasets. We also show examples of prompts and LLMs’ outputs in the case study (§4.5).

4.1 Experimental Setup

Our experiments are conducted using the InstructGPT model (text-davinci-003, 175B parameters) and LLama-2-7B-chat (Touvron et al., 2023). We use the base prompt as our baseline, and compare it against the proposed prompting templates described in §3.1, including attributed prompt (ATTR), instruction-based prompt (INSTR), opinion-based prompt (OPIN), and the combination of opinion-based prompt and instruction-based prompt (OPIN + INSTR). We evaluate the effectiveness of these templates in both zero-shot and

GPT-3.5		MRC				RE			
		$p_s \uparrow$	$p_o \downarrow$	$M_R \downarrow$	EM \uparrow	$p_s \uparrow$	$p_o \downarrow$	$M_R \downarrow$	$F_1 \uparrow$
Zero-shot	Base	59.0	32.1	35.2	6.2	73.9	21.5	22.5	81.0
	Attr	71.9	14.4	16.6	29.6	72.4	23.6	24.6	80.0
	Instr	74.2	16.0	17.7	27.1	75.8	15.6	17.1	81.6
	Opin	79.4	9.8	11.0	24.9	76.0	19.6	20.5	82.9
	Opin + Instr	79.1	7.9	9.1	48.6	79.4	15.0	15.9	84.7
Original	Base	43.3	49.4	53.3	35.1	76.2	19.8	20.6	83.3
	Attr	54.1	37.7	41.0	45.5	76.5	19.7	20.5	83.7
	Instr	54.6	37.7	40.8	45.8	77.3	18.4	19.2	84.2
	Opin	60.6	28.7	32.1	51.1	76.8	18.4	19.3	83.8
	Opin + Instr	64.7	26.8	29.3	53.8	78.2	17.1	17.9	84.9
Counter	Base	86.9	6.5	7.0	80.2	78.7	13.7	14.8	83.9
	Attr	89.1	4.6	4.9	83.0	79.7	13.0	14.0	84.3
	Instr	86.2	6.3	6.8	80.1	78.0	12.8	14.1	82.9
	Opin	90.1	3.7	3.9	84.3	79.7	12.8	13.8	84.4
	Opin + Instr	90.9	2.8	3.0	85.2	80.0	10.5	11.6	85.1

Table 1: Results (in %) on GPT-3.5-175B in the knowledge conflict setting. The overall best results are highlighted in **bold**. The best and the second best results in each setting are highlighted in green and orange, respectively.

LLama-2		MRC				RE			
		$p_s \uparrow$	$p_o \downarrow$	$M_R \downarrow$	EM \uparrow	$p_s \uparrow$	$p_o \downarrow$	$M_R \downarrow$	$F_1 \uparrow$
Zero-shot	Base	50.8	40.9	44.6	3.5	15.3	67.6	81.6	12.8
	Attr	66.2	23.8	26.4	4.7	13.2	66.5	83.5	10.9
	Instr	77.7	19.7	20.2	27.0	19.6	9.2	75.1	13.2
	Opin	74.6	14.6	16.4	9.4	20.7	63.4	75.4	14.4
	Opin + Instr	77.8	13.9	15.1	13.7	21.6	57.9	72.8	11.8
Original	Base	56.7	39.7	41.1	19.4	27.6	62.3	69.4	9.4
	Attr	61.7	34.5	35.9	25.2	29.4	58.9	66.7	11.2
	Instr	59.4	35.7	37.5	25.5	34.6	53.6	60.8	13.2
	Opin	67.1	32.1	32.4	18.5	32.2	57.1	63.9	10.9
	Opin + Instr	70.6	26.8	27.5	27.6	35.7	51.3	59.0	11.5
Counter	Base	84.4	7.8	8.4	39.2	76.3	14.8	16.2	38.9
	Attr	85.9	7.0	7.6	44.1	76.5	14.2	15.7	39.5
	Instr	85.5	6.7	7.3	47.1	76.0	14.4	15.9	37.3
	Opin	86.7	6.2	6.7	38.1	76.3	13.8	15.4	41.7
	Opin + Instr	88.1	4.9	5.2	49.6	77.3	14.2	15.5	36.9

Table 2: Results (in %) on LLama-2-7B-chat in the knowledge conflict setting. The overall best results are highlighted in **bold**. The best and the second best results in each setting are highlighted in green and orange, respectively.

few-shot settings (with demonstrations).

4.2 Knowledge Conflict

Datasets. We evaluate in the knowledge conflict setting using counterfactual datasets that contain incorrect facts, which can conflict with what the LLM has memorized. We use two datasets based on real-world texts: natural questions (Kwiatkowski et al., 2019) for MRC and Re-TACRED (Stoica et al., 2021) for relation extraction (RE). To create counterfactuals, we adopt the framework proposed by Longpre et al. (2021), which modifies the context to support a counterfactual answer. Specifically, for MRC, we follow Longpre et al. (2021)

and replace the gold entity answer in the context with a randomly sampled entity of the same entity type from the corpus. For RE, we first randomly sample a context that has the entity mentions of the same type but different relations from the original one, and then insert the original entities into the sampled context. In this scenario, a faithful LLM should update its prediction to the new answer instead of returning the original one. Moreover, to measure LLMs’ ability to update answers, we need to ensure that they have memorized the knowledge of the original answers in the first place. Therefore, we only evaluate LLMs on a subset of instances on which these models can correctly predict the

original answers without additional contexts.

Task setup. We use the same set of evaluation metrics as Longpre et al. (2021). Specifically, we measure the frequency that the LLMs’ predictions *contain* an exact match of the original answers (p_o) and the substituted answers (p_s), after both predictions and answers have been normalized by removing stop words and punctuation. To assess the model’s reluctance to update its prediction, we use the memorization ratio (M_R), which is calculated as $M_R = \frac{p_o}{p_o+p_s}$. A completely faithful LLM should have an M_R of 0. We also report task-specific metrics, including exact match (EM) for MRC and F_1 for RE. For EM, we also use normalized predictions and answers, but the requirement is that the prediction and answer must be exactly the same, rather than just containing the answer. We conduct experiments in three different settings: zero-shot, demonstration using original instances, and demonstration using counterfactual instances. We retrieve demonstrations from the original/counterfactual training set, and evaluate LLMs on the counterfactual test set. In the few-shot setting, we utilize a maximum of 16 demonstration instances, up to the limit of the LLM’s context window.

Results and discussion. The results in Tab. 1 and Tab. 2 demonstrate that the combination of OPIN + INSTR prompting and counterfactual demonstrations is generally the most effective. Compared to the zero-shot base prompts, there is a reduction of 32.2% in M_R for MRC and a 10.9% reduction for RE on GPT-3.5. Similarly, on LLaMA-2-7B-chat, there is a 39.4% reduction in M_R for MRC and a 57.3% reduction for RE. We also find that opinion-based prompts generally perform better than other templates, achieving the second-best results on 17 out of 24 metrics on GPT-3.5, and 9 out of 24 metrics on LLaMA-2, indicating that LLMs are more faithful to the context when answering opinion-seeking questions. Combining opinion-based prompts and instruction-based prompts further improves faithfulness, with the best results obtained in 23 out of 24 metrics on GPT-3.5, and 19 out of 24 metrics on LLaMA-2.

When it comes to few-shot settings, counterfactual demonstrations lead to further improved performance. Using the original (factual) instances as demonstrations, on the other hand, leads to limited effects or may even impair faithfulness in MRC. This finding suggests that demonstrations do not

always improve the generalization of LLMs’ inference, especially when they contain dataset bias. In the MRC experiments, the natural questions dataset used is constructed based on Wikipedia, which mainly consists of world facts. This potentially allows for a simplicity bias of LLMs where questions can be answered without contexts. Therefore, our study suggests the importance of using counterfactual demonstrations in knowledge conflict scenarios.

4.3 Prediction with Abstention

Datasets. As for the second aspect of faithfulness, we evaluate LLMs’ ability to selectively abstain from making uncertain predictions based on irrelevant context. Since existing datasets such as SQuAD 2.0 (Rajpurkar et al., 2018) generally contain questions with confusion (Yatskar, 2019) and are less related to our problem setting, we curate our own evaluation data based on RealTime QA (Kasai et al., 2022), a dataset that inquires about novel information from June 2022 onwards. In this formulation, LLMs are presented with a question and multiple choices, and they need to choose the correct answer based on several retrieved documents. These documents were obtained using tools like Google custom search and may not contain the answer to the question. To adapt this dataset to our setting, we added a new “I don’t know” choice and relabeled the dataset. Instances where the retrieved documents do not answer the question are relabeled to “I don’t know”. We used questions in the first six weeks of 2022 as the test set and randomly picked three questions of 2023 as demonstration instances. This process results in a total of 113 test instances, including 63 answerable questions and 50 unanswerable ones.

Task setup. We calculate the probability of a choice as $P(\text{choice}|\text{prompt})$ followed by normalization across all choices.⁴ We report accuracy on the entire dataset (All), accuracy on the subset of questions that can be answered based on retrieved documents (HasAns), and accuracy on questions that cannot be answered based on retrieved documents (NoAns). The latter two metrics measure LLMs’ ability to extract answers from context and

⁴We tried three methods to calculate $P(\text{choice}|\text{prompt})$: joint probability, per-token probability (joint probability normalized by length), and unconditional probability as done in Brown et al. (2020). We find that joint probability works the best for GPT-3.5, while per-token probability works the best for LLaMA-2.

Method		GPT-3.5			LLama-2			
		Acc \uparrow		Brier \downarrow	HasAns	Acc \uparrow		Brier \downarrow
		NoAns	All			NoAns	All	
Zero-shot	Base	30.6	68.5	29.4	88.7	14.3	55.9	30.0
	Attr	65.3	84.4	14.6	87.1	16.3	55.9	29.7
	Instr	81.6	91.7	7.7	91.9	26.5	63.1	27.4
	Opin	83.3	92.6	6.6	85.5	30.6	61.3	27.8
	Opin + Instr	87.8	94.4	5.2	88.7	36.7	65.8	27.4
Few-shot	Base	73.5	88.2	11.2	56.5	69.4	62.2	27.9
	Attr	81.6	91.9	8.0	59.7	67.3	63.1	27.0
	Instr	85.7	93.7	6.1	51.6	81.6	64.9	26.6
	Opin	87.8	94.6	4.1	50.0	87.8	66.6	26.6
	Opin + Instr	89.8	95.5	3.4	43.5	91.8	64.9	26.0

Table 3: Results (in %) for GPT-3.5 and LLama-2 on RealTime QA. The overall best results are highlighted in **bold**. The best and the second best results in each setting are highlighted in green and orange, respectively. As all prompts achieve perfect accuracy (100%) on the **HasAns** subset for GPT-3.5, it is not included in the table.

their ability to abstain from making predictions when the context does not describe the answer, respectively. Besides, we use the probability of “I don’t know” as LLM’s probability estimation of whether the question can be answered. We use the Brier score to evaluate the accuracy of the estimation, which measures the mean squared difference between the estimation and the true binary outcome of answerability. We use three demonstrations for each instance in the few-shot setting, where some instances are filtered out during evaluation due to exceeding the context length of LLMs.

Results and discussion. The results detailed in Tab. 3 reveal that the OPIN + INSTR prompt outperforms all others on GPT-3.5, both in the zero-shot and few-shot settings, surpassing base prompts by 57.2% and 16.3% in NoAns subset accuracy, respectively. For LLama-2, this approach similarly outperforms base prompts by 22.4% in both settings. Furthermore, the Brier score is reduced by 24.2% and 7.8% compared to base prompts for GPT-3.5 in the two settings, respectively, and by 2.6% and 1.9% on LLama-2. The OPIN prompt is the second best in terms of these metrics. These findings demonstrate that opinion-based prompts can enhance the LLMs’ ability to make selective predictions. In addition, The use of demonstrations consistently improves the LLMs’ ability to make selective predictions, as evidenced by the lower Brier scores and higher NoAns accuracy in the few-shot setting compared to the zero-shot setting.

4.4 Additional Analysis

Memorization by different sizes of LLMs. Fig. 2 shows the memorization ratio M_R across different

sizes of InstructGPTs under the zero-shot evaluation of natural questions.⁵ Overall, OPIN + INSTR consistently outperforms other prompts across different model sizes. In the upper plot, results are shown for filtered evaluation sets where the corresponding LLMs can correctly predict the original answers without additional contexts, thereof the size of evaluation sets varies across different LLMs.⁶ We observe that M_R generally decreases with increased model size, showing that larger LLMs are better at updating memorized answers based on given contexts in knowledge conflicts. However, the lower plot reveals that larger LLMs have more severe memorization on the full (unfiltered) evaluation set. This is because larger LLMs can memorize more answers than smaller ones, as evidenced by the number of instances in the filtered evaluation set where larger LLMs have more instances. Our analysis suggests that while larger LLMs are better at updating memorized answers, they still tend to have more memorization due to the larger number of memorized answers. Therefore, we need to pay more attention when using larger LLMs in scenarios with new or potentially conflicting knowledge.

Selective prediction by different sizes of LLMs.

Fig. 3 shows the Brier score across different sizes of InstructGPTs under the zero-shot evaluation of RealTime QA. On smaller LLMs, opinion-based prompt achieves similar or even higher Brier score

⁵The 0.3B, 1.3B, 6.7B models refer to text-ada-001, text-babbage-001, text-curie-001, respectively. We do not perform few-shot evaluation as different sizes of LLMs have different maximum input lengths and can take different numbers of demonstrations, thus hard to be compared to each other.

⁶The sizes of the filtered evaluation sets, in the order of increased model sizes, are 121, 132, 756, and 2,773.

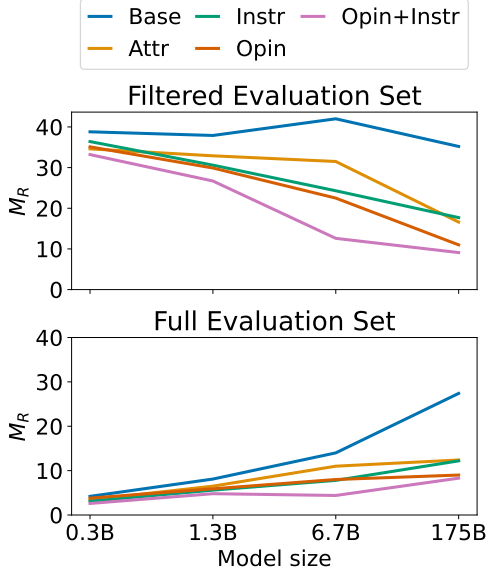


Figure 2: Memorization ratios across different sizes of InstructGPTs, evaluated in the zero-shot setting.

than base prompts, indicating it does not improve the selective prediction ability of LLMs. We hypothesize that this is because smaller LLMs have inferior reading comprehension ability, resulting in uncertainty in many instances. Opinion-based prompts change uncertain predictions of answerable questions to *I don't know*, which could lead to worse results. For other prompting templates, we do not observe a consistent improvement across different LLMs either. This analysis shows that while the selective prediction ability can be more easily activated by zero-shot prompting for LLMs such as text-davinci-003, smaller LLMs may require dedicated adaptations such as calibration and finetuning to activate this ability.

Results on original datasets. While our main experiments demonstrate the effectiveness of the proposed methods in resolving knowledge conflicts, LLMs in real-world applications may also see instances without knowledge conflicts. Therefore, we investigate how our methods affect inference when the memorized answers align with the given contexts. To do so, we evaluate LLMs on the same set of filtered evaluation set used in the main results section (§4.2), but we use the original contexts and answers instead of counterfactual ones. The results in Tab. 4 show that opinion-based prompts yield similar or better results in all settings. Furthermore, using either counterfactual or original demonstrations does not significantly impact results on the original (factual) dataset. This analysis

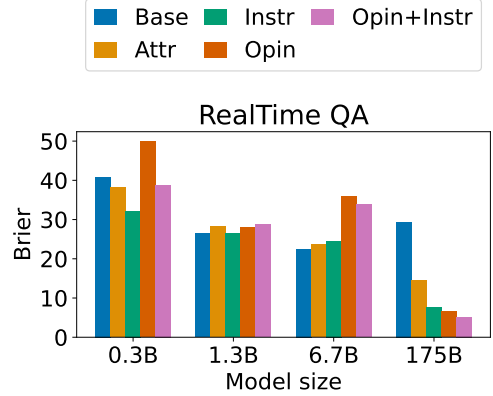


Figure 3: Brier scores across different sizes of Instruct-GPTs in the zero-shot setting of RealTime QA.

	Method	$p_o \uparrow$	EM \uparrow
Zero-shot	Base	92.1	11.1
	Opin	91.3	25.2
	Opin + Instr	90.5	57.2
Original	Base	93.2	77.8
	Opin	92.7	78.7
	Opin + Instr	93.9	80.1
Counter	Base	93.6	82.1
	Opin	92.8	82.3
	Opin + Instr	92.7	82.1

Table 4: Results (in %) on the filtered evaluation set of natural questions with original contexts and answers.

reveals that our methods do not impair performance on instances without knowledge conflicts.

4.5 Case Study

Tab. 5 shows some examples of prompts and the corresponding answers generated by text-davinci-003. The left column of the table presents a knowledge conflict case where the original answer, *Lady Gaga*, is replaced with a counterfactual answer, *Bosco*. When using base prompts, LLM ignores the context and return the memorized answer *Lady Gaga*. However, using opinion-based prompts and their combination with instructions leads to a more faithful response, with the language model returning *Bosco* in the given context. The right column presents a scenario where the retrieved context from Google search is irrelevant to the given question. In such cases, base prompts still return a choice, leading to a potentially incorrect answer. However, opinion-based prompts and their combination with instructions can abstain from making predictions and return *I don't know*. These examples demonstrate the effectiveness of proposed

	Knowledge Conflict	Prediction with Abstention
Context	(Counterfactual passage) The Super Bowl LI Halftime show took place on February 5, 2017, at NRG Stadium in Houston, Texas as part of Super Bowl LI. The show was headlined by Bosco , who performed a medley of her songs, including newer material from her most recent studio album Joanne.	Tara Connolly is senior gas campaigner at Global Witness, an international NGO working towards a more sustainable, just and equal planet. She has over a decade of experience in EU energy policy. The views expressed in this commentary are her own.
Prompt	Instruction: read the given information and answer the corresponding question. Bob said, “The Super Bowl ... album Joanne.” Q: who performed the halftime show at Super Bowl 51 in Bob’s opinion based on the given text?	Instruction: answer a question based on the provided input-output pairs. Bob said, “Tara Connolly ... are her own.” Q: Mo Farah made public that he was trafficked from which African country to the UK in Bob’s opinion based on the given text? Choices: Somaliland; Djibouti; Ethiopia; Somalia; I don’t know
Base	Lady Gaga ✗	Somalia ✗
Attr	Lady Gaga ✗	Somalia ✗
Instr	Lady Gaga ✗	Somaliland ✗
Opin	Bosco ✓	I don’t know ✓
Instr + Opin	Bosco ✓	I don’t know ✓
Answer	Bosco	I don’t know

Table 5: Examples of prompts and LLMs’ corresponding predictions. In the “Prompt” row, we show and highlight the added parts from different prompting templates including [attributed prompts](#), [instruction-based prompts](#), and [opinion-based prompts](#).

prompts in generating context-faithful responses.

5 Conclusion

In this paper, we focus on addressing the faithfulness issue of LLMs in context-specific NLP tasks, particularly in scenarios with knowledge conflict and prediction with abstention. We propose that two methods, opinion-based prompts and counterfactual demonstrations, are effective in improving LLMs’ faithfulness to contexts. We evaluate our methods on three datasets of two tasks, namely machine reading comprehension and relation extraction, and observed significant improvement in faithfulness to contexts. Future work includes evaluating the effectiveness of proposed methods on a broader range of NLP tasks such as open-domain QA and summarization, and studying other techniques to improve faithfulness further.

Acknowledgement

We appreciate the reviewers for their insightful comments and suggestions. Wenxuan Zhou and Muhao Chen are supported by the NSF Grant IIS 2105329 and the DARPA MCS program under Contract No. N660011924033 with the United States Office Of Naval Research.

Limitations

In this study, our main focus is on the utilization of context-augmented prompting, assuming the reliability of the provided context. However, real-world scenarios can be more complicated, which may involve retrieved contexts that contain erroneous or conflicting information. Assessing the factuality of the context solely based on the provided information becomes challenging, as it depends on additional factors such as trustworthiness and timeliness of the information source. Due to the complexity and challenges associated with verifying context reliability, we do not address this issue within the scope of this work. Furthermore, it is important to note that our paper primarily concentrates on the capability of LLMs to generate updated answers or decisions for given questions, rather than exploring more intricate tasks that require the model to apply the updated knowledge in multi-hop reasoning.

Ethical Considerations

Due to the availability of test data, the experiments conducted in this work has been in English, while future work can consider extending the use of proposed techniques to tasks in other languages. The

datasets used in this work are public datasets that may not be free of inherent biases. However, the introduced context-faithful prompting techniques in this work do not introduce additional biases beyond what the data have presented.

References

- Johannes Bjerva, Nikita Bhutani, Behzad Golshan, Wang-Chiew Tan, and Isabelle Augenstein. 2020. [SubjQA: A Dataset for Subjectivity and Review Comprehension](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5480–5494, Online. Association for Computational Linguistics.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. 2020. Language models are few-shot learners. *Advances in neural information processing systems*, 33:1877–1901.
- Eunsol Choi, He He, Mohit Iyyer, Mark Yatskar, Wentaoy Yih, Yejin Choi, Percy Liang, and Luke Zettlemoyer. 2018. [QuAC: Question answering in context](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2174–2184, Brussels, Belgium. Association for Computational Linguistics.
- C Chow. 1970. On optimum recognition error and reject tradeoff. *IEEE Transactions on information theory*, 16(1):41–46.
- Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. 2022. Palm: Scaling language modeling with pathways. *arXiv preprint arXiv:2204.02311*.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Eric Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. 2022. Scaling instruction-finetuned language models. *arXiv preprint arXiv:2210.11416*.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. 2019. [BoolQ: Exploring the surprising difficulty of natural yes/no questions](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2924–2936, Minneapolis, Minnesota. Association for Computational Linguistics.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. 2018. Think you have solved question answering? try arc, the ai2 reasoning challenge. *arXiv preprint arXiv:1803.05457*.
- Corinna Cortes, Giulia DeSalvo, and Mehryar Mohri. 2016. Learning with rejection. In *Algorithmic Learning Theory: 27th International Conference, ALT 2016, Bari, Italy, October 19-21, 2016, Proceedings 27*, pages 67–82. Springer.
- Nicola De Cao, Wilker Aziz, and Ivan Titov. 2021. [Editing factual knowledge in language models](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6491–6506, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Giorgio Fumera and Fabio Roli. 2002. Support vector machines with embedded reject option. In *Pattern Recognition with Support Vector Machines: First International Workshop, SVM 2002 Niagara Falls, Canada, August 10, 2002 Proceedings*, pages 68–82. Springer.
- Yarin Gal and Zoubin Ghahramani. 2016. Dropout as a bayesian approximation: Representing model uncertainty in deep learning. In *international conference on machine learning*, pages 1050–1059. PMLR.
- Luyu Gao and Jamie Callan. 2022. [Unsupervised corpus aware language model pre-training for dense passage retrieval](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 2843–2853, Dublin, Ireland. Association for Computational Linguistics.
- Mansi Gupta, Nitish Kulkarni, Raghuv eer Chanda, Anirudha Rayasam, and Zachary C Lipton. 2019. Amazonqa: A review-based question answering task. In *International Joint Conference on Artificial Intelligence*.
- Dan Hendrycks and Kevin Gimpel. 2017. A baseline for detecting misclassified and out-of-distribution examples in neural networks. In *International Conference on Learning Representations*.
- Dan Hendrycks, Xiaoyuan Liu, Eric Wallace, Adam Dziedzic, Rishabh Krishnan, and Dawn Song. 2020. [Pretrained transformers improve out-of-distribution robustness](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 2744–2751, Online. Association for Computational Linguistics.
- Gautier Izacard, Patrick Lewis, Maria Lomeli, Lucas Hosseini, Fabio Petroni, Timo Schick, Jane Dwivedi-Yu, Armand Joulin, Sebastian Riedel, and Edouard Grave. 2022. Few-shot learning with retrieval augmented language models. *arXiv preprint arXiv:2208.03299*.
- Mandar Joshi, Eunsol Choi, Daniel Weld, and Luke Zettlemoyer. 2017. [TriviaQA: A large scale distantly supervised challenge dataset for reading comprehension](#). In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 1601–1611, Vancouver, Canada. Association for Computational Linguistics.

- Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi Chen, and Wen-tau Yih. 2020. [Dense passage retrieval for open-domain question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6769–6781, Online. Association for Computational Linguistics.
- Jungo Kasai, Keisuke Sakaguchi, Yoichi Takahashi, Ronan Le Bras, Akari Asai, Xinyan Yu, Dragomir Radev, Noah A Smith, Yejin Choi, and Kentaro Inui. 2022. Realtime qa: What’s the answer right now? *arXiv preprint arXiv:2207.13332*.
- Omar Khattab, Keshav Santhanam, Xiang Lisa Li, David Hall, Percy Liang, Christopher Potts, and Matei Zaharia. 2022. Demonstrate-search-predict: Composing retrieval and language models for knowledge-intensive nlp. *arXiv preprint arXiv:2212.14024*.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, Kristina Toutanova, Llion Jones, Matthew Kelcey, Ming-Wei Chang, Andrew M. Dai, Jakob Uszkoreit, Quoc Le, and Slav Petrov. 2019. [Natural questions: A benchmark for question answering research](#). *Transactions of the Association for Computational Linguistics*, 7:452–466.
- Balaji Lakshminarayanan, Alexander Pritzel, and Charles Blundell. 2017. Simple and scalable predictive uncertainty estimation using deep ensembles. *Advances in neural information processing systems*, 30.
- Angeliki Lazaridou, Elena Gribovskaya, Wojciech Stokowiec, and Nikolai Grigorev. 2022. Internet-augmented language models through few-shot prompting for open-domain question answering. *arXiv preprint arXiv:2203.05115*.
- Angeliki Lazaridou, Adhi Kuncoro, Elena Gribovskaya, Devang Agrawal, Adam Liska, Tayfun Terzi, Mai Gimenez, Cyprien de Masson d’Autume, Tomas Kocisky, Sebastian Ruder, et al. 2021. Mind the gap: Assessing temporal generalization in neural language models. *Advances in Neural Information Processing Systems*, 34:29348–29363.
- Daliang Li, Ankit Singh Rawat, Manzil Zaheer, Xin Wang, Michal Lukasik, Andreas Veit, Felix Yu, and Sanjiv Kumar. 2022. Large language models with controllable working memory. *arXiv preprint arXiv:2211.05110*.
- Stephanie Lin, Jacob Hilton, and Owain Evans. 2022. [TruthfulQA: Measuring how models mimic human falsehoods](#). In *Proceedings of the 60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 3214–3252, Dublin, Ireland. Association for Computational Linguistics.
- Adam Liska, Tomas Kocisky, Elena Gribovskaya, Tayfun Terzi, Eren Sezener, Devang Agrawal, D’Autume Cyprien De Masson, Tim Scholtes, Manzil Zaheer, Susannah Young, et al. 2022. Streamingqa: A benchmark for adaptation to new knowledge over time in question answering models. In *International Conference on Machine Learning*, pages 13604–13622. PMLR.
- Jiachang Liu, Dinghan Shen, Yizhe Zhang, Bill Dolan, Lawrence Carin, and Weizhu Chen. 2022. [What makes good in-context examples for GPT-3?](#) In *Proceedings of Deep Learning Inside Out (DeeLIO 2022): The 3rd Workshop on Knowledge Extraction and Integration for Deep Learning Architectures*, pages 100–114, Dublin, Ireland and Online. Association for Computational Linguistics.
- Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Mandar Joshi, Danqi Chen, Omer Levy, Mike Lewis, Luke Zettlemoyer, and Veselin Stoyanov. 2019. Roberta: A robustly optimized bert pretraining approach. *arXiv preprint arXiv:1907.11692*.
- Shayne Longpre, Kartik Perisetla, Anthony Chen, Nikhil Ramesh, Chris DuBois, and Sameer Singh. 2021. [Entity-based knowledge conflicts in question answering](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7052–7063, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.
- Keming Lu, I-Hung Hsu, Wenxuan Zhou, Mingyu Derek Ma, and Muhao Chen. 2022. [Summarization as indirect supervision for relation extraction](#). In *Findings of the Association for Computational Linguistics: EMNLP 2022*, pages 6575–6594, Abu Dhabi, United Arab Emirates. Association for Computational Linguistics.
- Kevin Meng, David Bau, Alex J Andonian, and Yonatan Belinkov. 2022. Locating and editing factual associations in gpt. In *Advances in Neural Information Processing Systems*.
- Kevin Meng, Arnab Sen Sharma, Alex Andonian, Yonatan Belinkov, and David Bau. 2023. Mass-editing memory in a transformer. In *International Conference on Learning Representations*.
- Todor Mihaylov, Peter Clark, Tushar Khot, and Ashish Sabharwal. 2018. [Can a suit of armor conduct electricity? a new dataset for open book question answering](#). In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pages 2381–2391, Brussels, Belgium. Association for Computational Linguistics.
- Eric Mitchell, Charles Lin, Antoine Bosselut, Chelsea Finn, and Christopher D Manning. 2022. Fast model editing at scale. In *International Conference on Learning Representations*.

- Ella Neeman, Roei Aharoni, Or Honovich, Leshem Choshen, Idan Szpektor, and Omri Abend. 2022. Disentqa: Disentangling parametric and contextual knowledge with counterfactual question answering. *arXiv preprint arXiv:2211.05655*.
- Pranav Rajpurkar, Robin Jia, and Percy Liang. 2018. [Know what you don't know: Unanswerable questions for SQuAD](#). In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 784–789, Melbourne, Australia. Association for Computational Linguistics.
- Pranav Rajpurkar, Jian Zhang, Konstantin Lopyrev, and Percy Liang. 2016. [SQuAD: 100,000+ questions for machine comprehension of text](#). In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pages 2383–2392, Austin, Texas. Association for Computational Linguistics.
- Siva Reddy, Danqi Chen, and Christopher D. Manning. 2019. [CoQA: A conversational question answering challenge](#). *Transactions of the Association for Computational Linguistics*, 7:249–266.
- Nils Reimers and Iryna Gurevych. 2019. [Sentence-BERT: Sentence embeddings using Siamese BERT-networks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3982–3992, Hong Kong, China. Association for Computational Linguistics.
- Erik F Sang and Fien De Meulder. 2003. Introduction to the conll-2003 shared task: Language-independent named entity recognition. *arXiv preprint cs/0306050*.
- Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. 2022. [ColBERTv2: Effective and efficient retrieval via lightweight late interaction](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3715–3734, Seattle, United States. Association for Computational Linguistics.
- Chenglei Si, Zhe Gan, Zhengyuan Yang, Shuohang Wang, Jianfeng Wang, Jordan Boyd-Graber, and Lijuan Wang. 2023. Prompting gpt-3 to be reliable. In *International Conference on Learning Representations*.
- George Stoica, Emmanouil Antonios Platanios, and Barnabás Póczos. 2021. Re-tacred: Addressing shortcomings of the tacred dataset. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35, pages 13843–13850.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. 2023. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*.
- Haoyu Wang, Hongming Zhang, Yuqian Deng, Jacob Gardner, Dan Roth, and Muhao Chen. 2023. [Extracting or guessing? improving faithfulness of event temporal relation extraction](#). In *Proceedings of the 17th Conference of the European Chapter of the Association for Computational Linguistics*, pages 541–553, Dubrovnik, Croatia. Association for Computational Linguistics.
- Yiwei Wang, Muhao Chen, Wenxuan Zhou, Yujun Cai, Yuxuan Liang, Dayiheng Liu, Baosong Yang, Juncheng Liu, and Bryan Hooi. 2022. [Should we rely on entity mentions for relation extraction? debiasing relation extraction with counterfactual analysis](#). In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 3071–3081, Seattle, United States. Association for Computational Linguistics.
- Jason Wei, Maarten Bosma, Vincent Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du, Andrew M Dai, and Quoc V Le. 2022. Finetuned language models are zero-shot learners. In *International Conference on Learning Representations*.
- Ji Xin, Raphael Tang, Yaoliang Yu, and Jimmy Lin. 2021. [The art of abstention: Selective prediction and error regularization for natural language processing](#). In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 1040–1051, Online. Association for Computational Linguistics.
- Mark Yatskar. 2019. [A qualitative comparison of CoQA, SQuAD 2.0 and QuAC](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pages 2318–2323, Minneapolis, Minnesota. Association for Computational Linguistics.
- Yuhao Zhang, Victor Zhong, Danqi Chen, Gabor Angeli, and Christopher D. Manning. 2017. [Position-aware attention and supervised data improve slot filling](#). In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 35–45, Copenhagen, Denmark. Association for Computational Linguistics.
- Wenxuan Zhou and Muhao Chen. 2022. [An improved baseline for sentence-level relation extraction](#). In *Proceedings of the 2nd Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 12th International Joint Conference on Natural Language Processing (Volume 2: Short Papers)*, pages 161–168, Online only. Association for Computational Linguistics.

Wenxuan Zhou, Fangyu Liu, and Muhao Chen. 2021. [Contrastive out-of-distribution detection for pre-trained transformers](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 1100–1111, Online and Punta Cana, Dominican Republic. Association for Computational Linguistics.

Yongchao Zhou, Andrei Ioan Muresanu, Ziwen Han, Keiran Paster, Silviu Pitis, Harris Chan, and Jimmy Ba. 2022. Large language models are human-level prompt engineers. *arXiv preprint arXiv:2211.01910*.

Chen Zhu, Ankit Singh Rawat, Manzil Zaheer, Srinadh Bhojanapalli, Daliang Li, Felix Yu, and Sanjiv Kumar. 2020. Modifying memories in transformer models. *arXiv preprint arXiv:2012.00363*.

Appendices

A Settings of Automatic Prompt Engineering

We run APE using their official code⁷ and default hyperparameters. In the knowledge conflict setting, we use counterfactual datasets to generate instructions. While the APE paper recommends using instructions generated by the same model in inference, we find that smaller LLMs do not generate meaningful instructions for our datasets. Therefore, we use instructions generated by text-davinci-003 across different scales of LLMs in additional analysis. The top three instructions generated by APE on each dataset are listed below. We use the top one instruction in experiments.

Natural questions:

1. read the given information and answer the corresponding question.
2. read a piece of text and then use the information in the text to answer a question.
3. "Read the given information and answer the questions that follow."

Re-TACRED:

1. identify the relationship between two entities from a list of options.
2. identify the relationship between two entities based on the given input-output pairs.
3. identify the relationship between two entities given the input-output pairs.

⁷https://github.com/keirp/automatic_prompt_engineer

RealTime QA:

1. answer a question based on the provided input-output pairs.
2. ask a question with a set of choices and ask the friend to provide the correct answer.
3. answer a question related to a news article.