
Real-World Adverse Weather Image Restoration via Dual-Level Reinforcement Learning with High-Quality Cold Start

Fuyang Liu², Jiaqi Xu³, Xiaowei Hu^{1*}

¹South China University of Technology

²Nanjing University of Science and Technology ³Huawei Noah's Ark Lab

Abstract

Adverse weather severely impairs real-world visual perception, while existing vision models trained on synthetic data with fixed parameters struggle to generalize to complex degradations. To address this, we first construct HFLS-Weather, a physics-driven, high-fidelity dataset that simulates diverse weather phenomena, and then design a dual-level reinforcement learning framework initialized with HFLS-Weather for cold-start training. Within this framework, at the local level, weather-specific restoration models are refined through perturbation-driven image quality optimization, enabling reward-based learning without paired supervision; at the global level, a meta-controller dynamically orchestrates model selection and execution order according to scene degradation. This framework enables continuous adaptation to real-world conditions and achieves state-of-the-art performance across a wide range of adverse weather scenarios. Code is available at <https://github.com/xxclfy/AgentRL-Real-Weather>

1 Introduction

Adverse weather conditions present a persistent challenge for computer vision systems operating in real-world environments. Rain, snow, haze, and their interactions degrade image quality through intricate physical processes, including light scattering by atmospheric particles, dynamic sensor noise, and surface-level phenomena such as water film reflections and ice crystal refraction. Various deep-learning-based methods are developed from adverse weather image restoration, such as weather-specific models for deraining [15, 61, 20, 68, 21, 54, 14], dehazing [19, 4, 13, 44, 48], desnowing [32], and all-in-one models for multiple weather types [27, 46, 11, 35, 69, 49, 63, 36, 58, 8].

Despite these advances, existing methods often struggle in real-world applications due to a fundamental limitation: *models trained on synthetic data fail to generalize effectively to unpredictable real-world degradations*. This performance gap arises from three limitations in current approaches: (i) existing multi-weather synthetic datasets fail to capture the high-precision representation and the intricate physics underlying weather phenomena, (ii) conventional static models lack the capacity to adapt to novel degradation patterns encountered during real-world deployment, and (iii) single-model architectures cannot leverage dynamic coordination strategies to optimally handle diverse and multiple degradation types.

To address these, we develop a self-evolving approach that contains the physics-driven synthetic data generation with a dual-level reinforcement learning architecture. First, we create the High-Fidelity Large-Scale Weather dataset (HFLS-Weather), which simulates weather artifacts like rain, fog, and snow based on their physical formation. This dataset contains one million images, using depth

*Corresponding author: huxiaowei@scut.edu.cn

information predicted by a robust depth estimation model [59, 60] to generate realistic weather effects in any scene. On this foundation, we train specialized restoration models for various weather conditions, including rain, snow, haze, and mixed weather types, providing high-quality supervised cold starts. Similarly to LLMs [17], a high-quality “cold start” is essential for the effectiveness of subsequent reinforcement learning.

Second, we design a Dual-level Reinforcement Learning framework (**DRL**) for continuous refinement and real-world adaptation. At the local level, multiple specialized restoration models, such as derain, dehaze, and desnow, are first trained on our HFLS-Weather dataset and then continuously refined based on real-world feedback through reinforcement learning. At the global level, a meta-controller dynamically coordinates the collaboration of individual restoration models (agents) by analyzing degradation patterns and historical execution data. This dual-level synergy establishes a closed-loop learning ecosystem: *at the local level, individual restoration models continuously refine their capabilities based on real-world feedback, while at the global level, the meta-controller dynamically optimizes model coordination for enhanced overall performance.*

The key challenge for this framework is training the dual-level system on real data without paired ground-truth images. Reinforcement learning offers a potential solution, as it doesn’t require pixel-level supervision, making it suitable for scenarios where real data, particularly in adverse weather, lacks paired ground-truth images. However, unlike recent successful reinforcement learning applications in large language models (*e.g.*, Group Relative Policy Optimization, GRPO [42]), where (i) multiple responses can be generated for a single prompt, enabling result comparison [17], and (ii) rule-based reward designs work well for tasks with deterministic answers [43], image restoration models typically output a fixed result for each input and it is difficult to derive deterministic rewards without paired ground-truth images.

To train each individual restoration model, we develop Perturbation-driven Image Quality Optimization (**PIQO**), which modifies GRPO [42] in two aspects to make it suitable for image restoration tasks. First, we introduce perturbations to network parameters, enabling the model to generate different results for a single input image, facilitating effective comparison during the learning process. Second, to assess performance and provide learning rewards for unlabeled real-world images, we design a reward assessment strategy for image quality, which integrates various evaluation metrics for restored images. To train the global meta-controller, we take the image quality assessment score as reward to autonomously determine the optimal execution sequence for input images and dynamically select the most suitable model to maximize performance. The scheduling policy is continuously refined through real-world interactions, enabling adaptability to changing conditions.

Lastly, we conduct various experiments under complex real-world conditions across diverse weather scenarios by comparing with various methods for removing weather-related artifacts. The results demonstrate that *our model outperforms the previous methods by a large margin*, both quantitatively and visually. To our knowledge, this is the first work to successfully apply GRPO concepts to image restoration, demonstrating that a high-quality cold start and effective reward design are key to success.

2 Related Work

2.1 Adverse Weather Image Restoration

Earlier research primarily focused on restoring images degraded by specific weather conditions, such as rain [15, 61, 20, 68, 21, 54, 14], haze [19, 4, 13, 44, 48], and snow [32]. More recent efforts aim to develop unified frameworks for general adverse weather removal [27, 46, 11, 35, 69, 49, 63, 36]. All-in-One [27] first unified weather restoration via joint training; TransWeather [46] introduced transformer-based adaptive queries; and Chen *et al.* [11] used contrastive learning with knowledge distillation. WeatherDiff [35] proposed a diffusion-based model, while WGWS [69] employed a two-stage pipeline for general-to-specific refinement. WeatherStream [64] introduced real degraded-clean pairs but suffered from compression noise. Although these approaches have shown impressive results on synthetic benchmarks [15, 38, 32, 25, 26, 20, 55, 57], their real-world performance is hindered by the domain gap between controlled synthetic data and the complexity of actual environmental conditions. This gap often limits their ability to handle the unpredictable and diverse nature of real-world weather scenarios.

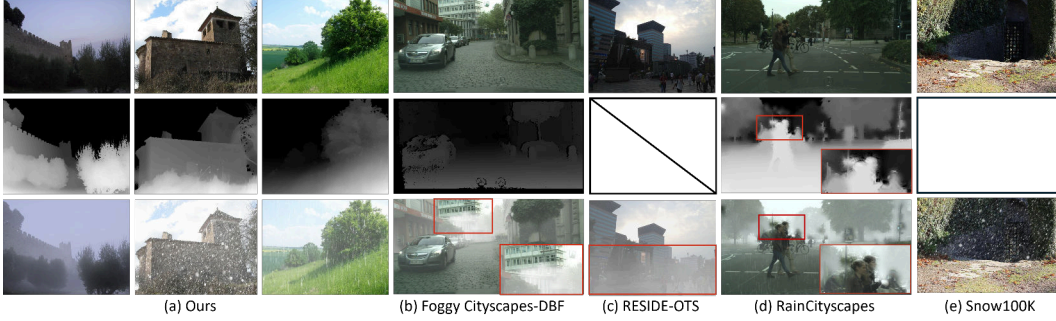


Figure 1: Weather-degraded images from Foggy Cityscapes-DBF [40], RESIDE-OTS [25], RainCityscapes [20], and Snow100K [32] showcase artifacts such as ghosting and uneven weather effects resulting from depth estimation errors. Note that RESIDE-OTS does not provide public depth maps, and Snow100K lacks depth data. The three rows represent clean images, depth maps, and weather-degraded images, respectively.

2.2 Large-Scale, Agent-Based, and Perturbation Methods

Recent advancements leveraged large-scale models and multi-agent systems to address image restoration challenges across various adverse weather conditions. DA-CLIP [33] extends CLIP [39] via a dynamic controller for robust embeddings. Other methods integrate external knowledge: *e.g.*, distilling semantics from SAM [65, 24], using prompt learning and depth priors [8], or leveraging VLMs for semi-supervised enhancement [56]. RestoreAgent [6] uses multimodal LLMs to assess, sequence, and apply restoration tools autonomously. AgenticIR [67] coordinates multiple expert agents via LLMs for toolbox-based restoration, including synthetic degradation generation. Very recently, JarvisIR [29] also adopts multi-agent RL strategies for weather-degraded image restoration.

Some works explore *perturbation-based* mechanisms for improving restoration diversity and robustness. DFPIR [45] introduces degradation-aware feature perturbation, while earlier works exploit latent-space or parameter perturbations through learned priors, such as deep mean-shift priors [3] and autoencoding priors [2]. Unlike these, our method employs RL-guided parameter perturbations with IQA-based reward filtering, and further introduces a dual-level structure where a global meta-controller dynamically coordinates local restoration agents, enhancing adaptability in real-world scenarios. Although GPT-4o² shows potential in visual editing (*e.g.*, removing weather artifacts), it often produces visually appealing but physically unauthentic outputs (*e.g.*, hallucinated objects, distorted structure) [9], limiting its utility in tasks requiring geometric and photometric fidelity.

3 High-Fidelity Large-Scale Weather Dataset

3.1 Dataset Overview

Existing weather-related datasets for fog, rain, and snow [41, 20, 21] primarily rely on synthetic images generated via atmospheric scattering models [16], with depth maps sourced from LiDAR [41, 20] or monocular depth estimation [30]. While widely used for weather artifact removal, these datasets suffer from key limitations: (i) LiDAR-based collection is expensive and limited in scale and scene diversity; (ii) depth maps often lack granularity, introducing unrealistic artifacts such as ghosting (see Fig. 1); and (iii) depth estimation models generalize poorly, further degrading realism.

To overcome these issues, we develop **HFLS-Weather**, a large-scale, high-fidelity dataset for realistic weather synthesis. Leveraging an advanced depth prediction model [60], we generate precise and scalable simulations of rain, haze, and snow. The rain and snow simulations include both pure artifacts (*i.e.*, rain-only or snow-only) and mixed conditions combining rain or snow with haze. This design improves both the diversity and physical plausibility of training data (Fig. 1a).

HFLS-Weather offers two core advantages: (i) *High-fidelity depth at scale*. We generate accurate depth maps from clear-weather images using a state-of-the-art model, eliminating the cost and limitations of LiDAR while enabling realistic synthesis across diverse scenes. (ii) *Depth-consistent multi-weather simulation*. A unified framework applies depth-driven attenuation not only to haze,

²<https://openai.com/index/hello-gpt-4o/>

Table 1: Comparison of datasets for image restoration under adverse weather.

Dataset	Year	Weather	Depth	Depth Source	#Clean	#Pairs	Real/Syn
Snow100K [32]	2017	Snow	No	-	50,000	50,000	Syn
Rain14000 [15]	2017	Rain	No	-	650	9,100	Syn
RESIDE-OTS [25]	2018	Haze	Yes	DCNF	2,061	72,135	Syn
NTURain [7]	2018	Rain	No	-	-	3,123	Syn
Foggy Cityscapes [41]	2018	Haze	Yes	Stereo Vision	2,975	8,925	Syn
Foggy City.-DBF [40]	2018	Haze	Yes	Stereo Vision	2,975	8,925	Syn
RESIDE-RTTS [25]	2018	Haze	-	-	-	4,322	Real
RainHeavy25 [62]	2019	Rain	No	-	-	1,710	Syn
RainCityscapes [20, 21]	2019	Rain	Yes	Stereo Vision	262	9,432	Syn
Outdoor-Rain [26]	2019	Rain	No	-	-	13,500	Syn
CSD [10]	2021	Snow	No	-	-	10,000	Syn
WeatherStream [64]	2023	Rain/Haze/Snow	No	-	«188,000	188,000	Real (diff. time)
CDD11 [18]	2024	Rain/Haze/Snow	Yes	MegaDepth [28]	1,383	13,013	Syn
Weather30K [57]	2025	Rain/Haze/Snow	No	-	30,000	30,000	Syn
HFLS-Weather	2025	Rain/Haze/Snow	Yes	DepthAnything v2 [60]	1,000,000	1,000,000	Syn

but also to rain and snow, ensuring that all weather effects decay realistically with distance. This yields physically consistent degradations aligned with scene geometry, supporting robust training for multi-weather restoration models.

3.2 Weather-Related Artifact Simulation

We simulate realistic fog, rain, snow, and hybrid conditions using an atmospheric scattering model [5, 16], incorporating depth-dependent interactions between weather phenomena. In real-world scenarios, distant objects are often obscured by fog, while proximate regions exhibit rain streaks or snowflakes [20, 21]. To model this, we define the weather-affected image $I_{\text{weather}}(x)$ as

$$I_{\text{weather}}(x) = J(x) (1 - M(x) - F(x)) + M(x) + A(x)F(x),$$

where $J(x)$ represents the clean image, $M(x) \in [0, 1]$ denotes the rain/snow layer, and $F(x) = e^{-\beta d(x)}$ corresponds to the fog layer, with β as the atmospheric scattering coefficient and $d(x)$ representing high-quality depth information. $A(x)$ is the global atmospheric light. Fog is simulated using a transmission map $F(x) = e^{-\beta d(x)}$, where β controls fog density and $d(x)$ provides depth information, allowing fog to naturally obscure distant objects while leaving closer objects clearer. Rain and snow are represented by the rain/snow layer $M(x)$, a semi-transparent mask created through procedural generation. Rain streaks appear more intense on closer objects, while snowflakes accumulate in a scattered pattern, adding realism through variable opacity based on depth. In both rain and snow conditions, fog effects can be applied to objects at greater distances from the camera.

3.3 Dataset Comparison

To construct HFLS-Weather, we collected one million clean images from diverse sources including Snow100K [32], RESIDE-OTS [25], Google Landmark V2 [51], and OSV5M [1]. Each image was randomly augmented with one weather type, *i.e.*, haze, rain (rain-only & rain+haze), and snow (snow-only & snow+haze), using our physically grounded synthesis pipeline, resulting in one million high-quality degraded images.

As summarized in Table 1, HFLS-Weather provides balanced coverage across rain, haze, and snow, unlike prior datasets that target single weather types. Its use of high-fidelity depth enables accurate simulation of weather effects, improving realism and consistency. With one million diverse backgrounds and generated pairs, it surpasses existing datasets in both scale and diversity, facilitating robust generalization. By combining large-scale synthesis with physically consistent depth cues, HFLS-Weather addresses key limitations of prior benchmarks and supports inter-condition learning for advanced weather artifact removal.

4 Dual-Level Reinforcement Learning Framework

In this work, we present a dual-level reinforcement learning framework for real-world adverse weather image restoration, integrating both Perturbation-Driven Image Quality Optimization (PIQO) and a Multi-Agent System to continuously refine restoration models through real-world feedback.

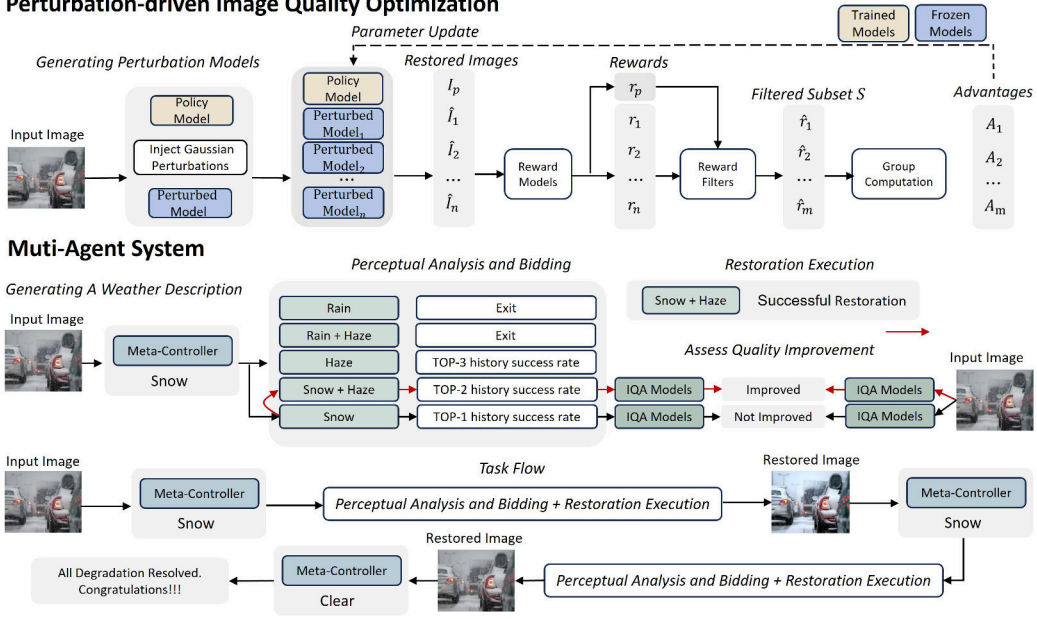


Figure 2: Architecture of Perturbation-Driven Image Quality Optimization and Multi-Agent System.

Figure 2 illustrates our framework, where PIQO applies Gaussian perturbations to model parameters, generating multiple restored images that are evaluated using quality assessment models to guide learning and improve adaptation to various weather conditions. The Multi-Agent System uses a meta-controller to generate weather descriptions and dynamically select the most suitable restoration model based on historical success rates, thereby enhancing performance across diverse weathers.

4.1 Perturbation-driven Image Quality Optimization

While reinforcement learning has advanced LLM alignment through techniques like Group Relative Policy Optimization (GRPO) [42], its application to image restoration is less explored. Unlike text generation, which naturally supports one-to-many outputs, image restoration typically follows a one-to-one mapping from degraded inputs to plausible outputs, limiting diversity and complicating reward design, especially without paired ground truth. Rule-based rewards, effective in deterministic settings [43], often underperform in such underconstrained scenarios.

To address this, we present Perturbation-driven Image Quality Optimization (PIQO), a GRPO-inspired framework tailored for image restoration. PIQO injects small Gaussian perturbations into model parameters during inference to produce diverse outputs for the same input. Let θ be the current model parameters and the i -th perturbed version $\theta'_i = \theta + \Delta$. For each degraded input image, we generate multiple outputs \hat{I}_i using perturbed models $f(\theta'_i)$.

To evaluate output quality without paired supervision, we define a composite no-reference reward function combining four metrics: LIQE [66], CLIP-IQA [47], and Q-Align [52]. The reward for the i -th output is:

$$r_i = w_1 \times \text{LIQE}(\hat{I}_i) + w_2 \times \text{CLIP-IQA}(\hat{I}_i) + w_3 \times \text{Q-Align}(\hat{I}_i), \quad (1)$$

where w_* are the weights for each metric. This reward function produces a scalar score r_i for each candidate output, reflecting its predicted perceptual quality. By design, higher indicates better overall visual quality as judged by the ensemble of metrics.

Not all perturbed outputs are beneficial for learning, and some may produce degraded images with low rewards, introducing high variance or even harmful gradients. To mitigate this, we apply a reward filtering step that discards outputs whose rewards fall below that of the unperturbed model, ensuring the optimization focuses only on advantageous directions. Let I_p denote the output from the current

model and MUSIQ [23] be the filtering criterion; we retain only the indices with:

$$\mathcal{S} = \{i \mid \text{MUSIQ}(\hat{I}_i) > \text{MUSIQ}(I_p)\}. \quad (2)$$

Next, we compute the normalized advantage A_i for each retained sample $i \in \mathcal{S}$, which reflects how much its reward deviates from the group mean:

$$A_i = \frac{r_i - \bar{r}}{\sigma_r + \varepsilon}, \quad \bar{r} = \frac{1}{N} \sum_{j=1}^N r_j, \quad \sigma_r = \sqrt{\frac{1}{N} \sum_{j=1}^N (r_j - \bar{r})^2}, \quad (3)$$

where \bar{r} and σ_r denote the mean and standard deviation of the rewards $\{r_j\}_{j=1}^N$ within the retained group \mathcal{S} . This relative advantage indicates the quality of a perturbed output compared to the group average: positive A_i suggests a beneficial perturbation, while negative A_i implies a less favorable one (note that low-quality samples have mostly been filtered out by the r_p baseline). Normalizing the advantages reduces variance in the gradient estimate and serves as a built-in baseline, akin to standard policy gradient methods.

Given the filtered set of perturbations and their advantages, PIQO updates the model parameters in the direction that increases expected image quality. We estimate the cumulative policy gradient g over the filtered subset \mathcal{S} :

$$g = -\frac{1}{|\mathcal{S}|} \sum_{i \in \mathcal{S}} A_i (\theta'_i - \theta), \quad (4)$$

where the negative sign reflects gradient ascent on reward.

To stabilize updates, we apply implicit KL regularization by approximating divergence in parameter space. This is analogous to the trust-region constraint in PPO, which limits how much the policy can change in a single step.

$$\text{KL}_{\text{approx}} = \frac{1}{|\mathcal{S}|} \sum_{i \in \mathcal{S}} \frac{1}{|\theta|} \sum_{j=1}^{|\theta|} (\theta'_{i,j} - \theta_j)^2, \quad (5)$$

where $|\theta|$ is the number of parameters and $\theta'_{i,j}$ the j -th parameter of the i -th perturbed model.

We compute a scaling factor based on a KL threshold τ :

$$\text{scale} = \begin{cases} \sqrt{\tau / \text{KL}_{\text{approx}}}, & \text{if } \text{KL}_{\text{approx}} > \tau \\ 1, & \text{otherwise} \end{cases} \quad (6)$$

The final parameter update is:

$$\theta \leftarrow \theta + \eta \cdot \text{scale} \cdot g, \quad (7)$$

where η is the learning rate. This update ensures stability by preventing large shifts when parameter divergence is high.

PIQO extends GRPO to image restoration by enabling learning from unlabeled real-world data through perturbation-induced diversity, reward-based filtering, and variance-reduced gradient updates.

4.2 Multi-Agent System

To further deal with the complex adverse weather conditions in real world, we present a multi-agent system for image restoration that can handle one or multiple adverse weather types by learning from real data. After training individual restoration models for specific weather conditions, the system utilizes specialized agents, each focusing on a particular type of degradation. These agents collaborate autonomously through a bidding mechanism driven by perceptual analysis.

As shown in Figure 2, the process begins by analyzing the input image using a meta-controller (CLIP [39]), which identifies the dominant weather-related degradation and generates a corresponding “weather description.” This semantic description guides the selection of agents for subsequent restoration stages. The system broadcasts this weather description to all registered agents, who assess the compatibility of their specialization with the identified degradation. Each agent decides whether to participate in the bidding process based on its historical success rate with similar degradations.

Table 2: Performance comparison in real-world scenarios, evaluated by IQA metrics.

Method	Snow				Haze				Rain			
	Q-Align	CLIP-IQA	LIQE	MUSIQ	Q-Align	CLIP-IQA	LIQE	MUSIQ	Q-Align	CLIP-IQA	LIQE	MUSIQ
Chen et al.[11]	3.5898	0.4959	3.1256	60.2062	3.1109	0.3373	2.0729	54.0597	3.7629	0.4201	2.5429	54.2367
WGWS [69]	3.5901	0.5026	3.1042	60.4800	3.1137	0.3643	2.1464	54.0680	3.7986	0.4428	2.5310	54.5487
PromptIR [37]	3.6492	0.5291	3.2397	61.1700	3.0906	0.3757	2.0673	53.8121	3.8074	0.4466	2.5622	54.6686
OneRestore [18]	3.5884	0.5089	3.1478	61.3300	2.9825	0.3293	2.0571	53.9140	3.7019	0.4167	2.4556	55.0806
DA-CLIP [33]	3.6261	0.5219	3.2410	61.1583	3.1301	0.3687	2.0797	54.4134	3.8144	0.4656	2.5810	54.9613
Ours	3.9569	0.5918	3.9458	67.7990	3.5608	0.4561	3.0267	63.3000	4.0283	0.5623	3.2945	64.1187

Table 3: Performance comparison in real-world scenarios, evaluated by GPT-4o.

Weather	Metric	Chen et al.	WGWS	PromptIR	OneRestore	DA-CLIP	DFPIR	JarvisIR	Ours
Snow	Artifact Removal \uparrow	2.949	2.664	3.057	3.116	3.047	–	3.570	4.421
	Weather Resilience \uparrow	3.014	3.045	3.172	3.440	3.128	–	3.610	4.355
	Overall Visual Quality \uparrow	3.012	2.936	3.232	3.464	3.003	–	3.730	4.393
Haze	Artifact Removal \uparrow	3.142	3.015	3.083	3.415	3.071	3.170	3.650	4.074
	Weather Resilience \uparrow	3.056	2.935	3.014	3.322	3.016	3.140	3.450	4.015
	Overall Visual Quality \uparrow	3.070	3.098	2.978	3.415	3.211	3.240	3.580	3.948
Rain	Artifact Removal \uparrow	2.965	2.978	3.371	3.359	3.275	3.340	3.710	4.254
	Weather Resilience \uparrow	2.841	2.923	3.323	3.222	3.159	3.150	3.690	4.007
	Overall Visual Quality \uparrow	2.984	3.014	3.314	3.201	3.163	3.180	3.870	3.896

Only agents with a high likelihood of success, based on past performance, submit bids. The system ranks the bidding agents by their historical success rates and selects the top-ranked agent to handle the restoration task. Once the restoration is completed, the system evaluates the result through a two-step process: (i) The CLIP model re-analyzes the restored image to check for the targeted degradation. (ii) An objective Image Quality Assessment (IQA) score is calculated to assess the quality improvement. Specifically, we adhere to the PIQO reward configuration; see Eq. (1).

If the IQA score decreases compared to the previous round, the restoration is considered a failure. In this case, the system reverts the image to its previous state, removes the failed agent from the candidate list, and selects the next highest-ranked agent for another attempt. This process continues until a successful restoration is achieved or three consecutive failures occur, at which point the image with the highest IQA score is returned.

If the restoration does not result in a decrease in IQA score, the system checks whether further degradation is present using the CLIP model. If degradation is still detected, the restoration is considered partially successful, and the system enters the next round. The bidding process is re-initiated, excluding the agent from the previous round to avoid redundancy. If no further degradation is detected, the restoration is considered complete, and the image is returned as the final output.

To avoid computational overload, the system limits the number of agents involved in a single restoration to three. If three consecutive restoration attempts result in failure (*i.e.*, successive IQA drops), the process terminates, and the image with the highest IQA score is returned.

4.3 Training Strategy

We adopt the dual-level reinforcement learning strategy to train a DSANet [12]-based multi-agent system for real-world weather adaptation, utilizing eight NVIDIA RTX 4090 GPUs. The training process begins with a cold start on the HFLS-Weather dataset, using the Adam optimizer with a batch size of eight and a learning rate of 0.0001 for up to 100 epochs. Early stopping is applied based on the validation loss. At this stage, we also fine-tune the rain sub-model on the SPA+ dataset[69] to further improve rain removal. At the local level, task-specific restoration agents (*e.g.*, deraining, dehazing, desnowing) are enhanced via Perturbation-driven Image Quality Optimization (PIQO), guided by weighted image quality assessment (IQA) rewards with weights $w_1 = 0.2$, $w_2 = 1$, and $w_3 = 0.2$. The training leverages real-world data, including 2,318 hazy images from the URHI dataset [25], and 2,433 rainy images and 2,018 snowy images from the WReal dataset [56], with a learning rate of 0.0001 and a batch size of 16. At the global level, the multi-agent system is further optimized using a batch size of 16 and a learning rate of 0.0001.

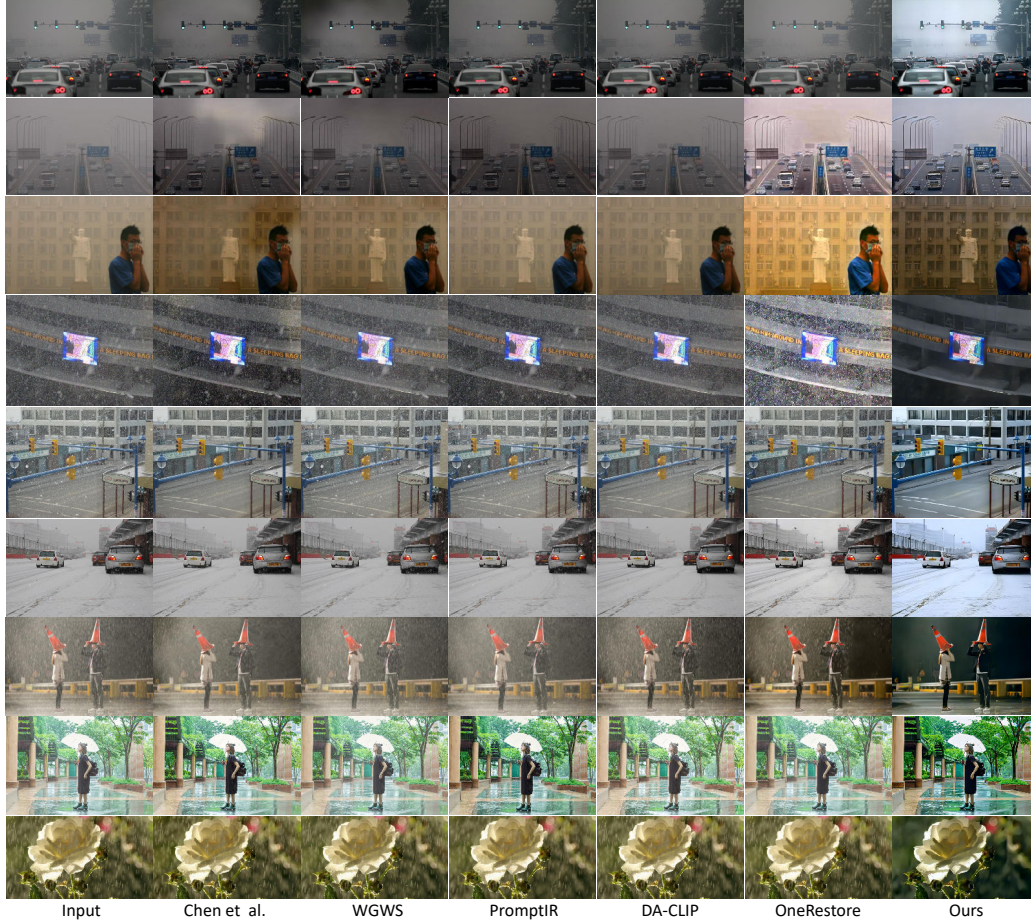


Figure 3: Visual comparisons of real images under haze, snow, and rain, with [11, 18, 33, 37, 69].

5 Experimental Results

To assess model performance in removing weather artifacts, we use the WReal dataset [56], which includes 4,322 real haze images from RTTS [25], 2,320 real rain images from DDN-SIRR [50] and Real3000 [31] (excluding synthetic scenes), and 1,329 real snow images from Snow100K [32].

5.1 Performance Comparison with State-of-the-Art Methods

Quantitative comparison. In real-world scenarios, the lack of labeled images affected by haze, snow, or rain complicates the evaluation of image restoration methods. Metrics such as CLIP-IQA [47] and Q-Align [53], originally designed for general datasets, often fail to capture subtle noise and residual artifacts, resulting in inflated scores that misrepresent visual quality. To address these issues, besides IQA metrics, we use GPT-4o [34] for additional evaluation across artifact removal, weather resilience, and overall visual quality. Artifact removal assesses artifact suppression and color accuracy, while weather resilience evaluates model robustness in more challenging cases. Overall visual quality measures the aesthetic coherence of the image.

Table 2 and Table 3 show the results of common image quality metrics and GPT-4o evaluation, comparing with recent image restoration methods under adverse weather conditions, including Chen et al.[11], WGWS[69], PromptIR[37], OneRestore[18], DA-CLIP[33], DFPIR [45], and JarvisIR [29]. From the results, we observe the following: (i) *Our method outperforms all competitors under snow, haze, and rain*, demonstrating strong generalization across diverse real-world degradations. (ii) *Our method achieves the highest scores in all IQA metrics*, reflecting superior visual fidelity and semantic relevance. (iii) *GPT-4o’s perceptual evaluation highlights our method’s excellence* in artifact removal,

Table 4: Comparison of models that are pre-trained on various synthetic and real datasets as different “cold starts”, followed by further finetuning with our PIQO approach.

Metric	Snow				Haze			Rain			
	RealSnow	Snow100K	Our Snow	Our Snow+Haze	OTS	ITS	Our Haze	SPA+	Rain1300	Our Rain	Our Rain+Haze
Q-Align	3.6974	3.7490	3.8482	3.8693	3.1220	3.1014	3.5329	3.7805	3.6974	3.9318	3.9205
CLIP-IQA	0.5315	0.5149	0.5653	0.5625	0.3846	0.3697	0.4496	0.4612	0.4205	0.5340	0.5615
LIQE	3.3386	3.4609	3.7094	3.7741	2.1239	2.1412	3.0120	2.6766	2.5681	2.9805	3.0485
MUSIQ	63.5571	64.2048	69.86	69.86	54.8760	54.5783	63.6006	56.5147	55.2493	60.4364	61.8700



Figure 4: Visual ablation study of the framework components.

weather resilience, and overall visual quality. (iv) While competing methods fluctuate across different weather conditions, our approach maintains stable and superior performance, demonstrating that *real-world refinement via dual-level reinforcement learning significantly boosts generalization and robustness* beyond the models trained solely on synthetic data.

Visual comparison. Figure 3 shows the visual comparison results, where the effectiveness of our approach is demonstrated across different weather conditions, including haze, snow, and rain. As shown, our method consistently delivers superior restoration quality, better preserving fine details, colors, and structural integrity of the scene, while others may fail to remove weather degradations, recover important features or introduce artifacts, particularly in challenging real weather conditions.

Latency comparison. Our Multi-Agent System incurs higher latency (570 ms) due to running multiple specialized models, yet it achieves superior restoration quality under complex weather. Compared with single-model baselines such as OneRestore (17 ms), Chen et al. (18 ms), WGWS (95 ms), and PromptIR (208 ms), our framework is slower but more robust. At the same time, it remains far more efficient than other multi-agent systems like DA-CLIP (6543 ms) and JarvisIR (15250 ms), striking a favorable balance between efficiency and performance.

5.2 Ablation Study

Evaluation on the “cold starts.” To evaluate the effectiveness of our high-fidelity synthetic dataset for cold-start pretraining, we conduct studies on both single-degradation and mixed-weather datasets, comparing models initialized on different synthetic datasets and then refined using our PIQO.

As the results in Table 4, we have the following observations. (i) *Superiority of High-Quality Cold Start*: Models initialized with HFLS-Weather show significant improvements in image quality over those trained on prior public datasets for snow, haze, and rain. (ii) *Cross-Weather Pretraining Helps*: Incorporating weather diversity in pretraining, such as combining snow and haze, enhances performance, suggesting that exposure to multiple degradation types improves generalization during PIQO finetuning. *Additional comparisons of HFLS-Weather are in the Appendix.*

Evaluation of the framework design. To assess the contribution of each component, we conduct ablation studies under real-world weather conditions using three quantitative metrics: CLIP-IQA, LIQE, and Q-Align. The *Basic* model refers to the baseline image restoration network pretrained on our HFLS-Weather synthetic dataset, while *Agent* denotes the proposed multi-agent coordination system. As shown in Table 5 and Figure 4: (i) adding the PIQO training significantly enhances perceptual quality, especially under challenging conditions like rain and snow; (ii) the Agent framework improves adaptive restoration by dynamically dispatching specialized agents; and (iii) combining PIQO with Agent yields the best performance across all metrics, highlighting the effectiveness of joint local optimization and global coordination.

Table 5: Ablation study of the framework components under snow, haze, and rain.

Method	Snow			Haze			Rain		
	CLIP-IQA	Q-Align	LIQE	CLIP-IQA	Q-Align	Q-Align	CLIP-IQA	Q-Align	Q-Align
Basic	0.4774	3.6649	3.1794	0.3661	3.2673	2.0232	0.4392	3.7678	2.5349
Basic + Agent	0.5242	3.7415	3.4893	0.3814	3.2977	2.2302	0.4721	3.8785	2.6871
Basic + PIQO	0.5653	3.8482	3.7094	0.4496	3.5329	3.0120	0.5340	3.9318	2.9805
Basic + PIQO + Agent	0.5918	3.9458	3.9569	0.4561	3.5608	3.0267	0.5623	4.0283	3.2945

6 Conclusion

We develop a dual-level reinforcement learning framework for real-world adverse weather image restoration, combining a physics-driven synthetic dataset (HFLS-Weather) with a two-tier adaptive learning system. At the local level, weather-specific models are refined using perturbation-driven optimization without paired supervision. At the global level, a meta-controller dynamically schedules model execution based on degradation patterns. Nevertheless, the multi-agent system introduces extra inference-time overhead as a result of its multi-round interactions.

Potential negative societal impacts. While our method improves visual robustness in adverse conditions, it may be misused for surveillance or deepfake generation, and poses risks in safety-critical applications without proper validation. Responsible use and safeguards are necessary.

Acknowledgment

This work was supported by the Research Start-up Fund for Prof. Xiaowei Hu at the Guangzhou International Campus, South China University of Technology (Grant No. K3250310).

References

- [1] Guillaume Astruc, Nicolas Dufour, Ioannis Siglidis, Constantin Aronsson, Nacim Bouia, Stephanie Fu, Romain Loiseau, Van Nguyen Nguyen, Charles Raude, Elliot Vincent, Lintao Xu, Hongyu Zhou, and Loic Landrieu. OpenStreetView-5M: The many roads to global visual geolocation. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2024.
- [2] Siavash Arjomand Bigdeli and Matthias Zwicker. Image restoration using autoencoding priors. *arXiv:1703.09964*, 2017. Preprint.
- [3] Siavash Arjomand Bigdeli, Meiguang Jin, Paolo Favaro, and Matthias Zwicker. Deep mean-shift priors for image restoration. In *Adv. Neural Inf. Process. Syst.*, pages 763–772, 2017.
- [4] Bolun Cai, Xiangmin Xu, Kui Jia, Chunmei Qing, and Dacheng Tao. DehazeNet: An end-to-end system for single image haze removal. *IEEE Trans. Image Process.*, 2016.
- [5] Jr. Chavez and S. Pat. An improved dark-object subtraction technique for atmospheric scattering correction of multispectral data. *Remote Sens. Environ.*, 24(3):459–479, 1988.
- [6] Haoyu Chen, Wenbo Li, Jinjin Gu, Jingjing Ren, Sixiang Chen, Tian Ye, Renjing Pei, Kaiwen Zhou, Fenglong Song, and Lei Zhu. RestoreAgent: Autonomous image restoration agent via multimodal large language models. In *Adv. Neural Inf. Process. Syst.*, 2024.
- [7] Jie Chen, Cheen-Hau Tan, Junhui Hou, Lap-Pui Chau, and He Li. Robust video content alignment and compensation for rain removal in a cnn framework. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 6286–6295, 2018.
- [8] Sixiang Chen, Tian Ye, Kai Zhang, Zhaohu Xing, Yunlong Lin, and Lei Zhu. Teaching tailored to talent: Adverse weather restoration via prompt pool and depth-anything constraint. In *Eur. Conf. Comput. Vis.*, pages 95–115, 2024.
- [9] Sixiang Chen, Jinbin Bai, Zhuoran Zhao, Tian Ye, Qingyu Shi, Donghao Zhou, Wenhao Chai, Xin Lin, Jianzong Wu, Chao Tang, Shilin Xu, Tao Zhang, Haobo Yuan, Yikang Zhou, Wei Chow, Linfeng Li, Xiangtai Li, Lei Zhu, and Lu Qi. An empirical study of gpt-4o image generation capabilities. *arXiv preprint arXiv:2504.05979*, 2025.

- [10] Wei-Ting Chen, Hao-Yu Fang, Cheng-Lin Hsieh, Cheng-Che Tsai, I Chen, Jian-Jiun Ding, Sy-Yen Kuo, et al. All snow removed: Single image desnowing algorithm using hierarchical dual-tree complex wavelet representation and contradict channel loss. In *Int. Conf. Comput. Vis.*, 2021.
- [11] Wei-Ting Chen, Zhi-Kai Huang, Cheng-Che Tsai, Hao-Hsiang Yang, Jian-Jiun Ding, and Sy-Yen Kuo. Learning multiple adverse weather removal via two-stage knowledge learning and multi-contrastive regularization: Toward a unified model. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2022.
- [12] Yuning Cui and Alois Knoll. Dual-domain strip attention for image restoration. *Neural Networks*, 171: 429–439, 2024.
- [13] Zijun Deng, Lei Zhu, Xiaowei Hu, Chi-Wing Fu, Xuemiao Xu, Qing Zhang, Jing Qin, and Pheng-Ann Heng. Deep multi-model fusion for single-image dehazing. In *Int. Conf. Comput. Vis.*, 2019.
- [14] Guanglu Dong, Tianheng Zheng, Yuanzhouhan Cao, Linbo Qing, and Chao Ren. Channel consistency prior and self-reconstruction strategy based unsupervised image deraining. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2025.
- [15] Xueyang Fu, Jiabin Huang, Delu Zeng, Yue Huang, Xinghao Ding, and John Paisley. Removing rain from single images via a deep detail network. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2017.
- [16] Kshitiz Garg and Shree K. Nayar. Vision and rain. *Int. J. Comput. Vis.*, 2007.
- [17] Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. DeepSeek-R1: Incentivizing reasoning capability in LLMs via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- [18] Yu Guo, Yuan Gao, Yuxu Lu, Ryan Wen Liu, and Shengfeng He. Onerestore: A universal restoration framework for composite degradation. In *Eur. Conf. Comput. Vis.*, 2024.
- [19] Kaiming He, Jian Sun, and Xiaoou Tang. Single image haze removal using dark channel prior. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2010.
- [20] Xiaowei Hu, Chi-Wing Fu, Lei Zhu, and Pheng-Ann Heng. Depth-attentional features for single-image rain removal. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 8022–8031, 2019.
- [21] Xiaowei Hu, Lei Zhu, Tianyu Wang, Chi-Wing Fu, and Pheng-Ann Heng. Single-image real-time rain removal based on depth-guided non-local features. *IEEE Trans. Image Process.*, 2021.
- [22] Kui Jiang, Zhongyuan Wang, Peng Yi, Chen Chen, Baojin Huang, Yimin Luo, Jiayi Ma, and Junjun Jiang. Multi-scale progressive fusion network for single image deraining. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2020.
- [23] Junjie Ke, Qifei Wang, Yilin Wang, Peyman Milanfar, and Feng Yang. Musiq: Multi-scale image quality transformer. In *Int. Conf. Comput. Vis.*, pages 5148–5157, 2021.
- [24] Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete Xiao, Spencer Whitehead, Alexander C. Berg, Wan-Yen Lo, et al. Segment anything. In *Int. Conf. Comput. Vis.*, pages 4015–4026, 2023.
- [25] Boyi Li, Wenqi Ren, Dengpan Fu, Dacheng Tao, Dan Feng, Wenjun Zeng, and Zhangyang Wang. Benchmarking single-image dehazing and beyond. *IEEE Trans. Image Process.*, 28(1):492–505, 2018.
- [26] Ruoteng Li, Loong-Fah Cheong, and Robby T. Tan. Heavy rain image restoration: Integrating physics model and conditional adversarial learning. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2019.
- [27] Ruoteng Li, Robby T. Tan, and Loong-Fah Cheong. All in one bad weather removal using architectural search. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2020.
- [28] Zhengqi Li and Noah Snavely. Megadepth: Learning single-view depth prediction from internet photos. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2018.
- [29] Yunlong Lin, Zixu Lin, Haoyu Chen, Panwang Pan, Chenxin Li, Sixiang Chen, Kairun Wen, Yeying Jin, Wenbo Li, and Xinghao Ding. JarvisIR: Elevating autonomous driving perception with intelligent image restoration. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 22369–22380, 2025.
- [30] Fayao Liu, Chunhua Shen, and Guosheng Lin. Deep convolutional neural fields for depth estimation from a single image. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2015. URL <http://arxiv.org/abs/1411.6387>.

- [31] Yang Liu, Ziyu Yue, Jinshan Pan, and Zhixun Su. Unpaired learning for deep image deraining with rain direction regularizer. In *Int. Conf. Comput. Vis.*, 2021.
- [32] Yun-Fu Liu, Da-Wei Jaw, Shih-Chia Huang, and Jenq-Neng Hwang. DesnowNet: Context-aware deep network for snow removal. *IEEE Trans. Image Process.*, 2018.
- [33] Ziwei Luo, Fredrik K. Gustafsson, Zheng Zhao, Jens Sjölund, and Thomas B Schön. Controlling vision-language models for universal image restoration. In *Int. Conf. Learn. Represent.*, 2024.
- [34] OpenAI. Hello GPT-4o, 2024. <https://openai.com/index/hello-gpt-4o/>.
- [35] Ozan Özdenizci and Robert Legenstein. Restoring vision in adverse weather conditions with patch-based denoising diffusion models. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2023.
- [36] Prashant W. Patil, Sunil Gupta, Santu Rana, Svetha Venkatesh, and Subrahmanyam Murala. Multi-weather image restoration via domain translation. In *Int. Conf. Comput. Vis.*, 2023.
- [37] Vaishnav Potlapalli, Syed Waqas Zamir, Salman Khan, and Fahad Shahbaz Khan. Promptir: Prompting for all-in-one blind image restoration. In *Adv. Neural Inf. Process. Syst.*, 2023.
- [38] Rui Qian, Robby T. Tan, Wenhan Yang, Jiajun Su, and Jiaying Liu. Attentive generative adversarial network for raindrop removal from a single image. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2018.
- [39] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *Int. Conf. Mach. Learn.*, pages 8748–8763, 2021.
- [40] Christos Sakaridis, Dengxin Dai, Simon Hecker, and Luc Van Gool. Model adaptation with synthetic and real data for semantic dense foggy scene understanding. In *Eur. Conf. Comput. Vis.*, pages 707–724, 2018.
- [41] Christos Sakaridis, Dengxin Dai, and Luc Van Gool. Semantic foggy scene understanding with synthetic data. *Int. J. Comput. Vis.*, 126:973–992, 2018.
- [42] Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Y Wu, et al. DeepSeekMath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
- [43] Haozhan Shen, Peng Liu, Jingcheng Li, Chunxin Fang, Yibo Ma, Jiajia Liao, Qiaoli Shen, Zilun Zhang, Kangjia Zhao, Qianqian Zhang, et al. VLM-R1: A stable and generalizable r1-style large vision-language model. *arXiv preprint arXiv:2504.07615*, 2025.
- [44] Yuda Song, Zhuqing He, Hui Qian, and Xin Du. Vision transformers for single image dehazing. *IEEE Trans. Image Process.*, 2023.
- [45] Xiangpeng Tian, Xiangyu Liao, Xiao Liu, Meng Li, and Chao Ren. Degradation-aware feature perturbation for all-in-one image restoration. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 28165–28175, 2025.
- [46] Jeya Maria Jose Valanarasu, Rajeev Yasarla, and Vishal M. Patel. Transweather: Transformer-based restoration of images degraded by adverse weather conditions. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2022.
- [47] Jianyi Wang, Kelvin CK Chan, and Chen Change Loy. Exploring clip for assessing the look and feel of images. In *AAAI Conf. Artif. Intell.*, volume 37, pages 2555–2563, 2023.
- [48] Ruiyi Wang, Yushuo Zheng, Zicheng Zhang, Chunyi Li, Shuaicheng Liu, Guangtao Zhai, and Xiaohong Liu. Learning hazing to dehazing: Towards realistic haze generation for real-world image dehazing. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2025.
- [49] Yinglong Wang, Chao Ma, and Jianzhuang Liu. Smartassign: Learning a smart knowledge assignment strategy for deraining and desnowing. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2023.
- [50] Wei Wei, Deyu Meng, Qian Zhao, Zongben Xu, and Ying Wu. Semi-supervised transfer learning for image rain removal. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2019.
- [51] T. Weyand, A. Araujo, B. Cao, and J. Sim. Google Landmarks Dataset v2 - A Large-Scale Benchmark for Instance-Level Recognition and Retrieval. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2020.
- [52] Haoning Wu, Zicheng Zhang, Weixia Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Yixuan Gao, Annan Wang, Erli Zhang, Wenxiu Sun, et al. Q-align: Teaching Imms for visual scoring via discrete text-defined levels. *arXiv preprint arXiv:2312.17090*, 2023.

- [53] Haoning Wu, Zicheng Zhang, Weixia Zhang, Chaofeng Chen, Liang Liao, Chunyi Li, Yixuan Gao, Annan Wang, Erli Zhang, Wenxiu Sun, et al. Q-align: Teaching Imms for visual scoring via discrete text-defined levels. In *Int. Conf. Mach. Learn.*, 2024.
- [54] Jie Xiao, Xueyang Fu, Aiping Liu, Feng Wu, and Zheng-Jun Zha. Image de-raining transformer. *IEEE Trans. Pattern Anal. Mach. Intell.*, 2022.
- [55] Jiaqi Xu, Xiaowei Hu, Lei Zhu, Qi Dou, Jifeng Dai, Yu Qiao, and Pheng-Ann Heng. Video dehazing via a multi-range temporal alignment network with physical prior. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2023.
- [56] Jiaqi Xu, Mengyang Wu, Xiaowei Hu, Chi-Wing Fu, Qi Dou, and Pheng-Ann Heng. Towards real-world adverse weather image restoration: Enhancing clearness and semantics with vision-language models. In *Eur. Conf. Comput. Vis.*, pages 147–164, 2024.
- [57] Jiaqi Xu, Xiaowei Hu, Lei Zhu, and Pheng-Ann Heng. Unifying physically-informed weather priors in a single model for image restoration across multiple adverse weather conditions. *IEEE Trans. Circuits Syst. Video Technol.*, 2025.
- [58] Hao Yang, Liyuan Pan, Yan Yang, and Wei Liang. Language-driven all-in-one adverse weather removal. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 24902–24912, 2024.
- [59] Lihe Yang, Bingyi Kang, Zilong Huang, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything: Unleashing the power of large-scale unlabeled data. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2024.
- [60] Lihe Yang, Bingyi Kang, Zilong Huang, Zhen Zhao, Xiaogang Xu, Jiashi Feng, and Hengshuang Zhao. Depth anything v2. *arXiv preprint arXiv:2406.09414*, 2024.
- [61] Wenhan Yang, Robby T. Tan, Jiashi Feng, Jiaying Liu, Zongming Guo, and Shuicheng Yan. Deep joint rain detection and removal from a single image. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2017.
- [62] Wenhan Yang, Robby T Tan, Jiashi Feng, Zongming Guo, Shuicheng Yan, and Jiaying Liu. Joint rain detection and removal from a single image with contextualized deep networks. *IEEE Trans. Pattern Anal. Mach. Intell.*, 42(6):1377–1393, 2019.
- [63] Tian Ye, Sixiang Chen, Jinbin Bai, Jun Shi, Chenghao Xue, Jingxia Jiang, Junjie Yin, Erkang Chen, and Yun Liu. Adverse weather removal with codebook priors. In *Int. Conf. Comput. Vis.*, 2023.
- [64] Howard Zhang, Yunhao Ba, Ethan Yang, Varan Mehra, Blake Gella, Akira Suzuki, Arnold Pfahnl, Chethan Chinder Chandrappa, Alex Wong, and Achuta Kadambi. WeatherStream: Light transport automation of single image deweathering. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2023.
- [65] Quan Zhang, Xiaoyu Liu, Wei Li, Hanting Chen, Junchao Liu, Jie Hu, Zhiwei Xiong, Chun Yuan, and Yunhe Wang. Distilling semantic priors from sam to efficient image restoration models. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, pages 25409–25419, 2024.
- [66] Weixia Zhang, Guangtao Zhai, Ying Wei, Xiaokang Yang, and Kede Ma. Blind image quality assessment via vision-language correspondence: A multitask learning perspective. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2023.
- [67] Kaiwen Zhu, Jinjin Gu, Zhiyuan You, Yu Qiao, and Chao Dong. An intelligent agentic system for complex image restoration problems. *arXiv preprint arXiv:2410.17809*, 2024.
- [68] Lei Zhu, Zijun Deng, Xiaowei Hu, Haoran Xie, Xuemiao Xu, Jing Qin, and Pheng-Ann Heng. Learning gated non-local residual for single-image rain streak removal. *IEEE Trans. Circuits Syst. Video Technol.*, 2020.
- [69] Yurui Zhu, Tianyu Wang, Xueyang Fu, Xuanyu Yang, Xin Guo, Jifeng Dai, Yu Qiao, and Xiaowei Hu. Learning weather-general and weather-specific features for image restoration under multiple adverse weather conditions. In *IEEE Conf. Comput. Vis. Pattern Recognit.*, 2023.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [\[Yes\]](#)

Justification: The main claims reflect the paper's contributions and scope for real-world adverse weather image restoration on developing a dual-level reinforcement learning framework and building the dataset.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [\[Yes\]](#)

Justification: Please see Section 6 for details.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA]

Justification: The paper does not include theoretical results.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: The method section provides details on how to reproduce the proposed model. The code and results will be publicly available on the publication of this work.

Guidelines:

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: This paper provides open access to the data and code. Please see more in supplemental material.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: The training and test details including various hyperparameters and optimizers are provided in Section 4.3 and Section 5.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: The improvement is substantial and evident, even in the absence of statistical analysis.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.

- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: These details are provided in Section 4.3.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines>?

Answer: [Yes]

Justification: The authors make sure to preserve anonymity.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: The positive impacts are in Introduction and the negative impacts are in Conclusion.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.

- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [No]

Justification: Providing effective safeguards is challenging for this task. But the authors discuss this issue in Conclusion.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: All related works are explicitly mentioned and properly respected.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.

- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. **New assets**

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [\[Yes\]](#)

Justification: The details of the dataset/code/model are discussed and submitted.

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. **Crowdsourcing and research with human subjects**

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [\[NA\]](#)

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. **Institutional review board (IRB) approvals or equivalent for research with human subjects**

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [\[NA\]](#)

Justification: The paper does not involve crowdsourcing nor research with human subjects.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.

- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. **Declaration of LLM usage**

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [NA]

Justification: The core method development in this research does not involve LLMs as any important, original, or non-standard components.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.

A Additional Experimental Results

A.1 Training on Different Synthetic Datasets

Table below compares the performance of models trained on different synthetic datasets for snow, haze, and rain conditions, using metrics such as Q-Align [53], CLIP-IQA [47], LIQE [66], and MUSIQ [23]. For snow, models trained on “Our Snow” and “Our Snow+Haze” datasets outperform others, with “Our Snow+Haze” achieving the highest Q-Align score of 3.7179 and the best CLIP-IQA score of 0.4964, indicating superior quality and alignment. Haze models also favor “Our Haze,” which scores highest in Q-Align (3.2673) and LIQE (2.2555), suggesting better restoration of haze-affected images compared to others like OTS and ITS. In the rain category, the “Our Rain+Haze” model excels across all metrics, particularly in Q-Align (3.8148) and MUSIQ (56.1142), outperforming models trained on Rain13k and “Our Rain.”

These results highlight the benefits of combining multiple weather conditions (rain and haze) in training, as it leads to more realistic and effective restoration. Overall, our dataset consistently outperforms other synthetic datasets, proving the effectiveness of HFLS-Weather in generating realistic and high-fidelity weather conditions for image restoration tasks.

Table 6: Performance comparison of models trained on different synthetic datasets.

Metric	Snow				Haze			Rain			
	RealSnow[69]	Snow100K[32]	Our Snow	Our Snow+Haze	OTS[25]	ITS[25]	Our Haze	SPA+[68]	Rain13k[22]	Our Rain	Our Rain+Haze
Q-Align	3.6037	3.6357	3.6649	3.7179	3.0942	3.0309	3.2673	3.7707	3.6357	3.7678	3.8148
CLIP-IQA	0.4727	0.5025	0.4774	0.4964	0.3994	0.3661	0.3786	0.4335	0.3839	0.4392	0.4439
LIQE	3.0512	3.2642	3.1794	3.3741	2.0663	2.0232	2.2555	2.4695	2.3275	2.5349	2.5779
MUSIQ	61.3510	61.6517	62.3326	62.3262	53.9367	53.9367	55.8514	55.1913	53.6375	55.4581	56.1142

A.2 Re-training Other Methods on the HFLS-Weather

A potential concern is that performance improvements may primarily come from the scale of the HFLS-Weather dataset rather than the proposed framework. To clarify this, we first report in the main paper (Table 5) the results of our model trained solely on HFLS-Weather without reinforcement learning (PIQO) or the agent framework, which already demonstrates the additional benefit of our algorithmic components.

To further disentangle the contributions, we re-trained two representative baselines, WGWS (CVPR 2023) and OneRestore (ECCV 2024), on HFLS-Weather using their released code. The quantitative results are presented in Table 7. Both baselines improve notably when trained on HFLS-Weather, confirming that the dataset provides strong supervision. Nevertheless, our full framework consistently outperforms them across all metrics and weather conditions, indicating that dataset scale alone does not account for the gains.

These results demonstrate two key points: (i) HFLS-Weather is indeed a valuable contribution that benefits existing methods, and (ii) the proposed PIQO and dual-level agent framework provide substantial additional improvements, establishing state-of-the-art performance under diverse weather degradations.

Table 7: Performance of re-trained baselines on HFLS-Weather. Metrics include LIQE, CLIP-IQA, Q-Align, and MUSIQ.

Method	Snow				Haze				Rain			
	LIQE	CLIP	Q-Align	MUSIQ	LIQE	CLIP	Q-Align	MUSIQ	LIQE	CLIP	Q-Align	MUSIQ
WGWS	3.71	0.54	3.40	65.67	3.31	0.40	2.57	56.76	3.81	0.47	2.70	56.62
OneRestore	3.73	0.55	3.56	65.32	3.38	0.41	2.67	57.13	3.83	0.48	2.68	58.67
Ours	3.84	0.56	3.70	66.30	3.53	0.44	3.01	63.60	3.93	0.53	2.98	60.43

B More Comparisons with the State-of-the-Art Methods



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 5: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 6: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 7: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 8: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 9: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 10: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours


Figure 11: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].




(a) Input



(b) Chen *et al.*

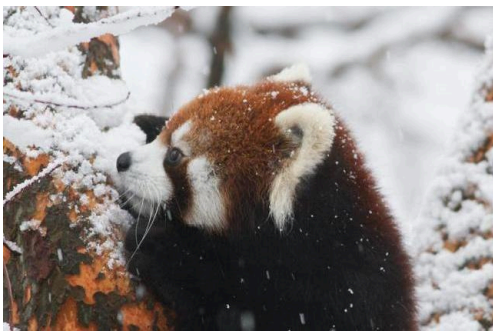

(c) WGWS

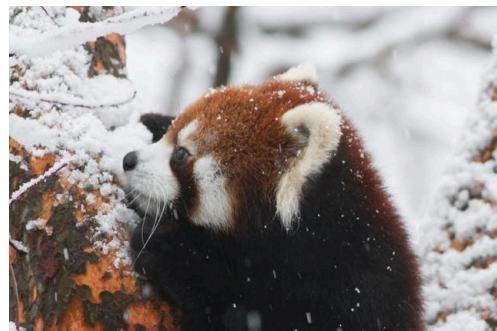


(d) PromptIR



(e) DACLIP



(f) OneRestore

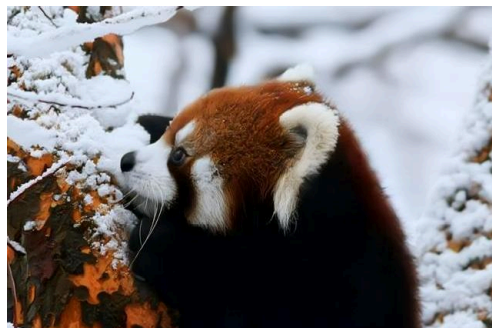

(g) Ours

Figure 12: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours


Figure 13: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].




(a) Input




(b) Chen *et al.*

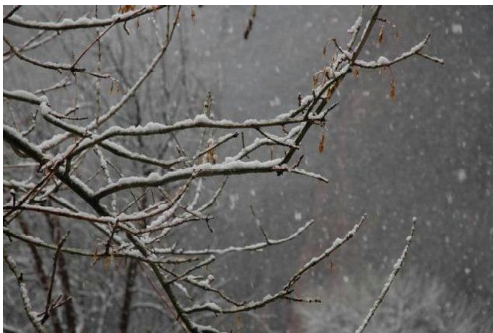

(c) WGWS

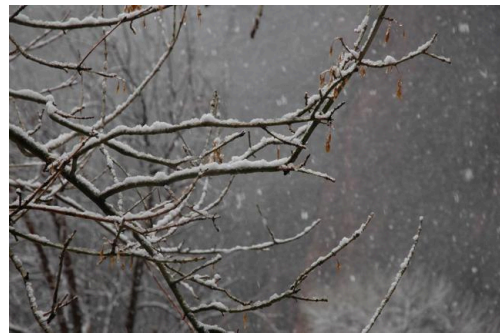

(d) PromptIR

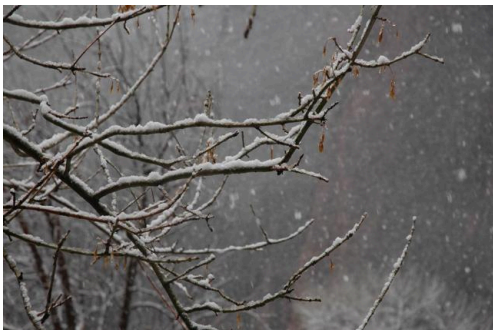

(e) DACLIP



(f) OneRestore



(g) Ours

Figure 14: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 15: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP




(f) OneRestore




(g) Ours


Figure 16: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].

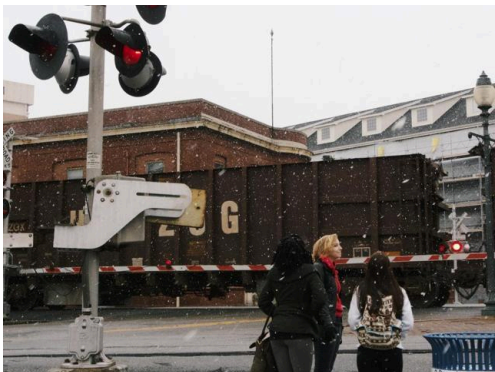


(a) Input

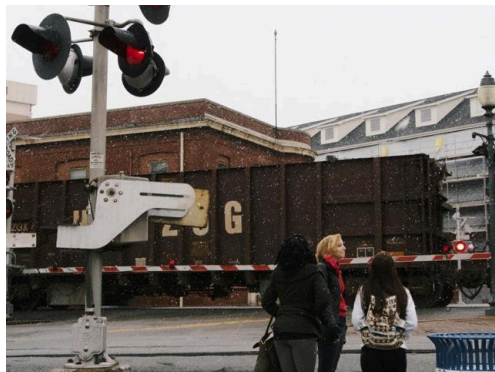


(b) Chen *et al.*

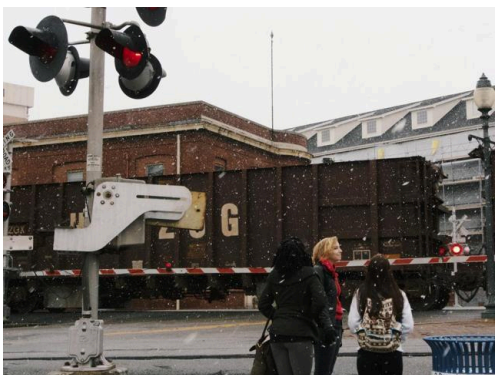


(c) WGWS

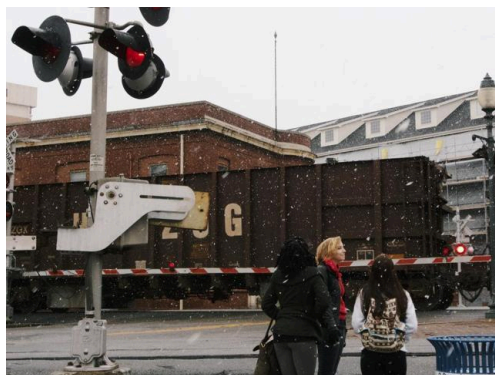

(d) PromptIR

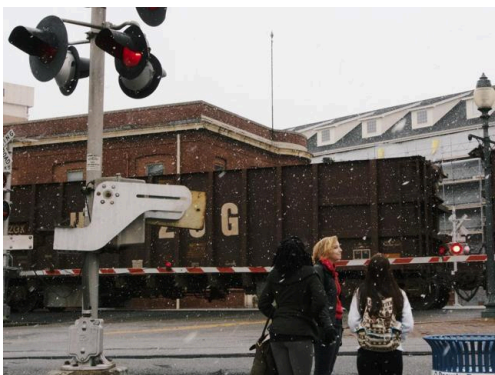

(e) DACLIP

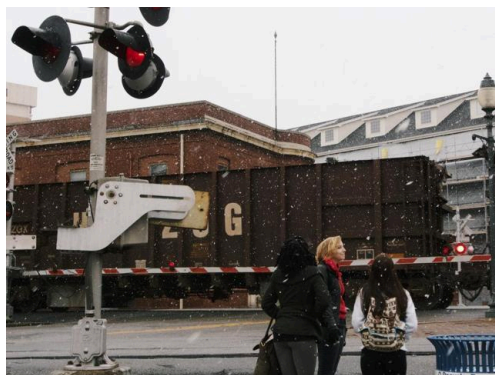


(f) OneRestore



(g) Ours

Figure 17: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].

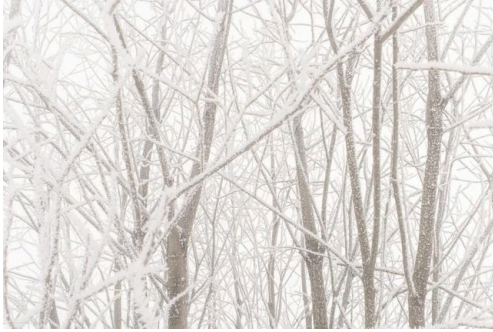

(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DAACLIP



(f) OneRestore



(g) Ours

Figure 18: Visual comparison of real-world images under snow with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 19: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS




(d) PromptIR



(e) DACLIP



(f) OneRestore

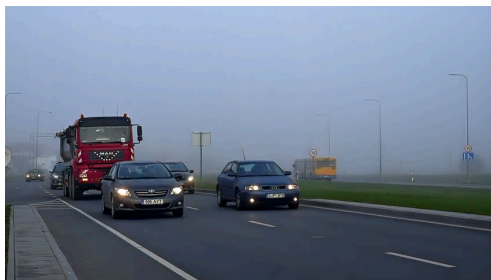

(g) Ours

Figure 20: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 21: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP




(f) OneRestore



(g) Ours

Figure 22: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].

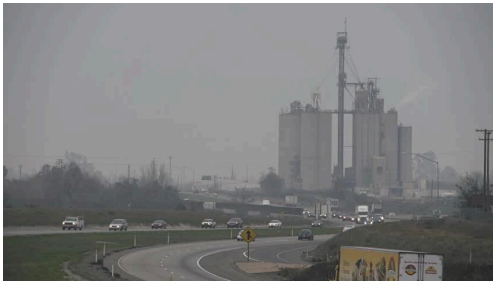

(a) Input




(b) Chen *et al.*



(c) WGWS




(d) PromptIR

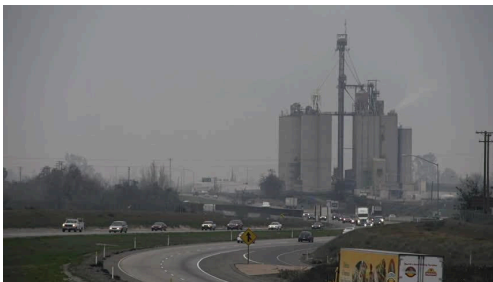

(e) DACLIP



(f) OneRestore

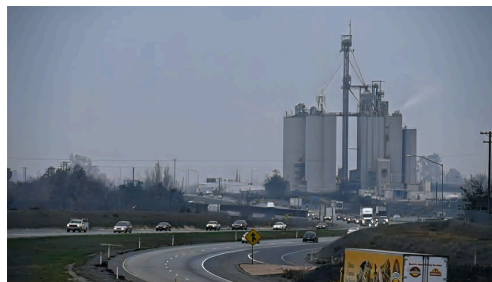

(g) Ours

Figure 23: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 24: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 25: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 26: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 27: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 28: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*




(c) WGWS




(d) PromptIR



(e) DACLIP

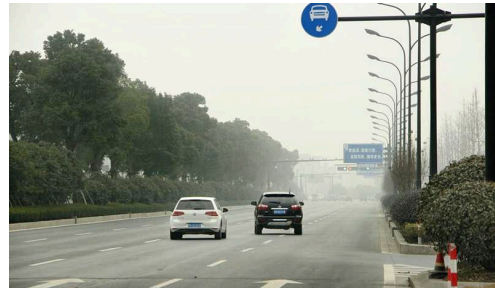

(f) OneRestore

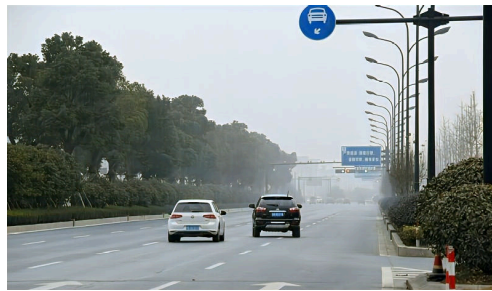

(g) Ours

Figure 29: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 30: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 31: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 32: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 33: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 34: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 35: Visual comparison of real-world images under haze with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 36: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 37: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 38: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 39: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 40: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP




(f) OneRestore




(g) Ours


Figure 41: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].

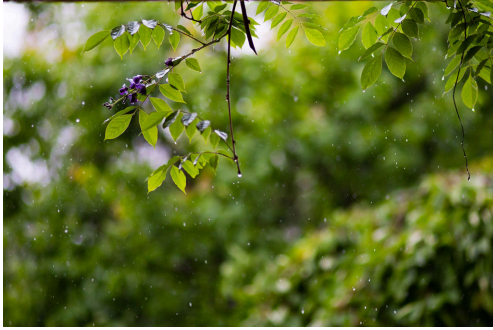


(a) Input

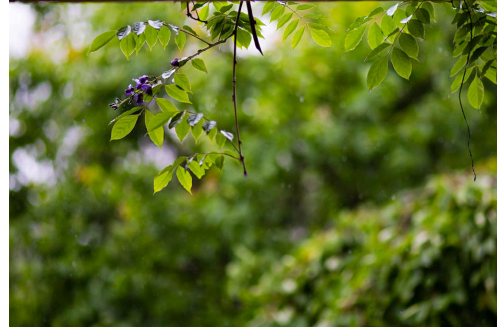


(b) Chen *et al.*

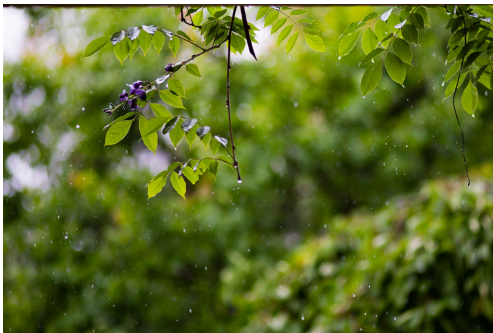

(c) WGWS

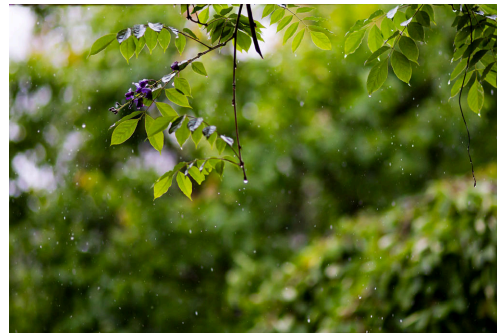


(d) PromptIR

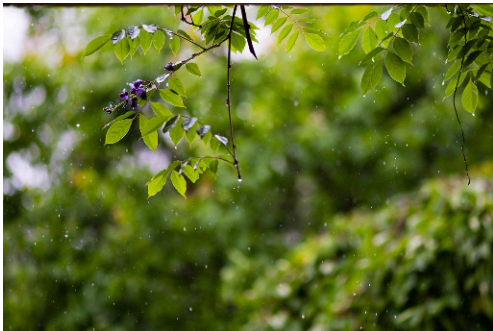

(e) DACLIP



(f) OneRestore

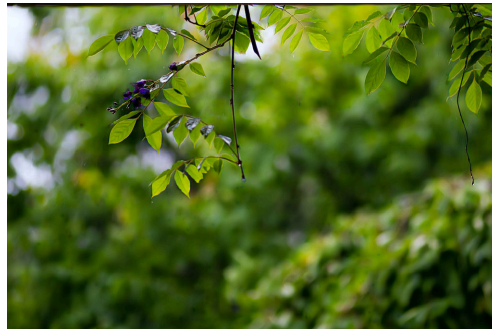

(g) Ours

Figure 42: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 43: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 44: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 45: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore




(g) Ours


Figure 46: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].




(a) Input

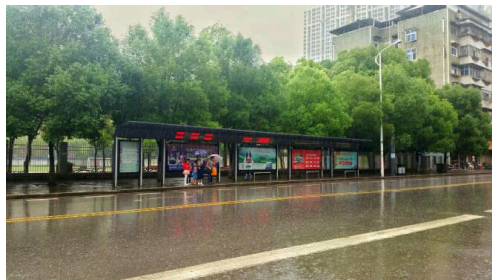

(b) Chen *et al.*

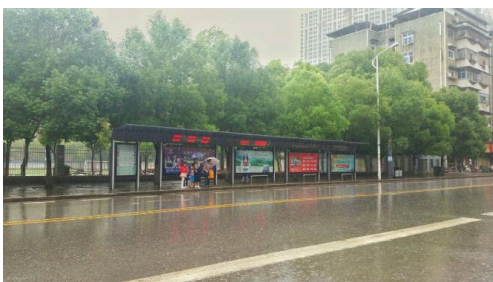

(c) WGWS

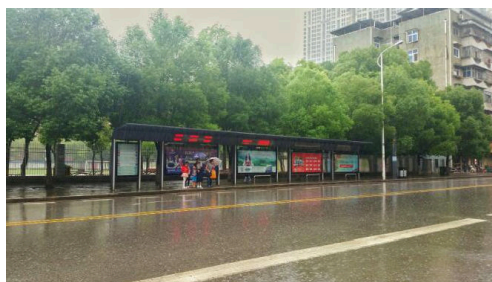


(d) PromptIR



(e) DACLIP



(f) OneRestore

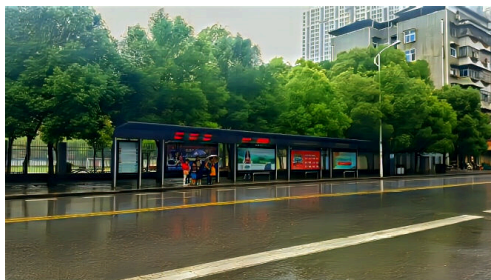

(g) Ours

Figure 47: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].



(a) Input



(b) Chen *et al.*



(c) WGWS



(d) PromptIR



(e) DACLIP



(f) OneRestore



(g) Ours

Figure 48: Visual comparison of real-world images under rain with [11, 18, 33, 37, 69].

C Additional Results Produced by Our Method

We provide more qualitative results under snow, haze, and rain conditions.



Input



Ours



Input



Ours



Input



Ours



Input



Ours

Figure 49: Additional results produced by our method (snow, set 1).



Input



Ours



Input



Ours



Input



Ours



Input



Ours

Figure 50: Additional results produced by our method (snow, set 2).



Input



Ours



Input



Ours



Input



Ours



Input



Ours

Figure 51: Additional results produced by our method (snow, set 3).



Input



Ours



Input



Ours



Input



Ours



Input



Ours



Input



Ours



Input



Ours



Input



Ours



Input



Ours

Figure 53: Additional results produced by our method (haze, set 2).



Input



Ours



Input




Ours



Input



Ours

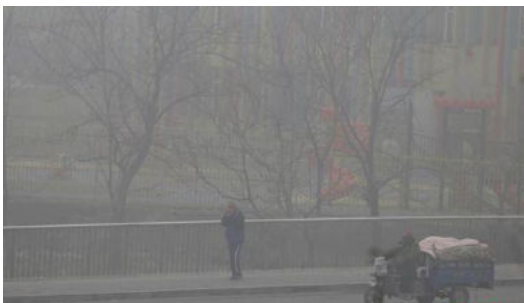

Input



Ours

Figure 54: Additional results produced by our method (haze, set 3).



Input



Ours



Input




Ours



Input



Ours

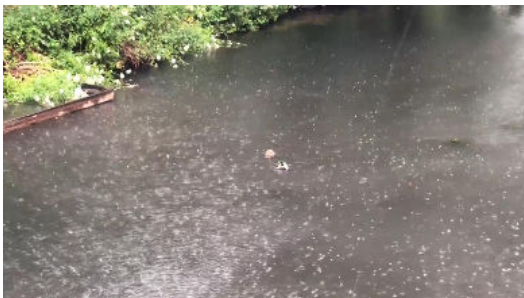

Input



Ours

Figure 55: Additional results produced by our method (rain, set 1).



Figure 56: Additional results produced by our method (rain, set 2).



Input




Ours




Input



Ours

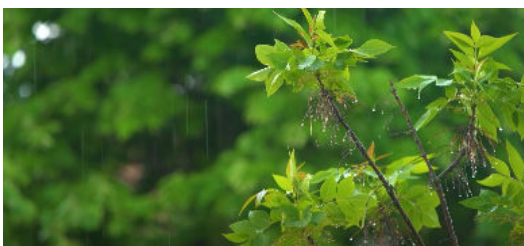

Input

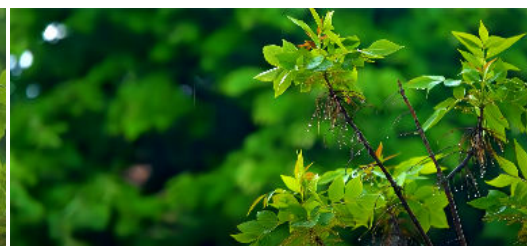

Ours




Input



Ours



Input

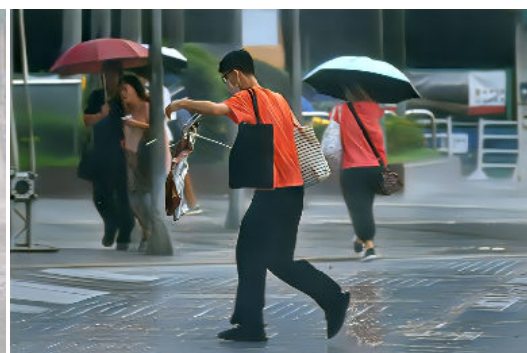

Ours

Figure 57: Additional results produced by our method (rain, set 3).