

Supervised Knowledge May Hurt Novel Class Discovery Performance

Anonymous authors

Paper under double-blind review

Abstract

Novel class discovery (NCD) aims to infer novel categories in an unlabeled dataset by leveraging prior knowledge of a labeled set comprising disjoint but related classes. Given that most existing literature focuses primarily on utilizing supervised knowledge from a labeled set at the methodology level, this paper considers the question: *Is supervised knowledge always helpful at different levels of semantic relevance?* To proceed, we first establish a novel metric, so-called *transfer leakage*, to measure the semantic similarity between labeled/unlabeled datasets. To show the validity of the proposed metric, we build up a large-scale benchmark with various degrees of semantic similarities between labeled/unlabeled datasets on ImageNet by leveraging its hierarchical class structure. The results based on the proposed benchmark show that the proposed *transfer leakage* is in line with the hierarchical class structure; and that NCD performance is consistent with the semantic similarities (measured by the proposed metric). Next, by using the proposed *transfer leakage*, we conduct various empirical experiments with different levels of semantic similarity, yielding that *supervised knowledge may hurt NCD performance*. Specifically, using supervised information from a low-similarity labeled set may lead to a suboptimal result as compared to using pure self-supervised knowledge. These results reveal the inadequacy of the existing NCD literature which usually assumes that supervised knowledge is beneficial. Finally, we develop a pseudo-version of the *transfer leakage* as a practical reference to decide if supervised knowledge should be used in NCD. Its effectiveness is supported by our empirical studies, which show that the pseudo *transfer leakage* (with or without supervised knowledge) is consistent with the corresponding accuracy based on various datasets.

1 Introduction

The combination of data, algorithms, and computing power has resulted in a boom in the field of artificial intelligence, particularly supervised learning with its large number of powerful deep models. These deep models are capable of properly identifying and clustering classes that are present in the training set (i.e., known/seen classes), matching or surpassing human performance. However, they lack reliable extrapolation capacity when confronted with novel classes (i.e., unseen classes) while humans can easily recognize the novel categories. A classic illustration is how effortlessly a person can readily discriminate (cluster) unseen but similar vehicles (e.g., trains and cars) based on prior experience. This motivated researchers to develop a challenge termed novel class discovery (NCD) (Han et al., 2019; Chi et al., 2021; Han et al., 2021; Zhong et al., 2021a), with the goal of discovering novel classes in an unlabeled dataset by leveraging knowledge from a labeled set, which contains related but disjoint classes.

Recently, the majority of works on NCD implicitly assumes that more data is better, and devotes to designing and developing neural networks to better utilize the supervised knowledge contained in the labeled set. For example, DTC Han et al. (2019), RS Han et al. (2021; 2020) and RSMKD Zhao & Han (2021) transfer supervised knowledge by pretraining the model on the labeled data. OpenMix Zhong et al. (2021b) mixes supervised knowledge from the labeled set and unsupervised knowledge from the unlabeled set to learn a joint label distribution. UNO Fini et al. (2021) combines supervised knowledge in a unified objective function.

Despite their remarkable performance, there is a less in-depth analysis of the supervised knowledge from the labeled set itself. Therefore, in this work, we investigate a fundamental question of NCD: *Is supervised knowledge always helpful?* Clearly, this question is naturally associated with the discrepancy between labeled and unlabeled sets. As mentioned by Chi et al. (2021), NCD is theoretically solvable when labeled and unlabeled sets share high-level semantic features. However, no quantitative analysis of semantic similarity was proposed. In this paper, we hypothesize that supervised knowledge would be beneficial when labeled and unlabeled sets share a high degree of semantic similarity but may be less beneficial *or even harmful* when semantic similarity is low. To examine the hypothesis, we first propose a quantitative metric, *transfer leakage*, to measure the semantic label similarity of the two datasets. Specifically, it quantifies the discriminative information in the labeled set leaked in the unlabeled set, i.e., how much information we can leverage from the labeled dataset to help improve its performance. More details are provided in Section 3.

To demonstrate the validity of *transfer leakage*, we establish a new *NCD benchmark* with multiple semantic similarity levels. Specifically, the new benchmark is constructed based on a large-scale dataset, ImageNet (Deng et al., 2009), by leveraging its hierarchical semantic information. It includes three difficulty levels, high, medium, and low semantic similarity, where each difficulty level includes two data settings. Based on the benchmark, our experiments confirm that semantic similarity is positively related with NCD performance on multiple pairs of labeled and unlabeled sets with varying semantic similarity under multiple baselines (Han et al., 2019; 2021; Fini et al., 2021; MacQueen et al., 1967). Also, a mutual validation between the proposed metric and the benchmark is conducted, which reveals that the *transfer leakage* corresponds strongly with NCD performance. Detailed information on the benchmark can be found in Section 4.

Based on the proposed metric and benchmark, we then analyze our core research question. Our experiments are conducted on the current state-of-the-art (SOTA) approaches (Fini et al., 2021; Zhong et al., 2021a; Han et al., 2021), comparing the NCD performance with (i.e., standard NCD) or without supervised information. Unexpectedly but reasonably, we observe that the latter can outperform the former in cases where the semantic similarity between the labeled and unlabeled sets is low, in contrast to the commonly held assumption that supervised knowledge (or more data) can improve NCD performance. As a by-product, this also raises a question of whether to use supervised or just self-supervised knowledge for a given dataset. To address this issue, we provide two practical solutions. (i) A data selection solution. We develop a pseudo-version of the proposed metric, namely *pseudo transfer leakage*, as a practical metric to infer the leakage of supervised knowledge and/or self-supervised knowledge. Thus, it serves as an instructive reference to decide what sort of data we intend to employ. (ii) A data combining solution. We develop a new model which smoothly combines supervised and self-supervised knowledge from the labeled set and achieves 3% and 5% improvement in both CIFAR100 (Krizhevsky, 2009) and ImageNet compared to SOTA. More information can be found in Section 5.

We summarize our contributions as follows:

- We find that using supervised knowledge from the labeled set may lead to suboptimal performance in low semantic NCD datasets. Based on this finding, we propose two practical methods and achieve 3% and 5% improvement in both CIFAR100 and ImageNet compared to SOTA.
- We introduce a theoretically reliable metric to measure the semantic similarity between labeled and unlabeled sets. A mutual validation is conducted between the proposed metric and a benchmark, which suggests that the proposed metric strongly agrees with NCD performance.
- We establish a comprehensive benchmark with varying degrees of difficulty based on ImageNet by leveraging its hierarchical semantic similarity. Besides, we empirically confirm that semantic similarity is indeed a significant factor influencing NCD performance.

2 Related Work

Novel class discovery (NCD) is a relatively new problem proposed in recent years, aiming to discover novel classes (i.e., assign them to several clusters) by making use of similar but different known classes. Unlike

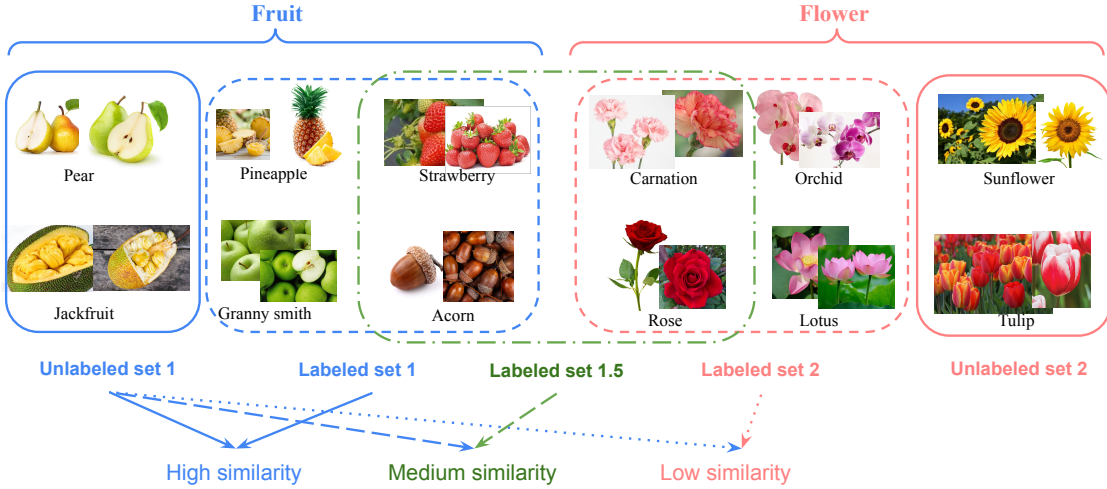


Figure 1: Illustration of how we construct the benchmark with varying levels of semantic similarity. Unlabeled set U_1 and labeled set L_1 are from the same superclass (fruit), whereas unlabeled set U_2 and labeled set L_2 belong to another superclass (flower). Labeled set $L_{1.5}$ is composed of half of L_1 and half of L_2 . If both the labeled and unlabeled classes are derived from the same superclass, i.e., (U_1, L_1) and (U_2, L_2) , we consider them a high semantic similarity split. In contrast, (U_1, L_2) and (U_2, L_1) are low semantic similarity splits, since the labeled and unlabeled classes are derived from distinct superclasses. In addition, we consider $(U_1, L_{1.5})$ and $(U_2, L_{1.5})$ to have medium semantic similarity because half of $L_{1.5}$ share the same superclass as U_1 .

unsupervised learning, NCD also requires labeled known-class data to help cluster novel-class data. NCD is first formalized in DTC (Han et al., 2019), but the study of NCD can be dated back to earlier works, such as KCL (Hsu et al., 2018) and MCL (Hsu et al., 2019). Both of these methods are designed for general task transfer learning and connect two models trained with labeled data and unlabeled data, respectively. In contrast, DTC first learns a data embedding on the labeled data with metric learning, then employs a deep embedded clustering method based on Xie et al. (2016) to cluster the novel-class data.

More recent works, such as RS (Han et al., 2021; 2020) and RSMKD (Zhao & Han, 2021), use self-supervised learning to boost feature extraction and use the learned features to obtain pairwise similarity estimates. Additionally, Zhao & Han (2021) improve RS by using information from both local and global views, as well as mutual knowledge distillation to promote information exchange and agreement. NCL (Zhong et al., 2021a) extracts and aggregates the pairwise pseudo-labels for the unlabeled data via contrastive learning and generates hard negatives by mixing the labeled and unlabeled data in a feature space. This idea of mixing data is also used in OpenMix (Zhong et al., 2021b), which mixes known-class and novel-class data to learn a joint label distribution. The current state-of-the-art, UNO (Fini et al., 2021), combines pseudo-labels with ground-truth labels in a unified objective function that enables better use of synergies between labeled and unlabeled data without requiring self-supervised pretraining. Additionally, Meta-discovery (Chi et al., 2021) indicates that NCD is theoretically solvable if known and unknown classes share high-level semantic features and propose a solution that links NCD to meta-learning.

3 Quantifying Semantic Similarity

In this section, we present a novel metric for measuring the semantic similarity between labeled and unlabeled sets.

3.1 NCD Framework

We denote (\mathbf{X}_l, Y_l) and (\mathbf{X}_u, Y_u) as random samples under the *labeled/unlabeled probability measures* $\mathbb{P}_{\mathbf{X}, Y}$ and $\mathbb{Q}_{\mathbf{X}, Y}$, respectively. $\mathbf{X}_l \in \mathcal{X}_l \subset \mathbb{R}^d$ and $\mathbf{X}_u \in \mathcal{X}_u \subset \mathbb{R}^d$ are the labeled/unlabeled feature vectors, $Y_l \in \mathcal{C}_l$ and $Y_u \in \mathcal{C}_u$ are the true labels of labeled/unlabeled data, where \mathcal{C}_l and \mathcal{C}_u are the label sets under the labeled

and unlabeled probability measures $\mathbb{P}_{\mathbf{X},Y}$ and $\mathbb{Q}_{\mathbf{X},Y}$, respectively. Given a labeled set $\mathcal{L}_n = (\mathbf{X}_{l,i}, Y_{l,i})_{i=1}^n$ independently drawn from the labeled probability measure $\mathbb{P}_{\mathbf{X},Y}$, and an unlabeled dataset $\mathcal{U}_m = (\mathbf{X}_{u,i})_{i=1}^m$ independently drawn from the unlabeled probability measure $\mathbb{Q}_{\mathbf{X}_u}$, our primary goal is to predict $Y_{u,i}$ given $\mathbf{X}_{u,i}$, where $Y_{u,i}$ is the label of the i -th unlabeled sample $\mathbf{X}_{u,i}$. We now give a general definition of NCD.

Definition 1 (Novel class discovery) Let $\mathbb{P}_{\mathbf{X}_l, Y_l}$ be a labeled probability measure on $\mathcal{X}_l \times \mathcal{C}_l$, and $\mathbb{Q}_{\mathbf{X}_u, Y_u}$ be an unlabeled probability measure on $\mathcal{X}_u \times \mathcal{C}_u$, with $\mathcal{C}_u \cap \mathcal{C}_l = \emptyset$. Given a labeled dataset \mathcal{L}_n sampled from $\mathbb{P}_{\mathbf{X}_l, Y_l}$ and an unlabeled dataset \mathcal{U}_m sampled from $\mathbb{Q}_{\mathbf{X}_u}$, novel class discovery aims to predict the labels of the unlabeled dataset based on \mathcal{L}_n and \mathcal{U}_m .

3.2 Transfer Leakage

For further investigating the effectiveness of supervised knowledge in NCD, we propose a quantitative metric, namely *transfer leakage*, to assess semantic similarity between labeled/unlabeled datasets. To the best of our knowledge, the question of how to measure the semantic similarity between the labeled and unlabeled sets in NCD remains unsolved.

To proceed, we begin with introducing Maximum Mean Discrepancy (MMD; Gretton et al. (2012)), which is used to measure the discrepancy of two distributions. For example, MMD of two random variables $\mathbf{Z} \sim \mathbb{P}_{\mathbf{Z}}$ and $\mathbf{Z}' \sim \mathbb{P}_{\mathbf{Z}'}$ is defined as:

$$\text{MMD}_{\mathcal{H}}(\mathbb{P}_{\mathbf{Z}}, \mathbb{P}_{\mathbf{Z}'}) := \sup_{\|h\|_{\mathcal{H}} \leq 1} \left(\mathbb{E}(h(\mathbf{Z})) - \mathbb{E}(h(\mathbf{Z}')) \right), \quad (1)$$

where \mathcal{H} is a class of functions $h : \mathcal{X}_u \rightarrow \mathbb{R}$, which is specified as a reproducing kernel Hilbert Space (RKHS) associated with a continuous kernel function $K(\cdot, \cdot)$. From (1), when MMD is large, the distributions between \mathbf{Z} and \mathbf{Z}' appear dissimilar.

In NCD, the unlabeled dataset is predicted by taking the information from the conditional probability $\mathbb{P}_{Y_l|\mathbf{X}_l}$ (usually presented by a pretrained neural network) of a labeled dataset. For example, if the distributions of $\mathbb{P}_{Y_l|\mathbf{X}_l=\mathbf{x}_u}$ under $Y_u = c$ and $Y_u = c'$ are significantly different, then its overall distribution discrepancy is large, yielding that more information can be leveraged in NCD. On this ground, we use MMD to quantify the discrepancy of the labeled probability measure $\mathbb{P}_{Y_l|\mathbf{X}_l}$ on \mathbf{X}_u under the unlabeled probability measure \mathbb{Q} , namely *transfer leakage*.

Definition 2 (Transfer leakage) The transfer leakage of NCD prediction under \mathbb{Q} based on the labeled conditional probability $\mathbb{P}_{Y_l|\mathbf{X}_l}$ is

$$T\text{-Leak}(\mathbb{Q}, \mathbb{P}) = \mathbb{E}_{\mathbb{Q}} \left(\text{MMD}_{\mathcal{H}}^2(\mathbb{Q}_{\mathbf{p}(\mathbf{X}_u)|Y_u}, \mathbb{Q}_{\mathbf{p}(\mathbf{X}'_u)|Y'_u}) \right), \quad (2)$$

where $(\mathbf{X}_u, Y_u), (\mathbf{X}'_u, Y'_u) \sim \mathbb{Q}$ are independent copies, the expectation $\mathbb{E}_{\mathbb{Q}}$ is taken with respect to Y_u and Y'_u under \mathbb{Q} , and $\mathbf{p}(\mathbf{x})$ is the conditional probability under $\mathbb{P}_{Y_l|\mathbf{X}_l}$ on an unlabeled data $\mathbf{X}_u = \mathbf{x}$, defined as

$$\mathbf{p}(\mathbf{x}) = \left(\mathbb{P}(Y_l = c \mid \mathbf{X}_l = \mathbf{x}) \right)_{c \in \mathcal{C}_l}^{\top}.$$

To summarize, *transfer leakage* measures the overall discrepancy of $\mathbf{p}(\mathbf{X}_u)$ under different new classes of the unlabeled measure \mathbb{Q} , which indicates the informative leakage from \mathbb{P} to \mathbb{Q} . Note that the metric intrinsically quantifies the information based on data, and is independent with NCD methods. Lemma 1 shows the lower and upper bounds of *transfer leakage*, and provides a theoretical justification of its effectiveness in measuring the similarity between labeled and unlabeled datasets.

Lemma 1 $\kappa := \max_{c \in \mathcal{C}_u} \mathbb{E}_{\mathbb{Q}}(\sqrt{K(\mathbf{p}(\mathbf{X}_u), \mathbf{p}(\mathbf{X}_u))} \mid Y_u = c) < \infty$, then $0 \leq T\text{-Leak}(\mathbb{Q}, \mathbb{P}) \leq 4\kappa^2$. Moreover, $T\text{-Leak}(\mathbb{Q}, \mathbb{P}) = 0$ if and only if Y_u is independent with $\mathbf{p}(\mathbf{X}_u)$, that is, for any $c \in \mathcal{C}_u$:

$$\mathbb{Q}(Y_u = c \mid \mathbf{p}(\mathbf{X}_u)) = \mathbb{Q}(Y_u = c), \quad (3)$$

yielding that $\mathbf{p}(\mathbf{X}_u)$ is useless in NCD on \mathbb{Q} .

Note that κ can be explicitly computed for many common used kernels, for example, $\kappa = 1$ for a Gaussian or Laplacian kernel.

From Lemma 1, $\text{T-Leak}(\mathbb{Q}, \mathbb{P}) = 0$ is equivalent to Y_u is independent with $\mathbf{p}(\mathbf{X}_u)$, which matches our intuition of no leakage. Alternatively, if Y_u is dependent with $\mathbf{p}(\mathbf{X}_u)$, we justifiably believe that the information of $Y_l|\mathbf{X}_l$ can be used to facilitate NCD, Lemma 1 tells that $\text{T-Leak}(\mathbb{Q}, \mathbb{P}) > 0$ in this case. Therefore, Lemma 1 reasonably suggests that the proposed *transfer leakage* is an effective metric to detect if the supervised information in \mathbb{P} is useful to NCD on \mathbb{Q} .

Next, we give a finite sample estimate of *transfer leakage*. To proceed, we first rewrite *transfer leakage* as follows.

$$\text{T-Leak}(\mathbb{Q}, \mathbb{P}) = \sum_{c, c' \in \mathcal{C}_u; c \neq c'} \left(\mathbb{Q}(Y_u = c, Y'_u = c') \text{MMD}_{\mathcal{H}}^2(\mathbb{Q}_{\mathbf{p}(\mathbf{X}_u)|Y_u=c}, \mathbb{Q}_{\mathbf{p}(\mathbf{X}'_u)|Y'_u=c'}) \right), \quad (4)$$

where the equality follows from the fact that $\text{MMD}_{\mathcal{H}}^2(\mathbb{Q}_{\mathbf{p}(\mathbf{X}_u)|Y_u=c}, \mathbb{Q}_{\mathbf{p}(\mathbf{X}'_u)|Y'_u=c}) = 0$.

Given an estimated probability $\hat{\mathbb{P}}_{Y_l|\mathbf{X}_l}$ and an evaluation dataset $(\mathbf{x}_{u,i}, y_{u,i})_{i=1}^m$ under \mathbb{Q} , we assess $\mathbf{x}_{u,i}$ on $\hat{\mathbb{P}}_{Y_l|\mathbf{X}_l}$ as $\hat{\mathbf{p}}(\mathbf{x}_{u,i}) = (\hat{\mathbb{P}}(Y_l = c | \mathbf{X}_l = \mathbf{x}_{u,i}))_{c \in \mathcal{C}_u}^\top$, then the empirical *transfer leakage* is computed as:

$$\widehat{\text{T-Leak}}(\mathbb{Q}, \mathbb{P}) = \sum_{c, c' \in \mathcal{C}_u; c \neq c'} \left(\frac{|\mathcal{I}_{u,c}| |\mathcal{I}_{u,c'}|}{m(m-1)} \widehat{\text{MMD}}_{\mathcal{H}}^2(\mathbb{Q}_{\hat{\mathbf{p}}(\mathbf{X}_u)|Y_u=c}, \mathbb{Q}_{\hat{\mathbf{p}}(\mathbf{X}'_u)|Y'_u=c'}) \right), \quad (5)$$

where $\mathcal{I}_{u,c} = \{1 \leq i \leq m : y_{u,i} = c\}$ is the index set of unlabeled data with $y_{u,i} = c$, and $\widehat{\text{MMD}}_{\mathcal{H}}^2$ is defined as:

$$\begin{aligned} \widehat{\text{MMD}}_{\mathcal{H}}^2(\mathbb{Q}_{\hat{\mathbf{p}}(\mathbf{X}_u)|Y_u=c}, \mathbb{Q}_{\hat{\mathbf{p}}(\mathbf{X}'_u)|Y'_u=c'}) &= \frac{1}{|\mathcal{I}_{u,c}|(|\mathcal{I}_{u,c}| - 1)} \sum_{i, j \in \mathcal{I}_{u,c}; i \neq j} K(\hat{\mathbf{p}}(\mathbf{x}_{u,i}), \hat{\mathbf{p}}(\mathbf{x}_{u,j})) \\ &+ \frac{1}{|\mathcal{I}_{u,c'}|(|\mathcal{I}_{u,c'}| - 1)} \sum_{i, j \in \mathcal{I}_{u,c'}; i \neq j} K(\hat{\mathbf{p}}(\mathbf{x}_{u,i}), \hat{\mathbf{p}}(\mathbf{x}_{u,j})) - \frac{2}{|\mathcal{I}_{u,c}| |\mathcal{I}_{u,c'}|} \sum_{i \in \mathcal{I}_{u,c}} \sum_{j \in \mathcal{I}_{u,c'}} K(\hat{\mathbf{p}}(\mathbf{x}_{u,i}), \hat{\mathbf{p}}(\mathbf{x}_{u,j})). \end{aligned}$$

Remark 1 Note that the definition of the proposed transfer leakage in Definition 2 is based on the conditional probability $\mathbf{p}(\mathbf{x}_u)$ from \mathbb{P} . Yet, it can be extended to an arbitrary representation $\mathbf{s}(\mathbf{x}_u)$ to quantify the leakage of \mathbb{Q} on more general settings. For example, $\mathbf{s}(\mathbf{x}_u)$ can be estimated via supervised, semi-supervised, self-supervised or transfer learning. See the definition of pseudo transfer leakage as follows.

Furthermore, we define *pseudo transfer leakage*, which is computed by a pretrained representation $\hat{\mathbf{s}}(\mathbf{x})$ and a pseudo-label obtained from a clustering method applied to the representations (e.g., K-means, GMM, agglomerative, etc.). It is worth mentioning that *pseudo transfer leakage* is more practical than *transfer leakage* because that *transfer leakage* requires the estimated probabilities and the true label Y_u , while *pseudo transfer leakage* can apply to any pretrained representation and any pseudo label obtained from a clustering method.

Definition 3 (Pseudo Transfer Leakage) The pseudo transfer leakage of NCD prediction under \mathbb{Q} based on a pretrained representation $\hat{\mathbf{s}}(\mathbf{x})$ is

$$\widehat{\text{Pseudo-T-Leak}}(\mathbb{Q}, \mathbb{P}) = \sum_{c, c' \in \mathcal{C}_u; c \neq c'} \frac{|\tilde{\mathcal{I}}_{u,c}| |\tilde{\mathcal{I}}_{u,c'}|}{m(m-1)} \widehat{\text{MMD}}_{\mathcal{H}}^2(\mathbb{Q}_{\hat{\mathbf{s}}(\mathbf{X}_u)|\tilde{Y}_u=c}, \mathbb{Q}_{\hat{\mathbf{s}}(\mathbf{X}'_u)|\tilde{Y}'_u=c'}) \quad (6)$$

where $\tilde{\mathcal{I}}_{u,c} = \{1 \leq i \leq m : \tilde{y}_{u,i} = c\}$ is the index set of unlabeled data with $\tilde{y}_{u,i} = c$, $\tilde{y}_{u,i}$ is provided based on a clustering method on their representations $\hat{\mathbf{s}}(\mathbf{x}_{u,i})$, and $\hat{\mathbf{s}}(\mathbf{x}_{u,i})$ is the representation estimated from a supervised model or a self-supervised model. $\widehat{\text{MMD}}_{\mathcal{H}}^2$ is defined as in Section 3.2.

4 Benchmark

To examine the validity of the proposed metric, we first construct a benchmark with various degrees of semantic similarity by using the hierarchical structure in ImageNet. We design two groups of numerical experiments: the consistency between NCD difficulty and degrees of semantic similarity (implemented by the hierarchical label structure) in Section 4.2.1, and the consistency between degrees of semantic similarity and the proposed (pseudo) *transfer leakage* in Section 4.2.2.

4.1 Construction Principle

Unlike existing benchmarks, which only take into account the difficulty of NCD based on the labeled set in terms of the number of categories (e.g., Fini et al. (2021)) or the number of images in each category (e.g., Chi et al. (2021)), we argue that semantic similarity is also a significant factor influencing NCD performance.

Specifically, our proposed benchmark is based on the ENTITY-30 task (Santurkar et al., 2020), which contains 240 ImageNet classes in total, with 30 superclasses and 8 subclasses for each superclass. Three different semantic similarity levels (high, medium and low) are produced by leveraging ImageNet’s underlying hierarchy. For example, as shown in Figure 1, despite the fact that the labeled (e.g., pineapple, strawberry) and unlabeled (e.g., pear, jackfruit) classes are disjoint, if they derive from the same superclass (i.e., fruit), they have a higher degree of semantic similarity. Conversely, when labeled (e.g., rose, lotus) and unlabeled (e.g., pear, jackfruit) classes are derived from distinct superclasses (i.e., labeled classes from flower while unlabeled classes from fruit), they are further apart semantically.

As a consequence, we define three labeled sets L_1 , $L_{1.5}$, L_2 and two unlabeled sets U_1 , U_2 . The sets L_1 and U_1 are selected from the first 15 superclasses, where 6 subclasses of each superclass are assigned to L_1 , and the other 2 are assigned to U_1 . The sets L_2 and U_2 are created from the second 15 superclasses in a similar fashion. Finally, $L_{1.5}$ is created by taking classes half from L_1 and half from L_2 . As a consequence, $(U_1, L_1)/(U_2, L_2)$ are closely related semantically (high), whereas $(U_1, L_2)/(U_2, L_1)$ are far apart (low), with $(U_1, L_{1.5})/(U_2, L_{1.5})$ in-between (medium). Additionally, we also provide four data settings on CIFAR100, two high-similarity settings and two low-similarity settings, by leveraging the hierarchical class structure of CIFAR100 similarly. Each case has 40 labeled classes and 10 unlabeled classes. A full list of the labeled and unlabeled sets can be found in Appendix D.

Table 1: Comparison of different combinations of labeled sets and unlabeled sets consisting of subsets of CIFAR100. The unlabeled sets are denoted U_1 and U_2 , while the labeled sets are called L_1 and L_2 . U_1 and L_1 share the same set of superclasses, similar for U_2 and L_2 . Thus, the pairs (U_1, L_1) and (U_2, L_2) are close semantically, but (U_1, L_2) and (U_2, L_1) are far apart. We report the mean and standard deviation of the clustering accuracy across 10 runs for multiple NCD methods. The higher mean is bolded.

Methods	Unlabeled set U_1		Unlabeled set U_2	
	L_1 - high	L_2 - low	L_1 - low	L_2 - high
K-means (MacQueen et al., 1967)	61.0 ± 1.1	37.7 ± 0.6	33.9 ± 0.5	55.4 ± 0.6
DTC (Han et al., 2019)	64.9 ± 0.3	62.1 ± 0.3	53.6 ± 0.3	66.5 ± 0.4
RS (Han et al., 2020)	78.3 ± 0.5	73.7 ± 1.4	74.9 ± 0.5	77.9 ± 2.8
NCL (Zhong et al., 2021a)	85.0 ± 0.6	83.0 ± 0.3	72.5 ± 1.6	85.6 ± 0.3
UNO (Fini et al., 2021)	92.5 ± 0.2	91.3 ± 0.8	90.5 ± 0.7	91.7 ± 2.2

4.2 Experiments

4.2.1 Validating the Benchmark

Experimental Settings To suggest the effectiveness of the benchmark, we conduct experiments on 5 baselines, including K-means (MacQueen et al., 1967), DTC (Han et al., 2019), RS (Han et al., 2021), NCL

Table 2: Comparison of different combinations of labeled sets and unlabeled sets on our proposed benchmark. Similar to the CIFAR-based experiments, L_1 is closely related to U_1 and L_2 is highly related to U_2 . The third labeled set $L_{1.5}$ is constructed from half of L_1 and half of L_2 , so in terms of similarity it is between L_1 and L_2 . For all splits we report the mean and the standard deviation of the clustering accuracy across 10 runs for multiple NCD methods. The higher mean is bolded.

Methods	Unlabeled set U_1			Unlabeled set U_2		
	L_1 - high	$L_{1.5}$ - medium	L_2 - low	L_1 - low	$L_{1.5}$ - medium	L_2 - high
K-means	41.1 \pm 0.4	30.2 \pm 0.4	23.3 \pm 0.2	21.2 \pm 0.2	29.8 \pm 0.4	45.0 \pm 0.4
DTC	43.3 \pm 1.2	35.6 \pm 1.3	32.2 \pm 0.8	21.3 \pm 1.2	15.3 \pm 1.5	29.0 \pm 0.8
RS	55.3 \pm 0.4	50.3 \pm 0.9	53.6 \pm 0.6	48.1 \pm 0.4	50.9 \pm 0.6	55.8 \pm 0.7
NCL	75.1 \pm 0.8	74.3 \pm 0.4	71.6 \pm 0.4	61.3 \pm 0.1	70.5 \pm 0.8	75.1 \pm 1.2
UNO	83.9 \pm 0.5	81.0 \pm 0.5	77.2 \pm 0.8	77.5 \pm 0.7	82.0 \pm 1.7	88.4 \pm 1.2

(Zhong et al., 2021a) and UNO (Fini et al., 2021). We follow the baselines regarding hyperparameters and implementation details.

Experimental Results In Table 1 (CIFAR100), the gap between the high-similarity and the low-similarity settings is larger than 20% for K-means and reaches up to 12% for more advanced methods. Similarly, in Table 2 (ImageNet), the high-similarity settings generally obtain the best performance, followed by the medium and low settings. Under the unlabeled set U_1 , L_1 achieves the highest accuracy, with around 2 - 17% improvement compared to L_2 , and around 2 - 11% improvement compared to $L_{1.5}$. For the unlabeled set U_2 , L_2 is the most similar set and obtains 8 - 14% improvement compared to L_1 , and around 5 - 14% improvement compared to $L_{1.5}$.

Conclusion *Consistency between Semantic Similarity and Accuracy.* The above numerical results suggest a positive correlation between semantic similarity and NCD performance, which suggests that semantic similarity is a significant factor influencing NCD performance.

4.2.2 Validating (Pseudo) Transfer Leakage

Experimental Settings We evaluate *transfer leakage* and *pseudo transfer leakage* on both CIFAR100 and our proposed ImageNet-based benchmark under different semantic similarity cases. We employ ResNet18 (He et al., 2016) as the backbone for both datasets following Han et al. (2019; 2021); Fini et al. (2021). Known-class data and unknown-class data are selected based on semantic similarity, as mentioned in Section 4. We first apply fully supervised learning to the labeled data for each dataset to obtain the pretrained model. Then, we feed the unlabeled data to the pretrained model to obtain its representation. Lastly, we calculate the *transfer leakage/pseudo transfer leakage* based on the pretrained model and the unlabeled samples’ representation. Specifically, for *pseudo transfer leakage*, we apply clustering methods to generate the pseudo labels. For the first step, batch size is set to 512 for both datasets. We use an SGD optimizer with momentum 0.9, and weight decay $1e-4$. The learning rate is governed by a cosine annealing learning rate schedule with a base learning rate of 0.1, a linear warmup of 10 epochs, and a minimum learning rate of 0.001. We pretrain the backbone for 200/100 epochs for CIFAR-100/ImageNet.

Experimental Results and Conclusions (i) *Consistency between (pseudo) transfer leakage and semantic similarity.* Table 3 demonstrates the *transfer leakage* under different data settings. In CIFAR100, settings with high semantic similarity tend to have higher *transfer leakage* than those with low semantic similarity. Similarly, in ImageNet, settings with high semantic similarity have the highest *transfer leakage*, followed by those with medium semantic similarity, while those with low semantic similarity have the lowest *transfer leakage*. Table 4 shows the *pseudo transfer leakage* under various baselines and datasets. This result supports the conclusion above that, for a given baseline, settings with higher semantic similarity tend to have higher *pseudo transfer leakage*.

(ii) *Consistency between (pseudo) transfer leakage and accuracy.* Figure 2 illustrates the relationship between semantic similarity, *transfer leakage/pseudo transfer leakage*, and NCD performance on ImageNet, where the same color corresponds to the same baseline. As expected, there is a consistent positive correlation between *transfer leakage/pseudo transfer leakage* and NCD accuracy, supporting the validity of *transfer leakage/pseudo transfer leakage* as a metric for quantifying semantic similarity and the difficulty of a particular NCD problem.

Table 3: Experiments on *transfer leakage*. To obtain the standard deviation we recompute the *transfer leakage* 10 times using bootstrap sampling. The results show that *transfer leakage* is consistent with semantic similarity. The maximum *transfer leakage* for the same unlabeled set is highlighted in bolded.

Dataset	Unlabeled Set	Labeled Set	<i>Transfer leakage</i>
CIFAR100	U_1	L_1 - high	0.62 ± 0.01
		L_2 - low	0.28 ± 0.01
	U_2	L_1 - low	0.33 ± 0.01
		L_2 - high	0.77 ± 0.02
ImageNet	U_1	L_1 - high	0.71 ± 0.01
		$L_{1.5}$ - medium	0.54 ± 0.01
		L_2 - low	0.36 ± 0.01
	U_2	L_1 - low	0.33 ± 0.00
		$L_{1.5}$ - medium	0.50 ± 0.01
		L_2 - low	0.72 ± 0.01

Table 4: Experiments on *pseudo transfer leakage* under three clustering methods, i.e., K-means, GMM and agglomerative, each setting is repeated for 10 times. The maximum *pseudo transfer leakage* is highlighted in bold for each baseline.

Method	Unlabeled set U_1			Unlabeled set U_2		
	L_1 - high	$L_{1.5}$ - medium	L_2 - low	L_1 - low	$L_{1.5}$ - medium	L_2 - high
K-means	1.23 ± 0.03	1.02 ± 0.03	0.99 ± 0.02	0.96 ± 0.01	0.99 ± 0.03	1.24 ± 0.02
GMM	0.79 ± 0.01	0.69 ± 0.02	0.56 ± 0.02	0.58 ± 0.02	0.68 ± 0.04	0.91 ± 0.02
Agglomerative	1.17 ± 0.00	0.96 ± 0.00	0.87 ± 0.00	0.83 ± 0.00	0.89 ± 0.00	1.15 ± 0.00

5 Supervised Knowledge May Hurt Performance

NCD is based on the idea that supervised knowledge from labeled data can be used to improve the clustering of unlabeled data. Yet, our empirical studies raise a possibility that supervised information from a labeled set may result in suboptimal outcomes compared to using exclusively self-supervised knowledge.

5.1 Experimental Design

We first conduct experiments in the following settings:

- (a) $\mathbf{X}_u + \mathbf{X}_l$, using the images of unlabeled set and the labeled set but without labels.
- (b) $\mathbf{X}_u + (\mathbf{X}_l, Y_l)$, using the unlabeled set and the whole labeled set, (i.e., standard NCD).
- (c) \mathbf{X}_u , using the unlabeled set.

Particularly, for (a), even though we do not use the labels, we can still extract the knowledge of the labeled set via self-supervised learning. By comparing (a) and (b), we can analyze the performance gain from including

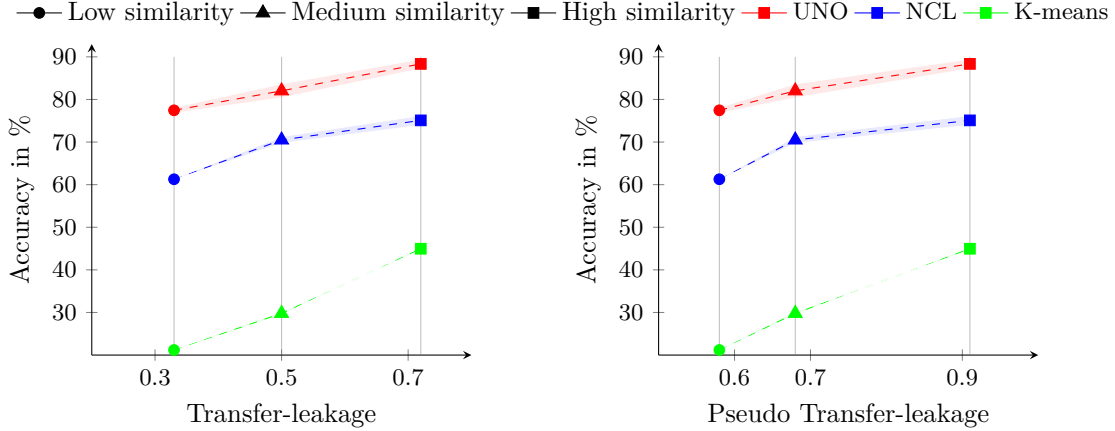


Figure 2: The experiments investigate the correlation between accuracy and *transfer leakage/pseudo transfer leakage*. We show three baselines, including UNO, NCL and K-means. On the left, we measure the *transfer leakage* and the clustering accuracy. On the right, we replace *transfer leakage* with *pseudo transfer leakage* calculated from GMM clustering. As expected, there is a positive correlation between accuracy and *transfer leakage* as well as *pseudo transfer leakage*, which shows that *transfer leakage* and *pseudo transfer leakage* can demonstrate the difficulty of NCD tasks.

supervised knowledge in the form of labels. For a better comparison, we also include part of experiments on (c) for estimating the total performance gain caused by adding the labeled set in Appendix (Table 8). In (c), NCD is degenerated to unsupervised learning (i.e., clustering on \mathbf{X}_u).

Experimental Settings We conduct experiments based on recent NCD methods, including RS (Han et al., 2021), NCL (Zhong et al., 2021a) and UNO (Fini et al., 2021) (the current state-of-the-art method in NCD). To perform settings (a), we make adjustments to the framework of each method with as minimal modifications as possible, enabling it to run fully self-supervised. For UNO, we replace ground truth labels $y_{l_{GT}}$ in the labeled set with self-supervised pseudo labels $y_{l_{PL}}$, which are obtained by applying the Sinkhorn-Knopp algorithm (Cuturi, 2013). For NCL and RS, we replace the ground truth labels with labels obtained using K-means (MacQueen et al., 1967). More details on these modifications as well as the used hyperparameters can be found in Appendix B.2. We run the experiments on our Imagenet-based benchmark established in Subsection 4, as well as CIFAR100 50 - 50, a benchmark established by Fini et al. (2021) that splits the CIFAR100 dataset (Krizhevsky, 2009) into 50 labeled and 50 unlabeled classes without regard for semantic similarity.

Experimental Results As shown in Table 5, by comparing (a) and (b) under different baselines, we have the following numerical results:

- For RS, (a) outperforms (b) on all datasets, with 3% improvement in CIFAR100 and $\sim 10 - 15\%$ improvement in ImageNet.
- For NCL, (b) exceeds (a) by $\sim 2.5\%$ in CIFAR100, whereas in ImageNet, (a) surpasses (b) by $\sim 2 - 8\%$ in all semantic similarity settings.
- For UNO, we discuss 3 settings,
 - In high - similarity settings, (i.e., $L_1 - U_1$), (a) performs $\sim 4\%$ worse than (b).
 - In low - similarity settings, (i.e., $L_2 - U_1$ and $L_1 - U_2$), (a) outperforms (b) by $\sim 3\% - 8\%$.
 - In medium - similarity settings, (i.e., $L_{1.5} - U_1$ and $L_{1.5} - U_2$), neither (a) nor (b) has an absolute advantage.

Conclusion *Supervision information with low semantic relevance may hurt NCD performance.* Based on the analysis of numerical results, we find that using self-supervised knowledge is significantly more advantageous than using supervised knowledge in both RS and NCL, while in UNO, supervised knowledge is beneficial when the labeled and unlabeled sets have a high degree of semantic similarity, but harmful when the semantic similarity is low.

Table 5: Comparison of using supervised knowledge or using exclusively self-supervised knowledge on CIFAR100 and our proposed benchmark. We present clustering mean and standard error on three recent methods, including RS, NCL and UNO (SOTA). Unexpectedly, $\mathbf{X}_u + \mathbf{X}_l$ outperforms $\mathbf{X}_u + (\mathbf{X}_l, Y_l)$ in both RS and NCL on ImageNet. For UNO, in CIFAR100-50 and low similarity case of our benchmark, $\mathbf{X}_u + \mathbf{X}_l$ can also get greater performance than $\mathbf{X}_u + (\mathbf{X}_l, Y_l)$. The empirical results indicate that supervised knowledge may have a negative impact on NCD performance. The higher mean is bolded.

	Setting	CIFAR100-50	Unlabeled set U_1			Unlabeled set U_2		
			L_1 - high	$L_{1.5}$ - medium	L_2 - low	L_1 - low	$L_{1.5}$ - medium	L_2 - high
RS	$\mathbf{X}_u + \mathbf{X}_l$	42.8 \pm 0.4	64.9 \pm 0.2	64.5 \pm 0.4	67.3 \pm 0.9	62.9 \pm 1.2	65.3 \pm 0.5	67.4 \pm 0.8
	$\mathbf{X}_u + (\mathbf{X}_l, Y_l)$	39.2 \pm 2.3	55.3 \pm 1.0	50.3 \pm 2.0	53.6 \pm 1.3	48.1 \pm 0.8	50.9 \pm 1.3	55.8 \pm 1.5
NCL	$\mathbf{X}_u + \mathbf{X}_l$	50.9 \pm 0.4	77.3 \pm 0.4	75.2 \pm 0.5	75.9 \pm 0.6	77.3 \pm 0.6	77.5 \pm 0.7	83.2 \pm 0.8
	$\mathbf{X}_u + (\mathbf{X}_l, Y_l)$	53.4 \pm 0.3	75.1 \pm 0.8	74.3 \pm 0.4	71.6 \pm 0.4	61.3 \pm 0.1	70.5 \pm 0.8	75.1 \pm 1.2
UNO	$\mathbf{X}_u + \mathbf{X}_l$	64.1 \pm 0.4	79.6 \pm 1.1	79.7 \pm 2.2	80.3 \pm 0.3	85.3 \pm 0.5	85.2 \pm 1.0	89.2 \pm 0.3
	$\mathbf{X}_u + (\mathbf{X}_l, Y_l)$	62.2 \pm 0.2	83.9 \pm 0.6	80.9 \pm 1.2	77.2 \pm 0.8	77.5 \pm 0.7	82.0 \pm 1.6	88.3 \pm 1.1

5.2 Practical Applications

Table 5 indicates that supervised knowledge from the labeled set may cause harm rather than gain, it is nature to ask whether to utilize supervised knowledge with labeled data or pure self-supervised knowledge without labels. Therefore, we provide two instructive solutions, including a practical metric (i.e., *pseudo transfer leakage*) and a new method tuning the supervised and/or self-supervised knowledge.

5.2.1 Data Selection: Supervised or Self-supervised Knowledge?

We conduct the experiment to investigate the relationship between *pseudo transfer leakage* and NCD’s accuracy under various semantic similarity settings.

Experimental Settings We first perform supervised learning and self-supervised learning to achieve two pretrained models under varying data sets based on UNO (the best performing method in Section 5), respectively. Then, *pseudo transfer leakage* is computed based on the two pretrained models.

Experimental Results In Table 6, PTL denotes *pseudo transfer leakage* and ACC represents accuracy. We find that *pseudo transfer leakage* is consistent with the accuracy under various datasets. For example, in $L_1 - U_1$, the *pseudo transfer leakage* computed on the supervised model is larger than the one computed in the self-supervised model, which is consistent with the accuracy, where the supervised method outperforms the self-supervised one. Reversely, for $L_2 - U_1$, $L_1 - U_2$ and $L_{1.5} - U_1$, the *pseudo transfer leakage* computed on the self-supervised model is larger than the one computed in the supervised model, which is again consistent with their relative performance. $L_2 - U_2$ and $L_{1.5} - U_1$ are omitted since their performance is within error margins.

Conclusion *The proposed pseudo transfer leakage can be used as a practical reference to infer what sort of data we want to use in NCD, image-only information, $\mathbf{X}_u + \mathbf{X}_l$ or image-label pairs, $\mathbf{X}_u + (\mathbf{X}_l, Y_l)$ of the labeled set.*

Table 6: Results showing the link between *pseudo transfer leakage* (PTL) and accuracy on novel classes (ACC). The *pseudo transfer leakage* is computed based either on a supervised (SL) or self-supervised model (SSL), using ResNet18 in both cases. The accuracy is obtained using the standard NCD setting ($\mathbf{X}_u + (\mathbf{X}_l, Y_l)$) for supervised learning, and self-supervised NCD setting ($\mathbf{X}_u + \mathbf{X}_l$) for self-supervised model. The higher mean is bolded.

	Model	High similarity		Medium similarity		Low similarity	
		$L_1 - U_1$	$L_2 - U_2$	$L_{1.5} - U_1$	$L_{1.5} - U_2$	$L_2 - U_1$	$L_1 - U_2$
PTL	SSL	0.96 \pm 0.01	0.96 \pm 0.02	1.14 \pm 0.02	1.19 \pm 0.01	1.05 \pm 0.03	1.25 \pm 0.03
	SL	1.21 \pm 0.02	1.21 \pm 0.01	1.03 \pm 0.02	0.98 \pm 0.03	0.99 \pm 0.02	0.96 \pm 0.01
ACC	SSL	79.6 \pm 1.1	89.2 \pm 0.3	79.7 \pm 1.0	85.2 \pm 1.0	80.3 \pm 0.3	85.3 \pm 0.5
	SL	83.9 \pm 0.6	88.3 \pm 0.5	81.0 \pm 0.6	82.0 \pm 1.6	77.2 \pm 0.8	77.5 \pm 0.7

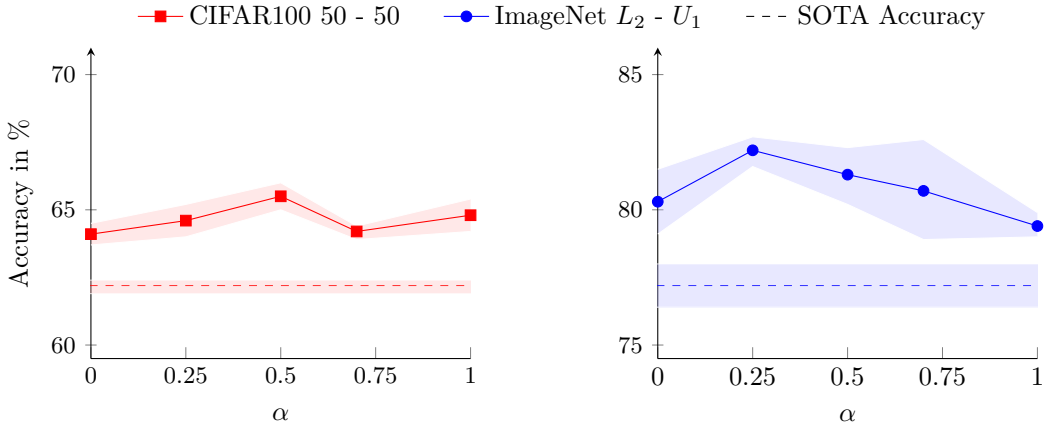


Figure 3: Experiments on combining supervised and self-supervised objectives on CIFAR100 50 - 50 and ImageNet in the $L_2 - U_1$ low-similarity setting. α shows the weight of the supervised component. Dashed lines show the accuracy of SOTA (UNO). In low-similarity settings, a mix of supervised and self-supervised objectives outperforms either alone.

5.2.2 Data Combining: Weighting Supervised and Self-supervised Knowledge

Instead of using either supervised knowledge or self-supervised knowledge from the labeled set, we propose an effective and straightforward method, which smoothly combines both of them.

Method and Experimental Settings Specifically, we first utilize self-supervised learning on both labeled and unlabeled sets for pretraining. Then, similar to UNO, we improve image representations by a contrastive learning framework (i.e., SWAV (Caron et al., 2020)). Different from UNO, we generate pseudo labels $y_{l_{PL}}$ for labeled data utilizing Sinkhorn-Knopp algorithm (Cuturi, 2013) and combine them with its corresponding ground truth labels $y_{l_{GT}}$. Then, the overall classification target of the labeled data is $y_l = \alpha y_{l_{GT}} + (1 - \alpha) y_{l_{PL}}$, where $\alpha \in [0, 1]$ represents the weight of the supervised component. Specifically, when $\alpha = 1$, our proposed method has the same target as UNO (Fini et al., 2021), but the pre-training is different.

Experimental Results As indicated in Figure 3, our proposed method achieves $\sim 3\%$ and $\sim 5\%$ improvement in both CIFAR100 and ImageNet (low - similarity setting) compared to SOTA, respectively. Additionally, our method shows $\sim 2\%$ improvement under $\alpha = 1$, which means that self-supervised pretraining can enhance performance.

Conclusion NCD performance can be improved by combining the self-supervised and supervised knowledge from labeled sets.

6 Conclusion

We thoroughly investigate the effectiveness of supervised knowledge in the NCD task. We first introduce *transfer leakage/pseudo transfer leakage*, a metric for measuring the semantic similarity between two data sets. Then, we propose a comprehensive benchmark with varying levels of semantic similarity based on ImageNet for validating the proposed metric and verify that semantic similarity has a significant impact on NCD performance. By leveraging the metric and benchmark, we observe that supervised knowledge may lead to inferior performance in circumstances with low semantic similarity. Furthermore, we propose two practical applications: (i) *pseudo transfer leakage* as a reference on what sort of data we aim to use. (ii) A straightforward method, which obtains $\sim 3\%$ and $\sim 5\%$ improvement in CIFAR100 and ImageNet.

References

- Mathilde Caron, Ishan Misra, Julien Mairal, Priya Goyal, Piotr Bojanowski, and Armand Joulin. Unsupervised learning of visual features by contrasting cluster assignments. *Advances in Neural Information Processing Systems*, 33:9912–9924, 2020.
- Haoang Chi, Feng Liu, Wenjing Yang, Long Lan, Tongliang Liu, Bo Han, Gang Niu, Mingyuan Zhou, and Masashi Sugiyama. Meta discovery: Learning to discover novel classes given very limited data. In *ICLR*, 2021.
- Marco Cuturi. Sinkhorn distances: lightspeed computation of optimal transport. In *Proceedings of the 26th International Conference on Neural Information Processing Systems-Volume 2*, pp. 2292–2300, 2013.
- Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *CVPR*, pp. 248–255. IEEE, 2009.
- Enrico Fini, Enver Sangineto, Stéphane Lathuilière, Zhun Zhong, Moin Nabi, and Elisa Ricci. A unified objective for novel class discovery. In *ICCV*, pp. 9284–9292, 2021.
- Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola. A kernel two-sample test. *The Journal of Machine Learning Research*, 13(1):723–773, 2012.
- Kai Han, Andrea Vedaldi, and Andrew Zisserman. Learning to discover novel visual categories via deep transfer clustering. In *CVPR*, 2019.
- Kai Han, Sylvestre-Alvise Rebuffi, Sebastien Ehrhardt, Andrea Vedaldi, and Andrew Zisserman. Automatically discovering and learning new visual categories with ranking statistics. In *International Conference on Learning Representations*, 2020.
- Kai Han, Sylvestre-Alvise Rebuffi, Sebastien Ehrhardt, Andrea Vedaldi, and Andrew Zisserman. Autonovel: Automatically discovering and learning novel visual categories. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 2021.
- Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 770–778, 2016.
- Yen-Chang Hsu, Zhaoyang Lv, and Zsolt Kira. Learning to cluster in order to transfer across domains and tasks. In *International Conference on Learning Representations*, 2018.
- Yen-Chang Hsu, Zhaoyang Lv, Joel Schlosser, Phillip Odom, and Zsolt Kira. Multi-class classification without multi-class labels. In *International Conference on Learning Representations*, 2019.
- Alex Krizhevsky. Learning multiple layers of features from tiny images. 2009.
- James MacQueen et al. Some methods for classification and analysis of multivariate observations. In *Proceedings of the fifth Berkeley Symposium on Mathematical Statistics and Probability*, volume 1, pp. 281–297. Oakland, CA, USA, 1967.

- Shibani Santurkar, Dimitris Tsipras, and Aleksander Madry. Breeds: Benchmarks for subpopulation shift. In *ICLR*, 2020.
- Junyuan Xie, Ross Girshick, and Ali Farhadi. Unsupervised deep embedding for clustering analysis. In *International conference on machine learning*, pp. 478–487. PMLR, 2016.
- Bingchen Zhao and Kai Han. Novel visual category discovery with dual ranking statistics and mutual knowledge distillation. *NIPS*, 2021.
- Zhun Zhong, Enrico Fini, Subhankar Roy, Zhiming Luo, Elisa Ricci, and Nicu Sebe. Neighborhood contrastive learning for novel class discovery. In *CVPR*, 2021a.
- Zhun Zhong, Linchao Zhu, Zhiming Luo, Shaozi Li, Yi Yang, and Nicu Sebe. Openmix: Reviving known knowledge for discovering novel visual categories in an open world. In *CVPR*, 2021b.

A Details of Section 3

A.1 Technical Proofs

To proceed, we summarize all notations used in the paper in Table 7.

Table 7: Notation used in the paper.

Notation	Description
$\mathbf{X}_l, \mathbf{X}_u$	labeled data / unlabeled data
y_l, y_u	label of labeled data / unlabeled data
$\mathcal{X}_l, \mathcal{X}_u$	domain of labeled data / unlabeled data
$\mathcal{C}_l, \mathcal{C}_u$	label set of labeled data / unlabeled data
\mathbb{P}, \mathbb{Q}	probability measure of labeled data / unlabeled data
$\mathcal{L}_n = (\mathbf{X}_{l,i}, Y_{l,i})_{i=1, \dots, n}$	labeled dataset
$\mathcal{U}_m = (\mathbf{X}_{u,i})_{i=1, \dots, m}$	unlabeled dataset
\mathcal{H}	reproducing kernel Hilbert space (RKHS)
$K(\cdot, \cdot)$	kernel function
(\mathbf{X}', Y')	independent copy of (\mathbf{X}, Y)
$\hat{\mathbb{P}}$	estimated probability measure of labeled data
$\mathbb{E}_{\mathbb{Q}}$	expectation with respect to the probability measure \mathbb{Q}
$\mathbf{x}_{u,i}, y_{u,i}$	the i -th unlabeled data
$\mathcal{I}_{u,c}$	index set of unlabeled samples labeled as $y_{u,i} = c$

Proof of Lemma 1. We first show the upper bound of the transfer leakage. According to Lemma 3 in Gretton et al. (2012), we have

$$\begin{aligned}
\text{T-Leak}(\mathbb{Q}, \mathbb{P}) &= \mathbb{E}_{\mathbb{Q}}(\text{MMD}^2(\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u}, \mathbb{Q}_{\mathbf{P}(\mathbf{X}'_u)|Y'_u})) = \mathbb{E}_{\mathbb{Q}}\left(\left\|\mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u}} - \mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}'_u)|Y'_u}}\right\|_{\mathcal{H}}^2\right) \\
&\leq \max_{c, c' \in \mathcal{C}_u} \left\|\mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u=c}} - \mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}'_u)|Y'_u=c'}}\right\|_{\mathcal{H}}^2 \leq 4 \max_{c \in \mathcal{C}_u} \left\|\mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u=c}}\right\|_{\mathcal{H}}^2 \\
&= 4 \max_{c \in \mathcal{C}_u} \langle \mathbb{E}_{\mathbb{Q}}(K(\mathbf{P}(\mathbf{X}_u), \cdot)|Y_u = c), \mathbb{E}_{\mathbb{Q}}(K(\mathbf{P}(\mathbf{X}'_u), \cdot)|Y'_u = c) \rangle_{\mathcal{H}} \\
&= 4 \max_{c \in \mathcal{C}_u} \mathbb{E}_{\mathbb{Q}}(\langle K(\mathbf{P}(\mathbf{X}_u), \cdot), K(\mathbf{P}(\mathbf{X}'_u), \cdot) \rangle_{\mathcal{H}} | Y_u = c, Y'_u = c) \\
&\leq 4 \max_{c \in \mathcal{C}_u} \mathbb{E}_{\mathbb{Q}}\left(\left\|K(\mathbf{P}(\mathbf{X}_u), \cdot)\right\|_{\mathcal{H}} \left\|K(\mathbf{P}(\mathbf{X}'_u), \cdot)\right\|_{\mathcal{H}} | Y_u = c, Y'_u = c\right) \\
&= 4 \max_{c \in \mathcal{C}_u} \mathbb{E}_{\mathbb{Q}}(\sqrt{K(\mathbf{P}(\mathbf{X}_u), \mathbf{P}(\mathbf{X}_u))} | Y_u = c) \mathbb{E}_{\mathbb{Q}}(\sqrt{K(\mathbf{P}(\mathbf{X}'_u), \mathbf{P}(\mathbf{X}'_u))} | Y'_u = c) \leq 4\kappa^2,
\end{aligned}$$

where $\mu_{\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u}} := \mathbb{E}_{\mathbb{Q}}(K(\mathbf{P}(\mathbf{X}_u), \cdot)|Y_u)$ is the kernel mean embedding of the measure $\mathbb{Q}_{\mathbf{P}(\mathbf{X}_u)|Y_u}$ (Gretton et al., 2012), the second inequality follows from the triangle inequality in the Hilbert space, the fourth equality follows from the fact that $\mathbb{E}_{\mathbb{Q}}$ is a linear operator, the second last inequality follows from the Cauchy-Schwarz inequality, and the last equality follows the reproducing property of $K(\cdot, \cdot)$.

Next, we show the if and only if condition for $\text{T-Leak}(\mathbb{Q}, \mathbb{P}) = 0$. Assume that $\mathbb{Q}(Y_u = c) > 0$ for all $c \in \mathcal{C}_u$. According to Theorem 5 in Gretton et al. (2012), we have

$$\text{T-Leak}(\mathbb{Q}, \mathbb{P}) = 0 \iff \mathbb{Q}(\mathbf{P}(\mathbf{x})|Y_u = c) = q_0(\mathbf{x}), \text{ for } c \in \mathcal{C}_u, \mathbf{x} \in \mathcal{X}_u.$$

Note that

$$1 = \sum_{c \in \mathcal{C}_u} \mathbb{Q}(Y_u = c | \mathbf{P}(\mathbf{x})) = \sum_{c \in \mathcal{C}_u} \frac{\mathbb{Q}(\mathbf{P}(\mathbf{x})|Y_u = c) \mathbb{Q}(Y_u = c)}{\mathbb{Q}(\mathbf{P}(\mathbf{x}))} = \sum_{c \in \mathcal{C}_u} \frac{q_0(\mathbf{x}) \mathbb{Q}(Y_u = c)}{\mathbb{Q}(\mathbf{P}(\mathbf{x}))} = \frac{q_0(\mathbf{x})}{\mathbb{Q}(\mathbf{P}(\mathbf{x}))},$$

yielding that $\mathbb{Q}(\mathbf{p}(\mathbf{x})|Y_u = c) = \mathbb{Q}(\mathbf{p}(\mathbf{x}))$, for $c \in \mathcal{C}_u, \mathbf{x} \in \mathcal{X}_u$. This is equivalent to,

$$\mathbb{Q}(Y_u = c|\mathbf{p}(\mathbf{x})) = \frac{\mathbb{Q}(\mathbf{p}(\mathbf{x})|Y_u = c)\mathbb{Q}(Y_u = c)}{\mathbb{Q}(\mathbf{p}(\mathbf{x}))} = \mathbb{Q}(Y_u = c).$$

This completes the proof. \square

B Details of Section 5

B.1 Additional Experiments

Table 8: Comparison of different data settings on CIFAR100 and our proposed benchmark. We present clustering mean and standard error for each setting. (c) uses only the unlabeled set, whereas (a) uses both the unlabeled set and the labeled set’s images without labels. (b) represents the standard NCD setting, i.e., using the unlabeled set and the whole labeled set. However, in CIFAR100-50 and low similarity case of our benchmark, (a) can get greater performance than (b). The higher mean is bolded.

Setting	CIFAR100-50	Unlabeled set U_1			Unlabeled set U_2		
		L_1 - high	$L_{1.5}$ - medium	L_2 - low	L_1 - low	$L_{1.5}$ - medium	L_2 - high
(c) \mathbf{X}_u	54.9 ± 0.4	70.5 ± 1.2	70.5 ± 1.2	70.5 ± 1.2	71.9 ± 0.3	71.9 ± 0.3	71.9 ± 0.3
(a) $\mathbf{X}_u + \mathbf{X}_l$	64.1 ± 0.4	79.6 ± 1.1	79.7 ± 2.2	80.3 ± 0.3	85.3 ± 0.5	85.2 ± 1.0	89.2 ± 0.3
(b) $\mathbf{X}_u + (\mathbf{X}_l, Y_l)$	62.2 ± 0.2	83.9 ± 0.6	80.9 ± 1.2	77.2 ± 0.8	77.5 ± 0.7	82.0 ± 1.6	88.3 ± 1.1

We also conduct full experiment on UNO with settings (a) - (c) to further examine the benefit of the self-supervised from the labeled set. In Table 8, by comparing (a) and (c), we find that NCD performance is consistently improved by incorporating more images (without labels) from a labeled set, with around 10% improvement in accuracy on CIFAR100. For our benchmark, setting (a) obtains an improvement about 6% - 10% over (c) and the increase is more obvious in the low similarity settings. *This numerical results demonstrates that self-supervised knowledge from the labeled set is beneficial for NCD performance under varying semantic similarity.*

Table 9: Ablation study on combining supervised and self-supervised objectives. The α value indicates the weight of the supervised component. We see that the low similarity setting sees an improvement of up to 2.8% compared to $\alpha = 1.00$ and up to 8.0% compared to SOTA. Standard UNO differs from the $\alpha = 1.00$ setting in that it does not use self-supervised pretraining. The higher mean is bolded.

Setting	CIFAR100-50	Unlabeled set U_1			Unlabeled set U_2		
		L_1 - high	$L_{1.5}$ - medium	L_2 - low	L_1 - low	$L_{1.5}$ - medium	L_2 - high
$\alpha = 0.00$	64.1 ± 0.4	79.6 ± 1.1	79.7 ± 1.0	80.3 ± 0.3	85.3 ± 0.5	85.2 ± 1.0	89.2 ± 0.3
$\alpha = 0.50$	65.5 ± 0.5	82.3 ± 1.6	80.2 ± 1.6	81.3 ± 1.0	85.2 ± 0.9	86.5 ± 0.6	90.5 ± 1.2
$\alpha = 1.00$	64.8 ± 0.8	83.3 ± 0.6	81.5 ± 1.0	79.4 ± 0.4	85.8 ± 0.8	85.5 ± 1.3	91.5 ± 1.1
UNO	62.2 ± 0.2	83.9 ± 0.6	81.0 ± 0.6	77.2 ± 0.8	77.5 ± 0.7	82.0 ± 1.6	88.3 ± 1.1

B.2 Experimental Setup and Hyperparameters

In general, we follow the baselines regarding hyperparameters and implementation details unless stated otherwise. We repeat all experiments on CIFAR100 10 times and the ones on our proposed ImageNet-based benchmark 5 times, and report mean and standard deviation. All experiments are conducted using PyTorch and run on NVIDIA V100 GPUs.

Adapting Baselines to the Self-supervised Setting Since experiment settings (1) and (2) do not make use of any labels, we need to adapt UNO (Fini et al., 2021) to work without labeled data. The standard

UNO method conducts NCD in a two-step approach. In the first step, it applies a supervised pretraining on the labeled data only. The pretrained model is then used as an initialization for the second step, in which the model is trained jointly on both labeled and unlabeled data using one labeled head and multiple unlabeled heads. To achieve this, the logits of known and novel classes are concatenated and the model is trained using a single cross-entropy loss. Here, the targets for the unlabeled samples are taken from pseudo-labels, which are generated from the logits of the unlabeled head using the Sinkhorn-Knopp algorithm (Cuturi, 2013)

To adapt UNO to the fully unsupervised setting in (1), we need to remove all parts that utilize the labeled data. Therefore, in the first step, we replace the supervised pretraining by a self-supervised one, which is trained only on the unlabeled data. For the second step, we simply remove the labeled head, thus the method is degenerated to a clustering approach based solely on the pseudo-labels generated by the Sinkhorn-Knopp algorithm. For setting (2), we apply the self-supervised pretraining based on both unlabeled and labeled images to obtain the pretrained model in the first step. In the second step, we replace the ground-truth labels for the known classes with pseudo-labels generated by the Sinkhorn-Knopp algorithm based on the logits of these classes. Taken together, the updated setup utilizes the labeled images, but not their labels.

For NCL and RS, the modifications are similar to the ones done on UNO. Both methods consist of three steps, a self-supervised pretraining step, followed by another supervised pretraining and lastly the novel class discovery step. To adapt them to setting (2), we replace the first two steps with a single self-supervised pretraining step based on SwAV (Caron et al., 2020). For the last step, we simply replace the ground truth labels with labels obtained using k-means (MacQueen et al., 1967), while keeping the framework itself the same.

Hyperparameters We conduct our experiments on CIFAR100 as well as our proposed ImageNet-based benchmark. All settings and hyperparameters are kept as close as possible as to the original baselines, including the choice of ResNet18 as the model architecture. We use SwAV as self-supervised pretraining for all experiments. The pretraining is done using the small batch size configuration of the method, which uses a batch size of 256 and a queue size of 3840. The training is run for 800 epochs, with the queue being enabled at 60 epochs for our ImageNet-based benchmark and 100 epochs for CIFAR100. To ensure a fair comparison with the standard NCD setting, the same data augmentations were used. In the second step of UNO, we train the methods for 500 epochs on CIFAR100 and 100 epochs for each setting on our benchmark. The experiments are replicated 10 times on CIFAR100 and 5 times on the developed benchmark, and the averaged performances and their corresponding standard errors are summarized in Table 5.

C Discussion

The key assumption of novel class discovery is that the knowledge contained in the labeled set can help improve the clustering of the unlabeled set. Yet, what’s the ‘dark knowledge’ transferred from the labeled set to the unlabeled set is still a mystery. Therefore, we conduct preliminary experiments to disentangle the impact of the different components of the labeled set, i.e., the images-only information and the image-label pairs. The results indicate that NCD performance is consistently improved by incorporating more images (without labels) from a labeled set while the supervised knowledge is not always beneficial. Supervised knowledge (obtained from \mathbf{X}_l, Y_l) can provide two types of information: classification rule and robustness. However, self-supervised information from \mathbf{X}_l is primarily responsible for enhancing model robustness. In cases of high semantic similarity, the labeled and unlabeled classification rules are more similar than in cases of low semantic similarity. Thus, supervised knowledge is advantageous in high similarity cases but potentially harmful in low similarity situations while self-supervised knowledge is helpful for both cases.

D Detailed Benchmark Splits

Table 10: ImageNet class list of labeled split L_1 and unlabeled split U_1 of our proposed benchmark. As they share the same superclasses, they are highly related semantically. For each superclass, six classes are assigned to the labeled set and two to the unlabeled set. The labeled classes marked by the red box are also included in $L_{1.5}$, which shares half of its classes with L_1 and half with L_2 .

Superclass	Labeled Subclasses	Unlabeled Subclasses
garment	vestment, jean, academic gown, sarong, fur coat, apron	swimming trunks, miniskirt
tableware	wine bottle, goblet, mixing bowl, coffee mug, water bottle, water jug	plate, beer glass
insect	leafhopper, long-horned beetle, lacewing, dung beetle, sulphur butterfly, fly	admiral, grasshopper
vessel	wreck, liner, container ship, catamaran, trimaran, lifeboat	yawl, aircraft carrier
building	toyshop, grocery store, bookshop, palace, butcher shop, castle	beacon, mosque
headdress	cowboy hat, bathing cap, pickelhaube, bearskin, bonnet, hair slide	crash helmet, shower cap
kitchen utensil	cocktail shaker, frying pan, measuring cup, tray, spatula, cleaver	caldron, coffeepot
footwear	knee pad, sandal, clog, cowboy boot, running shoe, Loafer	Christmas stocking, maillot
neckwear	stole, necklace, feather boa, bow tie, Windsor tie, neck brace	bolo tie, bib
bony fish	puffer, sturgeon, coho, eel, rock beauty, tench	gar, lionfish
tool	screwdriver, fountain pen, quill, shovel, screw, combination lock	torch, padlock
vegetable	spaghetti squash, cauliflower, zucchini, acorn squash, artichoke, cucumber	cardoon, butternut squash
motor vehicle	beach wagon, trailer truck, limousine, police van, convertible, school bus	garbage truck, moped
sports equipment	balance beam, rugby ball, ski, horizontal bar, racket, dumbbell	tennis ball, croquet ball
carnivore	otterhound, flat-coated retriever, Italian greyhound, Shih-Tzu, basenji, black-footed ferret	Boston bull, Bedlington terrier

Table 11: ImageNet class list of labeled split L_2 and unlabeled split U_2 of our proposed benchmark. As they share the same superclasses, they are highly related semantically. For each superclass, six classes are assigned to the labeled set and two to the unlabeled set. The labeled classes marked by the red box are also included in $L_{1.5}$, which shares half of its classes with L_1 and half with L_2 .

Superclass	Labeled Subclasses	Unlabeled Subclasses
fruit	corn, buckeye, strawberry, pear, Granny Smith, pineapple	acorn, jackfruit
saurian	African chameleon, Komodo dragon, alligator lizard, agama, green lizard, Gila monster	banded gecko, American chameleon
barrier	stone wall, chainlink fence, breakwater, dam, banister, picket fence	worm fence, turnstile
electronic equipment	cassette player, modem, printer, monitor, computer keyboard, pay-phone	dial telephone, microphone
serpentes	green snake, boa constrictor, green mamba, ringneck snake, thunder snake, king snake	rock python, garter snake
dish	hot pot, burrito, potpie, meat loaf, cheeseburger, mashed potato	hotdog, pizza
home appliance	espresso maker, toaster, washer, space heater, vacuum, microwave	dishwasher, Crock Pot
measuring instrument	wall clock, barometer, digital watch, hourglass, magnetic compass, analog clock	digital clock, parking meter
primate	indri, siamang, baboon, capuchin, chimpanzee, howler monkey	patas, Madagascar cat
crustacean	rock crab, king crab, crayfish, American lobster, Dungeness crab, spiny lobster	fiddler crab, hermit crab
musical instrument	organ, acoustic guitar, French horn, electric guitar, upright, maraca	violin, grand piano
arachnid	black and gold garden spider, wolf spider, harvestman, tick, black widow, barn spider	tarantula, scorpion
aquatic bird	dowitcher, goose, albatross, limpkin, white stork, red-backed sandpiper	drake, crane
ungulate	hippopotamus, hog, llama, hartebeest, ox, gazelle	warthog, zebra
passerine	house finch, magpie, goldfinch, indigo bunting, chickadee, brambling	bulbul, water ouzel

Table 12: Labeled Split of CIFAR100 used in Section 4. We construct data settings based on its hierarchical class structure. U_1 - L_1 / U_2 - L_2 are share the same superclasses.

Superclass	Labeled Subclasses (L_1)	Unlabeled Subclasses (U_1)
aquatic_mammals	dolphin, otter, seal, whale	beaver
fish	flatfish, ray, shark, trout	aquarium_fish
flower	poppy, rose, sunflower, tulip	orchids
food containers	bowl, can, cup, plate	bottles
fruit and vegetables	mushroom, orange, pear, sweet_pepper	apples
household electrical devices	keyboard, lamp, telephone, television	clock
household furniture	chair, couch, table, wardrobe	bed
insects	beetle, butterfly, caterpillar, cockroach	bee
large carnivores	leopard, lion, tiger, wolf	bear
large man-made outdoor things	castle, house, road, skyscraper	bridge
Superclass	Labeled Subclasses (L_2)	Unlabeled Subclasses (U_2)
large natural outdoor scenes	forest, mountain, plain, sea	cloud
large omnivores and herbivores	cattle, chimpanzee, elephant, kangaroo	camel
medium-sized mammals	porcupine, possum, raccoon, skunk	fox
non-insect invertebrates	lobster, snail, spider, worm	crab
people	boy, girl, man, woman	baby
reptiles	dinosaur, lizard, snake, turtle	crocodile
small mammals	mouse, rabbit, shrew, squirrel	hamster
trees	oak_tree, palm_tree, pine_tree, willow_tree	maple
vehicles 1	bus, motorcycle, pickup_truck, train	bicycle
vehicles 2	rocket, streetcar, tank, tractor	lawn-mower