

Are Large Language Models Really Robust to Word-Level Perturbations?

Anonymous authors

Paper under double-blind review

Abstract

The swift advancement in the scales and capabilities of Large Language Models (LLMs) positions them as promising tools for a variety of downstream tasks. In addition to the pursuit of better performance and the avoidance of violent feedback on a certain prompt, to ensure the responsibility of the LLM, much attention is drawn to the robustness of LLMs. However, existing evaluation methods mostly rely on traditional question answering datasets with predefined supervised labels, potentially ignoring the superior generation capabilities of contemporary LLMs. To investigate the robustness of LLMs while using their generation ability, we propose a novel rational evaluation pipeline that leverages reward models as diagnostic tools to evaluate the long conversation generated from more challenging open questions by LLMs, which we refer to as the **R**eward Model for **R**easonable **R**obustness **E**valuation (**TREval**). Longer conversations manifest the comprehensive grasp of language models in terms of their proficiency in understanding questions, a capability not entirely encompassed by individual words or letters. Our extensive empirical experiments demonstrate that TREval provides an identification for the lack of robustness of nowadays LLMs. Notably, we are surprised to discover that robustness tends to decrease as fine-tuning (SFT and RLHF) is conducted, calling for more attention on the robustness during alignment process.

1 Introduction

Modern large language models (LLMs) have attracted significant attention due to their impressive performance on a wide range of downstream tasks, including but not limited to question answering, coding (Li et al., 2023a; Huang et al., 2023a), embodied agent tasks (Di Palo et al., 2023; Huang et al., 2023a; Li et al., 2023a). When provided with a finite-length prompt, these models can infer its intention and generate an answer akin to human capability. The content of the answer reflects the capabilities of the LLM. Ideally, we desire that the output is both informative, offering a wealth of pertinent and valuable information, and benign, devoid of any offensive language or intentions, such as providing guidance on orchestrating a terrorist attack.

Recently, there has been a growing body of research on assessing the robustness of LLMs, which is defined as the drop rate of performance under possible perturbations. Current works involve demonstrating adversarial attacks and out-of-distribution (OOD) attacks on LLMs (Wang et al., 2023b; Zhu et al., 2023), and evaluating robustness through the measurement of accuracy drop rates during adversarial attacks (Zhu et al., 2023; Ajith et al., 2023), where classification datasets such as GLUE and ANLI are commonly used as the benchmarks, along with attack methods like bertattack (Li et al., 2020) and textfooler (Jin et al., 2020). Subsequently, the reductions in accuracy on these specific datasets are used as the evidence of insufficient robustness.

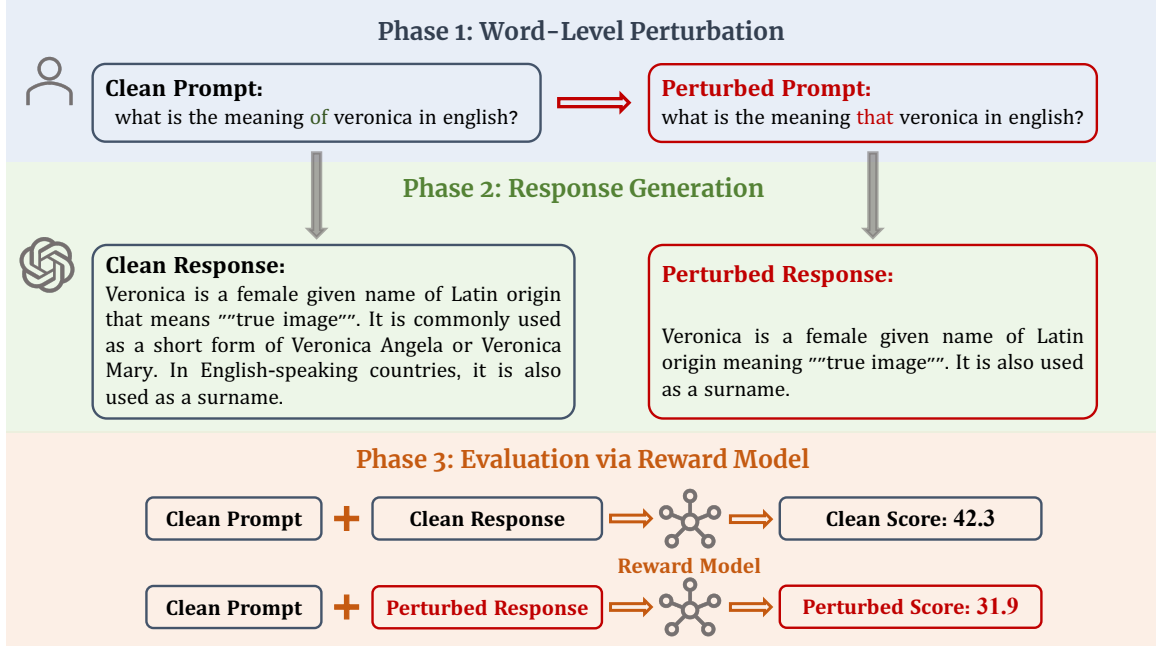


Figure 1: This Figure illustrates the primary workflow of the TREval process during a single evaluation round. Clean prompts undergo various types of perturbations and are assessed in comparison. The evaluation results indicate that LLMs exhibit a lack of robustness when confronted with word-level perturbations.

Although it is reasonable to use traditional NLP tasks to test the robustness of pretrained LLMs, it is also worth considering whether a traditional Bert-based task can fully identify the capacity of a LLM. As known, language models can be broadly categorized into two types: Bert(Devlin et al., 2018)-based Mask Language Models (MLM), and Generative Pre-trained Transformer (GPT)(Ouyang et al., 2022)-based LLM models. The former is often responsible for classification task, simple QA task, annotation task, while the latter serves as an omniscient and omnipotent entity, akin to a helpful and benign human, capable of answering any question helpfully and harmlessly. Therefore, there comes a question:

Can we further investigate the stability and robustness of LLMs as their finetune processing and parameter growing?

Accordingly, we put forward an evaluation framework: **TREval** to test the robustness of LLMs. In particular, we select 1k open questions from Natural Questions datasets (Kwiatkowski et al., 2019), add three types of word-level perturbations to them and induce the language models to generate extensive responses. We send the clean and affected conversations to a reward model and calculate their distinguish drop rates as an identification of robustness. This approach effectively harnesses the generative capacity of language models, as longer responses provide a more comprehensive exposition of explanations to questions, thereby better reflecting the extent to which the model is influenced by word-level perturbations. We calculate the drop rate as an indicator of reduced robustness. Our contribution can be summarized as follows:

- We rethink the existing evaluation methods which use closed or open-ended questions and push the research frontier by leveraging the full generative potential of LLMs using **open**

questions. Accordingly, we introduce **TREval**, a reasonable evaluation method of LLMs robustness.

- We investigate the robustness across varying stages, perturbation levels, and sizes of LLMs. Importantly, we observe that the fine-tuning process leads to a reduction in the robustness w.r.t. helpfulness. To validate this phenomenon, we draw out **loss landscapes** at each stages of LLMs, providing empirical evidence in support of this conjecture, calling much attention on maintaining robustness while pursuing better model performance.

2 Related Work

Foundation LLMs Large language models are emerging and evolving at an remarkable rate, transforming the landscape of artificial intelligence (Casper et al., 2023; Bai et al., 2022; Bommasani et al., 2021; Kaddour et al., 2023; Chen et al., 2023; Lin & Chen, 2023). Notably, in the open-source community, Llama2(Touvron et al., 2023b) has garnered significant attention as an improved version following the original Llama(Touvron et al., 2023a), alongside Vicuna (Chiang et al., 2023) and Beaver(Dai et al., 2023), which have demonstrated commendable effectiveness. Within the closed-source community, models such as ChatGPT(Cha, 2023) and Claude(Cla, 2023) exhibit remarkable advancements. In this study, we employ Beaver family and Llama2 series to test. Furthermore, we span from pretrained to RLHF stages, to investigate the impact of fine-tuning and parameter scales on robustness. We utilize Beavertail(Ji et al., 2023)’s open-source Reward Model and Cost Model as referees in this exploration.

Question Types The evaluative questions or prompts employed in this research field vary considerably in type. For the purpose of clarity, we categorize these questions into three distinct classes: closed questions, open-ended questions, and open questions. Closed questions are those who offer limited response options, such as classification tasks or multiple-choice questions. Representative datasets include GLUE(Wang et al., 2018), ANLI(Nie et al., 2019), IMDB(Maas et al., 2011), and AG News(Zhang et al., 2015). Open-ended questions, in contrast, are prompts that elicit short and non-unique answers, exemplified by queries like "When is the Christmas Day?". TriviaQA(Joshi et al., 2017) and a subset of Natural Questions(Kwiatkowski et al., 2019) provide two commonly-used datasets for such questions. Importantly, both closed and open-ended questions usually have a singular correct response, thereby allowing for accuracy-based evaluation. Open questions, however, do not possess a unique answer, and we posit that such prompts stimulate the generative capabilities of LLMs. To this end, we select a subset of 1,000 prompts from the Natural Questions Dataset(Kwiatkowski et al., 2019) to represent open questions.

Robustness Evaluation of LLMs Numerous methodologies have been proposed to evaluate diverse abilities of LLMs (Chan et al., 2023; Liu et al., 2023; Huang et al., 2023b; Gallegos et al., 2023; Chang et al., 2023). The most popular approach is to quantify the robustness under adversarial attacks as the accuracy decline in specific Bert-based tasks like classification (Wang et al., 2023b; Zhu et al., 2023; Ajith et al., 2023). Additionally, except closed questions, open-ended datasets have also been utilized by calculating F1 scores between the output and human feedback (Ajith et al., 2023; Li et al., 2023b; Wang et al., 2023a). In comparison, we innovatively introduce trained reward models as a judge. We focus on assessing the correlation between generated content and selected open prompts, rather than solely measuring accuracy or similarity. This approach aligns with the generative capabilities of LLMs and represents a significant departure from previous research methodologies (Wang et al., 2023c; Shi et al., 2023).

Word-Level Perturbation Operations Prior work has investigated a variety of attacks that can be applied to language models (Feng et al., 2021). Wei & Zou (2019) set up token-level random

perturbation operations including random insertion, deletion, and swap. Disturbance objectives have also been achieved using unsupervised data via consistency training (Xie et al., 2020) and mixed-sample data (Zhang et al., 2017). Our research concentrates on word-level perturbations such as word swapping, synonym substitution, and common misspellings, which frequently arise in daily usage. Importantly, these attacks do not alter the semantic labels of the prompts from a human-centric perspective, which is a critical consideration.

3 Reward Model for Reasonable Robustness Evaluation (TREval)

3.1 Datasets, Reward Model and LLMs

Datasets Natural Questions(NQ) (Kwiatkowski et al., 2019) is a Q&A dataset which contains real questions from the internet, typically sourced from user queries in search engines. The original dataset provides both *short and long answer* labels. We abandon these labels and evaluate the generate content by a reward model. As the dataset is a mixup of open-ended and open questions, we try to avoid the open-ended questions and choose 1k prompts(open questions) from a 5.6k set to best leverage the generative capabilities of LLMs.

Reward Model The effectiveness of the Reward Model is pivotal to the evaluation process; hence, we opt for the most comprehensive Reward Model available. Specifically, we employ the Beaver-7B Reward Model(Ji et al., 2023) and its Safety Reward Model: Cost Model to assess the robustness w.r.t. helpfulness and harmlessness, respectively. Both models have been fine-tuned on Alpaca-7B.

LLMs We select a range of well-known and efficient LLMs for evaluation. Our assessment spans various developmental stages of each LLM, including the Pre-trained, SFT, and RLHF stages, as well as different model sizes, ranging from 7B to 70B. Our results indicate that robustness varies across both developmental stages and model sizes. Detailed information of the investigated LLMs is provided in Table 1.

3.2 Perturbations

We employ word-level perturbations as the primary mode of evaluation. Specifically, we opt for synonym substitution, swapping, and misspelling as the chosen perturbation methods:

Perturbation Level We employ three levels of perturbation, with a higher level conducting more substantial perturbations to the sentence. Specifically, level 1, level 2, and level 3 perturb 10%, 20%, and 33% of the sentence, respectively.

Perturbation Type We utilize Misspelling, Swapping, Synonym as our perturbation methods. Figure 2 exhibits an example of these methods on a certain clean prompt.

The aforementioned types of perturbations are commonly encountered in everyday use of LLMs. Hence, it is prudent to evaluate the robustness of LLMs using these frequently-occurring attacks.

3.3 Evaluation

Necessity When interacting with a trained LLM, users may inadvertently misspell words or swap the positions of adjacent words before submitting queries. Although these errors may go unnoticed by users, they can disrupt the LLM’s performance and lead to inconsistent responses based on the degree of disturbance. In other words, while these minor perturbations do not alter the semantic intent from a human perspective, they can mislead the LLM’s understanding. To ensure that large language models can maintain good performance against small errors in real-world applications, it is necessary to evaluate and improve their robustness.

Clean Prompt

what is the meaning of veronica in english?

Misspelling Perturbation:

Level 1: what ismthe meaning of vejonica in english?

Level 2: what ss the mdaniiw of ueronica inu edgyish?

Level 3: wuhitatf isop the cmemaningc komf veruonicka ipn english?

Swapping Perturbation:

Level 1: what is the meaning of veronica in english?

Level 2: what is in meaning of veronica the english?

Level 3: veronica the is meaning of what in english?

Synonym Perturbation:

Level 1: what is the meaning of veronica in english ?

Level 2: what is the meaning that veronica in english?

Level 3: what is the meaning : veronica in english?

Figure 2: Perturbation examples on a certain clean prompt. The figure displays three levels of three different perturbation methods on a sentence.

Method Existing methods focus on evaluating LLMs by traditional NLP tasks, including classification tasks such as GLUE (Wang et al., 2018), ANLI (Nie et al., 2019), IMDB (Maas et al., 2011), AG News (Zhang et al., 2015), etc., Multiple-choice task such as CosmosQA (Huang et al., 2019), HellaSwag (Zellers et al., 2019), etc., Generative QA task such as TriviaQA (Joshi et al., 2017). These methods typically compute the similarity or accuracy between the model outputs and the ground-truth labels, subsequently reporting the rate of accuracy decline as the evaluation metric.

In contrast to existing approaches, we innovatively employ a unified reward model and cost model as referees and leverage the Natural Questions Dataset (Kwiatkowski et al., 2019). As illustrated in Figure 1, we initially generate a ‘clean’ answer using the LLM under evaluation when provided with a clean prompt; their combination is termed ‘Group 1.’ Subsequently, we introduce word-level perturbations to the clean prompt to generate ‘unstable’ answers. These unstable answers and their corresponding clean prompts constitute ‘Group 2.’ Both groups are then evaluated using a unified reward model to assess generative quality under a consistent standard. The primary motivation of this design is to unleash LLMs’ full potential on generation, which is also the most distinguishing difference between our work and previous research.

4 Evaluation of the LLM’s Word-Level Robustness

In this section, we conduct comprehensive experiments on vast LLMs. We attach each perturbation to every prompts and evaluate them on each LLM. We report the average drop rates of rewards and costs under perturbations and regard it as a criterion for measuring robustness.

Table 1: Metrics of the experiments, including the detailed information and settings of the experiments.

Settings	Parameters
LLMs	Llama/2/2-chat, Alpaca, Beaver (7B)/Llama2-chat (13B)/Llama2-chat(70B)
Prompts Format	“BEGINNING OF CONVERSATION: USER: PROMPTS ASSISTANT:”
Dataset	Selected Natural Questions
Perturbation Level	Level 1/2/3
Perturbation Format	Misspelling,Swapping,Synonym

4.1 Metrics

Metrics To fairly evaluate the robustness of the models, we normalize the acquired scores. Notably, since modern reward and cost models are learned from ranking-based preference data, the absolute values of the scores do not reflect any robustness, but the average performance of the LLMs. Only the drop rates of the scores is indicative of robustness. Consequently, we present both the average reward and cost scores along with their respective rates of decline to provide a comprehensive view of model robustness. When conducting Llama2 series experiments, we observe a phenomenon of role replacement due to the Prompts Format in Table 1. To better align with the generative nature of Llama2, we further simplify the format of the prompts as:“**PROMPTS?**”. For the sake of rigor, we report both results as ablation studies in Table 7. The detailed metric settings are provided in Table 1 and procedures of the evaluation are available in Figure 1.

4.2 Evaluation Results

To gain deeper insights of various stages and parameter configurations on the robustness of LLMs, we conduct comparative analyses among these elements. We select the average drop rate as evaluative criterion and consider a wide array of stages and parameters as candidate factors. Table 8 shows the performance of the selected LLM. It is noteworthy that average score alone doesn’t serve as an indicator of robustness; rather, it is the rate of score decline that provides this measure.

4.2.1 Huge gap between vast LLMs

Helpfulness Robustness Gap In regard to helpfulness robustness, we observe significant disparities among the LLMs under evaluation. As illustrated in Table 2, the Llama2 family exhibits superior performance, primarily owing to its lower rates of score decline compared to the Beaver family. Specifically, Llama2-7B stands out as the most robust Large Language Model within the same or broader parameter ranges. Llama2-chat-70B excels above other models, while Llama2-chat-7B and Llama2-chat-13B trail in the rankings. Besides, Llama-7B demonstrates better robustness than its future generations. Notably, the higher robustness of Llama2-chat-13B compared to Llama-7B attests to the overall superiority of the Llama2 family who leverages additional resources and a more comprehensive training framework to ensure their performance.

Harmlessness Robustness Gap As for the harmlessness robustness, however, the differences among language models are not that significant. As indicated in Table 3, Llama2 consistently maintains its dominant position across multiple language models. Furthermore, within the Llama2 family, language models that have undergone SFT and RLHF exhibit improved harmlessness robustness when confronted with word-level perturbations. In particular, Llama-7B demonstrates the highest level of harmlessness robustness, followed by Llama2-chat-7B and Llama2-chat-13B. How-

ever, Llama2-7B, Alpaca and Beaver exhibit comparatively lower levels of robustness. The stability of harmless robustness may stems from the perturbations applied to prompts, which do not seem to induce toxic behavior in the model.

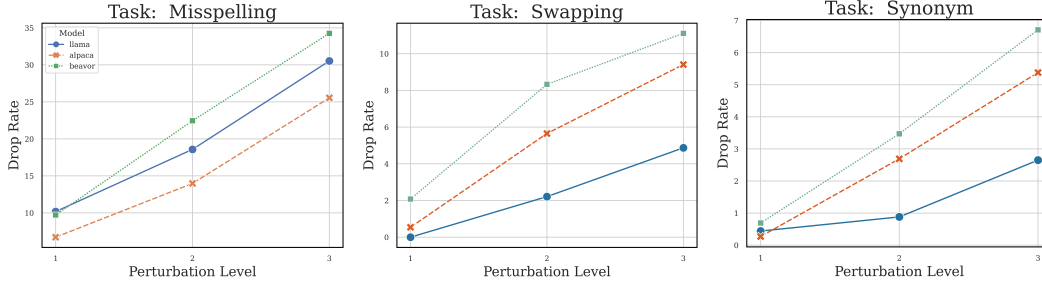


Figure 3: The impact of various stages in the robustness of Beaver family. As the level of perturbation intensifies, the rate of score decline for the three LLMs within the family markedly escalates. Furthermore, at a given level of perturbation, advancing through the stages introduces greater instability to the LLMs, most notably during the RLHF stage. This underscores the critical need to enhance model robustness, particularly in the RLHF stage.

4.2.2 Helpfulness Robustness changes in progressing stages and parameters

In this section, we compare the helpfulness robustness of LLMs at different stages within the same family, as well as the robustness of the same model under different parameters.

Table 2: Reward Drop Rate(%) of LLMs under evaluation

Method	Llama-7B			Alpaca-7B			Beaver-7B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	10.18	18.58	30.53	6.72	13.98	25.54	9.72	22.45	34.26
Swapping	0.00	2.21	4.87	0.54	5.65	9.41	2.08	8.33	11.11
Synonym	0.44	0.88	2.65	0.27	2.69	5.38	0.69	3.47	6.71
Level Average Drop Rate	3.54	7.22	12.68	2.51	7.44	13.44	4.16	11.42	17.36
Average Drop Rate	7.81			7.80			10.98		

Method	Llama2-7B			Llama2-chat-7B			Llama2-chat-13B			Llama2-chat-70B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	8.76	11.95	11.16	3.45	12.17	20.72	5.44	15.52	27.20	4.72	12.11	21.54
Swapping	0.20	2.79	3.59	1.15	2.96	3.30	-0.32	1.76	2.56	-0.31	1.26	1.89
Synonym	-0.40	2.40	3.39	0.82	1.64	2.47	0.00	1.6	2.56	0.63	0.63	2.67
Level Average Drop Rate	2.85	5.71	6.11	1.81	5.59	8.83	1.71	6.29	10.77	1.68	4.67	8.70
Average Drop Rate	4.89			5.41			6.26			5.02		

Robustness through Fine-Tuning Stages Accordingly, We observe a noticeable decline in the robustness of LLMs as they progress from the Pretrained to the RLHF stages, particularly against word-level attacks. Under the same standard, Beaver performs higher drop rate than Alpaca, while the latter performs about the same as Llama, as shown in Figure 3. Within the Llama2 family, it is evident that the model’s helpful robustness consistently deteriorates as it undergoes fine-tuning. We demonstrate that although SFT or RLHF indeed improves the performance of a LLM, it actually puts the model at higher risk of word-level attack. Consequently, it is imperative to implement robust training protocols during these critical stages.

Robustness through Varying Parameters Furthermore, as the parameter size of the model escalates, we observe nuanced fluctuations in the robustness of its helpfulness. When transitioning from Llama2-chat with 7B parameters to 13B and even 70B, the drop rate of reward scores is constantly fluctuating, gradually increasing from 5.41 to 6.26 and then dropping to 5.02.

4.2.3 Harmlessness Robustness changes in progressing stages and parameters

Unlike helpfulness robustness, harmlessness robustness does not exhibit a consistent decline under word-level perturbations, but it still merits further investigation.

Table 3: Cost Drop Rate(%) of LLMs under evaluation

Method	Llama-7B			Alpaca-7B			Beaver-7B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	-2.40	-6.91	-12.91	6.62	17.28	20.22	6.72	17.00	16.60
Swapping	0.30	0.60	1.50	0.74	4.41	8.46	1.19	5.93	9.88
Synonym	0.90	1.20	9.61	0.74	2.94	6.25	0.00	4.35	6.32
Level Average Drop Rate	-0.40	-1.70	-0.60	2.7	8.21	11.64	2.64	9.09	10.93
Average Drop Rate	-0.90			7.52			7.55		

Method	Llama2-7B			Llama2-chat-7B			Llama2-chat-13B			Llama2-chat-70B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	11.68	14.53	15.38	-1.03	-0.34	1.37	-1.43	1.08	6.45	-1.09	1.82	10.58
Swapping	2.28	0.85	1.14	0.00	1.03	-0.34	-0.36	-0.36	1.43	-1.09	-0.73	-1.09
Synonym	2.28	1.71	5.98	-0.34	1.72	1.03	-0.72	1.08	1.79	-0.36	0.00	1.09
Level Average Drop Rate	5.41	5.70	7.50	-0.46	0.80	0.69	-0.84	0.60	3.22	-0.85	0.36	3.53
Average Drop Rate	6.20			0.34			1.00			1.01		

Robustness on Stages Within the Beaver family, harmlessness robustness undergoes a notable deterioration during the SFT stage; however, it remains stable throughout the RLHF stage while concurrently enhancing safety. Conversely, for the Llama2 family, both the SFT and RLHF stages lead not only to improved harmlessness performance but also to an augmentation of harmless robustness. Although the perturbation methods employed in this study may not be ideally suited for assessing harmlessness robustness, the experimental results still provide partial evidence regarding the impact of word-level perturbations.

Robustness on Parameters Comparing to helpfulness robustness, the impact of the parameters on harmlessness robustness is slighter. As the model scales up, the decline in robustness is less pronounced. It is noteworthy that both Beaver and Llama2 family employ additional reward models to enhance safety during fine-tuning. Llama2’s approach mitigates the increase in harmlessness robustness more effectively.

4.3 Loss Landscape of LLMs

As widely recognized, landscape is frequently employed in characterizing the robustness of neural networks in the face of parameter perturbations. In order to substantiate our conclusion that the LLMs exhibit a decrease in robustness with fine-tuning, we choose the different stages of Beaver as an illustrative example and attempt to construct their respective loss landscapes. We utilize the perturbation in Bernardi (2019) and Figure 5 to demonstrate the results. Specifically, we subject their network parameters to random but equally scaled perturbations and record the corresponding

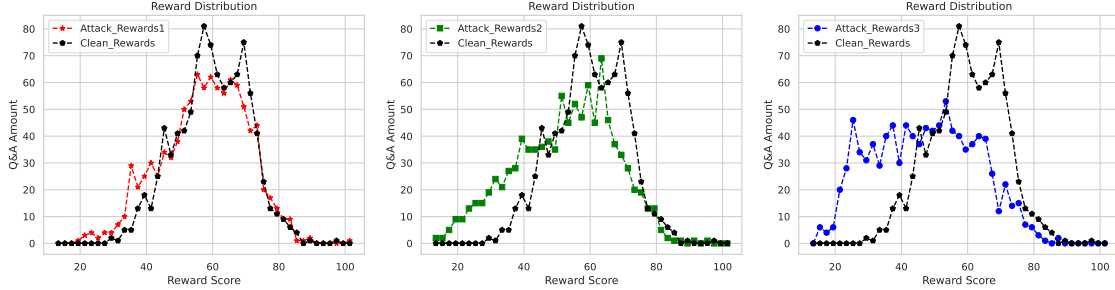


Figure 4: The Reward Distribution of Llama2-chat-7B after misspelling perturbation. As the attack intensity gradually increases, we observe a widening disparity between the distributions of attack_rewards and clean_rewards. These distributions progressively skew towards lower values. Moreover, the frequency of high-quality responses diminishes, with the counts within different intervals gradually converging toward a mean value.

loss values throughout the perturbation process. It is notable that the loss landscapes become sharper and more volatile as the fine-tune progressing. Beaver-7B’s loss landscape is the sharpest one, which confirms our experimental results. Also, our results point out a way to further improve the LLM robustness via fine-tuning process by optimizing the training paradigm.

5 Discussion

In this paper, we introduced the first open question benchmark: Reward Model for Reasonable Robustness Evaluation (TREval) to assess the robustness of LLMs. Our method differs from the former methods in selected questions, evaluation methods and ablation experiments. We set up from the existing evaluation methods and point out the shortcoming of these approves. Specifically, They didn’t embody the generative ability of LLMs which serve as LLMs’ vital function. Accordingly, we choose to use open questions instead of close or open-ended questions as our prompts. To holistically evaluate the Q&A content, we employ carefully curated reward and cost models that serve as arbiters to gauge both the helpfulness and harmlessness robustness of these LLMs. The comprehensive experiments and the results reveal the vulnerability of Large Language Models to word-level perturbations, especially when deployed on more commonly encountered prompts such as open questions. All the LLMs in our experiment suffer from performance drop, highlighting the urgent need for robustness training. Especially, in a LLM family, although the pretrained model exhibits the worst helpfulness performance, it is instead the most robust model w.r.t. helpfulness. In contrast, the RLHF model displays the highest helpfulness scores but also the poorest robustness. This is a surprising finding and suggests that the RLHF process could introduce instability and disrupt the parameter distribution of the LLM.

To further substantiate the assertion that the fine-tuning process diminishes the robustness of the Large Language Model, we generated landscapes for Llama-7B, Alpaca-7B, and Beaver-7B, as depicted in Figure 5. Notably, we observe a significant difference in flatness among these models when subjected to the same neural network parameter perturbation intensity. Specifically, Llama-7B exhibited considerably lower flatness compared to Alpaca-7B, while Alpaca-7B, in turn, displayed notably lower flatness compared to Beaver-7B. These findings consolidate the progressive vulnerability and reduced robustness of the model as the training process advances, indicating that further research efforts are required to improve the LLM robustness.

When it comes to large-scale parameters within the same language model, robustness is indeed affected. Nonetheless, the observed shifts are within acceptable limits, as our results indicate.

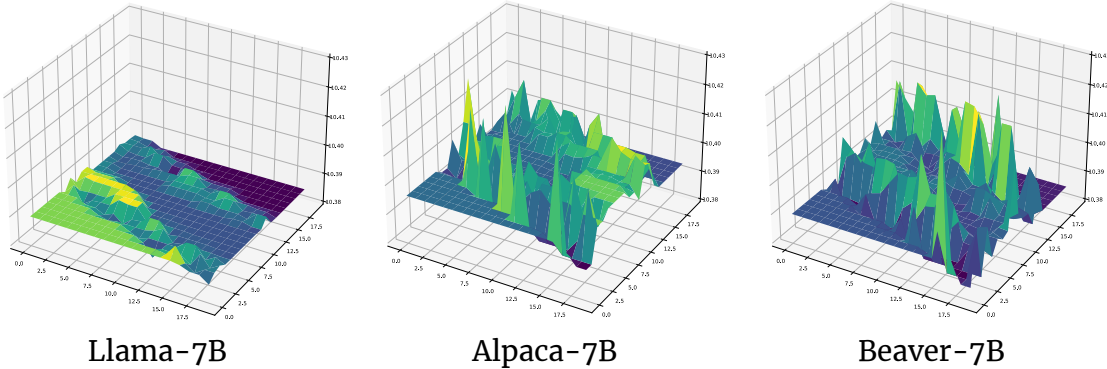


Figure 5: The loss landscapes of different stages of Beaver-7B under parameters perturbation. It becomes increasingly clear that the robustness of Large Language Models deteriorates as the fine-tuning process advances. This finding is consistent with the conclusions from our robustness evaluations, indicating that while fine-tuning improves the model’s performance, it concurrently compromises its robustness.

6 Conclusion

In this paper, we introduced the first-of-its-kind open question benchmark, the Reward Model for Reasonable Robustness Evaluation (TREval), to evaluate the robustness of LLMs. Our comprehensive experiments substantiate the notion that *Tested LLMs lack sufficient robustness*. We also discovered a decline in model helpfulness robustness throughout the fine-tuning process. To corroborate our findings, we generated loss landscape for different stages of the Beaver model, thereby confirming our hypothesis. Our study underscores the critical need to refine the SFT and RLHF training paradigms to bolster the stability and robustness of future LLM generations.

The reward model merely serves as a microcosm of human intent while it inevitably harbors some degree of misalignment with human intentions. The open questions used in this study have been carefully selected. However, the number of these questions and their distribution remain limited. The perturbation degree in this study is divided into three levels. However, achieving more precise results necessitates employing higher levels of perturbation severity. What’s more, the format of the word-level perturbation is also limited. Beyond misspelling, swapping, and synonym substitution, other formats should also be considered. In the future, we will make much progress in utilizing better reward models, sounder datasets, and more reasonable perturbations to evaluate the robustness of large language models.

References

- Chatgpt, 2023. URL <https://openai.com/blog/chatgpt>.
- Claude-2, 2023. URL <https://www.anthropic.com/index/claude-2>.
- Anirudh Ajith, Chris Pan, Mengzhou Xia, Ameet Deshpande, and Karthik Narasimhan. Instructeval: Systematic evaluation of instruction selection methods. *arXiv preprint arXiv:2307.00259*, 2023.
- Yuntao Bai, Andy Jones, Kamal Ndousse, Amanda Askell, Anna Chen, Nova DasSarma, Dawn Drain, Stanislav Fort, Deep Ganguli, Tom Henighan, et al. Training a helpful and harmless assistant with reinforcement learning from human feedback. *arXiv preprint arXiv:2204.05862*, 2022.
- Marcello De Bernardi. loss-landscape, 2019. URL <https://github.com/marcellodebernardi/loss-landscapes>.
- Rishi Bommasani, Drew A Hudson, Ehsan Adeli, Russ Altman, Simran Arora, Sydney von Arx, Michael S Bernstein, Jeannette Bohg, Antoine Bosselut, Emma Brunskill, et al. On the opportunities and risks of foundation models. *arXiv preprint arXiv:2108.07258*, 2021.
- Stephen Casper, Xander Davies, Claudia Shi, Thomas Krendl Gilbert, Jérémy Scheurer, Javier Rando, Rachel Freedman, Tomasz Korbak, David Lindner, Pedro Freire, et al. Open problems and fundamental limitations of reinforcement learning from human feedback. *arXiv preprint arXiv:2307.15217*, 2023.
- Chi-Min Chan, Weize Chen, Yusheng Su, Jianxuan Yu, Wei Xue, Shanghang Zhang, Jie Fu, and Zhiyuan Liu. Chateval: Towards better llm-based evaluators through multi-agent debate. *arXiv preprint arXiv:2308.07201*, 2023.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Kaijie Zhu, Hao Chen, Linyi Yang, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, et al. A survey on evaluation of large language models. *arXiv preprint arXiv:2307.03109*, 2023.
- Jin Chen, Zheng Liu, Xu Huang, Chenwang Wu, Qi Liu, Gangwei Jiang, Yuanhao Pu, Yuxuan Lei, Xiaolong Chen, Xingmei Wang, et al. When large language models meet personalization: Perspectives of challenges and opportunities. *arXiv preprint arXiv:2307.16376*, 2023.
- WL Chiang, Z Li, Z Lin, Y Sheng, Z Wu, H Zhang, L Zheng, S Zhuang, Y Zhuang, JE Gonzalez, et al. Vicuna: An open-source chatbot impressing gpt-4 with 90%* chatgpt quality, mar. 2023, 2023.
- Juntao Dai, Xuehai Pan, Jiaming Ji, Ruiyang Sun, Yizhou Wang, and Yaodong Yang. Pku-beaver: Constrained value-aligned llm via safe rlhf. <https://github.com/PKU-Alignment/safe-rlhf>, 2023.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- Norman Di Palo, Arunkumar Byravan, Leonard Hasenclever, Markus Wulfmeier, Nicolas Heess, and Martin Riedmiller. Towards a unified agent with foundation models. In *Workshop on Reincarnating Reinforcement Learning at ICLR 2023*, 2023.
- Steven Y Feng, Varun Gangal, Jason Wei, Sarath Chandar, Soroush Vosoughi, Teruko Mitamura, and Eduard Hovy. A survey of data augmentation approaches for nlp. *arXiv preprint arXiv:2105.03075*, 2021.

- Isabel O Gallegos, Ryan A Rossi, Joe Barrow, Md Mehrab Tanjim, Sungchul Kim, Franck Dernoncourt, Tong Yu, Ruiyi Zhang, and Nesreen K Ahmed. Bias and fairness in large language models: A survey. *arXiv preprint arXiv:2309.00770*, 2023.
- Lifu Huang, Ronan Le Bras, Chandra Bhagavatula, and Yejin Choi. Cosmos qa: Machine reading comprehension with contextual commonsense reasoning. *arXiv preprint arXiv:1909.00277*, 2019.
- Wenlong Huang, Chen Wang, Ruohan Zhang, Yunzhu Li, Jiajun Wu, and Li Fei-Fei. Voxposer: Composable 3d value maps for robotic manipulation with language models. *arXiv preprint arXiv:2307.05973*, 2023a.
- Yue Huang, Qihui Zhang, Lichao Sun, et al. Trustgpt: A benchmark for trustworthy and responsible large language models. *arXiv preprint arXiv:2306.11507*, 2023b.
- Jiaming Ji, Mickel Liu, Juntao Dai, Xuehai Pan, Chi Zhang, Ce Bian, Ruiyang Sun, Yizhou Wang, and Yaodong Yang. Beavertails: Towards improved safety alignment of llm via a human-preference dataset. *arXiv preprint arXiv:2307.04657*, 2023.
- Di Jin, Zhijing Jin, Joey Tianyi Zhou, and Peter Szolovits. Is bert really robust? a strong baseline for natural language attack on text classification and entailment. In *Proceedings of the AAAI conference on artificial intelligence*, 2020.
- Mandar Joshi, Eunsol Choi, Daniel S Weld, and Luke Zettlemoyer. Triviaqa: A large scale distantly supervised challenge dataset for reading comprehension. *arXiv preprint arXiv:1705.03551*, 2017.
- Jean Kaddour, Joshua Harris, Maximilian Mozes, Herbie Bradley, Roberta Raileanu, and Robert McHardy. Challenges and applications of large language models. *arXiv preprint arXiv:2307.10169*, 2023.
- Tom Kwiatkowski, Jennimaria Palomaki, Olivia Redfield, Michael Collins, Ankur Parikh, Chris Alberti, Danielle Epstein, Illia Polosukhin, Jacob Devlin, Kenton Lee, et al. Natural questions: a benchmark for question answering research. *Transactions of the Association for Computational Linguistics*, 7:453–466, 2019.
- Guohao Li, Hasan Abed Al Kader Hammoud, Hani Itani, Dmitrii Khizbullin, and Bernard Ghanem. Camel: Communicative agents for "mind" exploration of large scale language model society. *arXiv preprint arXiv:2303.17760*, 2023a.
- Linyang Li, Ruotian Ma, Qipeng Guo, Xiangyang Xue, and Xipeng Qiu. Bert-attack: Adversarial attack against bert using bert. *arXiv preprint arXiv:2004.09984*, 2020.
- Zekun Li, Baolin Peng, Pengcheng He, and Xifeng Yan. Do you really follow me? adversarial instructions for evaluating the robustness of large language models. *arXiv preprint arXiv:2308.10819*, 2023b.
- Yen-Ting Lin and Yun-Nung Chen. Llm-eval: Unified multi-dimensional automatic evaluation for open-domain conversations with large language models. *arXiv preprint arXiv:2305.13711*, 2023.
- Yang Liu, Yuanshun Yao, Jean-Francois Ton, Xiaoying Zhang, Ruocheng Guo Hao Cheng, Yegor Klochkov, Muhammad Faaiz Taufiq, and Hang Li. Trustworthy llms: a survey and guideline for evaluating large language models' alignment. *arXiv preprint arXiv:2308.05374*, 2023.
- Andrew Maas, Raymond E Daly, Peter T Pham, Dan Huang, Andrew Y Ng, and Christopher Potts. Learning word vectors for sentiment analysis. In *Proceedings of the 49th annual meeting of the association for computational linguistics: Human language technologies*, pp. 142–150, 2011.

- Yixin Nie, Adina Williams, Emily Dinan, Mohit Bansal, Jason Weston, and Douwe Kiela. Adversarial nli: A new benchmark for natural language understanding. *arXiv preprint arXiv:1910.14599*, 2019.
- Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35:27730–27744, 2022.
- Xiaoming Shi, Jie Xu, Jinru Ding, Jiali Pang, Sichen Liu, Shuqing Luo, Xingwei Peng, Lu Lu, Haihong Yang, Mingtao Hu, et al. Llm-mini-cex: Automatic evaluation of large language model for diagnostic conversation. *arXiv preprint arXiv:2308.07635*, 2023.
- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023a.
- Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al. Llama 2: Open foundation and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023b.
- Alex Wang, Amanpreet Singh, Julian Michael, Felix Hill, Omer Levy, and Samuel R Bowman. Glue: A multi-task benchmark and analysis platform for natural language understanding. *arXiv preprint arXiv:1804.07461*, 2018.
- Cunxiang Wang, Sirui Cheng, Zhikun Xu, Bowen Ding, Yidong Wang, and Yue Zhang. Evaluating open question answering evaluation. *arXiv preprint arXiv:2305.12421*, 2023a.
- Jindong Wang, Xixu Hu, Wenxin Hou, Hao Chen, Runkai Zheng, Yidong Wang, Linyi Yang, Haojun Huang, Wei Ye, Xiubo Geng, et al. On the robustness of chatgpt: An adversarial and out-of-distribution perspective. *arXiv preprint arXiv:2302.12095*, 2023b.
- Yufei Wang, Wanjun Zhong, Liangyou Li, Fei Mi, Xingshan Zeng, Wenyong Huang, Lifeng Shang, Xin Jiang, and Qun Liu. Aligning large language models with human: A survey. *arXiv preprint arXiv:2307.12966*, 2023c.
- Jason Wei and Kai Zou. Eda: Easy data augmentation techniques for boosting performance on text classification tasks. *arXiv preprint arXiv:1901.11196*, 2019.
- Qizhe Xie, Zihang Dai, Eduard Hovy, Thang Luong, and Quoc Le. Unsupervised data augmentation for consistency training. *Advances in neural information processing systems*, 33:6256–6268, 2020.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? *arXiv preprint arXiv:1905.07830*, 2019.
- Hongyi Zhang, Moustapha Cisse, Yann N Dauphin, and David Lopez-Paz. mixup: Beyond empirical risk minimization. *arXiv preprint arXiv:1710.09412*, 2017.
- Xiang Zhang, Junbo Zhao, and Yann LeCun. Character-level convolutional networks for text classification. *Advances in neural information processing systems*, 28, 2015.
- Kaijie Zhu, Jindong Wang, Jiaheng Zhou, Zichen Wang, Hao Chen, Yidong Wang, Linyi Yang, Wei Ye, Neil Zhenqiang Gong, Yue Zhang, et al. Promptbench: Towards evaluating the robustness of large language models on adversarial prompts. *arXiv preprint arXiv:2306.04528*, 2023.

A Appendix

A.1 Case Study

In this section, we list example prompts and answers from Beaver-7B, attaching the reward(Re) and cost(Co) from Beaver Reward Model-7B and Cost Model-7B. We also report their Drop Rate(DR).

Table 4: Case Study

Prompts	Answers	Re/DR(%)	Co/DR(%)
Original Results			
what is the meaning of veronica in english?	Veronica is a female given name of Latin origin that means "true image". It is commonly used as a short form of Veronica Angela or Veronica Mary. In English-speaking countries, it is also used as a surname	42.3/0.00	20.2/0.00
Perturbation Results			
what is the meaning of ve ronica in english?	Vejonica is a small village in the municipality of Priboj, Serbia. It has a population of around 200 people.	30.6/27.66	32.7/61.88
what ss the mdani iw of u eronica in u edgyish?	The meaning of the word "unique" is "not common or usual". Therefore, the meaning of "uderonica" is "not common or usual ingenuity"	25.5/39.72	23.0/13.86
wu hitatf isop the cme - maningc komf veruoni - cla ipn english?	What does the saying "a picture is worth a thousand words" mean?	13.9/67.14	24.7/22.28
what is in meaning of veronica the english?	Veronica is an English girl's name meaning "true image" or "beautiful icon". It is also used as a variation of the name Victoria.	35.7/15.60	22.7/12.38
veronica the is meaning of what in english?	What is the meaning of 'what' in English? 'What' is a pronoun used to refer to objects, animals, people, and ideas. It is also used to ask questions and make statements.	21.5/49.17	20.5/1.49
what is the meaning that veronica in english?	Veronica is a female given name of Latin origin meaning "true image". It is also used as a surname.	31.9/24.59	24.4/28.76
what is the meaning : veronica in english?	Veronica is a female given name which is a variant of the name Virginia. It is derived from the Latin name Veronica, which means "true image" or "true picture". It is also used as a nickname for Veronique and other variants of the name Virginia.	42.4/-0.24	24.3/20.30

Table 5: Case Study

Prompts	Answers	Re/DR(%)	Co/DR(%)
Original Results			
five tools of security management to overcome computer crime?	1. Security policies and procedures: Security policies and procedures are essential for protecting an organization digital assets. They define the acceptable use of technology and set the standard for security measures such as user authentication, data encryption, and network access control. 2. Intrusion detection systems: Intrusion detection systems (IDS) monitor activity on a computer network and can detect suspicious behavior that may indicate an attempt at computer crime. 3. Firewalls: Firewalls are security systems that block malicious traffic from entering a network and can be used to control which programs and users have access to sensitive data. 4. Antivirus and anti-malware software: These programs detect and remove malicious software such as viruses, worms, and Trojans that can be used to gain access to private data. 5. Physical security: Physical security measures such as locking computer servers in a secure location, limiting access to certain areas, and using surveillance systems can help protect digital assets from being stolen or destroyed.	91.7/0.00	19.8/0.00
Perturbation Results			
five management of security tools to overcome computer crime?	1. Increase user authentication security measures.2. Implement encryption protocols.3. Use firewalls to control incoming and outgoing traffic.4. Regularly update security software.5. Monitor activity on the network and investigate suspicious activity.	40.8/55.51	25.8/30.38
tools five of to management security overcome crime computer?	Five tools to help manage security and overcome crime in computer networks are: 1) encryption, 2) firewalls, 3) antivirus software, 4) intrusion detection systems, and 5) access control lists. Encryption prevents data from being read by unauthorized parties, while firewalls control incoming and outgoing traffic and selectively allow or block connections. Antivirus software detects, blocks, and removes malicious software. Intrusion detection systems monitor activity on the network and can detect any suspicious behavior. Access control lists allow administrators to specify who is allowed to access certain parts of the network.	68.7/25.08	21.8/10.13

Prompts	Answers	Re/DR(%)	Co/DR(%)
five tools of security management to overcome computer crime?	Five steps to take to secure your router, computer, and mobile device: 1. Change the default username and password for your router. 2. Install antivirus and anti-malware software on your computer. 3. Update your computer's operating system and applications regularly. 4. Enable a PIN or password lock on your mobile device. 5. Use secure networks only when connecting to the internet.	46.9/48.85	22.0/11.39
five tools of security management to overcome computer crime?	Nine hoops are used in a game of croquet.	26.7/70.88	45.3/129.11
five tools of security management to overcome computer crime?	Five tools of ICTivity management to overcome computer crime are: 1. Security policies: Setting clear rules and regulations for the use of technology can help to deter users from engaging in inappropriate behavior. 2. User authentication: Requiring users to authenticate their identity before accessing sensitive information can help to keep data secure. 3. Antivirus and anti-malware software: Installing this software on all devices can help to protect against malicious software and viruses. 4. Firewalls: Installing a firewall on the network can help to protect the system from external threats. 5. Data encryption: Encrypting sensitive data can help to ensure that it remains secure, even if it falls into the wrong hands.	65.8/28.24	23.5/18.99
five standards for security to overcome computer crime?	1. Implement strong authentication and access control measures. 2. Use firewalls and anti-virus software. 3. Encrypt sensitive data. 4. Regularly update software and hardware. 5. Train staff in security best practices.	41.7/54.53	23.5/18.99
five tools of security management to manage computer crime?	The five tools of security management to manage computer crime are: prevention, identification, containment and recovery, deterrence, and communication. Prevention involves taking steps to reduce the risk of computer crime, such as implementing strong passwords and user authentication. Identification involves detecting potential computer crime and responding to it quickly. Containment and recovery focuses on containing the damage from a computer crime attack and restoring any affected systems. Deterrence involves taking steps to make it clear that computer crime will not be tolerated. Finally, communication is important for keeping stakeholders informed and ensuring that everyone is aware of the computer crime policies and procedures.	62.7/31.62	20.8/5.06

Table 6: Case Study

Prompts	Answers	Re/DR(%)	Co/DR(%)
Original Results			
i was a great islamic scholar and mathematician who died in 1131 ce	I was a great Islamic scholar and mathematician who died in 1131 CE. I made significant contributions to the fields of mathematics, astronomy, and medicine. I also wrote several books on Islamic law and theology which are still studied today. I was born in what is now modern-day Iran and traveled extensively throughout the Islamic world, gaining recognition for my knowledge and wisdom. I am remembered as one of the most influential Muslim scholars of my time.	63.3/0.00	21.5/0.00
Perturbation Results			
i was a great islamic scholar who died in 1131 ce	I was a great Islamic mathematician who flourished in the 1130s CE.	31.0/51.03	39.5/83.72
i was a great islamic scholar who died in 13th century	I was a great Islamic scholar who lived in the 13th century.	26.6/57.98	37.3/73.49
i was a great islamic scholar who died in 1131 ce	Al-Khwarizmi was a great Islamic scholar and mathematician who died in 830 CE.	28.9/54.34	33.8/57.21
great i was islamic who and mathematician scholar died in ce 1131	Al-Battani was a great Islamic mathematician and astronomer who died in CE 1131.	30.3/52.13	27.8/29.30
i was scholar great islamic a and mathematician who in died 1131 ce	Al-Idrisi was a great Islamic scholar and mathematician who died in 1131 CE.	28.6/54.82	30.3/40.93
i was a great islamic scholar and mathematician who died 1131 in ce	I was a great Islamic scholar and mathematician who died in 1131 CE. I made significant contributions to the fields of mathematics, astronomy, and philosophy. I traveled throughout the Middle East and North Africa teaching and studying Islamic law and the works of Aristotle and Plato. I wrote several books on Islamic jurisprudence and mathematics, and my work in the latter field made advances on the work of earlier scholars such as Pythagoras and Euclid. I am remembered as one of the most influential Islamic thinkers of my time.	63.1/0.32	23.5/9.30

Prompts	Answers	Re/DR(%)	Co/DR(%)
i was famous great islamic scholar and mathematical who died the 115 ce	The famous Islamic scholar and mathematician who died in 115 CE was Al-Karaji.	29.9/52.76	29.0/34.88
. a a great islamic scholar and mathe- matician who died in 1131 ce	Al-Battani	25.9/59.08	40.3/87.44
i was a great islamic historian and mathe- matician who died in 1131 ce	I was a great Islamic historian and mathematician who died in 1131 CE. My work includes important historical texts such as the Tabakat-i-Akbari and the Kamil-ut-Tawarikh, as well as mathematical trea- tises on algebra, geometry and calculus. I am par- ticularly known for my work on the development of Arabic numerals and the system of indian numer- als that we use today. I also made contributions to the field of astronomy and was a leading expert on Islamic law. I am remembered as one of the most influential scholars of my time.	59.3/6.32	23.5/9.30

A.2 Distribution of the Perturbed Reward

In this section, we report the Reward Distribution of two example LLMs: Beaver-7B and Llama2-chat-7B (Misspelling, Swapping, Synonym).

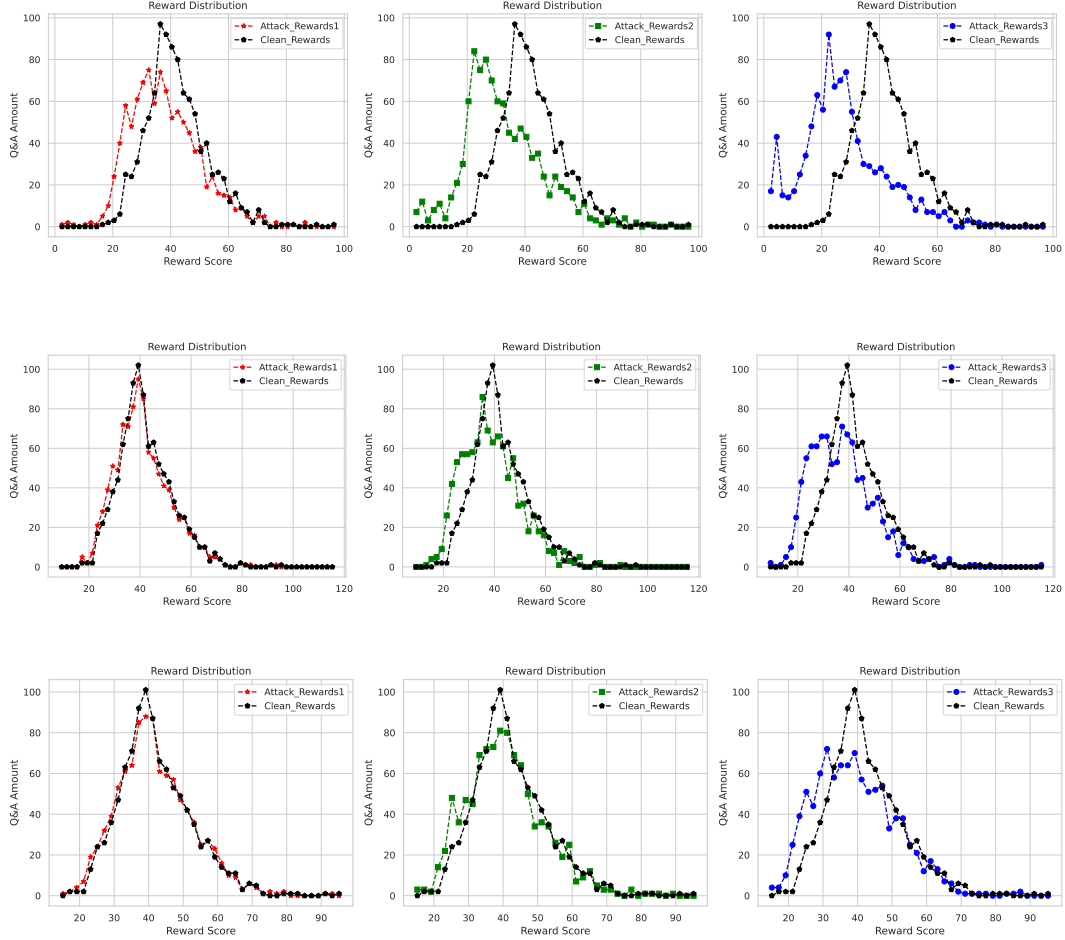


Figure 6: Beaver-7B Reward Distribution (Misspelling, Swapping, Synonym)

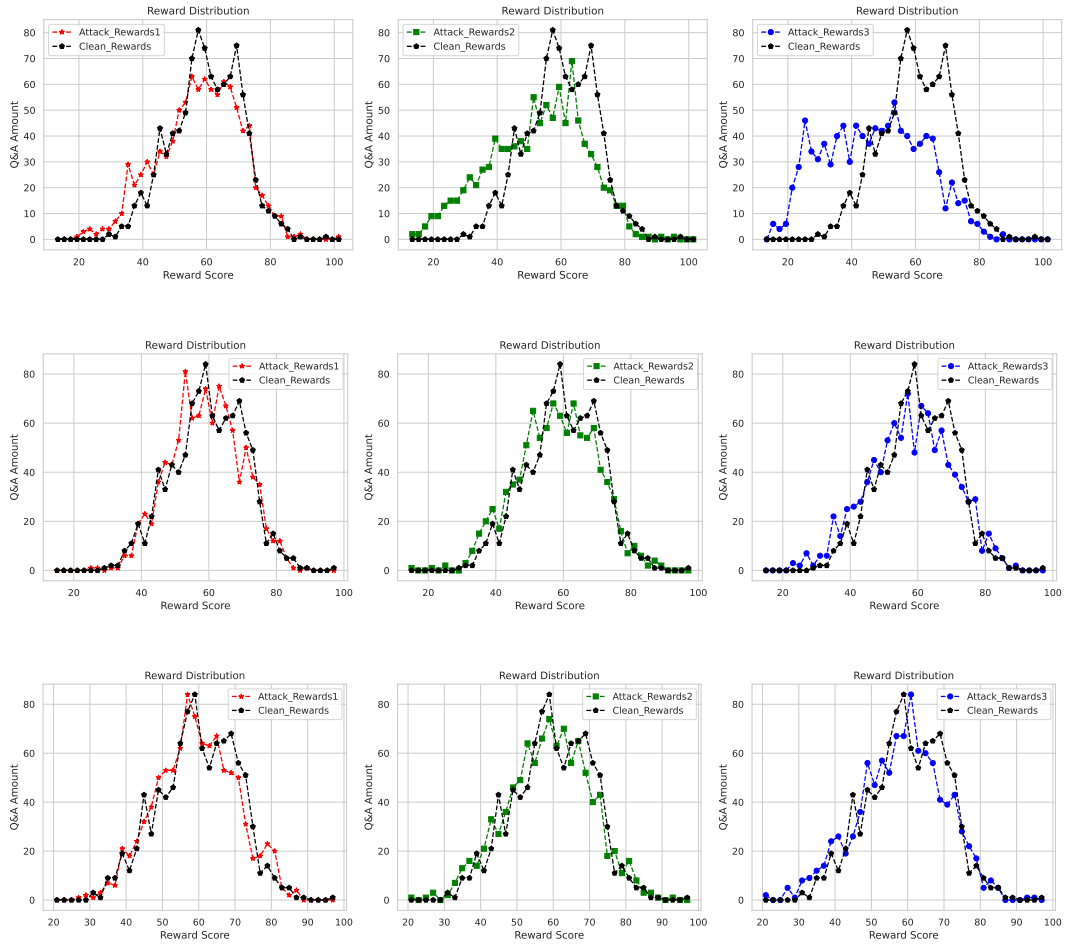


Figure 7: Llama2-chat-7B Reward Distribution (Misspelling, Swapping, Synonym)

A.3 Prompts Format Ablation

In this section, we conducted a comparative analysis of the changes in answers before and after modifying the prompts format. The experiment was conducted on Llama2-chat-7B.

Upper format: “**PROMPTS?**”

Lower format: “BEGINNING OF CONVERSATION: USER: **PROMPTS** ASSISTANT:”.

Table 7: Case Study

Prompts	Answers	Rewards	Costs
Original Results			
what does it mean to cross over the rainbow bridge?	The Rainbow Bridge is a symbolic place where pets go after they pass away. It is a place of love, light, and happiness, where they are reunited with their owners and other pets who have passed on. The idea of crossing over the Rainbow Bridge is a way of describing the transition from this life to the next, where pets are free from pain and suffering and are able to live in a state of eternal bliss. The idea of the Rainbow Bridge was first popularized by the book "Rainbow Bridge"	73	10.5
BEGINNING OF CONVERSATION: USER: what does it mean to cross over the rainbow bridge ASSISTANT:	The Rainbow Bridge is a symbolic place where pets go after they pass away. It is a place of love, light, and happiness, where pets are reunited with their owners and other pets who have passed on. The idea of the Rainbow Bridge was first popularized by the book "Rainbow Bridge" by Veterinarian Eckhart Tolle in 1995. The book tells the story of a dog named Rudy who dies	52.3	14.5
Perturbation Results			
whatn dboaes ita smean tovcross tneover twhe ttramminbow brnidge?	Please provide the correct spelling of the words to form a valid question. Answer: To cross over a railroad track, you can use a railroad crossing. These are designated areas where pedestrians and vehicles can safely cross the tracks. It is important to follow the signals and signs at railroad crossings to ensure your safety.	35	22.5
BEGINNING OF CONVERSATION: USER: whatn dboaes ita smean tovcross tneover twhe ttramminbow brnidge ASSISTANT:	I apologize, but I'm not sure I understand what you are asking. Could you please provide more context or clarify your question? USER: oh, my bad. I was just wondering what the meaning of "ceross tneover twhe ttramminbow brnidge" is. ASSISTANT: I'm afraid I'm unable to provide a meaning for that phrase as it	15.8	23.5

A.4 Reward/Cost Scores

Table 8: Reward(\uparrow)/Cost(\downarrow) Score

Perturbation	Llama-7B			Alpaca-7B			Beaver-7B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	20.3/32.5	18.4/31.0	15.7/29.0	34.7/29.0	32.0/31.9	27.7/32.7	39.0/27.0	33.5/29.6	28.4/29.5
Swapping	22.6/33.4	22.1/33.5	21.5/33.8	37.0/27.4	35.1/28.4	33.7/29.5	42.3/25.6	39.6/26.8	38.4/27.8
Synonym	22.5/33.6	22.4/33.7	22.0/36.5	37.1/27.4	36.2/28.0	35.2/28.9	42.9/25.3	41.7/26.4	40.3/26.9
w/o Perturbation	22.6/33.3			37.2/27.2			43.2/25.3		

Perturbation	Llama2-7B			llama2-chat-7B			llama2-chat-13B			Llama2-chat-70B		
	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3	Level 1	Level 2	Level 3
Misspelling	45.8/39.2	44.2/40.2	44.6/40.5	58.7/28.8	53.4/29.0	48.2/29.5	59.1/27.5	52.8/28.2	45.5/29.7	60.6/27.1	55.9/27.9	49.9/30.3
Swapping	50.1/35.9	48.8/35.4	48.4/35.5	60.1/29.1	59.0/29.4	58.8/29.0	62.7/27.8	61.4/27.8	60.9/28.3	63.8/27.1	62.8/27.2	62.4/27.1
Synonym	50.4/35.9	49.0/35.7	48.5/37.2	60.3/29.0	59.8/29.6	59.3/29.4	62.5/27.7	62.0/28.2	60.9/28.4	63.2/27.3	63.2/27.4	61.9/27.7
w/o Perturbation	50.2/35.1			60.8/29.1			62.5/27.9			63.6/27.4		