

M3GIA: A COGNITION INSPIRED MULTILINGUAL AND MULTIMODAL GENERAL INTELLIGENCE ABILITY BENCHMARK

Anonymous authors

Paper under double-blind review

ABSTRACT

As recent multi-modal large language models (MLLMs) have shown formidable proficiency on various complex tasks, there has been increasing attention on debating whether these models could eventually mirror human intelligence. However, existing benchmarks mainly focus on evaluating solely on task performance, such as the accuracy of identifying the attribute of an object. Combining well-developed cognitive science to understand the intelligence of MLLMs beyond superficial achievements remains largely unexplored. To this end, we introduce the first cognitive-driven multi-lingual and multi-modal benchmark to evaluate the general intelligence ability of MLLMs, dubbed M3GIA. Specifically, we identify five key cognitive factors based on the well-recognized Cattell-Horn-Carroll (CHC) model of intelligence and propose a novel evaluation metric. In addition, since most MLLMs are trained to perform in different languages, we go beyond English to encompass other languages, including Chinese, French, Spanish, Portuguese and Korean, to construct our M3GIA. We make sure all the data relevant to the cultural backgrounds are collected from their native context to avoid English-centric bias. We collected a significant corpus of data from human participants, revealing that the most advanced MLLM barely reaches the lower boundary of human performance in English, and there remains a pronounced disparity in the other five languages. **Importantly, we found that designing IQ tests for MLLMs is crucial, as the evaluation of M3GIA achieves a significantly stronger alignment with human preferences compared to traditional task-oriented benchmarks. Moreover, grounded in CHC theory, we discovered that the number of samples seen by the vision encoder has a greater influence on the model’s visual capabilities than its parameter size.**

1 INTRODUCTION

In 1956, researchers across different domains, including mathematics, cognitive psychology and computer science, pointed out an interesting direction, dubbed artificial intelligence (AI). The formal definition is “*The study is to proceed on the basis of the conjecture that every aspect of learning or any other feature of intelligence can in principle be so precisely described that a machine can be made to simulate it.*” (McCarthy et al., 2006). Through extensive efforts in pursuing artificial intelligence, the field has converged to a paradigm of data-driven machine learning models, which are still deeply intertwined with cognitive science as they often mirror basic cognitive mechanisms, e.g. convolutional neural networks (Krizhevsky et al., 2012) and the attention mechanism (Vaswani et al., 2017). Recent advances, such as GPT-4o (OpenAI, 2024), demonstrate that these MLLMs can outperform human on various complex tasks (Achiam et al., 2023; Wang et al., 2023b) and shed light to emergent ability with the increasing scale of data and model size (Wei et al., 2022). In light of these developments, our aim is to evaluate these state-of-the-art models through the lens of cognitive science, as it directly aligns with the primary motivation of AI research.

To explore the mental intelligence emerging from these large models, efforts have been directed toward analyzing these models from a psychological perspective. Some pioneering works report that LLMs have demonstrated human-like cognition (Binz & Schulz, 2023; Kosinski, 2023b). For instance, Theory of mind (ToM) has been applied to assess large models, revealing that GPT-4 exhibits ToM capabilities similar to human inference patterns (Bubeck et al., 2023; Kosinski, 2023b).

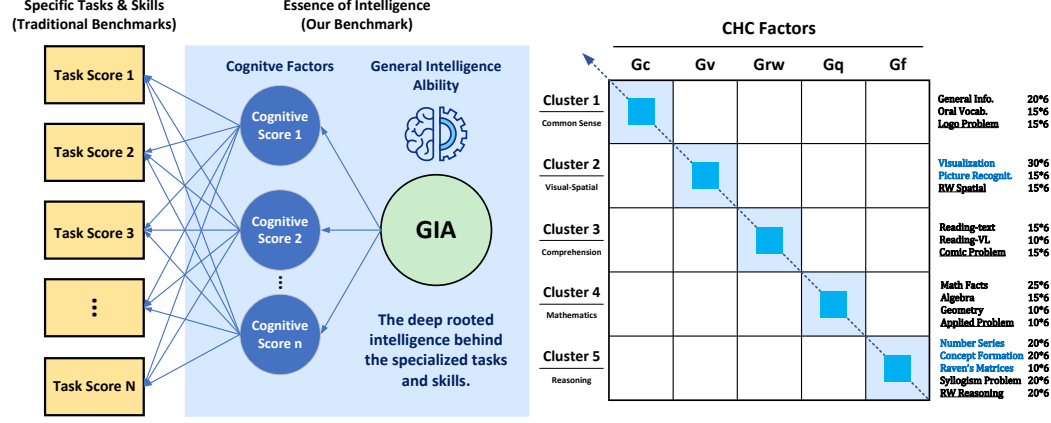


Figure 1: **Overview of multi-lingual multi-modal general intelligence ability benchmark.** (Left) In contrast to traditional benchmarks that focus on evaluating specific task performances, we draw inspiration from cognitive science to categorize five cognitive factors, try to provide a feasible evaluation of general intelligence ability (GIA). (Right) Specifically, we adopt the factors from the CHC theory to disentangle fundamental cognitive abilities with existing evaluation tasks. In addition, to further understand how language impacts such ability, we collect or design questions in six languages with large population.

Meanwhile, Multimodal Large Language Models (MLLMs), which use powerful LLMs as brain to process and integrate multimodal information, have exhibited impressive emergent abilities, such as generating website code from images (Zhu et al., 2023), understanding the meaning of a meme (Yang et al., 2023), and math reasoning (Driess et al., 2023). Thanks to their ability to process information from a broader spectrum of sources, they exhibit a more holistic cognitive process, resembling human cognition more closely than models confined to purely linguistic input.

Existing multi-modality benchmarks, such as MMBench (Liu et al., 2023b), MME (Fu et al., 2024), and MM-Vet (Yu et al., 2023), have made the attempt to compartmentalize model capabilities across multiple tasks. For instance, MMBench covers 20 different abilities, encompassing function reasoning, physical property reasoning, object localization and social reasoning. However, they often fail to provide a persuasive explanation for their selection of dimensions, as they tend to be mired in subjectivity and lack a solid theoretical underpinning. Moreover, as depicted in Figure 1 (left), their ability dimensions are still rather task-oriented, neglecting a systematic evaluation of the models' underlying cognitive abilities that govern task performance through the lens of cognitive science. This oversight raises concerns that benchmarks might devolve into mere training targets rather than instruments for true insight, failing to provide a holistic measure of the models' capabilities (Schaeffer et al., 2024). In short, the ability to solve specific tasks is insufficient to reflect the true level of intelligence, as supported by a psychological study (Poldrack & Yarkoni, 2016), and formally evaluating the cognitive factors of MLLMs remains largely unexplored.

In this paper, we close the gap by introducing the first benchmark that comprehensively evaluate the cognitive abilities of MLLMs under the theoretical umbrella of the well-recognized Cattell-Horn-Carroll (CHC) Model of Intelligence (Schneider & McGrew, 2012), dubbed M3GIA. As in Figure 1(right), based on the CHC Model, we categorizes the cognitive capacities of current MLLMs into five dimensions: Fluid reasoning (Gf), Comprehension-Knowledge (Gc), Visual processing (Gv), Reading and Writing (Grw), Quantitative knowledge (Gq), and collect corresponding questions as a measurement. In addition, as using multi-lingual data to scale up the capability of MLLMs becomes a de-facto standard, we are curious whether languages make any impact on their cognitive abilities. As such, we extend our benchmark to include five more languages, including Chinese, Spanish, French, Portuguese and Korean roughly based on their population, to disentangle the language factor with cognitive ability.

To evenly assess the five cognitive dimensions, we refer to human intelligence tests, such as the Raven's Progressive Matrices Test (Raven, 2003) and the Woodcock-Johnson IV Tests of Cognitive Abilities (WJ IV) (Schrank & Wendling, 2018), and establish broad question types that correspond to the these cognitive dimensions, which are further subdivided into 18 narrow question types (see later Sec. 3). Overall, our M3GIA includes 1.8K high-quality meticulously human-annotated questions,

with over 73% created by professionals due to the non-public nature of human intelligence tests. This prevents potential data leakage from directly collecting extensive data from existing sources. On the other hand, it makes the construction of M3GIA labor-intensive and expensive. The test for each language maintain consistency in terms of the number of questions, structure, and distribution of question types. In addition, to highlight the multilingual nature of our benchmark, we collect data relevant to cultural backgrounds from native language sources rather than simply translating them from English, thereby avoiding the English-centric bias.

We evaluate 24 MLLMs, including the state-of-the-art close and open-sourced ones. In general, The latest advancements in MLLMs have achieved performance levels that fall within the lower boundary of human intelligence in English. Yet, there remains a pronounced disparity in the other five languages assessed. We also notice that MLLMs’ proficiency in one cognitive domain often translates into superior performance across other domains as well. This phenomenon interestingly aligns with the pattern observed in human intelligence which empirically suggests the existence of General Intelligence Ability (GIA) in MLLMs.

2 RELATED WORKS

Evaluation Benchmark for MLLMs. As multimodal large language models (MLLMs) exhibit remarkable generalization capabilities across a broad spectrum of downstream tasks, relying exclusively on their performance within single vision-language tasks — such as visual recognition (Goyal et al., 2017), image description (Chen et al., 2015; Agrawal et al., 2019; Young et al., 2014), scene text understanding (Singh et al., 2019; Sidorov et al., 2020), and external knowledge (Marino et al., 2019) — is insufficient to fully uncover the comprehensive performance of MLLMs. People then turn to a new paradigm to construct all-round benchmarks to assess a broader spectrum of challenging multimodal tasks (Yin et al., 2024; Xu et al., 2023; Li et al., 2023; Liu et al., 2023b; Fu et al., 2024; Yu et al., 2023). Another trend in MLLM assessment is the use of human exam questions (Lu et al., 2023; 2022; Zhong et al., 2023; Yue et al., 2023; Zhang et al., 2024). For instance, AGIEval (Zhong et al., 2023) sources questions from standardized exams such as college entrance exams and lawyer qualification tests. While these benchmarks makes progresses in evaluating the human-centric ability of MLLMs, it may not be suitable to evaluate the intelligence of MLLMs because research in psychological field points out that the superficial performance on tasks alone cannot be a solid indicator for human’s intelligence.(Poldrack & Yarkoni, 2016)

General Intelligence Ability and the CHC Theory. Arising from the empirical fact that an individual’s proficiency in one area frequently correlates with high performance in other areas, Charles Spearman first introduced General Intelligence Ability (GIA) in 1904 (Spearman, 1961). This construct refers to the idea that a single underlying factor, known as the g-factor, can account for the positive correlations among cognitive abilities and reflect the general intelligence that fundamentally underlies an individual’s intelligence. To concretely understand GIA, numerous attempts has been made to model the structure of human cognition. John Carroll’s Three-Stratum Model (Carroll, 1993) elaborated on this with a hierarchical structure of intelligence, including a general “g” factor and specific cognitive abilities. Howard Gardner’s Multiple Intelligence Theory (Flynn, 1987) proposed diverse forms of intelligence, while Sternberg’s Triarchic Theory (Sternberg, 1985) focused on practical, creative, and analytical aspects. These theories collectively contributed to the development of the Cattell-Horn-Carroll (CHC) model of intelligence, which is the most comprehensive and empirically validated structural model of human cognition (McGrew & Evans, 2004) to date, integrating various aspects of cognition into a unified framework.

Comparison with Existing Psychology-inspired Benchmarks. Significant strides have been made to explore LLMs’ capabilities using psychological tools. These efforts, however, predominantly concentrate on aspects such as social reasoning, emotional abilities, values, and personality. In contrast, M3GIA’s main contribution lies in its commitment to providing the first “IQ test” for MLLMs, focusing on pure intelligence rather than other psychological dimensions.

- **ToM benchmarks** (Jin et al., 2024; Kosinski, 2023a; He et al., 2023; Gandhi et al., 2024): Theory of Mind (ToM) is the ability to understand other’s mental states based on their observed behavior (what someone else is thinking or feeling). It is a hallmark of “social intelligence” that fall within the scope of Social Quotient (SQ), which is a distinct realm from Intelligence Quotient (IQ)

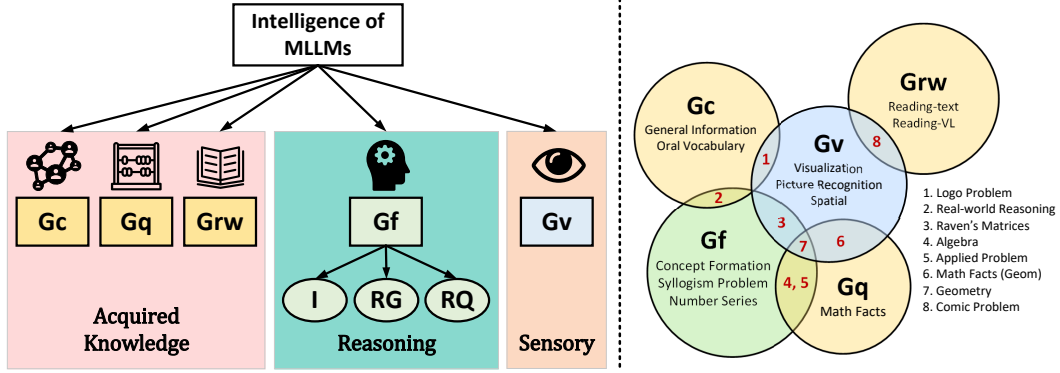


Figure 2: **Structure of our CHC inspired model of cognitive abilities. (Left)** We identified five key cognitive factors for current MLLMs: Comprehension-Knowledge (Gc), Quantitative knowledge (Gq), Reading and Writing (Grw), Fluid reasoning (Gf), and Visual-spatial processing (Gv). In the hierarchical structure, Gf is further subdivided into three narrow factors: I (Induction), RG (Deductive Reasoning), and RQ (Quantitative Reasoning). **(Right)** A conceptual map of the five cognitive factors and their overlaps with each other.

and Emotional Quotient (EQ) in psychology studies. ToM’s independence to intelligence is also validated in (Rajkumar et al., 2008).

- **Other psychology-inspired benchmarks:** PsychoBench (Huang et al., 2023) divides psychological measurement into PERSONALITY TESTS and ABILITY TESTS, with ABILITY TESTS subdivided into Knowledge&Skills, Cognitive, and Emotional. However, its ABILITY TESTS only includes the Emotional Abilities Test and doesn’t include Cognitive Abilities test (target of M3GIA). As the paper states: “*Intelligence Quotient (IQ) tests ... represent one of the most comprehensive, intricate, and renowned evaluation tools in this category (cognitive tests). However, since these assessments often incorporate visual elements unsuitable for LLM evaluation, this aspect remains a potential avenue for future investigation.*” Psychometrics Benchmark (Li et al., 2024b) advocates for a comprehensive psychological measurement for LLMs, including personality, values, emotion, ToM, motivation, and intelligence. However, they didn’t complete the ‘intelligence’ part and only discussed its potential. CogBench (Coda-Forno et al., 2024) is a task-oriented benchmark that focuses on decision-making tasks, such as long-term rewards. Its tasks are highly composite, often requiring not only intelligence but also value-based judgments. For example, temporal discounting indicates whether an agent prefers smaller but immediate gains over larger delayed ones, while BART is used to assess risk-taking behavior. However, the tasks are too high-level to be used as a means of evaluating the basic factors of intelligence (as they are hard to disentangle and attribute).

3 M3GIA

Concretely, we introduce the first cognition inspired multi-linguistic and multi-modal benchmark to evaluate the general intelligence accuracy of large models. In short, our M3GIA distinguishes itself from existing benchmarks as follow:

- **Cognition Inspired:** In contrast to existing benchmarks that focuses on task-level evaluation, we study the intelligence of large models from a cognition perspective. The benchmark dissects the cognitive abilities of contemporary MLLMs into five foundational factors, as per the Cattell-Horn-Carroll theory. This cognitive theory underpins the structure of our evaluation, informing the specific types of questions devised to test each cognitive skill.
- **Multilingual Coverage:** To comprehensively measure the cognitive abilities of multimodal large models across multiple languages, M3GIA is constructed to span six languages: English, French, Chinese, Spanish, Portuguese, and Korean. In order to mitigate English-centric bias, all data relevant to cultural backgrounds have been sourced from native language resources, except for questions that transcend cultural considerations—such as the Raven test and number series problems.

3.1 THE FIVE-FACTOR COGNITIVE MODEL OF M3GIA

To formally study the intelligence level of MLLMs, we start from the state-of-the-art cognitive model, Cattell-Horn-Carroll (CHC) (Schneider & McGrew, 2012), which is by far the most empirically validated structure model of human cognition (McGrew & Evans, 2004). The CHC theory articulates a hierarchical framework of human cognitive abilities divided into three strata: general intelligence “g” (stratum III), broad cognitive abilities (stratum II), and narrow abilities (stratum I). While there is ongoing discourse regarding the exact delineation of stratum I, stratum II have achieved substantial consensus and are well-supported by empirical evidence and practical application (Caemmerer et al., 2020). These include Fluid Reasoning (Gf), Comprehension-Knowledge (Gc), Visual Processing (Gv), Auditory Processing (Ga), Short-term Memory (Gsm), Long-term Retrieval (Glr), Processing Speed (Gs), Quantitative Knowledge (Gq), and Reading and Writing Abilities (Grw). These broad but domain-specific abilities are nevertheless positively associated with one another. This positive manifold is accounted for in the CHC model by a general factor of intelligence (“g”) at stratum III.

It is important to note that an intelligence test doesn’t need to encompass all CHC factors to be effective. Rather, it should strategically select a relevant subset of Stratum II factors tailored to the specific target of the test. For instance, the Stanford-Binet Intelligence Scales (Roid & Pomplun, 2012) focus on five specific factors (Gc, Gf, Gq, Gv, Gwm), while the WJ IV Tests of Cognitive Abilities (Schrank et al., 2016) incorporate seven (Gc, Gf, Gv, Gwm, Gs, Glr, Ga).



As shown in Fig. 2, the structure of our M3GIA is underpinned by the five-factor hierarchical cognitive model, which is derived from the CHC model of cognitive abilities. Given that the majority of current MLLMs are not yet expanded to embrace the auditory modality, we have not included the Ga (Auditory) factor in this version of M3GIA, reserving it as one of the directions for future expansion. Consequently, based on the consultations with psychology experts, we have chosen to assess the cognitive abilities of current MLLMs in this iteration of M3GIA by focusing on five key CHC factors: Gc, Grw, Gq, Gf, and Gv. The selection of the five factors is also well-supported by psychological validation through factor analysis (Phelps et al., 2005), which shows that Gf (0.98), Gq (0.87), Gc (0.79), and Gv (0.68) have the highest significant factor loadings related to general intelligence, while Ga and Gs only have loadings of 0.47 and 0.48. We provide a more detailed discussion on why these five factors were chosen to evaluate MLLMs in *Appendix A.3*.

Interestingly, the five factors we select align closely with those of the renowned Stanford-Binet Test, Fifth Edition (SB5) (Roid & Pomplun, 2012), which was also constructed upon five cognitive factors derived from the CHC theory. Specifically, the five cognitive factors identified in the SB5 are: Fluid Reasoning (FR), Knowledge (KN), Quantitative Reasoning (QR), Visual-Spatial Processing (VS), and Working Memory (WM). Except for Working Memory (WM), which we have substituted with Grw, these factors align directly with our selected factors, corresponding to Gf, Gc, Gq, and Gv, respectively. This alignment is noteworthy, as the selection of these factors for the SB5 was based on extensive research on school achievement and expert ratings of the importance of these factors in the assessment of reasoning, especially in giftedness assessment (Roid & Barram, 2004).

3.2 QUESTION DESIGN AND COLLECTION

Our M3GIA contains a total of 1.8K multiple choice problems, of which 1,200 are Visual Question Answering (VQA) questions. To prevent potential data leakage and given that human intelligence tests are not publicly available, 73% of our data is manually crafted by ourselves, while the remaining 27% is sourced from existing materials, following the practices of MMMU (Yue et al., 2023) and M3Exam (Zhang et al., 2024), which also derive their data from existing human exams. The dataset size of M3GIA was carefully determined by balancing several key considerations:

- **Human Baseline:** M3GIA depends on human data to construct the GIA model, which requires reliable human baseline measurements. Research by Converse & Presser (1986) indicates that prolonged tasks can degrade response quality, underscoring the importance of balancing comprehensiveness with practicality. To minimize the number of questions while ensuring validity, we determine the number of questions based on findings from Burisch (1997), which revealed that in cognitive assessments, extending a scale beyond a certain limit can actually undermine its validity. Interestingly, the validity plateaus when the number of items in a subtest hits 15. Considering our 18 subtests, we settled on incorporating 300 questions per language ($>15 \times 18 = 270$) to

General Info. Gc	Readings Grw	Math Facts	Number Series RQ I
Question: Where can you find the building featured on this note?  Options: [A] Washington DC [B] London [C] Philadelphia [D] Atlanta	Question: Which image best describes the structure of this passage?  Options: [A] [B] [C] [D]	Sub-test 1 Gq $x + 12 = 3x + 7$ $4x + 3 = 2x + 1$ $5x + 2 = 3x + 1$ $6x + 1 = 4x + 2$ $7x + 0 = 5x + 1$ $8x + -1 = 6x + 2$ $9x + -2 = 7x + 3$ $10x + -3 = 8x + 4$ $11x + -4 = 9x + 5$ $12x + -5 = 10x + 6$ $13x + -6 = 11x + 7$ $14x + -7 = 12x + 8$ $15x + -8 = 13x + 9$ $16x + -9 = 14x + 10$ $17x + -10 = 15x + 11$ $18x + -11 = 16x + 12$ $19x + -12 = 17x + 13$ $20x + -13 = 18x + 14$ $21x + -14 = 19x + 15$ $22x + -15 = 20x + 16$ $23x + -16 = 21x + 17$ $24x + -17 = 22x + 18$ $25x + -18 = 23x + 19$ $26x + -19 = 24x + 20$ $27x + -20 = 25x + 21$ $28x + -21 = 26x + 22$ $29x + -22 = 27x + 23$ $30x + -23 = 28x + 24$ $31x + -24 = 29x + 25$ $32x + -25 = 30x + 26$ $33x + -26 = 31x + 27$ $34x + -27 = 32x + 28$ $35x + -28 = 33x + 29$ $36x + -29 = 34x + 30$ $37x + -30 = 35x + 31$ $38x + -31 = 36x + 32$ $39x + -32 = 37x + 33$ $40x + -33 = 38x + 34$ $41x + -34 = 39x + 35$ $42x + -35 = 40x + 36$ $43x + -36 = 41x + 37$ $44x + -37 = 42x + 38$ $45x + -38 = 43x + 39$ $46x + -39 = 44x + 40$ $47x + -40 = 45x + 41$ $48x + -41 = 46x + 42$ $49x + -42 = 47x + 43$ $50x + -43 = 48x + 44$ $51x + -44 = 49x + 45$ $52x + -45 = 50x + 46$ $53x + -46 = 51x + 47$ $54x + -47 = 52x + 48$ $55x + -48 = 53x + 49$ $56x + -49 = 54x + 50$ $57x + -50 = 55x + 51$ $58x + -51 = 56x + 52$ $59x + -52 = 57x + 53$ $60x + -53 = 58x + 54$ $61x + -54 = 59x + 55$ $62x + -55 = 60x + 56$ $63x + -56 = 61x + 57$ $64x + -57 = 62x + 58$ $65x + -58 = 63x + 59$ $66x + -59 = 64x + 60$ $67x + -60 = 65x + 61$ $68x + -61 = 66x + 62$ $69x + -62 = 67x + 63$ $70x + -63 = 68x + 64$ $71x + -64 = 69x + 65$ $72x + -65 = 70x + 66$ $73x + -66 = 71x + 67$ $74x + -67 = 72x + 68$ $75x + -68 = 73x + 69$ $76x + -69 = 74x + 70$ $77x + -70 = 75x + 71$ $78x + -71 = 76x + 72$ $79x + -72 = 77x + 73$ $80x + -73 = 78x + 74$ $81x + -74 = 79x + 75$ $82x + -75 = 80x + 76$ $83x + -76 = 81x + 77$ $84x + -77 = 82x + 78$ $85x + -78 = 83x + 79$ $86x + -79 = 84x + 80$ $87x + -80 = 85x + 81$ $88x + -81 = 86x + 82$ $89x + -82 = 87x + 83$ $90x + -83 = 88x + 84$ $91x + -84 = 89x + 85$ $92x + -85 = 90x + 86$ $93x + -86 = 91x + 87$ $94x + -87 = 92x + 88$ $95x + -88 = 93x + 89$ $96x + -89 = 94x + 90$ $97x + -90 = 95x + 91$ $98x + -91 = 96x + 92$ $99x + -92 = 97x + 93$ $100x + -93 = 98x + 94$ $101x + -94 = 99x + 95$ $102x + -95 = 100x + 96$ $103x + -96 = 101x + 97$ $104x + -97 = 102x + 98$ $105x + -98 = 103x + 99$ $106x + -99 = 104x + 100$ $107x + -100 = 105x + 101$ $108x + -101 = 106x + 102$ $109x + -102 = 107x + 103$ $110x + -103 = 108x + 104$ $111x + -104 = 109x + 105$ $112x + -105 = 110x + 106$ $113x + -106 = 111x + 107$ $114x + -107 = 112x + 108$ $115x + -108 = 113x + 109$ $116x + -109 = 114x + 110$ $117x + -110 = 115x + 111$ $118x + -111 = 116x + 112$ $119x + -112 = 117x + 113$ $120x + -113 = 118x + 114$ $121x + -114 = 119x + 115$ $122x + -115 = 120x + 116$ $123x + -116 = 121x + 117$ $124x + -117 = 122x + 118$ $125x + -118 = 123x + 119$ $126x + -119 = 124x + 120$ $127x + -120 = 125x + 121$ $128x + -121 = 126x + 122$ $129x + -122 = 127x + 123$ $130x + -123 = 128x + 124$ $131x + -124 = 129x + 125$ $132x + -125 = 130x + 126$ $133x + -126 = 131x + 127$ $134x + -127 = 132x + 128$ $135x + -128 = 133x + 129$ $136x + -129 = 134x + 130$ $137x + -130 = 135x + 131$ $138x + -131 = 136x + 132$ $139x + -132 = 137x + 133$ $140x + -133 = 138x + 134$ $141x + -134 = 139x + 135$ $142x + -135 = 140x + 136$ $143x + -136 = 141x + 137$ $144x + -137 = 142x + 138$ $145x + -138 = 143x + 139$ $146x + -139 = 144x + 140$ $147x + -140 = 145x + 141$ $148x + -141 = 146x + 142$ $149x + -142 = 147x + 143$ $150x + -143 = 148x + 144$ $151x + -144 = 149x + 145$ $152x + -145 = 150x + 146$ $153x + -146 = 151x + 147$ $154x + -147 = 152x + 148$ $155x + -148 = 153x + 149$ $156x + -149 = 154x + 150$ $157x + -150 = 155x + 151$ $158x + -151 = 156x + 152$ $159x + -152 = 157x + 153$ $160x + -153 = 158x + 154$ $161x + -154 = 159x + 155$ $162x + -155 = 160x + 156$ $163x + -156 = 161x + 157$ $164x + -157 = 162x + 158$ $165x + -158 = 163x + 159$ $166x + -159 = 164x + 160$ $167x + -160 = 165x + 161$ $168x + -161 = 166x + 162$ $169x + -162 = 167x + 163$ $170x + -163 = 168x + 164$ $171x + -164 = 169x + 165$ $172x + -165 = 170x + 166$ $173x + -166 = 171x + 167$ $174x + -167 = 172x + 168$ $175x + -168 = 173x + 169$ $176x + -169 = 174x + 170$ $177x + -170 = 175x + 171$ $178x + -171 = 176x + 172$ $179x + -172 = 177x + 173$ $180x + -173 = 178x + 174$ $181x + -174 = 179x + 175$ $182x + -175 = 180x + 176$ $183x + -176 = 181x + 177$ $184x + -177 = 182x + 178$ $185x + -178 = 183x + 179$ $186x + -179 = 184x + 180$ $187x + -180 = 185x + 181$ $188x + -181 = 186x + 182$ $189x + -182 = 187x + 183$ $190x + -183 = 188x + 184$ $191x + -184 = 189x + 185$ $192x + -185 = 190x + 186$ $193x + -186 = 191x + 187$ $194x + -187 = 192x + 188$ $195x + -188 = 193x + 189$ $196x + -189 = 194x + 190$ $197x + -190 = 195x + 191$ $198x + -191 = 196x + 192$ $199x + -192 = 197x + 193$ $200x + -193 = 198x + 194$ $201x + -194 = 199x + 195$ $202x + -195 = 200x + 196$ $203x + -196 = 201x + 197$ $204x + -197 = 202x + 198$ $205x + -198 = 203x + 199$ $206x + -199 = 204x + 200$ $207x + -200 = 205x + 201$ $208x + -201 = 206x + 202$ $209x + -202 = 207x + 203$ $210x + -203 = 208x + 204$ $211x + -204 = 209x + 205$ $212x + -205 = 210x + 206$ $213x + -206 = 211x + 207$ $214x + -207 = 212x + 208$ $215x + -208 = 213x + 209$ $216x + -209 = 214x + 210$ $217x + -210 = 215x + 211$ $218x + -211 = 216x + 212$ $219x + -212 = 217x + 213$ $220x + -213 = 218x + 214$ $221x + -214 = 219x + 215$ $222x + -215 = 220x + 216$ $223x + -216 = 221x + 217$ $224x + -217 = 222x + 218$ $225x + -218 = 223x + 219$ $226x + -219 = 224x + 220$ $227x + -220 = 225x + 221$ $228x + -221 = 226x + 222$ $229x + -222 = 227x + 223$ $230x + -223 = 228x + 224$ $231x + -224 = 229x + 225$ $232x + -225 = 230x + 226$ $233x + -226 = 231x + 227$ $234x + -227 = 232x + 228$ $235x + -228 = 233x + 229$ $236x + -229 = 234x + 230$ $237x + -230 = 235x + 231$ $238x + -231 = 236x + 232$ $239x + -232 = 237x + 233$ $240x + -233 = 238x + 234$ $241x + -234 = 239x + 235$ $242x + -235 = 240x + 236$ $243x + -236 = 241x + 237$ $244x + -237 = 242x + 238$ $245x + -238 = 243x + 239$ $246x + -239 = 244x + 240$ $247x + -240 = 245x + 241$ $248x + -241 = 246x + 242$ $249x + -242 = 247x + 243$ $250x + -243 = 248x + 244$ $251x + -244 = 249x + 245$ $252x + -245 = 250x + 246$ $253x + -246 = 251x + 247$ $254x + -247 = 252x + 248$ $255x + -248 = 253x + 249$ $256x + -249 = 254x + 250$ $257x + -250 = 255x + 251$ $258x + -251 = 256x + 252$ $259x + -252 = 257x + 253$ $260x + -253 = 258x + 254$ $261x + -254 = 259x + 255$ $262x + -255 = 260x + 256$ $263x + -256 = 261x + 257$ $264x + -257 = 262x + 258$ $265x + -258 = 263x + 259$ $266x + -259 = 264x + 260$ $267x + -260 = 265x + 261$ $268x + -261 = 266x + 262$ $269x + -262 = 267x + 263$ $270x + -263 = 268x + 264$ $271x + -264 = 269x + 265$ $272x + -265 = 270x + 266$ $273x + -266 = 271x + 267$ $274x + -267 = 272x + 268$ $275x + -268 = 273x + 269$ $276x + -269 = 274x + 270$ $277x + -270 = 275x + 271$ $278x + -271 = 276x + 272$ $279x + -272 = 277x + 273$ $280x + -273 = 278x + 274$ $281x + -274 = 279x + 275$ $282x + -275 = 280x + 276$ $283x + -276 = 281x + 277$ $284x + -277 = 282x + 278$ $285x + -278 = 283x + 279$ $286x + -279 = 284x + 280$ $287x + -280 = 285x + 281$ $288x + -281 = 286x + 282$ $289x + -282 = 287x + 283$ $290x + -283 = 288x + 284$ $291x + -284 = 289x + 285$ $292x + -285 = 290x + 286$ $293x + -286 = 291x + 287$ $294x + -287 = 292x + 288$ $295x + -288 = 293x + 289$ $296x + -289 = 294x + 290$ $297x + -290 = 295x + 291$ $298x + -291 = 296x + 292$ $299x + -292 = 297x + 293$ $300x + -293 = 298x + 294$ $301x + -294 = 299x + 295$ $302x + -295 = 300x + 296$ $303x + -296 = 301x + 297$ $304x + -297 = 302x + 298$ $305x + -298 = 303x + 299$ $306x + -299 = 304x + 300$ $307x + -300 = 305x + 301$ $308x + -301 = 306x + 302$ $309x + -302 = 307x + 303$ $310x + -303 = 308x + 304$ $311x + -304 = 309x + 305$ $312x + -305 = 310x + 306$ $313x + -306 = 311x + 307$ $314x + -307 = 312x + 308$ $315x + -308 = 313x + 309$ $316x + -309 = 314x + 310$ $317x + -310 = 315x + 311$ $318x + -311 = 316x + 312$ $319x + -312 = 317x + 313$ $320x + -313 = 318x + 314$ $321x + -314 = 319x + 315$ $322x + -315 = 320x + 316$ $323x + -316 = 321x + 317$ $324x + -317 = 322x + 318$ $325x + -318 = 323x + 319$ $326x + -319 = 324x + 320$ $327x + -320 = 325x + 321$ $328x + -321 = 326x + 322$ $329x + -322 = 327x + 323$ $330x + -323 = 328x + 324$ $331x + -324 = 329x + 325$ $332x + -325 = 330x + 326$ $333x + -326 = 331x + 327$ $334x + -327 = 332x + 328$ $335x + -328 = 333x + 329$ $336x + -329 = 334x + 330$ $337x + -330 = 335x + 331$ $338x + -331 = 336x + 332$ $339x + -332 = 337x + 333$ $340x + -333 = 338x + 334$ $341x + -334 = 339x + 335$ $342x + -335 = 340x + 336$ $343x + -336 = 341x + 337$ $344x + -337 = 342x + 338$ $345x + -338 = 343x + 339$ $346x + -339 = 344x + 340$ $347x + -340 = 345x + 341$ $348x + -341 = 346x + 342$ $349x + -342 = 347x + 343$ $350x + -343 = 348x + 344$ $351x + -344 = 349x + 345$ $352x + -345 = 350x + 346$ $353x + -346 = 351x + 347$ $354x + -347 = 352x + 348$ $355x + -348 = 353x + 349$ $356x + -349 = 354x + 350$ $357x + -350 = 355x + 351$ $358x + -351 = 356x + 352$ $359x + -352 = 357x + 353$ $360x + -353 = 358x + 354$ $361x + -354 = 359x + 355$ $362x + -355 = 360x + 356$ $363x + -356 = 361x + 357$ $364x + -357 = 362x + 358$ $365x + -358 = 363x + 359$ $366x + -359 = 364x + 360$ $367x + -360 = 365x + 361$ $368x + -361 = 366x + 362$ $369x + -362 = 367x + 363$ $370x + -363 = 368x + 364$ $371x + -364 = 369x + 365$ $372x + -365 = 370x + 366$ $373x + -366 = 371x + 367$ $374x + -367 = 372x + 368$ $375x + -368 = 373x + 369$ $376x + -369 = 374x + 370$ $377x + -370 = 375x + 371$ $378x + -371 = 376x + 372$ $379x + -372 = 377x + 373$ $380x + -373 = 378x + 374$ $381x + -374 = 379x + 375$ $382x + -375 = 380x + 376$ $383x + -376 = 381x + 377$ $384x + -377 = 382x + 378$ $385x + -378 = 383x + 379$ $386x + -379 = 384x + 380$ $387x + -380 = 385x + 381$ $388x + -381 = 386x + 382$ $389x + -382 = 387x + 383$ $390x + -383 = 388x + 384$ $391x + -384 = 389x + 385$ $392x + -385 = 390x + 386$ $393x + -386 = 391x + 387$ $394x + -387 = 392x + 388$ $395x + -388 = 393x + 389$ $396x + -389 = 394x + 390$ $397x + -390 = 395x + 391$ $398x + -391 = 396x + 392$ $399x + -392 = 397x + 393$ $400x + -393 = 398x + 394$ $401x + -394 = 399x + 395$ $402x + -395 = 400x + 396$ $403x + -396 = 401x + 397$ $404x + -397 = 402x + 398$ $405x + -398 = 403x + 399$ $406x + -399 = 404x + 400$ $407x + -400 = 405x + 401$ $408x + -401 = 406x + 402$ $409x + -402 = 407x + 403$ $410x + -403 = 408x + 404$ $411x + -404 = 409x + 405$ $412x + -405 = 410x + 406$ $413x + -406 = 411x + 407$ $414x + -407 = 412x + 408$ $415x + -408 = 413x + 409$ $416x + -409 = 414x + 410$ $417x + -410 = 415x + 411$ $418x + -411 = 416x + 412$	

Formation, Number Series, Reading (Mather & Wendling, 2015), Math Facts, General Information, Oral Vocabulary, Visualization, and Picture Recognition, while the remaining question types were created in collaboration with psychology experts. A detailed description of the question types and their corresponding CHC factor definitions is provided in Table 2 and Table 3 in *Appendix D*. For example, a key facet of Gv is the ability to perceive complex patterns and mentally simulate transformations such as rotation, resizing, or partial occlusion (Schneider & McGrew, 2012). In our Visualization tasks, the model is asked to identify the rotated 3D block that matches the original or to identify pieces that form a complete target shape. Please refer to *Appendix D* for detailed correspondence between the CHC factors and our question types.

As shown in Fig. 1, we have devised five broad question clusters: reasoning, visual-spatial, common sense, mathematics and comprehension, separately corresponding to the assessment of the five CHC cognitive factors – Gf, Gv, Gc, Gq, and Grw. (See *Appendix* for detailed definition of the factors.) To prevent the assessment of any particular ability from being constrained to a fixed and singular perspective, we have stratified each of the five clusters into 2-4 narrow question types that reflect different perspectives on a broad CHC construct. This subdivision results in a total of 18 distinct question types, each designed to tap into different facets of the ability being measured.

Moreover, as illustrated in the right part of Fig. 2, the five cognitive factors are not isolated but rather overlap with each other. For example, Fluid reasoning (Gf) not only has a process facet (inductive vs. deductive reasoning) but also has a content facet (verbal, spatial, and quantitative), each of which overlaps with other broad abilities (Schneider & McGrew, 2018). In order to conduct a comprehensive measurement of this overlapping nature, our narrow question types include not only tests that measure each cognitive factor individually but also cover the parts where these factors overlap. The corresponding relationships between the question types, the cognitive factors and their intersections are also shown in Fig. 2.

We provide detailed explanations in the appendix, including More Details on Data Collection and Annotation (*Appendix A.2*), Introduction to the Evaluation Questions (*Appendix C*), and Data Curation Process (*Appendix E*). In Data Curation Process, we discuss key aspects such as data balancing, quality control, accuracy checks, and the management of question variance across different languages.

3.3 METRICS

We use two type of metrics in our evaluation benchmark. For each question type, we follow the existing benchmarks (Liu et al., 2023b; Fu et al., 2024) to use accuracy. However, to holistically compare the cognitive ability, we design a novel metric general intelligence accuracy (GIA) based on findings in cognitive field. To compute the GIA scores of the models, we adopted a standard psychometric approach. This involved utilizing a confirmatory factor analysis (CFA) model, developed from our collected human evaluation data. See *Appendix F* for more details about the CFA process.

4 EVALUATION RESULTS

In this section, we evaluate a total of 24 MLLMs and 480 human participants using our M3GIA. The MLLMs comprise both closed-source models, such as GPT-4o (OpenAI, 2024), and open-source models (Liu et al., 2023a; Li et al., 2024a; Young et al., 2024; Bai et al., 2023; Wang et al., 2023a; Lu et al., 2024; Chen et al., 2023), including LLaVA (Liu et al., 2023a) and Mini-Gemini (Li et al., 2024a). Our evaluation for the MLLMs is conducted under a zero-shot setting to assess the capability of models to generate accurate answers without fine-tuning or few-shot demonstrations on our benchmark. For all models, we conduct prompt engineering on the validation set and use the most effective prompt for the zero-shot setup in the experiments. All experiments are conducted with NVIDIA A800 GPUs (Liu et al., 2023a; Li et al., 2024a).

Human Performance Baseline. To establish a reference for human cognitive levels against MLLMs, we collected 480 valid sets of test data from human subjects using electronic questionnaires. These 480 participants were from native countries of the six selected languages, with 80 individuals per language. The 1,800 questions of M3GIA are then divided into six complete sub-questionnaires by language, with each individual only responsible for completing the sub-questionnaire corresponding to their native language. We provided more details about human participants in *Appendix A.4* and *F.1*.

Table 1: **The accuracy results on 24 MLLMs regarding each cognitive ability.** The best in **bold** and the second-best underlined. All the numbers are presented in decimal and the full score is 100.

Types (LLM Size)	Models	ViT Size	Gf				Gc	Gq	Grw	Gv	Overall Acc
			I	RG	RQ	Overall					
Human	Average Performance	-	86.8	60.0	71.2	69.7	79.1	65.4	78.1	81.1	76.9
API	GPT-4o	-	58.0	59.2	33.9	50.1	72.3	42.8	79.6	46.3	<u>59.8</u>
	GPT-4v	-	<u>56.7</u>	56.3	<u>40.9</u>	<u>51.9</u>	<u>74.8</u>	<u>46.4</u>	<u>77.5</u>	<u>52.4</u>	59.2
	Gemini-1.5-Pro	-	54.3	<u>56.4</u>	41.8	54.3	75.8	60.8	77.1	53.8	62.4
	Gemini-Pro	-	39.0	30.8	22.7	32.4	56.5	31.7	67.1	43.1	46.5
	Cluade3-Sonnet	-	39.7	32.9	27.3	34.0	58.3	34.2	61.3	43.9	47.0
	Cluade3-Haiku	-	35.3	35.8	30.3	33.1	55.8	33.3	57.9	36.4	43.1
OSS (Large)	Mini-Gemini-34b	0.3B	<u>37.7</u>	37.5	30.6	<u>34.8</u>	<u>61.0</u>	34.2	62.9	<u>45.7</u>	<u>48.2</u>
	Mini-Gemini-8*7b	0.3B	28.7	30.0	26.7	30.3	58.1	35.0	61.3	41.9	44.8
	LLaVA-v1.6-34b	0.3B	20.7	<u>40.0</u>	28.5	30.8	53.8	<u>36.4</u>	61.7	40.4	42.8
	Yi-VL-34b	0.6B	25.0	32.9	35.8	29.5	48.1	29.2	54.6	35.7	38.2
	InternVL-chat-v1.2-plus	6B	45.0	42.5	<u>32.4</u>	42.5	64.6	41.4	66.7	47.5	51.9
OSS (Medium)	Mini-Gemini-13b	0.3B	<u>22.3</u>	29.2	<u>23.3</u>	24.3	<u>41.5</u>	<u>26.1</u>	<u>44.2</u>	28.3	<u>32.9</u>
	LLaVA-v1.5-13b	0.3B	17.7	<u>26.3</u>	15.2	19.9	42.1	20.3	40.0	28.8	30.4
	LLaVA-v1.6-vicuna-13b	0.3B	23.3	19.6	24.5	<u>23.1</u>	36.7	26.9	47.5	<u>28.5</u>	33.2
OSS (Small)	Fuyu-8b	-	21.7	22.1	27.3	23.3	27.3	24.4	27.1	24.9	25.1
	Mini-Gemini-8b	0.3B	37.3	<u>29.6</u>	31.8	30.4	<u>51.5</u>	30.6	56.3	<u>36.1</u>	41.4
	LLaVA-v1.5-7b	0.3B	18.0	25.0	15.8	19.7	41.5	19.7	35.0	25.7	28.4
	LLaVA-v1.6-vicuna-7b	0.3B	21.3	22.9	18.2	20.5	36.5	19.4	32.9	26.9	31.5
	LLaVA-v1.6-mistral-7b	0.3B	24.3	25.8	24.5	24.9	38.5	24.2	36.7	32.1	28.9
	Deepseek-VL-7b	0.38B	<u>32.3</u>	29.2	22.1	28.3	50.4	24.4	54.2	32.4	37.5
	Yi-VL-6b	0.6B	25.2	35.5	26.2	<u>28.8</u>	35.6	<u>29.0</u>	<u>54.5</u>	30.8	34.4
	Qwen-VL	1.9B	18.7	23.8	25.2	22.5	41.0	27.5	42.5	30.1	32.1
	CogVLM2-LLaMA3-Chinese	10B	29.7	21.7	<u>29.7</u>	26.5	54.8	27.2	37.9	40.3	<u>38.7</u>

4.1 ACCURACY SCORE ON FIVE COGNITIVE FACTORS

We report the accuracy of each type of question for the 24 models alongside the average human performance for each cognitive ability in Table. 1. We categorize the models into groups by their types, where open-source (OSS) MLLMs are grouped according to the size of their LLMs. It’s observed that even the most advanced MLLMs only marginally meet the passing line (60) for overall accuracy, e.g., Gemini-1.5-Pro (62.4) / GPT-4o (59.8) vs human (76.9). Notably, these models excel in domains related to verbal skills and knowledge, such as Gc and Grw. This success can likely be attributed to the powerful language capabilities inherent in large language models, bolstered by their extensive training datasets.

However, a significant gap remains between MLLMs and humans in areas like Visual-Spatial Abilities (Gv) and Fluid Reasoning (Gf). This is particularly evident in the Visual-Spatial Abilities domain, where all models lag considerably behind human capabilities, e.g., Gemini-1.5-Pro (53.8) vs human (81.1). This underscores a substantial opportunity for advancements in the visual aspects of MLLMs. See *Appendix* for case studies. Furthermore, our findings also highlight a pronounced deficiency in the Fluid Reasoning (Gf) capability among all MLLMs, particularly in tasks involving Induction (I) and Quantitative Reasoning (RQ). However, it is surprising to note that in the domain of Deductive Reasoning (RG), the most advanced MLLMs, such as GPT-4o, are approaching the average human level with scores of 59.2 compared to 60.0 for human participants. This might be attributed to the strategy of using synthetic reasoning data to enhance such ability (Chung et al., 2024).

Overall, MLLMs perform well in crystallized intelligence (Gc), possibly owing to their extensive training data, while the most advanced MLLMs still have a large gap with humans in fluid intelligence. This proves that our benchmark M3GIA can measure the difference between crystallized intelligence and fluid intelligence of MLLMs from a cognitive perspective, which is the key difference between M3GIA and other benchmarks.

Winner Takes All. More importantly, our finding reveals an intriguing *Winner Takes All* phenomenon that merits further attention beyond the initial observations. Specifically, we noted a

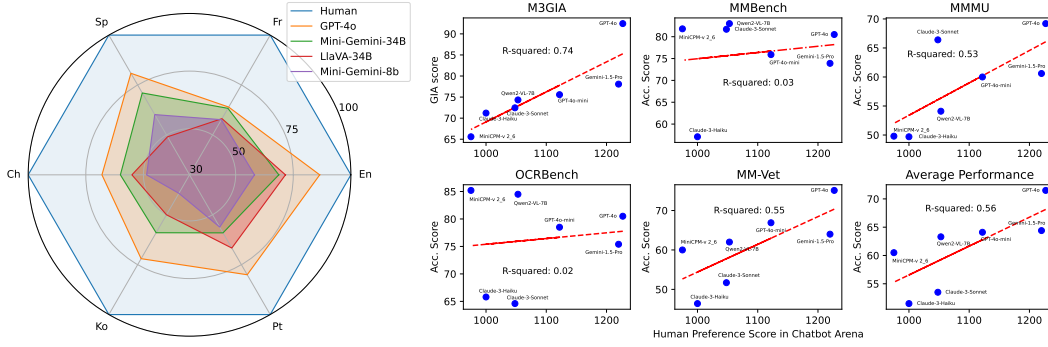


Figure 4: (Left) The GIA scores across the six languages. We designate the average human score as 100 and normalize the scores, making the GIA scores comparable across languages. (Right) Correlation between models’ scores on Chatbot Arena (Vision) (Chiang et al., 2024) and their scores on different benchmarks. M3GIA aligns more effectively with actual human experience.

consistent trend within each group of models where proficiency in one cognitive domain often translates into superior performance across other domains as well in Table 1. In particular, despite the diversity in score distribution among different abilities, there is a noteworthy pattern: the models achieving the top and second-best scores across various cognitive abilities are predominantly the same two models within each group.

This shows an interesting consistency to the pattern observed in human intelligence which empirically suggests the existence of General Intelligence Ability (see Sec. 2). Therefore, it offers compelling evidence that general intelligence ability, also identified as the general factor of intelligence (“g”) at the stratum III of the CHC model, has also emerged in large models. Furthermore, it suggests that as MLLMs evolve towards more comprehensive cognitive processes, they too demonstrate a foundational GIA factor that simultaneously governs a variety of cognitive abilities.

4.2 MULTILINGUAL GIA SCORES

By collecting a large amount of testing data from human subjects, we adopted CFA (Confirmatory Factor Analysis) model to calculate the GIA scores which can reflect comprehensive intelligence factors. Since the questions for each language are not exactly the same, we need to establish a separate CFA model for each language. We report the GIA scores of each language for some MLLMs in Table. 3, Fig. 4 (left) and Fig. 5. It’s observed that the current state-of-the-art MLLM has barely fell within the error bar range of human performance in English. However, these MLLMs still exhibit a significant performance gap compared to humans in other languages.

We perform linear regression to calculate the R^2 correlation between models’ *human preference score* on Chatbot Arena and their scores on various benchmarks, including MMMU, MMBench (MMB), OCRBench (OCRB) (Liu et al., 2023c), MMVet, and the average performance (Avg.) across 8 prominent benchmarks: MMMU, MMB, HallusionBench (Guan et al., 2023), MMVet, OCRB, AI2D (Kembhavi et al., 2016), MMStar (Chen et al., 2024), MathVista.

Table 2: **M3GIA achieves the best alignment** ($R^2 = 0.74$) with human preference scores on Chatbot Arena among all evaluated benchmarks. This suggests that the GIA score better reflects human preferences and the true capabilities of models compared to traditional task-oriented benchmarks. Detailed results can be found in *Appendix H.2*.

	M3GIA	MMB	MMMU	OCRB	MMVet	Avg.
R^2	0.74	0.03	0.53	0.02	0.55	<u>0.56</u>

The Impact of LLM Size and Vision Encoder. We conduct the ablation study with the Qwen1.5 series. (1) Firstly, we trained the models with strictly the same data and use the same ViT component (CLIP-ViT-L-14). As shown in Fig. 5, the GIA scores increase with the rise in LLM size. However, there is often no improvement in cognitive abilities from 7B to 13B, and seems

Table 4: The number of samples seen by the vision encoder has a more significant impact on models’ Gv-related performance than the parameter size.

	ViT-L/14	ViT-L/14	ViT-H/14	ViT-G/14
Params.	<u>303M</u>	<u>303M</u>	632M	3000M
Samples seen	<u>13B</u>	<u>32B</u>	<u>32B</u>	<u>34B</u>
Gv Acc.	0.308	0.383	0.375	0.392

Table 3: **The General Intelligence Ability of different models accross the six languages.** The left side displays the actual GIA scores, while the right side shows the normalized results after setting the average human GIA scores for each language to 100.0.

Models	General Intelligence Ability (GIA)						Normalized GIA Scores					
	En	Ch	Fr	Sp	Pt	Ko	En	Ch	Fr	Sp	Pt	Ko
Human	16.01	16.69	19.52	16.22	16.00	18.05	100.0	100.0	100.0	100.0	100.0	100.0
GPT-4o	13.85	11.46	12.37	13.12	12.80	13.01	86.5	68.7	63.3	80.9	80.0	72.1
GPT-4v	12.61	10.95	13.83	14.04	12.12	12.25	78.8	65.6	70.8	86.5	75.8	67.9
LLaVA-1.6-34b	11.47	9.25	11.35	7.96	10.67	9.04	71.6	55.4	58.1	49.1	66.7	50.1
LLaVA-1.6-13b	6.96	6.89	8.71	7.75	6.94	7.75	43.5	41.3	44.6	47.8	43.4	42.9
LLaVA-1.6-7b	6.75	5.99	7.67	6.74	6.01	5.93	42.1	35.9	39.3	41.5	37.6	32.9
Mini-Gemini-34b	11.00	9.96	12.75	11.52	9.45	10.69	68.7	59.7	65.3	71.0	59.1	59.2
Mini-Gemini-13b	8.68	7.76	8.65	7.73	7.10	7.98	54.2	46.5	44.3	47.7	44.4	44.2
Mini-Gemini-8b	9.32	8.11	11.25	9.76	8.99	7.08	58.2	48.6	57.6	60.2	56.2	39.3
Qwen-72b [†]	11.68	10.75	10.20	10.50	9.71	9.76	72.9	64.4	52.2	64.7	60.7	54.1
Qwen-32b [†]	10.58	9.79	9.62	10.11	9.25	9.18	66.1	58.7	49.3	62.3	57.8	50.9
Qwen-14b [†]	8.46	8.76	9.15	8.49	8.79	8.32	52.8	52.5	46.9	52.4	54.9	46.1
Qwen-7b [†]	8.56	8.93	8.98	8.42	8.77	8.41	53.4	53.5	46.0	51.9	54.8	46.6
Qwen-1.8b [†]	7.34	6.56	8.01	7.37	6.49	6.48	45.8	39.3	41.0	45.5	40.6	35.9

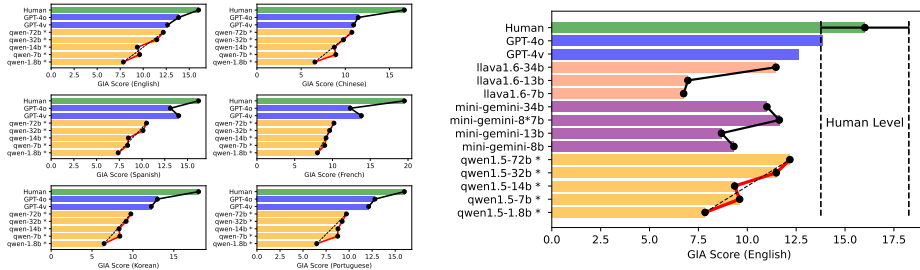


Figure 5: **The GIA scores across the six languages, with Qwen-1.5 LLM series from 1.8B to 72B.** (Left) Generally, the GIA scores increase with the rise of LLM parameters. However, a threshold is observed when scaling up the LLMs’ size from 7B to 14B. (Right) Taking English as an example, we visualized the performance of various models and compared it with the human level.

to be a emerging point of General Intelligence Ability between 13B and 34B. (2) Furthermore, we trained a series of MLLMs based on Qwen1.5-7B using the same data but with different vision encoders. The results in Table. 4 highlight the importance of data diversity and quantity in enhancing models’ Gv ability of effectively encoding visual inputs for downstream tasks.

5 CONCLUSION AND LIMITATIONS

Conclusion. This paper presented M3GIA, the first “IQ test” that comprehensively evaluate the cognitive abilities of MLLMs under the theoretical umbrella of the well-recognized Cattell-Horn-Carroll (CHC) Model of Intelligence. To meet the pressing need for multilingual assessment, our data spans across six languages and are collected from native sources, including English, Chinese, French, Spanish, Portuguese and Korean. Our results show that the evaluation of M3GIA achieves the best alignment with human preferences compared to traditional task-oriented benchmarks.

Limitations. We plan to expand M3GIA to include more rare languages in the future. Unlike normal benchmarks, M3GIA not only involves data collection but also requires significant human effort to create original questions from scratch. This demands a large number of professionals who are native speakers of these rare languages, which introduces considerable costs in both time and funding. Therefore, we plan to prioritize the expansion after the current version is released and recognized. Given the scarcity of multilingual and multimodal benchmarks in the MLLM community, we believe that M3GIA, as the first ‘IQ test’ for MLLMs, will still make a valuable contribution to the field.

REFERENCES

- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Harsh Agrawal, Karan Desai, Yufei Wang, Xinlei Chen, Rishabh Jain, Mark Johnson, Dhruv Batra, Devi Parikh, Stefan Lee, and Peter Anderson. Nocaps: Novel object captioning at scale. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp. 8948–8957, 2019.
- Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. *arXiv preprint arXiv:2308.12966*, 2023.
- Marcel Binz and Eric Schulz. Using cognitive psychology to understand gpt-3. *Proceedings of the National Academy of Sciences*, 120(6):e2218523120, 2023.
- Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, et al. Sparks of artificial general intelligence: Early experiments with gpt-4. *arXiv preprint arXiv:2303.12712*, 2023.
- Matthias Burisch. Test length and validity revisited. *European Journal of Personality*, 11(4):303–315, 1997.
- Jacqueline M Caemmerer, Timothy Z Keith, and Matthew R Reynolds. Beyond individual intelligence tests: application of cattell-horn-carroll theory. *Intelligence*, 79:101433, 2020.
- John B. Carroll. *Human Cognitive Abilities: A Survey of Factor-Analytic Studies*. Cambridge University Press, 1993.
- Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024.
- Xinlei Chen, Hao Fang, Tsung-Yi Lin, Ramakrishna Vedantam, Saurabh Gupta, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco captions: Data collection and evaluation server. *arXiv preprint arXiv:1504.00325*, 2015.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023.
- Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li, Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024.
- Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li, Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned language models. *Journal of Machine Learning Research*, 25(70):1–53, 2024.
- Julian Coda-Forno, Marcel Binz, Jane X Wang, and Eric Schulz. Cogbench: a large language model walks into a psychology lab. *arXiv preprint arXiv:2402.18225*, 2024.
- Jean M Converse and Stanley Presser. *Survey questions: Handcrafting the standardized questionnaire*, volume 63. Sage, 1986.
- Danny Driess, Fei Xia, Mehdi SM Sajjadi, Corey Lynch, Aakanksha Chowdhery, Brian Ichter, Ayzaan Wahid, Jonathan Tompson, Quan Vuong, Tianhe Yu, et al. Palm-e: An embodied multimodal language model. *arXiv preprint arXiv:2303.03378*, 2023.
- James R Flynn. Massive iq gains in 14 nations: What iq tests really measure. *Psychological bulletin*, 101(2):171, 1987.

- Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu Zheng, Ke Li, Xing Sun, Yunsheng Wu, and Rongrong Ji. Mme: A comprehensive evaluation benchmark for multimodal large language models, 2024.
- Kanishk Gandhi, Jan-Philipp Fränken, Tobias Gerstenberg, and Noah Goodman. Understanding social reasoning in language models with language models. *Advances in Neural Information Processing Systems*, 36, 2024.
- Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa matter: Elevating the role of image understanding in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 6904–6913, 2017.
- Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoob, et al. Hallusionbench: An advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models. *arXiv preprint arXiv:2310.14566*, 2023.
- Yinghui He, Yufan Wu, Yilin Jia, Rada Mihalcea, Yulong Chen, and Naihao Deng. Hi-tom: A benchmark for evaluating higher-order theory of mind reasoning in large language models. *arXiv preprint arXiv:2310.16755*, 2023.
- Jen-tse Huang, Wenxuan Wang, Eric John Li, Man Ho Lam, Shujie Ren, Youliang Yuan, Wenxiang Jiao, Zhaopeng Tu, and Michael R Lyu. Who is chatgpt? benchmarking llms’ psychological portrayal using psychobench. *arXiv preprint arXiv:2310.01386*, 2023.
- Chuangyang Jin, Yutong Wu, Jing Cao, Jiannan Xiang, Yen-Ling Kuo, Zhiting Hu, Tomer Ullman, Antonio Torralba, Joshua B Tenenbaum, and Tianmin Shu. Mmtom-qa: Multimodal theory of mind question answering. *arXiv preprint arXiv:2401.08743*, 2024.
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam, The Netherlands, October 11–14, 2016, Proceedings, Part IV 14*, pp. 235–251. Springer, 2016.
- Michal Kosinski. Evaluating large language models in theory of mind tasks. *arXiv e-prints*, pp. arXiv–2302, 2023a.
- Michal Kosinski. Theory of mind may have spontaneously emerged in large language models. *arXiv preprint arXiv:2302.02083*, 4:169, 2023b.
- Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Advances in neural information processing systems*, 25, 2012.
- Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*, 2023.
- Yanwei Li, Yuechen Zhang, Chengyao Wang, Zhisheng Zhong, Yixin Chen, Ruihang Chu, Shaoteng Liu, and Jiaya Jia. Mini-gemini: Mining the potential of multi-modality vision language models. *arXiv preprint arXiv:2403.18814*, 2024a.
- Yuan Li, Yue Huang, Hongyi Wang, Xiangliang Zhang, James Zou, and Lichao Sun. Quantifying ai psychology: A psychometrics benchmark for large language models. *arXiv preprint arXiv:2406.17675*, 2024b.
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning. *arXiv preprint arXiv:2310.03744*, 2023a.
- Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player? *arXiv preprint arXiv:2307.06281*, 2023b.

- Yuliang Liu, Zhang Li, Biao Yang, Chunyuan Li, Xucheng Yin, Cheng-lin Liu, Lianwen Jin, and Xiang Bai. On the hidden mystery of ocr in large multimodal models. *arXiv preprint arXiv:2305.07895*, 2023c.
- Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Yaofeng Sun, et al. Deepseek-vl: towards real-world vision-language understanding. *arXiv preprint arXiv:2403.05525*, 2024.
- Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord, Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for science question answering. *Advances in Neural Information Processing Systems*, 35:2507–2521, 2022.
- Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of foundation models in visual contexts. *arXiv preprint arXiv:2310.02255*, 2023.
- Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. Ok-vqa: A visual question answering benchmark requiring external knowledge. In *Proceedings of the IEEE/cvf conference on computer vision and pattern recognition*, pp. 3195–3204, 2019.
- Nancy Mather and Barbara J Wendling. *Essentials of WJ IV tests of achievement*. John Wiley & Sons, 2015.
- John McCarthy, Marvin L Minsky, Nathaniel Rochester, and Claude E Shannon. A proposal for the dartmouth summer research project on artificial intelligence, august 31, 1955. *AI magazine*, 27(4): 12–12, 2006.
- Kevin S McGrew and Jeffrey J Evans. Internal and external factorial extensions to the cattell-horn-carroll (chc) theory of cognitive abilities: A review of factor analytic research since carroll’s seminal 1993 treatise. *Institute for Applied Psychometrics*, 2004.
- OpenAI. Hello gpt-4o. <https://openai.com/index/hello-gpt-4o/>, 2024.
- LeAdelle Phelps, Kevin S McGrew, Susan N Knopik, and Laurie Ford. The general (g), broad, and narrow chc stratum characteristics of the wj iii and wisc-iii tests: A confirmatory cross-battery investigation. *School Psychology Quarterly*, 20(1), 2005.
- Russell A Poldrack and Tal Yarkoni. From brain maps to cognitive ontologies: informatics and the search for mental structure. *Annual review of psychology*, 67:587–612, 2016.
- Anto P Rajkumar, Simpson Yovan, Anoop L Raveendran, and Paul Swamidhas Sudhakar Russell. Can only intelligent children do mind reading: The relationship between intelligence and theory of mind in 8 to 11 years old. *Behavioral and Brain Functions*, 4:1–7, 2008.
- Jean Raven. Raven progressive matrices. In *Handbook of nonverbal assessment*, pp. 223–237. Springer, 2003.
- Gale H Roid and R Andrew Barram. *Essentials of Stanford-Binet intelligence scales (SB5) assessment*, volume 39. John Wiley & Sons, 2004.
- Gale H Roid and Mark Pomplun. *The stanford-binet intelligence scales*, volume 654. The Guilford Press New York, NY, USA:, 2012.
- Rylan Schaeffer, Brando Miranda, and Sanmi Koyejo. Are emergent abilities of large language models a mirage? *Advances in Neural Information Processing Systems*, 36, 2024.
- W Joel Schneider and Kevin S McGrew. The cattell-horn-carroll model of intelligence. *Contemporary intellectual assessment: Theories, tests, and issues*, pp. 99–144, 2012.
- W Joel Schneider and Kevin S McGrew. The cattell-horn-carroll theory of cognitive abilities. *Contemporary intellectual assessment: Theories, tests, and issues*, pp. 73–163, 2018.
- Fredrick A Schrank and Barbara J Wendling. The woodcock-johnson iv. *Contemporary intellectual assessment: Theories, tests, and issues*, 383, 2018.

- Fredrick A Schrank, Scott L Decker, and John M Garruto. *Essentials of WJ IV cognitive abilities assessment*. John Wiley & Sons, 2016.
- Oleksii Sidorov, Ronghang Hu, Marcus Rohrbach, and Amanpreet Singh. Textcaps: a dataset for image captioning with reading comprehension. In *Computer Vision–ECCV 2020: 16th European Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II 16*, pp. 742–758. Springer, 2020.
- Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh, and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 8317–8326, 2019.
- Charles Spearman. "general intelligence" objectively determined and measured. *The American Journal of Psychology*, 1961.
- Robert J Sternberg. *Beyond IQ: A triarchic theory of human intelligence*. CUP Archive, 1985.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. *Advances in neural information processing systems*, 30, 2017.
- Wei Han Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang, Lei Zhao, Xixuan Song, et al. Cogvlm: Visual expert for pretrained language models. *arXiv preprint arXiv:2311.03079*, 2023a.
- Xuena Wang, Xueting Li, Zi Yin, Yue Wu, and Jia Liu. Emotional intelligence of large language models. *Journal of Pacific Rim Psychology*, 17:18344909231213958, 2023b.
- Jason Wei, Yi Tay, Rishi Bommasani, Colin Raffel, Barret Zoph, Sebastian Borgeaud, Dani Yogatama, Maarten Bosma, Denny Zhou, Donald Metzler, et al. Emergent abilities of large language models. *arXiv preprint arXiv:2206.07682*, 2022.
- Peng Xu, Wenqi Shao, Kaipeng Zhang, Peng Gao, Shuo Liu, Meng Lei, Fanqing Meng, Siyuan Huang, Yu Qiao, and Ping Luo. Lvlm-ehub: A comprehensive evaluation benchmark for large vision-language models. *arXiv preprint arXiv:2306.09265*, 2023.
- Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Ehsan Azarnasab, Faisal Ahmed, Zicheng Liu, Ce Liu, Michael Zeng, and Lijuan Wang. Mm-react: Prompting chatgpt for multimodal reasoning and action. *arXiv preprint arXiv:2303.11381*, 2023.
- Zhenfei Yin, Jiong Wang, Jianjian Cao, Zhelun Shi, Dingning Liu, Mukai Li, Xiaoshui Huang, Zhiyong Wang, Lu Sheng, Lei Bai, et al. Lamm: Language-assisted multi-modal instruction-tuning dataset, framework, and benchmark. *Advances in Neural Information Processing Systems*, 36, 2024.
- Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, et al. Yi: Open foundation models by 01. ai. *arXiv preprint arXiv:2403.04652*, 2024.
- Peter Young, Alice Lai, Micah Hodosh, and Julia Hockenmaier. From image descriptions to visual denotations: New similarity metrics for semantic inference over event descriptions. *Transactions of the Association for Computational Linguistics*, 2:67–78, 2014.
- Wei hao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv preprint arXiv:2308.02490*, 2023.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. *arXiv preprint arXiv:2311.16502*, 2023.
- Wenxuan Zhang, Mahani Aljunied, Chang Gao, Yew Ken Chia, and Lidong Bing. M3exam: A multilingual, multimodal, multilevel benchmark for examining large language models. *Advances in Neural Information Processing Systems*, 36, 2024.

Wanjun Zhong, Ruixiang Cui, Yiduo Guo, Yaobo Liang, Shuai Lu, Yanlin Wang, Amin Saied, Weizhu Chen, and Nan Duan. Agieval: A human-centric benchmark for evaluating foundation models. *arXiv preprint arXiv:2304.06364*, 2023.

Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models. *arXiv preprint arXiv:2304.10592*, 2023.