

---

# Efficient Exploration using Model-Based Quality-Diversity with Gradients

---

**Bryan Lim\***  
Imperial College London  
London, United Kingdom  
bw1116@ic.ac.uk

**Manon Flageat\***  
Imperial College London  
London, United Kingdom  
mf4618@ic.ac.uk

**Antoine Cully**  
Imperial College London  
London, United Kingdom  
a.cully@imperial.ac.uk

## Abstract

Exploration is a key challenge in Reinforcement Learning, especially in long-horizon, deceptive and sparse-reward environments. For such applications, population-based approaches have proven effective. Methods such as Quality-Diversity deals with this by encouraging novel solutions and producing a diversity of behaviours. However, these methods are driven by either undirected sampling (i.e. mutations) or use approximated gradients (i.e. Evolution Strategies) in the parameter space, which makes them highly sample-inefficient. In this paper, we propose a model-based Quality-Diversity approach. It extends existing QD methods to use gradients for efficient exploitation and leverage perturbations in imagination for efficient exploration. Our approach optimizes all members of a population simultaneously to maintain both performance and diversity efficiently by leveraging the effectiveness of QD algorithms as good data generators to train deep models. We demonstrate that it maintains the divergent search capabilities of population-based approaches on tasks with deceptive rewards while significantly improving their sample efficiency and quality of solutions.

## 1 Introduction

Reinforcement Learning (RL) has demonstrated tremendous abilities to learn challenging tasks across a range of applications [27, 38, 1]. However, they generally struggle with exploration as the agent can only gather data by interacting with the environment. On the other hand, population based learning methods have shown to be very effective approaches [20, 42, 11, 44]. In contrast to single agent learning, training a population of agents allow diverse behaviors and data to be collected. This results in exploration that can better handle sparse and deceptive rewards [11] as well as alleviate catastrophic forgetting [8].

An effective way to use the population of agents for exploration are novelty search methods [23, 8] where the novelty of the behaviors of new agents is measured with respect to the population. This novelty measure is then used in place of the conventional task reward similar to curiosity and intrinsic motivation approaches [31, 2, 33]. Quality-Diversity (QD) [34, 10, 3] extends this but also optimizes all members of the population on the task reward while maintaining the diversity through novelty. Beyond exploration, the creativity involved in finding various ways to solve a problem/task (i.e. the QD problem) is an interesting aspect of general intelligence that is also associated with adaptability. For instance, discovering diverse walking gaits can enable rapid adaptation to damage [10].

However, a drawback of conventional population based approaches is the large amounts of samples and evaluations required, usually in the order of millions. Some methods that utilize Evolutionary Strategies (ES) and more recently MAP-Elites [28] (a common QD algorithm), sidestep this issue as they can parallelize and scale better with compute [35, 8, 26] than their Deep RL counterparts,

---

\*Equal Contribution

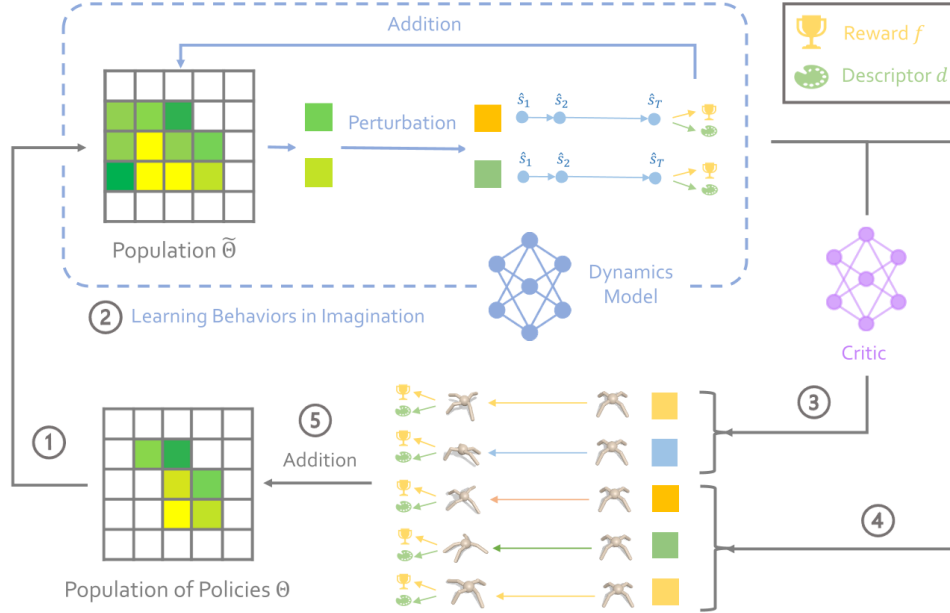


Figure 1: The GDA-QD algorithm can be summarized as follows: (1) the current population  $\Theta$  is copied in  $\tilde{\Theta}$ , (2)  $\tilde{\Theta}$  is used to perform multiple steps of QD optimization fully in imagination using the dynamics model, (3) the critic update sampled policies learned in imagination with policy-gradient updates; they are concatenated with (4) policies sampled from the resulting population learned in imagination  $\tilde{\Theta}$ , (5) these concatenated batch of policies are evaluated in the environment and used to update the real population of policies for the next optimization loop; the transitions collected in the environment are then used to train the dynamics model and the critic.

resulting in faster wall-clock times. Despite this, they still come at a cost of many samples. One of the main reasons for this lies in the underlying optimization operators. QD methods generally rely on undirected search methods such as objective-agnostic random perturbations [28, 41] to favor creativity and exploration. More directed search such as ES has also been used [7] but relies on a large number of such perturbations ( $\sim$ thousands) to approximate a single step of natural gradient to direct the improvement of solutions.

In this paper, we introduce an extended version of Dynamics-Aware QD (DA-QD-ext) as well as Gradient and Dynamics Aware QD (GDA-QD), a new model-based QD method to perform sample-efficient exploration in RL. GDA-QD optimizes an entire population of diverse policies through a QD process in imagination using a learned dynamics model. Additionally, GDA-QD augments the conventional QD optimization operators with policy gradient updates using a critic network to obtain a more performant population. Beyond the effective exploration capabilities of QD methods, they are also excellent data generators. We leverage this idea to harvest a diversity of transitions to train the dynamics model and the critic. Thus, GDA-QD combine the powerful function-approximation capabilities of deep neural networks with the directed-search abilities of gradient-based learning and the creativity of population-based approaches. We demonstrate that it successfully outperforms both Deep RL and QD baselines in a hard-exploration task. GDA-QD exceeds the performance of baseline QD algorithms by  $\sim 1.5$  times, and can reach the same results in 5 times less samples.

## 2 Preliminaries

### 2.1 Reinforcement Learning

Reinforcement Learning (RL) is commonly formalised as a Markov Decision Process (MDP) [40] represented by the tuple  $(\mathcal{S}, \mathcal{A}, \mathcal{P}, \mathcal{R})$ , where  $\mathcal{S}$  and  $\mathcal{A}$  are the set of states and actions.  $\mathcal{P}(s_{t+1}|s_t, a_t)$  is the probability of transition from state  $s_t$  to  $s_{t+1}$  given an action  $a_t$ , where  $s_t, s_{t+1} \in \mathcal{S}$  and  $a_t \in \mathcal{A}$ . The reward function defines the reward obtained at each timestep  $r_t = r(s_t, a_t, s_{t+1})$  when transitioning from state  $s_t$  to  $s_{t+1}$  under action  $a_t$ . An agent acting in the environment selects its next

---

**Algorithm 1:** DA-QD-ext and GDA-QD (highlighted lines are specific to GDA-QD)

---

```
1 Inputs:  $J$  num iterations,  $N$  num imagined iterations,  $p_{gradient}$  prop. of gradient-updated
   policies, and  $p_{model} = 1 - p_{gradient}$  (for DA-QD-ext  $p_{gradient} = 0$  and  $p_{model} = 1$ )
2 Initialisation:  $\Theta_0 \leftarrow \text{init\_population}()$ ,  $q_\phi \leftarrow \text{init\_dynamics\_model}()$ ,  $Q_\psi \leftarrow \text{init\_critic}()$ 
3 for  $j = 1, \dots, J$  do
4    $\tilde{\Theta}_j \leftarrow \Theta_j$  // copy  $\Theta_j$  in  $\tilde{\Theta}_j$ 
5   // Optimize population in imagination
6   for  $it_{imagination} = 1, \dots, N$  do
7      $\theta \leftarrow \text{random\_selection}(\tilde{\Theta}_j)$ 
8      $\tilde{\theta} \leftarrow \text{perturb}(\theta)$ 
9      $F(\tilde{\theta}), d(\tilde{\theta}) \leftarrow \text{evaluate\_imagination}(\tilde{\theta}, q_\phi)$ 
10     $\tilde{\Theta}_j \leftarrow \text{update\_population}(\tilde{\theta}, F(\tilde{\theta}), d(\tilde{\theta}))$ 
11   $\theta_{new} \leftarrow \text{get\_last\_added}(\tilde{\Theta}_j)$  // get last policies added to  $\tilde{\Theta}_j$ 
12   $\theta_{model} \leftarrow \text{select}(\theta_{new}, p_{model})$ 
13   $\theta_{gradient} \leftarrow \text{apply\_gradient}(Q_\psi, \text{select}(\theta_{new}, p_{gradient}))$ 
14   $\theta_{final} \leftarrow (\theta_{model}, \theta_{gradient})$  // concatenate  $\theta_{model}$  and  $\theta_{gradient}$ 
15   $F(\theta), d(\theta) \leftarrow \text{evaluate}(\theta_{final})$  // evaluate to get reward  $F$  and descriptor  $d$ 
16   $\Theta_{j+1} \leftarrow \text{update\_population}(\theta, F(\theta), d(\theta))$ 
17   $q_\phi \leftarrow \text{update\_dynamics\_model}(q_\phi)$ ,  $Q_\psi \leftarrow \text{update\_critic}(Q_\psi)$ 
18 return  $\Theta_j$ 
```

---

action based on the current state  $s_t$  by following a policy  $\pi_\theta(a_t|s_t)$ . The conventional objective in RL is then to optimize the parameters  $\theta$  of policy  $\pi_\theta$ , such that it maximizes the expected cumulative reward  $R(\tau) = \sum_{t=1}^T r_t$  over the entire episode trajectory  $\tau$ :

$$J(\pi_\theta) = \mathbb{E}_{\tau \sim \pi_\theta} [R(\tau)] \quad (1)$$

The transition probabilities  $\mathcal{P}(s_{t+1}|s_t, a_t)$  of the environment are usually assumed to be unknown. Model-based RL [45] methods learn a parametric model  $p_\phi(s_{t+1}|s_t, a_t)$  typically using supervised learning, from data collected when interacting in the environment. Policies are then trained using transitions obtained by rolling out the model.

## 2.2 Quality Diversity

Quality-Diversity (QD) [34, 9] are diversity-seeking population-based approaches to learning. QD methods maintain a diversity of policies in the population  $\Theta$  while maximizing the performance of each policy  $\theta \in \Theta$ . The population usually contains thousands of policies. QD considers an objective function  $F(\theta)$  acting on the parameters of the policy  $\theta$ . Additionally, QD also considers a behavior descriptor  $d(\theta)$  that characterizes the behavior induced by a policy.  $d(\theta)$  is used to maintain solutions in their behavioral niche to guarantee the population diversity and that there is no two solutions in the population with similar behavior descriptor  $d(\theta)$ . When applying QD to a RL problem, they are defined as follows, where  $d(\tau)$  is the behavior descriptor of a given trajectory  $\tau$ :

$$F(\theta) = J(\pi_\theta) = \mathbb{E}_{\tau \sim \pi_\theta} [R(\tau)] \quad \text{and} \quad d(\theta) = \mathbb{E}_{\tau \sim \pi_\theta} [d(\tau)] \quad (2)$$

Similar to Evolutionary Strategies (ES) [35], QD methods operate on entire episodes and hence both the objective and the descriptor can be computed simultaneously for any parameter vector  $\theta$ . QD methods then aim to maximize:

$$\max_{\Theta} \text{QD-Score}(\Theta) = \sum_{\theta \in \Theta} F(\theta) \quad (3)$$

By maintaining a population  $\Theta$  of both diverse and high-performing policies, QD uses the existing parameters in the population as stepping stones [29, 43] in the optimization. At each iteration  $t$ , a random set of policies are sampled from the current population  $\Theta_j$ , perturbed and evaluated in the environment. Based on the results of these evaluations, these perturbed policies might replace existing ones or fill in a new niche in the population. This incrementally improves the  $\text{QD-Score}(\Theta_j)$  and encourages creativity and exploration.

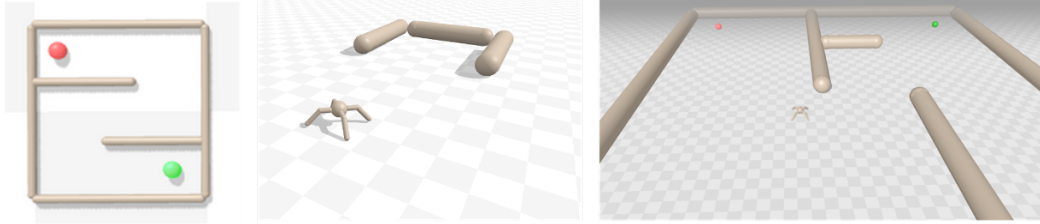


Figure 2: Deceptive reward tasks in the form of PointMaze, AntTrap and AntMaze environments.

### 3 Method

In this section, we introduce our two new model-based QD methods: DA-QD-ext and GDA-QD.

#### 3.1 DA-QD-ext: Learning and Sieving in Imagination

QD approaches are conventionally driven by random perturbations of the parameters of solutions. This undirected and divergent process gives QD its exploration capabilities but its major drawback is the number of samples it requires. This is especially evident for high-dimensional optimization problems such as optimizing deep neural networks where usually more directed gradient based methods are used. In this work, inspired by [25], we perform the perturbation process in imagination, relying on a learned dynamics model of the environment to reduce the number of environment interactions when evaluating such perturbed policies.

At each iteration  $j$  of the algorithm, the current population  $\Theta_j$  is first "copied" into imagination  $\tilde{\Theta}_j$ . The policies of this provisional population  $\pi_{\tilde{\theta}} \in \tilde{\Theta}_j$  are then perturbed, and evaluated in imagination using the rollouts of the dynamics model  $q_\phi$ . Both the objective  $F(\pi_{\tilde{\theta}})$  and the descriptor  $d(\pi_{\tilde{\theta}})$  of the policies can be obtained from the state information present in the rollouts. Using this process,  $\tilde{\Theta}_j$  undergoes multiple steps of QD optimization in imagination. The resulting policies  $\pi_{\tilde{\theta}} \in \tilde{\Theta}_j$  that are added to the provisional population  $\tilde{\Theta}_j$  during learning in imagination are then evaluated in the environment and used to update the population  $\Theta_j$  if they improve the QD-Score of the population. The updated population  $\Theta_j$  is then used as a start for the next iteration of the algorithm. This process of performing QD in imagination acts as a sieve and filters out perturbed solutions that are not likely to improve the quality and diversity of the population, hence increasing the sample efficiency.

Following [4], we use a probabilistic bootstrap ensemble of models  $q_\phi$  to capture uncertainties. Each model in the ensemble is a probabilistic model which predicts parameters of a Gaussian distribution  $N(\mu_\phi(s_t, a_t), \Sigma_\phi(s_t, a_t))$  which we can then sample from, capturing the aleatoric uncertainty. This model-based QD method corresponds to DA-QD [25]. However, we optimize high-dimensional closed loop neural network policies in complex exploration domains and hence, refer to it as DA-QD-ext.

#### 3.2 GDA-QD: Incorporating gradients in Quality-Diversity

As mentioned above, the random perturbations driving QD approaches prove inefficient when applied to high-dimensional search spaces such as the parameters of deep neural networks [7]. To deal with this, we augment the usual perturbation operator with policy gradient information as done by Nilsson and Cully [30]. The policy gradient can be more intuitively thought of as a more directed perturbation, hence being a more efficient optimization update procedure. To apply policy gradients to a population, we maintain a critic network  $Q_\psi$  which approximates the action-value function  $Q(s_t, a_t) = \mathbb{E} \left[ \sum_{k=0}^{T-t} \gamma^k r_{t+k+1} \mid s_t, a_t \right]$  and gives the expected return from being in state  $s_t$  and following action  $a_t$ . The critic allows us to gradually improve any policy in the direction maximizing the expected return by computing policy-gradient in Equation 4, approximated over a batch of transitions. We train  $Q_\psi$  using the same procedure as TD3 [14].

$$\nabla_{\theta_i} J(\theta_i) = \mathbb{E}_{\mathbf{s}, \mathbf{a} \sim \pi_{\theta_i}} [\nabla_{\theta_i} \pi_{\theta_i}(\mathbf{s}) \nabla_{\mathbf{a}} Q_\psi(\mathbf{s}, \mathbf{a})] \quad (4)$$

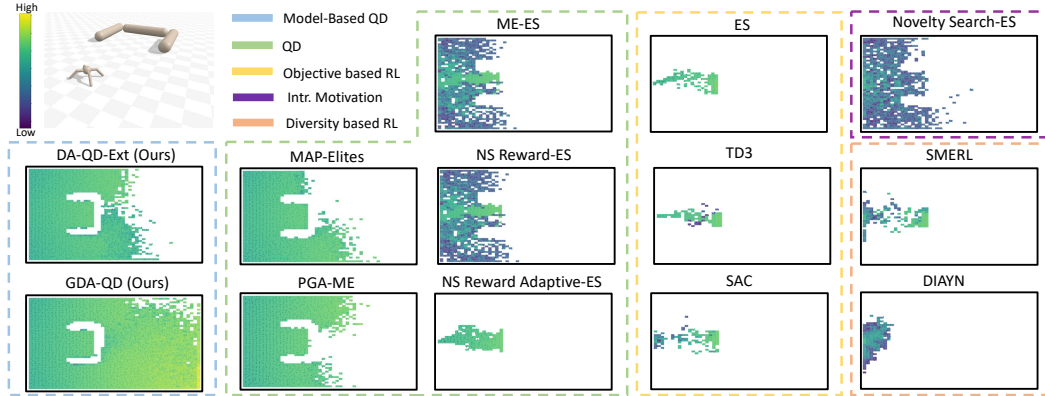


Figure 3: Final population of methods in the AntTrap environment (top left). Each policy in the population is represented with a dot in the final position it manages to reach within the episode. The color of the square around each policy indicates its total reward, the lighter the better. The obstacle clearly appears on this plot, as the empty area in the middle. Our approach GDA-QD does not get stuck in the trap and clearly outperforms baselines given the same number of evaluations.

In DA-QD-ext explained in Section 3.1, the population of policies  $\Theta_j$  is copied in imagination  $\tilde{\Theta}_j$  to undergo multiple steps of QD optimization and returns  $B$  policies to be evaluated. In GDA-QD, we combine the efficient parameter based perturbation in imagination from DA-QD-ext with more directed policy gradient updates explained above. The former is critical for efficient exploration, while the latter is critical for efficient exploitation. To achieve this, a proportion  $p_{model}$  of  $B$  is sampled to be evaluated directly while another  $p_{gradient} = 1 - p_{model}$  is sampled to be improved using the policy gradient operators before being evaluated. In the following, we use  $p_{model} = 0.9$ . We study the impact of this value and illustrate the complementary properties of these two generation-procedures in Appendix B. We demonstrate that both parameter update procedures are essential to guarantee performance. Figure 1 and Algorithm 1 provides a summary of this algorithm.

A key design choice in GDA-QD for simplicity is that only parameter-based perturbations are applied in imagination, while the policy gradient updates are not applied in imagination. This was to clearly make a separation between efficient exploration and efficient exploitation (through gradient optimization). Applying policy gradient updates in imagination could potentially further improve GDA-QD at the cost of training the critic more often in imagination. We leave this for future work.

### 3.3 Quality-Diversity as data generators for deep models

A key quality of QD algorithms is that they are excellent at generating diverse and high-quality data [11, 16]. In our work, the search for a diversity of high-performing behaviors when optimizing the population results in a diverse dataset of transitions. We leverage this property to train deep models which require and often excel when provided with such data. As commonly done, the diverse dataset of transitions is stored in a replay buffer and used to train (1) the dynamics model  $q_\phi$  and (2) the critic  $Q_\psi$ . Both these models are suitable candidates as the training of the critic  $Q_\psi$  is off-policy and can be trained using transitions collected from any behavioral policy. Additionally, training the dynamics model  $q_\phi$  is a supervised learning problem which would benefit from a large and diverse dataset of transitions.

We found this property to be especially important to our method. Specific to the training of the dynamics model, GDA-QD does not use transitions produced by gradient-optimized policies to train the model. This was found empirically in our studies as we observed the transitions produced by the gradient-optimized policies induced a shift in distribution that prove detrimental for the training of the dynamics models. Results of this study are detailed later in Section 4.3. It is important to recognize that the transitions used to train the dynamics model are not merely just from policies that have been randomly perturbed but a population of policies that have undergone multiple steps of QD optimization in imagination and are expected to improve the population. This results in a diverse and high performing dataset of transitions that GDA-QD uses to further train its models.

	POINTMAZE			ANTTRAP			ANTMAZE		
	QD-SCORE	COV	MAX-REW	QD-SCORE	COV	MAX-REW	QD-SCORE	COV	MAX-REW
TD3	-	-	-126.38	-	-	189.52	-	-	1.05
SAC	-	-	-126.18	-	-	204.68	-	-	1.06
ES	0.46	0.52	-126.85	2.97	2.91	200.95	18.6	10.88	0.97
DIAYN	-	-	-67.98	-	-	-6.15	-	-	0.20
SMERL	-	-	-38.29	-	-	171.81	-	-	1.06
NS-ES	0.93	1.8	-147.80	10.12	28.76	-13.14	45.45	42.6	1.23
ME	93.74	<b>99.92</b>	-25.36	42.44	43.44	218.77	56.71	37.68	1.29
PGA-ME	93.06	<b>99.92</b>	<b>-24.06</b>	47.82	47.08	274.52	62.56	39.66	1.48
NSR-ES	1.07	1.24	-126.85	6.36	6.26	196.30	22.89	14.24	1.02
NSRA-ES	1.44	1.78	-126.85	14.18	29.32	170.38	46.5	43.56	1.30
ME-ES	21.0	30.52	-62.05	12.70	21.92	157.42	38.5	33.48	1.15
DA-QD-ext	96.67	<b>99.92</b>	<b>-24.81</b>	50.33	51.0	196.66	70.94	43.7	1.51
GDA-QD	<b>97.70</b>	<b>99.92</b>	<b>-24.24</b>	<b>76.28</b>	<b>72.44</b>	<b>342.24</b>	<b>80.5</b>	<b>51.4</b>	<b>1.87</b>

Table 1: Final QD-Score (% of maximum value), Coverage (%) and Max-Total-Reward reached by all algorithms on all considered tasks. Each experiment is replicated 15 times, we report in the table the median value across runs. In the algorithms name, ME stands for MAP-Elites.

## 4 Experiments

We aim to evaluate our method by answering four main questions: (1) Can we scale model-based QD approaches to RL domains and Neuroevolution? (2) Does GDA-QD results in more performant and sample-efficient learning than traditional QD approaches and simple model-based QD? (3) What is the importance of the policy-gradient perturbation in the performance of GDA-QD? (4) How does the data-generation capabilities of GDA-QD enforce efficient learning?

### 4.1 Experimental setup

**Tasks and Environments:** We focus on tasks considered in literature as hard exploration problems: PointMaze [24, 32], AntTrap [8, 7, 5, 32] and AntMaze [7, 5, 36] (see Fig. 2). The reward in these tasks is deceptive making exploration and diversity critical when solving them. To start, we consider a simple PointMaze environment where a 2-dimensional point agent is given a reward corresponding to the distance to the goal in the maze. The AntTrap and AntMaze are higher dimensional continuous control tasks where an 8-DoF Ant robot learns how to walk, aiming to go beyond the trap in AntTrap and to reach the goal in AntMaze. In AntTrap, the robot gets increasing rewards for going as fast as possible while minimizing energy-usage. In the AntMaze tasks, the reward is the distance to the goal. This reward definition for all the tasks considered makes them deceptive. The descriptor  $d(\pi_\theta)$  used in all the tasks is defined as the x-y position at the end of the trajectory  $(x_T, y_T)$ .

**Baselines:** Across our experiments, we consider the following baselines:

- **MAP-Elites:** the most-commonly used QD algorithm [28].
- **PGA-MAP-Elites:** [30], augments MAP-Elites with a policy-gradient based update operator.
- **OpenAI ES:** Evolution Strategy [35] relying on natural gradient approximation.
- **Novelty Search ES:** We compare against NS-ES [8] as an intrinsic motivation baseline. This uses the OpenAI-ES algorithm but with a novelty reward instead of task reward..
- **QD-ES Algorithms:** QD-ES algorithms consider both quality and novelty during optimization. We use NSR-ES, NSRA-ES [8], and MAP-Elites-ES (ME-ES) [7]. NSR-ES and NSRA-ES build on NS-ES by including the task reward term as a weighted sum with the novelty reward term. ME-ES mixes MAP-Elites with OpenAI ES [7].
- **Single Policy Deep RL Algorithms:** We consider TD3 [14] and SAC [18]. SAC is entropy regularized and is a popular choice for greater exploration.
- **Mutual Information RL Algorithms:** We also consider DIAYN [12] and SMERL [22] which are also diversity seeking algorithms. To ensure the comparisons are fair with descriptor based methods, we use the x-y prior when running these algorithms. DIAYN is purely unsupervised and does not consider the task rewards. SMERL considers the task reward during optimization

For fairness, as the single policy baselines (TD3, SAC, DIAYN, SMERL) do not rely on a population, nor on complete-episode evaluations, we only reports its final value in the results as a dotted line. For a more qualitative comparison of these algorithms, we also collect the trajectories of the policies



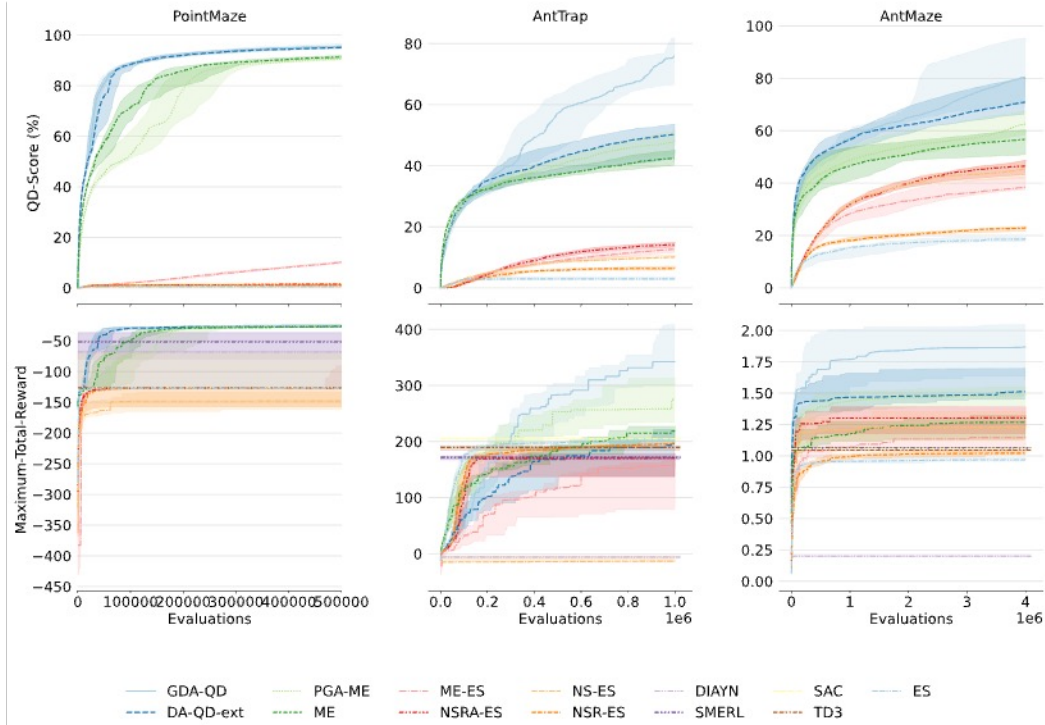


Figure 4: QD-Score (top) Max-Total-Reward (bottom) of all algorithms on the AntTrap (left), PointMaze (centre) and AntMaze (right) tasks plotted against number of evaluations. Each experiment is replicated 15 times, the solid line corresponds to the median over replications and the shaded area to the first and third quartiles.

throughout the learning process and plot them as part of a population. To ensure the comparability of algorithms using ES (OpenAI-ES, NS-ES, NSR-ES, NSRA-ES, ME-ES) with other approaches, we consider every estimate-evaluation as one sample, making these algorithms highly sample-inefficient.

**Metrics:** We consider two metrics to assess the performance of GDA-QD:

- **QD-Score:** defined in Section 2.2. It quantifies the diversity and quality of the overall population and allows to compare population-based methods.
- **Max-Total-Reward:** the total reward of the best individual of the current population. This metrics allows comparison with single-policy methods such as RL baselines.

**Implementation and hyperparameters:** The methods presented in this paper as well as all our baselines are based on the implementation of MAP-Elites in the QDax open-source library [26], using the Brax simulator [13]. All hyperparameters and implementation details used in our algorithms and for model training can be found in the Appendix A.

## 4.2 Results

The results of our experiments are summarized in Figure 4 and Table 1. We also display a visualization of the final populations of policies for each algorithm in Figure 3 (AntTrap) and Appendix C (PointMaze and AntMaze).

Figure 4 shows that both our proposed model-based versions, DA-QD-ext and GDA-QD, significantly outperform all baselines in terms of sample efficiency and final performance. This demonstrates that we can scale model-based QD methods to deep neuroevolution. The performance of DA-QD-ext suggests that learning diverse behaviors in imagination using the dynamics model is a simple but effective approach to save samples yet maintain the divergent search capabilities of the random perturbations. However, we can see that the maximum total reward obtained by DA-QD-ext seems to stagnate and increase slowly, especially when compared to GDA-QD and PGA-MAP-Elites. This can be explained by the absence of reward maximizing optimization updates such as the policy gradient

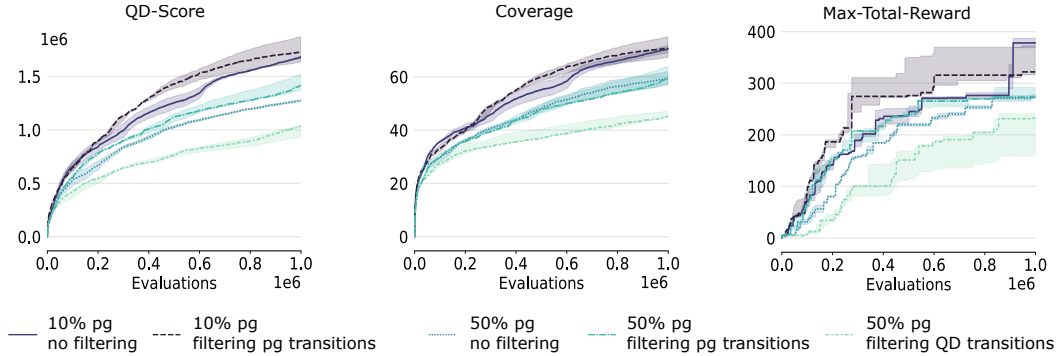


Figure 5: QD-Score (left), Coverage (middle) and Max-Total-Reward (right) on the AntTrap task of GDA-QD with different proportion of policy-gradients generated policies (pg) and different transitions filtering schemes. The solid line corresponds to the median over replications and the shaded area to the first and third quartiles.

updates present in GDA-QD and PGA-MAP-Elites. Hence, GDA-QD is shown to get the "best of both worlds" by benefitting from the QD in imagination as well as the policy gradient updates. This is evident in its performance across the QD-Score and max. return metrics.

In terms of baselines, Figure 3 show that all objective-only baselines: SAC, TD3 and ES, struggle with deceptive rewards. They all get stuck into the traps present in AntTrap and AntMaze. Diversity Based RL algorithms such as DIAYN struggle with no task reward signal while SMERL manages to reach the final goal only in the simpler PointMaze. The single-agent baselines (TD3, SAC, DIAYN, and SMERL) are plotted as horizontal lines to represent the max performance obtained by the agent. This is done to allow comparison as they do not rely on a population, making the Coverage and QD-Score metrics not relevant, and also performs policies-updates within episodes. The poor performance of ES-based algorithms, in particular ME-ES, can be attributed to the number of samples ( $\sim$  hundreds or thousands) required just to approximate a single gradient step. It is important to note that these methods commonly do not consider the notion of evaluations and generally evaluate the algorithms versus time or number of generations as they are suited to be heavily parallelized across clusters of CPUs. Despite this limitation, intrinsically-motivated ES baselines NS-ES and its QD variant NSRA-ES manage to get good coverage on AntTrap and AntMaze. However, they struggle to discover high-performing solutions within the given evaluation budget. We provide a visualization of the adaptive mechanism of NSRA-ES in Appendix C

### 4.3 Importance of QD for training deep models

To investigate the data generation abilities of QD, we compare the performance of the algorithm when the dynamics model is trained on different data distributions based on the policies rolled out in the environment. In our case, we have two main types of data generators: policies obtained through the QD process in imagination (giving  $D_{model}$ ), and policies perturbed also using policy-gradients (giving  $D_{gradient}$ ). We run an ablation where we train the dynamics model on transitions collected by either  $D_{model}$ ,  $D_{gradient}$ , or a mixture of both  $D_{model+gradient}$ , by filtering out the corresponding transitions. Figure 5 shows the performance curves when running this ablation on the AntTrap task. We first test the effect of training the model with  $D_{model}$  when  $p_{gradient} = 0.1$ . We notice a minor difference in which experiments that train only on  $D_{model}$  perform better than when not using any filter (i.e.  $D_{model+gradient}$ ). To enable a fair comparison in terms of the number of transitions added to the replay buffer when attempting to do the converse (i.e. using  $D_{gradient}$ ), we use a  $p_{model} = p_{gradient} = 0.5$ . We observe better performance when the dynamics model is only trained with  $D_{model}$ . This is compared to training on  $D_{model+gradient}$  where the difference is minimal as seen previously. However, performance significantly drops when training just on  $D_{gradient}$ . We hypothesize that this is due to bias in the transitions obtained through the policies perturbed by policy gradient resulting in a skewed dataset while the transitions given by policies obtained from QD in imagination provides a diverse and high-quality dataset.



## 5 Related Work

**Searching for Diversity.** Prior studies have shown the importance of maintaining a diverse set of solutions to solve a problem. Novelty-search approaches [23] inspired from evolutionary computation optimize for the novelty of solutions defined by a behavioral characterization with respect to a population instead of the optimization objective. QD methods [9, 28] extend this approach by also considering the objective, aiming to find both diverse and high-performing population of solutions. Similarly, our work builds on QD approaches with the aim to maintain a diversity of high-performing solutions. Other approaches to searching for diversity also exist in the RL community. Unsupervised RL methods [12, 37] commonly use a mutual information maximization objective to learn a diversity of behaviors in a skill-conditioned policies. Similar to QD, Kumar et al. [22], Zahavy et al. [46] have proposed to extend these unsupervised RL approaches by integrating objectives using constrained Markov decision processes. While these approaches typically focus on maintaining a dozen of different policies, our algorithm discovers thousands of independent diverse policies.

**Neuroevolution** seeks to evolve neural networks through biologically-inspired methods such as evolutionary algorithms and have interesting properties unavailable to common gradient-based methods [39]. However, a limitation in the neuroevolution domain is the dimensionality of the search-space, that quickly limits the effectiveness of random perturbations. Some methods have overcome this limitation by using indirect encoding methods [6] or through natural approximated gradients [35]. Our work hybridizes neuroevolution with deep reinforcement learning methods. Similar to Nilsson and Cully [30], we use policy-gradients as directed perturbations to effectively maneuver the high-dimensional search space but, we significantly improve the sample efficiency and performance by also augmenting these operators with model-based methods.

**Model-based Quality-Diversity.** As the perturbations commonly used in QD are sample inefficient, prior work has sought the use of data-driven models to alleviate this. SAIL [15] introduced the use of a surrogate model in the form of a Gaussian Process model to predict the objective. As Gaussian processes generally only work well on low-dimensional data, more recent methods have explored the use of deep networks [21, 25, 47] as forms surrogate models to predict both the objective and descriptors. We utilize the model-based QD framework from Lim et al. [25] which first introduced the idea of maintaining an imagined population and also builds on model-based RL methods [45] where a dynamics model is used. Critically, this work has only been applied to low-dimensional open-loop policies. To the best of our knowledge, our work is the first model-based QD algorithm that scales to the more complex deep neuroevolution domain where we optimize closed loop RL policies.

## 6 Conclusion and Future Work

In this paper, we introduce a novel model-based Quality-Diversity method, GDA-QD, which optimizes a population of diverse policies to explore more efficiently. To the best of our knowledge, this approach is the first model-based QD algorithm scaling to neuroevolution to optimize deep neural network policies. We leverage a key property of QD algorithms as effective data generators to train deep models in the form of a dynamics model and a critic. In turn, these models help to significantly improve the sample efficiency and final performance of the QD algorithm. The dynamics model is used to learn and sieve policies in imagination while the critic is used to apply policy gradient updates to sampled policies. Our experiments show that GDA-QD outperforms a range of Deep RL and QD baselines on a hard exploration task containing deceptive rewards. Overall, we demonstrate some of the powerful synergies that can arise between population-based learning and deep learning approaches. In future work, we hope to extend our work to more complex domains through the use of latent dynamics models [17, 19].

## Acknowledgments and Disclosure of Funding

This work was supported by the Engineering and Physical Sciences Research Council (EPSRC) grant EP/V006673/1 project REcoVER.

## References

- [1] Ilge Akkaya, Marcin Andrychowicz, Maciek Chociej, Mateusz Litwin, Bob McGrew, Arthur Petron, Alex Paino, Matthias Plappert, Glenn Powell, Raphael Ribas, et al. Solving rubik’s cube with a robot hand. *arXiv preprint arXiv:1910.07113*, 2019.
- [2] Marc Bellemare, Sriram Srinivasan, Georg Ostrovski, Tom Schaul, David Saxton, and Remi Munos. Unifying count-based exploration and intrinsic motivation. *Advances in neural information processing systems*, 29, 2016.
- [3] Konstantinos Chatzilygeroudis, Antoine Cully, Vassilis Vassiliades, and Jean-Baptiste Mouret. Quality-diversity optimization: a novel branch of stochastic optimization. In *Black Box Optimization, Machine Learning, and No-Free Lunch Theorems*, pages 109–135. Springer, 2021.
- [4] Kurtland Chua, Roberto Calandra, Rowan McAllister, and Sergey Levine. Deep reinforcement learning in a handful of trials using probabilistic dynamics models. *arXiv preprint arXiv:1805.12114*, 2018.
- [5] Geoffrey Cideron, Thomas Pierrot, Nicolas Perrin, Karim Beguir, and Olivier Sigaud. Qd-rl: Efficient mixing of quality and diversity in reinforcement learning. *arXiv preprint arXiv:2006.08505*, 2020.
- [6] Jeff Clune, Benjamin E Beckmann, Charles Ofria, and Robert T Pennock. Evolving coordinated quadruped gaits with the hyperneat generative encoding. In *2009 IEEE congress on evolutionary computation*, pages 2764–2771. IEEE, 2009.
- [7] Cédric Colas, Vashisht Madhavan, Joost Huizinga, and Jeff Clune. Scaling map-elites to deep neuroevolution. In *Proceedings of the 2020 Genetic and Evolutionary Computation Conference*, pages 67–75, 2020.
- [8] Edoardo Conti, Vashisht Madhavan, Felipe Petroski Such, Joel Lehman, Kenneth Stanley, and Jeff Clune. Improving exploration in evolution strategies for deep reinforcement learning via a population of novelty-seeking agents. *Advances in neural information processing systems*, 31, 2018.
- [9] Antoine Cully and Yiannis Demiris. Quality and diversity optimization: A unifying modular framework. *IEEE Transactions on Evolutionary Computation*, 22(2):245–259, 2017.
- [10] Antoine Cully, Jeff Clune, Danesh Tarapore, and Jean-Baptiste Mouret. Robots that can adapt like animals. *Nature*, 521(7553):503–507, 2015.
- [11] Adrien Ecoffet, Joost Huizinga, Joel Lehman, Kenneth O Stanley, and Jeff Clune. First return, then explore. *Nature*, 590(7847):580–586, 2021.
- [12] Benjamin Eysenbach, Abhishek Gupta, Julian Ibarz, and Sergey Levine. Diversity is all you need: Learning skills without a reward function. *arXiv preprint arXiv:1802.06070*, 2018.
- [13] C. Daniel Freeman, Erik Frey, Anton Raichuk, Sertan Girgin, Igor Mordatch, and Olivier Bachem. Brax - a differentiable physics engine for large scale rigid body simulation, 2021. URL <http://github.com/google/brax>
- [14] Scott Fujimoto, Herke Hoof, and David Meger. Addressing function approximation error in actor-critic methods. In *International conference on machine learning*, pages 1587–1596. PMLR, 2018.
- [15] Adam Gaier, Alexander Asteroth, and Jean-Baptiste Mouret. Data-efficient design exploration through surrogate-assisted illumination. *Evolutionary computation*, 26(3):381–410, 2018.
- [16] Luca Grillotti and Antoine Cully. Unsupervised behaviour discovery with quality-diversity optimisation. *IEEE Transactions on Evolutionary Computation*, 2022.
- [17] David Ha and Jürgen Schmidhuber. Recurrent world models facilitate policy evolution. *Advances in neural information processing systems*, 31, 2018.
- [18] Tuomas Haarnoja, Aurick Zhou, Pieter Abbeel, and Sergey Levine. Soft actor-critic: Off-policy maximum entropy deep reinforcement learning with a stochastic actor. In *International conference on machine learning*, pages 1861–1870. PMLR, 2018.
- [19] Danijar Hafner, Timothy Lillicrap, Jimmy Ba, and Mohammad Norouzi. Dream to control: Learning behaviors by latent imagination. *arXiv preprint arXiv:1912.01603*, 2019.
- [20] Max Jaderberg, Valentin Dalibard, Simon Osindero, Wojciech M Czarnecki, Jeff Donahue, Ali Razavi, Oriol Vinyals, Tim Green, Iain Dunning, Karen Simonyan, et al. Population based training of neural networks. *arXiv preprint arXiv:1711.09846*, 2017.
- [21] Leon Keller, Daniel Tanneberg, Svenja Stark, and Jan Peters. Model-based quality-diversity search for efficient robot learning. In *2020 IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, pages 9675–9680. IEEE, 2020.
- [22] Saurabh Kumar, Aviral Kumar, Sergey Levine, and Chelsea Finn. One solution is not all you need: Few-shot extrapolation via structured maxent rl. *Advances in Neural Information Processing Systems*, 33: 8198–8210, 2020.

- [23] Joel Lehman and Kenneth O Stanley. Evolving a diversity of virtual creatures through novelty search and local competition. In *Proceedings of the 13th annual conference on Genetic and evolutionary computation*, pages 211–218, 2011.
- [24] Joel Lehman and Kenneth O Stanley. Novelty search and the problem with objectives. In *Genetic programming theory and practice IX*, pages 37–56. Springer, 2011.
- [25] Bryan Lim, Luca Grillotti, Lorenzo Bernasconi, and Antoine Cully. Dynamics-aware quality-diversity for efficient learning of skill repertoires. *arXiv preprint arXiv:2109.08522*, 2021.
- [26] Bryan Lim, Maxime Allard, Luca Grillotti, and Antoine Cully. Accelerated quality-diversity for robotics through massive parallelism. *arXiv preprint arXiv:2202.01258*, 2022.
- [27] Volodymyr Mnih, Koray Kavukcuoglu, David Silver, Andrei A Rusu, Joel Veness, Marc G Bellemare, Alex Graves, Martin Riedmiller, Andreas K Fidjeland, Georg Ostrovski, et al. Human-level control through deep reinforcement learning. *nature*, 518(7540):529–533, 2015.
- [28] Jean-Baptiste Mouret and Jeff Clune. Illuminating search spaces by mapping elites. *arXiv preprint arXiv:1504.04909*, 2015.
- [29] Anh Nguyen, Jason Yosinski, and Jeff Clune. Understanding innovation engines: Automated creativity and improved stochastic optimization via deep learning. *Evolutionary computation*, 24(3):545–572, 2016.
- [30] Olle Nilsson and Antoine Cully. Policy gradient assisted map-elites. In *Proceedings of the Genetic and Evolutionary Computation Conference*, pages 866–875, 2021.
- [31] Pierre-Yves Oudeyer, Frdric Kaplan, and Verena V Hafner. Intrinsic motivation systems for autonomous mental development. *IEEE transactions on evolutionary computation*, 11(2):265–286, 2007.
- [32] Jack Parker-Holder, Aldo Pacchiano, Krzysztof M Choromanski, and Stephen J Roberts. Effective diversity in population based reinforcement learning. *Advances in Neural Information Processing Systems*, 33:18050–18062, 2020.
- [33] Deepak Pathak, Pulkit Agrawal, Alexei A Efros, and Trevor Darrell. Curiosity-driven exploration by self-supervised prediction. In *International conference on machine learning*, pages 2778–2787. PMLR, 2017.
- [34] Justin K Pugh, Lisa B Soros, and Kenneth O Stanley. Quality diversity: A new frontier for evolutionary computation. *Frontiers in Robotics and AI*, 3:40, 2016.
- [35] Tim Salimans, Jonathan Ho, Xi Chen, Szymon Sidor, and Ilya Sutskever. Evolution strategies as a scalable alternative to reinforcement learning. *arXiv preprint arXiv:1703.03864*, 2017.
- [36] Sasha Salter, Markus Wulfmeier, Dhruva Tirumala, Nicolas Heess, Martin Riedmiller, Raia Hadsell, and Dushyant Rao. Mo2: Model-based offline options. *arXiv preprint arXiv:2209.01947*, 2022.
- [37] Archit Sharma, Michael Ahn, Sergey Levine, Vikash Kumar, Karol Hausman, and Shixiang Gu. Emergent real-world robotic skills via unsupervised off-policy reinforcement learning. *arXiv preprint arXiv:2004.12974*, 2020.
- [38] David Silver, Aja Huang, Chris J Maddison, Arthur Guez, Laurent Sifre, George Van Den Driessche, Julian Schrittwieser, Ioannis Antonoglou, Veda Panneershelvam, Marc Lanctot, et al. Mastering the game of go with deep neural networks and tree search. *nature*, 529(7587):484–489, 2016.
- [39] Kenneth O Stanley, Jeff Clune, Joel Lehman, and Risto Miikkulainen. Designing neural networks through neuroevolution. *Nature Machine Intelligence*, 1(1):24–35, 2019.
- [40] Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT press, 2018.
- [41] Vassilis Vassiliades and Jean-Baptiste Mouret. Discovering the Elite Hypervolume by Leveraging Interspecies Correlation. In *GECCO 2018 - Genetic and Evolutionary Computation Conference*, Kyoto, Japan, July 2018. doi: 10.1145/3205455.3205602. URL <https://hal.inria.fr/hal-01764739>
- [42] Oriol Vinyals, Igor Babuschkin, Wojciech M Czarnecki, Michaël Mathieu, Andrew Dudzik, Junyoung Chung, David H Choi, Richard Powell, Timo Ewalds, Petko Georgiev, et al. Grandmaster level in starcraft ii using multi-agent reinforcement learning. *Nature*, 575(7782):350–354, 2019.
- [43] Rui Wang, Joel Lehman, Jeff Clune, and Kenneth O Stanley. Poet: open-ended coevolution of environments and their optimized solutions. In *Proceedings of the Genetic and Evolutionary Computation Conference*, pages 142–151, 2019.
- [44] Rui Wang, Joel Lehman, Aditya Rawal, Jiale Zhi, Yulun Li, Jeffrey Clune, and Kenneth Stanley. Enhanced poet: Open-ended reinforcement learning through unbounded invention of learning challenges and their solutions. In *International Conference on Machine Learning*, pages 9940–9951. PMLR, 2020.
- [45] Tingwu Wang, Xuchan Bao, Ignasi Clavera, Jerrick Hoang, Yeming Wen, Eric Langlois, Shunshi Zhang, Guodong Zhang, Pieter Abbeel, and Jimmy Ba. Benchmarking model-based reinforcement learning. *arXiv preprint arXiv:1907.02057*, 2019.

- [46] Tom Zahavy, Yannick Schroecker, Feryal Behbahani, Kate Baumli, Sebastian Flennerhag, Shaobo Hou, and Satinder Singh. Discovering policies with domino: Diversity optimization maintaining near optimality. *arXiv preprint arXiv:2205.13521*, 2022.
- [47] Yulun Zhang, Matthew C Fontaine, Amy K Hoover, and Stefanos Nikolaidis. Deep surrogate assisted map-elites for automated hearthstone deckbuilding. In *Proceedings of the Genetic and Evolutionary Computation Conference*, pages 158–167, 2022.