

If an LLM Were a Character, Would It Know Its Own Story?

Evaluating Lifelong Learning in LLMs

Anonymous ACL submission

Abstract

Large language models (LLMs) can carry out human-like dialogue, but unlike humans, they are stateless due to the superposition property. However, during multi-turn, multi-agent interactions, LLMs begin to exhibit consistent, character-like behaviors—hinting at a form of emergent lifelong learning. Despite this, existing benchmarks often fail to capture these dynamics, primarily focusing on static, open-ended evaluations. To address this gap, we introduce LIFESTATE-BENCH, a benchmark designed to assess lifelong learning in LLMs. It features two episodic datasets—Hamlet and a synthetic script collection—rich in narrative structure and character interactions. Our fact-checking evaluation probes models’ self-awareness, episodic memory retrieval, and relationship tracking, across both parametric and non-parametric approaches. Experiments on models like Llama3.1-8B, GPT-4-turbo, and DeepSeek R1, we demonstrate that non-parametric methods significantly outperform parametric ones in managing stateful learning. However, all models exhibit challenges with catastrophic forgetting as interactions extend, highlighting the need for further advancements in lifelong learning.

1 Introduction

Large language model (LLM)-based dialog agents exhibit human-like traits (*e.g.*, intent understanding and language expression), making users prone to anthropomorphism (Shanahan et al., 2023). However, LLMs differ from humans in their *superposition property* (Janus, 2022): initially existing as a stateless superposition of simulacra across multiple possible characters (Lu et al., 2024). This property emerges from its next-token prediction training on a massive corpus, whereas humans develop through accumulated experiences and memories.

Through sustained interaction, we observe that an initially **stateless** LLM can transition toward

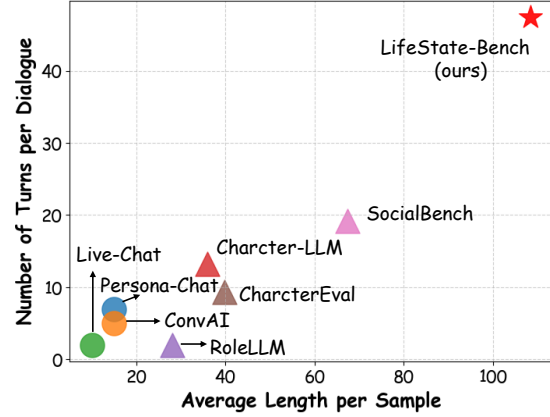


Figure 1: Dataset Statistics. Triangles represent role ability benchmarks, while circles denote dialogue agent benchmarks.

more **stateful** characteristics as dialogue context accumulates. At first, an LLM holds multiple characters but gradually settles into a clear character as the dialogue continues. Taking a nuanced view, this character convergence process mirrors how humans update their state through accumulated experience.

This state transition raises a measurable question: How can we quantify an LLM’s state evolution (also called Lifelong learning ability) from superposition to a more consistent state during multi-turn, multi-agent interactions? In this paper, “state” refers to the evolving configuration of an LLM’s internal processes during multi-agent interactions (Adams et al., 2012; Sumers et al., 2024), building on AI cognitive architecture (Sun, 2004; Newell, 1980).

While this research question predates LLM area, current exploration remains preliminary with varying methodologies. Early Persona-Chat series (Gao et al., 2023; Zhang et al., 2018; Dinan et al., 2019) focusing on consistent character responses using seq2seq models, or design social intelligence questionnaire-based benchmarks (Sap et al., 2019; Le et al., 2019). Both limited by static, non-

interactive setups. Ground truths were either open-ended or fixed over time.

Generative agents (Park et al., 2023) bring LLM-based dialogue agents into interactive human behavior simulation. This opens new possibilities for modeling state transitions. Later works follow two directions. First, role ability benchmarks (Tu et al., 2024; Wang et al., 2024a; Shao et al., 2023) focus on role-playing and plot prediction. They improve dialogue realism, but place less emphasis on tracking factual states during interactions. Second, the Sotopia series (Zhou et al., 2024; Wang et al., 2024b) and SocialBench (Chen et al., 2024) accessing social intelligence in open-ended tasks. Their design often centers around user-defined social goals, which may not align with factual state tracking or verification.

To address these challenges, we propose LIFESTATE-BENCH to explore and measure LLMs’ lifelong learning capabilities. As shown in Figure 1, our benchmark surpasses others (*e.g.*, dialogue agents, role-playing) with longer average sample lengths and more dialogue turns per interaction. Key features include:

Cumulative Experience. Inspired by the idea that “human personality emerges from experiences” (Shao et al., 2023), we created an episodic dataset with clear timelines. Each episode contains scene details, character actions, and dialogues to enable continuous agent interaction.

Fact Checking. Each episode includes fact-based questions related to self-awareness, memory retrieval, and relationship changes, accompanied by reference answers to ensure objective evaluation.

Memory Testing. For lifelong learning evaluation, models should retain long-term memory of past scenes while accessing only recent dialogue. This is tested via (i) non-training methods: episode or summary concatenation, and (ii) training methods: knowledge editing (Wang et al., 2025; Meng et al., 2023) and LoRA fine-tuning (Hu et al., 2022) using historical context.

In LIFESTATE-BENCH, we selected theatrical scripts, including both existing (*e.g.*, Hamlet) and synthetic narratives. For existing works, such as Hamlet—a classic play likely present in pretraining corpora—we use them to assess the model’s memory retention capabilities. To reduce direct string matching, all character names have been

anonymized. In contrast, the synthetic scripts, generated by Claude and unseen during pretraining, are used to evaluate the model’s ability to adapt to entirely new content. This contrast allows us to **explore lifelong learning in a realistic setting**, where models must navigate both familiar and novel domains. Compared to current benchmarks, our dataset features more interactive characters, closed dialogue turns, and richer content (Table 1). Evaluation combines LLM-as-judge with human assistance, using predetermined factual answers as criteria.

We tested several popular models, including the open-source Llama3.1-8B (AI, 2024), the closed-source GPT-4-turbo (OpenAI, 2023), and the large language reasoning model DeepSeek R1 (DeepSeek-AI et al., 2025). Benchmark-backed experiments show that current models still have much room for improvement in lifelong learning.

In summary, our work contributes in three key areas:

- **Two Datasets:** We introduce the Hamlet and synthetic datasets, featuring multi-agent episodic timelines and scene details to simulate cumulative experiences.

- **A Benchmark:** LIFESTATE-BENCH evaluates LLMs’ lifelong learning abilities via fact-checking mechanism, using both non-parametric and parametric memory-testing methods.

- **Findings and Implications:** Non-parametric methods outperform parametric ones in lifelong learning, but all models still face challenges with catastrophic forgetting as episodes progress, suggesting that our benchmark could provide valuable insights for further improvements.

2 Related Work

Anthropomorphic Cognition in LLMs. Early cognitive science (Sumers et al., 2024; Laird et al., 1987; Sun, 2004) laid the foundation for anthropomorphizing AI, simulating human-like emotional and social behaviors. Role-playing language agents have become increasingly common in simulating collective social behaviors in multi-agent systems. These agents (Park et al., 2023) not only enhance social interactions but also contribute to personalized and complex task execution in AI.

Role Ability/Dialog Agents Benchmarks. Role ability (Shao et al., 2023; Wang et al., 2024a) and dialogue agent benchmarks (Zhang et al., 2018; Dinan et al., 2019; Gao et al., 2023; Zheng et al.,

Benchmarks	Dataset Characteristics					Interaction Design			Evaluation Focus	
	# Samples	Avg Length	Data Source	# Turns	# Agents	Query Type	Answer Type	State	Memory	Metrics
<i>Dialog Agent Benchmarks</i>										
PERSONA-CHAT (Zhang et al., 2018)	162.0K	15	Crowd	7	2	Chit-chat	Open	✓	✓	PPL, F1, Hit@1
ConvAI (Dinan et al., 2019)	131.0K	15	Crowd	5	2	Chit-chat	Open	✓	✓	PPL, F1, Hit@1
Live-Chat (Gao et al., 2023)	9.4M	10	Crawled	2	2	Chit-chat	Open	✗	✗	BLEU, ROUGE
MT-Bench (Zheng et al., 2023)	3.3K	373	Synthetic	2.9	2	Multi-task	Factual	✗	✗	Model Judge
<i>Role Ability Benchmarks</i>										
Character-LLM (Shao et al., 2023)	21.1K	36	Synthetic	13.2	2	Persona	Open	✓	✗	Model Judge
RoleLLM (Wang et al., 2024a)	168.1K	28.1	Crawled	2	2	Persona	Mixed	✗	✗	ROUGE, Model Judge
CharacterEval (Tu et al., 2024)	11.4K	39.8	Crawled	9.3	2	Persona	Open	✗	✗	Model Judge
SocialBench (Chen et al., 2024)	30.8K	67.4	Synthetic	19.2	3.8	Social	Mixed	✗	✓	Model Judge
<i>Long-context Understanding Benchmarks</i>										
Long Range Arena (Tay et al., 2021)	-	10.0K	Synthetic	1	1	Multi-modal	Factual	✗	✗	Acc, Speed
LongBench (Bai et al., 2024)	4.6K	10.0K	Synthetic	1	1	Multi-task	Factual	✗	✗	Acc, F1, ROUGE
L-Eval (An et al., 2024)	411	4K-60K	Synthetic	1	1	Multi-task	Mixed	✗	✗	ROUGE, Model Judge
oo-bench (Zhang et al., 2024)	130	200.0K	Synthetic	1	1	Multi-task	Factual	✗	✗	Model Judge
LIFESTATE-BENCH-Hamlet	1.3K	125.5	Crawled	66.1	6.6	Social+Memory	Factual	✓	✓	Model Judge
LIFESTATE-BENCH-Synth	202	91.9	Synthetic	28.9	7	Social+Memory	Factual	✓	✓	Model Judge

Table 1: Comparison of Different Benchmarks. ✗: not supported; ✓: fully supported. Data Source indicates the origin of the data. # Turns shows the average conversation turns. # Agents indicates the number of participants in each interaction. Query Type shows the question/task type. Answer Type indicates whether the expected answers are open-ended, factual, or mixed. State shows whether the benchmark maintains interaction state. Memory indicates whether the benchmark evaluates memory capability.

2023) are divided into static and dynamic types. Static models (Chen et al., 2023; Tu et al., 2024) focus on predefined roles and fixed interaction patterns, typically applied in basic dialogue tasks. In contrast, dynamic models (Chen et al., 2024; Zhou et al., 2024; Wang et al., 2024b) allow agents to accumulate experiences and evolve during interactions, enabling consistency and adaptability over time. These benchmarks are essential for evaluating agent flexibility, memory handling, and long-term interaction capabilities.

Long-context Understanding Benchmarks. Long-context understanding involves models processing large amounts of information over extended interactions. These benchmark (Tay et al., 2021; Bai et al., 2024; An et al., 2024; Zhang et al., 2024) tests an agent’s ability to synthesize and recall information from multiple episodes, maintaining coherence across long spans of dialogue. It is crucial for tasks requiring reasoning and the integration of past events to understand complex or narrative-driven content.

3 Problem Formulation

We formalize lifelong learning for LLMs as a *state evolution process* in partially observable multi-agent environments to assess their ability to retain and adapt knowledge over time.

3.1 State Space

The Lifelong Learning ability is evaluated by state transition. In this paper, the state can be broken

down into three dimension:

Self-awareness. Can the model maintain a clear understanding of its identity, role, and goals over time? This dimension evaluates the model’s ability to retain and update its self-awareness as it interacts with the environment.

Factual Episode Memory Retrieve. Can the model retain knowledge and experiences persistently, avoiding catastrophic forgetting or the inability to reuse previously acquired knowledge? This dimension assesses the model’s capacity for long-term memory and knowledge retention.

Relationship Shift. Can the model reason effectively based on long-term memory, particularly in understanding and adapting to changes in relationships between characters or agents? This dimension evaluates the model’s ability to track and reason about evolving relationships.

3.2 Multi Agent Episodes

Multi agent environment. Let \mathcal{M} be a language model acting as role $r \in \mathcal{R}$ with internal state $\mathbf{s}_r^{(t)} \in \mathbb{R}^d$, interacting with other agents $\{r'\}_{r' \neq r}$ over discrete timesteps $t \in \{1, \dots, T\}$.

Task format. We formalize the above problems as a time-axis and role-based question-answering task. Assume that for agent r at episode t , each question $Q(r, t)$ is a triple:

$$\text{Input: } Q(r, t) = \langle H(t), c(t), q(r, t) \rangle, \quad (1)$$

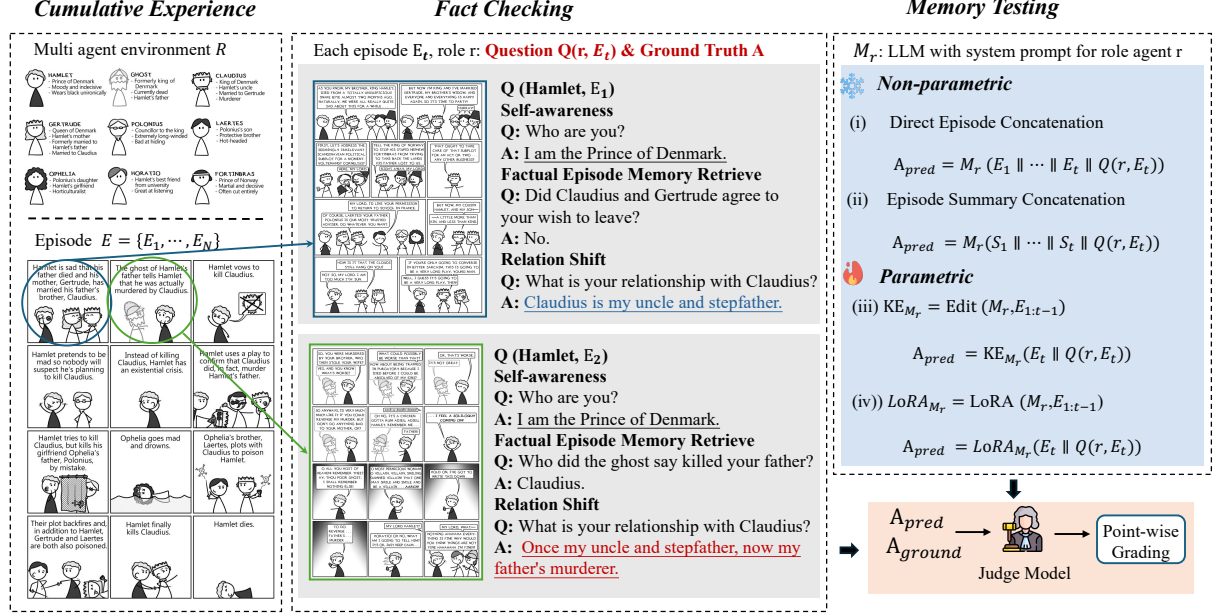


Figure 2: Method Overview. Our benchmark captures three key features: cumulative experience, fact-checking, and memory testing. Finally, the LLM judge scoring system is located in the bottom-right corner.

$$\text{Output: } A'(r, t) = \mathcal{M}(Q(r, t)), \quad (2)$$

where $H(t)$ denotes the complete history of interactions for role r , $c(t)$ denotes the context window for role r , which may include the entire episode t or a fixed-size subset of recent interactions. $q(r, t)$ is further decomposed into $q_{self}(r, t)$, $q_{fact}(r, t)$, $q_{rel}(r, t)$ corresponding to the three dimensions of the state space from Section 3.1. The output $A'(r, t)$ represents the agent response to the input $Q(r, t)$, which can be evaluated with ground truth answer $A'(r, t)$.

This structured approach allows us to analyze the model’s dynamic characteristics and assess its lifelong learning capabilities in a principled manner.

4 LIFESTATE-BENCH: From Stateless to Stateful

To establish a systematic evaluation framework for lifelong learning, LIFESTATE-BENCH integrates three synergistic components: (1) cumulative experience modeling through episodic timelines, (2) multi-dimensional fact-checking mechanisms, and (3) hierarchical memory testing architectures, refer to overview architecture in Figure 2. This tripartite structure enables comprehensive assessment of LLMs’ capacity to maintain persistent states through history interactions.

4.1 Cumulative Experience Modeling

Human learning relies on accumulating structured experiences over time (Shao et al., 2023). Early dialog agents (Zhang et al., 2018; Dinan et al., 2019), however, constructed persona representations from isolated conversations, ignoring temporal dependencies. Lifelong learning requires a *coherent timeline* and *factual consistency* across experiences. These early dialog datasets (Zhang et al., 2018; Dinan et al., 2019; Gao et al., 2023), while large, often suffer from short dialogues (e.g., fewer than 10 turns) and brief exchanges (e.g., fewer than 20 words per sentence).

Recent role play agent (Shao et al., 2023; Wang et al., 2024a; Tu et al., 2024) leverage richer sources, such as novels and role-playing platforms, to better capture experience accumulation. Inspired by this, we propose timeline cumulative experience modeling lifelong learning ability.

Experience Design. We structure experiences as an ordered sequence:

$$E = \{E_1, \dots, E_N\}, \quad E_i = (L_i, T_i, N_i, D_i) \quad (3)$$

where L_i represents the location of the event, T_i denotes the time it occurs, N_i provides scripted narration for context, and D_i contains the dialogues between characters. This structured representation ensures experiences are temporally ordered, contextually rich, and narratively coherent. This ensures

experiences are grounded in concrete events rather than isolated conversations.

Timeline Fact Order. Unlike conventional chat dialogue, our framework enforces event-driven interactions, ensuring characters accumulate structured, meaningful experiences grounded in concrete events.

Multi-Scale Interaction. Each episode includes: Dialogue length averaging 91 – 125 words, with 28.9 – 66 dialogue turns, enabling rich interactions. At least $M \geq 4$ characters, capturing complex social dynamics.

By structuring experiences with explicit timelines, factual consistency, and multi-character interactions, we enable dialog agents to learn in a way that mirrors human experiential accumulation.

4.2 Fact-Checking Mechanisms

Our core innovation is the introduction of fact-checking within multi-agent timeline-based dialogues. At the end of each episode, agents are tested with fact-based questions to ensure factual consistency throughout the narrative.

Challenges. Existing evaluation datasets mainly assess role-playing agents based on knowledge, linguistic style, or persona, such as using psychological theories (e.g., Big Five, MBTI) (Wang et al., 2023; Tu et al., 2024) or focusing on social intelligence like goals and preferences (Chen et al., 2024; Zhou et al., 2024). However, these approaches lack fact-checking and typically evaluate role consistency or open-ended questions. Our method, in contrast, centers on questions with factual answers, supported by human-annotated ground truth, generated from the current episode. Specific examples are shown in Figure 2.

Question Example. Our fact-checking framework includes three key question types: Self-awareness, Factual Episode Memory Retrieval, and Relationship Shift. Each episode E_t generates these three question types for each role in the episode to systematically evaluate the agent’s factual accuracy and temporal awareness, ensuring consistency across the timeline. Examples can be found in the fact-checking section of Figure 2.

4.3 Memory Testing

To evaluate our framework’s memory capabilities, we conduct controlled testing using non-parametric

and parametric approaches to assess the model’s ability to utilize and internalize memory.

Non-parametric Methods. Non-parametric methods test the model’s ability to process raw historical data, represented as $E = [E_1; \dots; E_N]$. Key implementations include:

- **Direct Episode Concatenation:** Concatenate all previous episodes as a text prefix to test memory with uncompressed information.
- **Summarization and Concatenation:** Generate a summary $S_t = \text{Summary}(E_{1:t})$ using GPT and concatenate it with the current episode to test memory with compressed information.

However, the limited context window size in non-parametric methods may cause information loss when handling long texts.

Parametric Methods. Parametric methods encode memory directly into the model’s parameters. We focus on two techniques:

- **Knowledge Editing:** This technique (Wang et al., 2025; Meng et al., 2023) updates specific model parameters to integrate episodic knowledge without full retraining, ensuring efficient internalization of key information.
- **LoRA (Low-Rank Adaptation):** LoRA (Hu et al., 2022) injects small, trainable updates into specific layers, fine-tuning the model with episode memory E_t to retain past information while preserving generalization.

These methods bypass context window limitations and enable efficient memory recall. However, practical issues like precision limitations in knowledge editing and information loss in LoRA fine-tuning may affect their performance, as discussed in the evaluation section.

4.4 Dataset Construction and Analysis

Data Collection. This study utilizes two complementary datasets to support a comprehensive evaluation of lifelong learning in language models. The first dataset is adapted from Shakespeare’s Hamlet, with anonymized character names to reduce memorization. While Hamlet may appear in pretraining data, we retain it as a deliberate challenge. Its rich narrative and evolving character dynamics test the model’s ability to track long-term dependencies

Table 2: Comparison of Evaluated Models

Model	Size	Open Source	Model Type	Ctx. Length
Llama3.1	8B	✓	Base	128K
GPT4-turbo	-	✗	Chat	128K
DeepSeek R1	671B	✓	Reasoning	128K

beyond rote recall. In contrast, the second dataset is a fully synthetic narrative generated by Claude 3.5 Sonnet (Anthropic, 2024), featuring a novel plot and emotional arcs. This enables a cleaner evaluation of generalization in unseen scenarios.

By Hamlet and Midnight Diner, our benchmark captures both ends of the spectrum: memorization vs. adaptation, offering a realistic and nuanced evaluation of lifelong learning in large language models. Details of data collection and illustrative examples can be found in Appendix A and Appendix C, respectively.

Question-Answer Annotation. To ensure quality, the annotation of questions was primarily conducted by the authors of this study, all of whom hold master’s degrees. In terms of question design, open-ended questions tend to result in lengthy model-generated answers (*e.g.*, averaging 243 tokens), while structured factual questions (*e.g.*, “who/where/when”) help improve accuracy and effectively reduce response length. During the experiments, data leakage issues were particularly notable. Specifically, in the *Hamlet* dataset, when character names were restored, the model could still generate correct answers without context, indicating that the model might be reasoning by memorizing classic plot patterns, thereby affecting the evaluation results.

LIFESTATE-BENCH Statistics. As shown in Table 1, we present the dataset statistics, interaction design, and evaluation focus of our benchmark.

Although our total number of samples is relatively small, each sample is longer on average compared to dialog agent or role ability benchmarks. Unlike long-context understanding datasets, our benchmark includes more dialogue turns and a larger number of interacting agents. Additionally, it emphasizes factual consistency and includes explicit memory probes.

5 Evaluation

5.1 Experimental Setup

Evaluation Methods. When answering questions about the current episode E_t , all prior

episodes E_1 to E_{t-1} , including dialogues, locations, and times, serve as context. We categorize evaluation methods into two types: (i) Parametric methods improve memory by updating the model’s internal parameters. Examples include Knowledge Editing-Grace (Hartvigsen et al., 2023), which modifies weights to incorporate new knowledge, and LoRA Fine-Tuning (Hu et al., 2022), a lightweight low-rank adaptation that reduces forgetting. (ii) Non-parametric methods manage context externally. Direct Concatenation appends full history but is limited by context length. Summary Concatenation uses GPT to extract and compress key information, balancing compression with retention for longer contexts.

Model Selection. We selected the most recent and widely adopted models as our backbone architectures, encompassing open-source model (Llama3.1-8B (AI, 2024)), closed-source models (GPT-4-turbo (OpenAI, 2023)), and state-of-the-art reasoning model (DeepSeek R1 (OpenAI, 2023)). The distinguishing characteristics of these models are presented in Table 2.

5.2 Experimental Results

Evaluation Protocol. We follow the LLM-as-Judge paradigm (Zheng et al., 2023), using the DeepSeek evaluator (DeepSeek-AI et al., 2024) for automatic scoring. Each question is paired with a ground truth answer containing factual details and structured reasoning. We use pairwise grading between the model output and ground truth, scoring from 1 to 100. By grounding the evaluation in factual reference answers, this setup ensures more reliable results than open-ended assessments that depend on the model’s internal knowledge. Details of the evaluation prompt and scoring workflow are included in Appendix B.

Overall Performance. The results show clear performance differences across models and datasets. Large reasoning models like DeepSeek-R1 and the proprietary GPT-4-turbo outperform the open-source Llama3.1-8B in all tasks. DeepSeek-R1 achieved the highest overall accuracy (67.3%) on the Hamlet dataset using the direct concatenation method, especially in self-awareness (86.4%) and relation shift (58.7%). On the synthetic dataset, GPT-4-turbo also using direct connection achieved the best overall accuracy (75.6%) and factual memory score (75.5%).

Table 3: Performance Comparison on Synthetic and Hamlet Datasets. The **best** and **second-best** performance in each section are highlighted. The *Avg* column represents the average accuracy, and the *Std* column represents the standard deviation, showing the variability of the results.

Method	Param. Tuning	Self-awareness		Factual Memory		Relation Shift		ACC
		Avg	Std	Avg	Std	Avg	Std	
Hamlet Dataset (Total 196 Questions)								
Open-source model: Llama3.1-8B								
Knowledge Editing	✓	67.3	0.78	43.7	1.26	19.2	1.26	21.9
LoRA-Tune	✓	69.1	0.86	53.6	1.08	22.7	1.31	25.6
Summary Concatenation	✗	73.5	0.93	54.2	0.96	42.1	0.97	47.0
Direct Concatenation	✗	74.2	0.77	58.8	1.11	43.7	1.15	58.0
Closed-source model								
GPT-4-turbo (Summary Conc.)	✗	84.6	1.08	62.7	0.79	54.5	0.88	66.1
GPT-4-turbo (Direct Conc.)	✗	84.3	1.42	62.3	0.82	54.2	0.64	65.9
Large reasoning model								
DeepSeek-R1 (Summary Conc.)	✗	85.6	0.93	64.3	0.69	56.5	1.05	65.8
DeepSeek-R1 (Direct Conc.)	✗	86.4	0.79	63.3	0.77	58.7	0.83	67.3
Synthetic Dataset (Total 115 Questions)								
Open-source model: Llama3.1-8B								
Knowledge Editing	✓	76.2	0.67	47.3	0.83	27.4	1.23	34.0
LoRA-Tune	✓	77.7	0.89	51.2	0.93	31.2	1.07	40.7
Summary Concatenation	✗	83.3	0.79	52.7	1.07	46.6	0.97	50.2
Direct Concatenation	✗	83.6	0.83	61.4	1.25	45.2	1.24	67.0
Closed-source model								
GPT-4-turbo (Summary Conc.)	✗	84.2	0.91	74.5	0.72	61.1	0.95	73.3
GPT-4-turbo (Direct Conc.)	✗	85.4	0.76	75.5	0.69	62.9	0.89	75.6
Large reasoning model								
DeepSeek-R1 (Summary Conc.)	✗	85.7	0.92	70.1	0.87	62.7	0.93	73.5
DeepSeek-R1 (Direct Conc.)	✗	87.6	0.93	74.7	0.94	67.4	0.88	74.2

Non-tuning methods (direct and summary connection) perform better than tuning-based methods (knowledge editing and LoRA-Tune), suggesting that leveraging the model’s original context is more effective, and this is intuitive. All methods perform better on the synthetic dataset than on Hamlet, likely due to its more complex characters, plots, and longer dialog samples (As shown in Table 1).

All methods show relatively low standard deviations (most between 0.7-1.2), indicating stable and reliable results. GPT-4-turbo has a higher standard deviation in self-awareness (1.42 on the Hamlet dataset), suggesting some fluctuation. In contrast, DeepSeek-R1 demonstrates more consistent performance, especially in factual memory, with a standard deviation between 0.69-0.94. Overall, DeepSeek-R1 offers the most balanced performance, excelling in complex relation shift tasks, while GPT-4-turbo excels in factual memory.

Episode-wise Performance. Using Llama3.1-8B as an example, we analyzed how each method performs across episodes. As shown in the figure 3, on the Hamlet dataset, model performance

generally drops as the story progresses, regardless of parameter tuning. The decline is most severe for the Knowledge Editing method, showing clear signs of catastrophic forgetting. A similar trend appears in the synthetic dataset, suggesting that our LIFESTATE-BENCH presents challenges for life-long learning evaluation. As the story unfolds, model performance decreases on both datasets. However, the decline is slower and more stable on the *Hamlet* dataset, suggesting the model effectively leverages prior knowledge and long-term dependencies. In contrast, the synthetic dataset generated by Claude 3.5 shows a faster and sharper drop in performance, indicating greater difficulty in adapting to novel, unseen content. This comparison highlights how the two datasets challenge different model capabilities—memory retention versus generalization.

State Dimension Breakdown. When broken down by question type, all methods show performance drops over episodes. The most challenging are questions about shifting relationships, where models struggle to track evolving dynamics.

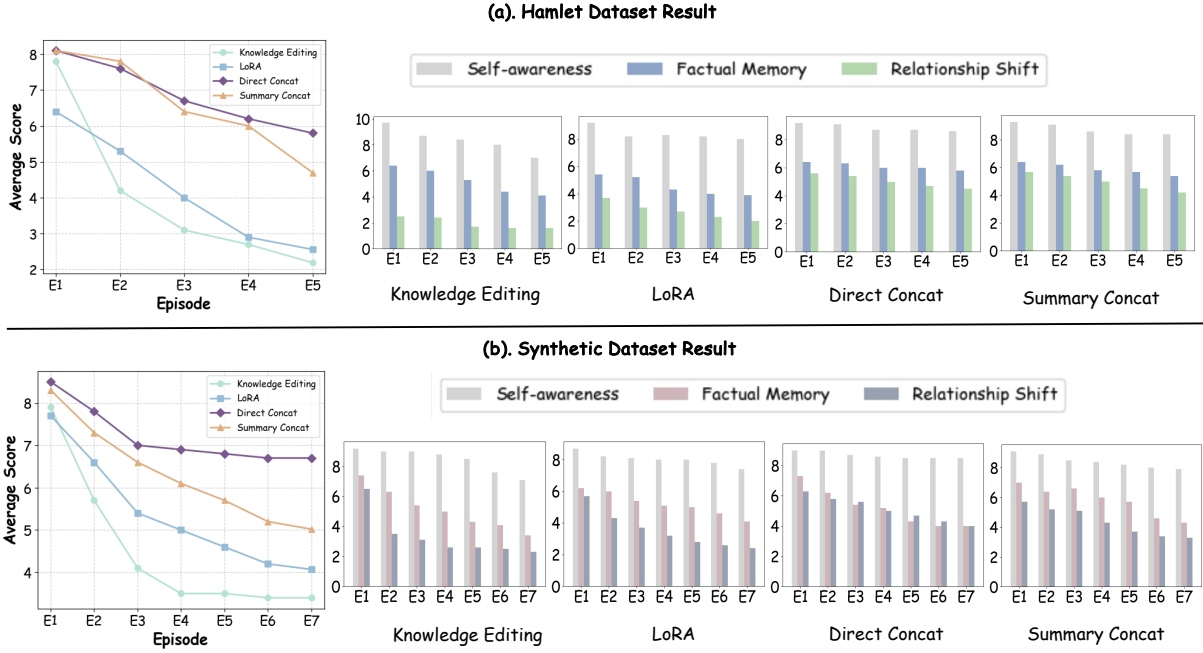


Figure 3: Episode-wise Performance of Hamlet and Synthetic Datasets. This includes the overall performance of various methods, as well as performance from different state perspectives.

The direct concatenation method performs consistently across question types and datasets. It is especially accurate in early episodes (E1–E2) when handling self-awareness and relationship shift. The summary-concatenation works well for self-awareness and fact recall but performs poorly on relationship shift questions. This suggests it fails to capture complex relationship changes. Knowledge Editing (GRACE) and LoRA-Tune perform weakly on self-awareness and memory-related tasks. Their scores drop quickly over episodes, further showing that parameter-based methods are vulnerable to forgetting in multi-step and long-term reasoning.

Data Leakage Analysis. In our observations, despite anonymizing character names in *Hamlet*, some model outputs still suggest data leakage—for example, predicting future plot details. However, this is not a flaw of our benchmark but a deliberately designed challenge. It is important to clarify that LLMs are pre-trained on vast amounts of internet data. In real-world scenarios, LLMs must balance leveraging existing knowledge with adapting to new information. Our benchmark tests this ability explicitly.

Including *Hamlet* allows us to probe whether models truly understand and reason about long-term dependencies, rather than merely recalling memorized content. In contrast, the synthetic

dataset generated by Claude 3.5 Sonnet provides a clean environment to evaluate the model’s generalization and adaptation to novel contexts. By combining these two types of data, our benchmark reflects a realistic spectrum of challenges—from memory retention to adaptation—rather than simply avoiding data leakage.

6 Conclusion

We introduce LIFESTATE-BENCH, a novel benchmark designed to evaluate the lifelong learning ability of LLMs through multi-agent, multi-turn interactions. Unlike prior static assessments, LIFESTATE-BENCH simulates cumulative experiences by organizing interactions as episodic scripts enriched with scene and character dynamics. It enables objective measurement of state evolution via fact-based questions, exploring self-awareness, factual memory retrieve, and relationship shifts. Our experiments on both open-/closed-source and state-of-the-art reasoning models reveal that LLMs still struggle with consistent state retention across episodes. LIFESTATE-BENCH proves effective in highlighting these challenges and shows that non-parametric methods better preserve long-term context. These results confirm its value as a diagnostic tool for developing more stateful, memory-capable LLMs.

7 Limitations

Although individual samples in the dataset are sufficiently long, the overall number of samples is limited, which may somewhat restrict the diversity of training and evaluation scenarios. Additionally, this work primarily focuses on dialogue-based models, with potential future extensions to code generation or vision and other multimodal tasks. Finally, the benchmark currently emphasizes factual questions and does not yet cover more subjective and complex cognitive abilities such as emotion modeling or planning. In the future, we plan to synthesize more diverse datasets to further enhance the benchmark’s robustness and applicability.

References

- Sam S. Adams, Itamar Arel, Joscha Bach, Robert Coop, Rod Furlan, Ben Goertzel, J. Storrs Hall, Alexei V. Samsonovich, Matthias Scheutz, Matthew Schlesinger, Stuart C. Shapiro, and John F. Sowa. 2012. [Mapping the landscape of human-level artificial general intelligence](#). *AI Mag.*, 33(1):25–42.
- Meta AI. 2024. [Meta llama 3.1](#). Accessed: 2024-02-16.
- Chenxin An, Shansan Gong, Ming Zhong, Xingjian Zhao, Mukai Li, Jun Zhang, Lingpeng Kong, and Xipeng Qiu. 2024. [L-eval: Instituting standardized evaluation for long context language models](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2024, Bangkok, Thailand, August 11-16, 2024, pages 14388–14411. Association for Computational Linguistics.
- Anthropic. 2024. Claude 3.5. <https://www.anthropic.com/claude>. Large language model.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. 2024. [Longbench: A bilingual, multi-task benchmark for long context understanding](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2024, Bangkok, Thailand, August 11-16, 2024, pages 3119–3137. Association for Computational Linguistics.
- Hongzhan Chen, Hehong Chen, Ming Yan, Wenshen Xu, Gao Xing, Weizhou Shen, Xiaojun Quan, Chenliang Li, Ji Zhang, and Fei Huang. 2024. [Socialbench: Sociality evaluation of role-playing conversational agents](#). In *Findings of the Association for Computational Linguistics, ACL 2024, Bangkok, Thailand and virtual meeting, August 11-16, 2024*, pages 2108–2126. Association for Computational Linguistics.
- Nuo Chen, Yan Wang, Haiyun Jiang, Deng Cai, Yuhan Li, Ziyang Chen, Longyue Wang, and Jia Li. 2023.

[Large language models meet harry potter: A dataset for aligning dialogue agents with characters](#). In *Findings of the Association for Computational Linguistics: EMNLP 2023, Singapore, December 6-10, 2023*, pages 8506–8520. Association for Computational Linguistics.

- DeepSeek-AI, Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, Xiaokang Zhang, Xingkai Yu, Yu Wu, Z. F. Wu, Zhibin Gou, Zhihong Shao, Zhuoshu Li, Ziyi Gao, Aixin Liu, Bing Xue, Bingxuan Wang, Bochao Wu, Bei Feng, Chengda Lu, Chenggang Zhao, Chengqi Deng, Chenyu Zhang, Chong Ruan, Damai Dai, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fucong Dai, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, H. Zhang, Han Bao, Hanwei Xu, Haocheng Wang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Qu, Hui Li, Jianzhong Guo, Jiashi Li, Jiawei Wang, Jingchang Chen, Jingyang Yuan, Junjie Qiu, Junlong Li, J. L. Cai, Jiaqi Ni, Jian Liang, Jin Chen, Kai Dong, Kai Hu, Kaige Gao, Kang Guan, Kexin Huang, Kuai Yu, Lean Wang, Lecong Zhang, Liang Zhao, Litong Wang, Liyue Zhang, Lei Xu, Leyi Xia, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Meng Li, Miaojuan Wang, Mingming Li, Ning Tian, Panpan Huang, Peng Zhang, Qiancheng Wang, Qinyu Chen, Qiushi Du, Ruiqi Ge, Ruisong Zhang, Ruizhe Pan, Runji Wang, R. J. Chen, R. L. Jin, Ruyi Chen, Shanghao Lu, Shanyan Zhou, Shanhuang Chen, Shengfeng Ye, Shiyu Wang, Shuiping Yu, Shunfeng Zhou, Shutong Pan, and S. S. Li. 2025. [Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning](#). *CoRR*, abs/2501.12948.
- DeepSeek-AI, Aixin Liu, Bei Feng, Bin Wang, Bingxuan Wang, Bo Liu, Chenggang Zhao, Chengqi Deng, Chong Ruan, Damai Dai, Daya Guo, Dejian Yang, Deli Chen, Dongjie Ji, Erhang Li, Fangyun Lin, Fuli Luo, Guangbo Hao, Guanting Chen, Guowei Li, Hao Zhang, Hanwei Xu, Hao Yang, Haowei Zhang, Honghui Ding, Huajian Xin, Huazuo Gao, Hui Li, Hui Qu, J. L. Cai, Jian Liang, Jianzhong Guo, Jiaqi Ni, Jiashi Li, Jin Chen, Jingyang Yuan, Junjie Qiu, Junxiao Song, Kai Dong, Kaige Gao, Kang Guan, Lean Wang, Lecong Zhang, Lei Xu, Leyi Xia, Liang Zhao, Liyue Zhang, Meng Li, Miaojuan Wang, Mingchuan Zhang, Minghua Zhang, Minghui Tang, Mingming Li, Ning Tian, Panpan Huang, Peiyi Wang, Peng Zhang, Qihao Zhu, Qinyu Chen, Qiushi Du, R. J. Chen, R. L. Jin, Ruiqi Ge, Ruizhe Pan, Runxin Xu, Ruyi Chen, S. S. Li, Shanghao Lu, Shanyan Zhou, Shanhuang Chen, Shaoqing Wu, Shengfeng Ye, Shirong Ma, Shiyu Wang, Shuang Zhou, Shuiping Yu, Shunfeng Zhou, Size Zheng, Tao Wang, Tian Pei, Tian Yuan, Tianyu Sun, W. L. Xiao, Wangding Zeng, Wei An, Wen Liu, Wenfeng Liang, Wenjun Gao, Wentao Zhang, X. Q. Li, Xiangyue Jin, Xianzu Wang, Xiao Bi, Xiaodong Liu, Xiaohan Wang, Xiaojin Shen, Xiaokang Chen, Xiaosha Chen, Xiaotao Nie, and Xiaowen Sun. 2024. [Deepseek-v2: A strong, economical, and efficient mixture-of-experts language model](#). *CoRR*, abs/2405.04434.

681	Emily Dinan, Varvara Logacheva, Valentin Malykh,	Allen Newell. 1980. Physical symbol systems . <i>Cogn. Sci.</i> , 4(2):135–183.	738
682	Alexander H. Miller, Kurt Shuster, Jack Urbanek,		739
683	Douwe Kiela, Arthur Szlam, Iulian Serban, Ryan		
684	Lowe, Shrimai Prabhumoye, Alan W. Black, Alexan-	OpenAI. 2023. GPT-4 technical report . <i>CoRR</i> ,	740
685	der I. Rudnicky, Jason D. Williams, Joelle Pineau,	abs/2303.08774.	741
686	Mikhail Burtsev, and Jason Weston. 2019. The sec-		
687	ond conversational intelligence challenge (convai2) .	Joon Sung Park, Joseph C. O’Brien, Carrie Jun Cai,	742
688	<i>CoRR</i> , abs/1902.00098.	Meredith Ringel Morris, Percy Liang, and Michael S.	743
		Bernstein. 2023. Generative agents: Interactive simu-	744
689	Jingsheng Gao, Yixin Lian, Ziyi Zhou, Yuzhuo Fu, and	lacr of human behavior. In <i>Proceedings of the 36th</i>	745
690	Baoyuan Wang. 2023. Livechat: A large-scale per-	<i>Annual ACM Symposium on User Interface Software</i>	746
691	sonalized dialogue dataset automatically constructed	<i>and Technology, UIST 2023, San Francisco, CA, USA,</i>	747
692	from live streaming . In <i>Proceedings of the 61st An-</i>	29 October 2023- 1 November 2023, pages 2:1–2:22.	748
693	<i>annual Meeting of the Association for Computational</i>	ACM.	749
694	<i>Linguistics (Volume 1: Long Papers), ACL 2023,</i>		
695	<i>Toronto, Canada, July 9-14, 2023</i> , pages 15387–	Maarten Sap, Hannah Rashkin, Derek Chen, Ronan Le	750
696	15405. Association for Computational Linguistics.	Bras, and Yejin Choi. 2019. Socialiqa: Common-	751
		sense reasoning about social interactions . <i>CoRR</i> ,	752
697	Tom Hartvigsen, Swami Sankaranarayanan, Hamid	abs/1904.09728.	753
698	Palangi, Yoon Kim, and Marzyeh Ghassemi. 2023.		
699	Aging with GRACE: lifelong model editing with dis-	Murray Shanahan, Kyle McDonell, and Laria Reynolds.	754
700	crete key-value adaptors . In <i>Advances in Neural</i>	2023. Role play with large language models . <i>Nat.</i> ,	755
701	<i>Information Processing Systems 36: Annual Confer-</i>	623(7987):493–498.	756
702	<i>ence on Neural Information Processing Systems 2023,</i>		
703	<i>NeurIPS 2023, New Orleans, LA, USA, December 10</i>	Yunfan Shao, Linyang Li, Junqi Dai, and Xipeng Qiu.	757
704	<i>- 16, 2023</i> .	2023. Character-llm: A trainable agent for role-	758
		playing . In <i>Proceedings of the 2023 Conference on</i>	759
705	Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan	<i>Empirical Methods in Natural Language Process-</i>	760
706	Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and	<i>ing, EMNLP 2023, Singapore, December 6-10, 2023,</i>	761
707	Weizhu Chen. 2022. Lora: Low-rank adaptation of	pages 13153–13187. Association for Computational	762
708	large language models . In <i>The Tenth International</i>	Linguistics.	763
709	<i>Conference on Learning Representations, ICLR 2022,</i>		
710	<i>Virtual Event, April 25-29, 2022</i> . OpenReview.net.	Theodore R. Sumers, Shunyu Yao, Karthik Narasimhan,	764
		and Thomas L. Griffiths. 2024. Cognitive architec-	765
711	Janus. 2022. Simulators . LessWrong online forum.	tures for language agents . <i>Trans. Mach. Learn. Res.</i> ,	766
		2024.	767
712	John E. Laird, Allen Newell, and Paul S. Rosenbloom.		
713	1987. SOAR: an architecture for general intelligence .	Ron Sun. 2004. Desiderata for cognitive architectures.	768
714	<i>Artif. Intell.</i> , 33(1):1–64.	<i>Philosophical psychology</i> , 17(3):341–373.	769
715	Matthew Le, Y-Lan Boureau, and Maximilian Nickel.	Yi Tay, Mostafa Dehghani, Samira Abnar, Yikang Shen,	770
716	2019. Revisiting the evaluation of theory of mind	Dara Bahri, Philip Pham, Jinfeng Rao, Liu Yang,	771
717	through question answering . In <i>Proceedings of the</i>	Sebastian Ruder, and Donald Metzler. 2021. Long	772
718	<i>2019 Conference on Empirical Methods in Natu-</i>	range arena : A benchmark for efficient transformers .	773
719	<i>ral Language Processing and the 9th International</i>	In <i>9th International Conference on Learning Repre-</i>	774
720	<i>Joint Conference on Natural Language Processing,</i>	<i>sentations, ICLR 2021, Virtual Event, Austria, May</i>	775
721	<i>EMNLP-IJCNLP 2019, Hong Kong, China, Novem-</i>	3-7, 2021. OpenReview.net.	776
722	<i>ber 3-7, 2019</i> , pages 5871–5876. Association for		
723	Computational Linguistics.	Quan Tu, Shilong Fan, Zihang Tian, Tianhao Shen,	777
		Shuo Shang, Xin Gao, and Rui Yan. 2024. Char-	778
724	Keming Lu, Bowen Yu, Chang Zhou, and Jingren Zhou.	actereval: A chinese benchmark for role-playing	779
725	2024. Large language models are superpositions of	conversational agent evaluation . In <i>Proceedings of the</i>	780
726	all characters: Attaining arbitrary role-play via self-	<i>62nd Annual Meeting of the Association for Compu-</i>	781
727	alignment . In <i>Proceedings of the 62nd Annual Meet-</i>	<i>tational Linguistics (Volume 1: Long Papers), ACL</i>	782
728	<i>ing of the Association for Computational Linguistics</i>	2024, Bangkok, Thailand, August 11-16, 2024, pages	783
729	<i>(Volume 1: Long Papers), ACL 2024, Bangkok, Thai-</i>	11836–11850. Association for Computational Lin-	784
730	<i>land, August 11-16, 2024</i> , pages 7828–7840. Associ-	guistics.	785
731	ation for Computational Linguistics.		
		Noah Wang, Zhongyuan Peng, Haoran Que, Jiaheng	786
732	Kevin Meng, Arnab Sen Sharma, Alex J. Andonian,	Liu, Wangchunshu Zhou, Yuhan Wu, Hongcheng	787
733	Yonatan Belinkov, and David Bau. 2023. Mass-	Guo, Ruitong Gan, Zehao Ni, Jian Yang, Man Zhang,	788
734	editing memory in a transformer . In <i>The Eleventh</i>	Zhaoxiang Zhang, Wanli Ouyang, Ke Xu, Wenhao	789
735	<i>International Conference on Learning Representa-</i>	Huang, Jie Fu, and Junran Peng. 2024a. Rolellm:	790
736	<i>tions, ICLR 2023, Kigali, Rwanda, May 1-5, 2023.</i>	Benchmarking, eliciting, and enhancing role-playing	791
737	OpenReview.net.	abilities of large language models . In <i>Findings of</i>	792
		<i>the Association for Computational Linguistics, ACL</i>	793

2024, Bangkok, Thailand and virtual meeting, August 11-16, 2024, pages 14743–14777. Association for Computational Linguistics.

Ruiyi Wang, Haofei Yu, Wenxin Sharon Zhang, Zhengyang Qi, Maarten Sap, Yonatan Bisk, Graham Neubig, and Hao Zhu. 2024b. Sotopia- π : Interactive learning of socially intelligent language agents. In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2024, Bangkok, Thailand, August 11-16, 2024, pages 12912–12940. Association for Computational Linguistics.

Song Wang, Yaochen Zhu, Haochen Liu, Zaiyi Zheng, Chen Chen, and Jundong Li. 2025. [Knowledge editing for large language models: A survey](#). *ACM Comput. Surv.*, 57(3):59:1–59:37.

Xintao Wang, Quan Tu, Yaying Fei, Ziang Leng, and Cheng Li. 2023. [Does role-playing chatbots capture the character personalities? assessing personality traits for role-playing chatbots](#). *CoRR*, abs/2310.17976.

Saizheng Zhang, Emily Dinan, Jack Urbanek, Arthur Szlam, Douwe Kiela, and Jason Weston. 2018. [Personalizing dialogue agents: I have a dog, do you have pets too?](#) In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics, ACL 2018, Melbourne, Australia, July 15-20, 2018, Volume 1: Long Papers*, pages 2204–2213. Association for Computational Linguistics.

Xinrong Zhang, Yingfa Chen, Shengding Hu, Zihang Xu, Junhao Chen, Moo Khai Hao, Xu Han, Zhen Leng Thai, Shuo Wang, Zhiyuan Liu, and Maosong Sun. 2024. [inftybench: Extending long context evaluation beyond 100k tokens](#). In *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, ACL 2024, Bangkok, Thailand, August 11-16, 2024, pages 15262–15277. Association for Computational Linguistics.

Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. 2023. [Judging llm-as-a-judge with mt-bench and chatbot arena](#). In *Advances in Neural Information Processing Systems 36: Annual Conference on Neural Information Processing Systems 2023, NeurIPS 2023, New Orleans, LA, USA, December 10 - 16, 2023*.

Xuhui Zhou, Hao Zhu, Leena Mathur, Ruohong Zhang, Haofei Yu, Zhengyang Qi, Louis-Philippe Morency, Yonatan Bisk, Daniel Fried, Graham Neubig, and Maarten Sap. 2024. SOTOPIA: interactive evaluation for social intelligence in language agents. In *The Twelfth International Conference on Learning Representations, ICLR 2024, Vienna, Austria, May 7-11, 2024*. OpenReview.net.

A Dataset Construction Details

Dataset Construction. LIFESTATE-BENCH evaluates large language models’ (LLMs) ability to retain and reason over long-term state information in narrative environments. It includes two types of scripts:

- **Hamlet** (English): An existing classical play. All character names are anonymized to reduce data leakage. It primarily tests memory retention when prior exposure may exist.
- **Midnight Diner** (Chinese & English): A synthetic script generated via Claude 3.5 Sonnet. It is not part of any public pretraining corpus and focuses on evaluating adaptation to novel content.

Each episode includes: *Scene information*: time, location, participants. *Full dialogues*: grounded in realistic narrative progression. *Role cards*: character background, personality traits, and relationships. *QA pairs*: fact-based questions with reference answers for evaluation, centered on (1) self-awareness, (2) memory retrieval, and (3) relationship changes. Data was stored in JSON format, structured in the following hierarchy: EpisodeID → Question-Answer ID → (Question, Reference answer).

Prompt for Synthetic Data Generation (Claude). To construct the Midnight Diner dataset, we used Claude 3.5 Sonnet to generate original episodes, role cards, and dialogue timelines. The prompt is shown in Table 4.

B Evaluation Protocol

We follow the LLM-as-Judge paradigm (Zheng et al., 2023), using the DeepSeek evaluator (DeepSeek-AI et al., 2024) for automatic scoring. Each model-generated answer is compared against the reference answer and scored from 1 to 10 based on alignment and correctness (Zheng et al., 2023).

Evaluation Prompt. Each triplet (question, model answer, reference answer) is scored using the following prompt summarized in Table 5

Scoring Workflow. Algorithm 1 illustrates the overall scoring workflow. For each question-answer pair in the dataset, the question, model answer, and reference answer are first extracted.

Prompt: Please help me generate an original multi-episode drama script, including detailed character profiles, a full dialogue-based script, and a timeline of events. The requirements are:

- The setting is a “*Midnight Diner*” with fixed staff and rotating customers.
- Each episode should explore a central theme, such as character growth, emotional conflict, or relationship change.
- Each character should have a clear background, personality, and relationship dynamics.
- The dialogue should be natural and realistic, reflecting everyday emotional depth.

The output should include:

1. Full script in dialogue form;
2. Structured character cards;
3. Scene-level metadata such as time, place, and involved characters.

Table 4: Instruction prompt used to generate drama-style episodes.

Prompt:

The known question is: [QUESTION].
The original answer is: [MODEL_ANSWER].
The target answer is: [REFERENCE_ANSWER].

Please provide a score for the original answer based on the following criteria:

- 1–2: irrelevant or seriously incorrect;
- 3–4: minor errors, low quality;
- 5–6: medium quality;
- 7–8: close to reference, good quality;
- 9–10: same as reference answer.

Please return only a number from 0 to 10.

Table 5: Prompt for scoring the original answer based on a reference.

Then, a prompt is constructed and sent to the large language model API to obtain a score. Finally, all scores are accumulated and the average score is

Algorithm 1 Evaluation via LLM Scoring

```
1: Initialize total_score  $\leftarrow$  0, count  $\leftarrow$  0
2: for each QA pair  $(q, a_{\text{model}}, a_{\text{ref}})$  in dataset do
3:   Construct prompt with  $q, a_{\text{model}}, a_{\text{ref}}$ 
4:   response  $\leftarrow$  LLM_API(prompt)
5:   score  $\leftarrow$  parse_score(response)
6:   total_score += score, count += 1
7: end for
8: average_score  $\leftarrow$  total_score / count
9: return average_score
```

computed as the overall performance metric.

Reproducibility. We provide a Python script `eval.py` implementing the full pipeline using the OpenAI-compatible API.

C Data Example

To illustrate the structure of our dataset, we present a stylized excerpt adapted from *Hamlet*, Act I, Scene I. Each scene is annotated with a title, a list of participating characters, dialogue entries, and character-centric question-answer (QA) annotations across multiple perspectives.

Scene Sample

Scene Title: *SCENE I. Elsinore. A platform before the castle.*

Characters: Person7, Person10, Person26

Dialogues:

- **Action:** *Person10 at his post. Enter to him Person26.*
- **Person26:** Who’s there?
- **Person10:** Nay, answer me: stand, and unfold yourself.
- **Person26:** Long live the king!
- **Person10:** Person26?
- **Person26:** He.
- **Person10:** You come most carefully upon your hour.
- **Person26:** ’Tis now struck twelve; get thee to bed, Person10.
- ...

Character QA Annotations

Each character is annotated with multi-perspective QA entries covering (1) Self-Perception, (2) Memory and Decision-Making, and (3) Plot Interaction.

All answers are phrased in first-person, grounded in dialogue context.

Person10

• Self-awareness:

Q: What is your position in the royal palace?

A: I am a soldier, responsible for guarding the court.

• Factual Episode Memory Retrieve:

Q: Who is taking over your shift tonight?

A: Person26.

Q: Who did Person26 ask you to call over quickly?

A: His watch partners, Person31 and Person5.

Person26

• Self-awareness:

Q: What is your position in the royal palace?

A: I am a soldier, responsible for guarding the court.

• Factual Episode Memory Retrieve:

Q: Whose shift did you take over tonight?

A: Person10’s.

Q: Who was with you the first time you saw Person21?

A: I was with Person5 when we first saw Person21.

Q: Where did you see Person21?

A: At the watchtower of the castle.

Q: When did you see Person21?

A: Last night, just as the clock struck.

• Factual Episode Memory Retrieve:

Q: Who does Person21 resemble?

A: Person21 bears a striking resemblance to the late king.

Q: Did Person21 appear again tonight? What did it do?

A: Yes, Person21 appeared again tonight. It did not speak; it just silently departed.

Note

Identifiers like “Person5” and “Person21” are anonymized character IDs used during preprocessing. Each QA entry reflects context-specific knowledge, enabling multi-perspective reasoning and temporal memory modeling. This structure facilitates evaluation of consistent character behaviors across scenes.