

# Multi-stage Distillation Framework for Cross-Lingual Semantic Similarity Matching

Anonymous ACL submission

## Abstract

Previous studies have proved that cross-lingual knowledge distillation can significantly improve the performance of pre-trained models for cross-lingual similarity matching tasks. However, the student model needs to be large in this operation. Otherwise, its performance will drop sharply, thus making it impractical to be deployed to memory-limited devices. To address this issue, we delve into cross-lingual knowledge distillation and propose a multi-stage distillation framework for constructing a small-size but high-performance cross-lingual model. In our framework, the contrastive learning and an assistant model are introduced to prevent performance from being compromised during the compression process. The experimental results demonstrate that our method can compress the size of XLM-R and MiniLM by more than 50%, while the performance is only reduced by about 1%. In addition, our framework is model-independent and applicable to all transformer-based models.

## 1 Introduction

With the expansion of international information exchanges, many multilingual contents have appeared on the Internet. It is widespread to store texts in dozens of languages in an information system. Cross-lingual similar text matching in multilingual systems is a great challenge for many scenarios, e.g., search engines, recommendation systems, question-answer robots, etc. (Cer et al., 2017; Hardalov et al., 2020; Asai et al., 2021).

In the monolingual scenario, benefiting from the robust performance of the pre-trained language models (PLMs) (e.g., BERT (Devlin et al., 2019), RoBERTa (Liu et al., 2019), T5 (Raffel et al., 2020), etc.), significant success has been achieved in text-similarity matching tasks. For example, Reimers and Gurevych (2019) proposed the SBERT model trained with similar text pairs and achieved the state-of-the-art performance in the supervised simi-

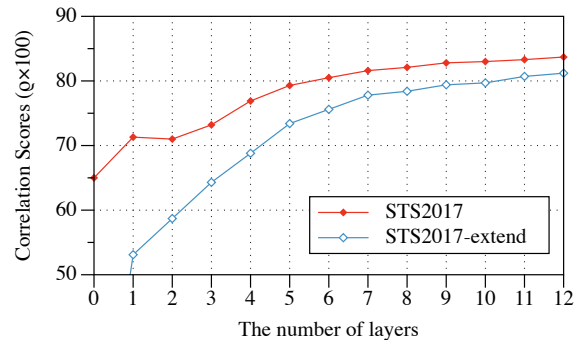


Figure 1: Evaluation results of XLM-R with different number of encoder layers on the STS2017 **monolingual** task and the STS2017-extend **cross-lingual** task, using SBERT-paraphrases for knowledge distillation.

lar matching. In unsupervised scenarios, Gao et al. (2021) proposed the SimCSE model, which was trained on Wiki corpus through contrastive learning task.

Drawing on the success in the monolingual scenario, researchers began to introduce pre-training technology into cross-lingual scenarios and proposed a series of multilingual pre-trained models, e.g., mBERT (Devlin et al., 2019), XLM (Conneau and Lample, 2019), XLM-R (Conneau et al., 2020), etc. Due to the vector collapse issue (Li et al., 2020), the performances of these cross-lingual models on similarity matching tasks are still not satisfactory. Reimers and Gurevych (2020) injected the similarity matching ability of SBERT into the cross-lingual model through knowledge distillation, which alleviated the collapse issue and significantly improved the performance of cross-lingual similarity matching tasks.

Although the cross-lingual similarity matching tasks have achieved some positive results, the existing cross-lingual models are huge and challenging to be deployed in industrial scenarios, especially in devices with limited memory. We try to distill the SBERT model into an XLM-R model with fewer layers following the method in Reimers and

Gurevych (2020). However, as shown in Figure 1, the performance will be significantly reduced as the number of layers decreases. This phenomenon indicates that cross-lingual capabilities are highly dependent on the model size, and simply compressing the number of layers will bring a serious performance loss.

In this work, we focus on building a small but high-performance model for cross-lingual similarity matching tasks. For this purpose, we explore a cross-lingual distillation and propose a multi-stage distillation compression framework. Benefiting from the multi-stage strategy, we can gradually transfer knowledge from a large monolingual model to a small multilingual model with minimal performance losses. We conduct experiments on the STS-2017 (Cer et al., 2017) and STS2017-extend datasets (Reimers and Gurevych, 2020) for the monolingual and cross-lingual tasks. Experimental results show that our method effectively reduces the embedding and encoder size of the multilingual pre-trained model. We also study the performance impact of reducing the embedding or the encoder sizes.

The main contributions of this work can be summarized as follows:

- We verify that the cross-lingual capability has a higher requirement on model size.
- We propose a multi-stage distillation framework to compress the cross-lingual model with minimal performance losses.
- A series of small-size cross-lingual models are released on Github<sup>1</sup> along with the code.

## 2 Related work

There are two areas closely related to this work, namely, multilingual models and knowledge distillation.

### 2.1 Multilingual models

Existing multilingual models can be divided into two categories: (1) Multilingual general model. (2) Cross-lingual representation model.

In the first category, transformer-based pre-trained models have been massively adopted in multilingual NLP tasks (Huang et al., 2019; Chi et al., 2021; Luo et al., 2021; Ouyang et al., 2021). mBERT (Devlin et al., 2019) was pre-trained

on Wikipedia corpus in 104 languages, achieved significant performance in the downstream task. XLM (Conneau and Lample, 2019) presented the translation language modeling (TLM) objective to improve the cross-lingual transferability by leveraging parallel data. XLM-R (Conneau et al., 2020) was built on RoBERTa (Liu et al., 2019) using CommonCrawl Corpus.

In the second category, LASER (Artetxe and Schwenk, 2019a) used an encoder-decoder architecture based on a Bi-LSTM network and was trained on the parallel corpus obtained by neural machine translation. Multilingual Universal Sentence Encoder (mUSE) (Chidambaram et al., 2019; Yang et al., 2020) adopted a bi-encoder architecture and was trained with an additional translation ranking task. LaBSE (Feng et al., 2020) turned the pre-trained BERT into a bi-encoder mode and was optimized with the objectives of mask language model (MLM) and translation language model (TLM) (Conneau and Lample, 2019). Recently, Mao et al. (2021) presented a lightweight bilingual sentence representation method based on the dual-transformer architecture.

### 2.2 Knowledge distillation

However, multilingual models do not necessarily have cross-lingual capabilities, especially in the first category, in which vector spaces of different languages are not aligned. Knowledge distillation (Hinton et al., 2015) used knowledge from a teacher model to guide the training of a student model, which can be used to compress the model and align its vector space at the same time.

For model compression, knowledge distillation aimed to transfer knowledge from a large model to a small model. BERT-PKD (Sun et al., 2019) extracted knowledge from both last layer and intermediate layers at fine-tuning stage. DistilBERT (Sanh et al., 2019) performed distillation at pre-training stage to halve the depth of BERT. TinyBERT (Jiao et al., 2020) distilled knowledge from BERT at both pre-training and fine-tuning stages. MobileBERT (Sun et al., 2020) distilled BERT into a model with smaller dimensions at each layer. MiniLM (Wang et al., 2021) conducted deep self-attention distillation. In terms of vector alignment, (Reimers and Gurevych, 2020) aligned the vector space of the multilingual model with the monolingual SBERT (Reimers and Gurevych, 2019) model through cross-lingual knowledge distillation.

<sup>1</sup>Will be publicly available once accepted.

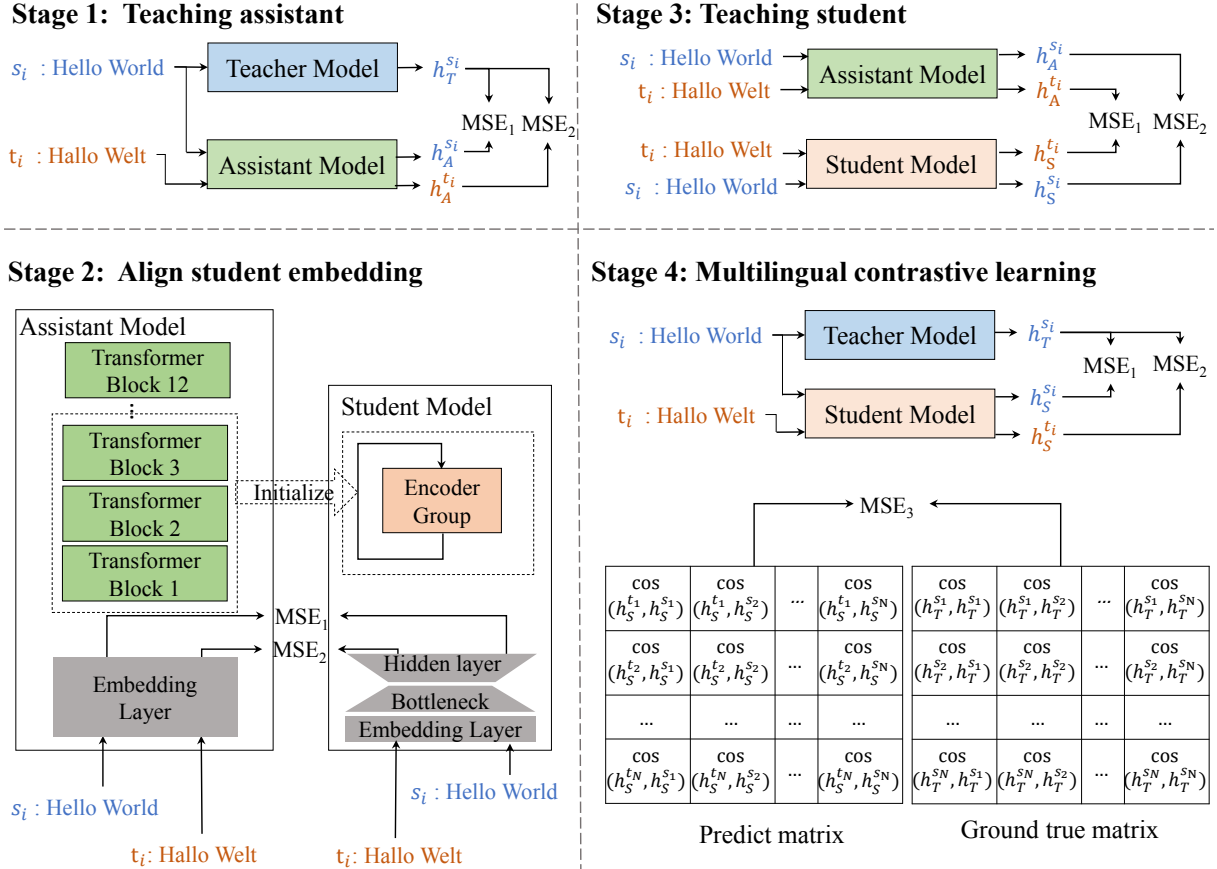


Figure 2: The overview of the model architecture and the multi-stage distillation. It consists of four stages and aims to obtain a small multilingual student model. For convenience, we take the English SBERT as the teacher model, XLM-R as the assistant model.  $\langle s_i, t_i \rangle$  is a pair of parallel sentences in two different language.

### 3 Method

In this section, we will introduce our method in detail. First, we exhibit the model architecture, and then introduce the multi-stage distillation strategy for the model training. An overview of our approach is shown in Figure 2.

#### 3.1 Model architecture

Given a large-size monolingual model as teacher  $T$  and a small-size multilingual model as student  $S$ , our goal is to transfer semantic similarity knowledge from  $T$  to  $S$  and simultaneously compress the size of  $S$  with  $m$  parallel sentences  $P = \{ \langle s_1, t_1 \rangle, \langle s_2, t_2 \rangle, \dots, \langle s_m, t_m \rangle \}$ .

##### 3.1.1 Teacher model

In this work, we use SBERT(Reimers and Gurevych, 2019) as the teacher model, which has been proven to perform well on monolingual semantic similarity tasks. SBERT adopts a siamese network structure to fine-tune a BERT(Devlin et al.,

2019) encoder, and applies a mean pooling operation to its output to derive sentence embedding.

##### 3.1.2 Assistant model

Mirzadeh et al. (2020) proved that when the gap between the student and teacher is large, the performance of the student model will decrease. We hope to get a small student model with cross-lingual capabilities, while the teacher is a large monolingual model. To alleviate the gaps, we introduce an assistant model  $A$  (Mirzadeh et al., 2020), which is a large multilingual model with cross-lingual ability.

##### 3.1.3 Student model

Inspired by ALBERT(Lan et al., 2020), we design the student model with Parameter Recurrent and Embedding Bottleneck strategy. Since there is no available multilingual ALBERT, we need to design from scratch.

**Parameter Recurrent:** We choose the first  $M$  layers of the assistant model as a recurring unit (RU).

Concretely, the RU is defined as,

$$RU = \{L_i | i \in [1, M]\}, \quad (1)$$

where  $L$  is the  $i^{th}$  transformer layer.

**Embedding Bottleneck:** Multilingual pre-trained models usually require a large vocabulary  $V$  to support more languages, which leads to large embedding layer parameters. We add a bottleneck layer (He et al., 2016; Lan et al., 2020; Sun et al., 2020) of size  $B$  between embedding layer and hidden layer  $H$ . In this way, the embedding layer is reduced from  $O(V \times H)$  to  $O(V \times B + B \times H)$ .

### 3.2 Multi-stage distillation

Multi-stage Distillation is the key for enabling the small-size student model with cross-lingual matching ability.

#### Stage 1. Teaching assistant

As the **Stage 1** in Figure 2, we use the teacher model and parallel corpus to align vector space between different languages through the loss function in (2), enabling its cross-lingual ability (Reimers and Gurevych, 2020).

$$\ell_{stage1} = \frac{1}{|N|} \sum_i^N [(h_T^{si} - h_A^{si})^2 + (h_T^{ti} - h_A^{ti})^2], \quad (2)$$

where  $N$  is the batch size, and  $s_i$  and  $t_i$  denotes the parallel sentences in a mini batch.

#### Stage 2. Align student embedding

As the **Stage 2** in Figure 2, we align the embedding bottleneck layer with the assistant embedding space through the loss function in (3),

$$\ell_{stage2} = \frac{1}{|N|} \sum_i^N [(h_{Ae}^{si} - h_{Be}^{si})^2 + (h_{Be}^{ti} - h_{Ae}^{ti})^2], \quad (3)$$

where  $h_{Ae}^{si}, h_{Ae}^{ti}$  denotes the output of assistant embedding layer,  $h_{Be}^{si}, h_{Be}^{ti}$  denotes the output of embedding bottleneck layer.

#### Stage 3. Teaching student

In the **Stage 3**, the student model is trained to imitate the output of the assistant model with loss function in (4),

$$\ell_{stage3} = \frac{1}{|N|} \sum_i^N [(h_A^{si} - h_S^{si})^2 + (h_A^{ti} - h_S^{ti})^2], \quad (4)$$

where  $h_A^{si}, h_A^{ti}$  denotes the output of assistant model,  $h_S^{si}, h_S^{ti}$  denotes the output of student model.

#### Stage 4. Multilingual contrastive learning

After the above three stages, we can get a small multilingual sentence embedding model. However, as shown in Figure 1, when the model size decrease, its cross-lingual performance decreases sharply. Therefore, in this stage, we propose multilingual contrastive learning (MCL) task further to improve the performance of the small student model.

Assuming the batch size is  $N$ , for a specific translation sentence pair  $(s_i, t_i)$  in one batch, the mean-pooled sentence embedding of the student model is  $(h_S^{si}, h_S^{ti})$ . The MCL task takes parallel sentence pair  $(h_S^{si}, h_S^{ti})$  as positive one, and other sentences in the same batch  $\{(h_S^{si}, h_S^{tj}) | j \in [1, N], j \neq i\}$  as negative samples. Considering that the MCL task needs to be combined with knowledge distillation. Unlike the previous work (Yang et al., 2019; Feng et al., 2020; Mao et al., 2021), the MCL task does not directly apply the temperature-scaled cross-entropy loss function.

Here, we introduce the implementation of the MCL task. For each pair of negative examples  $(s_i, t_j)$  in the parallel corpus, the MCL task first unifies  $(s_i, t_j)$  into the source language  $(s_i, s_j)$ , then uses the fine-grained distance between  $h_T^{si}$  and  $h_T^{sj}$  in the teacher model to push away the semantic different pair  $(h_S^{si}, h_S^{tj})$  in the student model. For positive one, the distance between  $h_T^{si}$  and  $h_T^{ti}$  in the teacher model is used to pulling semantically similar pair  $(h_S^{si}, h_S^{ti})$  together. The MCL task loss is (5),

$$\ell_{MCL} = \frac{1}{N^2} \sum_i^N \sum_j^N \left( \phi(h_T^{si}, h_T^{sj}) - \phi(h_S^{si}, h_S^{tj}) \right)^2, \quad (5)$$

where  $\phi$  is the distance function. Following prior work (Yang et al., 2019; Feng et al., 2020), we set  $\phi(x, y) = \cos(x, y)$ . we also add the knowledge distillation task for multilingual sentence representation learning. The knowledge distillation loss is defined as,

$$\ell_{KD} = \frac{1}{|N|} \sum_i^N [(h_T^{si} - h_S^{si})^2 + (h_T^{ti} - h_S^{ti})^2]. \quad (6)$$

In stage 4, the total loss function is added by  $\ell_{MCL}$  and  $\ell_{KD}$ .

$$\ell_{stage4} = \ell_{MCL} + \ell_{KD} \quad (7)$$

Model	AR-AR	ES-ES	EN-EN	Avg.	Embedding size	Encoder size
<i>Pre-trained Model</i>						
mBERT (mean)	50.9	56.7	54.4	54.0	92.20M	85.05M
XLM-R (mean)	25.7	51.8	50.7	42.7	192.40M	85.05M
mBERT-nli-stsb	65.3	83.9	80.2	76.5	92.20M	85.05M
XLM-R-nli-stsb	64.4	83.1	78.2	75.3	192.40M	85.05M
LASER	68.9	79.7	77.6	75.4	23.56M	17.06M
LaBSE	69.1	80.8	79.4	76.4	385.28M	85.05M
<i>Knowledge Distillation</i>						
mBERT $\leftarrow$ SBERT-nli-stsb	78.8	83.0	82.5	81.4	92.20M	85.05M
DistilMBERT $\leftarrow$ SBERT-nli-stsb	77.7	84.0	82.1	81.2	92.20M	46.10M
XLM-R $\leftarrow$ SBERT-nli-stsb	79.9	83.5	82.5	82.0	192.40M	85.05M
mBERT $\leftarrow$ SBERT-paraphrases	79.1	86.5	88.2	84.6	92.20M	85.05M
DistilMBERT $\leftarrow$ SBERT-paraphrases	77.7	85.8	88.5	84.0	92.20M	46.10M
XLM-R $\leftarrow$ SBERT-paraphrases	79.6	86.3	88.8	<b>84.6</b>	192.40M	85.05M
MiniLM $\leftarrow$ SBERT-paraphrases	80.3	84.9	85.4	<b>83.5</b>	96.21M	21.29M
<i>Ours(Teacher model=SBERT-paraphrases)</i>						
XLM-R( $b = True, bs = 128,  RU  = 3$ )	76.7	84.5	86.6	82.6	32.49M	21.26M
XLM-R( $b = True, bs = 128,  RU  = 12$ )	79.0	85.5	88.4	<b>84.3</b>	<b>32.49M</b>	85.05M
XLM-R( $b = False,  RU  = 3$ )	79.9	86.8	88.4	<b>85.0</b>	192.40M	<b>21.26M</b>
<i>Ours(Teacher model=SBERT-paraphrases)</i>						
MiniLM( $b = True, bs = 128,  RU  = 3$ )	72.8	79.3	84.4	78.8	32.05M	5.32M
MiniLM( $b = True, bs = 128,  RU  = 12$ )	79.0	84.4	85.2	<b>82.9</b>	<b>32.05M</b>	21.29M
MiniLM( $b = False,  RU  = 3$ )	79.9	85.3	85.6	<b>83.6</b>	96.21M	<b>5.32M</b>

Table 1: Spearman rank correlation ( $\rho \times 100$ ) between the cosine similarity of sentence representations and the gold labels for STS 2017 **monolingual** dataset.  $b$  indicates whether to use the Embedding Bottleneck strategy,  $bs$  indicates the hidden size of Bottleneck layer.  $|RU|$  indicates the first  $|RU|$  layers from the basic model are taken as Recurrent Unit, the recurrent times = basic model layers/ $|RU|$ .

## 4 Experimental results

### 4.1 Evaluation setup

**Dataset:** The semantic text similarity (STS) task requires models to assign a semantic similarity score between 0 and 5 to a pair of sentences. Following Reimers and Gurevych (2020), we evaluate our method on two multilingual STS tasks, i.e., STS2017(Cer et al., 2017) and STS2017-extend(Reimers and Gurevych, 2020), which contain three monolingual tasks (EN-EN, AR-AR, ES-ES) and six cross-lingual tasks (EN-AR, EN-ES, EN-TR, EN-FR, EN-IT, EN-NL).

**Parallel corpus:** In stage 1, stage 2 and stage 3, we use TED2020(Reimers and Gurevych, 2020), WikiMatrix(Schwenk et al., 2021), Europarl(Koehn, 2005) and NewsCommentary(Tiedemann, 2012) as parallel corpus for training. In stage 4, TED2020 is enough for contrastive learning. In this way, the student model first learns generalized multilingual knowledge and then possesses semantic similarity capabilities.

**Metric:** Spearman’s rank correlation  $\rho$  is reported in our experiments. Specifically, we first compute the cosine similarity score between two sentence embeddings, then calculate the Spearman rank correlation  $\rho$  between the cosine score and the golden score.

### 4.2 Implementation details

Mean pooling is applied to obtain sentence embeddings, and the max sequence length is set to 128. We use AdamW(Loshchilov and Hutter, 2019) optimizer with a learning rate of  $2e-5$  and a warm-up of 0.1. In stage1, stage2, and stage3, the models are trained for 20 epochs with a batch size of 64, while in stage 4, the student model is trained for 60 epochs. The mBERT, XLM-R used in this work are base-size model obtained from Huggingface’s *transformers* package (Wolf et al., 2020), and the MiniLM refers to *MiniLM-L12-H384*<sup>2</sup>

### 4.3 Performance comparison

We compare the model obtained from our multi-stage distillation with the previous state-of-the-art models, and results are shown in Table 1 and Table 2. In *Pre-trained Model*, mBERT (mean) and XLM-R (mean) are mean pooled mBERT and XLM-R models. mBERT-nli-stsb and XLM-R-nli-stsb are mBERT and XLM-R fine-tuned on the NLI and STS training sets. LASER and LaBSE are obtained from Artetxe and Schwenk (2019b) and Feng et al. (2020). In *Knowledge Distillation*, we use the paradigm of Student $\leftarrow$ Teacher to represent the Student model distilled from the Teacher model. There

<sup>2</sup><https://huggingface.co/microsoft/Multilingual-MiniLM-L12-H384>

Model	EN-AR	EN-DE	EN-TR	EN-ES	EN-FR	EN-IT	EN-NL	Avg.	Embedding size	Encoder size
<i>Pre-trained Model</i>										
mBERT (mean)	16.7	33.9	16.0	21.5	33.0	34.0	35.6	27.2	92.20M	85.05M
XLM-R (mean)	17.4	21.3	9.2	10.9	16.6	22.9	26.0	17.8	192.40M	85.05M
mBERT-nli-stsb	30.9	62.2	23.9	45.4	57.8	54.3	54.1	46.9	92.20M	85.05M
XLM-R-nli-stsb	44.0	59.5	42.4	54.7	63.4	59.4	66.0	55.6	192.40M	85.05M
LASER	66.5	64.2	72.0	57.9	69.1	70.8	68.5	67.0	23.56M	17.06M
LaBSE	74.5	73.8	72.0	65.5	77.0	76.9	75.1	73.5	385.28M	85.05M
<i>Knowledge Distillation</i>										
mBERT←SBERT-nli-stsb	77.2	78.9	73.2	79.2	78.8	78.9	77.3	77.6	92.20M	85.05M
DistilmBERT←SBERT-nli-stsb	76.1	77.7	71.8	77.6	77.4	76.5	74.7	76.0	92.20M	46.10M
XLM-R←SBERT-nli-stsb	77.8	78.9	74.0	79.7	78.5	78.9	77.7	77.9	192.40M	85.05M
mBERT←SBERT-paraphrases	80.8	83.6	77.9	83.6	84.6	84.6	84.2	82.7	92.20M	85.05M
DistilmBERT←SBERT-paraphrases	79.7	81.7	76.4	82.3	83.2	84.3	83.0	81.5	92.20M	46.10M
XLM-R←SBERT-paraphrases	82.3	84.0	80.9	83.1	84.9	86.3	84.5	<b>83.7</b>	192.40M	85.05M
MiniLM←SBERT-paraphrases	81.3	82.7	74.8	83.2	80.3	82.4	82.2	<b>80.9</b>	96.21M	21.29M
<i>Ours(Teacher model=SBERT-paraphrases)</i>										
XLM-R( $b = True, bs = 128,  RU  = 3$ )	78.0	79.8	73.9	80.5	82.1	80.3	81.2	79.4	32.49M	21.26M
XLM-R( $b = True, bs = 128,  RU  = 12$ )	79.4	83.6	78.7	83.3	84.2	85.6	84.8	<b>82.8</b>	<b>32.49M</b>	85.05M
XLM-R( $b = False,  RU  = 3$ )	81.1	84.3	79.8	82.6	84.5	84.8	85.4	<b>83.2</b>	192.40M	<b>21.26M</b>
<i>Ours(Teacher model=SBERT-paraphrases)</i>										
MiniLM( $b = True, bs = 128,  RU  = 3$ )	73.0	76.0	63.7	71.4	71.8	72.1	74.7	71.8	32.05M	5.32M
MiniLM( $b = True, bs = 128,  RU  = 12$ )	79.7	81.0	74.1	81.9	80.1	80.8	80.7	<b>79.8</b>	<b>32.05M</b>	21.29M
MiniLM( $b = False,  RU  = 3$ )	82.3	82.8	76.9	82.1	80.5	82.3	82.4	<b>81.3</b>	96.21M	<b>5.32M</b>

Table 2: Spearman rank correlation ( $\rho \times 100$ ) between the cosine similarity of sentence representations and the gold labels for STS 2017-extend **cross-lingual** dataset.  $b$  indicates whether to use Embedding Bottleneck strategy,  $bs$  indicates the hidden size of Bottleneck layer.  $|RU|$  indicates the first  $|RU|$  layers from the basic model are taken as Recurrent Unit, the recurrent times = basic model layers/ $|RU|$ .

are two teacher models, i.e., SBERT-nli-stsb and SBERT-paraphrases, which are released by UKPLab<sup>3</sup>. The former is fine-tuned on the English NLI and STS training sets, and the latter is trained on more than 50 million English paraphrase pairs. The student models include mBERT, XLM-R, DistilmBERT(Sanh et al., 2019) and MiniLM(Wang et al., 2021).

Table 1 and Table 2 show the evaluation results on monolingual and multilingual STS task, respectively. For the XLM-R, our method compresses the embedding size by 83.2% with 0.3% worse monolingual performance and 0.9% worse cross-lingual performance, compresses the encoder size by 75% with slightly higher (0.4%) monolingual performance and 0.5% worse cross-lingual performance. When compressing the embedding layer and the encoder simultaneously, the model size is reduced by 80.6%, its monolingual performance drop by 2% and cross-lingual performance drop by 4%, but it still outperforms the pre-trained models.

For the MiniLM, our method compresses the embedding size by 66.7% with 0.6% worse monolingual performance and 1.1% worse cross-lingual performance, compresses the encoder size by 75% with slightly higher monolingual (0.1%) and cross-lingual (0.4%) performance.

Compared with the knowledge distillation

<sup>3</sup><https://github.com/UKPLab/sentence-transformers>

Model	AR-AR	ES-ES	EN-EN	Avg.
ours	76.7	84.5	86.6	82.6
w/o MCL	76.4	83.9	86.8	82.3
w/o Rec.	67.4	80.1	86.6	78.0
w/o MCL+Rec.	67.9	79.3	86.6	77.9

Table 3: Results of ablation studies on STS-2017 monolingual task

Model	EN-AR	EN-DE	EN-TR	EN-ES	EN-FR	EN-IT	EN-NL	Avg.
ours	78.0	79.8	73.9	80.5	82.1	80.3	81.2	79.4
w/o MCL	75.9	79.7	73.2	79.9	80.4	80.4	80.5	78.5
w/o Rec.	69.1	73.4	66.5	70.2	73.7	73.0	75.9	71.7
w/o MCL+Rec.	67.8	73.6	66.4	68.5	72.8	71.8	75.2	70.9

Table 4: Results of ablation studies on STS2017-extend cross-lingual task

method, XLM-R( $b = True, bs = 128, |RU| = 12$ ) and MiniLM( $b = False, |RU| = 3$ ) surpass the DistilmBERT and MiniLM respectively with a smaller size.

#### 4.4 Ablation study

Multilingual contrastive learning (MCL) task and parameter recurrent(Rec.) are two crucial mechanisms in Multi-stage distillation. We perform ablation studies to investigate the effects of these two mechanisms.

XLM-R( $b=True, bs=128, |RU| = 3$ ) is selected as the basic model. We consider three different settings: 1) training without MLC task. 2) training

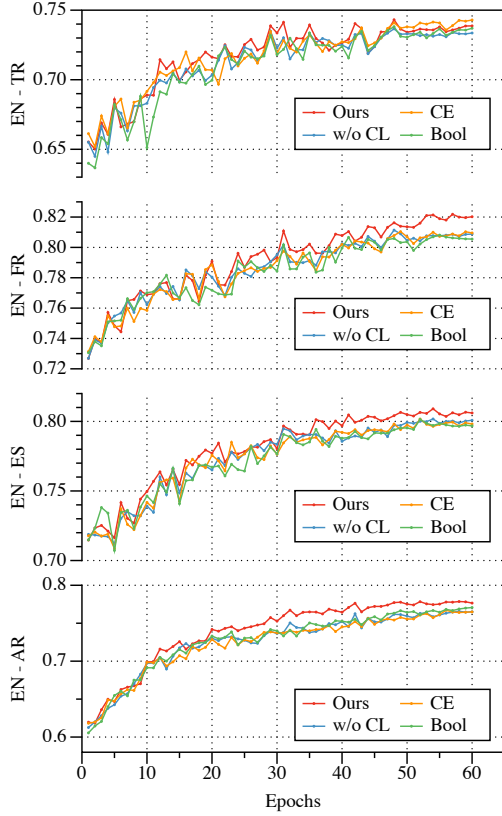


Figure 3: Performance of XLM-R ( $b=True$ ,  $bs=128$ ,  $|RU|=3$ ) after each training epoch on EN-AR, EN-ES, EN-FR, EN-TR tasks with different contrastive learning settings.

without parameter recurrent. 3) training without both. The monolingual results and multilingual results are presented in Table 3.

It can be observed that: 1) without MCL task, the model performs poorer on the cross-lingual tasks. 2) without parameter sharing, the model performs poorer on all datasets. 3) MCL task can significantly improve the cross-lingual performance on EN-AR, EN-ES, EN-FR, EN-NL. It can be concluded that both MCL task and parameter recurrent play a key role in our method.

#### 4.5 Effect of contrastive learning

To investigate the effects of contrastive learning in stage 4, we select XLM-R( $b=True$ ,  $bs=128$ ,  $|RU|=3$ ), modify the original objective in (5) into three different settings, namely, *Bool*, *CE* and *w/o CL*.

In the *Bool* setting, the soft label in (5) is replaced with hard label (0 or 1), as (8),

$$\ell_{Bool} = \frac{1}{N^2} \sum_i \sum_j \left( \delta(h_T^{si}, h_T^{sj}) - \phi(h_S^{si}, h_S^{tj}) \right)^2, \quad (8)$$

Settings	EN-AR	EN-DE	EN-TR	EN-ES	EN-FR	EN-IT	EN-NL	Avg.
Ours	78.0	79.8	73.9	80.5	82.1	80.3	81.2	79.4
Bool	77.0↓	80.5↑	73.5↓	79.8↓	80.3↓	80.7↑	81.2	79.0↓
CE	76.6↓	79.9↑	74.3↑	80.0↓	80.8↓	80.6↑	80.7↓	78.9↓
w/o CL	75.9↓	79.7↓	73.2↓	79.9↓	80.4↓	80.4↑	80.5↓	78.5↓

Table 5: Evaluation results of XLM-R ( $b=True$ ,  $bs=128$ ,  $|RU|=3$ ) on the STS2017-extend cross-lingual task with different contrastive learning settings.

where  $\delta(x, y) = 1$ , if  $x = y$ , otherwise 0.

In the *CE* setting, the objective in (5) is replaced with temperature-scaled cross-entropy, as (9),

$$\ell_{CE} = - \sum_i \sum_j \phi_T \log \frac{e^{\phi_S/\tau}}{\sum_{k=1}^N e^{\phi_S/\tau}}, \quad (9)$$

where  $\phi_T = \cos(h_T^{si}, h_T^{sj})$ ,  $\phi_S = \cos(h_S^{si}, h_S^{tj})$ ,  $\tau = 0.05$  is a hyperparameter called temperature.

In the *w/o CL* setting, the contrastive learning is removed in Stage 4.

Table 5 presents the model performance of cross-lingual semantic similarity task with different settings. It can be observed that all the above training objectives can improve the model performance on the cross-lingual task, compared with the *w/o CL* settings. Model trained with (8) and (9) underperform that trained with (5), especially on EN-AR, EN-ES, EN-FR, EN-NL task.

Meanwhile, we plot the convergence process of different settings in Figure 3. On EN-AR, EN-ES, EN-FR tasks, our original settings outperform other settings. It is worth mentioning that on the EN-TR task, our original settings underperform the *CE* setting according to Table 5. However, the original setting reaches the same level as *CE* setting during the 30 to 40 epoch.

#### 4.6 Effect of bottleneck and recurrent unit

In this section, we study the impact of embedding bottleneck and recurrent unit strategies on multilingual semantic learning. We consider three settings for each strategy, as shown in Table 6 and Table 7.

First, we found that as the bottleneck hidden size  $bs$  increases, the performance of XLM-R and MiniLM on monolingual and cross-lingual tasks both improved. The performance is best when the entire embedding layer is retained, The MiniLM( $b=False$ ) can outperform its original model in Table 1 and Table 2. But the benefit of increasing  $bs$  is not obvious unless the entire embedding layer is retained.

Model	AR-AR	ES-ES	EN-EN	Avg.	Embedding size	Encoder size
<i>Teacher model=SBERT-paraphrases, Student model=XLM-R, <math> RU  = 3</math></i>						
$b = True, bs = 128$	76.7	84.5	86.6	<b>82.6</b>	32.49M	21.26M
$b = True, bs = 256$	76.2	84.9	87.4	<b>82.8</b>	64.59M	21.26M
$b = False$	79.9	86.8	88.4	<b>85.0</b>	192.40M	21.26M
<i>Teacher model=SBERT-paraphrases, Student model=XLM-R, <math>b = True, bs = 128</math></i>						
$ RU  = 3$	76.7	84.5	86.6	<b>82.6</b>	32.49M	21.26M
$ RU  = 6$	78.1	84.8	87.4	<b>83.4</b>	32.49M	42.52M
$ RU  = 12$	79.0	85.5	88.4	<b>84.3</b>	32.49M	85.05M
<i>Teacher model=SBERT-paraphrases, Student model=MiniLM, <math> RU  = 3</math></i>						
$b = True, bs = 128$	72.8	79.3	84.4	<b>78.8</b>	32.05M	5.32M
$b = True, bs = 256$	72.2	81.2	85.2	<b>79.5</b>	64.10M	5.32M
$b = False$	79.9	85.3	85.6	<b>83.6</b>	96.21M	5.32M
<i>Teacher model=SBERT-paraphrases, Student model=MiniLM, <math>b = True, bs = 128</math></i>						
$ RU  = 3$	72.8	79.3	84.4	<b>78.8</b>	32.05M	5.32M
$ RU  = 6$	75.6	83.8	85.1	<b>81.5</b>	32.05M	10.64M
$ RU  = 12$	79.0	84.4	85.2	<b>82.9</b>	32.05M	21.29M

Table 6: The performance of STS2017 **monolingual** task based on XLM-R( $b=True, bs=128, |RU| = 3$ ) and MiniLM( $b=True, bs=128, |RU| = 3$ ), We evaluated the effect of increasing  $bs$  or  $|RU|$ .

Model	EN-AR	EN-DE	EN-TR	EN-ES	EN-FR	EN-IT	EN-NL	Avg.	Embedding size	Encoder size
<i>Teacher model=SBERT-paraphrases, Student model=XLM-R, <math> RU  = 3</math></i>										
$b = True, bs = 128$	78.0	79.8	73.9	80.5	82.1	80.3	81.2	<b>79.4</b>	32.49M	21.26M
$b = True, bs = 256$	79.2	81.8	73.8	82.3	82.7	81.6	82.6	<b>80.6</b>	64.59M	21.26M
$b = False$	81.1	84.3	79.8	82.6	84.5	84.8	85.4	<b>83.2</b>	192.40M	21.26M
<i>Teacher model=SBERT-paraphrases, Student model=XLM-R, <math>b = True, bs = 128</math></i>										
$ RU  = 3$	78.0	79.8	73.9	80.5	82.1	80.3	81.2	<b>79.4</b>	32.49M	21.26M
$ RU  = 6$	78.8	80.0	74.7	82.9	83.5	83.4	84.6	<b>81.1</b>	32.49M	42.52M
$ RU  = 12$	79.4	83.6	78.7	83.3	84.2	85.6	84.8	<b>82.8</b>	32.49M	85.05M
<i>Teacher model=SBERT-paraphrases, Student model=MiniLM, <math> RU  = 3</math></i>										
$b = True, bs = 128$	73.0	76.0	63.7	71.4	71.8	72.1	74.7	<b>71.8</b>	32.05M	5.32M
$b = True, bs = 256$	69.7	77.1	66.2	73.5	73.5	74.3	75.6	<b>72.8</b>	64.10M	5.32M
$b = False$	82.3	82.8	76.9	82.1	80.5	82.3	82.4	<b>81.3</b>	96.21M	5.32M
<i>Teacher model=SBERT-paraphrases, Student model=MiniLM, <math>b = True, bs = 128</math></i>										
$ RU  = 3$	73.0	76.0	63.7	71.4	71.8	72.1	74.7	<b>71.8</b>	32.05M	5.32M
$ RU  = 6$	77.1	78.7	68.2	78.1	75.9	77.0	77.6	<b>76.1</b>	32.05M	10.64M
$ RU  = 12$	79.7	81.0	74.1	81.9	80.1	80.8	80.7	<b>79.8</b>	32.05M	21.29M

Table 7: The performance of STS2017-extend **cross-lingual** task based on XLM-R( $b=True, bs=128, |RU| = 3$ ) and MiniLM( $b=True, bs=128, |RU| = 3$ ), We evaluated the effect of increasing  $bs$  or  $|RU|$ .

Second, by increasing the number of recurrent unit layers  $|RU|$ , XLM-R and MiniLM have been steadily improved on these two tasks. The increase in model size caused by the  $|RU|$  is less than the  $bs$ . For example, the performance of MiniLM on cross-lingual tasks increased by 8%, while its size only increased by 15.9M.

Finally, It can be observed that when using the Bottleneck layer ( $b=True$ ), the model performance will increase steadily as  $|RU|$  increases. The smaller the encoder hidden size, the more significant effect caused by  $|RU|$  increasing ( $\Delta MiniLM > \Delta XLM-R$ ). However, The increase of  $bs$  can not improve performance significantly but make the embedding size larger. Therefore, an effective conclusion can be drawn for compressing the multilingual model, that is, reducing  $bs$  while increasing  $|RU|$ . In this way, we shrink XLM-R by 58%, MiniLM by 55%, with less than 1.1% performance degradation.

## 5 Conclusion

In this work, we realize that the cross-lingual similarity matching task requires a large model size. To obtain a small-size model with cross-lingual matching ability, we propose a multi-stage distillation framework. Knowledge distillation and contrastive learning are combined to achieve the goal of compressing model size with less performance loss.

Our experiments demonstrate promising STS results with three monolingual and six cross-lingual pairs, covering eight languages. The empirical results show that our framework can shrink XLM-R or MiniLM by more than 50%. In contrast, the performance is only reduced by less than 0.6% on monolingual and 1.1% on cross-lingual tasks. If we slack the tolerated loss performance in 4%, the size of XLM-R can be reduced by 80%. In addition, our framework is model-independent and applicable to all transformer-based models.



## References

475  
476  
477  
478  
479

Mikel Artetxe and Holger Schwenk. 2019a. [Massively multilingual sentence embeddings for zero-shot cross-lingual transfer and beyond](#). *Transactions of the Association for Computational Linguistics (ACL)*, 7:597–610.

480  
481  
482  
483  
484

Mikel Artetxe and Holger Schwenk. 2019b. [Massively multilingual sentence embeddings for zero-shot cross-lingual transfer and beyond](#). *Transactions of the Association for Computational Linguistics*, 7:597–610.

485  
486  
487  
488  
489  
490

Akari Asai, Jungo Kasai, Jonathan Clark, Kenton Lee, Eunsol Choi, and Hannaneh Hajishirzi. 2021. [XOR QA: Cross-lingual open-retrieval question answering](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)*, pages 547–564.

491  
492  
493  
494  
495  
496

Daniel Cer, Mona Diab, Eneko Agirre, Iñigo Lopez-Gazpio, and Lucia Specia. 2017. [SemEval-2017 task 1: Semantic textual similarity multilingual and crosslingual focused evaluation](#). In *Proceedings of the 11th International Workshop on Semantic Evaluation (SemEval-2017)*, pages 1–14.

497  
498  
499  
500  
501  
502  
503  
504

Zewen Chi, Li Dong, Furu Wei, Nan Yang, Saksham Singhal, Wenhui Wang, Xia Song, Xian-Ling Mao, Heyan Huang, and Ming Zhou. 2021. [InfoXLM: An information-theoretic framework for cross-lingual language model pre-training](#). In *Proceedings of the 2021 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)*, pages 3576–3588.

505  
506  
507  
508  
509  
510  
511

Muthu Chidambaram, Yinfei Yang, Daniel Cer, Steve Yuan, Yunhsuan Sung, Brian Strope, and Ray Kurzweil. 2019. [Learning cross-lingual sentence representations via a multi-task dual-encoder model](#). In *Proceedings of the 4th Workshop on Representation Learning for NLP (RepL4NLP-2019)*, pages 250–259.

512  
513  
514  
515  
516  
517  
518  
519

Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. 2020. [Unsupervised cross-lingual representation learning at scale](#). In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics (ACL)*, pages 8440–8451.

520  
521  
522

Alexis Conneau and Guillaume Lample. 2019. [Cross-lingual language model pretraining](#). In *Advances in Neural Information Processing Systems (NeurIPS)*.

523  
524  
525  
526  
527  
528  
529

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. [BERT: Pre-training of deep bidirectional transformers for language understanding](#). In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics (NAACL)*, pages 4171–4186.

Fangxiaoyu Feng, Yinfei Yang, Daniel Cer, Naveen Arivazhagan, and Wei Wang. 2020. [Language-agnostic bert sentence embedding](#). *arXiv preprint arXiv:2007.01852*. 530  
531  
532  
533

Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. [SimCSE: Simple contrastive learning of sentence embeddings](#). In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 6894–6910. 534  
535  
536  
537  
538

Momchil Hardalov, Todor Mihaylov, Dimitrina Zlatkova, Yoan Dinkov, Ivan Koychev, and Preslav Nakov. 2020. [EXAMS: A multi-subject high school examinations dataset for cross-lingual and multilingual question answering](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 5427–5444. 539  
540  
541  
542  
543  
544  
545  
546

Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. 2016. [Deep residual learning for image recognition](#). In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 770–778. 547  
548  
549  
550  
551

Geoffrey Hinton, Oriol Vinyals, and Jeffrey Dean. 2015. [Distilling the knowledge in a neural network](#). In *NIPS Deep Learning and Representation Learning Workshop*. 552  
553  
554  
555

Haoyang Huang, Yaobo Liang, Nan Duan, Ming Gong, Linjun Shou, Daxin Jiang, and Ming Zhou. 2019. [Unicoder: A universal language encoder by pre-training with multiple cross-lingual tasks](#). In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 2485–2494. 556  
557  
558  
559  
560  
561  
562  
563

Xiaoqi Jiao, Yichun Yin, Lifeng Shang, Xin Jiang, Xiao Chen, Linlin Li, Fang Wang, and Qun Liu. 2020. [TinyBERT: Distilling BERT for natural language understanding](#). In *Findings of the Association for Computational Linguistics: EMNLP 2020*, pages 4163–4174. 564  
565  
566  
567  
568  
569

Philipp Koehn. 2005. [Europarl: A parallel corpus for statistical machine translation](#). In *Proceedings of Machine Translation Summit X*, pages 79–86, Phuket, Thailand. 570  
571  
572  
573

Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. 2020. [ALBERT: A lite BERT for self-supervised learning of language representations](#). In *Proceedings of International Conference on Learning Representations (ICLR)*. 574  
575  
576  
577  
578  
579

Bohan Li, Hao Zhou, Junxian He, Mingxuan Wang, Yiming Yang, and Lei Li. 2020. [On the sentence embeddings from pre-trained language models](#). In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 9119–9130. 580  
581  
582  
583  
584  
585

586	Yinhan Liu, Myle Ott, Naman Goyal, Jingfei Du, Man-	Victor Sanh, Lysandre Debut, Julien Chaumond, and	643
587	dar Joshi, Danqi Chen, Omer Levy, Mike Lewis,	Thomas Wolf. 2019. <a href="#">Distilbert, a distilled version</a>	644
588	Luke Zettlemoyer, and Veselin Stoyanov. 2019.	of bert: smaller, faster, cheaper and lighter. <i>arXiv</i>	645
589	<a href="#">Roberta: A robustly optimized bert pretraining ap-</a>	<i>preprint arXiv:1910.01108</i> .	646
590	<a href="#">proach. arXiv preprint arXiv:1907.11692</a> .		
591	Ilya Loshchilov and Frank Hutter. 2019. <a href="#">Decoupled</a>	Holger Schwenk, Vishrav Chaudhary, Shuo Sun,	647
592	<a href="#">weight decay regularization</a> . In <i>Proceedings of the</i>	Hongyu Gong, and Francisco Guzmán. 2021. <a href="#">Wiki-</a>	648
593	<i>2019 International Conference on Learning Repre-</i>	<a href="#">Matrix: Mining 135M parallel sentences in 1620</a>	649
594	<i>sentations (ICLR)</i> .	<a href="#">language pairs from Wikipedia</a> . In <i>Proceedings of</i>	650
595	Fuli Luo, Wei Wang, Jiahao Liu, Yijia Liu, Bin	<i>the 16th Conference of the European Chapter of the</i>	651
596	Bi, Songfang Huang, Fei Huang, and Luo Si.	<i>Association for Computational Linguistics (ECACL)</i> ,	652
597	2021. <a href="#">VECO: Variable and flexible cross-lingual</a>	pages 1351–1361.	653
598	<a href="#">pre-training for language understanding and gener-</a>		
599	<a href="#">ation</a> . In <i>Proceedings of the 59th Annual Meeting of</i>	Siqi Sun, Yu Cheng, Zhe Gan, and Jingjing Liu. 2019.	654
600	<i>the Association for Computational Linguistics and</i>	<a href="#">Patient knowledge distillation for BERT model com-</a>	655
601	<i>the 11th International Joint Conference on Natural</i>	<a href="#">pression</a> . In <i>Proceedings of the 2019 Conference on</i>	656
602	<i>Language Processing (ACL-IJCNLP)</i> , pages 3980–	<i>Empirical Methods in Natural Language Processing</i>	657
603	3994.	<i>and the 9th International Joint Conference on Natu-</i>	658
604	Zhuoyuan Mao, Prakhar Gupta, Chenhui Chu, Mar-	<i>ral Language Processing (EMNLP-IJCNLP)</i> , pages	659
605	tin Jaggi, and Sadao Kurohashi. 2021. <a href="#">Lightweight</a>	4323–4332.	660
606	<a href="#">cross-lingual sentence representation learning</a> . In	Zhiqing Sun, Hongkun Yu, Xiaodan Song, Renjie Liu,	661
607	<i>Proceedings of the 59th Annual Meeting of the</i>	Yiming Yang, and Denny Zhou. 2020. <a href="#">MobileBERT:</a>	662
608	<i>Association for Computational Linguistics and the</i>	<a href="#">a compact task-agnostic BERT for resource-limited</a>	663
609	<i>11th International Joint Conference on Natural</i>	<a href="#">devices</a> . In <i>Proceedings of the 58th Annual Meet-</i>	664
610	<i>Language Processing (ACL-IJCNLP)</i> , pages 2902–	<i>ing of the Association for Computational Linguistics</i>	665
611	2913.	<i>(ACL)</i> , pages 2158–2170.	666
612	Seyed Iman Mirzadeh, Mehrdad Farajtabar, Ang	Jörg Tiedemann. 2012. <a href="#">Parallel data, tools and inter-</a>	667
613	Li, Nir Levine, Akihiro Matsukawa, and Hassan	<a href="#">faces in OPUS</a> . In <i>Proceedings of the Eighth In-</i>	668
614	Ghasemzadeh. 2020. <a href="#">Improved knowledge distil-</a>	<i>ternational Conference on Language Resources and</i>	669
615	<a href="#">lation via teacher assistant</a> . In <i>Proceedings of</i>	<i>Evaluation (LREC)</i> , pages 2214–2218.	670
616	<i>the AAAI Conference on Artificial Intelligence</i> ,		
617	volume 34, pages 5191–5198.	Wenhui Wang, Hangbo Bao, Shaohan Huang, Li Dong,	671
618	Xuan Ouyang, Shuohuan Wang, Chao Pang, Yu Sun,	and Furu Wei. 2021. <a href="#">MiniLMv2: Multi-head self-</a>	672
619	Hao Tian, Hua Wu, and Haifeng Wang. 2021.	<a href="#">attention relation distillation for compressing pre-</a>	673
620	<a href="#">ERNIE-M: Enhanced multilingual representation by</a>	<a href="#">trained transformers</a> . In <i>Findings of the Association</i>	674
621	<a href="#">aligning cross-lingual semantics with monolingual</a>	<i>for Computational Linguistics: ACL-IJCNLP 2021</i> ,	675
622	<a href="#">corpora</a> . In <i>Proceedings of the 2021 Conference on</i>	pages 2140–2151.	676
623	<i>Empirical Methods in Natural Language Processing</i>	Thomas Wolf, Julien Chaumond, Lysandre Debut, Vic-	677
624	<i>(EMNLP)</i> , pages 27–38.	tor Sanh, Clement Delangue, Anthony Moi, Pier-	678
625	Colin Raffel, Noam Shazeer, Adam Roberts, Katherine	ric Cistac, Morgan Funtowicz, Joe Davison, Sam	679
626	Lee, Sharan Narang, Michael Matena, Yanqi Zhou,	Shleifer, et al. 2020. <a href="#">Transformers: State-of-the-Art</a>	680
627	Wei Li, and Peter J Liu. 2020. <a href="#">Exploring the limits</a>	<a href="#">natural language processing</a> . In <i>Proceedings of the</i>	681
628	<a href="#">of transfer learning with a unified text-to-text trans-</a>	<i>2020 Conference on Empirical Methods in Natural</i>	682
629	<a href="#">former</a> . In <i>Journal of Machine Learning Research</i> ,	<i>Language Processing (EMNLP)</i> , pages 38–45.	683
630	pages 1–67.	Yinfei Yang, Daniel Cer, Amin Ahmad, Mandy	684
631	Nils Reimers and Iryna Gurevych. 2019. <a href="#">Sentence-</a>	Guo, Jax Law, Noah Constant, Gustavo Hernan-	685
632	<a href="#">BERT: Sentence embeddings using Siamese BERT-</a>	dez Abrego, Steve Yuan, Chris Tar, Yun-hsuan Sung,	686
633	<a href="#">networks</a> . In <i>Proceedings of the 2019 Conference on</i>	Brian Strope, and Ray Kurzweil. 2020. <a href="#">Multilingual</a>	687
634	<i>Empirical Methods in Natural Language Processing</i>	<a href="#">universal sentence encoder for semantic retrieval</a> . In	688
635	<i>and the 9th International Joint Conference on Natu-</i>	<i>Proceedings of the 58th Annual Meeting of the Asso-</i>	689
636	<i>ral Language Processing (EMNLP-IJCNLP)</i> , pages	<i>ciation for Computational Linguistics (ACL)</i> , pages	690
637	3982–3992.	87–94.	691
638	Nils Reimers and Iryna Gurevych. 2020. <a href="#">Making</a>	Yinfei Yang, Gustavo Hernandez Abrego, Steve Yuan,	692
639	<a href="#">monolingual sentence embeddings multilingual us-</a>	Mandy Guo, Qinlan Shen, Daniel Cer, Yun-hsuan	693
640	<a href="#">ing knowledge distillation</a> . In <i>Proceedings of the</i>	Sung, Brian Strope, and Ray Kurzweil. 2019. <a href="#">Im-</a>	694
641	<i>2020 Conference on Empirical Methods in Natural</i>	<a href="#">proving multilingual sentence embedding using bi-</a>	695
642	<i>Language Processing (EMNLP)</i> , pages 4512–4525.	<a href="#">directional dual encoder with additive margin soft-</a>	696
		<a href="#">max</a> . In <i>Proceedings of the Twenty-Eighth Interna-</i>	697
		<i>tional Joint Conference on Artificial Intelligence (IJ-</i>	698
		<i>CAI)</i> , pages 5370–5378.	699