

# DATAGEN: UNIFIED SYNTHETIC DATASET VIA LARGE LANGUAGE MODELS

Anonymous authors

Paper under double-blind review

## ABSTRACT

Large Language Models (LLMs) such as GPT-4 and Llama3 have significantly impacted various fields by enabling high-quality synthetic data generation and reducing dependence on expensive human-generated datasets. Despite this, challenges remain in the areas of generalization, controllability, diversity, and truthfulness within the existing generative frameworks. To address these challenges, this paper presents DATAGEN, a comprehensive LLM-powered framework designed to produce diverse, accurate, and highly controllable datasets. DATAGEN is adaptable, supporting all types of text datasets and enhancing the generative process through innovative mechanisms. To augment data diversity, DATAGEN incorporates an attribute-guided generation module and a group checking feature. For accuracy, it employs a code-based mathematical assessment for label verification alongside a *retrieval-augmented generation* technique for factual validation. The framework also allows for user-specified constraints, enabling customization of the data generation process to suit particular requirements. Extensive experiments demonstrate the superior quality of data generated by DATAGEN, and each module within DATAGEN plays a critical role in this enhancement. Additionally, DATAGEN is applied in two practical scenarios: benchmarking LLMs and data augmentation. The results indicate that DATAGEN effectively supports dynamic and evolving benchmarking and that data augmentation improves LLM capabilities in various domains, including agent-oriented abilities and reasoning skills.

## 1 INTRODUCTION

Large Language Models (LLMs) such as GPT-4 (OpenAI, 2023a), Claude (Anthropic, 2023), and Llama3 (Meta, 2023) have demonstrated excellent performance across various professional domains, including medical (Liu et al., 2023a; Zhang et al., 2024a), educational (Kasneci et al., 2023), software engineering (Qian et al., 2023), and social sciences (Li et al., 2024a;b), as well as in LLM-based agent applications (Huang et al., 2023a; Liu et al., 2023b; Chen et al., 2024a). Given their superior generative capabilities, it is natural for researchers to explore effective methods for utilizing these models in synthetic data generation (Zhu et al., 2024a;b; Wang et al., 2024a). The primary goal is to produce high-quality, cost-effective datasets, thereby reducing the reliance on expensive human labor. Furthermore, data generated by LLMs can be utilized for data augmentation (Yu et al., 2024), dynamic evaluation (Zhu et al., 2024a;b), and model self-alignment (Sun et al., 2023).

Despite the advancements in LLM-driven data generation (Zhu et al., 2024a;b; Wang et al., 2024a; Dekoninck et al., 2024a;b), which have significantly improved the data generation pipeline and reduced the human cost, some challenges remain: **(1) Generalization and Controllability:** Most of existing frameworks directly modify data items in original datasets in specific ways based on fixed principles (Zhu et al., 2024b; Wang et al., 2024a) (e.g., add additional context or shuffle the order of the options), which may constrain the generalization of the generated data as they do not modify the nature of the data items like the scenarios within items. Moreover, many of them are also limited to particular dataset formats or types (Yu et al., 2024; Zhu et al., 2024a), such as multiple-choice or mathematically-oriented datasets (e.g., GSM8K (Cobbe et al., 2021)). Additionally, the lack of provisions for incorporating external constraints, like specific user requirements (e.g., users may specify the length of generated text), restricts their controllability during generation. **(2) Diversity and Truthfulness:** Prior efforts always overlook the need to ensure some quality aspects of the datasets like diversity and truthfulness. For instance, the direct application of LLMs for dataset

Table 1: Comparison of different dataset generation frameworks. The gray checkmark means the work may achieve parts of the goal (not all).

Related Work	General-ization	Control-ability	Diversity	Truthful-ness	w/o Human Intervention	New Knowledge	Dynamic Benchmark	Data Aug.
DyVal (Zhu et al., 2024a)	✗	✗	✗	✓	✓	✗	✓	✓
DyVal 2 (Zhu et al., 2024b)	✓	✗	✗	✗	✓	✗	✓	✓
S3Eval (Lei et al., 2024)	✗	✓	✗	✗	✓	✗	✓	✗
Yu et al. (2024)	✗	✓	✓	✗	✓	✓	✗	✓
Chung et al. (2023)	✗	✗	✓	✓	✗	✗	✗	✗
Fan et al. (2024)	✗	✗	✗	✓	✓	✗	✓	✗
Jandaghi et al. (2023)	✗	✗	✗	✗	✓	✓	✗	✗
Wang et al. (2024a)	✓	✗	✗	✗	✓	✗	✓	✗
MetaMath (Yu et al., 2023)	✗	✗	✓	✗	✓	✗	✗	✓
Qameleon (Agrawal et al., 2023)	✗	✗	✗	✗	✗	✗	✗	✓
Viswanathan et al. (2023)	✗	✗	✓	✗	✓	✓	✗	✓
Chen et al. (2024b)	✗	✗	✓	✓	✓	✓	✗	✓
Gandhi et al. (2024)	✗	✗	✓	✗	✓	✗	✗	✗
<b>DATAGEN (Ours)</b>	✓	✓	✓	✓	✓	✓	✓	✓

generation often leads to replication and low diversity, as LLMs may output the same answers when faced with semantically similar input. Furthermore, the propensity of LLMs to produce hallucinations (Huang et al., 2023b; Sun et al., 2024a) can introduce factual inaccuracies, potentially degrading model performance when such datasets are used for training or fine-tuning.

To address these challenges, this paper puts forward DATAGEN (as shown in Figure 1), a unified and LLM-powered framework designed to generate a dataset. DATAGEN ensures the generalization, diversity, truthfulness, and controllability simultaneously of the generation process, compared to previous studies (as shown in Table 1). DATAGEN accepts all kinds of text datasets and generates high-quality datasets based on various modules. To enrich the diversity of the generated datasets, DATAGEN employs a range of strategies, including various hyperparameter settings, attribute-guided generation, and group checking. To guarantee the truthfulness of the generated datasets, we propose a code-based mathematical assessment to detect and rectify potentially incorrect labels. Additionally, we adopt a Retrieval-Augmented Generation (RAG)-based validation method to check the factuality of generated statements to ensure their truthfulness. DATAGEN integrates constraints input to align with user specifications to enhance user control over the dataset generation process. Furthermore, by employing attribute-guided generation and difficulty enhancement, we enable the generation of data covering a wide range of topics while providing users with controllable difficulty levels.

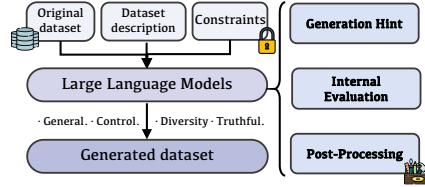


Figure 1: Our proposed DATAGEN for dataset generation via LLMs.

To summarize, the key contributions of this paper are as follows:

- We introduce DATAGEN, a unified framework for generating textual datasets via LLMs, which accepts the original dataset, description, and user constraints, and integrates modules to ensure diversity, truthfulness, and controllability.
- We extensively evaluate DATAGEN across data characterization, module efficacy, human evaluation, error analysis, and cost analysis, confirming its proficiency in dataset generation and highlighting promising future research directions.
- We explore two applications of DATAGEN: benchmarking LLMs and data augmentation. Key insights include: I) Most LLMs struggle with math-oriented datasets generated by DATAGEN (e.g., GSM8K). II) The performance of LLMs varies significantly across datasets generated by different LLMs. III) LLMs’ capabilities across various aspects (e.g., agent-related abilities, reasoning skills) can be improved by fine-tuning based on the generated data. IV) An improvement of data augmentation exists in knowledge-intensive datasets.
- Based on the observations and findings presented, we discuss the limitations of the current framework for dataset generation and proposes potential improvement measures for future studies. These

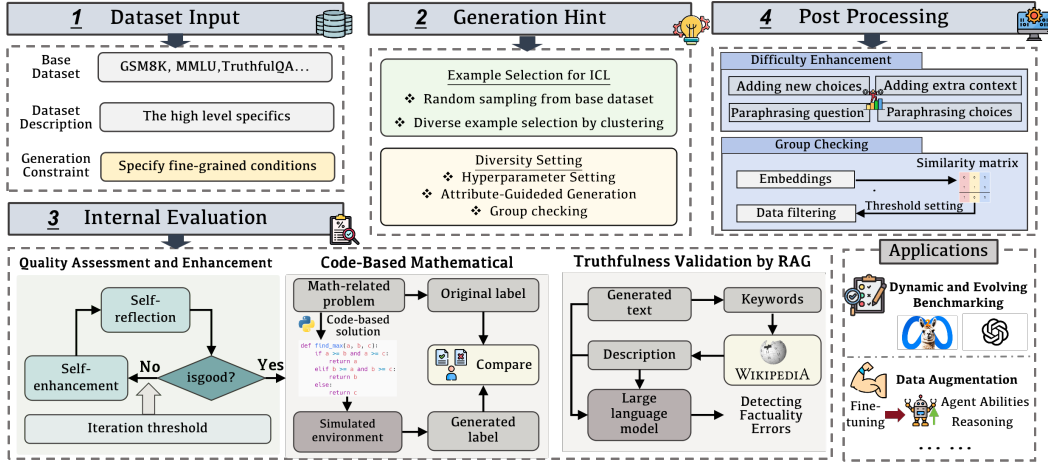


Figure 2: The architecture of DATAGEN.

enhancements are considered from multiple perspectives, including error analysis, downstream applications, and LLM alignment.

## 2 DATAGEN FRAMEWORK

In this section, we will introduce the proposed DATAGEN, a unified framework for dataset generation. DATAGEN consists of four modules (as shown in Figure 2) including framework input, generation hint, internal evaluation, and post-processing. Formally, consider an original dataset  $\mathcal{D}$ , the proposed framework  $\mathcal{F}$ , which operates by iteratively sampling subsets  $\mathcal{S}_i$  from  $\mathcal{D}$  (i.e., example selection for few-shot learning in subsection 2.2). For each subset,  $\mathcal{F}$  applies transformations based on the dataset’s description  $\mathcal{M}(\mathcal{D})$  and a set of constraints  $\mathcal{C}$ . The final generated dataset,  $\mathcal{D}_{\text{gen}}$ , is accumulated over  $N$  iterations:  $\mathcal{D}_{\text{gen}} = \bigcup_{i=1}^N \mathcal{F}(\mathcal{S}_i, \mathcal{M}(\mathcal{D}), \mathcal{C})$ . During generation, the objectives of DATAGEN focus on maximizing the generalization, controllability, diversity, and truthfulness of the generated dataset.

### 2.1 FRAMEWORK INPUT

The input for DATAGEN comprises three components: *base dataset*, *dataset description*, and *generation constraints*: The *base dataset* is provided in a standardized JSON format, which may include text with a label or standalone text (e.g., “text with a label” or “single text”). The *dataset description* articulates the specifics of the base dataset at a high level, furnishing foundational guidance for the LLM to synthesize a dataset analogous to the original. While optional, the *generation constraints* (Zhou et al., 2023) specify fine-grained conditions under which the LLM operates during dataset generation. For instance, constraints might stipulate that “Do not generate text longer than 20 words” or “Include an emoji in each generated sample”, thereby restricting specific conditions of the synthetic dataset.

### 2.2 GENERATION HINT

**Few-Shot Learning.** The base dataset typically comprises hundreds of data items; however, incorporating all these items directly into the prompt may result in an excessively long context that could obscure the comprehension capabilities of LLMs and incur substantial costs (Bai et al., 2023). To mitigate these challenges, few-shot learning techniques are employed for dataset generation (Brown et al., 2020; Wang et al., 2020). Within DATAGEN, two principal methods are utilized to select few-shot learning examples. The first method involves a random sampling from the base dataset, effectively reducing both generation time and associated costs. The second method focuses on enhancing the diversity of examples, thereby guiding LLMs to generate as varied a dataset as possible. Specifically, DATAGEN initially encodes all data items using OpenAI’s text-embedding-ada-002 (OpenAI, a) to create an embedding list. Subsequently, a clustering algorithm (e.g., K-means (Hartigan and Wong, 1979)) is applied to form  $n$  clusters, where  $n$  represents the desired number of examples. One example is randomly selected from each cluster, yielding a set of  $n$  diverse examples.

**Diversity Setting.** To augment the diversity of the generated data, we implement two strategies: (1) *Hyperparameter Setting*. The content generated by LLMs is influenced by various factors, with hyperparameters such as temperature, top-k, and top-p being crucial. To maximize the diversity of the dataset, we manipulate these hyperparameters, particularly the temperature settings. (2) *Attribute-Guided Generation*. Drawing on insights from prior research (Huang et al., 2023a; Yu et al., 2024), we formalize the attribute-guided text generation process for LLMs. Let  $\mathcal{A} = \{a_1, a_2, \dots, a_n\}$  be a set of attributes, such as "economics" and "sports", intended to guide the generation process. We model the generation process as a function where the output text  $y$  is a function of the input prompt  $x$  and a vector of attributes  $\mathbf{a} \in \mathcal{A}$ . The generation process can be expressed as  $y = P(x, \mathbf{a})$ , where  $P$  represents the generation model of the LLM, and  $x$  is the input prompt. To implement this, we employ two distinct strategies: the first involves directly incorporating user-input customized attributes, and the second requires asking LLMs to extract necessary attributes from given data examples (the prompt template is shown in section 13). (3) *Group Checking*. To ensure diversity among the generated items, a similarity matrix is employed to identify and filter out pairs of data items exhibiting high similarity. Further details on this process are provided in subsection 2.4.

### 2.3 INTERNAL EVALUATION

**Overall Quality Assessment and Enhancement.** After obtaining the raw generated data, it's important to enhance their overall quality as during the generation, LLMs may overlook some details so as to mistake like deviating from the dataset description. Inspired by recent studies about self-evaluation and self-alignment (Ji et al., 2023; Ren et al., 2023; Huang et al., 2023c; Jain et al., 2023; Sun et al., 2023; Wang et al., 2023), we leverage LLMs themselves to improve the quality of generated data. The process involves two primary steps: (1) *Self-Reflection*. Each generated data item is initially subjected to a self-reflection phase, wherein LLMs assess the item to determine errors and potential areas for enhancement. The output of self-reflection contains two parts: whether the given data needs to be enhanced and the reason why it needs enhancement. (2) *Self-Enhancement*. When LLMs recognize the necessity for improvements, both the reflective insights and the data item itself are re-input into the LLM to generate an improved version. By establishing a threshold for the number of iterations and repetitively applying these steps, DATAGEN effectively elevates the overall quality of the generated items.

**Code-Based Mathematical Evaluation.** In generating mathematics-related datasets, such as GSM8K (Cobbe et al., 2021), it has been observed that a proportion of generated labels are factually incorrect. To address this issue, we employ a code-based mathematical evaluation method to verify the accuracy of generated labels. As highlighted in the recent study by (Gou et al., 2024; Chen et al., 2023), the use of tools (e.g., a Python function) can substantially improve reasoning performance. Motivated by this finding, we require the LLM to generate Python code to solve the given math-related problem. The code is then executed within a simulative environment to produce a solution. The code-verified answer (i.e., label) is subsequently compared with the original LLM-generated answer. If they conflict, the original LLM-generated answer will be replaced with the code-verified answer.

**Truthfulness Validation by RAG.** Ensuring the truthfulness of generated golden answers is crucial when creating datasets that require factual knowledge. Prior studies have utilized Retrieval-Augmented Generation (RAG) to enhance the factuality and reduce the incidence of hallucinations in LLMs (Aksitov et al., 2023; Li et al., 2024c; 2022; Gao et al., 2024). To combat hallucinations within the generated data, we implement a RAG-based validation process in DATAGEN. Specifically, the LLM first identifies keywords from the generated text. Subsequently, DATAGEN retrieves relevant descriptions based on these keywords from the Wikipedia database, as demonstrated in prior research (Semnani et al., 2023). These descriptions are then used as prompts to guide the LLM in detecting and correcting any discrepancies or errors in the generated content.

### 2.4 POST-PROCESSING

**Difficulty Enhancement.** Given that the dataset is produced by LLMs, the complexity of the generated data is occasionally insufficient to challenge LLMs as their capabilities evolve. To address this, and inspired by prior research (Wang et al., 2024a; Zhu et al., 2024b), we implement several strategies to increase the data's difficulty. These strategies are designed to elevate the challenges faced by LLMs in processing and responding to the data. The applied policies include: (1) *Paraphrasing*

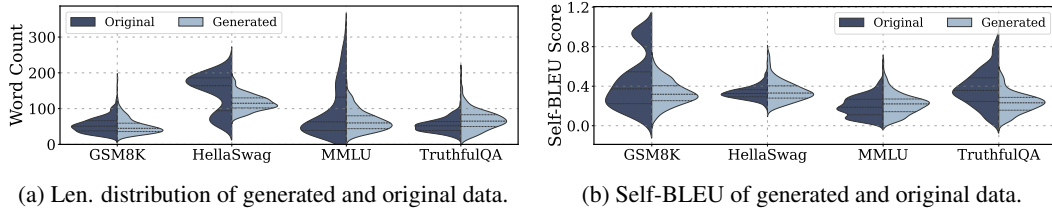


Figure 4: Length and the self-BLEU score of generated data and original data.

*Question:* Reformulate the phrasing to express the same idea with greater sophistication. (2) *Adding Extra Context into Question:* Integrate additional context or details that, while not directly aiding in the question’s resolution, enhance the question’s complexity. (3) *Paraphrasing The Choices:* Each option should be rephrased to reflect the same concept or idea as the original. The essence and meaning must be preserved. If an option cannot be paraphrased without altering its meaning, it should remain unchanged. (4) *Adding A New Choice:* Introduce a plausible but incorrect option to the existing choices to create ambiguity and require deeper understanding.

**Group Checking.** To mitigate the issue of high similarity among generated data items, a group-checking mechanism is implemented to identify and eliminate duplicates. Specifically, we utilize OpenAI’s text-embedding-ada-002 (OpenAI, a) to compute embeddings for all generated items. Let  $\mathcal{X} = \{x_1, x_2, \dots, x_n\}$  be the set of generated data items, and  $e_i$  be the embedding of item  $x_i$  computed via text-embedding-ada-002. We define the similarity matrix  $\mathbf{S}$  where the element  $s_{ij}$  is given by  $s_{ij} = \sqrt{\sum_{k=1}^d (e_{ik} - e_{jk})^2}$ , representing the Euclidean distance between the embeddings of items  $x_i$  and  $x_j$ . Data items exhibiting a similarity exceeding a predefined threshold  $\theta$  are filtered out to ensure diversity within the dataset. Formally, if  $s_{ij} < \theta$  for any pair  $(i, j)$ , at least one of the items  $x_i$  or  $x_j$  is randomly removed from the final dataset.

### 3 EXPERIMENTS AND APPLICATIONS

#### 3.1 EXPERIMENTAL SETUP

Type	GSM8K	MMLU	TruthfulQA	HellaSwag
<b>Generated</b>	0.663	0.744	0.743	0.680
<b>Original</b>	0.681	0.746	0.745	0.742
$\Delta$	2.64%	0.27%	0.27%	8.36%

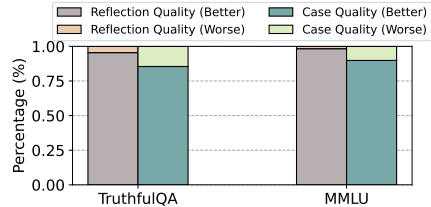
Table 2: Remote-Clique of generated data and original data.  $\Delta$  is the difference between them.

Figure 3: Human evaluation of overall quality assessment and enhancement.

To thoroughly evaluate the effectiveness of DATAGEN, we carefully select four representative benchmark datasets: GSM8K (Cobbe et al., 2021), TruthfulQA (Lin et al., 2022), MMLU (Hendrycks et al., 2021a), and HellaSwag (Zellers et al., 2019). Each dataset uniquely contributes to language model assessment, covering dimensions from mathematical problem-solving and factual accuracy verification to extensive language understanding and commonsense reasoning. We show the details of these four datasets in section 7. For dataset generation, we utilize GPT-4 (OpenAI, 2023a), Claude3-Opus (Anthropic, 2023), and Llama3-70b (Meta, 2023), as these LLMs are among the most robust available, exhibiting exceptional ability to follow instructions. For benchmarking, our study utilizes eight popular models from notable entities in the AI domain (the details are shown in section 7.), reflecting a mix of open-source and proprietary technologies. The number of generated data items and more details are shown in section 9. Note that difficulty enhancement is not applied to the generated data for benchmarking. We will discuss the effectiveness of difficult enhancement in subsection 3.3. All LLMs utilized for generation share the same prompt templates.



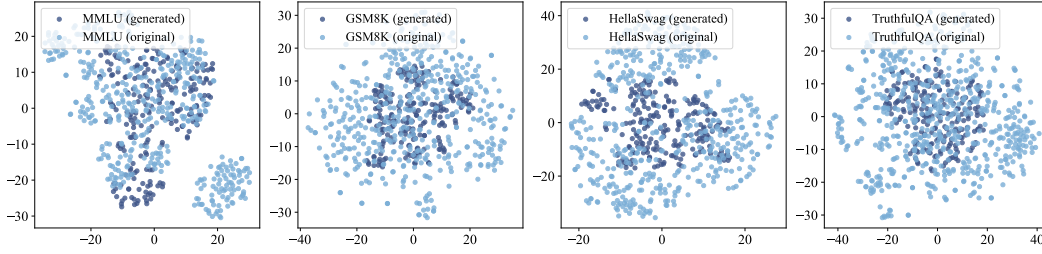


Figure 5: Semantic embedding of different datasets. We use OpenAI’s text-embedding-ada-002 (OpenAI, a) to obtain text embedding.

### 3.2 CHARACTERIZING GENERATED DATA

**Length.** As depicted in Figure 4a, the length distribution of all generated datasets approximates a normal distribution. Notably, except for the HellaSwag dataset (as the length of the original HellaSwag dataset looks like a bimodal distribution), the distributions of other datasets closely resemble those of their original datasets. This similarity indicates that DATAGEN effectively mimics the distribution of the original data, thereby enhancing the reliability of the generated datasets.

**Semantic Embedding.** As illustrated in Figure 5, the distribution of the generated dataset is encompassed within the distribution of the original dataset. This observation indicates that the data items generated are semantically aligned with the original data, confirming their semantic correctness.

**Diversity.** Analogous to the length distribution, the distribution of the self-BLEU score (Zhu et al., 2018) (as depicted in Figure 4b)—a metric employed to assess text diversity—indicates that the diversity of the generated data closely aligns with that of the original dataset. This alignment underscores the exceptional capability of DATAGEN to replicate the diversity inherent in the original dataset, demonstrating its effectiveness in producing varied textual content. Additionally, we utilize the remote-clique metric, as applied in prior research (Cevallos et al., 2018), to measure the diversity of the generated data. The related statistics are presented in Table 2. Observations reveal that the remote-clique scores of the original and generated data are closely matched, with less than 10% variance, affirming that our generated data maintains a high level of diversity comparable to the original dataset.

**Knowledge Richness Introduced.** In contrast to prior research (Zhu et al., 2024a;b; Wang et al., 2024a), DATAGEN innovates by generating entirely new data items, rather than merely modifying existing answers. This approach introduces novel scenarios and knowledge. We assess the knowledge richness of the data generated by DATAGEN and compared it to the previous study (i.e., Dyval2 (Zhu et al., 2024b)) by calculating the entity overlap rate—how many entities appear both in the generated and original data. A lower overlap rate indicates that the framework is introducing more new knowledge. According to our findings, presented in Table 3, DATAGEN demonstrates an average overlap rate of only 3.83%, significantly lower than that of Dyval2 (Zhu et al., 2024b). This substantial reduction in overlap rate signifies that our framework excels at incorporating new knowledge into the generated datasets.

**Influence of temperature.** We examine the impact of temperature settings on the diversity of data generated by GPT-4. For this purpose, we select a few items from the TruthfulQA dataset to use as examples in few-shot learning. We conduct experiments using temperature settings of 0 and 1. Our findings indicate that the Remote-Clique score (Cevallos et al., 2018) at a temperature of 0 is 0.683, whereas, at a temperature of 1, it increases to 0.721. This suggests that adjusting the temperature setting can significantly enhance the diversity of the generated data.

### 3.3 EFFECTIVENESS OF MODULES IN DATAGEN

In this section, we validate the effectiveness of modules in DATAGEN. To simplify the analysis, our evaluation is based on the GPT-4 generated data: **(1) Diversity Setting.** As demonstrated in Table 4, the DATAGEN modules significantly enhance the diversity of the generated data. Specifically, the remote-clique score of the initially generated data stands at 0.695. However, the introduction of

Table 3: The knowledge richness comparison between different principles in DyVal 2 (Zhu et al., 2024b) and DATAGEN. The principle 1, 2, 3, and 4 are paraphrasing questions, paraphrasing choices, adding extra context to questions, and adding a new choice.

Baseline	HellaSwag	MMLU	TruthfulQA	Avg.
DyVal2-prin.1	24.30%	61.30%	51.40%	45.67%
DyVal2-prin.2	40.50%	65.70%	46.20%	50.80%
DyVal2-prin.3	27.00%	62.70%	57.30%	49.00%
DyVal2-prin.4	51.40%	71.00%	47.60%	56.67%
DATAGEN	5.40%	3.30%	2.80%	3.83%

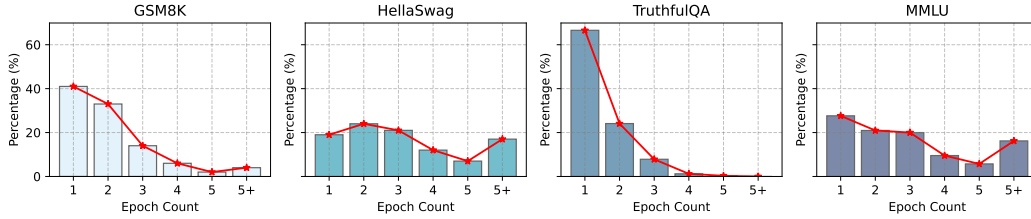


Figure 6: The percentage of different epoch counts in four datasets.

attribute-guided generation elevates the remote-clique score to 0.735. Furthermore, the implementation of group checking further increases this score to 0.743. **(2) Overall Quality Assessment and Enhancement.** To evaluate the effectiveness of our quality assessment and enhancement module, we conducted human evaluations focusing on two key aspects: (I) Comparing the quality between original and enhanced data items; (II) Assessing the reasonableness of the reflections. As illustrated in Figure 3, the results indicate that almost all reflections were deemed reasonable by the evaluators. Furthermore, over 80% of the enhanced data items were rated as superior in both datasets. These findings underscore the effectiveness of our module. **(3) Difficulty Enhancement.** As demonstrated in Table 6, it is observable that the performance of most of the LLMs declined when compared to their performance on the baseline-generated datasets after the application of difficulty enhancement. This result underscores the effectiveness of difficulty enhancement, which suggests its potential utility in preventing data contamination (Dong et al., 2024; Golchin and Surdeanu, 2024; Xu et al., 2024). Such techniques may thus contribute significantly to improving the robustness of LLMs against overfitting to training datasets. **(4) Code-Based Mathematical Evaluation.** As depicted in Table 4, our code-based evaluation methodology has significantly enhanced the correctness of the generated data, improving from an initial accuracy of 44% to 92%. **(5) Truthfulness Validation by RAG.** As detailed in Table 4, the RAG-based validation corrected 4.2% of the examples, demonstrating its effectiveness. This percentage also highlights the high quality of the dataset generated by GPT-4, which contains only a few errors. The correctness of (4) and (5) are also manually evaluated, which of the details can be found in section 8.

In section 10, we investigate the impact of temperature settings on data diversity and evaluate the adherence of LLMs in DATAGEN to user constraints. Our findings reveal that adjusting the temperature setting enhances the diversity of generated data. Furthermore, LLMs within DATAGEN effectively follow user-imposed constraints in both individual and combined scenarios. We also provide a cost analysis of DATAGEN in section 10, demonstrating that DATAGEN generates datasets at a significantly low cost.

Table 4: Effectiveness of each module in DATAGEN.

Diversity Enhancement			Code-based.		RAG Validation
Raw	+Attribute Guided	+Group Checking	Raw	+Validation	Corrected Percentage
0.695	0.735 (5.8% ↑)	0.743 (6.9% ↑)	44%	88%	4.2%

Error Type	GSM8K	HellaSwag	MMLU	TruthfulQA
<b>Factuality Error</b>	41%	14%	69%	79%
<b>Format Error</b>	20%	29%	8%	0%
<b>Multiple Answers</b>	0%	43%	0%	0%
<b>Question Error</b>	39%	14%	23%	21%

Table 5: Proportion of different errors. Multiple answers mean the question is considered to have multiple correct answers after human evaluation. Question errors mean the question has quality flaws like unclear statements.

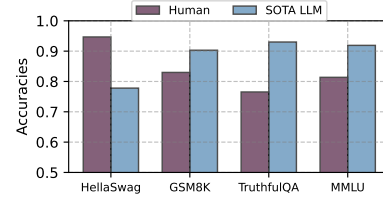


Figure 7: Performance of human and the best LLM (SOTA LLM) on four generated datasets.

### 3.4 HUMAN PERFORMANCE ON GENERATED DATASET

As depicted in Figure 7, the performance comparison between humans and LLMs reveals distinct outcomes across various datasets. In the HellaSwag dataset, human performance slightly surpasses that of LLMs. However, in the other three datasets, LLMs demonstrate superior performance. Notably, in the GSM8K dataset, the accuracy of human responses is lower than that of the best-performing LLM. For the TruthfulQA and MMLU datasets, which require extensive knowledge, humans perform significantly worse than LLMs, which benefit from training on large, diverse corpora. More details about evaluating human performance are shown in section 8.

### 3.5 ERROR ANALYSIS

To examine the errors present in the generated dataset, we conducted a human evaluation for error analysis. We observe significant factuality errors in datasets such as GSM8K, TruthfulQA, and MMLU, primarily because these datasets contain responses that are fact-based (e.g., arithmetic question answers). This observation underscores the necessity for enhancements in the accuracy of provided answers. Despite the robust instruction-following capabilities of GPT-4, it occasionally struggles with data formatting issues. Such errors could be mitigated through clearer prompts or by employing an integrated framework like LangChain<sup>1</sup>. Additionally, our analysis of the HellaSwag dataset revealed the presence of multiple viable answers for certain prompts, highlighting the need for a more comprehensive answer validation mechanism. We discuss the potential improvement by mitigating these errors in section 5.

### 3.6 COST ABLATION ANALYSIS

We conduct a cost analysis of DATAGEN. Specifically, we calculate the total token usage and the corresponding cost for generating data across four datasets: MMLU, HellaSwag, TruthfulQA, and GSM8K. The details are presented in Figure 8.

For a generated item without RAG-based validation and code-based evaluation, the cost is at most \$0.038 using the GPT-4-Turbo API. When incorporating RAG-based validation, the average cost per generated item increases to \$0.190, due to the large volume of tokens processed from the retrieved content. Adding code-based evaluation raises the cost to \$0.040. Overall, the total cost for generating each item, including all validation and evaluation processes, will not exceed \$0.200. This cost, although significant, is substantially lower than the cost of human labor.

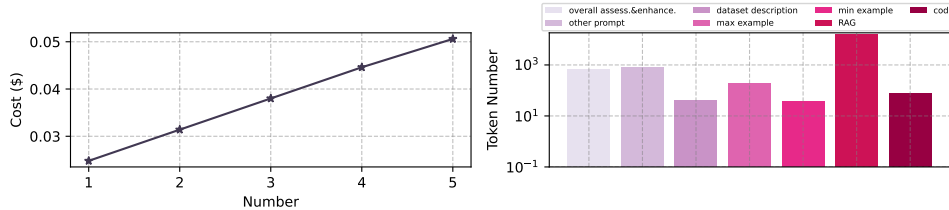


Figure 8: Cost (dollar) on different epoch numbers of overall quality assessment and enhancement (Left), and the token number cost of each part in DATAGEN.

<sup>1</sup><https://github.com/langchain-ai/langchain>



Table 6: LLMs’ performance on baseline generated (*i.e.*, *gen.*) dataset, challenge or difficulty enhanced dataset (*i.e.*, *cha.*), and their differences (*i.e.*, *diff.*).

Model	GSM8K			MMLU			HellaSwag			TruthfulQA		
	<i>gen.</i>	<i>cha.</i>	<i>diff.</i>	<i>gen.</i>	<i>cha.</i>	<i>diff.</i>	<i>gen.</i>	<i>cha.</i>	<i>diff.</i>	<i>gen.</i>	<i>cha.</i>	<i>diff.</i>
ChatGPT	0.665	0.585	0.080	0.798	0.633	0.165	0.960	0.924	0.036	0.816	0.718	0.098
Claude-3	0.778	0.670	0.108	0.903	0.725	0.178	0.935	0.880	0.055	0.919	0.810	0.109
Llama3-70b	0.689	0.637	0.052	0.857	0.703	0.154	0.949	0.884	0.065	0.914	0.743	0.171
Llama3-8b	0.613	0.557	0.056	0.741	0.576	0.165	0.793	0.699	0.094	0.795	0.676	0.119
Mistral-7b	0.377	0.321	0.056	0.709	0.437	0.272	0.696	0.467	0.229	0.738	0.452	0.286
Mixtral-8x7b	0.509	0.439	0.070	0.851	0.616	0.235	0.511	0.373	0.138	0.824	0.648	0.176
Yi-34b	0.637	0.509	0.128	0.815	0.633	0.182	0.572	0.522	0.050	0.857	0.657	0.200

Table 7: The main results on generated datasets (*i.e.*, *gen.*) and original datasets (*i.e.*, *ori.*).

Dataset	GSM8K		MMLU		TruthfulQA		HellaSwag	
	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>
<i>GPT-4 Generation</i>								
ChatGPT	0.762	0.665	0.609	0.798	0.825	0.837	0.611	0.960
Claude-3	0.953	0.778	0.810	0.903	0.855	0.919	0.888	0.935
Llama3-70b	0.890	0.689	0.755	0.857	0.750	0.914	0.836	0.949
Llama3-8b	0.800	0.613	0.565	0.741	0.450	0.795	0.684	0.793
Mistral-7b	0.313	0.377	0.490	0.709	0.382	0.738	0.600	0.696
Mixtral-8x7b	0.610	0.509	0.720	0.851	0.640	0.824	0.712	0.511
Yi-34b	0.687	0.637	0.645	0.815	0.485	0.857	0.740	0.572
<i>Claude-3-Opus Generation</i>								
ChatGPT	0.762	0.405	0.609	0.802	0.432	0.744	0.538	0.712
GPT-4	0.947	0.508	0.725	0.848	0.841	0.888	0.736	0.835
Llama3-70b	0.890	0.444	0.755	0.846	0.750	0.854	0.836	0.769
Llama3-8b	0.800	0.367	0.565	0.780	0.450	0.709	0.568	0.704
Mistral-7b	0.313	0.158	0.490	0.709	0.380	0.621	0.580	0.690
Mixtral-8x7b	0.610	0.291	0.720	0.717	0.640	0.680	0.600	0.565
Yi-34b	0.687	0.323	0.645	0.751	0.480	0.694	0.644	0.584

### 3.7 APPLICATION-I: BENCHMARKING LLMs

We present the benchmarking results based on GPT-4 and Claude3 generated data for seven popular LLMs in Table 7 (the benchmarking results based on Llama3-70b’s generation are shown in section 10). The analysis yields several key observations:

- **Performance decline on generated GSM8K dataset:** Almost all LLMs exhibit a performance drop on the generated GSM8K dataset compared to the original. This suggests that the reasoning capabilities of many LLMs may be overstated, aligning with recent findings (Zhang et al., 2024b; Mirzadeh et al., 2024; Zhang et al., 2024b), which indicate overfitting on the GSM8K dataset by some LLMs.
- **Superior performance on knowledge-required datasets:** For datasets requiring extensive knowledge, such as MMLU and TruthfulQA, LLMs achieve higher accuracy on the generated versions. This indicates that the knowledge necessary to address these queries is within the LLMs’ capabilities, suggesting that the generated datasets are relatively less challenging. Further enhancements to increase difficulty are detailed in Table 6.
- **Challenging nature of Claude3-generated dataset:** LLMs generally perform worse on datasets generated by Claude3 compared to those by GPT-4. This may imply that some LLMs might have been trained or augmented with GPT-4 generated data (*e.g.*, Phi-3 (Abdin et al., 2024)), highlighting the unique challenge of Claude3-generated content.

### 3.8 APPLICATION-II: DATA AUGMENTATION

Using data augmentation with LLMs has been widely explored in previous studies (Dai et al., 2023; Whitehouse et al., 2023; Møller et al., 2024). In this section, we implement our DATAGEN to augment data in ten popular datasets (the details of datasets are shown in section 7). We include the experiment setting in section 9. From Figure 9, we can observe that:

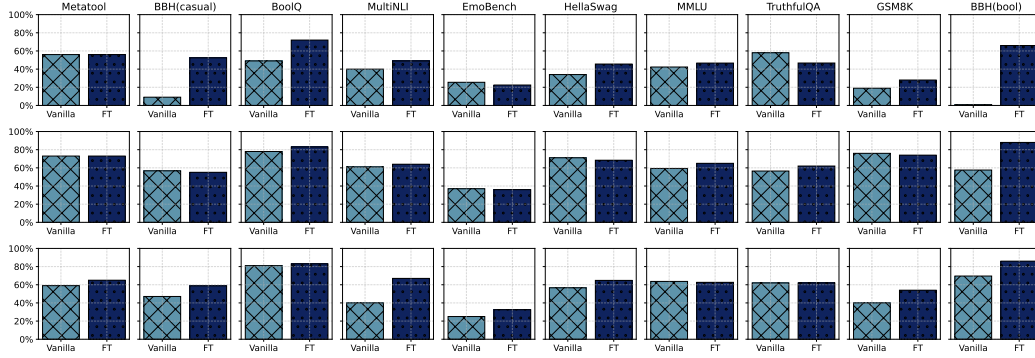


Figure 9: Results of data augmentation on Llama2-7b, Llama3-8b and Mistral-7b.

Table 8: Model performance scores in MTBench.

Model	First Turn Score	Second Turn Score	Average Score
llama3-7b-base	2.325	1.744	2.038
llama3-7b-alpaca-original	6.049	4.450	5.259
<b>llama3-7b-alpaca-genset</b>	<b>6.981</b>	<b>5.825</b>	<b>6.403</b>

- **The data augmentation powered by DATAGEN is effective.** Performance across all ten datasets improved when trained with the DATAGEN-generated dataset, highlighting the efficacy of our generated data and indicating broader potential applications for DATAGEN across extensive datasets.
- **DATAGEN enhances LLMs from various capability aspects.** The enhancements in various aspects of LLM capabilities due to the generated data are notable. For example, performance improvements in the Metatool dataset (Huang et al., 2023a) (*i.e.*, tool selection ability) indicate that DATAGEN can enhance agent-oriented capabilities of LLMs. Additionally, enhancements in reasoning abilities are evident in datasets such as GSM8K (Cobbe et al., 2021) and both the BBH (bool/casual) (Suzgun et al., 2022).
- **Improvement on knowledge-intensive datasets still leaves much to be desired.** The gains in datasets requiring extensive knowledge (*e.g.*, TruthfulQA (Lin et al., 2022)) are comparatively modest. This limited improvement may be due to LLMs acquiring most of their knowledge during pretraining, and the additional 200 training samples may not significantly impact performance on related tasks. Notably, the Llama2-7b model shows a performance decline on TruthfulQA after fine-tuning, possibly due to hallucinations introduced when new knowledge is acquired during fine-tuning rather than pretraining (Gekhman et al., 2024). We discuss the potential measurement for enhancing in section 5.

Moreover, we extend our analysis to include general instruction tuning data. Specifically, we utilize the alpaca dataset Taori et al. (2023) for additional fine-tuning on the Llama3-base model and evaluated the outcomes using the MT-Bench Zheng et al. (2023). The “genset” model, fine-tuned on 1,000 data points generated by DATAGEN, consistently outperforms the “original” model, which is fine-tuned on an equivalent sample of 1,000 existing data points from the alpaca dataset. This comparison demonstrates that our framework effectively generates high-quality, diverse instruction-tuning data, demonstrating its practical utility in enhancing model performance.

## 4 CONCLUSION

In this paper, we have proposed DATAGEN, a unified dataset generation framework powered by LLMs, which addresses key challenges in diversity, accuracy, and controllability. Its innovative modules and features, ensure high-quality, customizable datasets. The extensive experiments demonstrated the effectiveness of DATAGEN. Moreover, DATAGEN can be applied in dynamic and evolving benchmarking as well as data augmentation. We believe that the insightful findings revealed in this study will serve as a foundation for future research on data generation.

## REFERENCES

- OpenAI. Chatgpt, 2023a. <https://openai.com/product/chatgpt>.
- Anthropic. Claude, 2023. <https://www.anthropic.com/claude>.
- Meta. Llama 3, 2023. <https://llama.meta.com/llama3>.
- Zhengliang Liu, Yue Huang, Xiaowei Yu, Lu Zhang, Zihao Wu, Chao Cao, Haixing Dai, Lin Zhao, Yiwei Li, Peng Shu, et al. Deid-gpt: Zero-shot medical text de-identification by gpt-4. *arXiv preprint arXiv:2303.11032*, 2023a.
- Kai Zhang, Jun Yu, Eashan Adhikarla, Rong Zhou, Zhiling Yan, Yixin Liu, Zhengliang Liu, Lifang He, Brian Davison, Xiang Li, Hui Ren, Sunyang Fu, James Zou, Wei Liu, Jing Huang, Chen Chen, Yuyin Zhou, Tianming Liu, Xun Chen, Yong Chen, Quanzheng Li, Hongfang Liu, and Lichao Sun. Biomedgpt: A unified and generalist biomedical generative pre-trained transformer for vision, language, and multimodal tasks, 2024a.
- Enkelejda Kasneci, Kathrin Seßler, Stefan Küchemann, Maria Bannert, Daryna Dementieva, Frank Fischer, Urs Gasser, Georg Groh, Stephan Günemann, Eyke Hüllermeier, et al. Chatgpt for good? on opportunities and challenges of large language models for education. *Learning and individual differences*, 103:102274, 2023.
- Chen Qian, Xin Cong, Cheng Yang, Weize Chen, Yusheng Su, Juyuan Xu, Zhiyuan Liu, and Maosong Sun. Communicative agents for software development. *arXiv preprint arXiv:2307.07924*, 2023.
- Yuan Li, Yue Huang, Yuli Lin, Siyuan Wu, Yao Wan, and Lichao Sun. I think, therefore i am: Awareness in large language models. *arXiv preprint arXiv:2401.17882*, 2024a.
- Yuan Li, Yue Huang, Hongyi Wang, Xiangliang Zhang, James Zou, and Lichao Sun. Quantifying ai psychology: A psychometrics benchmark for large language models. *arXiv preprint arXiv:2406.17675*, 2024b.
- Yue Huang, Jiawen Shi, Yuan Li, Chenrui Fan, Siyuan Wu, Qihui Zhang, Yixin Liu, Pan Zhou, Yao Wan, Neil Zhenqiang Gong, et al. Metatool benchmark for large language models: Deciding whether to use tools and which to use. *arXiv preprint arXiv:2310.03128*, 2023a.
- Xiao Liu, Hao Yu, Hanchen Zhang, Yifan Xu, Xuanyu Lei, Hanyu Lai, Yu Gu, Hangliang Ding, Kaiwen Men, Kejuan Yang, Shudan Zhang, Xiang Deng, Aohan Zeng, Zhengxiao Du, Chenhui Zhang, Sheng Shen, Tianjun Zhang, Yu Su, Huan Sun, Minlie Huang, Yuxiao Dong, and Jie Tang. Agentbench: Evaluating llms as agents, 2023b.
- Dongping Chen, Yue Huang, Siyuan Wu, Jingyu Tang, Liuyi Chen, Yilin Bai, Zhigang He, Chenlong Wang, Huichi Zhou, Yiqiang Li, et al. Gui-world: A dataset for gui-oriented multimodal llm-based agents. *arXiv preprint arXiv:2406.10819*, 2024a.
- Kaijie Zhu, Jiaao Chen, Jindong Wang, Neil Zhenqiang Gong, Diyi Yang, and Xing Xie. Dyval: Dynamic evaluation of large language models for reasoning tasks, 2024a.
- Kaijie Zhu, Jindong Wang, Qinlin Zhao, Ruochen Xu, and Xing Xie. Dyval 2: Dynamic evaluation of large language models by meta probing agents, 2024b.
- Siyuan Wang, Zhuohan Long, Zhihao Fan, Zhongyu Wei, and Xuanjing Huang. Benchmark self-evolving: A multi-agent framework for dynamic llm evaluation. *arXiv preprint arXiv:2402.11443*, 2024a.
- Yue Yu, Yuchen Zhuang, Jieyu Zhang, Yu Meng, Alexander J Ratner, Ranjay Krishna, Jiaming Shen, and Chao Zhang. Large language model as attributed training data generator: A tale of diversity and bias. *Advances in Neural Information Processing Systems*, 36, 2024.
- Zhiqing Sun, Yikang Shen, Qinhong Zhou, Hongxin Zhang, Zhenfang Chen, David Daniel Cox, Yiming Yang, and Chuang Gan. Principle-driven self-alignment of language models from scratch with minimal human supervision. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL <https://openreview.net/forum?id=p40XRfBX96>.

- Jasper Dekoninck, Marc Fischer, Luca Beurer-Kellner, and Martin Vechev. Understanding large language models through the lens of dataset generation, 2024a. URL <https://openreview.net/forum?id=miGpIhquyB>.
- Jasper Dekoninck, Marc Fischer, Luca Beurer-Kellner, and Martin Vechev. Controlled text generation via language model arithmetic. In *The Twelfth International Conference on Learning Representations*, 2024b. URL <https://openreview.net/forum?id=SLw9fp4yI6>.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, Christopher Hesse, and John Schulman. Training verifiers to solve math word problems. *arXiv preprint arXiv:2110.14168*, 2021.
- Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, and Ting Liu. A survey on hallucination in large language models: Principles, taxonomy, challenges, and open questions, 2023b.
- Lichao Sun, Yue Huang, Haoran Wang, Siyuan Wu, Qihui Zhang, Yuan Li, Chujie Gao, Yixin Huang, Wenhan Lyu, Yixuan Zhang, Xiner Li, Zhengliang Liu, Yixin Liu, Yijue Wang, Zhikun Zhang, Bertie Vidgen, Bhavya Kailkhura, Caiming Xiong, Chaowei Xiao, Chunyuan Li, Eric Xing, Furong Huang, Hao Liu, Heng Ji, Hongyi Wang, Huan Zhang, Huaxiu Yao, Manolis Kellis, Marinka Zitnik, Meng Jiang, Mohit Bansal, James Zou, Jian Pei, Jian Liu, Jianfeng Gao, Jiawei Han, Jieyu Zhao, Jiliang Tang, Jindong Wang, Joaquin Vanschoren, John Mitchell, Kai Shu, Kaidi Xu, Kai-Wei Chang, Lifang He, Lifu Huang, Michael Backes, Neil Zhenqiang Gong, Philip S. Yu, Pin-Yu Chen, Quanquan Gu, Ran Xu, Rex Ying, Shuiwang Ji, Suman Jana, Tianlong Chen, Tianming Liu, Tianyi Zhou, William Wang, Xiang Li, Xiangliang Zhang, Xiao Wang, Xing Xie, Xun Chen, Xuyu Wang, Yan Liu, Yanfang Ye, Yinzhi Cao, Yong Chen, and Yue Zhao. Trustllm: Trustworthiness in large language models, 2024a.
- Fangyu Lei, Qian Liu, Yiming Huang, Shizhu He, Jun Zhao, and Kang Liu. S3eval: A synthetic, scalable, systematic evaluation suite for large language models, 2024.
- John Joon Young Chung, Ece Kamar, and Saleema Amershi. Increasing diversity while maintaining accuracy: Text data generation with large language models and human interventions. *arXiv preprint arXiv:2306.04140*, 2023.
- Lizhou Fan, Wenyue Hua, Lingyao Li, Haoyang Ling, and Yongfeng Zhang. Nphardeval: Dynamic benchmark on reasoning ability of large language models via complexity classes, 2024.
- Pegah Jandaghi, XiangHai Sheng, Xinyi Bai, Jay Pujara, and Hakim Sidahmed. Faithful persona-based conversational dataset generation with large language models, 2023.
- Longhui Yu, Weisen Jiang, Han Shi, Jincheng Yu, Zhengying Liu, Yu Zhang, James T Kwok, Zhenguo Li, Adrian Weller, and Weiyang Liu. Metamath: Bootstrap your own mathematical questions for large language models. *arXiv preprint arXiv:2309.12284*, 2023.
- Priyanka Agrawal, Chris Alberti, Fantine Huot, Joshua Maynez, Ji Ma, Sebastian Ruder, Kuzman Ganchev, Dipanjan Das, and Mirella Lapata. Qameleon: Multilingual qa with only 5 examples. *Transactions of the Association for Computational Linguistics*, 11:1754–1771, 2023.
- Vijay Viswanathan, Chenyang Zhao, Amanda Bertsch, Tongshuang Wu, and Graham Neubig. Prompt2model: Generating deployable models from natural language instructions. *arXiv preprint arXiv:2308.12261*, 2023.
- Mingda Chen, Xilun Chen, and Wen-tau Yih. Few-shot data synthesis for open domain multi-hop question answering. In Yvette Graham and Matthew Purver, editors, *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 190–208, St. Julian’s, Malta, March 2024b. Association for Computational Linguistics. URL <https://aclanthology.org/2024.eacl-long.12>.
- Saumya Gandhi, Ritu Gala, Vijay Viswanathan, Tongshuang Wu, and Graham Neubig. Better synthetic data by retrieving and transforming existing datasets. In Lun-Wei Ku, Andre

- Martins, and Vivek Srikumar, editors, *Findings of the Association for Computational Linguistics ACL 2024*, pages 6453–6466, Bangkok, Thailand and virtual meeting, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.findings-acl.385. URL <https://aclanthology.org/2024.findings-acl.385>.
- Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny Zhou, and Le Hou. Instruction-following evaluation for large language models, 2023.
- Yushi Bai, Xin Lv, Jiajie Zhang, Hongchang Lyu, Jiankai Tang, Zhidian Huang, Zhengxiao Du, Xiao Liu, Aohan Zeng, Lei Hou, Yuxiao Dong, Jie Tang, and Juanzi Li. Longbench: A bilingual, multitask benchmark for long context understanding, 2023.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners, 2020.
- Yaqing Wang, Quanming Yao, James Kwok, and Lionel M. Ni. Generalizing from a few examples: A survey on few-shot learning, 2020.
- OpenAI. text-embedding-ada-002, a. <https://platform.openai.com/docs/guides/embeddings>.
- John A Hartigan and Manchek A Wong. Algorithm as 136: A k-means clustering algorithm. *Journal of the royal statistical society. series c (applied statistics)*, 28(1):100–108, 1979.
- Ziwei Ji, Tiezheng Yu, Yan Xu, Nayeon Lee, Etsuko Ishii, and Pascale Fung. Towards mitigating llm hallucination via self reflection. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 1827–1843, 2023.
- Jie Ren, Yao Zhao, Tu Vu, Peter J. Liu, and Balaji Lakshminarayanan. Self-evaluation improves selective generation in large language models, 2023.
- Jiaxin Huang, Shixiang Shane Gu, Le Hou, Yuexin Wu, Xuezhi Wang, Hongkun Yu, and Jiawei Han. Large language models can self-improve, 2023c. URL <https://openreview.net/forum?id=NiEtU7blzN>.
- Neel Jain, Khalid Saifullah, Yuxin Wen, John Kirchenbauer, Manli Shu, Aniruddha Saha, Micah Goldblum, Jonas Geiping, and Tom Goldstein. Bring your own data! self-supervised evaluation for large language models, 2023.
- Yizhong Wang, Yeganeh Kordi, Swaroop Mishra, Alisa Liu, Noah A. Smith, Daniel Khashabi, and Hannaneh Hajishirzi. Self-instruct: Aligning language models with self-generated instructions. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki, editors, *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pages 13484–13508, Toronto, Canada, July 2023. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.754. URL <https://aclanthology.org/2023.acl-long.754>.
- Zhibin Gou, Zhihong Shao, Yeyun Gong, yelong shen, Yujiu Yang, Minlie Huang, Nan Duan, and Weizhu Chen. ToRA: A tool-integrated reasoning agent for mathematical problem solving. In *The Twelfth International Conference on Learning Representations*, 2024. URL <https://openreview.net/forum?id=Ep0TtjVoap>.
- Baian Chen, Chang Shu, Ehsan Shareghi, Nigel Collier, Karthik Narasimhan, and Shunyu Yao. Fireact: Toward language agent fine-tuning, 2023.
- Renat Aksitov, Sobhan Miryoosefi, Zonglin Li, Daliang Li, Sheila Babayan, Kavaya Kopparapu, Zachary Fisher, Ruiqi Guo, Sushant Prakash, Pranesh Srinivasan, Manzil Zaheer, Felix Yu, and Sanjiv Kumar. Rest meets react: Self-improvement for multi-step reasoning llm agent, 2023.
- Jiarui Li, Ye Yuan, and Zehua Zhang. Enhancing llm factual accuracy with rag to counter hallucinations: A case study on domain-specific queries in private knowledge-bases, 2024c.



- Zonglin Li, Ruiqi Guo, and Sanjiv Kumar. Decoupled context processing for context augmented language modeling, 2022.
- Chujie Gao, Qihui Zhang, Dongping Chen, Yue Huang, Siyuan Wu, Zhengyan Fu, Yao Wan, Xiangliang Zhang, and Lichao Sun. The best of both worlds: Toward an honest and helpful large language model. *arXiv preprint arXiv:2406.00380*, 2024.
- Sina Semnani, Violet Yao, Heidi Zhang, and Monica Lam. Wikichat: Stopping the hallucination of large language model chatbots by few-shot grounding on wikipedia. In *Findings of the Association for Computational Linguistics: EMNLP 2023*, pages 2387–2413, 2023.
- Stephanie Lin, Jacob Hilton, and Owain Evans. Truthfulqa: Measuring how models mimic human falsehoods, 2022.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding. *Proceedings of the International Conference on Learning Representations (ICLR)*, 2021a.
- Rowan Zellers, Ari Holtzman, Yonatan Bisk, Ali Farhadi, and Yejin Choi. Hellaswag: Can a machine really finish your sentence? In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, 2019.
- Yaoming Zhu, Sidi Lu, Lei Zheng, Jiaxian Guo, Weinan Zhang, Jun Wang, and Yong Yu. Texygen: A benchmarking platform for text generation models, 2018.
- Alfonso Cevallos, Friedrich Eisenbrand, and Sarah Morell. Diversity maximization in doubling metrics, 2018.
- Yihong Dong, Xue Jiang, Huanyu Liu, Zhi Jin, and Ge Li. Generalization or memorization: Data contamination and trustworthy evaluation for large language models, 2024.
- Shahriar Golchin and Mihai Surdeanu. Time travel in llms: Tracing data contamination in large language models, 2024.
- Ruijie Xu, Zengzhi Wang, Run-Ze Fan, and Pengfei Liu. Benchmarking benchmark leakage in large language models, 2024.
- Hugh Zhang, Jeff Da, Dean Lee, Vaughn Robinson, Catherine Wu, Will Song, Tiffany Zhao, Pranav Raja, Dylan Slack, Qin Lyu, et al. A careful examination of large language model performance on grade school arithmetic. *arXiv preprint arXiv:2405.00332*, 2024b.
- Iman Mirzadeh, Keivan Alizadeh, Hooman Shahrokhi, Oncl Tuzel, Samy Bengio, and Mehrdad Farajtabar. Gsm-symbolic: Understanding the limitations of mathematical reasoning in large language models. *arXiv preprint arXiv:2410.05229*, 2024.
- Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Jianmin Bao, Harkirat Behl, Alon Ben-haim, Misha Bilenko, Johan Bjorck, Sébastien Bubeck, Qin Cai, Martin Cai, Caio César Teodoro Mendes, Weizhu Chen, Vishrav Chaudhary, Dong Chen, Dongdong Chen, Yen-Chun Chen, Yi-Ling Chen, Parul Chopra, Xiyang Dai, Allie Del Giorno, Gustavo de Rosa, Matthew Dixon, Ronen Eldan, Victor Fragoso, Dan Iter, Mei Gao, Min Gao, Jianfeng Gao, Amit Garg, Abhishek Goswami, Suriya Gunasekar, Emman Haider, Junheng Hao, Russell J. Hewett, Jamie Huynh, Mojan Javaheripi, Xin Jin, Piero Kauffmann, Nikos Karampatziakis, Dongwoo Kim, Mahoud Khademi, Lev Kurilenko, James R. Lee, Yin Tat Lee, Yuanzhi Li, Yunsheng Li, Chen Liang, Lars Liden, Ce Liu, Mengchen Liu, Weishung Liu, Eric Lin, Zeqi Lin, Chong Luo, Piyush Madan, Matt Mazzola, Arindam Mitra, Hardik Modi, Anh Nguyen, Brandon Norick, Barun Patra, Daniel Perez-Becker, Thomas Portet, Reid Pryzant, Heyang Qin, Marko Radmilac, Corby Rosset, Sambudha Roy, Olatunji Ruwase, Olli Saarikivi, Amin Saied, Adil Salim, Michael Santacrose, Shital Shah, Ning Shang, Hiteshi Sharma, Swadheen Shukla, Xia Song, Masahiro Tanaka, Andrea Tupini, Xin Wang, Lijuan Wang, Chunyu Wang, Yu Wang, Rachel Ward, Guanhua Wang, Philipp Witte, Haiping Wu, Michael Wyatt, Bin Xiao, Can Xu, Jiahang Xu, Weijian Xu, Sonali Yadav, Fan Yang, Jianwei Yang, Ziyi Yang, Yifan Yang, Donghan Yu, Lu Yuan, Chengruidong Zhang, Cyril Zhang, Jianwen Zhang, Li Lyna Zhang, Yi Zhang, Yue Zhang, Yunan Zhang, and Xiren Zhou. Phi-3 technical report: A highly capable language model locally on your phone, 2024.

- Haixing Dai, Zhengliang Liu, Wenxiong Liao, Xiaoke Huang, Yihan Cao, Zihao Wu, Lin Zhao, Shaochen Xu, Wei Liu, Ninghao Liu, Sheng Li, Dajiang Zhu, Hongmin Cai, Lichao Sun, Quanzheng Li, Dinggang Shen, Tianming Liu, and Xiang Li. Auggpt: Leveraging chatgpt for text data augmentation, 2023.
- Chenxi Whitehouse, Monojit Choudhury, and Alham Fikri Aji. Llm-powered data augmentation for enhanced cross-lingual performance, 2023.
- Anders Giovanni Møller, Arianna Pera, Jacob Dalsgaard, and Luca Aiello. The parrot dilemma: Human-labeled vs. LLM-augmented data in classification tasks. In Yvette Graham and Matthew Purver, editors, *Proceedings of the 18th Conference of the European Chapter of the Association for Computational Linguistics (Volume 2: Short Papers)*, pages 179–192, St. Julian’s, Malta, March 2024. Association for Computational Linguistics. URL <https://aclanthology.org/2024.eacl-short.17>.
- Mirac Suzgun, Nathan Scales, Nathanael Schärli, Sebastian Gehrmann, Yi Tay, Hyung Won Chung, Aakanksha Chowdhery, Quoc V Le, Ed H Chi, Denny Zhou, , and Jason Wei. Challenging big-bench tasks and whether chain-of-thought can solve them. *arXiv preprint arXiv:2210.09261*, 2022.
- Zorik Gekhman, Gal Yona, Roei Aharoni, Matan Eyal, Amir Feder, Roi Reichart, and Jonathan Herzig. Does fine-tuning llms on new knowledge encourage hallucinations?, 2024.
- Rohan Taori, Ishaan Gulrajani, Tianyi Zhang, Yann Dubois, Xuechen Li, Carlos Guestrin, Percy Liang, and Tatsunori B. Hashimoto. Stanford alpaca: An instruction-following llama model. [https://github.com/tatsu-lab/stanford\\_alpaca](https://github.com/tatsu-lab/stanford_alpaca), 2023.
- Lianmin Zheng, Wei-Lin Chiang, Ying Sheng, Siyuan Zhuang, Zhanghao Wu, Yonghao Zhuang, Zi Lin, Zhuohan Li, Dacheng Li, Eric P. Xing, Hao Zhang, Joseph E. Gonzalez, and Ion Stoica. Judging llm-as-a-judge with mt-bench and chatbot arena, 2023.
- Jiaming Ji, Tianyi Qiu, Boyuan Chen, Borong Zhang, Hantao Lou, Kaile Wang, Yawen Duan, Zhonghao He, Jiayi Zhou, Zhaowei Zhang, Fanzhi Zeng, Kwan Yee Ng, Juntao Dai, Xuehai Pan, Aidan O’Gara, Yingshan Lei, Hua Xu, Brian Tse, Jie Fu, Stephen McAleer, Yaodong Yang, Yizhou Wang, Song-Chun Zhu, Yike Guo, and Wen Gao. Ai alignment: A comprehensive survey, 2024.
- Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. Measuring massive multitask language understanding, 2021b. URL <https://arxiv.org/abs/2009.03300>.
- Chujie Zheng, Ziqi Wang, Heng Ji, Minlie Huang, and Nanyun Peng. Weak-to-strong extrapolation expedites alignment. *arXiv preprint arXiv:2404.16792*, 2024a.
- Collin Burns, Pavel Izmailov, Jan Hendrik Kirchner, Bowen Baker, Leo Gao, Leopold Aschenbrenner, Yining Chen, Adrien Ecoffet, Manas Joglekar, Jan Leike, et al. Weak-to-strong generalization: Eliciting strong capabilities with weak supervision. *arXiv preprint arXiv:2312.09390*, 2023.
- Xian Li, Ping Yu, Chunting Zhou, Timo Schick, Luke Zettlemoyer, Omer Levy, Jason Weston, and Mike Lewis. Self-alignment with instruction backtranslation. *arXiv preprint arXiv:2308.06259*, 2023.
- Zhiqing Sun, Yikang Shen, Qinhong Zhou, Hongxin Zhang, Zhenfang Chen, David Cox, Yiming Yang, and Chuang Gan. Principle-driven self-alignment of language models from scratch with minimal human supervision. *Advances in Neural Information Processing Systems*, 36, 2024b.
- Yupeng Chang, Xu Wang, Jindong Wang, Yuan Wu, Linyi Yang, Kaijie Zhu, Hao Chen, Xiaoyuan Yi, Cunxiang Wang, Yidong Wang, Wei Ye, Yue Zhang, Yi Chang, Philip S. Yu, Qiang Yang, and Xing Xie. A survey on evaluation of large language models, 2023.
- Alejandro Lopez-Lira and Yuehua Tang. Can chatgpt forecast stock price movements? return predictability and large language models, 2023.
- Wenxuan Zhang, Yue Deng, Bing Liu, Sinno Jialin Pan, and Lidong Bing. Sentiment analysis in the era of large language models: A reality check, 2023a.

- Kai-Cheng Yang and Filippo Menczer. Large language models can rate news outlet credibility, 2023.
- Ruohong Zhang, Yau-Shian Wang, and Yiming Yang. Generation-driven contrastive self-training for zero-shot text classification with instruction-tuned gpt, 2023b.
- Nick McKenna, Tianyi Li, Liang Cheng, Mohammad Javad Hosseini, Mark Johnson, and Mark Steedman. Sources of hallucination by large language models on inference tasks, 2023.
- Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yan Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, Benjamin Newman, Binhang Yuan, Bobby Yan, Ce Zhang, Christian Cosgrove, Christopher D. Manning, Christopher Ré, Diana Acosta-Navas, Drew A. Hudson, Eric Zelikman, Esin Durmus, Faisal Ladhak, Frieda Rong, Hongyu Ren, Huaxiu Yao, Jue Wang, Keshav Santhanam, Laurel Orr, Lucia Zheng, Mert Yuksekogul, Mirac Suzgun, Nathan Kim, Neel Guha, Niladri Chatterji, Omar Khattab, Peter Henderson, Qian Huang, Ryan Chi, Sang Michael Xie, Shibani Santurkar, Surya Ganguli, Tatsunori Hashimoto, Thomas Icard, Tianyi Zhang, Vishrav Chaudhary, William Wang, Xuechen Li, Yifan Mai, Yuhui Zhang, and Yuta Koreeda. Holistic evaluation of language models, 2023.
- Zhouhong Gu, Xiaoxuan Zhu, Haoning Ye, Lin Zhang, Jianchen Wang, Sihang Jiang, Zhuozhi Xiong, Zihan Li, Qianyu He, Rui Xu, Wenhao Huang, Zili Wang, Shusen Wang, Weiguo Zheng, Hongwei Feng, and Yanghua Xiao. Xiezhi: An ever-updating benchmark for holistic domain knowledge evaluation, 2023.
- Caleb Ziems, William Held, Omar Shaikh, Jiaao Chen, Zhehao Zhang, and Diyi Yang. Can large language models transform computational social science?, 2023.
- John J. Nay, David Karamardian, Sarah B. Lawsky, Wenting Tao, Meghana Bhat, Raghav Jain, Aaron Travis Lee, Jonathan H. Choi, and Jungo Kasai. Large language models as tax attorneys: A case study in legal capabilities emergence, 2023.
- Neel Guha, Julian Nyarko, Daniel E. Ho, Christopher Ré, Adam Chilton, Aditya Narayana, Alex Chohlas-Wood, Austin Peters, Brandon Waldon, Daniel N. Rockmore, Diego Zambrano, Dmitry Talisman, Enam Hoque, Faiz Surani, Frank Fagan, Galit Sarfaty, Gregory M. Dickinson, Haggai Porat, Jason Hegland, Jessica Wu, Joe Nudell, Joel Niklaus, John Nay, Jonathan H. Choi, Kevin Tobia, Margaret Hagan, Megan Ma, Michael Livermore, Nikon Rasumov-Rahe, Nils Holzenberger, Noam Kolt, Peter Henderson, Sean Rehaag, Sharad Goel, Shang Gao, Spencer Williams, Sunny Gandhi, Tom Zur, Varun Iyer, and Zehua Li. Legalbench: A collaboratively built benchmark for measuring legal reasoning in large language models, 2023.
- Zhiwei Fei, Xiaoyu Shen, Dawei Zhu, Fengzhe Zhou, Zhuo Han, Songyang Zhang, Kai Chen, Zongwen Shen, and Jidong Ge. Lawbench: Benchmarking legal knowledge of large language models. *arXiv preprint arXiv:2309.16289*, 2023.
- Michael Frank. Baby steps in evaluating the capacities of large language models. *Nature Reviews Psychology*, 2, 06 2023. doi: 10.1038/s44159-023-00211-x.
- Yue Huang, Qihui Zhang, Philip S. Y, and Lichao Sun. Trustgpt: A benchmark for trustworthy and responsible large language models, 2023d.
- Zhexin Zhang, Leqi Lei, Lindong Wu, Rui Sun, Yongkang Huang, Chong Long, Xiao Liu, Xuanyu Lei, Jie Tang, and Minlie Huang. Safetybench: Evaluating the safety of large language models with multiple choice questions, 2023c.
- Boxin Wang, Weixin Chen, Hengzhi Pei, Chulin Xie, Mintong Kang, Chenhui Zhang, Chejian Xu, Zidi Xiong, Ritik Dutta, Rylan Schaeffer, Sang T. Truong, Simran Arora, Mantas Mazeika, Dan Hendrycks, Zinan Lin, Yu Cheng, Sanmi Koyejo, Dawn Song, and Bo Li. Decodingtrust: A comprehensive assessment of trustworthiness in gpt models, 2024b.
- Tianrui Guan, Fuxiao Liu, Xiyang Wu, Ruiqi Xian, Zongxia Li, Xiaoyu Liu, Xijun Wang, Lichang Chen, Furong Huang, Yaser Yacoub, Dinesh Manocha, and Tianyi Zhou. Hallusionbench: An advanced diagnostic suite for entangled language hallucination and visual illusion in large vision-language models, 2024.

- Terry Yue Zhuo, Yujin Huang, Chunyang Chen, and Zhenchang Xing. Red teaming chatgpt via jailbreaking: Bias, robustness, reliability and toxicity, 2023.
- Xiao Liu, Xuanyu Lei, Shengyuan Wang, Yue Huang, Zhuoer Feng, Bosi Wen, Jiale Cheng, Pei Ke, Yifan Xu, Weng Lam Tam, et al. Alignbench: Benchmarking chinese alignment of large language models. *arXiv preprint arXiv:2311.18743*, 2023c.
- Dongping Chen, Ruoxi Chen, Shilin Zhang, Yinuo Liu, Yaochen Wang, Huichi Zhou, Qihui Zhang, Pan Zhou, Yao Wan, and Lichao Sun. Mllm-as-a-judge: Assessing multimodal llm-as-a-judge with vision-language benchmark, 2024c.
- Ruibo Liu, Jerry Wei, Fangyu Liu, Chenglei Si, Yanzhe Zhang, Jinmeng Rao, Steven Zheng, Daiyi Peng, Diyi Yang, Denny Zhou, and Andrew M. Dai. Best practices and lessons learned on synthetic data for language models, 2024.
- Timo Schick and Hinrich Schütze. Generating datasets with pretrained language models, 2021.
- Arij Riabi, Thomas Scialom, Rachel Keraron, Benoît Sagot, Djamé Seddah, and Jacopo Staiano. Synthetic data augmentation for zero-shot cross-lingual question answering. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih, editors, *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 7016–7030, Online and Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.emnlp-main.562. URL <https://aclanthology.org/2021.emnlp-main.562>.
- Wenting Zhao, Xiang Ren, Jack Hessel, Claire Cardie, Yejin Choi, and Yuntian Deng. (inthe) wildchat: 570k chatgpt interaction logs in the wild. In *The Twelfth International Conference on Learning Representations*, 2023.
- Jerry Wei, Chengrun Yang, Xinying Song, Yifeng Lu, Nathan Hu, Jie Huang, Dustin Tran, Daiyi Peng, Ruibo Liu, Da Huang, Cosmo Du, and Quoc V. Le. Long-form factuality in large language models, 2024.
- Yujia Qin, Shihao Liang, Yining Ye, Kunlun Zhu, Lan Yan, Yaxi Lu, Yankai Lin, Xin Cong, Xiangru Tang, Bill Qian, Sihan Zhao, Runchu Tian, Ruobing Xie, Jie Zhou, Mark Gerstein, Dahai Li, Zhiyuan Liu, and Maosong Sun. Toolllm: Facilitating large language models to master 16000+ real-world apis, 2023.
- Adina Williams, Nikita Nangia, and Samuel R. Bowman. A broad-coverage challenge corpus for sentence understanding through inference, 2018.
- Peter Clark, Isaac Cowhey, Oren Etzioni, Tushar Khot, Ashish Sabharwal, Carissa Schoenick, and Oyvind Tafjord. Think you have solved question answering? try arc, the ai2 reasoning challenge. *ArXiv*, abs/1803.05457, 2018. URL <https://api.semanticscholar.org/CorpusID:3922816>.
- Christopher Clark, Kenton Lee, Ming-Wei Chang, Tom Kwiatkowski, Michael Collins, and Kristina Toutanova. Boolq: Exploring the surprising difficulty of natural yes/no questions, 2019.
- OpenAI. Gpt-4, 2023b. <https://openai.com/gpt-4>.
- Openai. <https://openai.com/>.
- Meta. Ai at meta. <https://ai.meta.com>.
- Albert Q Jiang, Alexandre Sablayrolles, Antoine Roux, Arthur Mensch, Blanche Savary, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Emma Bou Hanna, Florian Bressand, et al. Mixtral of experts, 2024.
- OpenAI. Mistral ai, b. <https://mistral.ai/company/>.
- Anthropic. <https://www.anthropic.com/>.

01. AI, :, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue, Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu, and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024.
- OpenAI. 01ai, c. <https://www.01.ai/>.
- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models, 2023.
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models, 2021.
- Diederik P. Kingma and Jimmy Ba. Adam: A method for stochastic optimization, 2017.
- Yaowei Zheng, Richong Zhang, Junhao Zhang, Yanhan Ye, Zheyang Luo, and Yongqiang Ma. Llamafactory: Unified efficient fine-tuning of 100+ language models, 2024b.
- Seungone Kim, Jamin Shin, Yejin Cho, Joel Jang, Shayne Longpre, Hwaran Lee, Sangdoo Yun, Seongjin Shin, Sungdong Kim, James Thorne, and Minjoon Seo. Prometheus: Inducing fine-grained evaluation capability in language models, 2024.
- Lianghui Zhu, Xinggang Wang, and Xinlong Wang. Judgelm: Fine-tuned large language models are scalable judges, 2023.
- Yen-Ting Lin and Yun-Nung Chen. Llm-eval: Unified multi-dimensional automatic evaluation for open-domain conversations with large language models, 2023.
- Andy Zou, Zifan Wang, Nicholas Carlini, Milad Nasr, J. Zico Kolter, and Matt Fredrikson. Universal and transferable adversarial attacks on aligned language models, 2023.



# Appendix

## 5 IMPACT, LIMITATION, AND IMPROVEMENT

Our proposed framework, DATAGEN, not only reduces the costs associated with manually creating data and supports dynamic benchmarking and data augmentation but also significantly impacts the data generation field in several key ways:

- **Alleviating resource scarcity.** DATAGEN effectively addresses the shortage of low-resource datasets. For instance, current datasets were predominantly in English, leaving non-English datasets scarce. Moreover, DATAGEN can help fill the dataset scarcity in some domains, especially some interdisciplinary fields like AI in psychology (Li et al., 2024a). This is significant for both domain development and AI fairness.
- **Enhancing model robustness.** The diversity and challenges presented by data generated through DATAGEN help models improve their ability to handle complex and varied real-world data. This, in turn, enhances the models’ generalization capabilities and reliability, especially in scenarios involving data contamination.
- **Expanding research applications.** The methodology used in DATAGEN can be adapted for other modal data generation frameworks. As models capable of handling different modalities or even multimodal data emerge, the research into data generation for these modalities becomes increasingly relevant and impactful.

While this research presents notable advancements, it concurrently grapples with certain limitations, which means we have much more space for improvement.

- **From the perspective of error analysis (subsection 3.5).** The error analysis identifies primary areas where DATAGEN can diminish errors to enhance reliability. To address factuality errors, deploying a robust LLM-based agent (Liu et al., 2023b) enhanced with a broader verification toolkit—comprising an extensive database and web access capabilities—is crucial. Furthermore, question errors frequently stem from LLMs’ misinterpretations of dataset descriptions and objectives, a direct consequence of alignment inefficiencies (Ji et al., 2024). Implementing a plug-in module that refines human-written dataset descriptions into formats more comprehensible to LLMs could mitigate this issue.
- **From the perspective of downstream applications (subsection 3.7 and subsection 3.8):** A significant oversight in our endeavor to establish a universal dataset generation framework was the insufficient focus on adaptability for specific applications. Concerning dynamic benchmarking protocols such as DyVal (Zhu et al., 2024a) and DyVal 2 (Zhu et al., 2024b), it is vital to ascertain the specific capabilities that these benchmarks aim to evaluate. For example, while the GSM8K is designed to assess reasoning abilities, the current dataset generation paradigm, which leverages descriptions and few-shot examples, may fail to challenge LLMs adequately. Therefore, orienting the generation process to explicitly target the capabilities under evaluation could truly enhance the dynamism of the dataset. Additionally, our findings indicate limited improvements when applying data augmentation to knowledge-intensive datasets like MMLU (Hendrycks et al., 2021b) and TruthfulQA (Lin et al., 2022). A more effective approach could involve identifying novel or out-of-distribution (OOD) data that represents unmastered knowledge for LLMs, thereby significantly enhancing learning outcomes.
- **From the perspective of weak-to-strong alignment (Zheng et al., 2024a; Burns et al., 2023) & self-alignment (Sun et al., 2023; Li et al., 2023; Sun et al., 2024b):** LLM-generated data have been extensively utilized to improve LLMs themselves. For example, Phi-3 (Abdin et al., 2024) is trained using a substantial amount of synthetic data generated by GPT-4. This utilization demonstrates that LLMs can undergo self-evolution through synthetic data. In our study, while we have explored potential alignments in a cross-model mode (e.g., using GPT-4 to enhance weaker models), the strategies for self-alignment or weak-to-strong alignment within the same model are not thoroughly investigated. Future research focusing on how to adapt a dataset generation framework like DATAGEN for use in data-centric alignment domains will be of considerable importance.

## 6 RELATED WORK

**Benchmarking and Evaluating LLMs.** Owing to the remarkable capabilities of LLMs, benchmarking these models is essential for a deeper understanding of both general and specialized domains (Chang et al., 2023). The evaluation of LLMs encompasses a wide range of fields, initiating with core NLP tasks such as sentiment analysis (Lopez-Lira and Tang, 2023; Zhang et al., 2023a), text classification (Yang and Menczer, 2023; Zhang et al., 2023b), and natural language inference (McKenna et al., 2023). A holistic evaluation framework, the HELM benchmark, has been proposed by Liang et al. (2023), laying the groundwork for comprehensive assessments. Additionally, the application of LLMs spans diverse sectors (Gu et al., 2023), including computational social science (Ziems et al., 2023), legal analytics (Nay et al., 2023; Guha et al., 2023; Fei et al., 2023), and psychological studies (Frank, 2023; Li et al., 2024a). Furthermore, several benchmarks have been designed to scrutinize trustworthiness dimensions such as safety and privacy in LLMs (Sun et al., 2024a; Huang et al., 2023d; Zhang et al., 2023c; Wang et al., 2024b; Guan et al., 2024; Zhuo et al., 2023). Static benchmarks are susceptible to data contamination, wherein developers might incorporate benchmark datasets into the training data to artificially enhance performance. To mitigate this, flexible protocols for dynamic evaluation have been advanced, exemplified by the recent initiatives DyVal (Zhu et al., 2024a) and DyVal 2 (Zhu et al., 2024b). Additionally, Fan et al. (2024) introduced NPHardEval, featuring monthly updated datasets. The S3Eval framework, a scalable evaluation suite for LLMs, was conceptualized by (Lei et al., 2024). Moreover, some benchmarks adopt methodologies where LLMs function as evaluators (*e.g.*, LLM-as-a-judge) (Liu et al., 2023c; Chen et al., 2024c; Zheng et al., 2023), with AlignBench proposing a multi-dimensional assessment using this approach (Liu et al., 2023c).

**Synthetic Data by LLMs.** LLMs have demonstrated an impressive capacity for data generation, leading to their application in creating synthetic datasets for pretraining and finetuning, replacing the labor-intensive processes of manual data scraping and selection (Liu et al., 2024). Distinct from earlier methods that focus on traditional language models (Schick and Schütze, 2021), LLMs offer enhanced prospects for producing high-quality synthetic data across a wide spectrum of applications, such as multilingual QA (Riabi et al., 2021), chatbot conversation (Zhao et al., 2023) and data diversity augmentation (Dai et al., 2023; Chung et al., 2023).

The concept of synthetic benchmarks takes a step further by demanding that the LLM-generated data be diverse accurate and systematically challenging. For instance, Wang et al. (2024a) devised a framework that enhances the evolution of benchmarks by applying six reframing techniques on existing datasets. Wei et al. (2024) employed GPT-4 to create LongFact, comprising extensive QA pairs that serve as a benchmark for evaluating long-form factual content. Moreover, synthetic benchmarks have also been constructed in evaluating LLM emergent capabilities such as trustworthiness (Sun et al., 2024a), tool usage (Huang et al., 2023a; Qin et al., 2023) and persona-based conversation (Jandaghi et al., 2023). Our research advances synthetic benchmark generation by developing a paradigm that integrates multiple plug-and-play modules into LLM dataset creation, leveraging emergent capabilities by various prompting methods (*e.g.*, self-evaluation (Ji et al., 2023)) to produce data items with high-quality. Recently, in response to concerns about the quality of synthetic datasets, Dekoninck et al. (2024a) conducted comprehensive experiments to evaluate the diversity and fidelity of synthetic data produced by LLMs, while Dekoninck et al. (2024b) introduced a new inference framework, model arithmetic, to control the content generated by LLMs.

## 7 DETAILS OF DATASETS AND MODELS

### 7.1 DATASETS

**GSM8K.** GSM8K is a dataset designed to test the mathematical problem-solving ability of large language models (Cobbe et al., 2021). It comprises approximately 8,000 math word problems typical of those in grade school. The problems are diverse, covering various topics and difficulties, making it a comprehensive tool for assessing the reasoning capabilities of models in numerical contexts.

**TruthfulQA.** TruthfulQA is a dataset crafted to evaluate the truthfulness and factual accuracy of answers provided by language models (Lin et al., 2022). It consists of questions that models frequently

respond to incorrectly or misleadingly. The dataset challenges models on simple factual questions and questions requiring a nuanced understanding of common misconceptions and controversial topics.

**MMLU.** MMLU is a large-scale dataset designed to test various language understanding tasks (Hendrycks et al., 2021b). It covers 57 subjects ranging from humanities to natural sciences, providing a broad spectrum of topics. This diversity makes MMLU highly effective for assessing the general knowledge and understanding of language models across varied domains.

**HellaSwag.** HellaSwag is a dataset that evaluates common sense reasoning and context understanding in language models (Zellers et al., 2019). It includes scenarios requiring the prediction of the most plausible continuation among several options. The dataset is crafted to be particularly challenging, often including subtle nuances and twists that test the depth of contextual comprehension.

**MetaTool.** MetaTool is a benchmark designed to evaluate LLMs’ awareness and proficiency in tool usage and selection (Huang et al., 2023a). In our experiment, we conducted evaluations on two tasks. In our experiments, we specifically focused on single-tool selection.

**MultiNLI.** The Multi-Genre Natural Language Inference (MultiNLI) is a crowd-sourced dataset of 433k sentence pairs annotated with textual entailment information (Williams et al., 2018). It covers a range of genres of spoken and written text and supports a distinctive cross-genre generalization evaluation.

**ARC (Challenge).** The AI2’s Reasoning Challenge (ARC) dataset is a multiple-choice question-answering dataset, containing questions from science exams from grade 3 to grade 9 (Clark et al., 2018). The dataset is split into two partitions: Easy and Challenge, where the latter partition contains the more difficult questions that require reasoning.

**BoolQ.** BoolQ is a reading comprehension dataset with questions that are unexpectedly challenging (Clark et al., 2019). They often query for complex, non-factoid information, and require difficult entailment-like inference to solve.

**BBH.** BIG-Bench Hard (BBH) is a subset of the BIG-Bench, a diverse evaluation suite for language models (Suzgun et al., 2022). BBH focuses on a suite of 23 challenging tasks from BIG-Bench that were found to be beyond the capabilities of current language models. We select two tasks from BBH: boolean expressions<sup>2</sup> and causal judgement<sup>3</sup>.

## 7.2 MODELS

**Models for Benchmarking.** These include ChatGPT (OpenAI, 2023a) and GPT-4 (OpenAI, 2023b) by OpenAI (Ope), known for their robust conversational abilities; Llama3-70b and Llama3-8b (Meta, 2023) by Meta AI (Meta), open-source and favored for their versatility across different computational scales; Mistral-7b and Mistral-8x7b (Jiang et al., 2024) by Mistral AI (OpenAI, b), designed for efficiency in language tasks; Claude3 (Anthropic, 2023) by Anthropic (Ant), which focuses on safe and ethical AI interactions; and Yi-34b (AI et al., 2024) by 01.AI (OpenAI, c), a model fine-tuned using high-quality curated data to ensure helpfulness.

## 8 DETAILS OF HUMAN EVALUATION

We conduct human evaluations in two parts: effectiveness of each module in DATAGEN (subsection 3.3) and error analysis (subsection 3.5). Four undergraduate students and one PhD student with professional English skills carry out these evaluations. Some annotation screenshots of human evaluation are shown in Figure 13 and Figure 14.

**Effectiveness of Each Module in DATAGEN.** In subsection 3.3, we conduct the human ablation evaluation of overall quality assessment and enhancement, code-based, and RAG-based validation. Specifically, for code-based evaluation, when a label contradicts the code output, we will manually check whether the code output is correct (in DATAGEN, we will replace the original label with code

<sup>2</sup>[https://github.com/suzgunmirac/BIG-Bench-Hard/blob/main/bbh/boolean\\_expressions.json](https://github.com/suzgunmirac/BIG-Bench-Hard/blob/main/bbh/boolean_expressions.json)

<sup>3</sup>[https://github.com/suzgunmirac/BIG-Bench-Hard/blob/main/bbh/causal\\_judgement.json](https://github.com/suzgunmirac/BIG-Bench-Hard/blob/main/bbh/causal_judgement.json)

Table 9: The dataset description we used in DATAGEN.

Dataset	Description
<b>HellaSwag</b>	This dataset consists of multiple-choice questions designed to test the logical reasoning and contextual understanding of AI models. Each question sets up a scenario and asks "What happens next?" with four potential answers. Only one answer is logically sound and contextually appropriate, while the other three are implausible, either contradicting the scenario's details or representing unlikely outcomes. The purpose of these questions is to challenge AI models to use logical sequencing, inferential reasoning, and practical insights effectively. This dataset aims to refine AI abilities in predicting logical continuations in scenarios that mimic real-life logic and events, ensuring the challenges are complex and thought-provoking.
<b>MMLU</b>	It is a large-scale, multi-task language understanding dataset designed to evaluate language models' capabilities across various language understanding tasks. The dataset questions are presented in a multiple-choice format, each with a question (referred to as "text") followed by four options (labeled A, B, C, and D). Each question is associated with a correct answer ("label").
<b>GSM8K</b>	It is a dataset of high-quality linguistically diverse grade school math word problems created by human problem writers. These problems take between 2 and 8 steps to solve, and solutions primarily involve performing a sequence of elementary calculations using basic arithmetic operations ( $+$ $-$ $\times$ $\div$ ) to reach the final answer. A bright middle school student should be able to solve every problem. It can be used for multi-step mathematical reasoning. Each problem should only have one question and one correct answer.
<b>TruthfulQA</b>	This dataset is designed to measure the truthfulness and accuracy of answers generated in response to common questions, some of which are often answered incorrectly by humans due to widespread misconceptions or false beliefs. The purpose of the dataset is to evaluate how well a model can distinguish factual accuracy from popular myths or erroneous understandings in various domains including history, science, and general knowledge. Each entry in the dataset consists of a question followed by multiple-choice answers where only one is correct. The dataset challenges the model's ability to use historical data, scientific facts, and logical reasoning to select the correct answer over plausible but incorrect alternatives that might reflect common misunderstandings.
<b>MetaTool</b>	Each entry in the dataset includes a user's query and a list of tool options. The model is required to select the most appropriate tool from the list that can best address the query. The dataset is designed to test the model's ability to choose the right tool.
<b>MultiNLI</b>	The dataset is a crowd-sourced collection of sentence pairs annotated with textual entailment information. Each data item contains two different sentences and has the label "neutral", "contradiction", or "entailment".
<b>ARC-C</b>	The dataset is designed to test the model's ability to understand and correctly answer science questions at a grade-school level, focusing on assessing capabilities such as comprehension, reasoning, and application of scientific knowledge. Each entry in the dataset consists of a question followed by multiple-choice answers where only one is correct.
<b>BoolQ</b>	This dataset is a question-and-answer dataset on reading comprehension. Given the title of a passage and the content of it, it requires providing a "true" or "false" answer to the given question. These questions are unexpectedly challenging as they often query for complex, non-factoid information and require difficult entailment-like inference to solve.
<b>BBH (Bool)</b>	The dataset consists of Boolean expressions and their respective evaluations. Each entry in the dataset is a pair, comprising a Boolean expression (as a question) and the expected result (as a label). The Boolean expressions include combinations of True, False, and, or, and not operators, testing various logical conditions. This dataset is useful for training models to understand and evaluate Boolean logic.
<b>BBH (Casual)</b>	The dataset contains various scenarios designed to test causal judgment. Each entry includes a scenario described in detail, followed by a question about the causality involved, and multiple-choice options for answers. The target indicates the expected answer to the question based on typical causal reasoning.

Table 10: The size of the generated dataset used in subsection 3.2 and benchmarking LLMs.

GSM8K	HellaSwag	MMLU	TruthfulQA
212	226	193	202

output if they contradict). For the RAG-based validation, we also manually whether the correcting action is reasonable and supported by the ground truth.

**Human Performance.** The human evaluation was conducted by five students as mentioned before. Each student completed all questions across four datasets. The final performance scores were then averaged to obtain a comprehensive measure of human performance.

**Error Analysis.** The error analysis (subsection 3.5) is based on a structured human evaluation approach. To ensure the quality of the generated questions, human experts review each question against specific criteria that cover various aspects of data integrity and logical coherence. Below are the detailed aspects that are evaluated:

- **Data format.** This aspect evaluates whether the data presented in the questions adheres to the expected formats and standards. For example, dates should use a consistent format and options for generated data should be presented with the correct format (*e.g.*, A, B, C, or D).
- **The logicity of mathematical questions.** Experts assess whether the mathematical problems posed in the questions are logically sound and solvable within the given context. This includes checking for the presence of all necessary information, the feasibility of the operations, and the logical flow from premises to the conclusion.
- **Correctness of answer.** This criterion involves verifying that the answers provided or implied by the questions are correct and accurate.
- **Articulation of data items.** Reviewers examine how clearly data items are articulated within the questions. This includes clarity of language, proper grammatical structure, and the logical arrangement of information to facilitate easy understanding. Ambiguity or miscommunication that could hinder the respondent’s ability to accurately interpret the question is flagged for correction.

## 9 DETAILS OF EXPERIMENT SETTING

**Dataset Generation.** To maximize the consistency of the experimental results, we set the temperature parameter for both GPT-4 and Claude-3 to 0. The size of the generated dataset used in subsection 3.2 and benchmarking LLMs is shown in Table 10. The batch size of generation (the number of items generated per time) is set to 5.

**Inference Settings.** We maintained uniform hyperparameter settings across all models. Specifically, the model temperature was set to 0 to enhance productivity, and the top-p was set to 1. For benchmarking purposes with Mixtral-8x7b and Llama3-70b, we utilized the inference API provided by Replicate<sup>4</sup>.

**Fine-tune Settings.** For each dataset, DATAGEN generates 200 samples powered by GPT-4 and then evaluates the fine-tuned models on the test set of the original dataset. The labels or ground-truth answers of generated data always contain only a few words, lacking a thinking process that may be more important for fine-tuning. To address this, the labels or the ground-truth answers of the generated dataset are refined and extended by GPT-4 itself (*e.g.*, transform the answers into Chain-of-Thoughts format (Wei et al., 2023)). Then a self-evaluation of GPT-4 will be conducted to ensure the correctness and accuracy of refined answers. Our fine-tuning is all based on the Supervised Fine-Tuning (SFT):

$$\mathcal{L}_{\text{SFT}}(\pi_{\theta}) = -\mathbb{E}_{(x,y) \sim \mathcal{D}} [\log \pi_{\theta}(y | x)] \quad (1)$$

We applied the LoRA (Hu et al., 2021) technique to fine-tune Llama3-8b and Mistral-7b. The rank of LoRA was set to 8, the learning rate was  $e^{-5}$ , and we used the Adam optimizer (Kingma and Ba,

<sup>4</sup><https://replicate.com/>



2017) for training. The models were trained over 5 epochs with a batch size of 4, utilizing mixed precision training. The training took place on a server equipped with an A100 GPU with 80GB of VRAM. For the training process, we employed the LLAMA-Factory framework (Zheng et al., 2024b).

## 10 ADDITIONAL EXPERIMENT RESULTS

We show the benchmarking results based on the generated data from Llama3-70b in Table 13. Moreover, we also show the training loss and evaluation loss during fine-tuning for data augmentation in Figure 10, Figure 11 and Figure 12.

**User Constraints.** To evaluate the effectiveness of LLMs in DATAGEN at adhering to user-specified constraints, our assessment is structured into two levels. The first level involves evaluating the model’s performance under single constraints, while the second level examines performance under combined constraints. The single constraints assessed include:

- **Length-related:** (1) Ensure each option is longer than 20 words. (2) Ensure each option is shorter than 20 words. (3) Ensure each question is longer than 100 words. (4) Ensure each question is shorter than 100 words.
- **Topic-related:** (1) Ensure the question is related to sports. (2) Ensure the question is related to computer science.
- **Structure-related:** Ensure each question contains five options.
- **Language-related:** (1) Ensure the questions and options are output in Chinese. (2) Ensure the questions and options are output in Spanish.

The combined constraints are shown in Table 11.

Table 11: The combined constraint used in the experiments.

NO.	Constraint 1	Constraint 2
1	Ensure each option is longer than 20 words.	Ensure each question is less than 100 words.
2	Ensure each option is less than 20 words.	Ensure each question is longer than 100 words.
3	Ensure each question is longer than 100 words.	Ensure each question contains five options.
4	Ensure each question contains five options.	Ensure the question is related to Computer and Science.
5	Ensure the question and options are output in Chinese.	Ensure the question is related to Computer and Science.

To assess whether the LLM adheres to user-imposed constraints, we utilize the LLM-as-a-Judge approach (Zheng et al., 2023), a method extensively employed in prior research (Liu et al., 2023c; Gao et al., 2024). The evaluation prompt details are provided in section 14. As indicated in Table 12, GPT-4 demonstrates outstanding performance across both single and combined constraints. It achieves a 100% compliance rate in nine out of ten single constraints, illustrating its robust capability to follow simple and typical user instructions. Although there is a slight performance decline in combined constraints, GPT-4 consistently maintains adherence to user constraints in most scenarios.

**Diversity.** For more features of generated data, we have referred to the study (Yu et al., 2024) to guide our incorporation of two quantitative metrics to evaluate dataset diversity: the Average Pairwise Sample Similarity (APS) and the Inter-Sample N-Gram Frequency (INGF). Lower APS values indicate better diversity, whereas higher INGF values signify greater diversity. The result is shown in Table 14.

Table 12: The GPT-4’s performance on user constraints.

Length-related				Structure-related	Topic-related		Language-related	
(1)	(2)	(3)	(4)		(1)	(2)	(1)	(2)
100.00%	96.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%	100.00%
Single Constraint (↑), Combined Constraint (↓)								
Constraint 1		Constraint 2		Constraint 3		Constraint 4		Constraint 5
96.67%		83.33%		100.00%		98.00%		100.00%

Table 13: The main results of eight LLMs on Llama3-70b generated datasets (*i.e.*, *gen.*) and original datasets (*i.e.*, *ori.*).

Model	GSM8K		HellaSwag		MMLU		TruthfulQA	
	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>	<i>ori.</i>	<i>gen.</i>
<b>ChatGPT</b>	0.770	0.762	0.733	0.538	0.811	0.609	0.857	0.432
<b>Claude-3</b>	0.805	0.953	0.895	0.888	0.775	0.810	0.915	0.855
<b>GPT-4</b>	0.805	0.947	0.910	0.736	0.835	0.725	0.890	0.841
<b>Llama3-70b</b>	0.720	0.890	0.764	0.836	0.825	0.755	0.940	0.750
<b>Llama3-8b</b>	0.685	0.800	0.805	0.568	0.760	0.565	0.840	0.450
<b>Mistral-7b</b>	0.513	0.313	0.825	0.580	0.760	0.490	0.710	0.380
<b>Mixtral-8x7b</b>	0.600	0.610	0.569	0.600	0.750	0.720	0.880	0.640
<b>Yi-34b</b>	0.725	0.687	0.785	0.644	0.805	0.645	0.830	0.480

Table 14: Comparison of Original and Generated APS and INGF values across datasets

Dataset	Original APS	Generated APS	Original INGF	Generated INGF
<b>TruthfulQ&amp;A</b>	0.029	0.091	882.181	1603.976
<b>GSM8K</b>	0.053	0.057	3021.619	1296.588
<b>MMLU</b>	0.047	0.050	2185.514	1566.574
<b>HellaSwag</b>	0.076	0.089	2586.710	2193.623

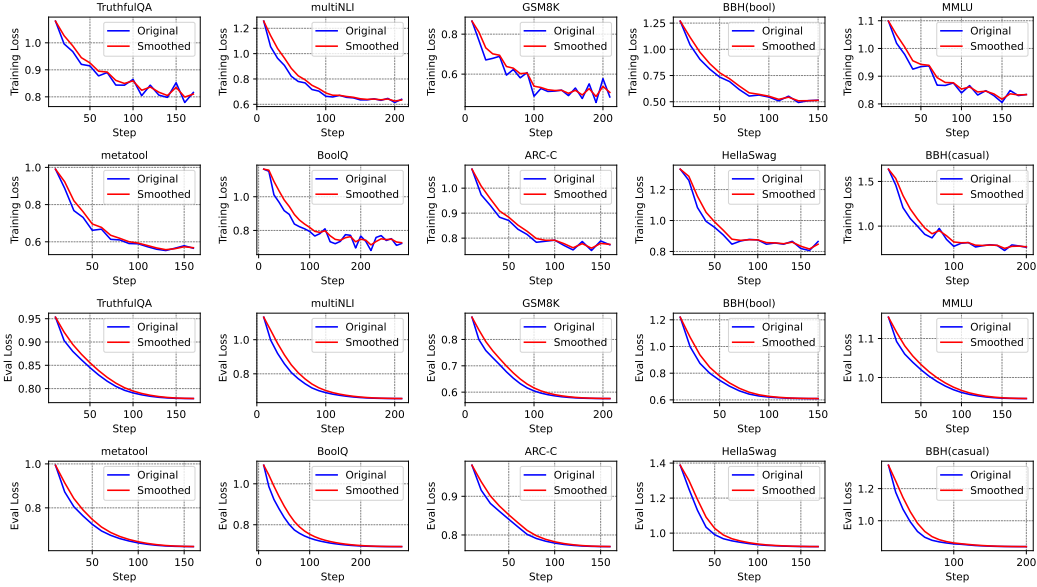


Figure 10: Training loss and eval loss during Llama2's fine-tuning.

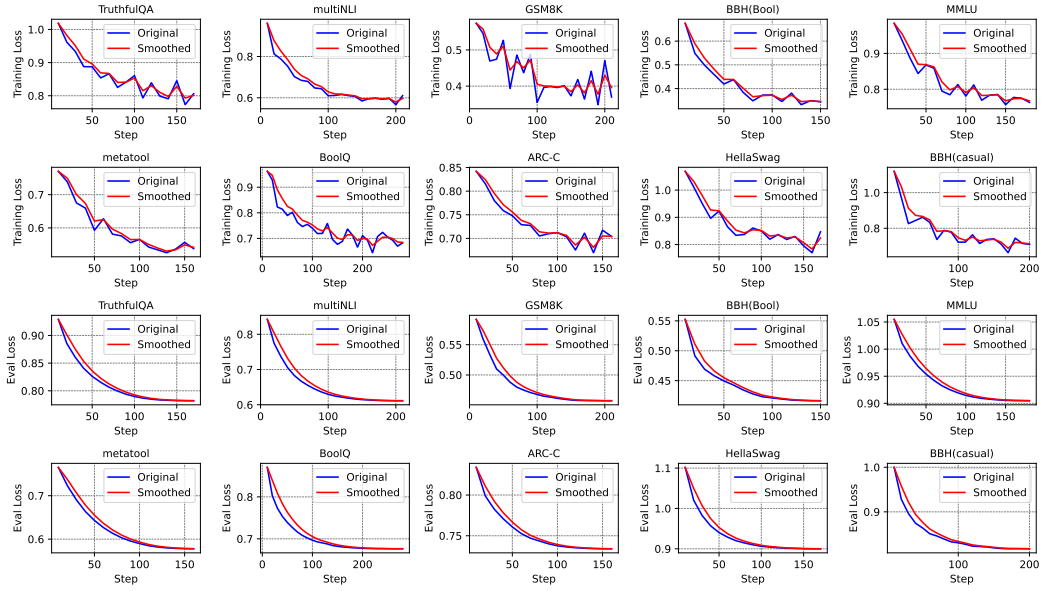


Figure 11: Training loss and eval loss during Llama3's fine-tuning.

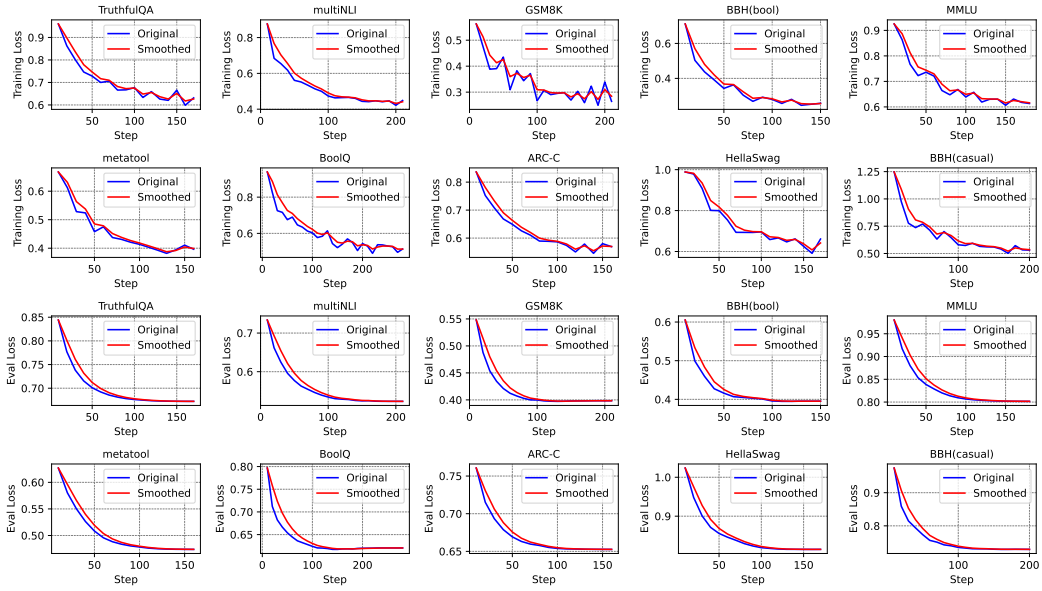


Figure 12: Training loss and eval loss during Mistral's fine-tuning.

Choose a JSON or JSONL file

Drag and drop file here  
Limit 200MB per file • JSON, JSONL

Browse files

MMLU\_GPT4\_human\_reflection.json 203.1KB

Index: 44 Jump

**original\_case.text**

Cognitive-behavioral therapy (CBT) has been shown to be effective for treating depression. Which of the following principles is NOT a core component of CBT?

A. Identification and modification of dysfunctional thinking patterns.  
B. Use of exposure techniques to reduce fear and avoidance behaviors.  
C. Emphasis on past traumatic experiences as the primary source of psychopathology.  
D. Development of coping strategies to manage stress and improve problem-solving.

**original\_case.label**

C

**reflection**

The question presents a clear scenario related to Cognitive-behavioral therapy (CBT) and its application in treating depression, asking to identify which principle is NOT a core component. This accurately assesses knowledge of CBT, which is relevant to psychological and psychiatric fields of study. Strengths include the relevance to clinical psychology, the clarity of question structure, and the inclusion of plausible distractors that require a nuanced understanding of CBT to answer correctly. However, the question slightly falls short in complexity and challenge level for a couple of reasons. Firstly, option C ('Emphasis on past traumatic experiences as the primary source of psychopathology') is relatively easier to identify as incorrect for those familiar with the basics of CBT, reducing the overall difficulty. CBT focuses on present thinking patterns and behaviors rather than past experiences, which is a well-known fact among students and professionals in psychology. To enhance the challenge, the question could include options that are more closely related to common misconceptions or more advanced aspects of CBT. Secondly, the question could benefit from integrating a scenario or context to apply the principle, increasing the need for application knowledge rather than just recall. This would add depth and encourage critical thinking, better assessing the comprehensive understanding of CBT principles.

**modified\_case.text**

A therapist is utilizing cognitive-behavioral therapy (CBT) to treat a patient with generalized anxiety disorder. The therapist focuses on helping the patient challenge and change unhelpful cognitive distortions and behaviors, improve emotional regulation, and develop personal coping strategies that target solving current problems. Which of the following techniques does NOT align with the foundational principles of CBT as applied in this scenario?

A. Encouraging the patient to engage in reflective journaling to identify and modify negative thought patterns.  
B. Implementing systematic desensitization to gradually reduce the patient's anxiety responses to feared objects or situations.  
C. Applying dream analysis to uncover unconscious motivations and resolve past conflicts influencing current anxiety.  
D. Teaching the patient to use cognitive restructuring to identify and challenge irrational beliefs contributing to anxiety.

**modified\_case.label**

C

Reflection Quality  
☒ Good ☐ Not Good

Modified Case Quality  
☐ Good ☒ Not Good

Submit

Figure 13: Screenshot of human evaluation (1)

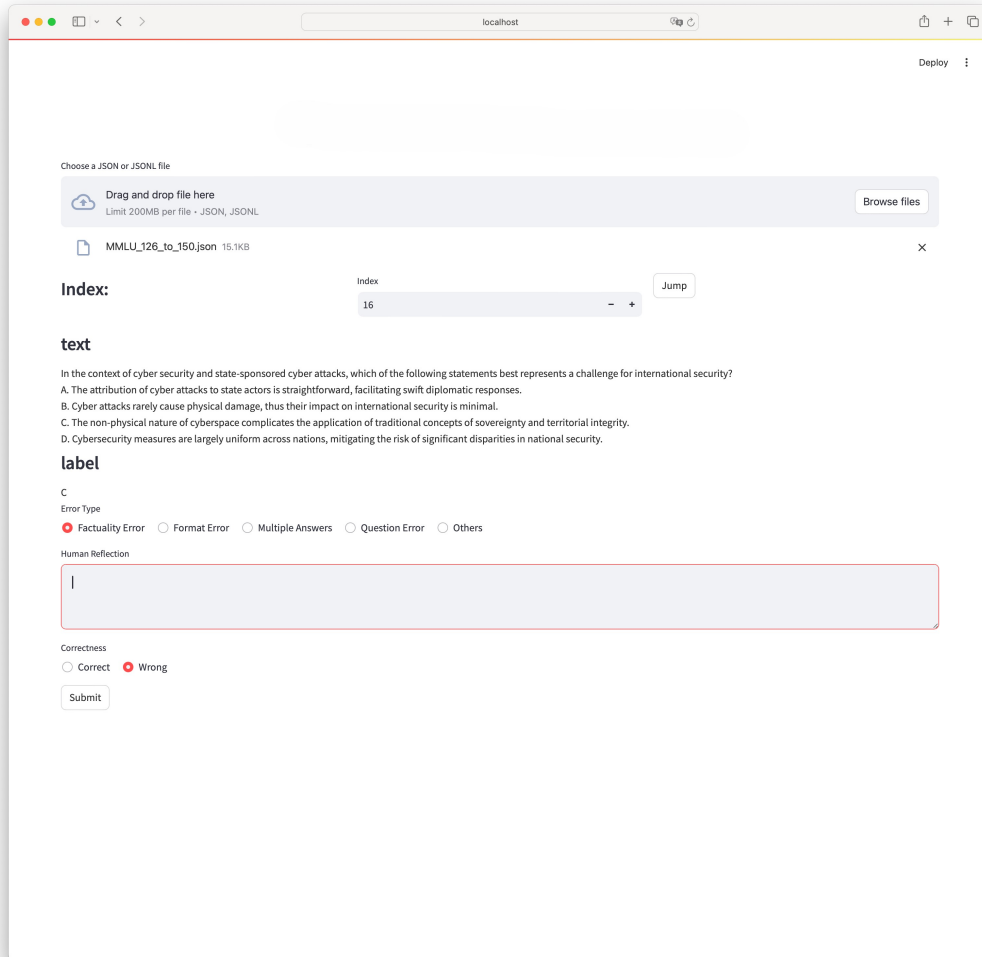


Figure 14: Screenshot of human evaluation (2)



## 11 POTENTIAL NEGATIVE SOCIETAL IMPACTS

The deployment of LLM-generated datasets, while beneficial in many contexts, carries potential negative societal impacts that warrant careful consideration. One significant concern is the propagation of biases present in the training data of the LLMs. If not adequately addressed, these biases can be reflected and even amplified in the generated datasets, leading to unfair or discriminatory outcomes in applications that utilize these datasets. Moreover, the use of synthetic data might reduce the diversity of perspectives if it over-relies on patterns learned from existing datasets, potentially overlooking minority viewpoints and underrepresented voices. To mitigate these risks, it is crucial to implement robust bias detection and correction mechanisms, enforce strict validation processes, and promote the ethical use of synthetic data in all applications.

## 12 DATASET EXAMPLE

### 12.1 GENERATED DATA

#### MMLU Example

Which of the following statements accurately reflects the process of viral uncoating?

- A. Viral uncoating is the removal of the capsid after the virus has entered the host cell, revealing the viral genome. (✓)
- B. Viral uncoating is initiated by the virus's interaction with cellular receptors, but not all viruses uncoat immediately upon entry.
- C. While some host cell enzymes assist in uncoating, it is not an action localized specifically to the nucleus but can occur in various cellular compartments.
- D. Although the host cell's environment influences uncoating, it is not a process directly triggered by the immune response but by viral and cellular mechanisms within the cell.

#### TruthfulQA Example

Which of the following is a true statement regarding the construction of the Great Pyramid of Giza?

- A. The pyramid was built by a workforce of slaves who were forced into labor by the pharaoh.
- B. Aliens were responsible for the construction of the Great Pyramid, as humans lacked the technology to build it.
- C. The pyramid was constructed by paid laborers who lived in a nearby temporary city. (✓)
- D. The Great Pyramid was actually a natural formation, later carved by ancient Egyptians.

#### GSM8K Example

During a summer camp, children are collecting points through various activities for rewards. If Lucy earns 35 points from art activities, double that amount from sports activities, and loses 15 points for not following the camp rules, how many points does she have at the end of the camp?

Answer: 90

### HellaSwag Example

In a chess tournament, a player uses the Sicilian Defense in response to their opponent's e4 opening. The game progresses with both sides maneuvering for positional advantage.

What happens next?

- A. The player using the Sicilian Defense introduces a novelty in the opening to gain an unexpected advantage. (✓)
- B. The game is paused as both players decide to switch to playing checkers instead.
- C. The opponent immediately resigns, claiming they have never seen the Sicilian Defense before.
- D. Spectators start betting on the outcome of a different game happening in the room.

## 12.2 TRUTHFULNESS VALIDATION BY RAG

### Example

**Original Question:** What does the term 'blood is thicker than water' originally mean?

- A. Family relationships are stronger than friendships.
- B. Bonds formed by shared experiences or battles are stronger than those of family. (✓)
- C. Blood rituals form the strongest bonds.
- D. It refers to the viscosity of blood versus water, nothing more.

**Extracted Keywords:** Blood is thicker than water<sup>a</sup>

**Refinement Process:** After reviewing the provided Wikipedia content on the proverb 'blood is thicker than water,' it's clear that the original meaning as commonly understood is that familial bonds are stronger than other types of relationships. This is contrary to the alternative interpretations mentioned by Albert Jack and Richard Pustelniak, which suggest that the original meaning was about the bonds formed by shared experiences or battles being stronger than those of family. However, these interpretations lack citation and are not widely supported by historical evidence. Thus, the original example given suggests 'B. Bonds formed by shared experiences or battles are stronger than those of family' as the correct answer, does not align with the predominant historical understanding and the detailed explanation provided in the Wikipedia content.

**Refined Question:** What does the term 'blood is thicker than water' originally mean?

- A. Family relationships are stronger than friendships. (✓)
- B. Bonds formed by shared experiences or battles are stronger than those of family.
- C. Blood rituals form the strongest bonds.
- D. It refers to the viscosity of blood versus water, nothing more.

<sup>a</sup>Wikipedia Page: [https://en.wikipedia.org/wiki/Blood\\_is\\_thicker\\_than\\_water](https://en.wikipedia.org/wiki/Blood_is_thicker_than_water)

### 13 PROMPT TEMPLATE

#### Self-Reflection Prompt Template

You are a professional dataset generation assistant. Your task is to assess the quality of the provided example based on dataset description and criteria such as quality, relevance, creativity, accuracy, and challenge level. Determine if the example not only meets the basic standards but also offers a sufficient challenge to be considered a valuable addition to the dataset.

DATASET DESCRIPTION: {description}.

Provide your evaluation in string format, formatted as JSON. For each question in the dataset, provide a detailed analysis in the 'reflection' field discussing the question's merits and shortcomings first. Identify its strengths, point out any weaknesses, suggest potential improvements, and evaluate the complexity of the question to ensure it meets the expected level of challenge. After reflecting, indicate in the 'isgood' field whether the question satisfies the expected standards and presents a sufficient challenge. Use 'yes' ONLY if both conditions are met comprehensively. If the question falls short in any aspect, mark 'no'.

Example for Evaluation: {example}

Your assessment and reflection must be formatted as follows:

```
{
  "reflection": (If isgood is 'yes', include reasons here. If 'no',
include a detailed analysis here.),
  "isgood": "yes/no"
}
```

#### Self-Enhancement Prompt Template

DATASET DESCRIPTION:{description}.

Based on the following reflection, create improved versions of the original example. Ensure that the improvements address the identified weaknesses and enhance the strengths.

Reflection: {reflection}

Original Example: {original example}

Generate improved examples that reflect the insights and suggestions from the reflection. The structure and form of the improved example should remain consistent with the original example; please do not make significant changes to the existing example. Directly output your improved example in the following JSON format:

#### Description Prompt Template

You are a professional dataset generator. Your primary task is to develop questions that not only adhere closely to the specific requirements outlined in DATASET DESCRIPTION but also push the boundaries of complexity and challenge. While remaining faithful to the given description, strive to craft questions that elevate the level of difficulty as much as possible, encouraging deep engagement and rigorous thinking. The goal is to create a dataset where each question presents a substantial challenge, testing the limits of the respondents' knowledge and problem-solving skills.

DATASET DESCRIPTION:{description for dataset}

**Initial Prompt Template**

The number of entries to be generated in this dataset is {batch\_size}.  
 Below are a few examples for your reference:  
 {few\_shot\_examples}  
 {dataset\_constraint}  
 Please ensure that the new dataset maintains the purpose of the original data, avoiding any contamination or loss of functionality.

**Return Format Prompt Template**

The number of entries to be generated is {batch\_size}. Directly return your answer as the following JSON format:  
 {data\_format}  
 Directly return your answer as JSON format:

**Attribute-Guided Prompt Template**

My goal is to enhance the diversity of the dataset. I will provide an overall description of the dataset each time, along with a few examples from the original dataset. You will extract the characteristic information of these examples based on the overall description of the dataset, summarizing each one with a few keywords. Ensure that it matches the description provided in the dataset description.  
 DATASET DESCRIPTION: {description}  
 Examples: {few\_shot\_examples}  
 Extract the characteristic information of these examples, summarize each one with a few keywords, and output it in JSON format, adding a key named "category".

**Constraints Prefix Prompt Template**

The following are some limitations when generating new datasets:

**Constraints Suffix Prompt Template**

The above are all restrictions, please strictly adhere to them when generating new datasets.

**Improve Examples With Human Feedback Prompt Template**

Based on human feedback, please improve and regenerate the example.  
 HUMAN\_FEEDBACK: {user\_feedback}  
 EXAMPLE: {example}  
 Generate an improved example that reflects the insights and suggestions from the feedback. Directly output the improved example in JSON format, using the structure {"improved\_example": "CONTENT"}

**Wiki Keyword Extract Prompt Template**

Please analyze the text and identify key entities that are likely to have corresponding articles on Wikipedia for fact-checking purposes. Extract entities such as names of people, places, organizations, historical events, specific technologies, and scientific terms (At most 3)

My text: {input\_text}

Directly output the list (only one list) of these entities in JSON format, using the structure `{{"entities": [item1, item2, xxxxx]}}`

**Wiki Fact Refine Prompt Template**

Check MY TEXT based on each keyword and content from Wikipedia, please check for accuracy against Wikipedia information. MY Data Entry: {input\_text}

WIKI DATA: {wiki\_data}

Check my input text based on each keyword and content from Wikipedia. Correct any misinformation if any mistake in my example. If the information is accurate, please confirm it. Ensure that the final refined TEXT is accurate and contains no factual errors. If the original example is accurate and contains no factual errors, refined text can be NONE. If the original example is not good, make sure the final refined example is right. Finally output in JSON format, using the structure

```
{
  "thinking_progress": "YOUR THINKING and CONFORMATION",
  "is_original_example_good": "True/False"
  "refined_text": "CORRECTED Data Entry"
}
```

**Math Eval Prompt Template**

I will give you a piece of text containing some mathematical information. It requires precise calculations to verify its correctness. Therefore, please translate it into a segment of Python code to represent the mathematical calculation process mentioned in the text, and then compute the final answer and directly print the answer number. Format your output in a JSON format with the key 'Code' for the executable code and 'Analysis' to explain how you transfer the sample into code. The input sample is:

```
{expression}.
```

**Math Eval Compare Prompt Template**

I will provide you with two answers, and I need you to help me determine whether these two answers are semantically equivalent. For example, '2' and 'two' are considered equivalent. If they are equivalent, please reply with 'True'. If they are not equivalent, reply with 'False'. Note that you should only reply with one word (either 'True' or 'False') and not include any other content. Here are two responses: '{response1}', '{response2}'.

**Feedback Prefix Prompt Template**

The following is human feedback on some of the generated samples and your generated samples need to refer to the suggestions in the human feedback:



## 14 RESULT EVALUATION

For each dataset, we evaluate the performance of LLMs using the LLM-as-a-Judge methodology (Zheng et al., 2023), which is widely recognized for its robust evaluation capabilities (Liu et al., 2023c; Kim et al., 2024; Zhu et al., 2023; Lin and Chen, 2023). This method has demonstrated superior assessment accuracy compared to traditional rule-based methods (e.g., keyword matching (Zou et al., 2023)). Below is the prompt template we utilize for evaluation:

### Prompt Template for Evaluation

```
You are a professional data annotator. Your task is to compare a
model-generated answer to the groundtruth (correct) answer for a
given question.
Instructions:
1. Read the provided question.
2. Identify and note the final answer generated by the model.
3. Compare this model-generated answer with the groundtruth answer.
4. Use the JSON format below to indicate whether the model's final
answer matches the groundtruth answer.
Details:
- Question: [[question]]
- Model generated answer: [[solution]]
- Groundtruth answer: [[correct answer]]
Response Format:
{
  "Model Final Answer": "<Extracted answer from model>",
  "Groundtruth Answer": "<Provided correct answer>",
  "is_same": true/false
}
```

For the user constraint evaluation, we show the prompt as follows:

### Prompt Template for Evaluation

```
You are a professional data annotator. Given a question, your task
is to determine whether the question is related to [[constraint]].
Here is the question to evaluate: [[text]]
Only reply YES or NO.
```

## 15 CODE FRAMEWORK

```

1836
1837
1838 1 class DataGen:
1839 2     def __init__(self,
1840 3         model,
1841 4         generation_number,
1842 5         openai_api,
1843 6         batch_size,
1844 7         dataset_description,
1845 8         dataset_constraint="",
1846 9         dataset_name="",
1847 10        temperature=1,
1848 11        few_show_num=5,
1849 12        max_tokens=1000,
1850 13        with_label=True,
1851 14        max_worker=2,
1852 15        embedding_model="text-embedding-ada-002",
1853 16        label_ratio=None,
1854 17        **kwargs):
1855 18        self.model = model
1856 19        self.openai_api = openai_api
1857 20        self.dataset_description = dataset_description
1858 21        self.dataset_constraint = dataset_constraint
1859 22        self.dataset_name = dataset_name
1860 23        self.temperature = temperature
1861 24        self.few_show_num = few_show_num
1862 25        self.max_tokens = max_tokens
1863 26        self.with_label = with_label
1864 27        self.max_worker = max_worker
1865 28        self.generation_number = generation_number
1866 29        self.embedding_model = embedding_model
1867 30        self.label_ratio = label_ratio
1868 31        self.batch_size = batch_size
1869 32        self.prompt_template = file_process.load_json('config.json')['
1870 33        prompt"]
1871 34        openai.api_key = self.openai_api
1872 35
1873 36        def initialize_prompt(self):
1874 37            [implement code]
1875 38
1876 39        def extract_data_item(self, text):
1877 40            [implement code]
1878 41
1879 42        def example_selection(self, data, random=False):
1880 43            [implement code]
1881 44
1882 45        def add_constraints(self, constraints):
1883 46            [implement code]
1884 47
1885 48        def add_attribute(self, customization=False, data=None):
1886 49            [implement code]
1887 50
1888 51        [More Functions]
1889

```