MAGIC: EVALUATING MULTIMODAL COGNITION TOWARD GROUNDED VISUAL REASONING

Anonymous authors

000

001

003 004

006

008 009

010 011

012

013

014

015

016

017

018

019

021

024

025

026

027 028 029

031

033

034

037

040

041

042

043 044

046

047

048

051

052

Paper under double-blind review

ABSTRACT

Recent advances in large vision-language models have led to impressive performance in visual question answering and multimodal reasoning. However, it remains unclear whether these models genuinely perform grounded visual reasoning or rely on superficial patterns and dataset biases. In this work, we introduce MAGIC, a comprehensive benchmark designed to evaluate grounded multimodal cognition—assessing not only answer accuracy but also the quality of step-by-step reasoning and its alignment with relevant visual evidence. Our benchmark includes 5,534 weakly supervised QA examples generated from strong model outputs and 896 human-curated examples with fine-grained annotations, including answers, rationales, and bounding box groundings. We evaluate 15 vision-language models ranging from 7B to 70B+ parameters across four dimensions: final answer correctness, reasoning validity, grounding fidelity, and self-correction ability. MAGIC further includes diagnostic settings to probe model robustness under adversarial visual cues and assess their capacity for introspective error correction. We introduce new metrics such as *MagiScore* and *StepSense*, and provide comprehensive analyses that reveal key limitations and opportunities in current approaches to grounded visual reasoning.

1 Introduction

Recent advances in large vision-language models (LVLMs) have substantially improved visual question answering and reasoning. Proprietary models such as GPT-4V (OpenAI, 2023), Gemini (Google, 2023), and Claude-3 (Anthropic, 2024), along with open-source counterparts like LLaVA (Liu et al., 2023), Qwen-VL (Bai et al., 2023), and DeepSeek-VL (Lu et al., 2024), exhibit strong capabilities in perception, object recognition, and complex visual understanding. However, these successes raise a deeper question: Do current multimodal models genuinely reason over visual content, or do they rely on superficial patterns and dataset biases?

Addressing this question requires a closer examination of grounded multimodal cognition—the ability to selectively attend to relevant visual inputs and integrate them into coherent, multi-step logical reasoning. This ability is central to human intelligence and is critical for building interpretable, trustworthy AI systems. For instance, as illustrated in our example in Figure 1, robust reasoning requires the model to justify its answer by explicitly referencing the correct visual regions and following a logical inference path.

Yet, most existing benchmarks primarily focus on end-task performance, offering limited insight into whether models truly "understand" the image or simply exploit dataset biases. They rarely examine how models arrive at answers, whether intermediate reasoning steps align with relevant visual regions (Li et al., 2023a; Liu et al., 2024; Yu et al., 2024; Yu et al., 2024) Recently, increasing attention has been given to the reasoning processes of VLMs, with several works examining their chain-of-thought reasoning (Zhang et al., 2024a; Zhao et al., 2025; Chen et al., 2023), intermediate rationale generation (Chen et al., 2023), and visual grounding consistency (Yang et al., 2023; He et al., 2024). However, these efforts remain fragmented, often lacking unified evaluation protocols and comprehensive grounding diagnostics.

In this work, we introduce a comprehensive benchmark, MAGIC (BenchMArkinG MultImodal Cognition), designed to evaluate grounded multimodal cognition. As illustrated in the right section of

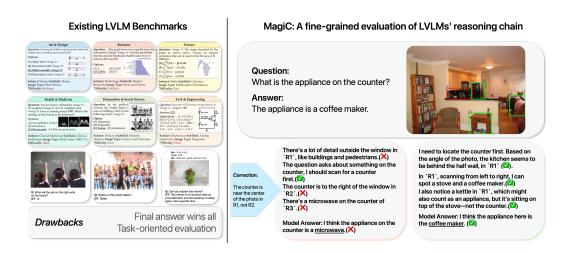


Figure 1: Example scenarios from **MAGIC**. Existing work mainly focuses on evaluating the final answer for a given task ignoring the steps model takes to answer.

Figure 1, our framework goes beyond conventional question answering by measuring a model's ability to (1) generate correct final answers, (2) articulate coherent, interpretable step-by-step reasoning, (3) ground each reasoning step in the appropriate visual evidence, and (4) intervene upon and revise faulty reasoning when possible.

To support this evaluation, we construct a dual-sourced dataset consisting of 5,534 weakly-supervised visual reasoning instances and 896 human-curated instances with over 15,000 annotated reasoning steps. The weakly supervised data is automatically derived from the outputs of high-performing vision-language models across 78 diverse question types, enabling broad coverage with minimal annotation cost. In contrast, the human-curated set includes fine-grained annotations—answers, reasoning rationales, and bounding box groundings—with a held-out test set of 698 instances for rigorous evaluation.

We evaluate 15 vision-language models ranging from 7B to 70B+ parameters, including both open-source and proprietary systems. Our evaluation framework captures four dimensions of model performance: short-form and long-form answer correctness, reasoning validity, grounding quality, and self-correction ability. Grounding quality is quantified using MAGISCORE, which measures the overlap between predicted and reference bounding boxes. To assess models' introspective capabilities, we further analyze their ability to detect and revise intermediate reasoning errors.

In addition to standard performance metrics, **MAGIC** introduces several diagnostic settings that probe robustness and interpretability. The adversarial grounding setting evaluates models under misleading or irrelevant visual cues to test their reliance on correct evidence. The self-correction analysis examines whether a model can recognize and revise its own reasoning errors. Finally, we conduct a human evaluation of reasoning quality on a subset of four models, deriving the *StepSense* score that captures coherence and factual consistency.

In summary, our contributions are as follows:

- First, we introduce a novel task that jointly evaluates answer correctness, step-by-step reasoning quality, and visual grounding fidelity.
- Second, we construct a benchmark dataset comprising 5,534 weakly supervised interleaved bounding-box QA examples and 896 high-quality human-curated examples with detailed annotations for answers, rationales, and bounding boxes.
- Third, we introduce novel evaluation metrics, MAGISCORE tailored to multimodal cognition, with *StepSense* and *Self-Heal* which measures model reasoning quality and self-correction ability.
- Lastly, we conduct a comprehensive analysis of 15 state-of-the-art models, uncovering key
 insights into both the limitations and potential of current approaches to grounded visual

reasoning. Our findings indicate that models exhibiting precise region focus are generally more likely to answer questions correctly.

We hope this benchmark will catalyze future research toward building more interpretable, robust, and cognitively aligned multimodal systems.

2 RELATED WORK

2.1 BENCHMARKS FOR LARGE VISION-LANGUAGE MODELS

Ever since the introduction of large vision-language models (LVLMs) such as BLIP (Li et al., 2023b) and LLaVA (Liu et al., 2023), the field has seen rapid advancements in both model scaling and evaluation methodologies. Researchers have increasingly focused on scaling models at test time to push the boundaries of what these systems can achieve. Alongside these developments, there has been a notable surge in the creation of new benchmarks specifically designed to assess the visual reasoning capabilities of LVLMs, moving beyond traditional vision tasks like Visual Question Answering (VQA). Recent benchmarks such as MMBench (Liu et al., 2024), MMMU (Yue et al., 2024), SEED-Bench (Li et al., 2023a), and MM-Vet (Yu et al., 2024) now provide more comprehensive and fine-grained evaluations, covering a wider variety of visual reasoning challenges. However, most of these benchmarks still primarily measure end task performances and do not delve deeply enough into the quality of LVLMs' reasoning process. Despite efforts on visual chain of thought (CoT) (Chen et al., 2023; Rose et al., 2024; Zhang et al., 2024a; Chen et al., 2024; Menon et al., 2024; Shao et al., 2025; Wu et al., 2025; Xu et al., 2025; Thawakar et al., 2025), evaluating their explicit reasoning quality remains an extremely challenging problem and the current methods leave substantial room for improvement.

2.2 GROUNDING IN VISION TASKS


In order to address the gap in existing benchmarks, we examine in particular how well textual reasoning steps remain *grounded in visual input*. Visual grounding has typically been studied in relation to the internal activations of vision encoders and/or in the context of specific visual task (Khan et al., 2022; Yang et al., 2023; He et al., 2024; Reich & Schultz, 2024; Cheng et al., 2024; Wan et al., 2024; Chen et al., 2025) However, our work examines visual grounding more generally in the context of LVLMs' explicit reasoning - if the textual reasoning loses its connection to visual reality, the generated explanations and answers, no matter how fluent, may be incorrect or irrelevant. Our work aims to provide methods for tracing and evaluating this connection throughout the reasoning process.

3 THE MAGIC BENCHMARK

We introduce MAGIC, the first benchmark dataset specifically designed to evaluate a model's ability to selectively attend to relevant visual information and integrate it into coherent, multi-step logical reasoning. MAGIC contains 698 test question-and-reasoning pairs, each densely annotated with step-wise correctness labels and corresponding natural-language corrections. The test set encompasses 41 distinct question subtypes derived from the GQA dataset (Hudson & Manning, 2019), categorized into five primary question types: 1) Verify: Binary yes/no questions. 2) Query: Open-ended questions. 3) Choose: Questions offering a choice between two alternatives (e.g., "Is it red or blue?"). 4) Logical: Questions requiring logical inference. 5) Compare: Questions involving comparisons between two or more objects.

Detailed statistics of the dataset are summarized in Table 1. In total, we collected 896 annotated questions, comprising correctness annotations for 8403 individual reasoning steps and 2700 natural-language corrections. In which, 198 are reserved for development and 698 for test, and the test set is used as the **MAGIC** benchmark. The distribution of the question types of the test set can be found at Figure 2.

The construction of MAGIC involves three main steps: task-input processing, response collection, and human correction collection. Examples of the dataset, are available in the Appendix B.



Set	WS*	Dev	Test
# of Instances	5534	198	698
# of Steps	69523	2373	8403
Avg. Words/Step	23	18	19
Avg. Steps/Inst.	12.00	11.98	12.03
# of Correction	N/A	641	2700
Avg. Words	N/A	18	19

Table 1: Dataset statistics. WS: Weakly supervised split

Figure 2: Question type distributions. *Detailed distribution of detailed types can be found in Figure 6.*

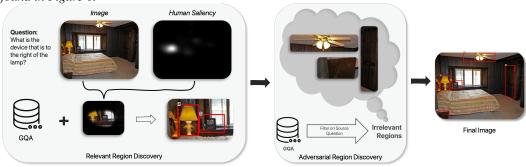


Figure 3: Illustration of Task-Input Data Construction Processing. *Human saliency maps are used only during construction to identify relevant regions and are never provided to LVLMs at evaluation time.*

3.1 TASK-INPUT CONSTRUCTION

We obtain images (I), questions (Q), and short/full ground-truth answers (GT_{short}, GT_{full}) from the GQA dataset (Hudson & Manning, 2019). We restrict our selection to the public val splits aim to minimize the likelihood of dataset overlap with existing model knowledge. Additionally, we incorporate human saliency maps $(Saliency_q)$ from AiR-D (Chen et al., 2020), which are based on human eye-tracking data, providing higher quality saliency regions compared to pointer-based counterparts. Although AiR-D contains saliency maps corresponding to both correct and incorrect human answers, we only utilize those maps associated with correct responses.

As illustrated in the relevant region discovery section in Figure 3, for each question Q and its associated saliency map $Saliency_q$, we identify candidate "hotspot" regions that received significant human attention. Bounding boxes for these regions are extracted and merged with the annotated objects from GQA, forming an initial set of relevant regions. These regions are further processed to eliminate overlaps or merge boxes where necessary, resulting in the final set of relevant bounding boxes, $RBox_q$, for question Q.

Next, building upon the identified relevant regions $(RBox_q)$ and GQA's image-level object annotations, we select additional image regions relevant to other GQA questions but irrelevant to the current question Q, as demonstrated in Figure 3. These are termed adversarial regions. We randomly sample adversarial regions that do not overlap with any region in $RBox_q$, creating the set $ABox_q$. To ensure sufficient adversarial content, we sample three adversarial regions per question; if fewer than three such regions exist, additional regions are generated randomly. We henceforth refer to $Box_q = RBox_q \cup ABox_q$ as the candidate box set and to the labels indicating which boxes are relevant as the ground-truth relevance. A detailed implementation can be found in algorithm 1.

This step yields tuples of the form (I_q, Box_q, Q_q, A_q) for each question q.

3.2 LVLM RESPONSE COLLECTION

Using the processed input data, we collect responses from four LVLMs representing four different model families: INTERNVL-2.5 8B, GEMMA 3 27B, QWEN2.5-VL 7B, and OPENAI GPT-40.

Each model is prompted using in-context learning (ICL) examples created in-house, provided with inputs (I_q,Q_q) , and tasked to generate step-by-step reasoning from the first-person perspective, concluding with a final answer.

Responses exhibiting invalid formatting or repetitive reasoning loops are filtered out. Remaining valid responses are segmented into individual sentences, each representing a distinct reasoning step S_i . From these valid responses, we randomly select one reasoning sequence per question (S_q) , which is then densely annotated by human annotators.

3.3 REASONING CORRECTION COLLECTION

We recruit four expert annotators (computer science students with relevant experience) to evaluate and correct the sampled model responses. Annotators begin by annotating ten practice examples, which serve as training materials and are discarded thereafter. In the annotation phase, annotators first verify the quality of each question and compare the model's final answer against the ground truth. Subsequently, they assess the correctness of each individual reasoning step S_i . This annotation archives a substantial inter-annotator agreement of 0.72 Cohen's Kappa. Annotators are required to document any ambiguities, poorly formulated questions, or reasoning steps requiring reconsideration. A discussion session is conducted after every 100 annotated examples to resolve disagreements and collectively refine annotations.

For each incorrect reasoning step S_i , annotators will also provide a corrected natural-language version. These corrections are complete rewrites rather than simple critiques, intended to maintain coherent and logical reasoning when replacing the original step.

After completing this annotation step, each question Q is associated with an annotated reasoning sequence $S_q = \{s_1, s_2, \dots, s_n\}$, where each element s_n consists of the original reasoning step, a correctness label, and its corresponding correction $s_n = (original, correctness, correction)$.

3.4 WEAKLY SUPERVISED DATASET

In addition to the human-annotated dataset, we also created a weakly supervised dataset following the pipeline similar to that described in Section 3.1. The weakly-supervised split omits human saliency but derived its boxes from GQA's object bounding boxes. To avoid overlap with our test set, images included in this dataset are distinct from those in the primary annotated set. Model responses in this version were collected using inputs (I_q,Q_q,A_q) without adversarial regions to produce cleaner reasoning data.

4 TASK OVERVIEW

Using an image-question pair (I,Q) from the **MAGIC** benchmark, we sample model responses from Large Vision-Language Models (LVLMs), denoted by $S_{\mathcal{LM}}$. The response from a given model can be represented as $S_{\mathcal{LM}} = [s_1, s_2, \ldots, s_n]$, where n is the number of reasoning steps generated by the model, along with the model's final answer $A_{\mathcal{LM}}$. Additionally, the dataset provides ground-truth bounding boxes Box_q and corresponding ground-truth answers in both short and long form, denoted by (GT_{short}, GT_{full}) . Each question Q also includes a human-corrected reasoning chain, S_q . Utilizing the tuple $(I,Q,Box_q,S_{\mathcal{LM}},A_{\mathcal{LM}},GT_{short},GT_{full},S_q)$, we evaluate LVLMs on the following three tasks:

4.1 REGION FOCUS

For each question Q, a LVLM generates a reasoning chain $S_{\mathcal{LM}} = [s_1, s_2, \ldots, s_n]$. We introduce the region extractor function $\phi(\cdot)$ that maps each reasoning step s_i to a set of bounding box indices from Box_q , defined as $\phi(s_i) \subseteq \{1, \ldots, |Box_q|\}$. By taking the union of these regions across all reasoning steps, we derive the complete set of regions the model focused on as part of its reasoning: $\hat{\mathcal{R}} = \bigcup_{i=1}^n \phi(s_i)$.

We can then represent the set of unique regions explored by the model as a binary vector: $\hat{\mathbf{y}} \in \{0,1\}^{|Box_q|}$, where $\hat{\mathbf{y}}_k = \mathbb{1}[k \in \hat{\mathcal{R}}]$. Here, $\hat{\mathbf{y}}_k = 1$ indicates that at least one reasoning step

utilizing the k-th bounding box. Analogously, we have the ground-truth vector from the benchmark: $\mathbf{y}^* \in \{0,1\}^{|Box_q|}$, where $\mathbf{y}_k^* = 1$ if and only if the k-th box in Box_q is labeled as relevant.

Using \hat{y} and y^* , we evaluate two variants of region-focus scores:

MAGISCORE (micro): Aggregating predictions across all images, we calculate precision, recall, and F_1 scores based on cumulative totals of true positives, false positives, and false negatives. MAGISCORE (macro): For each question Q, we first compute image-level precision, recall, and F_1 individually. The macro-level score is then obtained by averaging these metrics across all questions.

Note that the primary goal of MAGISCORE is to assess visual grounding and reasoning capabilities independently of object detection performance, making the metrics distinct from the detection-oriented measures such as Intersection over Union (IoU). Detailed illustration of the score calculation is in Appendix D.

4.2 LLM-ASSISTED FINAL ANSWER ACCURACY

While Hudson & Manning (2019) propose exact match as the evaluation metric for answer accuracy, this approach has notable limitations when evaluating natural language responses generated by LVLMs. Specifically, exact match fails to recognize synonymous or semantically equivalent responses (e.g., "tan" vs. "brown") and may incorrectly reward random occurrences of the ground-truth term within longer responses. Therefore, we propose an LLM-assisted evaluation approach by leveraging a large language model as a judge to more effectively assess correctness.

The LLM-based judge is modeled as the following: $f_{\mathcal{LM}}: P(A_{\mathcal{LM}}, GT_{full}) \mapsto \{0, 1\}$

This function classifies a model's predicted answer $A_{\mathcal{LM}}$ against a provided ground-truth answer. Using this function, we define two accuracy measures:

- 1. Short Answer Accuracy (Acc_{short}): evaluates whether the predicted answer captures essential elements indicated by the short ground-truth answer: $Acc_{short} = \frac{1}{|\mathcal{D}|} \sum_{(I,Q) \in \mathcal{D}} f_{\mathcal{LM}} (A_{\mathcal{LM}}, GT_{short})$
- **2. Full Answer Accuracy** (Acc_{full}): evaluates whether the predicted answer aligns comprehensively with the detailed ground-truth answer: Acc_{full} = $\frac{1}{|\mathcal{D}|} \sum_{(I,Q) \in \mathcal{D}} f_{\mathcal{LM}} (A_{\mathcal{LM}}, GT_{\text{full}})$

The short-answer accuracy measure can be viewed as a more permissive evaluation metric compared to full-answer accuracy, as it only requires capturing core semantic elements identified by the concise ground-truth answer.

4.3 Self-Correction

For each question Q, the benchmark provides human-corrected reasoning chains, denoted as $S_q = [s_1, s_2, \ldots, s_n]$, where each step has been labeled with correctness and natural language correction if is incorrect. Given the annotated reasoning chain S_q , we identify contiguous subsequences of incorrect reasoning steps marked by human annotators as $S_{wrong} = [s_i, \ldots, s_j]$, with indices $2 \le i \le j \le n-2$.

To evaluate the self-correction ability of the LVLM, we design an intervention experiment. Specifically, we inject the initial reasoning steps up to and including the incorrect step, i.e., the subsequence $[s_1, s_2, \ldots, s_j]$, into model's response. With this partial reasoning chain as context, the LVLM continues to generate subsequent reasoning steps, resulting in an extended reasoning chain defined as $S_{rest} = [s'_{j+1}, s'_{j+2}, \ldots, s'_{n'}]$. Here, S_{rest} represents the model's attempt to self-correct previously identified erroneous reasoning while continuing to answer the given question Q.

We again employ an LLM-based judge to identify the presence of these human corrections within the model-generated steps in S_{rest} . The model returns 1 if any of the reasoning steps within S_{rest} semantically match the corresponding human correction steps from $[s_i, s_{i+1}, \ldots, s_j]$, and 0 otherwise.

Aggregating across all the incorrect subsequences identified by annotators, we compute the score for *Self-Heal* as the fraction of instances in which the LVLM successfully corrects the injected erroneous reasoning step.

5 EXPERIMENT AND RESULTS

In this section, we perform a series of experiments on multiple state-of-the-art LVLMs to examine their visual grounding abilities and overall reasoning quality. We found that accuracy climbs almost linearly with how model's focus aligns to relevant regions, and scaling boosts its performance on region focusing, reasoning and self-correction.

5.1 EXPERIMENTAL SETTINGS

We evaluate a total of 12 open-source, general-purpose LVLMs without test-time inference scaling capabilities, including LLaVA-OneVision-Chat (Xiong et al., 2024), InternVL 2.5-MPO (Wang et al., 2024), Qwen2.5-VL (Bai et al., 2025), Llama-3.2 (AI@Meta, 2024), Aya Vision (CohereForAI, 2025), and Gemma 3(Team, 2025). Additionally, we evaluate the only open-source model equipped with test-time inference scaling to the best of our knowledge, QvQ (QwenTeam, 2024)¹, and two proprietary LVLMs from OpenAI: GPT-40-mini (Hurst et al., 2024) and GPT-4.1 (OpenAI, 2025).

As described in section 4, for each image-question pair (I,Q) in the test set, models are instructed to generate detailed reasoning steps required to answer the provided question, based on the associated image with clearly marked bounding boxes. As constructed in section 3.1, the test set includes both relevant and adversarial boxes by default, and models are evaluated under this mixed candidate set. Both the reasoning steps and final answers produced by each model are extracted for evaluation. Additional experimental details can be found in the Appendix C.

M 1.1	Size	Think	Final Answer		MAGISCORE (Macro)			MAGISCORE (Micro)		
Model		Capability	Full	Short	Precision	Recall	F1	Precision	Recall	F1
Small (~7B) Open LVLM										
LLaVA OneVision	7B	No	49.00	54.01	48.31	35.33	37.79	77.78	32.72	46.06
InternVL 2.5-MPO	8B	No	49.86	50.00	65.61	53.50	54.12	66.61	50.90	57.71
Aya Vision	8B	No	45.13	50.00	78.63	50.32	56.74	89.02	43.83	58.74
InternVL 3	9B	No	49.43	56.45	69.62	58.09	58.31	66.60	53.34	59.24
Qwen2.5-VL	7B	No	51.00	55.30	53.49	42.60	43.15	67.93	38.51	49.15
Medium (11∼32B) Open LVLM										
Gemma 3	12B	No	50.00	54.58	76.49	69.15	67.69	73.03	64.45	68.47
InternVL 2.5-MPO	26B	No	36.39	40.69	71.47	58.17	59.44	76.59	53.30	62.86
Gemma 3	27B	No	50.29	52.44	69.46	73.23	66.48	66.61	70.07	68.30
Aya Vision	32B	No	47.71	52.44	84.68	57.23	63.15	87.74	51.24	64.70
Qwen2.5-VL	32B	No	59.74	63.32	73.85	57.03	59.18	69.07	51.42	58.95
Large (72~90B) Open LVLM										
Llama 3.2 Vision	90B	No	35.67	39.97	46.28	37.55	38.29	83.35	33.49	47.78
Qwen2.5-VL	72B	No	61.03	66.05	60.80	80.95	63.37	56.82	75.43	64.81
QvQ	72B	Yes	59.89	64.04	47.43	89.35	60.26	53.51	88.46	66.69
Proprietary LVLMs										
GPT 4o mini	N/A	No	51.72	55.01	69.03	79.14	66.77	63.88	67.71	65.74
GPT 4.1	N/A	No	71.78	74.36	65.98	71.10	63.73	61.62	74.01	67.25

Table 2: Performance comparison. The best performing models for each metrics are shown in **bold**.

5.2 Main Results

Focusing on the right place leads to higher answer performance. Across the 15 LVLMs evaluated in Table 2, we find that the models with higher MAGISCORE tend to perform better in answering the question itself. This pattern holds for both small- and large-scales, suggesting that the ability to selectively attend to relevant regions is a strong indicator for the correctness of models' final answer. For example, GEMMA 3 12B, which scored 67.7% in attention, achieved 54.6% in short answer accuracy, while LLAMA 3.2-90B, scored 38.3% in attention only and subsequently achieved 39.97% in answer accuracy. We notice that the QWEN2.5-VL models generally tend to have lower attention scores than their peers despite high short-answer accuracies. We speculate that the attention scores gap with other models probably comes from Qwen's training recipe (Bai et al., 2025), which includes pre-training on various VQA datasets, and grounding data with absolute position references, which

¹Note that we do not provide QvQ with ICL examples unlike other models, as by default QvQ explicitly generates its intermediate reasoning towards the answer.

may interfere with the models' ability to make *relative* references using specific schemes such as our bounding boxes.

Region focus as an emergent ability of larger models. As shown in Figure 4, we observe that scaling model sizes could lead to better performance in utilizing the relevant regions. Medium-sized (11-32B) LVLMs are on the sweet spot in terms of both region attention performance and final answer performance, as we can see that they generally tend to have higher region attention scores than smaller models. This is followed by higher final answer scores, in terms of both full and short answers. Large-sized (72B+) models seem to provide further performance gains over medium-sized models. For QWEN2.5-VL models (7B, 32B, 72B) with lower attention scores than their respective peers, we can still see that the overall trend still holds within these three models.

Attention capabilities of test-time scaling models. It is interesting to note that the only vision test-time scaling model we test, QVQ, achieves comparable performance to QWEN2.5-VL 72B, despite not being provided with our in-context learning examples of utilizing bounding boxes for reasoning. We can see that as part of its test-time scaling, QVQ could already generate reasoning that effectively considers the bounding boxes we inject into test images. However, the model tends to perform exhaustive coverage of all bounding boxes, as evidenced by low precision in micro and macro attention scores. While it remains to be seen whether this would be the case for other comparable models, we see a great potential of better visual grounding to be achieved with test-time scaling.

Model	Size	Accuracy		
Model	Size	StepSense	Answer	
QwenVL 2.5	7B	61.38	69.98	
InternVL 2.5	8B	48.99	48.69	
Gemma 3	27B	52.13	55.1	
GPT 40 mini	N/A	53.89	59.26	

Model	Size	Self-Heal
LLaVA OneVision	7B	25.99
Gemma 3	12B	31.5
Qwen2.5-VL	7B	35.03
Qwen2.5-VL	32B	41.38
Qwen2.5-VL	72B	46.89

Table 3: StepSense and final answer accuracy

Table 4: Self-Heal accuracy




Figure 4: Scaling curve for MAGISCORE

Sound intermediate reasoning, sound final answer. Human-annotated evaluation from Table 3 shows that models with higher sentence-level reasoning accuracy almost always enjoy higher final-answer accuracy - for example, QWEN2.5-VL 7B leads both metrics (61.4% vs. 70.0%), while INTERNVL 8B trails on both. Together with our findings in region focus, this supports a three-step chain: a precise perception with reliable reasoning can result in correct answers. Improving any links in that chain, and especially the visual grounding link, therefore remains a direct path to better overall performance.

Stronger models correct themselves better. The self-correction results in Table 4 echo the same scaling story. Each jump in QWEN2.5-VL size yields roughly a six-point boost in correction accuracy. We also tested two models, LLaVA-OneVision 7B and Gemma 3 12B, which achieved short answer performance similar to QWEN2.5-VL 7B. However, we can see that both models lag noticeably behind QWEN2.5-VL 7B, showing that stronger model's tend to have better self-correction capabilities. as well.

5.3 ERROR ANALYSIS

We randomly sample 100 instances of failed reasoning from all 15 LVLMs we have tested and analyze their failure points. Figure 5 shows a list of failed examples. We identify the following common error patterns:



I'm looking for furniture, so I should look at the base of this TV. There's a large, dark wooden piece of furniture underneath it, in `R2`. It appears to be a cabinet or a console of some sort.

Incorrect object location (Gemma 3)



Let me start by checking the bounding boxes. In `R4`, I see a dispenser mounted on the wall. It looks to be a soap or lotion dispenser. Next, I should search for any painting nearby.

Incorrect region description (GPT 4o-mini)



Next, I'll look at region `R2`, which is to the right of region `R1`. This region may be part of a shelf or another segment of the tabletop.

Incorrect spatial orientation (InternVL2.5)



Looking at the bounding boxes:

- 1. Box 1 is around a wooden bowl on a countertop to the right.
- Box 2 is near some hanging utensils.
 Box 3 is around a wooden cabinet or dresser.
- 4. Box 4 is near a chair close to the window.
- 5. Box 5 is on a wall cabinet to the left. 6. Box 6 is around a hanging spatula or similar utensil.
- 7. Box 7 is around a samovar or tea pot on the left side.

The question mentions a wood bowl and a utensil on the right. So, I need to identify the positions of these specific items.

Exhaustive use of bounding boxes (QVQ)

Figure 5: **Examples of failed reasoning.** Adversarial boxes are labeled in green.

Exhaustive coverage of all regions In many cases, the models tend to exhaustively consider all bounding boxes that appear in the image, despite our instruction to selectively utilize bounding boxes that are relevant for answering the question. Moreover, it is often found that models decide to continue iterating through every single bounding boxes, even though it has already inspected other bounding boxes and realized the answer to the question. This is a potentially problematic behavior as it is not only inefficient to consider irrelevant regions, but also could increase the chances of hallucination over analysis into regions that are actually relevant. We find that this is especially the case for QvQ, which is trained to generate longer chains of reasoning by default.

Incorrect object location Another pattern we have identified is that even though the models correctly identified relevant details required to answer the question, they often hallucinate by claiming that such details appear in unrelated bounding boxes. For example, in the top left example of Figure 5, it is true that there is a dark wood piece of furniture under the TV. However, the model incorrectly claims that it is located in R2, not R5.

Wrong spatial relations between the bounding boxes Related to the issue of incorrect object location, we also see that the models often seem to experience issues with spatial orientation, as evidenced by the bottom left image of Figure 5. While R2 is actually located to the left of region R1, the model incorrectly claims that it is actually to the *right* of R1.

Incorrect region description Even when the model has identified and analyzed relevant bounding boxes, we found that the model output incorrect details of the region. In the bottom right image of Figure 5, the model was able to correctly choose R4 as part of its analysis and identifies the soap dispenser in the region. However, it fails to see that the painting in question is also in R4.

6 CONCLUSION

This paper introduced **MAGIC**, a novel benchmark designed to evaluate grounded multimodal cognition. We evaluated 15 LVLMs ranging from 7B to 70B+ parameters across four dimensions: final answer correctness, reasoning validity, grounding fidelity, and self-correction ability. Our analysis shows that the models that could focus better on relevant regions tend to achieve better task performance, and such focusing ability improves with increased model sizes. However, we also found that current SOTA LVLMs all suffer from various types of region focus failures, including incorrect object location, wrong spatial relations, and inaccurate region descriptions.

REFERENCES

- AI@Meta. Llama 3 model card. 2024. URL https://github.com/meta-llama/llama3/blob/main/MODEL_CARD.md.
- Anthropic. Introducing the next generation of claude. 2024. URL https://www.anthropic.com/news/claude-3-family.
 - Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities. arXiv preprint arXiv:2308.12966, 2023.
 - Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibo Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report, 2025. URL https://arxiv.org/abs/2502.13923.
 - Ruoyu Chen, Siyuan Liang, Jingzhi Li, Shiming Liu, Maosen Li, Zhen Huang, Hua Zhang, and Xiaochun Cao. Interpreting object-level foundation models via visual precision search. In 2025 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR), pp. 30042–30052, 2025. doi: 10.1109/CVPR52734.2025.02796.
 - Shi Chen, Ming Jiang, Jinhui Yang, and Qi Zhao. AiR: Attention with reasoning capability. In *European Conference on Computer Vision (ECCV)*, 2020.
 - Yangyi Chen, Karan Sikka, Michael Cogswell, Heng Ji, and Ajay Divakaran. Measuring and improving chain-of-thought reasoning in vision-language models. In Kevin Duh, Helena Gomez, and Steven Bethard (eds.), *Proceedings of the 2024 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies (Volume 1: Long Papers)*, pp. 192–210, Mexico City, Mexico, June 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.naacl-long.11. URL https://aclanthology.org/2024.naacl-long.11/.
 - Zhenfang Chen, Qinhong Zhou, Yikang Shen, Yining Hong, Hao Zhang, and Chuang Gan. See, think, confirm: Interactive prompting between vision and language models for knowledge-based visual reasoning. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2023. URL https://arxiv.org/abs/2301.05226.
 - An-Chieh Cheng, Hongxu Yin, Yang Fu, Qiushan Guo, Ruihan Yang, Jan Kautz, Xiaolong Wang, and Sifei Liu. Spatialrept: Grounded spatial reasoning in vision-language models. In A. Globerson, L. Mackey, D. Belgrave, A. Fan, U. Paquet, J. Tomczak, and C. Zhang (eds.), Advances in Neural Information Processing Systems, volume 37, pp. 135062–135093. Curran Associates, Inc., 2024. URL https://proceedings.neurips.cc/paper_files/paper/2024/file/f38cb4cf9a5eaa92b3cfa481832719c6-Paper-Conference.pdf.
 - CohereForAI. Aya-vision model card. 2025. URL https://github.com/huggingface/transformers/blob/main/docs/source/en/model_doc/aya_vision.md.
 - Google. Gemini: A family of highly capable multimodal models. *ArXiv*, abs/2312.11805, 2023. URL https://api.semanticscholar.org/CorpusID:266361876.
 - Yujie He, Yujia Wang, Yujia Li, Wei Xu, Kai Xu, and Xin Wang. Improved visual grounding through self-consistent explanations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2024. URL https://arxiv.org/abs/2312.04554.
 - Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning and compositional question answering. *Conference on Computer Vision and Pattern Recognition (CVPR)*, 2019.
 - Aaron Hurst, Adam Lerer, Adam P Goucher, Adam Perelman, Aditya Ramesh, Aidan Clark, AJ Ostrow, Akila Welihinda, Alan Hayes, Alec Radford, et al. Gpt-4o system card. *arXiv preprint arXiv:2410.21276*, 2024.

Aisha Urooj Khan, Hilde Kuehne, Chuang Gan, Niels Da Vitoria Lobo, and Mubarak Shah. Weakly supervised grounding for vqa in vision-language transformers. In *Computer Vision – ECCV 2022: 17th European Conference, Tel Aviv, Israel, October 23–27, 2022, Proceedings, Part XXXV*, pp. 652–670, Berlin, Heidelberg, 2022. Springer-Verlag. ISBN 978-3-031-19832-8. doi: 10.1007/978-3-031-19833-5_38. URL https://doi.org/10.1007/978-3-031-19833-5_38.

Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Benchmarking multimodal llms with generative comprehension, 2023a. URL https://arxiv.org/abs/2307.16125.

Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models, 2023b. URL https://arxiv.org/abs/2301.12597.

Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 34892–34916. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/6dcf277ea32ce3288914faf369fe6de0-Paper-Conference.pdf.

Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi Wang, Conghui He, Ziwei Liu, Kai Chen, and Dahua Lin. Mmbench: Is your multi-modal model an all-around player? In *Computer Vision – ECCV 2024: 18th European Conference, Milan, Italy, September 29–October 4, 2024, Proceedings, Part VI*, pp. 216–233, Berlin, Heidelberg, 2024. Springer-Verlag. ISBN 978-3-031-72657-6. doi: 10.1007/978-3-031-72658-3_13. URL https://doi.org/10.1007/978-3-031-72658-3_13.

Haoyu Lu, Wen Liu, Bo Zhang, Bingxuan Wang, Kai Dong, Bo Liu, Jingxiang Sun, Tongzheng Ren, Zhuoshu Li, Yaofeng Sun, Chengqi Deng, Hanwei Xu, Zhenda Xie, and Chong Ruan. Deepseek-vl: Towards real-world vision-language understanding, 2024.

Sachit Menon, Richard Zemel, and Carl Vondrick. Whiteboard-of-thought: Thinking step-by-step across modalities, 2024. URL https://arxiv.org/abs/2406.14562.

OpenAI. Gpt-4v(ision) system card. 2023. URL https://api.semanticscholar.org/CorpusID:263218031.

OpenAI. Introducing gpt-4.1 in the api. https://openai.com/index/gpt-4-1/, 2025.

QwenTeam. Qvq: To see the world with wisdom, December 2024. URL https://qwenlm.github.io/blog/qvq-72b-preview/.

Daniel Reich and Tanja Schultz. Uncovering the full potential of visual grounding methods in VQA. In Lun-Wei Ku, Andre Martins, and Vivek Srikumar (eds.), *Proceedings of the 62nd Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 4406–4419, Bangkok, Thailand, August 2024. Association for Computational Linguistics. doi: 10.18653/v1/2024.acl-long.241. URL https://aclanthology.org/2024.acl-long.241/.

Daniel Rose, Vaishnavi Himakunthala, Andy Ouyang, Ryan He, Alex Mei, Yujie Lu, Michael Saxon, Chinmay Sonar, Diba Mirza, and William Yang Wang. Visual chain of thought: Bridging logical gaps with multimodal infillings, 2024. URL https://arxiv.org/abs/2305.02317.

Hao Shao, Shengju Qian, Han Xiao, Guanglu Song, Zhuofan Zong, Letian Wang, Yu Liu, and Hongsheng Li. Visual cot: Advancing multi-modal language models with a comprehensive dataset and benchmark for chain-of-thought reasoning, 2024. URL https://arxiv.org/abs/2403.16999.

Gemma Team. Gemma 3 technical report, 2025. URL https://arxiv.org/abs/2503. 19786.

- Omkar Thawakar, Dinura Dissanayake, Ketan More, Ritesh Thawkar, Ahmed Heakl, Noor Ahsan, Yuhao Li, Mohammed Zumri, Jean Lahoud, Rao Muhammad Anwer, Hisham Cholakkal, Ivan Laptev, Mubarak Shah, Fahad Shahbaz Khan, and Salman Khan. Llamav-o1: Rethinking step-by-step visual reasoning in llms, 2025. URL https://arxiv.org/abs/2501.06186.
- David Wan, Jaemin Cho, Elias Stengel-Eskin, and Mohit Bansal. Contrastive region guidance: Improving grounding in vision-language models without training. In *Computer Vision ECCV 2024: 18th European Conference, Milan, Italy, September 29–October 4, 2024, Proceedings, Part LXXIX*, pp. 198–215, Berlin, Heidelberg, 2024. Springer-Verlag. ISBN 978-3-031-72985-0. doi: 10.1007/978-3-031-72986-7_12. URL https://doi.org/10.1007/978-3-031-72986-7_12.
- Weiyun Wang, Zhe Chen, Wenhai Wang, Yue Cao, Yangzhou Liu, Zhangwei Gao, Jinguo Zhu, Xizhou Zhu, Lewei Lu, Yu Qiao, and Jifeng Dai. Enhancing the reasoning ability of multimodal large language models via mixed preference optimization. *arXiv preprint arXiv:2411.10442*, 2024.
- Xueqing Wu, Yuheng Ding, Bingxuan Li, Pan Lu, Da Yin, Kai-Wei Chang, and Nanyun Peng. Visco: Benchmarking fine-grained critique and correction towards self-improvement in visual reasoning, 2025. URL https://arxiv.org/abs/2412.02172.
- Tianyi Xiong, Bo Li, Dong Guo, Huizhuo Yuan, Quanquan Gu, and Chunyuan Li. Llava-onevision-chat: Improving chat with preference learning, September 2024. URL https://github.com/LLaVA-VL/LLaVA-NeXT/blob/main/docs/LLaVA_OneVision_Chat.md.
- Guowei Xu, Peng Jin, Hao Li, Yibing Song, Lichao Sun, and Li Yuan. Llava-cot: Let vision language models reason step-by-step, 2025. URL https://arxiv.org/abs/2411.10440.
- Xiaoyu Yang, Yujia Li, Yunchao Wang, Wei Xu, Kai Xu, and Xin Wang. Improving visual grounding by encouraging consistent gradient-based explanations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, 2023. URL https://arxiv.org/abs/2206.15462.
- Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang, and Lijuan Wang. Mm-vet: evaluating large multimodal models for integrated capabilities. In *Proceedings of the 41st International Conference on Machine Learning*, ICML'24. JMLR.org, 2024.
- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhu Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition* (CVPR), pp. 9556–9567, June 2024.
- Ruohong Zhang, Bowen Zhang, Yanghao Li, Haotian Zhang, Zhiqing Sun, Zhe Gan, Yinfei Yang, Ruoming Pang, and Yiming Yang. Improve vision language model chain-of-thought reasoning. In *Proceedings of the 2024 International Conference on Learning Representations (ICLR)*, 2024a. URL https://arxiv.org/abs/2410.16198.
- Zhuosheng Zhang, Aston Zhang, Mu Li, hai zhao, George Karypis, and Alex Smola. Multimodal chain-of-thought reasoning in language models. *Transactions on Machine Learning Research*, 2024b. ISSN 2835-8856. URL https://openreview.net/forum?id=y1pPWFVfvR.
- Qingqing Zhao, Yao Lu, Moo Jin Kim, Zipeng Fu, Zhuoyang Zhang, Yecheng Wu, Zhaoshuo Li, Qianli Ma, Song Han, Chelsea Finn, Ankur Handa, Ming-Yu Liu, Donglai Xiang, Gordon Wetzstein, and Tsung-Yi Lin. Cot-vla: Visual chain-of-thought reasoning for vision-language-action models. In *Proceedings of the 2025 Conference on Computer Vision and Pattern Recognition (CVPR)*, 2025. URL https://arxiv.org/abs/2503.22020.

DATA STATISTICS

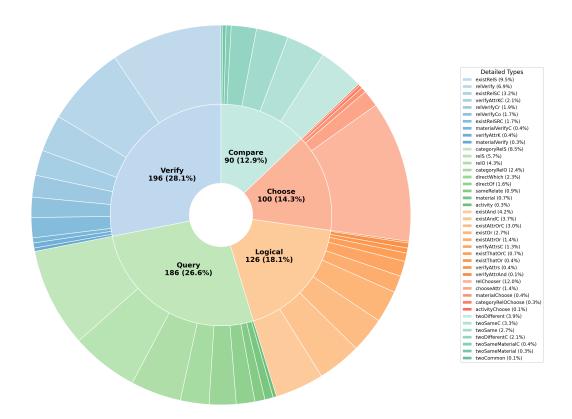


Figure 6: Detailed question type distributions for MAGIC benchmark.

DATA EXAMPLES



Question: Is there a snowboard or a helmet in the picture?

Ground Truth: Yes, there is a helmet.

Model Answer: Yes, there is a helmet.

Legend: Correct

Wrong

Reasoning Steps:

- 1. Okay, so the question asks if there's a snowboard or a helmet in the picture.
- 2. Let's start by looking at the whole image to get a sense of the scene.
- 3. It looks like an outdoor setting with a person on a bicycle and some buildings
- 4. I should start by scanning the image for either a snowboard or a helmet.
- 5. Since bicycles are usually associated with helmets, I'll start by looking at the person in the image.
- 6. I see a person riding a bicycle in the center of the image, near Region 1.
- 7. Let me take a closer look at them.
- 8. Zooming in on Region 1, I can see the person is wearing a helmet.
- 9. That answers the question—there is definitely a helmet in the picture!
- 10. I don't see any snowboards anywhere in the image, though.
- 11. So, no need to look further.
- 12. I can confirm that the question is answered with just the helmet, since there isn't a snowboard in sight.

Figure 7: Example where both reasoning and answer are correct



Question: What is in the pot to the right of the person?

Ground Truth: The flowers are in the pot.

Model Answer: The pot contains flowers.

702 703 704

705

706

708

710

711 712

713

714

715

716

717

718

719

720

721

722 723

730

731

732

733 734

735 736

737

738

739

740

741

742

743

744

745

746

747

748

749 750

751 752

753

754 755 Legend: Correct

Wrong

Reasoning Steps:

- 1. Okay, I need to figure out what is in the pot to the right of the person.
- 2. Let me first take a look at the image to see what we've got.
- 3. It looks like there's a body of water, a bench, and people sitting around tables under umbrellas.
- 4. Now, I need to find a person and then look to their right for a pot.
- 5. I start by scanning for people.
- 6. There are several people gathered around region Region 2, which seems to be the main activity area.
- 7. They are seated and standing around tables with umbrellas.
- 8. I focus on the main activity area and notice a person sitting close to region Region 2.
- **9.** To their right, there is a table, and on top of that table, there is a pot. **Correction**: To their right, there is a big pot on the ground in Region 1.
- 10. I see some greenery in the pot that appears to be flowers.
- 11. So, there is a pot on the table to the right of the person, and it contains flowers. Correction: So, there is a pot on the ground to the right of the person, and it contains flowers.

Figure 8: Example where reasoning is partially incorrect and answer are correct



Question: What is the appliance on top of the counter?

Ground Truth: The appliance is a toaster.

Model Answer: The appliance is a **microwave**.

Legend: Correct

Reasoning Steps:

- 1. Okay, I need to figure out what appliance is on top of the counter.
- 2. Let me take a look at the image.
- 3. It looks like a room with a kitchen area visible.
- 4. There's a person sitting and another one standing, so it seems like it's
- 5. Now, let's see where the counter is located.
- 6. It's probably in the middle of the room.
- 7. I can see a white counter in the image, and it's located in the center part of the picture, starting around Region 1.
- 8. The question asks about an appliance on top of the counter.
- 9. Scanning Region 1, I can spot a microwave.

Correction: Scanning Region 2, I see a white toaster on top of the counter.

- 10. It seems to be placed directly on top of the counter.
- 11. It's a black microwave oven.
- 12. There's also a toaster on the counter to the left of the microwave.
- 13. I should probably focus on the microwave as that seems like the primary appliance.
- 14. I'm pretty confident now.
- 15. The appliance on top of the counter is a microwave. Correction: Thus, the appliance is a toaster.

Figure 9: Example where both reasoning and answer are incorrect, red boxes without correction means manual steer of reasoning from annotator.



Reasoning Steps:

- 1. Okay, I need to find the color of the bottle that is to the right of the plate.
- 2. Let me take a look at the image.
- 3. This appears to be a kitchen scene, with a counter and some appliances.
- **4.** I need to locate the plate and then identify the bottle immediately to its right.
- **5.** Looking around, I see a counter with a lot of items on it in Region 1 and Region 2.
- 6. So, I'm going to start scanning there.
- 7. From that perspective, I see a white plate in Region 2.
- **Correction**: From that perspective, I see a white plate in *Region 1*.
- 8. To the right of that plate, there is a red bottle.
- **Correction**: To the **left** of that plate, there is a red bottle.
- 9. I think the color of the bottle to the right of the plate is red.
- **Correction**: I think the color of the bottle to the **left** of the plate is red.

Legend: Correct Wrong

Figure 10: Example where reasoning is partially incorrect and answer are correct

C REPRODUCIBILITY

We evaluate 13 open LVLMs and 2 proprietary LVLMs as shown in Table 2. We use vllm on all models except LLaVA, Aya Vision, and InternVL which uses transformers library. We set the sampling temperature with the default temperature provided with the each model for the three main tasks. All experiments are performed on either a single Nvidia A100-80GB GPU or Nvidia A100-40GB GPU.

LLM-assisted evaluation uses Qwen/Qwen2.5-72B-Instruct-AWQ with greedy decoding (temp=0) using v1lm on a single Nvidia A100-SXM-80GB GPU.

D MAGISCORE CALCULATION EXAMPLE



Relevant regions: [1, 4] $y^* = [1, 0, 0, 1, 0]$

Used regions: [1, 2, 3]

 $\hat{y} = [1, 1, 1, 0, 0]$

TP = 1; FP = 2; TN = 1; FN = 1 $Precision = \frac{1}{3}; Recall = \frac{1}{2}; F1 = 0.4$

Figure 11: Example on how MAGISCORE are calculated.

E DETAILS ON TASK-INPUT PROCESSING

```
812
            Algorithm 1: Generate and Save Relevant Bounding Boxes
813
            Function FindBboxes (s_path, img_size):
814
                 M \leftarrow \text{load\_gray}(s\_path) \rightarrow \text{resize}(img\_size) \rightarrow [0,1]
815
                 B \leftarrow (M > \text{thresh})
                                                                                                                          // binarize
816
                 B \leftarrow \mathsf{morph\_clean}(B)
817
                 return all bbox(r) for each connected region r with area(r) \geq area_{min}
818
            return
819
            Function RemoveOverlap (\mathcal{B}):
820
                 return \mathcal{B} pruned by IoU / coverage / temporal rule at threshold
821
822
            Function AdvBoxes (id, \mathcal{G}, S):
823
                 \mathcal{C} \leftarrow \text{cached\_adv}(id)
824
                 \mathcal{C} \leftarrow \text{RemoveOverlap}(\mathcal{C} \cup \mathcal{G})
825
                 \mathcal{C} \leftarrow \text{size filter}(\mathcal{C})
826
                 return sample or synthesize boxes so that |\mathcal{C}| meets the required quota
827
            return
828
            foreach question (qid, q) in questions do
829
                 I \leftarrow \text{read\_image}(q.\text{imageId})
830
                 \mathcal{S} \leftarrow \emptyset
831
                 for t \in \{0, 1, 2\} do
832
                      m \leftarrow \text{load\_saliency\_map}(qid, t)
833
                      \mathcal{S} \leftarrow \mathcal{S} \cup \text{FindBboxes}(m, I.size)
834
                 end
835
                 label S as non adv
836
                 \mathcal{G} \leftarrow \text{ground-truth objects (gqa objects)}
837
                 \mathcal{B} \leftarrow \text{merge}(\mathcal{G}, \mathcal{S})
838
                 \mathcal{B} \leftarrow \text{RemoveOverlap}(\mathcal{B}, coverage, user\_thr)
839
                 \mathcal{B} \leftarrow \mathcal{B} \cup \text{AdvBoxes} (q.imageId, \mathcal{B}, I.size)
840
                 draw&save(I, \mathcal{B})
841
            end
```

F LIMITATION

A primary limitation of this work is its reliance on the GQA dataset, largely due to the limited availability of publicly accessible eye-tracking data and richly annotated scene graphs. Consequently, the findings may be influenced by certain dataset-specific characteristics and may not encompass the entire spectrum of real-world scenarios, such as answering math questions in images or OCR tasks. While this study offers an important first step toward understanding LVLMs' multimodal cognition abilities, this limitation highlights opportunities for future research.

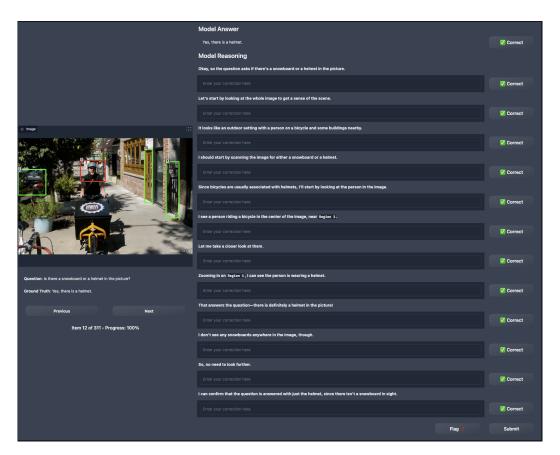


Figure 12: Annotation User Interface

```
**In-Context Learning examples go here*:
```

 Similarly to the examples provided above, please imagine this person's thought process behind the areas of the image the person looked at in order to solve the question, which are marked with the red bounding boxes.

The thought process should meet the following conditions:

- It should describe the broader setting of the image and how that context informs the search for specific details.
- It should explain how the bounding boxes (e.g., 'R1', 'R2') were used to narrow down the areas of interest. For instance, it should mention how the image's orientation or the placement of objects guided the focus to certain regions.
- It should only consider the bounding boxes that does appear in the image and not refer to any bounding boxes that actually do not exist. Note that all bounding boxes are numbered sequentially, so if we have 4 bounding boxes in the image, there are exactly the following bounding boxes: 'R1', 'R2', 'R3', and 'R4'.
- It should list specific visual cues noticed within each highlighted region and how these observations lead to identifying the relevant subject (e.g., a man with a backpack).
- It should clearly connect each observation to the final answer. It should explain how, based on the evidence gathered from the image, the conclusion was reached (e.g., identifying the man holding a cell phone).

Write as if you are this person, in a similar style as above examples.

```
## Image {im_num} ({num_bbox} bounding box(es))
**Question**: {question}
**Thought Process**:
**Answer**:
```

Figure 13: Prompt for reasoning and answer generation.

```
**In-Context Learning examples go here**
```

Similarly to the examples provided above, please imagine this person's thought process behind the areas of the image the person looked at in order to solve the question, which are marked with the red bounding boxes.

The thought process should meet the following conditions:

- It should describe the broader setting of the image and how that context informs the search for specific details.
- It should explain how the bounding boxes (e.g., 'R1', 'R2') were used to narrow down the areas of interest. For instance, it should mention how the image's orientation or the placement of objects guided the focus to certain regions.
- It should only consider the bounding boxes that does appear in the image and not refer to any bounding boxes that actually do not exist. Note that all bounding boxes are numbered sequentially, so if we have 4 bounding boxes in the image, there are exactly the following bounding boxes: 'R1', 'R2', 'R3', and 'R4'.
- It should list specific visual cues noticed within each highlighted region and how these observations lead to identifying the relevant subject (e.g., a man with a backpack).
- It should clearly connect each observation to the final answer. It should explain how, based on the evidence gathered from the image, the conclusion was reached (e.g., identifying the man holding a cell phone).
- If you realize you wrote something wrong in your thought process previously, you should identify and correct the mistakes you have made.

Write as if you are this person, in a similar style as above examples.

```
## Image {im_num} ({num_bbox} bounding box(es))
**Question**: {question}
**Thought Process**:
**Answer**:
{generation_prompt}
```

{false_reasoning}

Figure 14: Prompt for self correction. {false_reasoning} is the injected incorrect sub-reasoning.

```
972
973
             **Evaluation Task Instructions:**
             You will be given three pieces of information:
974
             1. A **Ouestion**
975
             2. A **Model Output** (the answer and rationale generated by a language model)
976
             3. A **Ground Truth Answer** (the correct answer)
977
             Your task is to find model's final conclusion of the question and determine if the final conclusion from **Model Output** is essentially
978
             equivalent to the **Ground Truth Answer** and correctly answers the **Question**. Consider the following guidelines when evaluating:
979
              - If the final conclusion includes extra details, omissions, or slight wording differences but the overall meaning and essential information
             match the ground truth, consider it **Correct**.
980
              - If the final conclusion provides incorrect information, adds unrelated details, or misses critical parts of the ground truth, consider it
981
             **Incorrect**.
982
             **Output Format (follow this exactly):**
983
984
985
             Reasoning: [Provide a brief explanation of why you judged the answer as Correct or Incorrect. Be explicit about which details match or
986
             Correctness: [Write only one word: Either "Correct" or "Incorrect"]
987
988
              **In-Context Learning examples go here**
989
990
             **Instance to Evaluate:**
991
              *Question: { question }
              *Model Output:* {model_output}
992
             *Ground Truth:* {ground_truth}
993
                                           Figure 15: Prompt for long-form answer judgment.
994
995
996
997
             You will be given three pieces of information:
             1. A **Question**
998
             2. A **Model Output** (the answer generated by the model)
999
             3. A **Ground Truth Answer** (the correct answer)
1000
             **Your task**: Determine if the **Model Output** correctly answers the **Question** by checking whether it aligns or essentially matches
1001
             the **Ground Truth Answer**, considering meaning rather than exact wording.
1002
1003
             Follow these expanded guidelines carefully:
              - Mark as **Correct** if the meaning or essential details in the Model Output closely align with the Ground Truth Answer, even if different
1005
             wording, synonyms, or minor descriptive variations are used.
              - **Example**: "Beige," "tan," "cream," or "light brown" are considered close enough to be marked as **Correct**.
1007
             - Similarly, minor differences like "couch" vs "sofa," or "silver-colored" vs "metallic grey" should still be considered **Correct** if they
1008
             describe essentially the same thing.
             - Mark as **Incorrect** only if the Model Output significantly differs from the Ground Truth Answer, changing the core meaning or
             providing substantially different or contradictory information.
1010
1011
             - **Example**: If Ground Truth Answer is "wood," and Model Output is "metal," this would be marked **Incorrect** due to clear
1012
             contradiction.
1013
             **Output Format (follow this exactly):**
1014
1015
             Reasoning: [Provide a brief explanation of why you judged the answer as Correct or Incorrect. Be explicit about which details match or
1016
1017
             Correctness: [Write only one word: Either "Correct" or "Incorrect"]
1018
1019
              **In-Context Learning examples go here**
1020
             **Instance to Evaluate: **
              *Question:* {question}
              *Model Output:* {model_output}
1023
             *Ground Truth:* {ground_truth}
```

Figure 16: Prompt for short-form answer judgment.

```
1026
             # Task Description:
1027
             You will be provided with three distinct pieces of information related to a reasoning task performed by another model:
1028
1029
             1. **Initial Reasoning**: An incomplete original response provided by a model containing incorrect reasoning.
             2. **Correction**: A concise statement explicitly pointing out the specific mistake or incorrect reasoning in the Initial Reasoning and
1030
             providing the correct information.
1031
             3. **Model's Continued Reasoning**: The model's new attempt at correcting the previously identified incorrect reasoning while complete
1032
1033
             Your job is to carefully evaluate whether the **Model's Continued Reasoning** successfully identified and corrected the incorrect reasoning
1034
             based on the provided **Correction**.
1035
1036
1037
             # Evaluation Steps:
1038
1039
             When evaluating, strictly follow these steps:
1040
             ### Step 1: Identify the Incorrect Reasoning
1041
             * Carefully read the **Initial Reasoning** and note exactly what mistake was made based on the provided **Correction**.
1042
1043
             ### Step 2: Verify the Provided Correction
1044
             * Clearly understand the correction, noting specifically which detail from the **Initial Reasoning** was incorrect and what the accurate
             information is.
1046
1047
             ### Step 3: Evaluate the Model's Continued Reasoning
1048
             * Read the **Model's Continued Reasoning** carefully to verify if the model explicitly identifies the original mistake.
1049
             * Ensure the model incorporates the corrected information provided by the **Correction**
1050
             * Check whether the revised reasoning removes the previous mistake and accurately resolves it, not simply ignoring or sidestepping the
1051
             original error.
1052
             ### Step 4: Provide Clear Reasoning for Your Judgement
1053
1054
             * Explicitly state how the revised model output relates to both the initial incorrect reasoning and the provided correction.
             * Clearly explain whether or not the original error was addressed and resolved.
1055
1056
             ### Step 5: Final Judgement
1057
             * Clearly state your final judgement as either **"YES"** or **"NO"**:
1058
1059
             * **"YES"** if the revised output explicitly corrects the initial error based on the provided correction.
             * **"NO"** if the revised output either does not identify the initial mistake explicitly, fails to correct it, or leaves the incorrect reasoning
1061
1062
             **In-Context Learning examples go here**
1063
1064
             # Final Notes for Your Judging:
             * Be meticulous and explicit in your reasoning.
1066
             * Your evaluation must precisely check whether the revised output aligns correctly with the provided correction.
1067
             * Ensure the final judgement ("Yes" or "No") directly and clearly corresponds to your detailed reasoning.
1068
1069
1070
             **Output Format (follow exactly):**
1071
1072
             Reasoning: [Provide a clear explanation of your judgment, explicitly mentioning the details or synonyms that align or differ.]
1073
             Correctness: [Write exactly one word: Either "Yes" or "No"]
1074
1076
1077
             **Instance to Evaluate: **
             *Initial Reasoning: * { false_reasoning }
1078
             *Correction:* {model_output}
1079
             *Model's Continued Reasoning:* {ground_truth}
```

Figure 17: Prompt for self-correction judgment.