
Bridging the Gap to Real-World Language-Grounded Visual Concept Learning

Whie Jung Semin Kim Junee Kim Seunghoon Hong
School of Computing, KAIST
{whieya, seminkim, kje0312, seunghoon.hong}@kaist.ac.kr

Abstract

Human intelligence effortlessly interprets visual scenes along a rich spectrum of semantic dimensions. However, existing approaches to language-grounded visual concept learning are limited to a few predefined primitive axes, such as color and shape, and are typically explored in synthetic datasets. In this work, we propose a scalable framework that adaptively identifies image-related concept axes and grounds visual concepts along these axes in real-world scenes. Leveraging a pretrained vision-language model and our universal prompting strategy, our framework identifies a diverse image-related axes without any prior knowledge. Our universal concept encoder adaptively binds visual features to the discovered axes without introducing additional model parameters for each concept. To ground visual concepts along the discovered axes, we optimize a compositional anchoring objective, which ensures that each axis can be independently manipulated without affecting others. We demonstrate the effectiveness of our framework on subsets of ImageNet, CelebA-HQ, and AFHQ, showcasing superior editing capabilities across diverse real-world concepts that are too varied to be manually predefined. Our method also exhibits strong compositional generalization, outperforming existing visual concept learning and text-based editing methods. The code is available at <https://github.com/whieya/Language-grounded-VCL>.

1 Introduction

Perceiving the world through visual concepts such as color, shape, and texture, as human intelligence does, has long been a goal in computer vision. Representing an image as a composition of these concepts not only improves compositional generalization [8, 25, 36, 37], but also offers interpretable explanations [14] and enhances visual reasoning tasks [9, 38]. Early work primarily used discrete language descriptors, ranging from object labels in classification and detection [7, 15, 20, 31] to sentence-level captions [1, 34]. A recent method [16] shows that continuous concept embeddings, grounded along language-informed axes, can capture subtle visual nuances, *e.g.*, slight color variations, beyond the reach of purely text-based approaches. Thanks to the visual nuances embedded in continuous representations, this method enables the transfer of subtle, image-dependent details in downstream tasks such as image-editing tasks, where discrete text descriptor-based approaches [3, 24] often struggle due to limited linguistic expressiveness.

Despite this promise, extending the recent approach [16] to learn diverse visual concepts in real-world scenes remains underexplored. A central challenge is the reliance on *predefined* concept axes, such as color or shape, for visual grounding, which fails to capture the rich diversity of real images and limits extension to datasets where relevant factors are unknown in advance. Moreover, since each image consists of a wide variety of concept axes, relying on a specialized concept encoder for every axis quickly becomes infeasible, substantially increasing model complexity. Constraining each concept embedding to contain information relevant only to a specific concept axis presents another significant challenge. Although directly matching concept embeddings to textual descriptors—already a disentangled term in nature—offers a simple remedy for disentanglement [16], it compromises instance-specific details, as textual descriptors are image-agnostic.

In this work, we take a step toward a scalable approach for visual concept learning in real-world scenes. We leverage a pretrained vision-language model (VLM) to adaptively identify image-related axes, replacing fixed predefined ones. Using a universal prompt design, we guide the VLM to identify diverse image-related axes without relying on prior knowledge. Our universal concept encoder then binds visual features to these discovered axes within a single unified architecture. To ensure that the discovered axes remain disentangled while preserving image-specific details, we introduce a compositional anchoring objective that constrains changes within each axis so that they only affect the corresponding axis in the generated images. We demonstrate that our scalable framework can capture diverse real-world concepts and enable novel compositions of visual concepts.

In summary, our contributions are as follows:

1. We introduce a scalable framework that grounds visual concepts along diverse, language-specified axes in real-world images.
2. We propose adaptively identifying image-related axes with a pretrained VLM and designing a universal concept encoder that binds visual features to these axes.
3. We design a novel objective for disentangling discovered concept axes in real-world scenes.
4. We evaluate our framework on real-world concept editing tasks, showing superior editing capabilities and compositional generalization compared to language-informed visual concept learning methods and text-based editing methods.

2 Problem Setup

Our goal is to develop a scalable framework for extracting visual concepts grounded along image-related linguistic axes in real-world images. To this end, we first outline a general formulation of language-grounded visual concept learning and identify the key challenges in scaling to real-world scenarios. Given an input image $\mathbf{x} \in \mathbb{R}^{H \times W \times C}$, the objective is to extract a set of concept representations $Z = \{\mathbf{z}_1, \dots, \mathbf{z}_K\}$, where $\mathbf{z}_i \in \mathbb{R}^D$ encodes visual concepts relevant to concept axis y_i . To define interpretable axes among infinitely many concept axes in real-world images, we define each concept axis y_i with natural languages, *e.g.*, age, gender, and expression. Then the goal is to learn a set of concept encoders E_{θ_i} mapping \mathbf{x} to visual concepts \mathbf{z}_i corresponding to each concept axis y_i . A typical approach to train such encoders is training jointly with a decoder D with an auto-encoding objective. The decoder D is often replaced by a frozen pre-trained text-to-image (T2I) generative model [16] due to training efficiency and remarkable generation capabilities. Formally, the encoders are optimized with the denoising objective:

$$\mathcal{L}_{\text{Diff}}(\{\theta_i\}) = \mathbb{E}_{\epsilon, t} [\|D(\mathbf{x}, t, \{E_{\theta_i}(\mathbf{x})\}) - \epsilon\|_2^2] \quad (1)$$

where $\epsilon \sim \mathcal{N}(\mathbf{0}, I)$ and $t \sim U(0, 1)$ denote noise and timestep, respectively.

Since Equation 1 does not guarantee the disentanglement of visual concepts along the concept axes, prior work [16] introduces additional regularization to ground each visual concept \mathbf{z}_i to the text embeddings \mathbf{v}_i , which are obtained by querying the pretrained VLM [18] with predefined templates, *e.g.*, "what is the color of the object". We denote by v_i , *e.g.*, red or blue, the textual descriptions for each axis, and define $\mathbf{v}_i = T(v_i)$ as their embeddings, where T is a pretrained text encoder.

2.1 Challenges and Desiderata

While prior work [16] demonstrated the extraction of primitive visual concepts, *e.g.*, color, shape, and style, primarily on simple synthetic datasets, extending this method to complex real-world scenes poses three key challenges. We briefly outline these challenges and desiderata in this section, and discuss how they are addressed in Section 3.

Adaptive Concept Axes Concept axes for visual grounding should be determined adaptively for each image, since real-world images exhibit a vast diversity of attributes that cannot be covered by a fixed set of predefined axes. Rather than relying on predefined primitive axes, *i.e.*, color or shape, an adaptive mechanism is required to automatically identify relevant concept axes for each image.

Scalable Encoder Architecture To support adaptive concept axes, the encoder architecture should be scalable. Implementing E_{θ} with a set of specialized concept encoders for each concept axis y_i would incur a prohibitive number of model parameters, considering infinitely many potential concept axes in real-world scenes.

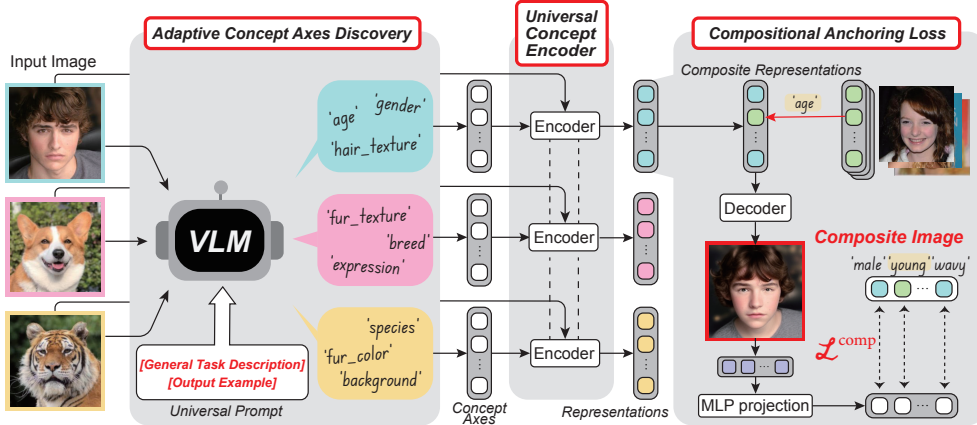


Figure 1: Overview of our method. Our framework first identifies image-related concept axes by leveraging VLM. We design an universal prompt that guides the VLM to find concept axes across different datasets. Given discovered axes for each image, our universal concept encoder binds visual features to those axes without introducing any specialized concept encoder for each axis. Finally, the encoded concept representations are regularized with a compositional anchoring loss to promote disentanglement between concept axes. Specifically, we randomly swap a concept representation with the one in an identical concept axis extracted from different images, and constrain composite images, rendered from randomly swapped representations, to be aligned with composite text descriptions.

Concept Disentanglement Given adaptive concept axes, each representation \mathbf{z}_i should capture only the semantics of its corresponding axis y_i , while preserving image-specific details. A straightforward solution is to align \mathbf{z}_i with the text embedding \mathbf{v}_i [16], since texts are already disentangled along concept axes in nature. However, since \mathbf{v}_i does not encode any instance-specific information, this alignment often leads to a suboptimal trade-off in \mathbf{z}_i between encoding visual nuisance and disentanglement of the concepts.

3 Approach

Based on the desiderata outlined in Section 2.1, we present a scalable framework for language-grounded visual concept learning (Figure 1). To extract concept axes adaptive to given images, we propose to leverage a pretrained VLM with our simple yet effective prompting strategy (Section 3.1). Given adaptive concept axes for each image, our universal concept encoder maps the image features to their corresponding visual concept embeddings (Section 3.2). We then train this encoder to disentangle visual concepts along the discovered axes by maximizing compositional anchoring of the representations (Section 3.3). Instead of directly aligning \mathbf{z}_i with the image-agnostic text embedding $T(v_i)$, compositional anchoring ensures that changes in \mathbf{z}_i affect only its corresponding concept axes y_i in the generated image space $D(Z)$. Below, we describe each component in detail.

3.1 Adaptive Concept Axes Discovery

Given an image \mathbf{x} , we query a pretrained VLM with a prompt \mathcal{P} to extract image-dependent concept axes $Y = \{y_1, \dots, y_K\}$ and their corresponding textual descriptions $V = \{v_1, \dots, v_K\}$. Note that K varies per image, and the extracted descriptions V will be used for visual grounding in Section 3.3. The prompt \mathcal{P} should be universal, generalizing across arbitrary images and properly guiding the VLM to capture rich image-related concepts. To this end, we design a universal prompt with two key components: a **general task description** and an **output exemplar**. The general task description instructs the VLM to enumerate all visually relevant concept axes presented in a given image. On the other hand, the **output exemplar** demonstrates the desired granularity of axes by providing a specific instance. By specifying axes in the exemplar, VLM can be steered to find more detailed axes, *e.g.*, hair color, hair texture, and avoid overly coarse categories, *e.g.*, color, texture. Remarkably, a single exemplar is sufficient to steer the VLM to identify diverse image-related concepts beyond those provided in the exemplar and to generalize to new domains. For example, given an instance of a human face that includes the axis 'hair color', the VLM discovers unspecified attributes such as 'eye color' or 'lip color' for different human faces, and identifies analogous axes for animal images, *e.g.*, fur color. See Appendix A.4 for more details.

We also instruct the VLM to structure the output as a dictionary mapping each concept axis to a corresponding textual description, e.g. {'age': 'young', 'gender': 'male', ...}. While prior work [16] employs the VLM to gather textual descriptions for a few predefined axes, they query the model separately for each predefined concept axis (e.g., “What is the color of the image?”). In contrast, our prompting strategy extracts all concept axes and corresponding textual descriptions in a single query, greatly enhancing efficiency and covering a broader range of potential axes beyond typical predefined categories. The complete prompt and outputs are provided in Appendix A.4. We find this universal prompt effectively captures diverse image-related concepts across multiple datasets, including novel concepts, e.g., breed, eye color, and nose color, which were *not present* in the exemplar.

3.2 Universal Concept Encoder

In our framework, the concept encoder E_θ requires to encode visual concepts adaptive to image-related concept axes Y . Rather than defining specialized concept encoders for each concept, we construct E_θ to encode all concept representations Z conditioned on a set of concept axes Y , i.e., $Z = E_\theta(\mathbf{x}, Y)$. The architecture for E_θ should support adaptive binding of visual features to given axes Y and produce distinct concept representations within a single parameterized model. To this end, we adapt the Querying Transformer (Q-Former) [18], which was designed to extract visual features from a frozen vision encoder and align them with pretrained text embeddings. The Q-Former consists of a lightweight transformer with learnable queries to interact with visual features via a cross-attention module. In our adaptation, we replace the learnable queries with the text embeddings $T(\{y_i\})$ of each axis encoded from a pretrained text encoder T . Initial queries $T(y_i)$ are then updated in subsequent transformer layers by interacting with visual features through cross attention layers. This way, visual features can dynamically bind to arbitrary concept axes within a single architecture.

3.3 Disentanglement with Compositionality

To constrain \mathbf{z}_i to encode only the information relevant to its axis y_i , we introduce a *compositional anchoring* objective that ensures modifying a concept along one axis alters the generated output only in that axis, leaving other attributes unchanged. We implement such variations by randomly swapping a subset of concept representations $Z' \subseteq Z$ with those drawn from the same axis of different images, producing composite representations Z^c . As discovered axes vary across images, we first search for candidate images within each batch that share the same axis y_i , and then randomly swap their corresponding \mathbf{z}_i among these candidates. When each representation \mathbf{z}^i is disentangled along y_i , the composite image $\mathbf{x}^c = D(Z^c)$ should change only the swapped attributes, leaving others unchanged. Since ground-truth images for such a composition are generally unavailable, we instead measure alignment between the composite image \mathbf{x}^c and composed textual descriptions set V^c , constructed by taking the corresponding descriptions from each swapped axis.

We quantify this alignment using a lightweight regression network g_ϕ that predicts the textual descriptions of a given image. Instead of constructing g_ϕ with an additional image encoder, we reuse E_θ to encode \mathbf{x}^c back into concept representations, and a lightweight regression network g_ϕ predicts each attribute on top of the representations. Note that g_ϕ is shared across the axes. Formally, let $\hat{Z}^c = \{\hat{\mathbf{z}}_i^c\}_{i=1}^K = E_{\theta'}(\mathbf{x}^c, Y)$ be re-encoded concept representations from composite image Z^c , where $E_{\theta'}$ is a fixed copy of E_θ . Then, the compositional anchoring objective is defined as:

$$\mathcal{L}_{\text{Comp}}(\theta) = \sum_{i=1}^K d(g_\phi(\hat{\mathbf{z}}_i^c), \mathbf{v}_i^c), \tag{2}$$

where $d(\cdot, \cdot)$ is a cosine distance and \mathbf{v}_i^c is a text embedding for axis y_i in V^c . Note that this objective only updates θ by propagating the gradient through \mathbf{x}^c and prevents updating g_ϕ and $E_{\theta'}$ to avoid corruption from out-of-distribution samples of $D(\mathbf{z}^c)$. For g_ϕ , we simply train it by predicting the text embeddings \mathbf{v}_i from non-swapped concept representations \mathbf{z}_i :

$$\mathcal{L}_{\text{Reg}}(\theta, \phi) = \sum_{i=1}^K d(g_\phi(\mathbf{z}_i), \mathbf{v}_i), \tag{3}$$

It is worth noting that our objectives do not force $\mathbf{z}_i = \mathbf{v}_i$, which compromises instance-specific details in \mathbf{z}_i . Instead, disentanglement is encouraged by verifying that each axis remains independent in the generated output. As a result, our objective ensures concept disentanglement while retaining instance-dependent information, particularly crucial in complex real-world scenarios.

3.4 Learning objectives

In this section, we summarize our complete framework and learning objectives. Given an image \mathbf{x} , the VLM extracts a set of image-related axes Y . The universal concept encoder E_θ is then trained with an autoencoding objective, while the pretrained decoder D remains fixed. To encourage disentanglement among axes, we randomly swap each concept representation \mathbf{z}_i with another from the same axis in the batch, and measure the alignment of composite image $\mathbf{x}^c = D(Z^c)$ with its corresponding text embeddings \mathbf{v}^c through a lightweight regression network g_ϕ . The overall objective is:

$$\mathcal{L}_{\text{Total}}(\theta, \phi) = \mathcal{L}_{\text{Diff}}(\theta) + \lambda_{\text{Comp}}\mathcal{L}_{\text{Comp}}(\theta) + \lambda_{\text{Reg}}\mathcal{L}_{\text{Reg}}(\theta, \phi), \quad (4)$$

where λ_{Comp} and λ_{Reg} are hyper-parameters controlling the importance of each term.

4 Related Work

Visual Concept Learning As language offers a human-interpretable interface, grounding visual concepts in natural language has long been a central goal in computer vision. Early efforts primarily aligned images with word-level annotations or object labels, supporting classification and detection tasks [15, 20, 31]. Extensions to neuro-symbolic frameworks [19, 22], integrating with visual concept learning, further advanced visual reasoning. Such language-based grounding not only enhanced interpretability [14], but also improved downstream performance on vision tasks [17, 18]. However, discrete text descriptors inherently limit the representational capacity to a fixed vocabulary. To address this, LIVCL [16] followed Textual Inversion-based approaches [10] by optimizing concept encoders with a pretrained T2I model to reconstruct the given images. While promising, the scope of the work was limited to a few predefined primitive concept axes.

Representation Learning with Compositionality Another line of research explores *object-centric learning* to uncover generative factors. Recent methods [12, 35] compose latent representations from multiple images similar to our framework, but under more restrictive assumptions. For instance, L2C [12] randomly mixes object representations to produce composite images and maximizes the likelihood of these composites to learn object-centric representations. Wiedemer et al. [35] provides a theoretical analysis for compositional generalization and measures compositional consistency through a cyclic distance between latent representations and their reconstructions. However, this formulation relies on architectural constraints such as additive decoders, making them effective mainly on synthetic or low-complexity data. Without additive decoders, it can lead to a trivial solution where a single latent encodes all. In contrast, our approach employs a pretrained T2I model without imposing additional constraints, addressing real-world scenes with diverse concept axes. Instead of focusing on isolated objects, our compositional consistency objective promotes disentanglement among discovered concept axes and does not require a specialized decoder structure.

5 Experiment

5.1 Experiment Setup

Implementation Details We leverage InternVL [4] for an open-sourced VLM. To handle complex real-world images, we employ DINO-v2 [26] to encode the image into visual features followed by our concept encoder, and employ Stable Diffusion-based T2I decoder [30] finetuned at 256×256 resolution. When generating composite images with the T2I decoder, we iteratively decode for 10 steps using DDIM [33]. Since propagating gradients through all these decoding steps is computationally expensive, we follow [6, 27] and truncate gradients at the last few decoding iterations. Lastly, we employ 2-layer MLPs for g_ϕ . See Appendix A.3 for additional implementation details.

Dataset We validate our framework on complex and unstructured real-world data, where each image contains a diverse set of conceptual axes that is infeasible to manually predefine these axes to cover all possible variations within the data. To this end, we first conduct experiments on a subset of the ImageNet dataset. We randomly sampled 20 classes from ImageNet (referred to as ImageNet-S20), covering categories such as animals (*e.g.*, tree frog, American black bear, sulphur butterfly, giant panda), everyday objects (*e.g.*, padlock, grand piano, motor scooter), and scenes (*e.g.*, boathouse, water tower), yielding approximately 28k training images ($\sim 1.4\text{k}$ images per class). This dataset presents a challenging scenario as each class contains diverse, image-specific visual concepts that are often not shared by other classes. Given the infeasibility of manually defining all the concept axes in ImageNet-S20 for prior visual concept learning methods [16], we additionally compare our

Table 1: Comparisons on visual concept editing task. Our method consistently outperforms recent text-based editing methods [3, 11, 23, 24] and language-informed visual concept learning [16].

Method	ImageNet-S20		CelebA-HQ		AFHQ-Dog		AFHQ-Cat	
	CLIP (\uparrow)	BLIP (\uparrow)	CLIP (\uparrow)	BLIP (\uparrow)	CLIP (\uparrow)	BLIP (\uparrow)	CLIP (\uparrow)	BLIP (\uparrow)
SDEdit [23]	0.195	0.381	0.200	0.447	0.250	0.493	0.257	0.474
InstructPix2Pix [3]	0.198	0.383	0.202	0.425	0.230	0.467	0.246	0.471
NullText Inversion [24]	0.189	0.341	0.193	0.422	0.251	0.489	0.255	0.476
DDPM-Inversion [11]	0.243	0.467	0.220	0.483	0.266	0.516	0.266	0.494
LIVCL [16]	-	-	0.226	0.469	0.270	0.518	0.268	0.480
Ours	0.251	0.474	0.239	0.496	0.272	0.535	0.271	0.514

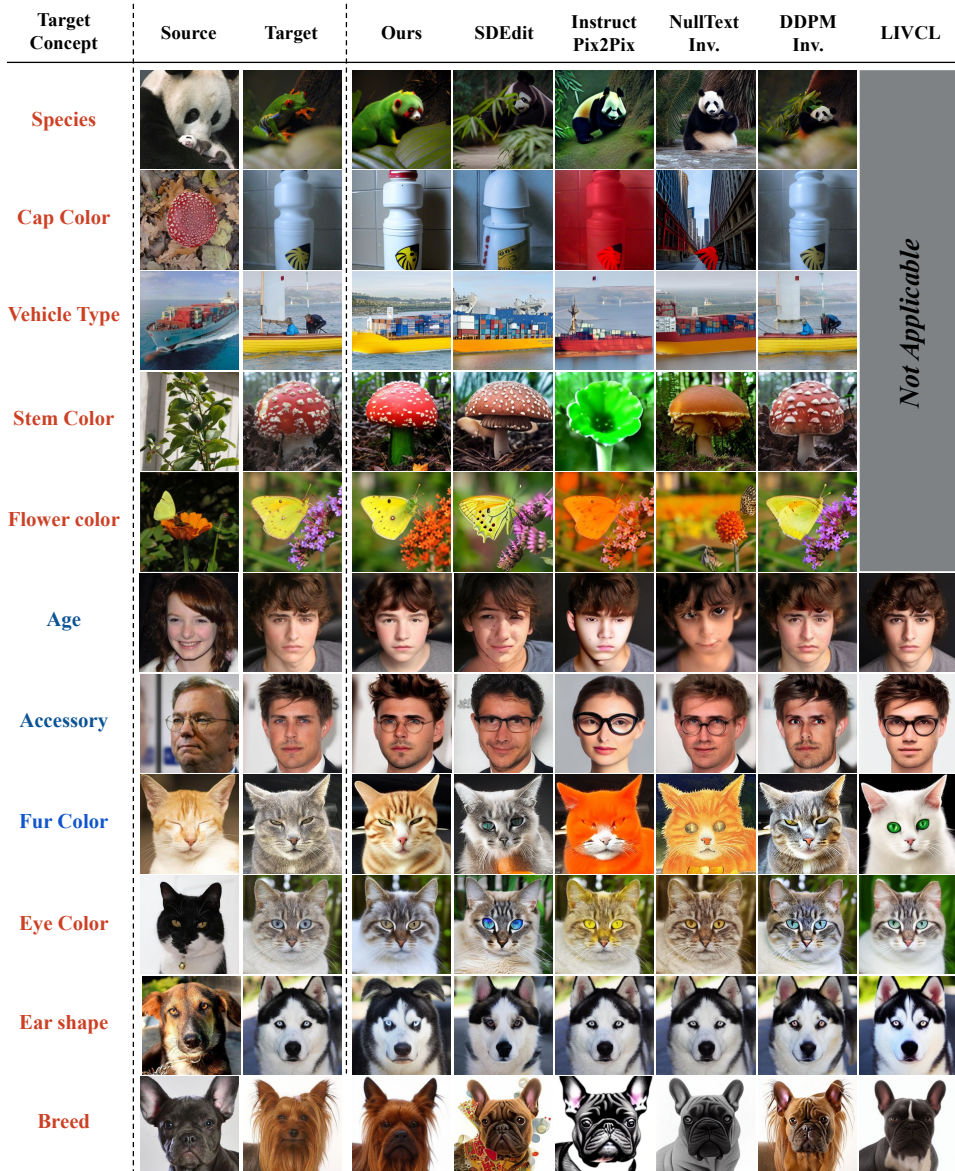


Figure 2: Qualitative results on ImageNet-S20, CelebA-HQ and AFHQ datasets. Our framework grounds visual concepts to diverse concept axes in real-world images. Note that **red concepts** are not provided by our prompt but rather adaptively discovered by VLM. Since it's infeasible to predefine all axes covering the whole dataset like ImageNet-S20, LIVCL was not applicable for ImageNet-S20.

approach with [16] using relatively controlled datasets with diverse concept axes, such as CelebA-HQ [13], AFHQ-Dog, and AFHQ-Cat [5]. We collect the frequently observed axes discovered by our method per dataset and use them to train the baseline [16]. All images are resized to 256×256 for our experiments. For training and validation, we use the following splits: 28k/0.6k images for ImageNet-S20, 27k/3k for CelebA-HQ, and around 5k/0.5k for AFHQ-Dog and AFHQ-Cat.

Evaluation Protocol To evaluate whether the concept representations faithfully capture their associated semantics and are disentangled from other axes, we perform a *visual concept editing* task. In this task, we select source and target images and identify the concept axes to be edited. The objective is to transfer a visual concept from the source to the target image without affecting other attributes. For evaluation, we use the top-50 and top-10 most frequently discovered axes per dataset for ImageNet-S20 and the remaining datasets, respectively, excluding axes that remain constant across the dataset, such as the subject type in CelebA-HQ, which is always human. For quantitative evaluation, we measure the CLIP-Score [29] and BLIP-Score [17] between the edited images and their corresponding swapped text descriptions V^c . Specifically, we construct text prompts V^c such as "a photo of a cat with brown, fluffy, striped fur, against a black background," and evaluate the alignment with the images using CLIP and BLIP. Additionally, we conduct human evaluation, collecting responses from 10 participants per dataset via Prolific [28], following the procedure in Lee et al. [16]. Details on the human evaluation setup are provided in Appendix A.5.

Baselines We compare our method to LIVCL [16], a recent visual concept learning approach that extracts concept representations along predefined primitive axes such as color, category, and style. As LIVCL explored in low resolution images, *e.g.*, 64×64 pixels, we replace its T2I decoder and pretrained image encoder with Stable Diffusion [30] and DINO- v2 [26], respectively. Since LIVCL requires predefined axes for training, we used the top-50/10 most frequent axes discovered by our method for ImageNet-S20 and the others, respectively. We also compare our method to four recent text-based image editing methods— SDEdit [23], InstructPix2Pix [3], Null-text Inversion [24], and DDPM-Inversion [11]. Although these baselines lack mechanisms for extracting visual concepts from source images, we instead edit the image with GT text descriptions given by the VLM. For each method, we used a prompt including target attributes to be changed, such as "a photo of a dog with brown fur" for editing. We used default hyper-parameters for text-based editing methods.

5.2 Main Results

Quantitative Results We report quantitative comparison of our method to the baselines in Table 1. Our methods consistently outperform all baselines on all of the datasets by a clear margin. High CLIP and BLIP scores demonstrate the effectiveness of our method in capturing image-related visual concepts. A human evaluation in Table 2 provides a more direct assessment of reflecting subtle visual nuances. Since text-based editing methods are inherently independent of source

Table 2: Human evaluation results.

Method	CelebA-HQ	AFHQ-Dog	AFHQ-Cat
SDEdit	0.448	0.486	0.464
InstructPix2Pix	0.465	0.385	0.416
NullText Inversion	0.414	0.514	0.442
DDPM-Inversion	0.528	0.548	0.584
LIVCL	0.465	0.478	0.471
Ours	0.636	0.589	0.623

images and LIVCL struggles to encode image-dependent details due to its training objective, the performance gap becomes even more pronounced in the human evaluation. These results validate the effectiveness of our framework in visual grounding with diverse axes in real-world scenes.

Qualitative Comparison Figure 2 presents the qualitative results on visual concept editing. Our method identified a diverse set of image-related axes and discovered novel concepts such as species, cap color, vehicle type, eye color, and breed, which were not specified in the prompt. It demonstrates that our universal prompt can generalize to unseen domains. Within the discovered axes, our method accurately alters each concept without affecting others. In contrast, LIVCL often fails to encode image-specific details, such as generating different glasses in the seventh row, last column, or disentangling from other axes like changing fur color and texture in the eighth row, last column. We attribute this to the inherent trade-off in LIVCL’s objective between concept disentanglement and capturing image-dependent details. Thanks to our compositional anchoring objective, our method achieves both disentanglement along each axis and the preservation of image-specific details, *e.g.*, transferring similar glasses in the seventh row of third column. Text-based approaches also struggle with concept-wise manipulation, often modifying the global color of images (InstructPix2Pix and NullText-Inversion) or leaving them unchanged (SDEdit and DDPM-Inversion). Even when they transfer the correct attribute, they fail to capture the visual nuances of source attributes. For further visual inspection, please refer to additional qualitative results in Appendix A.6.

Compositional Generalization Interestingly, our method demonstrates superior compositional generalization to unseen combinations of concepts compared to the baselines, as shown in Figure 3. In the figure, our method successfully generates novel compositions, such as a large frog with a panda’s fur pattern, pandas with red eyes, or scooters floating on water, which do not exist in the real world. In contrast, the baselines either alter multiple attributes simultaneously or change nothing at all, and fail



Figure 3: Compositional generalization to unseen concept combination. Given OOD combination of concepts such as frog with panda’s fur pattern, only our method generates plausible results.

to generate plausible generalizations. For instance, when modifying species or eye color, body colors are also changed as seen in the fifth and sixth columns of the first row, and the fifth column of the third row. Furthermore, while all baselines struggle with manipulating ear shapes or nose colors, which are strongly correlated with dog breed, our method shapes the ears of a Labrador into a triangle (third column of fourth row) and renders a dog’s nose in pink (third column of fifth row). We conjecture that such compositional generalization arises from our compositional anchoring objective, which explicitly promotes random composite images to exhibit corresponding compositions of attributes.

Composition From Multiple Images To further analyze the quality of extracted visual concepts, we consider the more challenging multi-image composition task. For each target image, we select N source images and randomly sample unique concept axes from each source, *i.e.*, N different axes. We then edit the target image along those axes to produce composite images. We conduct this task only on CelebA-HQ and AFHQ, as the high image diversity within ImageNet classes (*e.g.*, partial views, different viewpoints, or varying light conditions) often leads to cases where the concept axes are not consistently shared among the same class images, resulting in noisy evaluations. In contrast, CelebA-HQ and AFHQ have more controlled structures, making them better suited for this task.

Table 3 presents CLIP and BLIP scores for editing up to four axes. Our method again consistently outperforms all baselines. Moreover, all baselines suffer a clear drop in both metrics as N increases, whereas our method shows only a marginal decrease. This robustness indicates that our concept representations are well disentangled and faithfully capture the correct semantics of the input images. Figure 4 shows qualitative results for $N = 3$. Composite images from our method are faithfully modified to reflect all of the source images’ concepts. In contrast, the baseline models often omit or distort certain attributes. For example, all baselines fail to render the short hairstyle and blue earrings (first row), and some either drop the facial expression (InstructPix2Pix, DDPM Inversion) or misapply the hair color (LIVCL, SDEdit) in the composite outputs (second row).

Visual Nuance Transfer In contrast to text-based editing methods, visual concept learning methods can capture visual nuances in the continuous representation space. Since LIVCL is not applicable to ImageNet-S20, we compare our methods to LIVCL on the CelebA-HQ and AFHQ datasets. Figure 5 highlights visual nuances captured in the concept representation of our method. In the figure, our method transfers subtle visual details such as detailed fur patterns, subtle differences in smiles, or hair color tones. In contrast, LIVCL struggles to correctly transfer these visual details, *e.g.*, the resulting image always exhibits the same expressions in Figure 5(b). It even fails to reconstruct the original images in Figure 5(c). This implies the suboptimal trade-off between concept disentanglement and image-dependent encoding induced by the objective in LIVCL. While pushing concept representations \mathbf{z}_i closer to text embeddings \mathbf{v}_i , *i.e.*, $\mathbf{z}_i = \mathbf{v}_i$, can achieve disentanglement, it sacrifices visual information. In contrast, our compositional anchoring objective bypasses such

Table 3: Comparisons of visual concept editing. Our method outperforms recent text-based editing methods [3, 11, 23, 24] and language-informed visual concept learning [16].

method	CelebA-HQ						AFHQ-Dog						AFHQ-Cat					
	CLIP			BLIP			CLIP			BLIP			CLIP			BLIP		
	N=2	N=3	N=4	N=2	N=3	N=4	N=2	N=3	N=4	N=2	N=3	N=4	N=2	N=3	N=4	N=2	N=3	N=4
SDEdit	0.203	0.202	0.204	0.443	0.440	0.439	0.251	0.254	0.255	0.493	0.496	0.494	0.257	0.254	0.254	0.466	0.456	0.443
InstructPix2Pix	0.201	0.199	0.197	0.416	0.413	0.411	0.225	0.224	0.221	0.456	0.458	0.453	0.248	0.250	0.249	0.462	0.463	0.450
NullText Inv.	0.206	0.199	0.194	0.428	0.420	0.417	0.247	0.250	0.250	0.479	0.482	0.480	0.256	0.257	0.258	0.471	0.469	0.468
DDPM Inv.	0.213	0.207	0.203	0.463	0.449	0.437	0.262	0.260	0.257	0.506	0.501	0.493	0.261	0.258	0.253	0.473	0.458	0.440
LIVCL	0.225	0.219	0.214	0.454	0.440	0.429	0.267	0.264	0.260	0.507	0.502	0.491	0.262	0.257	0.250	0.463	0.447	0.428
Ours	0.238	0.236	0.236	0.492	0.490	0.491	0.269	0.266	0.262	0.528	0.528	0.523	0.271	0.269	0.268	0.516	0.513	0.512

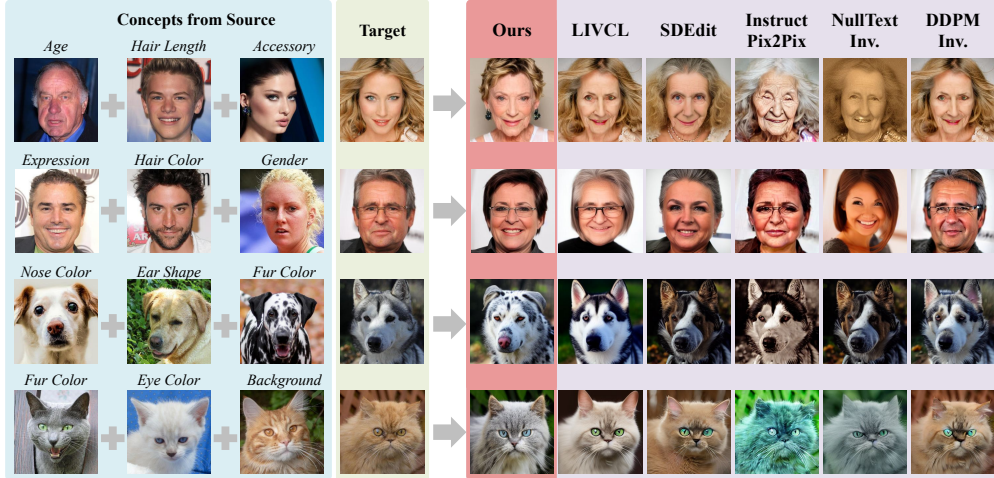


Figure 4: Composition of visual concepts from multiple images. Only our method accurately reflects all of the attributes of source images.

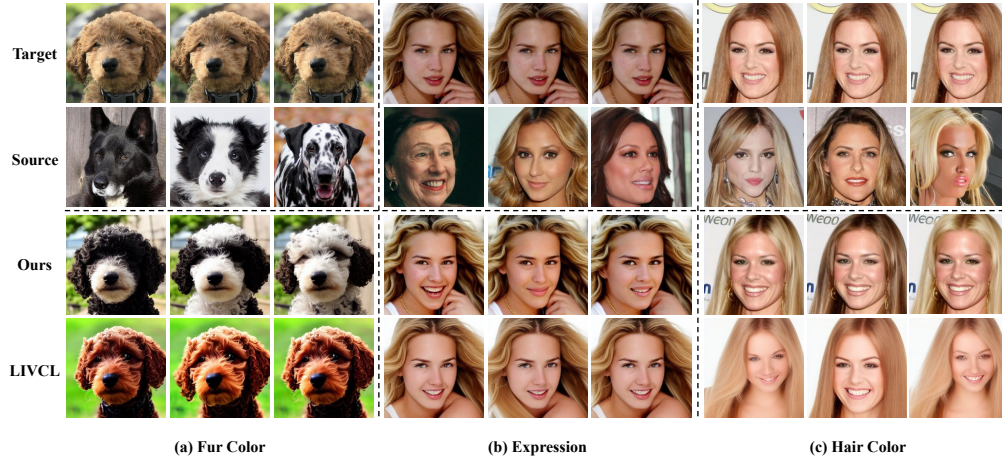


Figure 5: Examples of visual nuance transfer. Even when transferring the same attributes, *e.g.*, black and white fur or blonde hair, the outputs reflect subtle details of source images.

a trade-off and thereby achieves both disentanglement and rich image-dependent details within representations. More qualitative results on visual nuance transfer are provided in Appendix A.6.

5.3 Ablation Study

In this section, we conduct an ablation study on VLM choices, architectural design choices, and objective functions to examine the robustness and effectiveness of our choices. All of the experiments are evaluated on the visual concept editing task in the CelebA-HQ dataset.

VLM choices Since the discovery of concept axes in our method is directly affected by the quality of VLM outputs, we examine the robustness of our framework on two additional popular open-sourced VLMs (Qwen2.5-VL[2], Ovis2[21]), which have ranked highly on reasoning benchmarks.

Table 4: Ablation study on VLM choices.

VLM choices	CLIP	BLIP
Qwen2.5-VL [2]	23.72	48.64
Ovis2 [21]	23.48	48.35
InternVL2-5 (Ours)	23.88	49.58
InternVL2-5 + 10% drop	23.52	48.69
InternVL2-5 + 20% drop	23.65	48.61

Table 5: Ablation study on Architectural choices.

Architectural choices			Metrics	
Decoder	Vision Encoder	Concept Encoder	CLIP	BLIP
Frozen T2I	Dinov2	UCE	23.88	49.58
LoRA-finetuned T2I	Dinov2	UCE	23.67	49.62
Frozen T2I	CLIP	UCE	22.03	46.21
Frozen T2I	Dinov2	Shared MLP	21.63	46.8

Moreover, as it is difficult to directly control or quantify VLM performance, we instead control output quality by dropping partial axes (e.g., 10% and 20%) from the VLM outputs. It is a practical scenario as VLMs cannot always capture the complete axes for a given scene. Table 4 shows that our method is robust to both VLM choices and missing axes. We hypothesize that this is because even though some image-related axes can be missed in each example, those axes will eventually be repeatedly exposed across the dataset. Additionally, since our compositional anchoring loss encourages the compositionality of the concept representations, our framework might be internally trained for better compositional generalization, which improves adaptation with fewer samples. In fact, our method is capable of generating OOD samples (Figure 3). The robustness of our framework regarding the performance of VLMs suggests that it can scale to more complex real-world datasets, as VLMs do not always need to capture complete axes for every scene.

Architectural choices Table 5 presents the ablation studies on architectural choices as follows: (1) Frozen T2I decoder versus LoRA-finetuned decoder, (2) choice of vision encoder (Dinov2 versus CLIP), and (3) universal concept encoder (UCE in the Table 5) versus shared MLP architectures. First, finetuning the decoder with LoRA does not affect overall performance. Large-scale pretrained T2I models have already learned expressive data priors on natural images, facilitating faster training of the generation model. Therefore, the frozen T2I model does not bottleneck our framework. Replacing the Dinov2 encoder with the CLIP encoder causes a significant performance drop, as CLIP is trained for text-alignment, making its discriminative properties inferior to those of recent self-supervised methods like Dinov2. Lastly, replacing our universal concept encoder with a shared MLP architecture, which is a naive version of an axis-agnostic encoder, also results in a severe drop. Specifically, the visual feature is mean-pooled into a vector, concatenated with axis embeddings, and passed through shared MLP layers to encode concept representations. To make this encoder generally work for diverse concept axes, we shared this MLP layer for all of the axes. This approach likely fails because the shared MLP treats each concept independently, blocking complex interactions between concepts. It clearly highlights the effectiveness of our universal concept encoder.

Component-wise Contribution We conduct an ablation study on each component in our objective for concept disentanglement, *i.e.*, g_ϕ and $\mathcal{L}_{\text{Comp}}$, and report the results in Table 6. Without employing g_ϕ and instead directly regressing each concept representation \mathbf{z}_i to \mathbf{v}_i in Equation 2 and 3, we observe significant drops in both CLIP-Score and BLIP-Score. This result indicates the importance of g_ϕ in preventing a direct trade-off between disentanglement and encoding image-dependent details. Furthermore, removing $\mathcal{L}_{\text{Comp}}$ also leads to suboptimal CLIP- and BLIP-Score. This is because minimizing Equation 3 only guarantees \mathbf{z}_i to have information of \mathbf{v}_i but does not prevent it from encoding entangled information related to other concept axes.

Table 6: Ablation study on our method. Both $\mathcal{L}_{\text{Comp}}$ and g_ϕ contribute to concept disentanglement.

$\mathcal{L}_{\text{Comp}}$	g_ϕ	CLIP (\uparrow)	BLIP (\uparrow)
\checkmark	\times	21.1	44.72
\times	\checkmark	22.89	47.47
\checkmark	\checkmark	23.88	49.58

6 Conclusion

In this study, we present a scalable framework for grounding visual concepts along adaptive concept axes in real-world scenes. Our framework leverages a pretrained VLM and universal prompt design to adaptively identify diverse, image-related concept axes. A single, unified concept encoder then binds visual features to these axes, eliminating the need for separate per-concept encoders. To ensure each axis remains disentangled while preserving instance-level detail, we introduce a compositional anchoring loss. We randomly swap concept representations across images and regularize the resulting composite outputs to match their corresponding text descriptions. In the visual concept editing task on real-world datasets, our method consistently outperforms prior approaches in language-informed visual concept learning and recent text-based editing methods, demonstrating the effectiveness of our framework in learning adaptive visual concepts in real-world datasets. Also, our approach demonstrates successful transfer of subtle visual nuances and stronger compositional generalization.

Acknowledgment This work was in part supported by the National Research Foundation of Korea (RS-2024-00351212 and RS-2024-00436165) and the Institute of Information & communications Technology Planning & Evaluation (IITP) (RS-2022-II220926, RS-2022-II220959, and RS-2024-00509279) funded by the Korea government (MSIT).

References

- [1] Peter Anderson, Xiaodong He, Chris Buehler, Damien Teney, Mark Johnson, Stephen Gould, and Lei Zhang. Bottom-up and top-down attention for image captioning and visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 6077–6086, 2018.
- [2] Shuai Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Sibao Song, Kai Dang, Peng Wang, Shijie Wang, Jun Tang, Humen Zhong, Yuanzhi Zhu, Mingkun Yang, Zhaohai Li, Jianqiang Wan, Pengfei Wang, Wei Ding, Zheren Fu, Yiheng Xu, Jiabo Ye, Xi Zhang, Tianbao Xie, Zesen Cheng, Hang Zhang, Zhibo Yang, Haiyang Xu, and Junyang Lin. Qwen2.5-vl technical report. *arXiv preprint arXiv:2502.13923*, 2025.
- [3] Tim Brooks, Aleksander Holynski, and Alexei A Efros. Instructpix2pix: Learning to follow image editing instructions. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 18392–18402, 2023.
- [4] Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 24185–24198, 2024.
- [5] Yunjey Choi, Youngjung Uh, Jaejun Yoo, and Jung-Woo Ha. Stargan v2: Diverse image synthesis for multiple domains. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 8188–8197, 2020.
- [6] Kevin Clark, Paul Vicol, Kevin Swersky, and David J Fleet. Directly fine-tuning diffusion models on differentiable rewards. *arXiv preprint arXiv:2309.17400*, 2023.
- [7] Mark Everingham, Luc Van Gool, Christopher KI Williams, John Winn, and Andrew Zisserman. The pascal visual object classes (voc) challenge. *International journal of computer vision*, 88: 303–338, 2010.
- [8] Ali Farhadi, Ian Endres, Derek Hoiem, and David Forsyth. Describing objects by their attributes. In *2009 IEEE conference on computer vision and pattern recognition*, pages 1778–1785. IEEE, 2009.
- [9] Yu Gai, Paras Jain, Wendi Zhang, Joseph Gonzalez, Dawn Song, and Ion Stoica. Grounded graph decoding improves compositional generalization in question answering. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih, editors, *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 1829–1838, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.157. URL <https://aclanthology.org/2021.findings-emnlp.157/>.
- [10] Rinon Gal, Yuval Alaluf, Yuval Atzmon, Or Patashnik, Amit H Bermano, Gal Chechik, and Daniel Cohen-Or. An image is worth one word: Personalizing text-to-image generation using textual inversion. *arXiv preprint arXiv:2208.01618*, 2022.
- [11] Inbar Huberman-Spiegelglas, Vladimir Kulikov, and Tomer Michaeli. An edit friendly ddpn noise space: Inversion and manipulations. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pages 12469–12478, 2024.
- [12] Whie Jung, Jaehoon Yoo, Sungjin Ahn, and Seunghoon Hong. Learning to compose: Improving object centric learning by injecting compositionality. *arXiv preprint arXiv:2405.00646*, 2024.
- [13] Tero Karras, Timo Aila, Samuli Laine, and Jaakko Lehtinen. Progressive growing of gans for improved quality, stability, and variation. *arXiv preprint arXiv:1710.10196*, 2017.

- [14] Pang Wei Koh, Thao Nguyen, Yew Siang Tang, Stephen Mussmann, Emma Pierson, Been Kim, and Percy Liang. Concept bottleneck models. In *International conference on machine learning*, pages 5338–5348. PMLR, 2020.
- [15] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. Imagenet classification with deep convolutional neural networks. *Communications of the ACM*, 60(6):84–90, 2017.
- [16] Sharon Lee, Yunzhi Zhang, Shangzhe Wu, and Jiajun Wu. Language-informed visual concept learning. *ICLR*, 2024.
- [17] Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-training for unified vision-language understanding and generation. In *International conference on machine learning*, pages 12888–12900. PMLR, 2022.
- [18] Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models. In *International conference on machine learning*, pages 19730–19742. PMLR, 2023.
- [19] Qing Li, Siyuan Huang, Yining Hong, and Song-Chun Zhu. A competence-aware curriculum for visual concepts learning via question answering. In *European Conference on Computer Vision*, pages 141–157. Springer, 2020.
- [20] Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *Computer vision—ECCV 2014: 13th European conference, zurich, Switzerland, September 6-12, 2014, proceedings, part v 13*, pages 740–755. Springer, 2014.
- [21] Shiyin Lu, Yang Li, Qing-Guo Chen, Zhao Xu, Weihua Luo, Kaifu Zhang, and Han-Jia Ye. Ovis: Structural embedding alignment for multimodal large language model. *arXiv:2405.20797*, 2024.
- [22] Jiayuan Mao, Chuang Gan, Pushmeet Kohli, Joshua B Tenenbaum, and Jiajun Wu. The neuro-symbolic concept learner: Interpreting scenes, words, and sentences from natural supervision. *arXiv preprint arXiv:1904.12584*, 2019.
- [23] Chenlin Meng, Yutong He, Yang Song, Jiaming Song, Jiajun Wu, Jun-Yan Zhu, and Stefano Ermon. Sdedit: Guided image synthesis and editing with stochastic differential equations. *arXiv preprint arXiv:2108.01073*, 2021.
- [24] Ron Mokady, Amir Hertz, Kfir Aberman, Yael Pritch, and Daniel Cohen-Or. Null-text inversion for editing real images using guided diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 6038–6047, 2023.
- [25] Tushar Nagarajan and Kristen Grauman. Attributes as operators: factorizing unseen attribute-object compositions. In *Proceedings of the European Conference on Computer Vision (ECCV)*, pages 169–185, 2018.
- [26] Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*, 2023.
- [27] Mihir Prabhudesai, Anirudh Goyal, Deepak Pathak, and Katerina Fragkiadaki. Aligning text-to-image diffusion models with reward backpropagation. 2023.
- [28] Prolific. Prolific (version march 2025) [web platform], 2014. First released in 2014. Copyright 2024. London, UK. Available at <https://www.prolific.com>.
- [29] Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural language supervision. In *International conference on machine learning*, pages 8748–8763. PmLR, 2021.
- [30] Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pages 10684–10695, 2022.

- [31] Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual recognition challenge. *International journal of computer vision*, 115:211–252, 2015.
- [32] Donald G Saari. Selecting a voting method: the case for the borda count. *Constitutional Political Economy*, 34(3):357–366, 2023.
- [33] Jiaming Song, Chenlin Meng, and Stefano Ermon. Denoising diffusion implicit models. *arXiv preprint arXiv:2010.02502*, 2020.
- [34] Oriol Vinyals, Alexander Toshev, Samy Bengio, and Dumitru Erhan. Show and tell: A neural image caption generator. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 3156–3164, 2015.
- [35] Thaddäus Wiedemer, Jack Brady, Alexander Panfilov, Attila Juhas, Matthias Bethge, and Wieland Brendel. Provable compositional generalization for object-centric learning. *arXiv preprint arXiv:2310.05327*, 2023.
- [36] Yuan Zang, Tian Yun, Hao Tan, Trung Bui, and Chen Sun. Pre-trained vision-language models learn discoverable visual concepts. *arXiv preprint arXiv:2404.12652*, 2024.
- [37] Bowen Zhang, Hexiang Hu, Linlu Qiu, Peter Shaw, and Fei Sha. Visually grounded concept composition. In Marie-Francine Moens, Xuanjing Huang, Lucia Specia, and Scott Wen-tau Yih, editors, *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 201–215, Punta Cana, Dominican Republic, November 2021. Association for Computational Linguistics. doi: 10.18653/v1/2021.findings-emnlp.20. URL <https://aclanthology.org/2021.findings-emnlp.20/>.
- [38] Yiwu Zhong, Zi-Yuan Hu, Michael R Lyu, and Liwei Wang. Beyond embeddings: The promise of visual table in multi-modal models. *arXiv preprint arXiv:2403.18252*, 2024.

A Appendix

A.1 Limitations and Future Work

In our work, as in most previous approaches, we cannot guarantee recovery of every ground-truth factor of variation. Some subtle or rare attributes may simply fall outside the axes we discover. In fact, perfectly capturing all underlying factors in a complex, real-world dataset is generally intractable. Nevertheless, our method still identifies diverse, meaningful concepts, and extending coverage to additional or more fine-grained factors remains an important direction for our future work. Moreover, our framework depends on the quality and scope of the pretrained vision language model (VLM), so it can only discover concepts the VLM recognizes. Fortunately, as VLMs are improving rapidly and our method is not restricted by a specific VLM, we can adopt stronger models as they become available.

A.2 Broader Impact

Our approach can extract diverse visual concepts from images and reuse them to synthesize new content, which could pose privacy issues such as deepfake generation or unauthorized duplication of digital content.

A.3 Additional Implementation Details

Table 7 summarizes hyper-parameters for model architectures and training used in our experiments. For baselines, we follow the default hyper-parameters recommended by the official codes. All baselines used DDIM inversion with guidance of 7.5 and 50 inference steps.

Table 7: Hyperparameters used in our experiments.

General	Batch Size	32
	Training Steps	100k
	Learning Rate	0.00003
Concept Encoder	Layers	4
	Hidden Dim	768
	Number of Heads	8
Regression Network	Layers	768
	Input Dimension	768
	Hidden Dimensio	768
	Activation Function	ReLU

A.4 Prompt for Concept Axes Extraction

We provide the complete prompt and examples of the discovered concept axes per image in Figure 6 and Figure 7, respectively. As shown in Figure 7, our prompt successfully steers the VLM to identify diverse concept axes across different datasets, even when using only a single output exemplar of a human face.

General Task Description

<image>\n You are given an image containing any subject (e.g., person, animal, furniture, vehicle, etc.). Your task is to identify all relevant visual concept axes for the subject in a broad yet comprehensive way. Because the subject can vary widely, ensure your approach applies to humans, animals, vehicles, objects, and more. These axes should include all essential visible attributes of the subject with enough detail to plausibly reconstruct the image. Each axis should be fine-grained enough for distinct, specific attributes (for example, "hair_length" rather than "appearance", "fur_color" rather than "fur"). Each chosen axis (key) should map to a short, descriptive value. Use concise yet precise terms. Avoid vague or overly brief descriptors like "medium" by replacing them with more specific language such as "long, past shoulders" or "short, tied back." Avoid repeating the same detail across multiple axes; keep attributes distinct to prevent overlap. Return your final answer as a single JSON dictionary.

Output Exemplar

For example, if the subject is a human:
 {"subject_type": "human", "age": "young adult", "gender": "female", "hair_color": "black", "hair_length": "short, above ears", "hair_texture": "straight", "expression": "smiling", "background": "white", "accessory": "gold, dangling earrings"}

Output only the final JSON.

Figure 6: Our complete prompt consists of a general task description and output exemplar.

	<pre>"subject_type": "human", "age": "young adult", "gender": "female", "hair_color": "blonde", "hair_length": "medium, past shoulders", "hair_texture": "wavy", "eye_color": "blue", "expression": "neutral", "background": "gray"</pre>		<pre>"subject_type": "dog", "breed": "mixed", "fur_color": "brown and black", "fur_texture": "short", "ear_shape": "floppy", "eye_color": "brown", "expression": "happy", "tongue_position": "out", "collar_color": "red", "collar_type": "chain", "background": "grass"</pre>		<pre>"subject_type": "animal", "species": "cat", "fur_color": "white", "eye_color": "green", "ear_position": "upright", "background": "green foliage"</pre>
	<pre>"subject_type": "human", "age": "young adult", "gender": "female", "hair_color": "dark brown", "hair_length": "long, past shoulders", "hair_texture": "straight", "expression": "neutral", "background": "black", "lip_color": "pink", "clothing": "pink top"</pre>		<pre>"subject_type": "animal", "species": "dog", "breed": "West Highland White Terrier", "fur_color": "white", "fur_texture": "shaggy", "ear_shape": "pointed", "eye_color": "dark", "nose_color": "black", "background": "outdoor, blurred"</pre>		<pre>"subject_type": "animal", "species": "cat", "fur_pattern": "striped", "fur_color": "brown and black", "eye_color": "green", "expression": "aggressive", "whiskers": "white", "background": "pavement"</pre>

Figure 7: Examples of outputs from the VLM. Concept axes colored in red are unseen from the given exemplar.

A.5 Human Evaluation

For human evaluation, we randomly select 10 pairs of images for each attribute. Then, we replace an attribute of one image with another one in each pair using each of the methods. We ensure that randomly selected attributes in each pair are different from each other so that the edited image is always recognizable. We collect 10 participants for each dataset (a total of 30) on Prolific [28] and provide a general guideline as in Figure 8 for the task. Our questionnaire (Figure 9) asks participants to rank the images that most closely adhere to the criteria provided in our guideline. Following [16], we used Borda score metrics [32] to differentiate the scores according to each ranking, and final scores are normalized to a 0-1 scale.

Concept Swapping Visual Inspection

B *I* U ↻ ↺
✕ ⋮

In this survey, you will be presented with pairs of images alongside a target concept that describes what the edited image should modify. Your task is to evaluate and rank the edited images that most closely adheres to the following criteria:

✔ Concept Adherence:
Given a target concept, the edited image should accurately reflect the same concept details of the source image. For example, if the target concept is "hair color", the hair color of the edited image should be same as that of the source image.

✔ Preservation of Other Attributes:
Only the details of the given target concept should change, while other attributes must remain unchanged. The other concepts to remain unchanged are specified for each task.

You will be given 50 questions in total, 10 questions for each of the 5 concepts.

📌 Additional Guidelines:


- 1 is the best, while 6 is the worst.
- Take your time to inspect each image carefully before making your selection.
- If none of the answers seem accurate, answer with your best guess.
- No ties.
- Please ZOOM IN your images for better inspection.

Figure 8: General guidelines used in our human evaluation.


⋮

1. Which image best represents (C), reflecting the 'fur_color' from (B) while keeping all other details from (A)? *


Rank the answers: 1st (Best) - 6th (Worst)



(A) Target image



(B) Source image



(C)

Attributes of (C):
 fur_color: (B)
 fur_pattern: (A)
 eye_color: (A)
 expression: (A)
 background: (A)

(a)







(b)

(c)

(d)

(e)

(f)

	1	2	3	4	5	6
(a)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
(b)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
(c)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
(d)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
(e)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>
(f)	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>	<input type="radio"/>

Figure 9: Questionnaires used in human evaluation.

A.6 Additional Qualitative Results

A.6.1 Additional Qualitative Comparisons on Visual Concept Editing

Figures 10–19 present additional qualitative results along diverse concept axes discovered in ImageNet-S20, CelebA-HQ, and AFHQ datasets. Across all axes, our method consistently outperforms the baselines. Whereas the baselines often fail to accurately capture and transfer the specified visual attributes, our approach reliably extracts the visual concept from the source and transfers it to the target image. Since LIVCL trains a set of separate encoders only for the top–10 frequent axes, it was unable to evaluate “lip color” in Figure 15 and “collar” in Figure 18, which are not among the top–10 most frequent concepts in the dataset, and we therefore mark those entries as N/A.
































































Target Concept	Source	Target	Ours	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Species							
							
							
Cap Color							
							
							
Sky Condition (e.g., clear, cloudy)							
							
							

Figure 10: Additional qualitative comparison to baselines in ImageNet-S20
































































Target Concept	Source	Target	Ours	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Eye Color							
							
							
Vehicle Type							
							
							
Wing Color							
							
							

Figure 11: Additional qualitative comparison to baselines in ImageNet-S20

Target Concept	Source	Target	Ours	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Stem Color							
							
							
Flower Color							
							
							
Age							
							
							

Figure 12: Additional qualitative comparison to baselines in ImageNet-S20









































































Target Concept	Source	Target	Ours	LIVCL	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Age								
								
								
Gender								
								
								
Hair length								
								
								

Figure 13: Additional qualitative comparison to baselines in CelebA-HQ

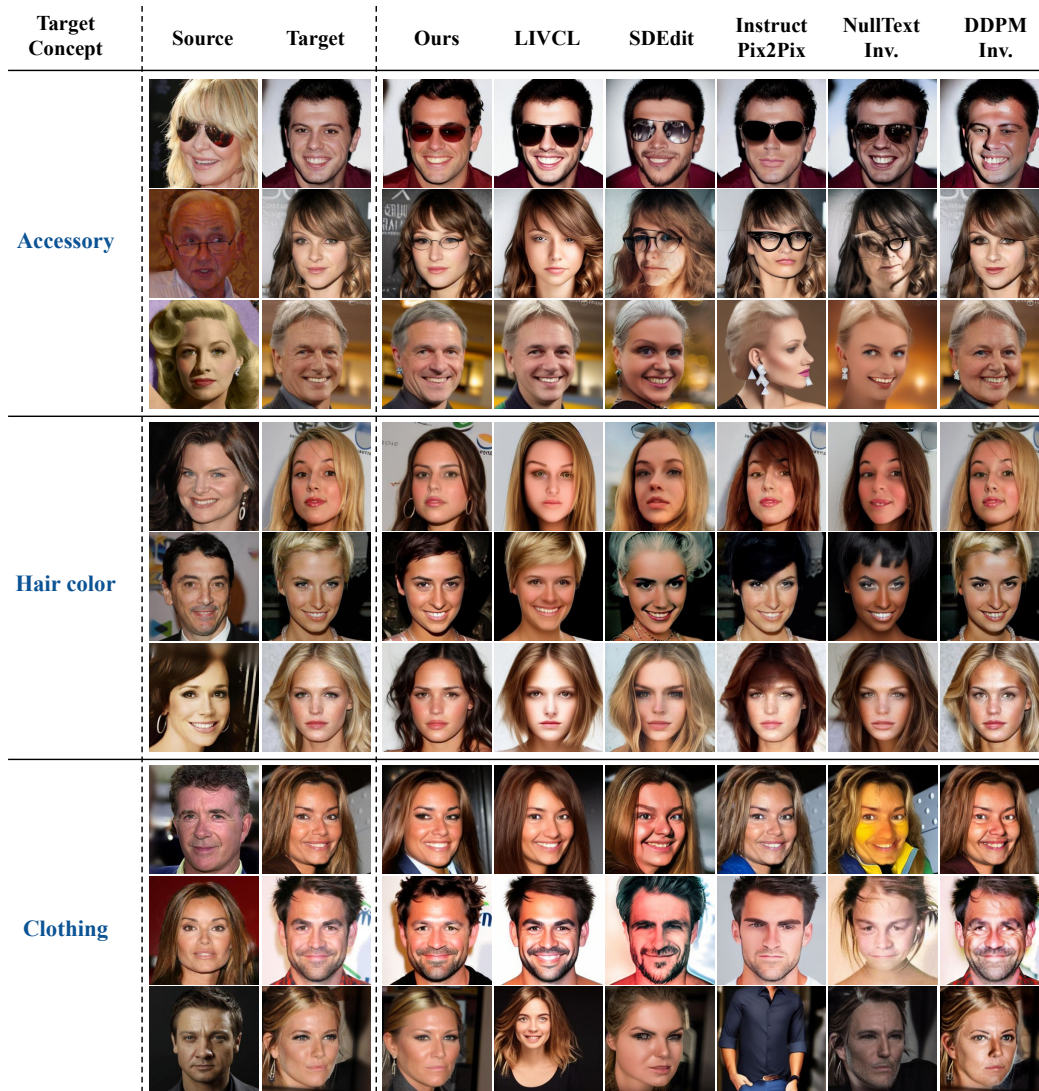


Figure 14: Additional qualitative comparison to baselines in CelebA-HQ

Target Concept	Source	Target	Ours	LIVCL	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Hair Texture								
Expression								
Lip Color				N/A				
				N/A				
				N/A				

Figure 15: Additional qualitative comparison to baselines in CelebA-HQ











Target Concept	Source	Target	Ours	LIVCL	SEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Breed								
								
								
Fur color								
								
								
Ear shape								
								
								

Figure 16: Additional qualitative comparison to baselines in AFHQ-Dog

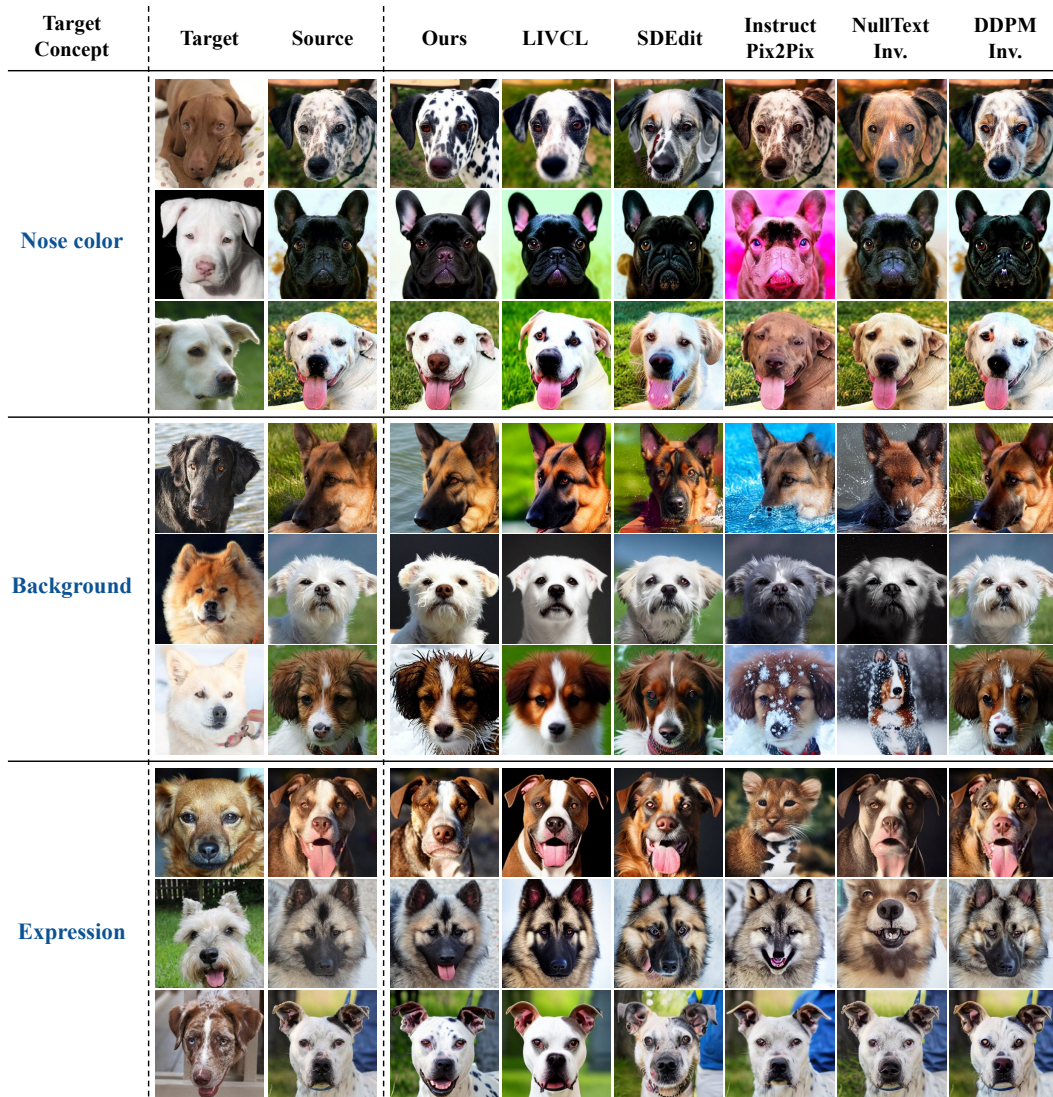


Figure 17: Additional qualitative comparison to baselines in AFHQ-Dog






































































Target Concept	Source	Target	Ours	LIVCL	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Fur Texture								
								
								
Eye Color								
								
								
Collar				N/A				
				N/A				
				N/A				

Figure 18: Additional qualitative comparison to baselines in AFHQ-Dog

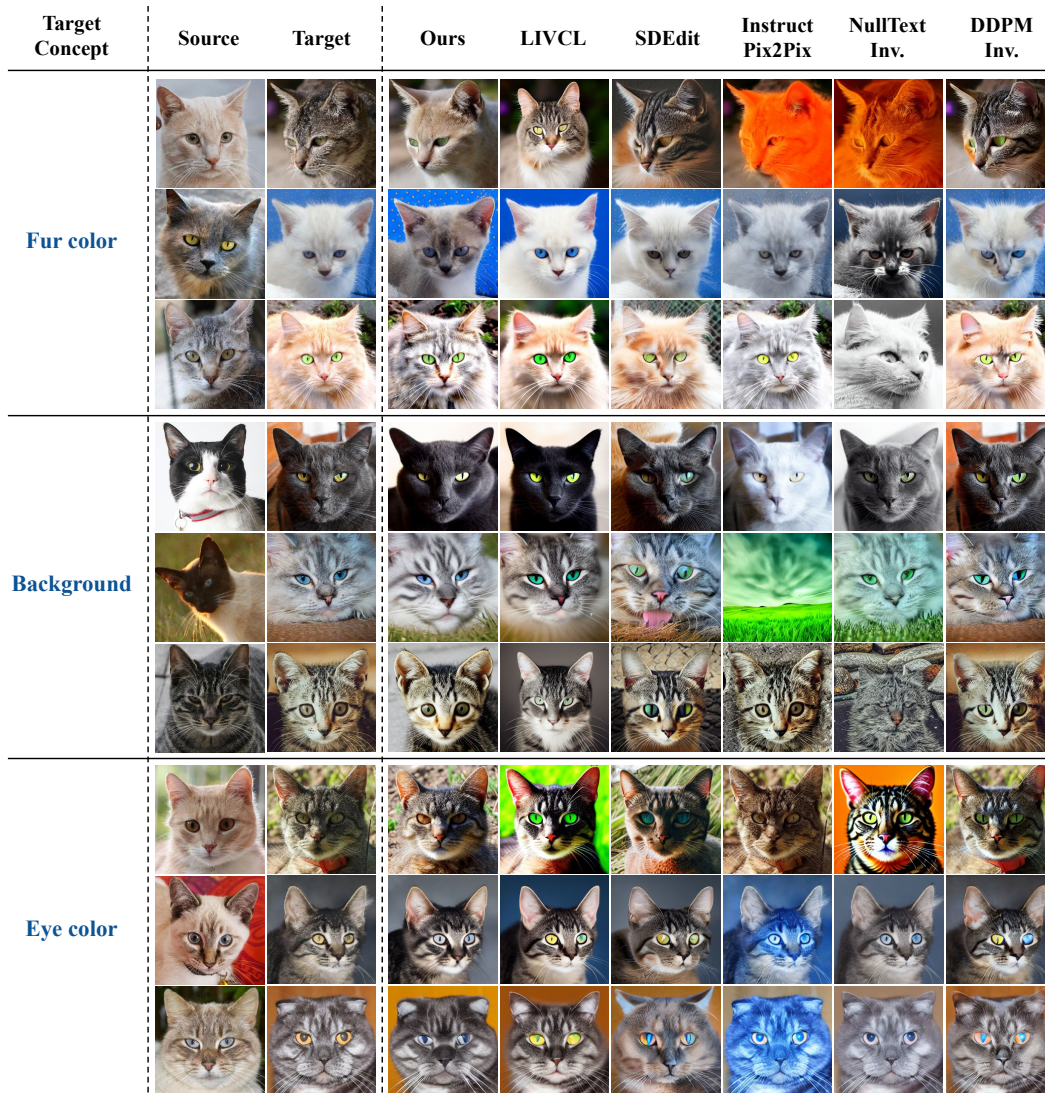


Figure 19: Additional qualitative comparison to baselines in AFHQ-Cat

















































Target Concept	Source	Target	Ours	LIVCL	SDEdit	Instruct Pix2Pix	NullText Inv.	DDPM Inv.
Expression								
								
								
Fur Pattern								
								
								

Figure 20: Additional qualitative comparison to baselines in AFHQ-Cat

A.6.2 More Qualitative Results on Compositions from Multiple Images

We provide more qualitative results on the composition of visual concepts from multiple images in Figure 23-27. We extract N distinct visual concepts from N different images and replace the corresponding visual concepts of the target image with them. Our method successfully transfers multiple visual concepts to target images, which implies that each visual concept extracted from source images is disentangled along other axes.

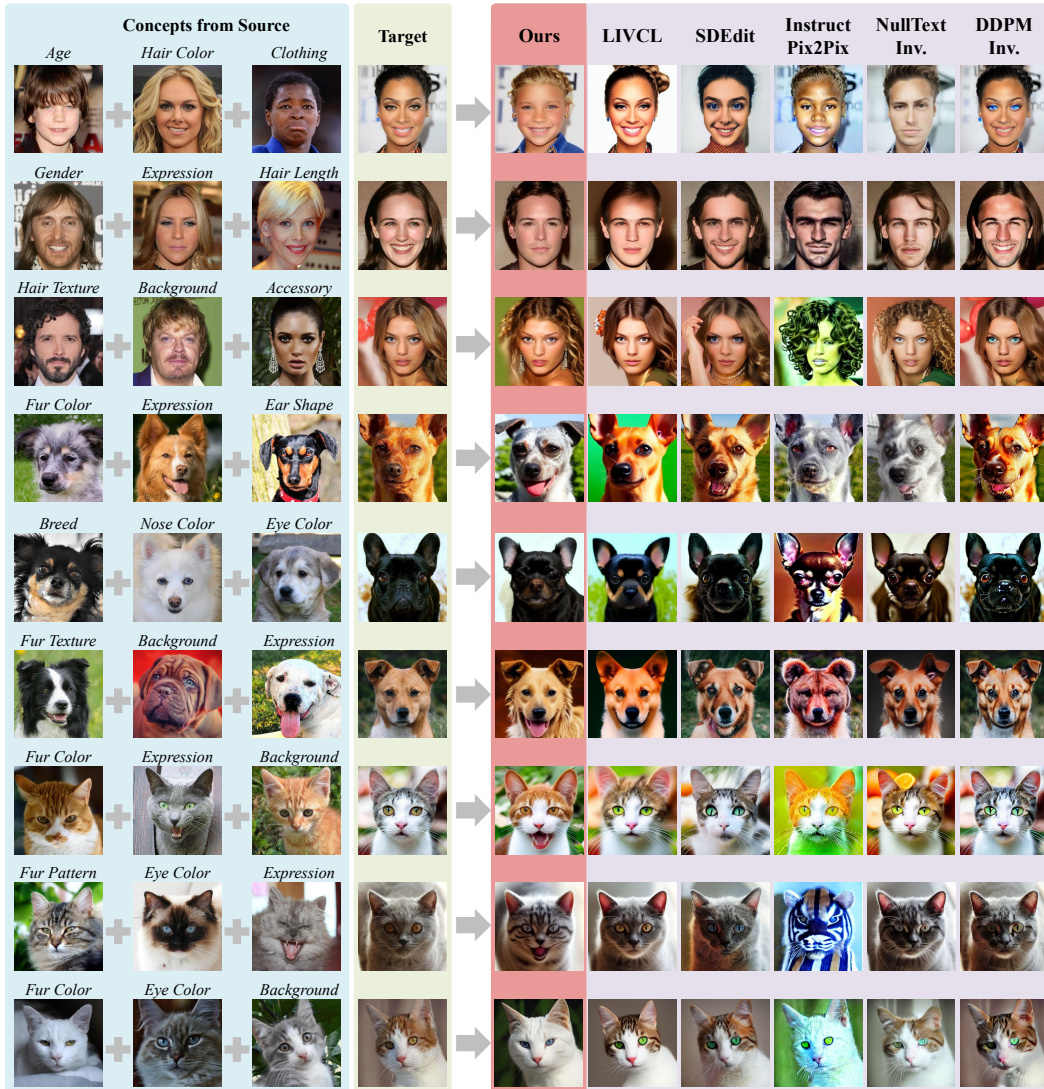


Figure 21: Compositions of visual concepts from multiple images ($N = 3$).

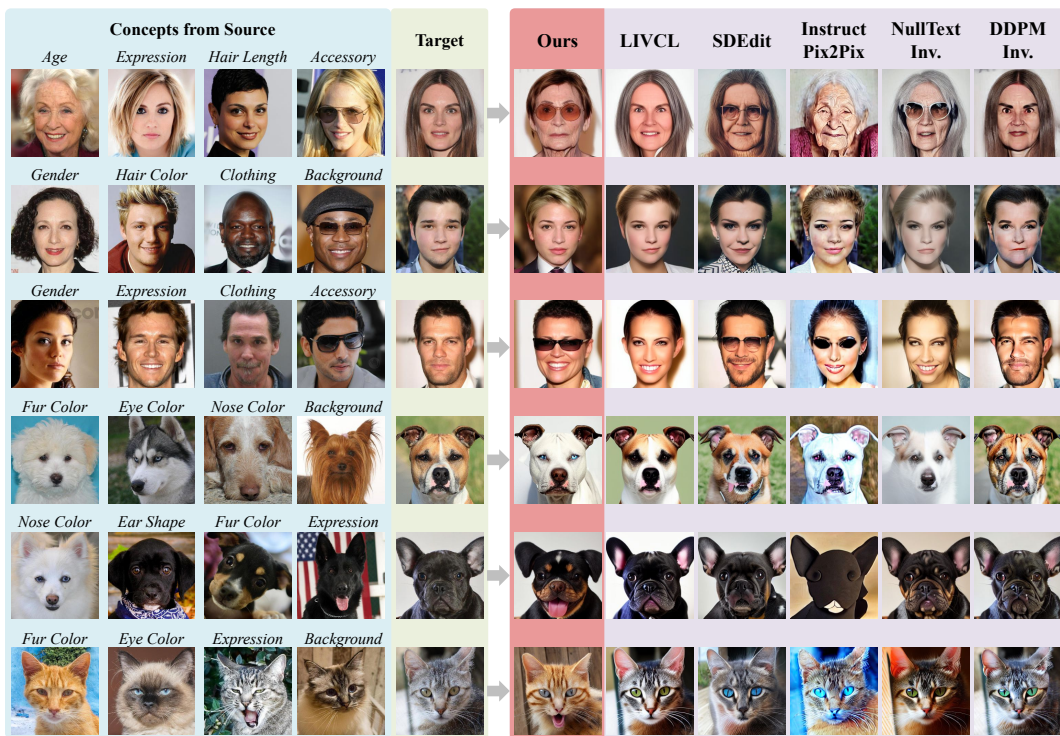


Figure 22: Compositions of visual concepts from multiple images ($N = 4$).

A.6.3 More Qualitative Results on Visual Nuance Transfer

We provide more qualitative results on transferring visual nuance from source to target images in Figure 23-27.

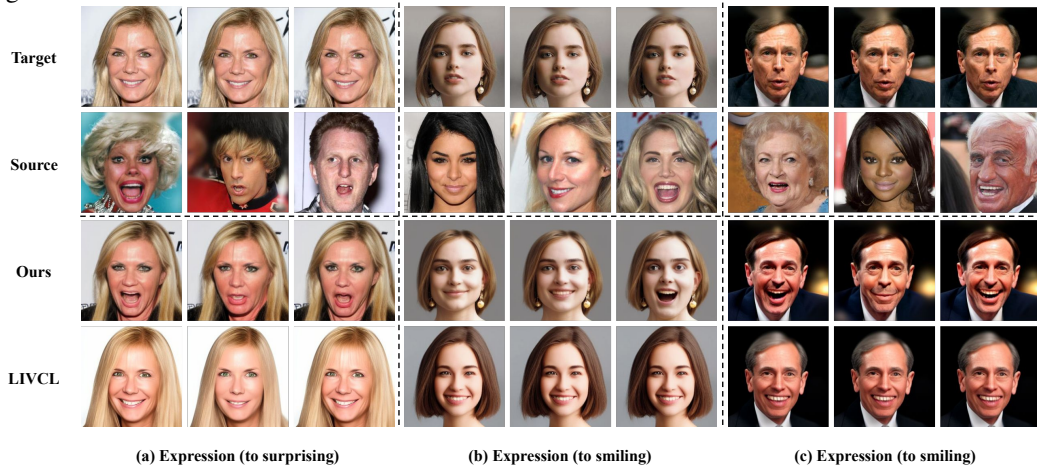


Figure 23: Transferring Visual Nuances from source to target images

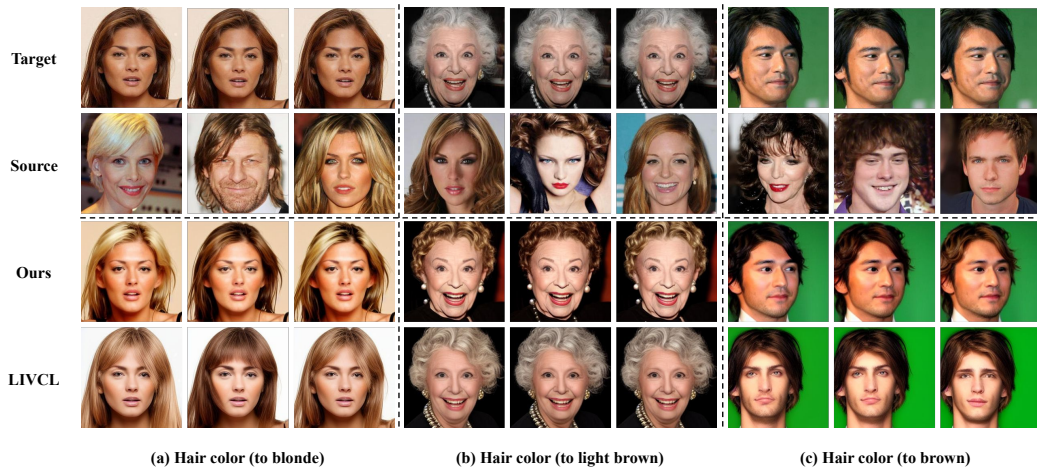


Figure 24: Transferring Visual Nuances from source to target images.

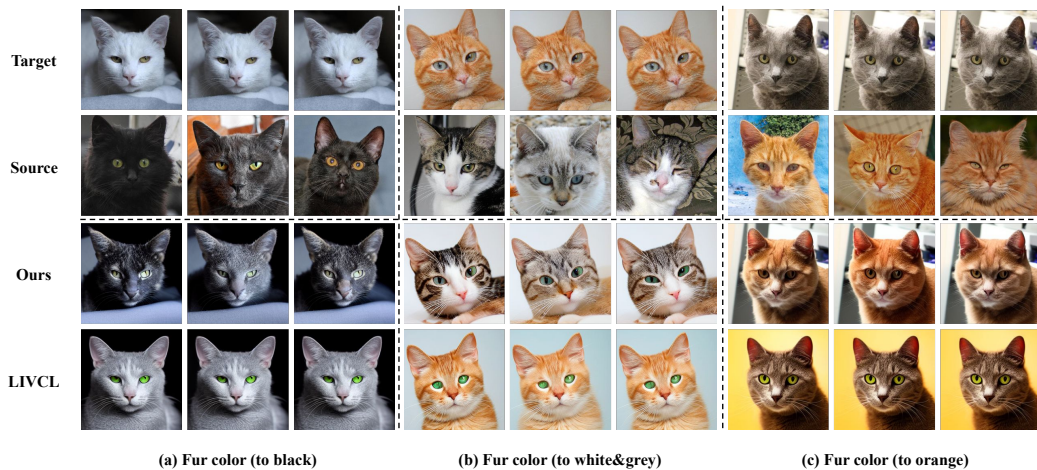


Figure 25: Transferring Visual Nuances from source to target images.

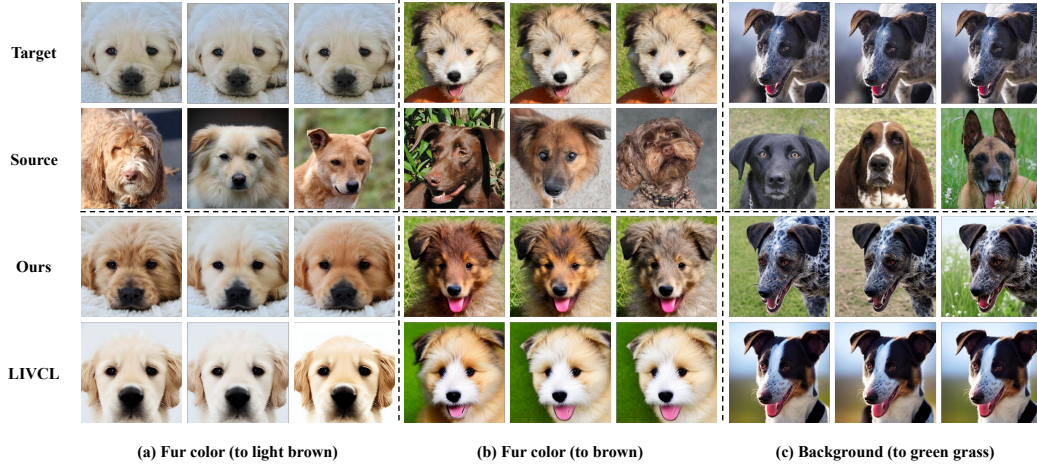


Figure 26: Transferring Visual Nuances from source to target images.

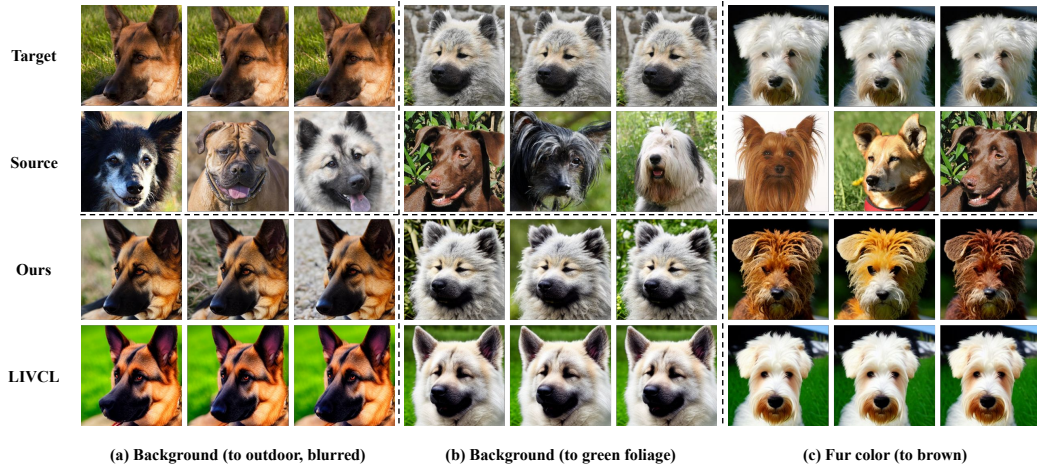


Figure 27: Transferring Visual Nuances from source to target images.

A.7 Computing Resources

All of our experiments are conducted on a GPU Server that consists of an Intel Xeon Gold 6230 CPU, 256GB RAM, and 8 NVIDIA RTX 6000 GPUs (with 48GB VRAM). It takes about 48 GPU hours for each dataset.

NeurIPS Paper Checklist

The checklist is designed to encourage best practices for responsible machine learning research, addressing issues of reproducibility, transparency, research ethics, and societal impact. Do not remove the checklist: **The papers not including the checklist will be desk rejected.** The checklist should follow the references and follow the (optional) supplemental material. The checklist does NOT count towards the page limit.

Please read the checklist guidelines carefully for information on how to answer these questions. For each question in the checklist:

- You should answer [Yes], [No], or [NA].
- [NA] means either that the question is Not Applicable for that particular paper or the relevant information is Not Available.
- Please provide a short (1–2 sentence) justification right after your answer (even for NA).

The checklist answers are an integral part of your paper submission. They are visible to the reviewers, area chairs, senior area chairs, and ethics reviewers. You will be asked to also include it (after eventual revisions) with the final version of your paper, and its final version will be published with the paper.

The reviewers of your paper will be asked to use the checklist as one of the factors in their evaluation. While "[Yes]" is generally preferable to "[No]", it is perfectly acceptable to answer "[No]" provided a proper justification is given (e.g., "error bars are not reported because it would be too computationally expensive" or "we were unable to find the license for the dataset we used"). In general, answering "[No]" or "[NA]" is not grounds for rejection. While the questions are phrased in a binary way, we acknowledge that the true answer is often more nuanced, so please just use your best judgment and write a justification to elaborate. All supporting evidence can appear either in the main paper or the supplemental material, provided in appendix. If you answer [Yes] to a question, in the justification please point to the section(s) where related material for the question can be found.

IMPORTANT, please:

- **Delete this instruction block, but keep the section heading "NeurIPS Paper Checklist",**
- **Keep the checklist subsection headings, questions/answers and guidelines below.**
- **Do not modify the questions and only use the provided macros for your answers.**

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [Yes]

Justification: We states our motivation, contributions, scope of our work in abstract and introduction.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We provide limitation of our work in Appendix.

Guidelines:

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA]

Justification: We do not claim for theoretical results.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We provide all the information needed to reproduce the experimental results.

Guidelines:

- The answer NA means that the paper does not include experiments.

- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
 - (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
 - (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
 - (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
 - (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility. In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [No] ,

Justification: Our code is not cleaned and prepared enough for sharing.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so “No” is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (<https://nips.cc/public/guides/CodeSubmissionPolicy>) for more details.
- The authors should provide instructions on data access and preparation, including how to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).

- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyper-parameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: We specify all the details for experimental setting.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [No]

Justification: Since our method requires costly GPU cost and time in training the diffusion model on real images, we were not affordable to conduct and provide repetitive experiments. We will add it in future.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: We provide information of computing resources used for the experiments in Appendix.

Guidelines:

- The answer NA means that the paper does not include experiments.

- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics <https://neurips.cc/public/EthicsGuidelines?>

Answer: [Yes]

Justification: We followed the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. Broader impacts

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: We discuss it in Appendix.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [No]

Justification: : Our paper possess no risk

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with necessary safeguards to allow for controlled use of the model, for example by requiring that users adhere to usage guidelines or restrictions to access the model or implementing safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We cite all the codes, data, paper, and pretrained model in our paper.

Guidelines:

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.
- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the package should be provided. For popular datasets, paperswithcode.com/datasets has curated licenses for some datasets. Their licensing guide can help determine the license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [NA]

Justification: We do not release any new assets

Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [Yes]

Justification: We provide detailed instructions of our human evaluation and we provide proper rewards to participants through Prolific website.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]

Justification: Our method and human evaluation possess no risk.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigor, or originality of the research, declaration is not required.

Answer: [Yes]

Justification: We used VLM for automatic extraction of visual concepts and provide detailed information in the paper.

Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (<https://neurips.cc/Conferences/2025/LLM>) for what should or should not be described.