

LLM-Ref: Enhancing Reference Handling in Technical Writing with Large Language Models

Anonymous ACL submission

Abstract

Large Language Models (LLMs) are effective at synthesizing knowledge but often lack accuracy in domain-specific tasks. Retrieval-Augmented Generation (RAG) systems, utilizing user-provided data, can mitigate the issue and assist in article writing. However, such systems lack the capability to generate proper references. In this paper, we present LLM-Ref, a writing assistant tool that aids researchers in writing articles from multiple source documents with enhanced reference synthesis and handling capabilities. Unlike traditional RAG systems, which rely on chunking and indexing, LLM-Ref retrieves and generates content at the paragraph level, allowing for seamless reference extraction for the generated text. Furthermore, the tool incorporates iterative response generation to accommodate extended contexts within language model constraints while actively mitigating hallucinations. Compared to baseline RAG-based systems, our approach achieves a $3.25\times$ to $6.26\times$ increase in Ragas score, a comprehensive metric that provides a holistic view of a RAG system’s ability to produce accurate, relevant, and contextually appropriate responses.

1 Introduction

Scientific research is fundamental in enriching our knowledge base, and contributing to the betterment of human lives. Precisely written research articles play a vital role in conveying new findings and innovations to a wide audience, preventing misinterpretations that might impede further developments. Writing research papers presents a challenge as it requires balancing technical complexity with readability while ensuring logical coherence. There exist writing assistant tools that utilize the latest advancements in natural language processing (NLP) to help researchers refine grammar and style, strengthen coherence, and ultimately contribute to high-quality, impactful articles.

Large Language Models (LLMs) have significantly advanced NLP applications by improving language understanding, generation, and interaction. While they excel in many NLP tasks, they require substantial computational resources and may struggle with specialized tasks without domain-specific knowledge. LLMs often produce inaccurate responses or ‘hallucinations’ when handling tasks beyond their training data. Developing an effective writing assistant using LLMs requires fine-tuning with domain-specific data from various fields, a process that demands extensive computational resources and a diverse dataset, making it costly to create a versatile and effective tool for diverse writing challenges.

Retrieval-Augmented Generation (RAG) (Lewis et al., 2021) systems have gained popularity as a means to alleviate the challenges involving LLMs in downstream tasks by incorporating user-provided information. Domain specific and up-to-date data integration enables language model to generate more factually accurate responses (Gao et al., 2024). RAGs preprocess external data in chunks and often utilize the top-k chunks as context for a particular query, which plays a crucial role in output generation. In research articles, the trade-off between chunk size and top-k context selection often leads to the omission of important nuanced information. Since the data is not chunked in a structured manner, it hinders the retrieval of citations present in the context.

In this paper, we present LLM-Ref, a writing assistant tool that helps researchers with enhanced reference extraction while writing articles based on multiple source documents. To preserve the citations in the context paragraphs, our writing assistant tool preserves the hierarchical section-subsection structure of source documents. Rather than dividing texts into chunks and transforming them into embeddings, our approach directly utilizes the paragraphs from research articles to iden-

tify information relevant to specific queries. To efficiently retrieve all the relevant information from the source documents, an LLM is utilized due to its superior performance in finding semantic relevance. Furthermore, iterative generation of output allows handling long context and accurate responses. Efficient retrieval and preservation of hierarchical source information enable the listing of comprehensive references, ensuring that users have access to detailed citation details. The proposed LLM-Ref can provide both primary references—the source documents—and secondary references, which are listed in the context paragraphs of the source documents. To the best of our knowledge, no other similar work focuses on providing both primary and secondary references.

Evaluation results show the superior performance of our tool over existing RAG-based systems. The proposed LLM-Ref demonstrates significant performance improvements over other RAG systems, achieving a $5.5\times$ higher Context Relevancy compared to Basic RAG. Additionally, it delivers an impressive increase in the Ragas Score, outperforming the best alternative by $3.25\times$. These results highlight that the proposed tool provides more accurate, relevant, and contextually precise outputs, enhancing the overall utility and reliability of the writing assistance it offers. The contributions of this paper include:

- We develop LLM-Ref, an advanced system that employs a hierarchical document processing approach, setting it apart from traditional RAGs while outperforming them.
- A key innovation of LLM-Ref is its ability to generate both primary and secondary references, a functionality absent in traditional systems.
- LLM-Ref’s generation mechanism adopts an iterative approach, effectively managing long contexts while minimizing hallucinations through source-context alignment.

2 Background and Related Works

Large Language Models (LLMs) have propelled the landscape of natural language processing (NLP), leveraging vast amounts of data to understand, generate, and interact with human language in a deeply nuanced and contextually aware manner. Models like ChatGPT (OpenAI, 2023; Brown et al., 2020) and LLaMa (Touvron et al., 2023)

have demonstrated exceptional performance across a wide range of NLP benchmarks (Bubeck et al., 2023; Hendrycks et al., 2021; Srivastava et al., 2023), solidifying their role as indispensable tools in both everyday applications and cutting-edge research. However, the remarkable performance of LLMs incurs huge computational costs to train the several billions of parameters of the model on enormous amounts of data (Kaddour et al., 2023). Moreover, unless fine-tuned for domain-specific downstream tasks, the performance of LLMs degrades notably (Kandpal et al., 2023; Gao et al., 2024). Being transformer-based models (Vaswani et al., 2023), LLMs have restrictions on how much input context they can utilize for response generation which affects the quality of the output. Conversely, LLMs with long context lengths fail to relate the content in the middle. Compounding the challenges, LLMs exhibit ‘hallucinations’ when tasks require up-to-date information that extends beyond their training data (Zhang et al., 2023; Kandpal et al., 2023; Gao et al., 2024). These drawbacks often complicate developing custom downstream applications with LLMs.

Retrieval-Augmented Generation (RAG) (Lewis et al., 2021) systems address the challenge of generating potentially factually inaccurate content by actively sourcing information from external knowledge databases during the generation phase. The basic workflow of Retrieval-Augmented Generation (RAG) involves several key stages: indexing, retrieval, and generation (Lewis et al., 2021; Ma et al., 2023a). Initially, RAG creates an index from external sources, preparing data through text normalization processes like tokenization and stemming, enhancing searchability. This index is crucial for the subsequent retrieval stage, where models like BERT (Devlin et al., 2019) enhance accuracy by understanding the semantic nuances of queries. During the final generation phase, the system uses the retrieved information and the initial query to produce relevant and reflective text. This process involves synthesizing the content to ensure it not only aligns with the retrieved data and query intent but also introduces potentially new insights, balancing accuracy with creativity.

Building on the foundational workflow of RAG, recent advancements in large language models (LLMs) have introduced more sophisticated techniques for managing extensive data and enhancing the relevance and accuracy of generated content. MemWalker (Chen et al., 2023) tackles the

limitations of context window size by creating a memory tree from segmented text, which improves indexing and data management for long-context querying. This method is complemented by other innovative approaches like KnowledGPT (Wang et al., 2023) and Rewrite-Retrieve-Read (Ma et al., 2023b), which refine query manipulation through programming and rewriting techniques to better capture user intent. Such approaches suffer from the complexity of multi-hop queries where error propagation affects the response significantly.

In parallel, PRCA (Yang et al., 2023) employs domain-specific abstractive summarization to extract crucial, context-rich information, enhancing the quality of query responses. FiD-light (Hofstätter et al., 2022) introduces a listwise autoregressive re-ranking method that links generated text to source passages, organizing the retrieval and generation process to improve coherence and relevance. Similarly, RECOMP (Xu et al., 2023) compresses information into concise summaries, focusing on the most pertinent content for generation, thus streamlining the workflow and improving output quality. These diverse approaches collectively advance LLMs’ capabilities in handling extensive, complex data, refining the interaction between retrieval and generation for more accurate, contextually relevant outputs. However, none of the approaches address reference handling.

GPT-based models are highly effective at paraphrasing, and grammar correction, and also excel in crafting informative paragraphs suitable for research papers. Current popular LLMs can conduct question-answering tasks using user-provided data, marking a significant advancement in its functionality. Despite supporting multiple user files as inputs, most of them do not return the specific context utilized in the generation process nor do they offer comprehensive secondary references. While commercial tools exist to assist researchers, the lack of sufficient documentation limits transparency and prevents direct evaluation against LLM-Ref. The implementation of our method is open-source and available at [GitHub]¹ for reproducibility and further research. LLM-Ref is a novel system designed to enhance document processing through a hierarchical approach. A significant contribution of LLM-Ref is its capacity to generate both primary and secondary references, a capability lacking in existing systems. Furthermore, its iterative generation process improves long-context handling and reduces hallucinations by aligning generated con-

tent with source contexts, making it a robust and reliable solution for reference synthesis.

3 Architecture of Proposed LLM-Ref

In this section, we describe LLM-Ref, a writing tool designed to assist researchers by providing enhanced reference synthesis and handling capabilities, while synthesizing responses based on the information found within the context of provided research articles. Most RAG-based systems face challenges in the retrieval of relevant and correct input contexts and do not provide primary sources or secondary references when synthesizing results from multiple source documents. In contrast, LLM-Ref extracts a hierarchical structure of the contents from the source documents and provides appropriate references with the synthesized output. The architecture of the system is shown in Figure 1.

A research article is typically structured into sections and subsections to present and elucidate a particular problem, background information, and analysis. Within a section or subsection, each paragraph conveys a specific intention. To develop a writing assistant for research articles, it is crucial to extract source content efficiently with proper hierarchy. Given this, the proposed LLM-Ref begins with ① *Content Extractor* that extracts texts and the reference list from the source documents, ensuring that the original organization of the paragraphs is kept intact. It stores information from each document, including summaries of paragraphs generated by an LLM, in an offline repository. For any particular query, ② *Context Retrieval* finds the most relevant sections of texts using an LLM. A specialized component, ③ *Iterative Output Synthesizer* then processes these contexts with the corresponding query, using a language model to generate text based on the given input and predefined context length. In the final step, accurate citations of the synthesized output are extracted from the contexts by ④ *Reference Extractor*. All the prompts utilized in our work are given in the Appendix A.5.

3.1 Source Content Extraction

RAG systems typically process source documents as discrete chunks, often disregarding section- and subsection-level abstraction. Capturing this abstraction requires machine learning-based classification and segmentation trained on domain-specific research article datasets. While identifying sections

¹<https://github.com/dummy-anonymous-git/>

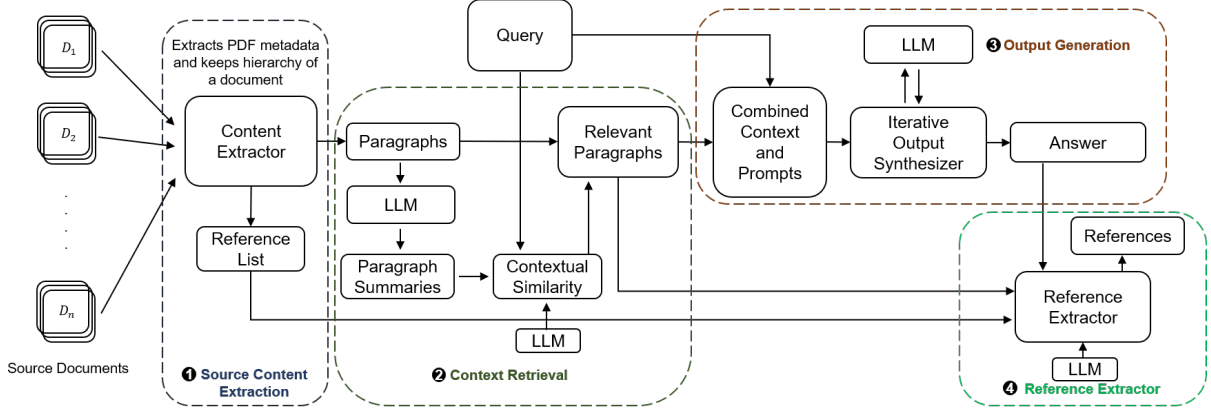


Figure 1: The overall architecture of the LLM-Ref. ① *Content Extractor* extracts texts and references of each source documents. Each article metadata along with respective paragraph summaries extracted from an LLM are stored offline. For a given *query*, in ② *Context Retrieval*, relevant paragraphs are extracted and combined with prompts to generate answers. The ③ *Iterative Output Synthesizer* feeds the combined prompt and context to an LLM for output text generation based on context length limit. Finally, the ④ *Reference Extractor* extracts respective references for output text from relevant paragraphs.

and subsections is challenging, the standardized styles and formats of research articles provide valuable cues for document hierarchy. Therefore, we utilize text formatting to infer the structural abstraction of the source documents.

Our text extractor, *Content Extractor*, reads each source file and extracts its contents while maintaining the abstraction of the content flow, utilizing the Python library *pdfminer*. This library offers fine-grained access to most content objects, allowing the *Content Extractor* to understand the research writing template. First, *Content Extractor* extracts the page layout and font-related statistics from all the pages in a document to identify article formatting details, such as the number of columns and font attributes (name, size, and style). Section and subsection labels are identified by searching for common keywords like ‘Introduction’, ‘Abstract’, ‘References’, ‘2.1’, ‘3.1’, ‘4.1’, ‘a.’, ‘(a)’, etc. However, keyword searching alone is not sufficient to accurately position and extract sections or subsections due to multiple possible instances of same section or subsection name. For precise positioning and extraction, we verify the position and text details of each search item against the formatting details initially acquired. Once the sections and subsections labels are accurately extracted, the text organized in paragraphs is extracted. To identify paragraph separation, we leverage indentation, line spacing, and column information. Thus, we store paragraphs within each section and subsection, preserving the correct abstraction.

In general, RAGs process and store documents

by dividing them into chunks and applying embeddings. These embeddings are indexed and later used to retrieve relevant chunks through a similarity operation that compares the input chunks with the query. On the contrary, in our approach, we store source information offline in existing paragraphs. To retrieve relevant context, we additionally store concise and informative summaries of each paragraph which are used in the retrieval stage. However, we utilize corresponding original paragraphs for output generation and reference extraction.

3.2 Context Retrieval

In conventional RAG systems, effective text chunking is essential for transforming text segments into vector embeddings for similarity-based retrieval, ensuring both accuracy and relevance to a given query. The effectiveness of chunking depends on content type, embedding model specifications, query complexity, and application needs. Chunk size, if too large or too small, can greatly impact retrieval accuracy and system efficiency.

To mitigate the existing challenges in the retrieval stage, we perform contextual similarity between the query and the summarized paragraphs of the source documents using an LLM. The prompt consists of the user query and a paragraph from a source document. Once the relevant paragraphs are identified using the corresponding summaries, the original paragraphs are selected and fed as context for the output generation step. In our experiments, LLM-based contextual similarity performs better than embedding-based approaches due to their su-

perior performance in understanding underlying context. Although overlapping or sliding window-based large chunking positively affects retrieving contexts, LLM-based contextual similarity on paragraphs has a better outcome on output generation and reference extraction. Using paragraphs as context can be challenging due to the LLM’s context length limitations, a problem we mitigate with our iterative output generation step should it arise.

3.3 Output Generation

In the output generation step, the query and the relevant context paragraphs are combined and fed to the LLM. Usually, it is observed that research paper-related queries tend to have many context paragraphs which often do not fit within the context limit of the LLM. Moreover, LLM suffers from the ‘Lost in the Middle’ phenomenon when the context is too long. To address these issues, the *Iterative Output Synthesizer* is capable of synthesizing responses iteratively by processing input paragraphs and ensuring they fit within the context limit of the language model. Initially, the unit feeds the first paragraph (as context) along with the query to an LLM to generate output. The response from the LLM is then continuously updated with the rest of the relevant paragraphs. While the system generates output through continuous updates, it enforces the context limit by monitoring the size of the query, the paragraphs, and the response.

3.4 Reference Extraction

Despite the popularity, RAG-based systems fall short in offering references. While the popular commercial LLMs now has the capability to process user data, it does not provide definite necessary contexts or references that are essential for academic research. LLM-ref extracts the references from input context paragraphs. Our system adeptly identifies the source documents, referred to as ‘primary references’, along with the citations found within the source context paragraphs, which we term ‘secondary references’. During the generation phase, LLMs omit citation notations, posing challenges in reference extraction. So our system adopts two presentations of references: Coarse-grain references for broader citation identification and Fine-grain references for more detailed citation tracking. Most research papers use either ‘enumerated’ (e.g., ‘[1]’, ‘[2-5]’, ‘[3,9]’) or ‘named’ (e.g., ‘(Author name et al., 2024)’ reference notations and our reference extractor is adept at recognizing both types.

3.4.1 Coarse-grain References

In coarse-grain reference extraction, the *Reference Extractor* catalogs all the references identified within the contexts. As contexts are extracted as paragraphs containing information relevant to the queries, this approach offers a comprehensive overview of a specific issue. The tool enumerates all the source papers and secondary references found within these context paragraphs, enabling users to analyze the referenced materials.

3.4.2 Fine-grain References

In fine-grain reference extraction, the *Reference Extractor* meticulously identifies the context lines most relevant to each line in the output text with the help of an LLM. This method of pinpointing the most similar context lines enables us to discover more specific references, thus achieving greater precision in our reference extraction process. We determine the highest relevance between response lines and source context lines using an LLM. By identifying the most relevant source contexts, we can extract primary and secondary references with high precision. This process facilitates the rapid compilation of synthesized outputs from a multitude of source documents.

4 Experimental Setup

4.1 Evaluating RAG Approaches

Our evaluation compares LLM-Ref with three other RAG implementations: Basic RAG (Lewis et al., 2021), Parent-Document Retriever (PDR) RAG (LangChain, 2023c), and Ensemble RAG (LangChain, 2023a), highlighting their methodologies and applications.

The Basic RAG approach integrates a retriever and a language model to answer questions based on retrieved documents. It involves splitting documents into chunks, embedding them with models, and storing them in a vector database. The retriever fetches relevant chunks based on the query, which the language model uses to generate accurate responses.

The PDR RAG enhances retrieval precision by structuring documents into parent-child relationships. Larger parent chunks and smaller child chunks are embedded and stored in a vector database and in-memory store. A ParentDocumentRetriever fetches relevant chunks, providing refined context to the language model, ensuring more precise context and accurate responses.

The Ensemble RAG combines multiple retrievers to leverage their strengths, resulting in a more robust retrieval system. It uses different retrievers, such as BM25 for keyword matching and vector-based retrievers for semantic similarity. An EnsembleRetriever balances their contributions, using the aggregated context for the language model to generate responses, enhancing retrieval robustness and accuracy for complex queries.

4.2 Dataset

The evaluation of systems similar to RAG necessitates human-annotated ground truth answers for a variety of questions, a requirement that proves difficult to fulfill across multiple domains. To address this challenge, Ragas (Es et al., 2023) and ARES (Saad-Falcon et al., 2023) employ datasets generated by ChatGPT as ground truth from specific documents. We follow this approach by leveraging GPT-4, simulating an advanced researcher, to create research question-answer-context pairs based on the provided source documents. These generated question-answer-context pairs serve as a benchmark to assess the relevance and accuracy of contexts retrieved and outputs generated by RAG, facilitating a comprehensive analysis of evaluation metrics in conjunction with Ragas.

To evaluate our system on domain-specific tasks, we curated a diverse arXiv dataset with question-answer-context pairs from Physics, Mathematics, Computer Science, Quantitative Finance, Electrical Engineering and Systems Science, and Economics. The dataset contains 955 question-answer-context pairs derived from multiple documents within the same subject area. By combining information from various sources, we aim to capture a broader and more comprehensive understanding of each subject. During the evaluation, source documents corresponding to the question-answer-context pairs are provided to the RAG systems.

4.3 Evaluation Metrics

We employ the Ragas (Es et al., 2023) framework to evaluate the performance of the RAG systems. *Faithfulness* ensures the generated response is based on the provided input context, avoiding false or misleading information (‘hallucinations’). It is crucial for transparency and accuracy, ensuring the context serves as solid evidence for the answer.

Answer Relevance measures how well the generated response directly addresses the question, ensuring responses are on-topic and accurately meet the

query’s requirements. *Answer Similarity* measures how closely the generated answer aligns with the ground truth in both content and intent, reflecting the RAG system’s understanding of the concepts and context (Es et al., 2023).

Context Relevance ensures the retrieved context is precise and minimizes irrelevant content, which is crucial due to the costs and inefficiencies associated with processing lengthy passages through LLMs, especially when key information is buried in the middle (Liu et al., 2023). *Context Precision* gauges the system’s ability to prioritize relevant items, ensuring that the most pertinent information is presented first and distinguishing it from irrelevant data. *Context Recall* measures the model’s ability to retrieve all relevant information, balancing true positives against false negatives, to ensure no key details are missed. (Es et al., 2023).

The Ragas score combines key metrics: faithfulness, answer relevancy, context relevancy, and context recall (LangChain, 2023b). By integrating these metrics, the Ragas score provides a holistic view of a RAG system’s ability to produce accurate, relevant, and contextually appropriate responses, guiding improvements for enhanced performance. A comprehensive explanation of the calculations is provided in the Appendix A.6.

5 Results and Analysis

5.1 Metric Analysis

We first present the performance metrics of LLM-Ref compared to Basic RAG, PDR RAG, and Ens. RAG using GPT-3.5 as the LLM in Table 1. LLM-Ref significantly outperforms six of the seven metrics, performs similarly in the remaining one, and achieves an overall superior performance in the Ragas Score.

During evaluation with the Ragas framework, LLM-Ref consistently outperforms the other methods across most metrics, demonstrating its superior performance in terms of accuracy and relevance. It achieves an Answer Relevancy score of 0.948, substantially higher than Basic RAG (0.598), PDR RAG (0.575), and Ens. RAG (0.613), indicating its effectiveness in providing pertinent and aligned answers to the questions. Its Answer Correctness is 0.568, surpassing others ranging from 0.448 to 0.459, demonstrating superior accuracy. LLM-Ref also attains the highest Answer Similarity score of 0.942 compared to others between 0.892 and 0.905. These metrics based on the final responses

Name	Answer Relevancy	Answer Correctness	Answer Similarity	Context Relevancy	Context Precision	Context Recall	Faithfulness	Ragas Score
Basic RAG	0.598	0.448	0.892	0.049	0.857	0.697	0.547	0.158
PDR RAG	0.575	0.458	0.896	0.023	0.852	0.716	0.622	0.082
Ens. RAG	0.613	0.459	0.905	0.043	0.851	0.717	0.600	0.143
LLM-Ref	0.948	0.568	0.942	0.268	0.976	0.705	0.629	0.513

Table 1: Metric evaluation result comparison of LLM-Ref with Basic RAG, Parent Document Retriever RAG, and Ensemble Retrieval RAG, using GPT-3.5 as the LLM. Higher values indicate better performance. The highest scores are highlighted in bold. Additional results for GPT-4o-mini, Llama, and Claude models are given in Table 5.

demonstrate the superior efficacy of LLM-Ref in generating answers that are well-aligned with the queries and underlying intent. For Context Relevancy and Precision, LLM-Ref scores 0.268 and 0.976 respectively, are significantly higher than the other methods, which indicates its exceptional ability to retrieve and utilize relevant information. While Context Recall scores are similar across all methods, LLM-Ref achieves the highest Faithfulness score at 0.629, showing that its answers are well-grounded in the provided context. The composite Ragas Score for LLM-Ref is 0.513, notably higher than Basic RAG (0.158), PDR RAG (0.082), and Ens. RAG (0.143), highlighting its overall effectiveness in synthesizing responses for research articles. LLM-Ref outperforms other RAG systems by retrieving more relevant information, providing precise context, and delivering accurate, consistent, and high-quality responses.

5.2 Performance across LLMs

The proposed LLM-Ref method significantly outperforms traditional RAG approaches in terms of accuracy, as demonstrated by the Ragas scores in Table 2. Across various large language models (LLMs)—GPT-3.5, GPT-4o-mini, Llama 3.1-405b, and Claude 3.5 Sonnet—LLM-Ref consistently achieves the highest scores. For instance, with GPT-4o-mini, LLM-Ref records a Ragas score of 0.413, substantially higher than Basic RAG (0.138), PDR RAG (0.112), and Ens. RAG (0.096). Similar trends are observed across all LLMs, with LLM-Ref maintaining a lead of over $2.5\times$.

These results underscore LLM-Ref’s ability to generate accurate, contextually relevant outputs essential for research article writing. By integrating paragraph summarization, context extraction, and reference alignment, it addresses the limitations of standard RAG systems reliant solely on embeddings. The improved accuracy justifies its higher computational cost, proving its superiority

for precision-critical applications.

Method	GPT 3.5	GPT 4o-mini	Llama 3.1-405b	Claude 3.5 Sonnet
Basic RAG	0.143	0.138	0.114	0.142
PDR RAG	0.052	0.112	0.079	0.055
Ens. RAG	0.097	0.096	0.105	0.096
LLM-Ref	0.389	0.413	0.300	0.422

Table 2: Ragas score comparison for LLM-Ref across various LLMs.

5.3 Computational Cost

LLM-Ref prioritizes accuracy in research article writing, resulting in higher computational costs compared to traditional Retrieval-Augmented Generation (RAG) systems. These costs are primarily attributed to four stages: content extraction, context retrieval, response generation, and reference validation. Each step involves calls to large language models (LLMs), with overhead during content summarization and reference extraction, both of which are unique to our approach. While this increases input and output tokens due to summarization and similarity search, it ensures enhanced precision and relevance in the generated outputs.

	Cost (\$)	Ragas score	Input Tokens	Output Tokens
Basic RAG	0.06	0.14	359,115	11,562
PDR RAG	0.08	0.11	589,582	13,911
Ens. RAG	0.09	0.10	569,531	13,885
LLM-Ref-L	1.79	0.42	5,430,489	156,222
LLM-Ref-B	0.56	0.26	3,646,600	128,992

Table 3: Comparison of cost, Ragas score, input tokens, and output tokens when GPT-4o-mini is used as the LLM. Here, LLM-Ref-L employs an LLM for similarity computation, whereas LLM-Ref-B utilizes a BERT model.

Table 3 highlights the comparative cost, Ragas score, and token usage for LLM-Ref and three RAG systems for 150 queries of the computer sci-

Answer: Discrete units in direct speech-to-speech translation (S2ST) systems offer several advantages over cascaded systems [1-8]. Firstly, they have lower computational costs and inference latency because they require fewer decoding steps [1, 8, 10-12]. This makes them more efficient and faster in translating speech [1-3, 7, 8, 10-12]. Additionally, direct S2ST is a natural approach for languages that do not have a writing system, as it eliminates the need for intermediate text representation. Another benefit of direct S2ST systems with discrete units is their flexibility in training. They can be trained with or without text transcripts, making them suitable for both written and unwritten languages [1, 6, 7, 9, 13]. ...

References:

- [1] A. Lee et al., "Direct speech-to-speech translation with discrete units," arXiv, 2021.
- [2] A. Lee et al., "Textless speech-to-speech translation on real data," arXiv, 2021.
- [3] S. Popuri et al., "Enhanced Direct Speech-to-Speech Translation Using Self-supervised Pre-training and Data Augmentation," arXiv, 2022.
- [4] Ye Jia et al., Direct speech-to-speech translation with a sequence-to-sequence model. Proc. Interspeech 2019.
- ...
- [13] A. Tjandra et al., "Speech-to-speech translation between untranscribed unknown languages." In 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), 2019.

Figure 2: Fine-grained reference samples generated by LLM-Ref when GPT-3.5 is used as the LLM.

ence subset. While LLM-Ref incurs higher computational costs than existing RAG systems, the expense is justified by its ability to minimize human labor and streamline academic writing. Considering that research expenses run into thousands of dollars, LLM-Ref remains affordable. By generating precise, contextually relevant responses, LLM-Ref significantly eases researchers' workload, making it a valuable tool in scholarly writing.

We also evaluate an off-the-shelf BERT-based model, specifically the RoBERTa-large variant from Sentence Transformers (all-roberta-large-v1) (Reimers and Gurevych, 2019), for similarity computation in retrieving relevant paragraphs for a given query. While LLM-Ref-B still outperforms other baseline RAG systems, its Ragas score declines compared to LLM-Ref-L as the number of relevant contexts decreases. This decline can be attributed to the fact that the BERT model used was not fine-tuned for our domain-specific tasks, leading to reduced efficacy. These findings highlight the importance of hierarchical paragraph extraction and demonstrate the flexibility of our approach in adapting to different retrieval strategies. Appendix A.3.2 details the computational cost of each LLM-Ref stage, while Appendices A.3 and A.4 provide additional analyses with different LLMs.

5.4 Reference Extraction

To demonstrate the effective functionality of LLM-Ref, we present a sample of the fine-grained references in Figure 2. For a specific query, LLM-Ref successfully generates fine-grained references, which include both enumerated references such as '[11, 12]' and named references such as '(Jia et

al., 2021)'. This capability highlights the system's ability to seamlessly integrate both numerical and textual citation styles, ensuring compatibility with diverse referencing standards used across academic disciplines. For improved clarity and presentation, we organize all references in an enumerated format in the figure.

In this example, we utilize three primary source documents to generate the response. References '[1]', '[2]', and '[3]' correspond to the primary sources directly informing the response. Additionally, the secondary references, ranging from '[4]' to '[13]', are citations found within the primary sources themselves. By integrating primary and secondary references, LLM-Ref ensures a traceable foundation for responses and emphasizes its use-case for in-depth source synthesis.

More examples are presented in Appendix A.7 that showcase LLM-Ref's ability to consistently identify and organize fine-grained references across LLM architectures and its model-agnostic nature.

6 Conclusion

We present a novel writing assistant that can assist researchers in the extraction of relevant references while synthesizing information from source documents. The proposed system can alleviate the challenging optimization required in RAGs and generate output responses effectively. Moreover, our system can list primary and secondary references to assist researchers where in paying more attention to literature investigation. We intend to explore the opportunities of offline open-source LLMs to build a more flexible system in the future.

7 Limitations and Ethical Considerations

Our contribution to this work begins with the PDF file reading component, the Content Extractor, which is designed to handle the most common template styles of research articles. The extraction process is based on various heuristics; however, our *Content Extractor* may not efficiently handle all template styles. Extracting references, particularly reference lists, presents challenges that limit the support capabilities of LLM-Ref. We extract reference lists and store them with their identifiers in the texts. Our system has been tested with various research paper templates, including IEEE, ACL, and many arXiv formats. It has demonstrated proficiency in successfully extracting context, especially when reference styles are enumerated (e.g., [1], [2], [4, 28]) or named (author et al., year). We developed this writing assistant tool primarily to guide researchers in exploring different aspects of research, rather than to enable the writing of a research article overnight without in-depth investigation. Both our coarse-grain and fine-grain reference extraction methods can guide researchers on where to focus their efforts more intensively.

In this paper, we present the evaluation of our system using GPT models. Additionally, we apply our writing assistant tool to the Llama and Claude models, demonstrating similar results, which underscores the efficacy of our approach across a broad range of LLMs. We plan to extend our comprehensive evaluation of the tool across diverse domain-specific research articles, utilizing open-source Large Language Models (LLMs). Given that LLM-Ref leverages the LLM API, mitigating model bias poses a significant challenge. To minimize potential bias in responses, several measures have been implemented. Specifically, when generating responses to a query, only the contexts identified within the relevant uploaded PDF files are used. Furthermore, the ‘temperature’ parameter is set to zero, thereby eliminating randomness in the generation process. This approach ensures that the generated responses are closely aligned with the input contexts and maintain a high degree of specificity.

References

Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss,

Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. 2020. *Language models are few-shot learners*.

Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrike, Eric Horvitz, Ece Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, Harsha Nori, Hamid Palangi, Marco Tulio Ribeiro, and Yi Zhang. 2023. *Sparks of artificial general intelligence: Early experiments with gpt-4*.

Howard Chen, Ramakanth Pasunuru, Jason Weston, and Asli Celikyilmaz. 2023. *Walking down the memory maze: Beyond context limit through interactive reading*.

Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. *Bert: Pre-training of deep bidirectional transformers for language understanding*.

Shahul Es, Jithin James, Luis Espinosa-Anke, and Steven Schockaert. 2023. *Ragas: Automated evaluation of retrieval augmented generation*.

Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Qianyu Guo, Meng Wang, and Haofen Wang. 2024. *Retrieval-augmented generation for large language models: A survey*.

Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and Jacob Steinhardt. 2021. *Measuring massive multitask language understanding*.

Sebastian Hofstätter, Jiecao Chen, Karthik Raman, and Hamed Zamani. 2022. *Fid-light: Efficient and effective retrieval-augmented text generation*.

Jean Kaddour, Joshua Harris, Maximilian Mozes, Herbie Bradley, Roberta Raileanu, and Robert McHardy. 2023. *Challenges and applications of large language models*.

Nikhil Kandpal, Haikang Deng, Adam Roberts, Eric Wallace, and Colin Raffel. 2023. *Large language models struggle to learn long-tail knowledge*.

LangChain. 2023a. Ensemble retriever. https://python.langchain.com/v0.1/docs/modules/data_connection/retrievers/ensemble/. Accessed: 2024-03-13.

LangChain. 2023b. Evaluating rag pipelines with ragas + langsmith. <https://blog.langchain.dev/evaluating-rag-pipelines-with-ragas-langsmith/>. Accessed: 2024-01-12.

LangChain. 2023c. Parent document retriever. https://python.langchain.com/v0.1/docs/modules/data_connection/retrievers/

777	parent_document_retriever/	Accessed:	language models with retrieval and storage access on	832
778	2024-03-13.		knowledge bases.	833
779	Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio		Fangyuan Xu, Weijia Shi, and Eunsol Choi. 2023. Re-	834
780	Petroni, Vladimir Karpukhin, Naman Goyal, Hein-		comp: Improving retrieval-augmented lms with com-	835
781	rich Küttler, Mike Lewis, Wen tau Yih, Tim Rock-		pression and selective augmentation.	836
782	täschel, Sebastian Riedel, and Douwe Kiela. 2021.			
783	Retrieval-augmented generation for knowledge-		Haoyan Yang, Zhitao Li, Yong Zhang, Jianzong Wang,	837
784	intensive nlp tasks.		Ning Cheng, Ming Li, and Jing Xiao. 2023. PRCA:	838
785			Fitting black-box large language models for retrieval	839
786	Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paran-		question answering via pluggable reward-driven con-	840
787	jape, Michele Bevilacqua, Fabio Petroni, and Percy		textual adapter. In <i>Proceedings of the 2023 Con-</i>	841
788	Liang. 2023. Lost in the middle: How language		<i>ference on Empirical Methods in Natural Language</i>	842
	models use long contexts.		<i>Processing</i> , pages 5364–5375, Singapore. Associa-	843
			tion for Computational Linguistics.	844
789	Xinbei Ma, Yeyun Gong, Pengcheng He, Hai Zhao,			
790	and Nan Duan. 2023a. Query rewriting for retrieval-		Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu,	845
791	augmented large language models.		Tingchen Fu, Xinting Huang, Enbo Zhao, Yu Zhang,	846
			Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei	847
792	Xinbei Ma, Yeyun Gong, Pengcheng He, Hai Zhao,		Bi, Freda Shi, and Shuming Shi. 2023. Siren’s song	848
793	and Nan Duan. 2023b. Query rewriting in retrieval-		in the ai ocean: A survey on hallucination in large	849
794	augmented large language models. In <i>Proceedings of</i>		language models.	850
795	<i>the 2023 Conference on Empirical Methods in Natu-</i>			
796	<i>ral Language Processing</i> , pages 5303–5315, Singa-			
797	pore. Association for Computational Linguistics.			
798	OpenAI. 2023. GPT-4 Technical Report.		A Appendix	851
799	Nils Reimers and Iryna Gurevych. 2019. Sentence-bert:		Contents	852
800	Sentence embeddings using siamese bert-networks.		A.1 Retrieval-Augmented Generation	853
801	In <i>Proceedings of the 2019 Conference on Empirical</i>		(RAG)	854
802	<i>Methods in Natural Language Processing.</i>		A.2 Our System: LLM-Ref	855
			A.3 Result and Analysis of GPT-4o mini	856
803	Jon Saad-Falcon, Omar Khattab, Christopher Potts, and		A.3.1 Metric Analysis	857
804	Matei Zaharia. 2023. Ares: An automated evalua-		A.3.2 Computation Costs	858
805	tion framework for retrieval-augmented generation		A.4 Ablation Study	859
806	systems.		A.4.1 Performance Analysis on	860
			Different LLMs	861
807	Aarohi Srivastava, Abhinav Rastogi, Abhishek Rao,		A.4.2 LLM-Ref with BERT	862
808	Abu Awal Md Shoeb, Abubakar Abid, Adam Fisch,		A.4.3 Stability Study	863
809	Adam R. Brown, Adam Santoro, Aditya Gupta,		A.5 Prompt Designs	864
810	Adrià Garriga-Alonso, Agnieszka Kluska, Aitor		A.6 Ragas Evaluation Metrics	865
811	Lewkowycz, Akshat Agarwal, Alethea Power, Alex		A.7 Examples of Query-Answer Pairs	866
812	Ray, Alex Warstadt, Alexander W. Kocurek, Ali			
813	Safaya, Ali Tazarv, Alice Xiang, Alicia Parrish,		A.1 Retrieval-Augmented Generation (RAG)	867
814	Allen Nie, Aman Hussain, Amanda Askill, Amanda		Basic Retrieval-Augmented Generation (RAG) is	868
815	Dsouza, Ambrose Slone, Ameet Rahane, Ananthara-		an advanced technique that combines information	869
816	man S. Iyer, Anders Andreassen, and et. al. 2023.		retrieval with text generation, making it particularly	870
817	Beyond the imitation game: Quantifying and extrap-		effective when generating responses that require	871
818	olating the capabilities of language models.		specific contextual information from an external	872
			knowledge base. The process is typically divided	873
819	Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier		into three main stages: Ingestion, retrieval, and	874
820	Martinet, Marie-Anne Lachaux, Timothée Lacroix,		response generation.	875
821	Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal		Ingestion: Once an input file is read, the first	876
822	Azhar, Aurelien Rodriguez, Armand Joulin, Edouard		stage in RAG involves chunking and embedding,	877
823	Grave, and Guillaume Lample. 2023. Llama: Open		where source texts are segmented into smaller, man-	878
824	and efficient foundation language models.		ageable units, which are then converted into embed-	879
			ding vectors for retrieval. Smaller chunks gener-	880
825	Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob		ally enhance query precision and relevance, while	881
826	Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz			
827	Kaiser, and Illia Polosukhin. 2023. Attention is all			
828	you need.			
829	Xintao Wang, Qianwen Yang, Yongting Qiu, Jiaqing			
830	Liang, Qianyu He, Zhouhong Gu, Yanghua Xiao,			
831	and Wei Wang. 2023. Knowledgept: Enhancing large			

larger chunks may introduce noise, reducing accuracy. Effective chunk size management is crucial for balancing comprehensiveness and precision. Embedding transforms both the user’s query and knowledge base documents into comparable formats, enabling the retrieval of the most relevant information.

Retrieval: In the next stage, the relevant information is retrieved from a vector knowledge base such as FAISS. The retriever searches this vector store to find the most relevant chunks of information based on the user’s query. This stage is crucial for ensuring that the model has access to the necessary context for generating accurate and contextually relevant responses.

Response Generation: In the final stage, the retrieved context is combined with the user’s query and fed into the LLM, such as GPT-4, to generate a coherent and relevant response. The model uses the context provided by the retrieved documents to produce answers that are informed by the most pertinent information available. This step highlights the synergy between retrieval and generation, ensuring that the output is not only accurate but also contextually grounded.

Each stage of the RAG process is designed to leverage the strengths of both retrieval and generation, enabling the creation of responses that are informed by specific and relevant external knowledge. By combining these components, RAG systems can significantly enhance the quality and relevance of generated content, making them a powerful tool for applications requiring precise and contextually aware responses.

A.2 Our System: LLM-Ref

In contrast to traditional RAG-based systems, our approach emphasizes preserving the hierarchical structure of source data in research writing, enabling the sequential retrieval of relevant contexts and references. During the ingestion stage, our method eliminates the need for a vector store, allowing extracted source information to be stored either online or offline, thereby enhancing flexibility. In the retrieval stage, we leverage large language models (LLMs) to identify the most relevant context paragraphs corresponding to the user query. This approach is particularly well-suited for research article writing, where our findings indicate that each paragraph typically presents a coherent argument, sufficient for establishing contextual similarity. Embedding-based approaches like FAISS

rely on pre-computed vector similarities for similarity search and retrieval, which can lead to a loss of subtle contextual nuances present in the data. In contrast, large language models (LLMs) dynamically process and interpret text to capture complex, nuanced relationships within the text. Finally, in the generation stage, our system iteratively produces and refines the response, ensuring accuracy and relevance. While our approach invokes the LLM multiple times across various stages, the associated financial costs are minimal in the context of overall research expenditures.

Extracting both primary and secondary references from source documents requires the LLM to be deterministic. In research articles, the ability to extract contexts from exact paragraphs is crucial. Our experiments with popular commercial LLMs indicate that while such models can refer to uploaded source documents, their generative nature prevents them from providing exact reproductions of contexts or references from the original sources. As a result, it is challenging to precisely identify specific references or corresponding contexts in the original documents based on output responses.

A.3 Result and Analysis of GPT-4o mini

A.3.1 Metric Analysis

Table 4 presents a comparison of performance metrics for LLM-Ref, Basic RAG, PDR RAG, and Ens. RAG using GPT-4o-mini as the LLM, in tasks involving both multiple and single-source documents.

In tasks involving multiple source documents, LLM-Ref consistently outperforms the other methods across several key metrics. It achieves the highest Answer Relevancy score of 0.966, significantly higher than Basic RAG (0.675), PDR RAG (0.557), and Ens. RAG (0.709), indicating its superior capability to provide relevant answers. Additionally, LLM-Ref’s Answer Correctness is 0.546, demonstrating improved accuracy over Basic RAG (0.517) and PDR RAG (0.465). With the highest Answer Similarity of 0.947, LLM-Ref also demonstrates its ability to generate answers closely aligned with the ground truth, outperforming others in the range of 0.861 to 0.899. In terms of Context Relevancy, LLM-Ref shows significant improvement with a score of 0.246, outperforming all other methods, highlighting its ability to retrieve pertinent information. Although Context Recall is slightly lower than Ens. RAG and Ba-

Name	Answer Relevancy	Answer Correctness	Answer Similarity	Context Relevancy	Context Precision	Context Recall	Faithfulness	Ragas Score
Basic RAG	0.675	0.517	0.890	0.049	0.846	0.698	0.582	0.159
PDR RAG	0.557	0.465	0.861	0.034	0.828	0.587	0.590	0.116
Ens. RAG	0.709	0.531	0.899	0.037	0.851	0.726	0.615	0.129
LLM-Ref	0.966	0.546	0.947	0.246	0.980	0.732	0.569	0.486

Table 4: Metric evaluation result comparison of LLM-Ref with Basic RAG, Parent Document Retriever RAG, and Ensemble Retrieval RAG, using GPT 4o-mini as the LLM. A higher value of a metric indicates better performance.

sis RAG, the high Context Precision of 0.980 and Faithfulness score of 0.569 emphasize LLM-Ref’s overall reliability in multi-document tasks. Its Ragas score of 0.486 further reinforces its robust performance, well beyond Basic RAG (0.159), PDR RAG (0.116), and Ens. RAG (0.129).

A.3.2 Computation Costs

The proposed method is meticulously designed to support the writing of research articles, a task that requires a high degree of precision. Compared to traditional Retrieval-Augmented Generation (RAG) systems, our approach incurs higher computational costs due to its focus on achieving enhanced accuracy. However, leveraging open-source large language models (LLMs) fine-tuned for specific tasks can help mitigate these expenses.

The computational overhead of our system, in contrast to traditional RAG systems, can be articulated as follows:

- Content Extraction:** The system generates summaries for each paragraph extracted from the documents, storing these summaries for subsequent context extraction. The number of LLM calls made during this step is equal to the number of paragraphs, denoted as N . Traditional RAG systems typically do not invoke LLMs at this stage, instead generating embeddings and storing them in a vector index.
- Context Extraction:** During this phase, the LLM is invoked N times to find relevant paragraphs to the query, utilizing the paragraph summaries to minimize the token count, thereby reducing the computational load.
- Generation:** The generation of responses is conducted iteratively based on the retrieved contexts. The number of LLM calls in this phase depends on the number of contexts retrieved, denoted as c . Our experiments indicate that LLM-Ref retrieves approximately

half the number of contexts compared to traditional RAG systems when all the relevant contexts are chosen, leading to reduced computational demands.

- Reference Extraction:** This step is unique to our system and involves additional LLM calls, denoted as $p \times q$, where p represents the number of lines in the generated response and q corresponds to the lines present in the context. This process ensures the precision and relevance of the extracted references.

LLM calls in content extraction are executed only once during the initial reading of the document and storage of summaries. However, each query necessitates LLM calls in context extraction, answer generation, and reference extraction. Therefore, each query requires $(N + c + p \times q)$ LLM calls. Assuming we have $N = 50$ paragraphs, $c = 8$ contexts, $p = 7$ generated lines, and $q = 8$ lines per context, the total is 56 lines. Additionally, each paragraph contains 220 tokens on average, each line approximately 25 tokens, and prompts contain 60 tokens.

$$N = 50 \times (220 + 60)$$

$$= 14,000 \text{ tokens}$$

$$c = 8 \times (7 \times 25 + 60) + 1000$$

$$= 2,880 \text{ tokens}$$

$$p \times q = 7 \times 8 \times 7$$

$$= 392 \text{ LLM calls}$$

$$\text{Total tokens} = 14,000 + 2,880$$

$$+ 392 \times (25 + 25 + 15)$$

$$= 42,360 \text{ tokens}$$

Thus, the total input tokens amount to 42,360 tokens.

During both content extraction and reference extraction, the LLM returns only ‘True’ or ‘False’ for

comparison, producing just one token. However, during generation, as it iteratively generates and refines the response, we estimate approximately 1,500 tokens are generated.

Output tokens = $50 + 1500 + 392 = 1942$ tokens. If we use GPT-4o-mini, which costs \$0.150 per 1M input tokens and \$0.600 per 1M output tokens as of October 2024, the cost per query (CpQ) in USD is calculated as:

$$\text{CpQ} = \frac{0.150}{10^6} \times 42360 + \frac{0.600}{10^6} \times 1942 \approx 0.0075$$

Considering the funds typically allocated to research, the cost of using our proposed LLM-Ref for article writing is minimal. Table 3 provides a detailed account of the actual expenses associated with conducting the experiments outlined in Table 4.

In conclusion, while our system incurs higher computational costs, such costs are common in similar applications. Evaluation frameworks like Ragas and ARES, which rely on LLMs to assess similarities, incur similar expenses. In return, LLM-Ref offers enhanced accuracy and precision in content generation, crucial for research article writing.

A.4 Ablation Study

A.4.1 Performance Analysis on Different LLMs

Table 5 compares the performance metrics of LLM-Ref against Basic RAG, PDR RAG, and Ens. RAG across various language models, including GPT-3.5, GPT-4o-mini, Llama 3.1-405b, and Claude 3.5 Sonnet. In this experiment, we focus exclusively on the computer science subset of the dataset. As before, a higher value across the metrics signifies superior performance. The results demonstrate LLM-Ref’s consistent advantage over other methods, particularly in providing more relevant, correct, and similar answers.

In the GPT-3.5 evaluation, LLM-Ref achieves the highest Answer Relevancy score of 0.960, markedly higher than Basic RAG (0.545), PDR RAG (0.619), and Ens. RAG (0.629). It also leads in Answer Correctness with 0.555, surpassing the others’ range of 0.412 to 0.471. With an Answer Similarity of 0.950, LLM-Ref maintains a strong advantage over its peers, which hover between 0.899 and 0.936. These metrics confirm LLM-Ref’s superior capability to generate answers that are relevant and aligned with the provided context. Notably, while its Context Relevancy (0.157)

is significantly higher than the others, it still lags behind in Context Recall, with scores slightly below those of Basic RAG (0.676 vs 0.665), but it compensates with a strong Faithfulness score of 0.721. The composite Ragas Score of 0.389 further highlights LLM-Ref’s overall effectiveness compared to the other methods, which range from 0.052 to 0.143.

For GPT-4o-mini, LLM-Ref retains its dominance with an Answer Relevancy score of 0.953, considerably higher than Basic RAG (0.765), PDR RAG (0.606), and Ens. RAG (0.857). Its Answer Correctness of 0.575 is on par with Ens. RAG (0.572) and significantly higher than other systems, reinforcing LLM-Ref’s consistent accuracy. With the highest Answer Similarity (0.951) and a Ragas Score of 0.413, LLM-Ref continues to outperform other methods. However, its Context Recall (0.683) remains lower than PDR RAG (0.757) and Ens. RAG (0.689), suggesting room for improvement in extracting complete information from the context.

In the Llama 3.1-405b evaluation, LLM-Ref again exhibits superior performance with an Answer Relevancy score of 0.958 and an Answer Correctness score of 0.556, well above Basic RAG and PDR RAG, whose scores remain below 0.650. Its Answer Similarity of 0.950 and Faithfulness of 0.564 confirm that LLM-Ref provides high-quality, accurate responses while grounding its answers in relevant context. Although its Context Precision (0.987) is competitive, LLM-Ref still falls behind in Context Recall, with a score of 0.650 compared to Ens. RAG’s 0.725. The Ragas Score for LLM-Ref is 0.300, much higher than Basic RAG (0.114) and PDR RAG (0.079).

Finally, with Claude 3.5 Sonnet, LLM-Ref maintains its strong performance across multiple metrics. It achieves the highest Answer Relevancy of 0.964, Answer Correctness of 0.637, and Answer Similarity of 0.954, outperforming other systems by substantial margins. While it continues to deliver accurate and relevant answers, its Context Recall score of 0.654 and Faithfulness score of 0.561 remain slightly lower compared to Ens. RAG (0.741 for both). Despite this, LLM-Ref achieves the highest overall Ragas Score of 0.422, highlighting its superior performance in generating accurate and consistent answers across varied language models.

Across all LLM evaluations, LLM-Ref excels in delivering answers that are relevant, correct, and well-aligned with the input context. Its higher Ragas Scores across all models demonstrate its effective-

Name	Answer Relevancy	Answer Correctness	Answer Similarity	Context Relevancy	Context Precision	Context Recall	Faithfulness	Ragas Score
GPT 3.5								
Basic RAG	0.545	0.412	0.899	0.044	0.999	0.665	0.588	0.143
PDR RAG	0.619	0.460	0.926	0.014	0.999	0.783	0.607	0.052
Ens. RAG	0.629	0.471	0.936	0.027	0.999	0.775	0.624	0.097
LLM-Ref	0.960	0.555	0.950	0.157	0.993	0.676	0.721	0.389
GPT 4o-mini								
Basic RAG	0.765	0.540	0.916	0.041	0.999	0.689	0.564	0.138
PDR RAG	0.606	0.482	0.875	0.033	0.993	0.569	0.524	0.112
Ens. RAG	0.857	0.572	0.939	0.027	0.993	0.757	0.668	0.096
LLM-Ref	0.953	0.575	0.951	0.179	0.999	0.683	0.640	0.413
Llama 3.1-405b								
Basic RAG	0.571	0.443	0.875	0.035	0.987	0.538	0.390	0.114
PDR RAG	0.642	0.439	0.887	0.022	0.999	0.682	0.570	0.079
Ens. RAG	0.744	0.491	0.915	0.030	0.999	0.725	0.641	0.105
LLM-Ref	0.958	0.556	0.950	0.112	0.987	0.650	0.564	0.300
Claude 3.5 Sonnet								
Basic RAG	0.634	0.544	0.941	0.042	0.999	0.694	0.691	0.142
PDR RAG	0.702	0.550	0.942	0.015	0.999	0.762	0.723	0.055
Ens. RAG	0.799	0.601	0.945	0.027	0.993	0.741	0.741	0.096
LLM-Ref	0.964	0.637	0.954	0.195	0.999	0.654	0.561	0.422

Table 5: Metric Evaluation result comparison of LLM-Ref with Basic RAG, Parent Document Retriever RAG, and Ensemble Retrieval RAG for different LLMs. A higher value of a metric indicates better performance.

tiveness in handling complex retrieval tasks.

A.4.2 LLM-Ref with BERT

Table 6 presents a comparative evaluation of retrieval-augmented generation (RAG) models with LLM-Ref-B. LLM-Ref-B, which employs a BERT-based model (RoBERTa-large from Sentence Transformers) for similarity computation, demonstrates notable improvements over traditional RAG systems while maintaining a lower computational cost. However, its performance declines compared to LLM-Ref-L, which utilizes an LLM for similarity matching, highlighting the limitations of relying on an off-the-shelf BERT model that is not fine-tuned for domain-specific tasks. We conducted the experiment using an RTX 2080 GPU and a Core i9-9900 CPU.

LLM-Ref-B achieves a high Answer Relevancy score (0.952) and Answer Similarity score (0.951), indicating its ability to retrieve and generate semantically aligned responses. However, its Context Relevancy score (0.090) is significantly lower than that of LLM-Ref-L (0.182), suggesting that the BERT-based retrieval mechanism struggles to identify the most relevant supporting contexts. This limitation directly impacts its overall RAGAS score (0.259), which is lower than LLM-Ref-L (0.416), but still higher than the baseline RAG models.

One of the primary reasons for LLM-Ref-B’s lower performance in retrieval quality is that BERT was not trained or fine-tuned for the specific domain of research article retrieval, making it less effective in capturing nuanced contextual dependencies. While embedding-based models like BERT provide a cost-effective alternative, their reliance on pre-trained representations without task-specific fine-tuning results in suboptimal performance when compared to LLM-based retrieval approaches. The drop in RAGAS score further suggests that as the number of relevant contexts decreases, LLM-Ref-B becomes less effective at retrieving and aligning information.

Despite these limitations, LLM-Ref-B still outperforms baseline RAG systems, particularly in Answer Relevancy, Faithfulness, and overall retrieval effectiveness. The results suggest that while BERT-based models offer a computationally efficient alternative, the lack of domain adaptation hinders their ability to match the performance of LLM-based similarity computation methods. These findings reinforce the importance of hierarchical paragraph extraction and the need for fine-tuning similarity models to enhance retrieval performance.

Name	Answer Relevancy	Answer Correctness	Answer Similarity	Context Relevancy	Context Precision	Context Recall	Faith fulness	Ragas Score
Basic RAG	0.765	0.540	0.916	0.041	0.999	0.689	0.564	0.138
PDR RAG	0.606	0.482	0.875	0.033	0.993	0.569	0.524	0.112
Ens. RAG	0.857	0.572	0.939	0.027	0.993	0.757	0.668	0.096
LLM-Ref-L	0.957	0.574	0.951	0.182	0.999	0.676	0.623	0.416
LLM-Ref-B	0.952	0.591	0.951	0.090	0.999	0.614	0.594	0.259

Table 6: Metric evaluation result comparison of different systems. Higher values indicate better performance. Here, LLM-Ref-L employs an LLM for similarity computation, whereas LLM-Ref-B utilizes a BERT model.

A.4.3 Stability Study

As presented in Table 1 and Table 4, we provide comprehensive sets of evaluation metrics that underscore the effectiveness of our system. To assess our system’s performance, it is essential to consider it holistically. Specifically, the context precision and context recall metrics are crucial for evaluating the retrieval stage, while faithfulness and answer relevancy are key indicators of the system’s performance during the generation stage. Our metrics demonstrate superior performance across these stages.

In the content extraction stage, the process is deterministic; the system can either successfully extract text from a document or not. However, the summarization process introduces variability, as different summaries may be generated in each run, potentially impacting context extraction and the final response. To evaluate the stability of our system, we conducted multiple runs, with results indicating consistent performance with respect to Table 1 given in the paper.

In the retrieval stage, unlike traditional RAG systems that typically select the top-k contexts, our approach involves retrieving all available contexts. This comprehensive retrieval method enhances the system’s ability to generate accurate responses.

During the generation stage, we used a temperature setting of zero, ensuring that the model relies solely on the input context to generate responses, thereby minimizing randomness. We also experimented with varying the temperature parameter to observe its impact on response quality, as detailed in Table 7. We observed that as the temperature setting increases, the model tends to incorporate more of its pre-existing knowledge, which may include biases from its training data, potentially impacting the final Ragas score. The temperature parameter’s influence on the model’s output highlights the delicate balance between utilizing retrieved context and minimizing reliance on potentially biased or

extraneous information stored within the model. Consequently, adjusting the temperature parameter is crucial for maintaining the accuracy and integrity of the generated responses.

These ablation studies highlight the robustness and adaptability of our system in generating precise and contextually relevant responses.

A.5 Prompt Designs

In our tool, we employ a large language model (LLM) to determine contextual similarity. To find the relevant contexts, we utilize the following prompt (given in Figure 3) which returns ‘True’ when a paragraph is relevant to the query. This prompt instructs the LLM to evaluate a given paragraph in the context of a specific query, determining if it provides direct answers or significant contributions. Since we utilize entire paragraphs that convey specific concepts, the LLM can discern relevance to the query by understanding subtle nuances. By responding with ‘True’ or ‘False’, the model identifies relevant information without additional explanation, thereby enhancing the accuracy and efficiency of our tool.

```
You are an experienced researcher tasked
with identifying relevant
information.
Paragraph: {paragraph}
Query: {query}
Instructions: Determine whether the
paragraph provides information that
directly answers or significantly
contributes to the query.
If the paragraph is relevant to the
query, respond with 'True'. If it is
not relevant, respond with 'False'.
Provide no additional explanation.
```

Figure 3: Prompt to find relevant contexts to a query.

To address challenges associated with long contexts, we employ an iterative approach to output generation. Initially, a response is generated using the first context and query, utilizing the LLM

Impact of temperature change							
Temperature	Answer Relevancy	Answer Correctness	Context Relevancy	Context Precision	Context Recall	Faith fulness	Ragas Score
0.0	0.94	0.72	0.44	0.29	0.71	0.44	0.57
0.05	0.94	0.71	0.40	0.27	0.74	0.40	0.54
0.1	0.95	0.71	0.44	0.28	0.70	0.44	0.56
0.15	0.93	0.67	0.35	0.24	0.65	0.37	0.49
Performance variation across different runs for the same queries							
Runs	Answer Relevancy	Answer Correctness	Context Relevancy	Context Precision	Context Recall	Faith fulness	Ragas Score
Run 1	0.95	0.70	0.35	0.24	0.71	0.41	0.52
Run 2	0.94	0.72	0.44	0.29	0.71	0.44	0.57
Run 3	0.94	0.70	0.38	0.25	0.68	0.45	0.54

Table 7: Stability study of our proposed approach.

prompt provided in Figure 4.

```
You are a researcher writing a research
paper.
**Paragraph**: {paragraph}
**Query**: {query}
**Instructions**: Summarize and
synthesize the provided paragraph to
create a cohesive and informative
paragraph that addresses the query.
Ensure the synthesis uses the vocabulary
and writing style of the original
paragraph to maintain a natural and
consistent tone.
```

Figure 4: Prompt used to generate the response based on the context for query.

This prompt (given in Figure 4) directs the LLM to summarize and synthesize the paragraph to address the query coherently. By preserving the original vocabulary and style, the LLM ensures a natural and consistent tone. This iterative approach manages long contexts and enhances the relevance and cohesiveness of the responses, improving our tool’s efficiency and accuracy. After the initial response is generated, subsequent responses are refined by incorporating later contexts using the following prompt (shown in Figure 5). This iterative approach not only enhances the comprehensiveness of the synthesized output but also helps in mitigating any errors present in the earlier responses.

This prompt (given in Figure 5) guides the LLM to integrate new paragraph information into the existing synthesis, maintaining coherence, relevance, and a consistent tone, while iteratively refining responses to address long context complexities and improve the tool’s accuracy and cohesiveness.

```
You are a researcher writing a research
paper.
**Existing Synthesis**: {response}
**New Paragraph**: {paragraph}
**Query**: {query}
**Instructions**: Integrate the
information from the new paragraph
into the existing synthesis to
create a cohesive and informative
paragraph that addresses the query.
Ensure the synthesis uses the vocabulary
and writing style of the original
paragraphs to maintain a natural and
consistent tone.
```

Figure 5: Prompt used to integrate new context into existing responses.

Figure 6 shows a prompt directing the LLM to match each line of a synthesized result with the most relevant source lines from the provided paragraphs. The output lists only the precisely relevant source lines, enhancing the traceability and transparency of the synthesis process by clarifying the origins of each part of the synthesized result.

Figure 7 presents a prompt to generate questions by synthesizing information from at least two of three provided documents. The prompt requires formulating questions, including exact original context texts, and providing answers, all in a specified Python format. This ensures the integrity of the original contexts for evaluation. Questions are generated until a certain number of unique questions are produced, enhancing the tool’s ability to synthesize information accurately across multiple documents.

For a given synthesized result based on some source paragraphs, find the relevant source lines that are most relevant to each line of the synthesized result.

Synthesized result: {synthesized_result}.

Source Paragraphs: {context}.

Just provide the source lines for each line of synthesized result, for example: Synthesized Line: ...
Corresponding Source Line: ... Do not add explanation and source lines if they are not exactly relevant.

Figure 6: Prompt for identifying the most relevant source lines for each line in a synthesized result.

A.6 Ragas Evaluation Metrics

The Ragas score is computed by calculating the harmonic mean of Faithfulness (FF), Answer Relevancy (AR), Context Precision (CP), and Context Recall (CR).

$$\text{Ragas Score} = \frac{4}{\frac{1}{\text{FF}} + \frac{1}{\text{AR}} + \frac{1}{\text{CP}} + \frac{1}{\text{CR}}} \quad (1)$$

In this equation, FF stands for Faithfulness, AR represents Answer Relevancy, CP is Context Precision, and CR denotes Context Recall. In the RAGs framework, Faithfulness and Answer Relevancy assess the accuracy of content generation, while Context Precision and Context Recall evaluate the effectiveness of information retrieval. Therefore, the Ragas score ensures a robust assessment of both generation and retrieval processes in RAGs.

Faithfulness (FF): The Faithfulness score measures how relevant the statements in an answer are to the provided context. Scores for this metric range from 0 to 1, with higher scores indicating better alignment and performance. The calculation process, as defined by the Ragas framework, involves three key steps: first, extracting statements from the generated answers; second, determining the contextual relevance of these statements using the LLM; and third, calculating the Faithfulness score by dividing the number of context-relevant statements by the total number of statements. This score provides a quantifiable measure of how faithfully the model’s answers reflect the original context. It is calculated as:

$$\text{FF} = \frac{\text{NCS}}{\text{TS}} \quad (2)$$

You are an expert research scientist.
Instructions: Create a list of 150 questions (max 5 at a time) that require using information from all three provided input documents (or at least two of the input documents). For each question, please include the following details:

Question: Formulate a question that integrates information from multiple documents.

Original Context Texts: Provide the exact contexts from the documents that were used to create the question, without any alterations.

Answer: Provide an answer for a research article derived from the original context texts.

Ensure that each question requires the synthesis of information from multiple documents. Maintain the integrity of the original context texts as they will be used later for evaluation purposes.

Return the response in the following python format:

```
data = [
    {
        "question": "Question 1",
        "context": ["Context 11",
                   Context 12 ],
        "ground_truth": "Answer 1"
    },
    {
        "question": "Question 2",
        "context": ["Context 21",
                   Context 22 ],
        "ground_truth": "Answer 2"
    },
]
```

Please keep generating only if it is possible to generate unique questions that you did not generate them before. Generate 5 questions at a time. I want a total 150 questions.

Figure 7: Prompts for generating Question-Context-Answer pair from source documents.

Here, NCS refers to the Number of Context-Relevant Statements, and TS represents the Total Statements in the Answer.

Answer Relevancy (AR): The Answer Relevance metric evaluates how closely the answers generated by a Language Learning Model (LLM) align with the original questions posed. Answers that are incomplete or redundant receive lower scores, with scores ranging from 0 to 1, where higher scores indicate better performance. The Ragas framework calculates this metric through a three-step process:

first, generating pseudo-questions from both the context and the generated answer; second, calculating the cosine similarity between the original question and each pseudo-question; and third, computing the average of these cosine similarities. This average provides a quantitative measure of how relevant the generated answers are to the original questions.

$$AR = \frac{\sum CS}{NPQ} \quad (3)$$

In this context, CS denotes Cosine Similarities between pseudo-questions and the original question, and NPQ stands for the Number of Pseudo-Questions.

Context Precision (CP): The Context Precision metric measures how effectively a Language Learning Model (LLM) retrieves the necessary contextual information required to accurately answer a question. Scores for this metric range from 0 to 1, with higher scores indicating better retrieval performance. According to the Ragas framework, Context Precision is calculated through a two-step process: first, determining the relationship between each retrieved-context and the original question using the LLM, where the context is marked as either relevant (Yes) or not (No); and second, computing the Mean Average Precision (mAP) across all retrieved contexts. This score indicates how accurately the model retrieves relevant information to support its answers.

$$CP = mAP \quad (4)$$

Context Recall (CR): The Context Recall metric evaluates how well the context retrieved by a Language Learning Model (LLM) matches the Ground Truth, indicating the completeness of the information retrieval. Scores range from 0 to 1, with higher scores reflecting better performance. The Ragas framework computes this metric through a three-step process: first, splitting the Ground Truth into individual sentences; second, determining the relationship between each sub-Ground Truth sentence and the retrieved context using the LLM, marking each as either relevant (Yes) or not (No); and third, calculating the Context Recall score by dividing the number of context-relevant Ground Truth sentences by the total number of Ground Truth sentences. This score helps in quantifying how thoroughly the model’s retrieved-context covers the Ground Truth.

$$CR = \frac{NGTS}{TGS} \quad (5)$$

Here, NGTS stands for the Number of Ground Truth Sentences inferred from the given contexts, and TGS represents the Total Ground Truth Sentences.

A.7 Examples of Query-Answer Pairs

We present additional query-answer pairs with fine-grained references extracted from LLM-Ref when different LLMs are utilized. This demonstrates the compatibility of our tool across different LLMs.

Query: Pros and Cons of Discrete vs Cascaded Systems

Answer: Discrete units in direct speech-to-speech translation (S2ST) systems offer several advantages over cascaded systems [1-8]. Firstly, they have lower computational costs and inference latency because they require fewer decoding steps [1, 8, 10-12]. This makes them more efficient and faster in translating speech [1-3, 7, 8, 10-12]. Additionally, direct S2ST is a natural approach for languages that do not have a writing system, as it eliminates the need for intermediate text representation. Another benefit of direct S2ST systems with discrete units is their flexibility in training. They can be trained with or without text transcripts, making them suitable for both written and unwritten languages [1, 6, 7, 9, 13]. This versatility allows for a wider range of applications and language support. However, it is important to note that there is a performance gap between direct S2ST systems with discrete units and cascaded systems. Cascaded systems, which combine speech-to-text translation (S2T) and text-to-speech (TTS), may have an edge in terms of translation accuracy [1-3, 6, 7, 9, 13]. The paragraph does not provide specific details about the extent of this performance gap, but it suggests that cascaded systems may outperform direct S2ST systems in terms of translation quality. In summary, discrete units in direct S2ST systems offer advantages such as lower computational costs, support for languages without a writing system, and flexibility in training. However, there is a performance gap compared to cascaded systems, which may have better translation accuracy [1-3].

References:

- [1] A. Lee et al., "Direct speech-to-speech translation with discrete units," arXiv, 2021.
 - [2] A. Lee et al., "Textless speech-to-speech translation on real data," arXiv, 2021.
 - [3] S. Popuri et al., "Enhanced Direct Speech-to-Speech Translation Using Self-supervised Pre-training and Data Augmentation," arXiv, 2022.
 - [4] Ye Jia et al., Direct speech-to-speech translation with a sequence-to-sequence model. Proc. Interspeech 2019.
 - [5] Ye Jia et al., Translatotron 2: Robust direct speech-to-speech translation. arXiv 2021.
 - [6] Lavie et al., "JANUS-III: Speech-to-speech translation in multiple languages." In 1997 IEEE International Conference on Acoustics, Speech, and Signal Processing.
 - [7] S. Nakamura, The ATR multilingual speech-to-speech translation system. IEEE Transactions on Audio, Speech, and Language Processing, 2006.
 - [8] W. Hsu, HuBERT: Self-supervised speech representation learning by masked prediction of hidden units. arXiv preprint arXiv:2106.07447.
 - [9] C. Zhang, X. Tan et al., "UWSpeech: Speech to speech translation for unwritten languages," arXiv:2006.07926, 2020.
 - [10] Q. T. Do, et al., "Toward expressive speech translation: A unified sequence-to-sequence LSTMs approach for translating words and emphasis." In INTERSPEECH, 2017.
 - [11] P. D. Aguero, et al., "Prosody generation for speech-to-speech translation." In 2006 IEEE International Conference on Acoustics Speech and Signal Processing Proceedings, volume 1, pages I-I, 2006.
 - [12] G. K. Anumanchipalli et al., "Intent transfer in speech-to-speech machine translation." In 2012 IEEE Spoken Language Technology Workshop (SLT), 2012.
 - [13] A. Tjandra et al., "Speech-to-speech translation between untranscribed unknown languages." In 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), 2019.
-

Figure 8: Fine-grained reference samples generated by LLM-Ref when GPT-3.5 is used as the LLM.

Query: How does data augmentation improve speech-to-speech translation?

Answer: Data augmentation plays a crucial role in enhancing speech-to-speech translation (S2ST) systems by addressing the challenges posed by data scarcity [1-8]. In the context of end-to-end S2T models, effective training strategies such as multitask learning and model pre-training are complemented by data augmentation techniques, which help to enrich the training dataset[1-4, 9-13]. This enrichment allows the models to better generalize and improve their performance, particularly in mitigating the error propagation issues commonly encountered in traditional ASR+MT systems[1-3, 14-16]. By diversifying the training data, data augmentation facilitates the synthesis of para-linguistic information, such as prosody and word-level emphasis, which are essential for producing more natural and contextually appropriate translations[1-3, 17-19]. Recent empirical findings further demonstrate that augmenting supervised S2ST data with directly mined S2ST data, particularly when combined with speech normalization techniques, can significantly enhance the performance of textless S2ST systems[2-3]. For instance, the integration of mined data has shown to yield substantial improvements in BLEU scores across various language pairs, indicating that the additional data not only enriches the training set but also aids in capturing variations in speech that are difficult to model without such information. Moreover, the application of data augmentation techniques, such as utilizing ASR, MT, and TTS models to create weakly supervised data, has been shown to effectively tackle the data scarcity issue in S2ST. By leveraging the S2UT framework, researchers have demonstrated that large-scale self-supervised pre-training with monolingual speech and text data, combined with data augmentation, can significantly enhance S2ST model training [3,12]. Specifically, the use of a wav2vec 2.0 speech encoder and an mBART text decoder trained with discrete units extracted from unlabeled speech data has proven effective [2-3, 14-16]. The incorporation of weakly supervised data from ASR speech further increases the size of the parallel S2ST training data, leading to improved model performance[2,3]. For example, experiments have shown that with a pre-trained wav2vec 2.0 encoder and a randomly initialized decoder, substantial BLEU gains can be achieved, indicating that data augmentation not only enriches the training dataset but also enhances the model’s ability to generalize across different setups, including low-resource scenarios[2-3]. Thus, through these enhancements, data augmentation significantly contributes to the robustness and efficacy of S2ST systems, enabling them to leverage both supervised and mined data for improved translation quality[1-2].

References:

- [1] A. Lee et al., “Direct speech-to-speech translation with discrete units,” arXiv, 2021.
 - [2] A. Lee et al., “Textless speech-to-speech translation on real data,” arXiv, 2021.
 - [3] S. Popuri et al., “Enhanced Direct Speech-to-Speech Translation Using Self-supervised Pre-training and Data Augmentation,” arXiv, 2022.
 - [4] Ye Jia et al., Direct speech-to-speech translation with a sequence-to-sequence model. Proc. Interspeech 2019.
 - [5] R. J. Weiss, J. Chorowski et al., “Sequence-to-sequence models can directly translate foreign speech,” Proc. Interspeech, 2017.
 - [6] J. Pino, Q. Xu et al., “Self-training for end-to-end speech translation,” Proc. Interspeech, 2020.
 - [7] J. Kahn, A. Lee et al., “Self-training for end-to-end speech recognition,” in ICASSP, 2020.
 - [8] T. Hayashi, S. Watanabe et al., “Back-translation-style data augmentation for end-to-end asr,” in SLT, 2018.
 - [9] Alexandre Bérard, Olivier Pietquin, Christophe Servan, and Laurent Besacier. 2016. Listen and translate: A proof of concept for end-to-end speech-to-text translation. arXiv preprint arXiv:1612.01744.
 - [10] Parnia Bahar, Tobias Bieschke, and Hermann Ney. 2019. A comparative study on end-to-end speech to text translation. In 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), pages 792–799. IEEE.
 - [11] Xian Li, Changhan Wang, Yun Tang, Chau Tran, Yuqing Tang, Juan Pino, Alexei Baevski, Alexis Conneau, and Michael Auli. 2021. Multilingual speech translation from efficient finetuning of pretrained models. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 827–838.
 - [12] C. Zhang, X. Tan et al., “UWSpeech: Speech to speech translation for unwritten languages,” arXiv:2006.07926, 2020.
 - [13] A. Polyak, Y. Adi et al., “Speech resynthesis from discrete disentangled self-supervised representations,” arXiv:2104.00355, 2021.
 - [14] M. C. Stoian, S. Bansal et al., “Analyzing asr pretraining for lowresource speech-to-text translation,” in ICASSP, 2020.
 - [15] A. Baevski, Y. Zhou et al., “wav2vec 2.0: A framework for selfsupervised learning of speech representations,” Neurips, vol. 33, pp. 12 449–12 460, 2020.
 - [16] Y. Liu, J. Gu et al., “Multilingual denoising pre-training for neural machine translation,” Transactions of the Association for Computational Linguistics, vol. 8, pp. 726–742, 2020.
 - [17] Q. T. Do, et al., “Toward expressive speech translation: A unified sequence-to-sequence LSTMs approach for translating words and emphasis.” In INTERSPEECH, 2017.
 - [18] P. D. Aguero, et al., “Prosody generation for speech-to-speech translation.” In 2006 IEEE International Conference on Acoustics Speech and Signal Processing Proceedings, volume 1, pages I–I, 2006.
 - [19] G. K. Anumanchipalli et al., “Intent transfer in speech-to-speech machine translation.” In 2012 IEEE Spoken Language Technology Workshop (SLT), 2012.
-

Figure 9: Fine-grained reference samples generated by LLM-Ref when GPT-4o-mini is used as the LLM.

Query: Literature review on Direct speech-to-speech translation?

Answer: Direct speech-to-speech translation (S2ST) aims at translating speech from one language into speech in another language without relying on text generation as an intermediate step. Compared to conventional cascaded approaches, which take advantage of automatic speech recognition (ASR), machine translation (MT) or end-to-end speech-to-text translation (S2T) followed by text-to-speech synthesis (TTS), direct S2ST has the advantage of faster inference and can support translation between languages without text writing systems [1-12]. Recent studies have proposed various approaches to direct S2ST, including self-supervised speech encoder pre-training with unlabeled speech data, and data augmentation techniques that benefit S2T model training [1-3, 13-20,.]. For instance, [4] proposes to apply a self-supervised speech encoder pre-trained on unlabeled speech to convert target speech into discrete units and build a speech-to-unit translation (S2UT) model for direct S2ST [1-3, 5, 9-11, 15, 17, 20,.]. Self-supervised discrete targets can disentangle linguistic content from speaker identity and prosodic information in speech, and enable opportunities for applying techniques from speech-to-text model training, such as ASR and S2T, to direct S2ST[1-5, 10, 13 20-23]. Moreover, [6] shows that incorporating weakly supervised training data from ASR speech can bring significant improvements to direct S2ST models[1-5, 13, 15, 20-22]. Our work builds upon these advances and explores the effectiveness of self-supervised pre-training and data augmentation for direct S2ST models.

References:

- [1] A. Lee et al., “Direct speech-to-speech translation with discrete units,” arXiv, 2021.
- [2] A. Lee et al., “Textless speech-to-speech translation on real data,” arXiv, 2021.
- [3] S. Popuri et al., “Enhanced Direct Speech-to-Speech Translation Using Self-supervised Pre-training and Data Augmentation,” arXiv, 2022.
- [4] A. Tjandra et al., “Speech-to-speech translation between untranscribed unknown languages.” In 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), 2019.
- [5] C. Zhang, X. Tan et al., “UWSpeech: Speech to speech translation for unwritten languages,” arXiv:2006.07926, 2020.
- [6] Lavie et al., “JANUS-III: Speech-to-speech translation in multiple languages.” In 1997 IEEE International Conference on Acoustics, Speech, and Signal Processing.
- [7] S. Nakamura, The ATR multilingual speech-to-speech translation system. IEEE Transactions on Audio, Speech, and Language Processing, 2006.
- [8] Alexandre Bérard et al.. 2016. Listen and translate: A proof of concept for end-to-end speech-to-text translation. arXiv preprint arXiv:1612.01744.
- [9] Ye Jia et al., Direct speech-to-speech translation with a sequence-to-sequence model. Proc. Interspeech 2019.
- [10] Ye Jia et al., Translatotron 2: Robust direct speech-to-speech translation. arXiv 2021.
- [11] Takatomo Kano et. al. 2021. Transformer-based direct speech-to-speech translation with transcoder. In 2021 IEEE Spoken Language Technology Workshop (SLT), pages 958–965. IEEE.
- [12] Aaron van den Oord et. al., 2017. Neural discrete representation learning. In Proceedings of the 31st International Conference on Neural Information Processing Systems, pages 6309–6318.
- [13] Shu-wen Yang et al. 2021. SUPERB: Speech processing universal performance benchmark. arXiv preprint arXiv:2105.01051.
- [14] A. Baevski, Y. Zhou et al., “wav2vec 2.0: A framework for selfsupervised learning of speech representations,” Neurips, vol. 33, pp. 12 449–12 460, 2020.
- [15] W. Hsu, HuBERT: Self-supervised speech representation learning by masked prediction of hidden units. arXiv preprint arXiv:2106.07447.
- [16] Zhiyun Fan et. al. 2020. Exploring wav2vec 2.0 on speaker verification and language identification. arXiv preprint arXiv:2012.06185.
- [17] R. J. Weiss, J. Chorowski et al., “Sequence-to-sequence models can directly translate foreign speech,” Proc. Interspeech, 2017.
- [18] Parnia Bahar et al. 2019. A comparative study on end-to-end speech to text translation. In 2019 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU), pages 792–799. IEEE.
- [19] Xian Li et. al. 2021. Multilingual speech translation from efficient finetuning of pretrained models. In Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers), pages 827–838.
- [20] Kushal Lakhota et al. 2021. Generative spoken language modeling from raw audio. arXiv preprint arXiv:2102.01192.
- [21] A. Polyak, Y. Adi et al., “Speech resynthesis from discrete disentangled self-supervised representations,” arXiv:2104.00355, 2021.
- [22] E. Kharitonov, A. Lee et al., “Text-free prosody-aware generative spoken language modeling,” arXiv:2109.03264, 2021.
- [23] F. Kreuk et al., “Textless speech emotion conversion using decomposed and discrete representations,” arXiv:2111.07402, 2021.

Figure 10: Fine-grained reference samples generated by LLM-Ref when Llama is used as the LLM.