
Certified Robustness in Federated Learning

Motaseem Alfarra Juan C. Pérez Egor Shulgin Peter Richtárik Bernard Ghanem

King Abdullah University of Science and Technology (KAUST)
motaseem.alfarra@kaust.edu.sa

Abstract

Federated learning has recently gained significant attention and popularity due to its effectiveness in training machine learning models on distributed data privately. However, as in the single-node supervised learning setup, models trained in federated learning suffer from vulnerability to imperceptible input transformations known as adversarial attacks, questioning their deployment in security-related applications. In this work, we study the interplay between federated training, personalization, and certified robustness. In particular, we deploy randomized smoothing, a widely-used and scalable certification method, to certify deep networks trained on a federated setup against input perturbations and transformations. We find that the simple federated averaging technique is effective in building not only more accurate, but also more certifiably-robust models, compared to training solely on local data. We further analyze personalization, a popular technique in federated training that increases the model’s bias towards local data, on robustness. We show several advantages of personalization over both (that is, only training on local data and federated training) in building more robust models with faster training. Finally, we explore the robustness of mixtures of global and local (*i.e.* personalized) models, and find that the robustness of local models degrades as they diverge from the global model. Our implementation can be found [here](#).

1 Introduction

Machine learning models in general, and deep neural networks (DNNs) in particular, have demonstrated remarkable performance in several domains, including computer vision [1] and natural language processing [2], among others [3]. Despite this success, DNNs are brittle against small carefully-crafted perturbations in their input space [4, 5]. That is, a DNN $f_\theta : \mathbb{R}^d \rightarrow \mathcal{P}(\mathcal{Y})$ can produce different predictions for the inputs $x \in \mathbb{R}^d$ and $x + \delta$, although the adversarial perturbation δ is small, and thus x and $x + \delta$ are indistinguishable to the human eye. Moreover, DNNs are also susceptible to input transformations that preserve an image’s semantic information, such as rotation, translation, and scaling [6]. This observation raises security concerns about deploying such models in security-critical applications, *i.e.* self-driving cars. Consequently, this phenomenon sparked substantial research efforts towards building machine learning models that are not only accurate, but also robust. That is, building models that both correctly classify an input x , and maintain their prediction as long x preserves its semantic content. Further interest arose in theoretically characterizing the output of models whose input was subjected to perturbations. Whenever a theoretical guarantee exists about a model’s robustness for classifying inputs, f_θ is said to be *certifiably* robust [7]. Among several methods that built such certifiably robust models, Randomized Smoothing (RS) [8] is arguably one of the most effective, scalable, and popular approaches to certify DNNs. In a nutshell, RS predicts the most probable class when the classifier’s input is subjected to additive Gaussian noise. While RS directly operated on pixel-intensity perturbations, a later work extended this technique to certify against input deformations, such as rotation and translation [9].

The problem of training large-scale machine learning models in the real world may need to account for data privacy constraints that arise in distributed setups. Federated learning (FL) [10, 11, 12] is a viable solution to this problem, which is now commonly used in popular services [13]. Although the certified robustness of models in traditional learning settings has been widely studied, few works consider the interaction between certified robustness and the federated setup. Specifically, federated learning distributes the training process across a (possibly large) set of clients (each with their own local data) and privately builds a global model without leaking nor sharing local raw data. In the federated learning setup, Zizzo *et al.* [14] showed that (1) adversarial attacks can reduce the accuracy of state-of-the-art federated learning models to 0%, and (2) adversarial robustness is higher in the centralized setting than in the federated setting, illustrating the difficulty of enhancing adversarial robustness. We identify two key and challenging settings for analyzing certified robustness in federated learning: **(i)** each client has insufficient data to fully train a robust model, and **(ii)** each client may be interested in building a personalized model that is robust against different transformations.

In this work, we set to study the certified robustness of models trained in a federated fashion. We deploy Randomized Smoothing to measure certified robustness against both pixel-intensity perturbations and input deformations. We first analyze when federated training benefits model robustness. We show that in the few local-data regimes—where clients have insufficient data—federated averaging improves not only model performance but also its robustness. Furthermore, we explore how certified robustness gains from personalization [15, 16, 17, 18], *i.e.* fine-tuning the global model on local data. We show that personalization can provide significant robustness improvements even when federated averaging operates on models trained without augmentations aimed at enhancing robustness. At last, we analyze a version of the recently-proposed federated mixture of global and personalized models [19, 20] from a certified robustness lens.

2 Related Work

Certified Adversarial Robustness. The seminal work of Szegedy *et al.* [4] demonstrated how DNNs are vulnerable to small perturbations in their input, now called adversarial attacks. Subsequent works noted how the brittleness against these attacks was widespread and easily exploitable [5, 21]. This observation led to further works on defense mechanisms that improved adversarial robustness [22, 23], and on attacks that aimed at breaking these mechanisms [21, 24]. To this aim, Cohen *et al.* [8] proposed Randomized Smoothing (RS), an approach for certification that proved to successfully scale with models and datasets. The original RS formulation certified models against pixel-level additive perturbations, and was studied in the federated learning setup by Chen *et al.* [25]. Recently, DeformRS [9] reformulated RS to consider parameterized deformations, granting robustness certificates against more general and semantic perturbations such as rotation.

Federated Learning. Federated Learning (FL) is a data-decentralized machine learning setting in which a central server coordinates a large number of clients (*e.g.* mobile devices or whole organizations) to collaboratively train a model [10, 11, 12, 26]. In particular, FL has been successfully deployed by Google [27], Apple [28], NVIDIA [29], and many others, even in safety- and security-critical settings, which motivates our work. Given how the inherent multiple-devices nature of FL introduces heterogeneity in the data, interest spurred towards techniques that considered model personalization [19, 20, 30, 31] to improve performance on each device’s data [16, 18, 32, 33].

Robustness in FL. Concerns about the adversarial vulnerability of machine learning models have also been studied in the FL setup [34]. While most prior works focused on training-time adversarial attacks such as Byzantine attacks [35], and model [34] or data poisoning [36, 37], recent works studied test-time robustness. In particular, the works of Zizzo *et al.* [14] and Shah *et al.* [38] studied the incorporation of adversarial training [23], arguably the most effective empirical defense against adversarial attacks, into the FL setup. Closest to our study, is the recent work of Chen *et al.* [25] that explored certification via RS in FL. In contrast to [25], instead of pixel-level perturbations, we study realistic (*e.g.* rotation and translation) perturbations.

3 Methodology

Notation. We consider the standard image classification problem where a classifier $f_\theta : \mathbb{R}^d \rightarrow \mathcal{P}(\mathcal{Y})$, *e.g.* a DNN with parameters θ , maps the input $x \in \mathbb{R}^d$ to the probability simplex $\mathcal{P}(\mathcal{Y})$ over k classes, where $\mathcal{Y} = \{1, 2, \dots, k\}$. That is, $\sum_{i=1}^k f_\theta^i(x) = 1$ with $f_\theta^i(x) \geq 0$ being the i^{th} element of $f_\theta(x)$, representing the probability x belongs to the i^{th} class.

Randomized Smoothing. Randomized smoothing constructs a new “smooth” classifier from an arbitrary classifier f_θ . In a nutshell, when this smooth classifier is queried at input x , it returns the average prediction of f_θ when its input x is subjected to isotropic additive Gaussian noise, that is:

$$g(x) = \mathbb{E}_{\epsilon \sim \mathcal{N}(0, \sigma^2 I)} [f_\theta(x + \epsilon)]. \quad (1)$$

Let g predict label c_A for input x with some confidence, *i.e.* $\mathbb{E}_\epsilon [f_\theta^{c_A}(x + \epsilon)] = p_A \geq p_B = \max_{c \neq c_A} \mathbb{E}_\epsilon [f_\theta^c(x + \epsilon)]$, then, as proved in [39], g_θ 's prediction is certifiably robust with radius:

$$R = \frac{\sigma}{2} (\Phi^{-1}(p_A) - \Phi^{-1}(p_B)), \quad (2)$$

where Φ^{-1} is the inverse CDF of the standard Gaussian distribution. That is, $\arg \max_i g^i(x + \delta) = \arg \max_i g^i(x)$, $\forall \|\delta\|_2 \leq R$. While the original RS framework certified against additive pixel perturbations in images, DeformRS [9] extended RS to certify against image *deformations*. DeformRS achieved this objective by proposing a *parametric-domain smooth classifier*. In particular, given an image x with pixel coordinates p , a parametric deformation function ν_ϕ with parameters ϕ (*e.g.* if ν is a rotation, then ϕ is the angle of rotation) and an interpolation function I_T , DeformRS defined the parametric-domain smooth classifier as:

$$g_\phi(x, p) = \mathbb{E}_{\epsilon \sim \mathcal{D}} [f_\theta(I_T(x, p + \nu_{\phi+\epsilon}))]. \quad (3)$$

In a nutshell, g outputs the average prediction of f_θ over transformed versions of the input x . Note that this formulation perturbs the pixels' *location*, rather than their intensities. DeformRS showed that, analogous to the smoothed classifiers in RS, parametric-domain smooth classifiers are certifiably robust against perturbations to the parameters of the deformation function with radius

$$\begin{aligned} \|\delta\|_1 &\leq \sigma(p_A - p_B) && \text{for } \mathcal{D} = \mathcal{U}[-\sigma, \sigma], \\ \|\delta\|_2 &\leq \frac{\sigma}{2} (\Phi^{-1}(p_A) - \Phi^{-1}(p_B)) && \text{for } \mathcal{D} = \mathcal{N}(0, \sigma^2 I). \end{aligned} \quad (4)$$

Eq (4) states that, as long as the parameters of the deformation function (*e.g.* rotation angle) are perturbed by a quantity upper bounded by the certified radius, g 's prediction will remain constant.

Specialization to Federated Training. Earlier works proposed various training frameworks to enhance the robustness of smooth classifiers. The schemes studied by these frameworks ranged from simple data augmentation [8] to more sophisticated techniques, including adversarial training [40] and regularization [39]. In this work, we robustify the classifier via simple and nondemanding data augmentation. We select this approach since our main aim is to analyze the effect of federated training on certified robustness in isolation of additional and more sophisticated training schemes. In addition, this setup allows compatibility with other FL-specific constraints and technologies, such as differential privacy and secure aggregation, which can be essential for real-world deployment [13].

As in the Federated Learning setup, we employ the common federated averaging [10, 41] technique. In a nutshell, we consider the case when a dataset is distributed across multiple clients in a non-overlapping manner. We assume that all clients share the architecture f_θ , to allow for weight averaging across clients. Furthermore, we study three different training schemes, where each client is minimizing the following regularized empirical risk [19]:

$$\min_{\theta_1, \dots, \theta_n} \frac{1}{n} \sum_{i=1}^n \lambda \mathcal{L}_i(\theta_i) + (1 - \lambda) \|\theta_i - \bar{\theta}\|_2^2, \quad (5)$$

where \mathcal{L}_i is a training loss function (*e.g.* cross entropy) evaluated on local data of client i , θ_i represents the i^{th} client's model parameters, $\lambda \in [0, 1]$ is a personalization parameter, and $\bar{\theta} = \frac{1}{n} \sum_{i=1}^n \theta_i$ is the average model.

Local Training. Each client trains solely on their own local data, without communication with other clients. At test time, each client employs their own local model. This setting is equivalent to minimizing the risk in Eq. (5) with $\lambda = 1$.

Federated Training. All clients are collaborating in building one global model. This is achieved by iteratively performing (1) client-side model updates with optimization on local data (*i.e.* solving Eq. (5) with $\lambda = 1$), and (2) communication of client models to the server, which averages all models and broadcasts the result back to the clients (*i.e.* solving Eq. (5) with $\lambda = 0$). This process is

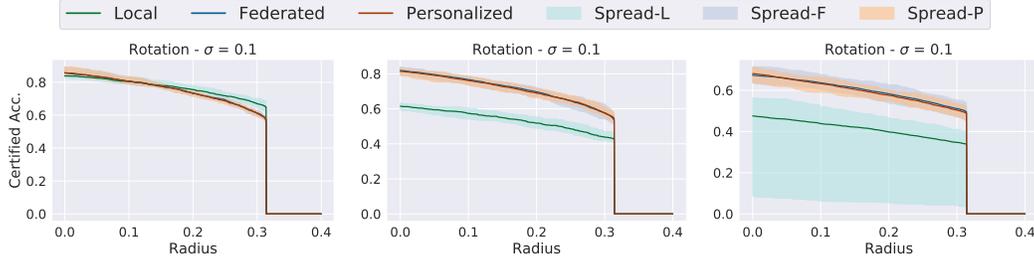


Figure 1: **Certified Accuracy against rotation.** We plot the certified accuracy curves for rotation deformation with $\sigma = 0.1$. We vary the number of clients on which we divide the dataset. Left: 4 clients, middle: 10 clients, right: 20 clients. As the number of clients increases, performance of local training worsens.

repeated until convergence or for a fixed number of communication rounds. At test time, all clients employ the global model sent from the server at the last communication round.

Personalized Training. Since [42] exposed how the basic FL formulation with $\lambda = 1$ and $\theta_1 = \dots = \theta_n$ degrades the performance of some clients, we explore a personalization approach. Namely, upon federated training convergence, each client fine-tunes the global model communicated in the last round with a few optimization steps on their local data (*i.e.* solving Eq. (5) with $\lambda = 1$).

Mixture of models. We also consider a more sophisticated *personalized* ERM setting via a mixture of global and local models [19], seeking an explicit trade-off between the global model and the local models for $\lambda \in (0, 1)$. Our implementation for solving problem (5) for every client i requires local gradient descent steps (with step size γ) and a mixing of current global and local models through:

$$\theta_i \leftarrow \theta_i - \gamma (\lambda \nabla \mathcal{L}_i(\theta_i) + 2(1 - \lambda)(\theta_i - \bar{\theta})), \quad (6)$$

alternating with communication to the server for computing the current average model $\bar{\theta}$. At test time, each client uses its corresponding personalized model θ_i . While the effect of federated training and personalization in improving model performance is widely explored in the literature, its impact on the trained model’s certified robustness remains unclear.

4 Experiments

Training Setup. We fix ResNet18 [43] as our architecture and train on the CIFAR10 [44] and MNIST [45] datasets. We split the training and test sets across clients in a random and non-overlapping fashion. Note that this split forms a best-case condition for local training, allowing compatibility with federated training and its associated data-privacy constraints. We conduct 90 epochs of training, divided in 45 communication rounds, *i.e.* 2 epochs of local training per communication round. We set a batch size to 64, and use a starting learning rate of 0.1, which is decreased by a factor of 10 every 30 epochs (15 communication rounds). Unless specified otherwise, given a transformation we are interested in robustifying against (*e.g.* rotation), we train the model by augmenting the data with such transformation. This procedure is equivalent to estimating the output of the smooth classifier in Eq. (3) with one sample. We set the $\sigma \in \{0.1, 0.5\}$ for rotation and translation and $\sigma \in \{0.12, 0, 5\}$ for pixel perturbations, following [8, 9]. For local models, we train each client on their local data only with the aforementioned setup without any communication.

Certification Setup. For certification, we use the public implementation from [8] for pixel-intensity perturbations, and the one from [9] for rotation and translation. We use 100 Monte Carlo samples for computing the top prediction c_A , and 100k samples for estimating a lower bound to the prediction probability p_A ; we further use a failure probability of $\alpha = 0.001$, and bound the runner-up prediction via $p_B = 1 - p_A$. For experiments on deformations, we choose I_T to be a bi-linear interpolation function, following [9, 46]. To evaluate each client’s certification, we fix a random subset of 500 local samples. At last, we plot the average certified accuracy curves across clients, highlighting the minimum and maximum values as the limits of shaded regions. We report “certified accuracy at radius R ”, defined as the percentage of test samples that is both, classified correctly, and has a certified radius of at least R . We report the certified accuracy curves for all clients in the appendix.

Is Federated Training Good for Robustness? We first investigate the benefits of federated training on certified robustness. To that regard, we use a rotation transformation and vary the number of

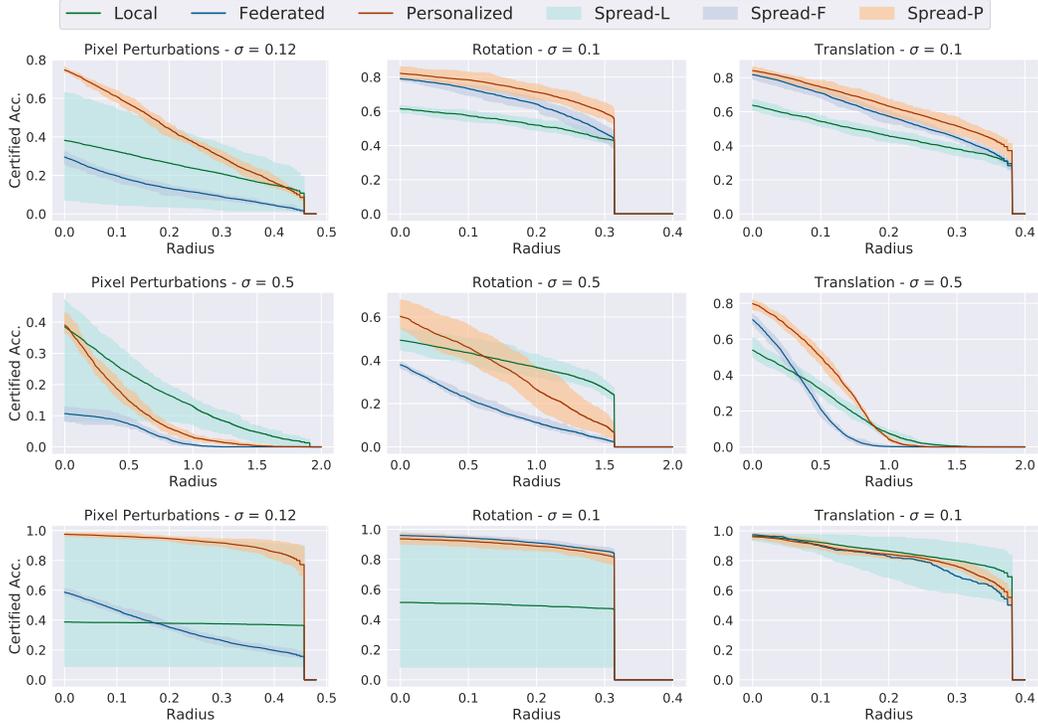


Figure 2: **Comparison between personalization and local training.** We plot the certified accuracy curves against pixel perturbations (left), rotation (middle), and translation (right) with varying $\sigma \in \{0.1, 0.5\}$ for rotation and translation and $\sigma \in \{0.12, 0.5\}$ for pixel perturbations. Last row: Experiments on MNIST dataset.

clients on which the dataset is distributed. We conduct experiments with 4, 10, and 20 clients, and report the results in Figure 1. From these results, we draw the following observations. **(i)** When the number of clients is small (4 clients), *i.e.* when each client has large data, local training can be sufficient for building a model that is accurate *and* robust. **(ii)** As the number of clients increases, *i.e.* a typical scenario in FL, and the amount of data available to each client is not large, federated averaging shines in providing a model with better performance and robustness. In particular, we find federated training can bring robustness improvements of over 20% in the few-local-data regime (10 or 20 clients). This can be interpreted as follows: when local data can sufficiently approximate the real-data distribution, then there is no advantage to conducting federated training. On the other hand, when local data is insufficient for approximating the data-distribution, federated learning is useful. **(iii)** The performance and robustness of personalized (fine-tuned) models are comparable to the global federated model. We attribute this observation to the federated model being trained with data augmentation, and thus converging to a reasonably-good local optimum. Hence, personalizing this model with few epochs of local training would not have very significant impact. We delve more into the benefits of personalization in the next section. **(iv)** At last, we observe that, as the number of clients increases, the performance difference between the best and worst performing clients is significantly larger for local training. This is evidenced by the spread in Figure 1, where the shaded area is notably larger for local training. We elaborate more on this phenomenon in the appendix.

Is Personalization Beneficial for Robustness? Next, we investigate the effect of personalization on certified robustness. In essence, the experiments in Figure 1 assumed all clients train robustly, aiming at collaboratively building a global robust model. However, in a more realistic federated setup, this is not necessarily the case. For instance, different clients could target robustness against different transformations or, in the extreme case, some clients could disregard robustness entirely and simply target accuracy.

To study this case, we use 10 clients and modify the averaging and personalization phases as follows. During the federated training phase, all models train without augmentations (*i.e.* targeting accuracy and disregarding robustness). During the personalization phase, we augment data with the transformation for which the client is interested in being robust against. Experimentally, we personalize

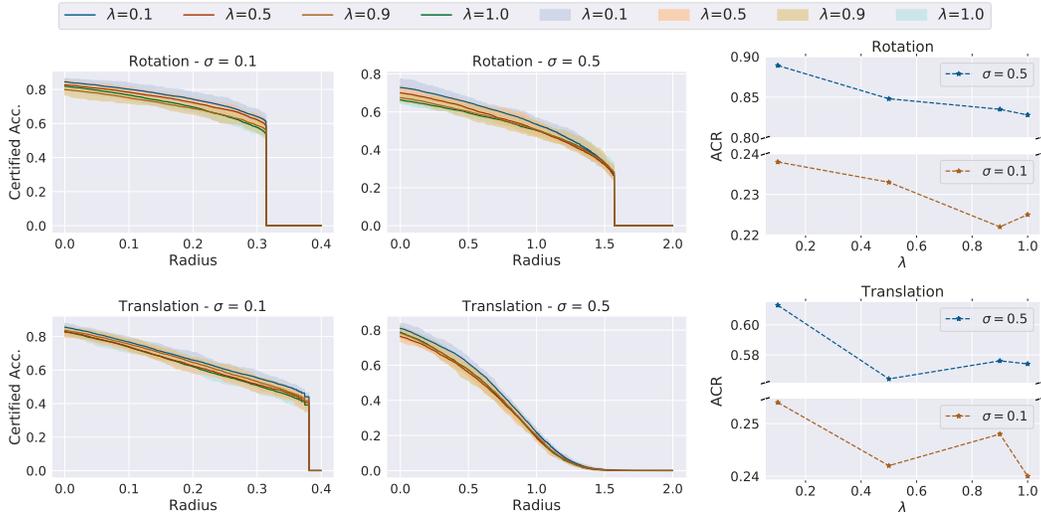


Figure 3: **Mixture of models.** We explore the effect of “intermediate” levels of personalization by varying $\lambda \in \{0.1, 0.5, 0.9, 1.0\}$ from Eq. (5). We experiment with rotation (top row) and translation (bottom row). The first two columns report certified accuracy curves, while the third one shows the associated the Average Certified Radius (ACR), *i.e.* area under the curves, as a function of λ . Our results show that the robustness of local models degrades, when they diverge from the global model.

against pixel perturbations, rotations, and translations, and report results in Figure 2. Our results show that personalization has a significant impact on improving model robustness. Moreover, this improvement is observed across the board, irrespective of the choice of the augmentation or σ .

Advantages of Personalization. Further, we address the following question: when is it better to robustly train on local data than to do robust personalization (starting from a nominally trained federated model)? We examine this question by comparing the performance of a nominally trained federated model that is robustly personalized (Figure 2) against local robust training. We display this comparison in Figure 2. We observe the following: **(i)** When the target local transformation is similar to the target federated one (small values of σ), personalized models significantly outperform local models, despite robust training only occurring in the personalization phase. That is, with far less computation and much faster training, federated training with personalization offers a better alternative to training only on local data. Furthermore, the performance gap increases with the number of clients—equivalent to assigning each client fewer local data. **(ii)** Following intuition, as the difference between the transformation in the federated and personalized settings increases, the performance of personalized models becomes comparable to that of their local counterparts. Note that this is an artifact of choosing a relatively small number of clients, on which the dataset is distributed. Indeed, in the appendix we report how a larger number of clients ($N = 100$) displays significant robustness improvements of personalized models compared to local models.

FL with Mixture Model. At last, we explore how using the mixture of models formulation in Eq. (5) affects robustness of the resulting local models. Note that through all the aforementioned experiments, we studied the case when $\lambda = 1$ for local training, or $\lambda = 0$ for federated training. To this end, we compare the performance of models trained with various values $\lambda \in (0, 1)$, leading to different personalization levels. That is, during local training, each client is leveraging the update step in (6) before communicating the local model to the orchestrating server for an averaging step.

Figure 3 plots the results of this experiment. The first two columns display certified accuracy curves against rotation and translation for different λ values. The last column summarizes the results in terms of Average Certified Radius (ACR), *i.e.* the average certified radius of correctly-classified examples [39]. From these results we observe that: **(i)** for every deformation (rotation, translation) and every σ value, the mixture of models formulation outperforms the robustness of standard federated training. This phenomenon is consistent with almost *any* value of the personalization parameter λ . In particular, we observe that setting $\lambda = 0.1$, corresponding to the *least* personalized local models, yields the best results. **(ii)** By contrasting these results to Figure 2, we notice that, across clients, the spread of certified accuracy is smaller than both naïve personalization and local training.

References

- [1] Alex Krizhevsky, Ilya Sutskever, and Geoffrey E Hinton. ImageNet classification with deep convolutional neural networks. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2012.
- [2] G. Hinton, L. Deng, D. Yu, G. E. Dahl, A. Mohamed, N. Jaitly, A. Senior, V. Vanhoucke, P. Nguyen, T. N. Sainath, and B. Kingsbury. Deep neural networks for acoustic modeling in speech recognition: The shared views of four research groups. *IEEE Signal Processing Magazine*, 2012.
- [3] Yann LeCun, Y Bengio, and Geoffrey Hinton. Deep learning. *Nature*, 2015.
- [4] Christian Szegedy, Wojciech Zaremba, Ilya Sutskever, Joan Bruna, Dumitru Erhan, Ian Goodfellow, and Rob Fergus. Intriguing properties of neural networks. In *International Conference on Learning Representations (ICLR)*, 2014.
- [5] Ian Goodfellow, Jonathon Shlens, and Christian Szegedy. Explaining and harnessing adversarial examples. In *International Conference on Learning Representations (ICLR)*, 2015.
- [6] Logan Engstrom, Brandon Tran, Dimitris Tsipras, Ludwig Schmidt, and Aleksander Madry. A rotation and a translation suffice: Fooling CNNs with simple transformations. *arXiv preprint arXiv:1712.02779*, 2017.
- [7] Eric Wong and Zico Kolter. Provable defenses against adversarial examples via the convex outer adversarial polytope. In *International Conference on Machine Learning (ICML)*, 2018.
- [8] Jeremy Cohen, Elan Rosenfeld, and Zico Kolter. Certified adversarial robustness via randomized smoothing. In *International Conference on Machine Learning (ICML)*, 2019.
- [9] Motasem Alfarra, Adel Bibi, Naemullah Khan, Philip HS Torr, and Bernard Ghanem. Deformers: Certifying input deformations with randomized smoothing. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 36, pages 6001–6009, 2022.
- [10] Brendan McMahan, Eider Moore, Daniel Ramage, Seth Hampson, and Blaise Aguera y Arcas. Communication-efficient learning of deep networks from decentralized data. In *Artificial intelligence and statistics*, pages 1273–1282. PMLR, 2017.
- [11] Jakub Konečný, H. Brendan McMahan, Felix Yu, Peter Richtárik, Ananda Theertha Suresh, and Dave Bacon. Federated learning: strategies for improving communication efficiency. In *NIPS Private Multi-Party Machine Learning Workshop*, 2016.
- [12] Jakub Konečný, H Brendan McMahan, Daniel Ramage, and Peter Richtárik. Federated optimization: Distributed machine learning for on-device intelligence. *arXiv preprint arXiv:1610.02527*, 2016.
- [13] Peter Kairouz, H. Brendan McMahan, Brendan Avent, Aurélien Bellet, Mehdi Bennis, Arjun Nitin Bhagoji, Kallista A. Bonawitz, Zachary Charles, Graham Cormode, Rachel Cummings, Rafael G. L. D’Oliveira, Hubert Eichner, Salim El Rouayheb, David Evans, Josh Gardner, Zachary Garrett, Adrià Gascón, Badi Ghazi, Phillip B. Gibbons, Marco Gruteser, Zaïd Harchaoui, Chaoyang He, Lie He, Zhouyuan Huo, Ben Hutchinson, Justin Hsu, Martin Jaggi, Tara Javidi, Gauri Joshi, Mikhail Khodak, Jakub Konečný, Aleksandra Korolova, Fari-naz Koushanfar, Sanmi Koyejo, Tancrede Lepoint, Yang Liu, Prateek Mittal, Mehryar Mohri, Richard Nock, Ayfer Özgür, Rasmus Pagh, Hang Qi, Daniel Ramage, Ramesh Raskar, Mariana Raykova, Dawn Song, Weikang Song, Sebastian U. Stich, Ziteng Sun, Ananda Theertha Suresh, Florian Tramèr, Praneeth Vepakomma, Jianyu Wang, Li Xiong, Zheng Xu, Qiang Yang, Felix X. Yu, Han Yu, and Sen Zhao. Advances and open problems in federated learning. *Found. Trends Mach. Learn.*, 14(1-2):1–210, 2021.
- [14] Giulio Zizzo, Amrbrish Rawat, Mathieu Sinn, and Beat Buesser. Fat: Federated adversarial training. *arXiv preprint arXiv:2012.01791*, 2020.
- [15] Virginia Smith, Chao-Kai Chiang, Maziar Sanjabi, and Ameet S Talwalkar. Federated multi-task learning. *Advances in neural information processing systems (NeurIPS)*, 2017.
- [16] Yishay Mansour, Mehryar Mohri, Jae Ro, and Ananda Theertha Suresh. Three approaches for personalization with applications to federated learning. *arXiv preprint arXiv:2002.10619*, 2020.

- [17] Manoj Ghuhana Arivazhagan, Vinay Aggarwal, Aaditya Kumar Singh, and Sunav Choudhary. Federated learning with personalization layers. *arXiv preprint arXiv:1912.00818*, 2019.
- [18] Elnur Gasanov, Ahmed Khaled, Samuel Horváth, and Peter Richtárik. FLIX: A simple and communication-efficient alternative to local methods in federated learning. In *Proceedings of The 25th International Conference on Artificial Intelligence and Statistics*, 2022.
- [19] Filip Hanzely and Peter Richtárik. Federated learning of a mixture of global and local models. *arXiv preprint arXiv:2002.05516*, 2020.
- [20] Filip Hanzely, Slavomír Hanzely, Samuel Horváth, and Peter Richtárik. Lower bounds and optimal algorithms for personalized federated learning. *Advances in Neural Information Processing Systems (NeurIPS)*, 2020.
- [21] Nicholas Carlini and David Wagner. Towards evaluating the robustness of neural networks. In *2017 IEEE Symposium on Security and Privacy (SP)*, 2017.
- [22] Harini Kannan, Alexey Kurakin, and Ian Goodfellow. Adversarial logit pairing. *arXiv preprint arXiv:1803.06373*, 2018.
- [23] Aleksander Madry, Aleksandar Makelov, Ludwig Schmidt, Dimitris Tsipras, and Adrian Vladu. Towards deep learning models resistant to adversarial attacks. In *International Conference on Learning Representations (ICLR)*, 2018.
- [24] Seyed-Mohsen Moosavi-Dezfooli, Alhussein Fawzi, and Pascal Frossard. Deepfool: a simple and accurate method to fool deep neural networks. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pages 2574–2582, 2016.
- [25] Cheng Chen, Bhavya Kailkhura, Ryan Goldhahn, and Yi Zhou. Certifiably-robust federated adversarial learning via randomized smoothing. In *2021 IEEE 18th International Conference on Mobile Ad Hoc and Smart Systems (MASS)*, pages 173–179. IEEE, 2021.
- [26] Jianyu Wang, Zachary Charles, Zheng Xu, Gauri Joshi, H Brendan McMahan, Maruan Al-Shedivat, Galen Andrew, Salman Avestimehr, Katharine Daly, Deepesh Data, et al. A field guide to federated optimization. *arXiv preprint arXiv:2107.06917*, 2021.
- [27] Andrew Hard, Kanishka Rao, Rajiv Mathews, Swaroop Ramaswamy, Françoise Beaufays, Sean Augenstein, Hubert Eichner, Chloé Kiddon, and Daniel Ramage. Federated learning for mobile keyboard prediction. *arXiv preprint arXiv:1811.03604*, 2018.
- [28] Apple. Designing for privacy (video and slide deck). Apple WWDC, <https://developer.apple.com/videos/play/wwdc2019/708>, 2019.
- [29] NVIDIA. Triaging covid-19 patients: 20 hospitals in 20 days build ai model that predicts oxygen needs. <https://blogs.nvidia.com/blog/2020/10/05/federated-learning-covid-oxygen-needs/>, October 2020.
- [30] Yihan Jiang, Jakub Konečný, Keith Rush, and Sreeram Kannan. Improving federated learning personalization via model agnostic meta learning. In *NeurIPS Workshop on Federated Learning for Data Privacy and Confidentiality*, 2019.
- [31] Tian Li, Shengyuan Hu, Ahmad Beirami, and Virginia Smith. Ditto: Fair and robust federated learning through personalization. In *International Conference on Machine Learning*, pages 6357–6368. PMLR, 2021.
- [32] Yihan Jiang, Jakub Konečný, Keith Rush, and Sreeram Kannan. Improving federated learning personalization via model agnostic meta learning. *arXiv preprint arXiv:1909.12488*, 2019.
- [33] Matthias Paulik, Matt Seigel, Henry Mason, Dominic Telaar, Joris Kluivers, Rogier van Dalen, Chi Wai Lau, Luke Carlson, Filip Granqvist, Chris Vandeveld, et al. Federated evaluation and tuning for on-device personalization: System design & applications. *arXiv preprint arXiv:2102.08503*, 2021.
- [34] Arjun Nitin Bhagoji, Supriyo Chakraborty, Prateek Mittal, and Seraphin Calo. Analyzing federated learning through an adversarial lens. In *International Conference on Machine Learning*, pages 634–643. PMLR, 2019.
- [35] Lie He, Sai Praneeth Karimireddy, and Martin Jaggi. Byzantine-robust learning on heterogeneous datasets via resampling. In *International Conference on Learning Representations (ICLR)*, 2020.

- [36] Jacob Steinhardt, Pang Wei W Koh, and Percy S Liang. Certified defenses for data poisoning attacks. *Advances in Neural Information Processing Systems (NeurIPS)*, 2017.
- [37] Gan Sun, Yang Cong, Jiahua Dong, Qiang Wang, Lingjuan Lyu, and Ji Liu. Data poisoning attacks on federated machine learning. *IEEE Internet of Things Journal*, 2021.
- [38] Devansh Shah, Parijat Dube, Supriyo Chakraborty, and Ashish Verma. Adversarial training in communication constrained federated learning. *arXiv preprint arXiv:2103.01319*, 2021.
- [39] Runtian Zhai, Chen Dan, Di He, Huan Zhang, Boqing Gong, Pradeep Ravikumar, Cho-Jui Hsieh, and Liwei Wang. Macer: Attack-free and scalable robust training via maximizing certified radius. In *International Conference on Learning Representations (ICLR)*, 2020.
- [40] Hadi Salman, Jerry Li, Ilya P Razenshteyn, Pengchuan Zhang, Huan Zhang, Sébastien Bubeck, and Greg Yang. Provably robust deep learning via adversarially trained smoothed classifiers. In *Advances in Neural Information Processing Systems (NeurIPS)*, 2019.
- [41] Daniel Povey, Xiaohui Zhang, and Sanjeev Khudanpur. Parallel training of DNNs with natural gradient and parameter averaging. In *ICLR Workshop*, 2015.
- [42] Tao Yu, Eugene Bagdasaryan, and Vitaly Shmatikov. Salvaging federated learning by local adaptation. *arXiv preprint arXiv:2002.04758*, 2020.
- [43] Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recognition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, 2016.
- [44] Alex Krizhevsky. Learning multiple layers of features from tiny images. *University of Toronto*, 2012.
- [45] Yann LeCun, Corinna Cortes, and CJ Burges. Mnist handwritten digit database. *ATT Labs [Online]*. Available: <http://yann.lecun.com/exdb/mnist>, 2, 2010.
- [46] Gabriel Pérez S., Juan C. Pérez, Motasem Alfarrar, Silvio Giancola, and Bernard Ghanem. 3deformers: Certifying spatial deformations on point clouds. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pages 15169–15179, June 2022.

Certified Robustness in Federated Learning

Supplementary Materials

A Additional Experiments

A.1 Is Federated Averaging Beneficial for Robustness

In Section 4, we analyzed the benefits of personalization on the certified robustness when all clients are training nominally. Next, we address the following question: what if all other clients aim to build a model robust against transformations that are different than the desired one? We analyze the scenario when all clients train with an augmentation that differs from the one a certain client desires. Thus, we deploy augmentation with the general affine deformation [9] during the federated training phase, and then personalize with either rotation or translation. We report the results in Figure 4 and illustrate that personalization has a positive impact on robustness even when federated training is conducted with a different augmentation (an affine deformation, in this case).

In Figure 1, we analyzed the effect of varying the number of clients on the certified robustness against rotations. For completeness, we repeat the experiment with translations, and report the results in Figure 5. In particular, in this experiment we distribute CIFAR10 on 4 and 10 clients, and vary $\sigma \in \{0.1, 0.5\}$. Analogous to our earlier observation, as the number of clients increases, the local data becomes insufficient, and the performance and robustness of local training deteriorates.

A.2 100 Clients Experiment

In Section 4, we observed that when the augmentation deployed in the federated training phase differs from the one used in the personalization phase, the performance of local models is comparable to that of personalized models. We scale our experiments by distributing the dataset on a larger number of clients (100). This makes the local data for each client insufficient for training local models. We plot the certified accuracy curves of local training, federated training, and personalized training in Figure 6. We observe that the performance gap increases between the personalized and local models, providing further evidence to support our hypothesis from Section 4. That is, federated training and personalization, compared to local training, provide a more reliable approach that improves both performance and robustness in more realistic federated scenarios.

A.3 Ablation for All Clients

In all of our experiments, we reported the certified accuracy curves averaged across all clients, highlighting the minimum and the maximum performing clients in a shaded region. For completeness, we plot the certified accuracy for all clients for some of our experiments. In particular, for experiments with 4 clients, we show our results in Figure 7, and show the results on 10 clients in Figure 8. On each plot, we show the performance variation across clients when local training is conducted (compared to personalized training). We observe, following our earlier observations, that the spread is significantly higher for local training. Note that this behaviour is despite the fact that we distributed the data in a uniform and homogeneous fashion across clients. Hence, in more realistic scenarios with heterogeneous splits, this spread could grow, highlighting the reliability of federated

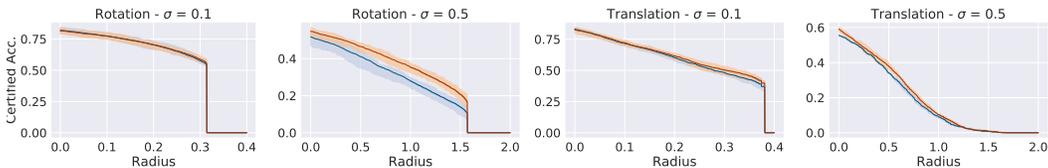


Figure 4: **Certified Robustness against Rotation starting from Affine. Effect of Personalization** Left: personalization with rotation augmentation with $\sigma \in \{0.1, 0.5\}$. Right: translation augmentation with $\sigma \in \{0.1, 0.5\}$. The color convention follows that of Figure 2.

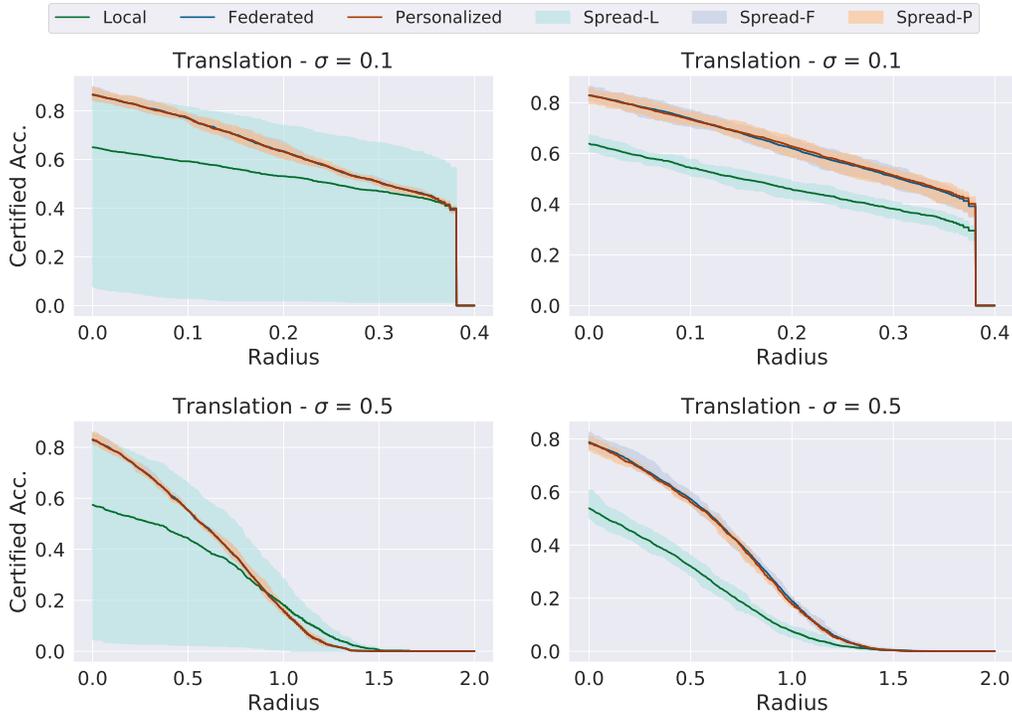


Figure 5: **Certified Accuracy against translation.** We plot the certified accuracy curves for translation deformation by varying $\sigma \in \{0.1, 0.5\}$ in the top and bottom rows, respectively. We vary the number of clients on which we divide the dataset. Left: 4 clients, right: 10 clients. As the number of clients increases, performance of local training worsens.

training and personalization in building accurate and robust models. We believe this analysis is an interesting setup for future work.

A.4 Experimental Details

The experiments reported in the paper used the MNIST and CIFAR-10 [44] Datasets¹. We used the available splits provided in PyTorch for training and testing sets. Moreover, we adopted the publicly-available codes for certification, as noted in the experimental section.

A.5 FL with Mixture Model

At last, we experiment with the effect of the mixture model on the certified accuracy of the trained model. In Section 4, our experiments analyzed rotation and translation deformations on CIFAR10. For completeness, in Figure 9 we also report results against (1) pixel perturbations on CIFAR10 and (2) rotation, translation, and pixel perturbations on MNIST. Our results further confirm our observation in Section 4: the mixture model provides consistent improvement on the certified robustness for most considered values of λ . It is also worth noting that different degrees of personalization perform the best for different perturbations and σ values.

B Social Impact

This paper explores (1) certified robustness and (2) federated learning. Both topics are associated to how machine learning settings relate to security which, in turn, has a social impact. In particular, robustness is associated with the secure deployment of models, hindering how malicious agents may attack recognition systems to fit their purposes. Furthermore, federated learning is a setting

¹Available <https://www.cs.toronto.edu/~kriz/cifar.html>, under an MIT license.

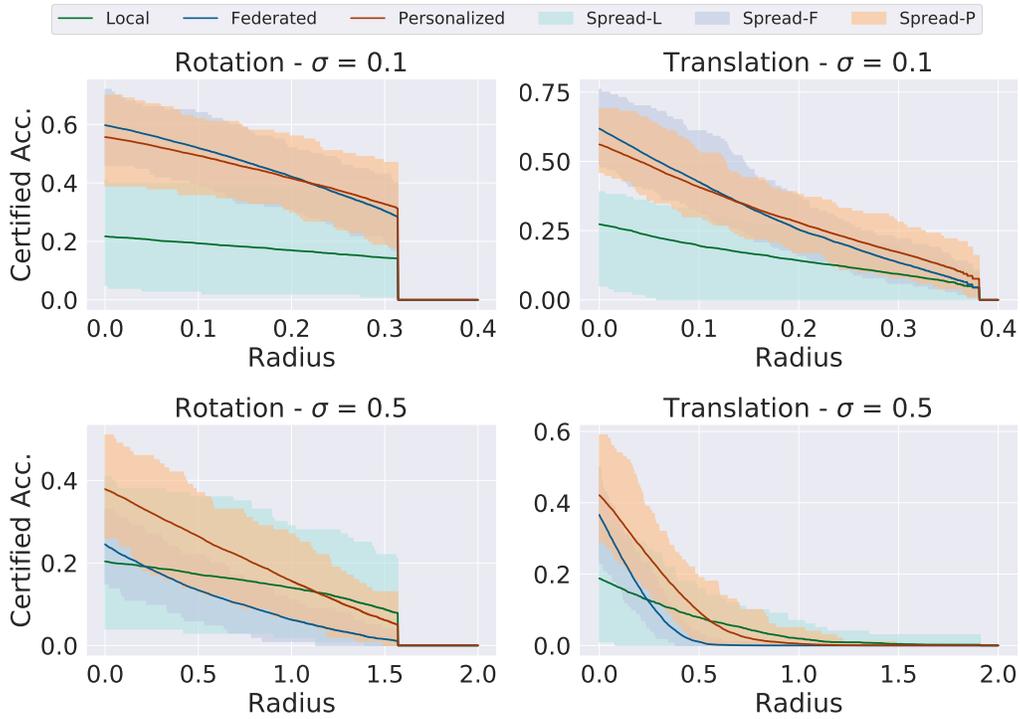


Figure 6: **Nominal pre-training and robust personalization with 100 clients.** We compare local robust training to nominal federated training with robust personalization in terms of certified accuracy on CIFAR10.

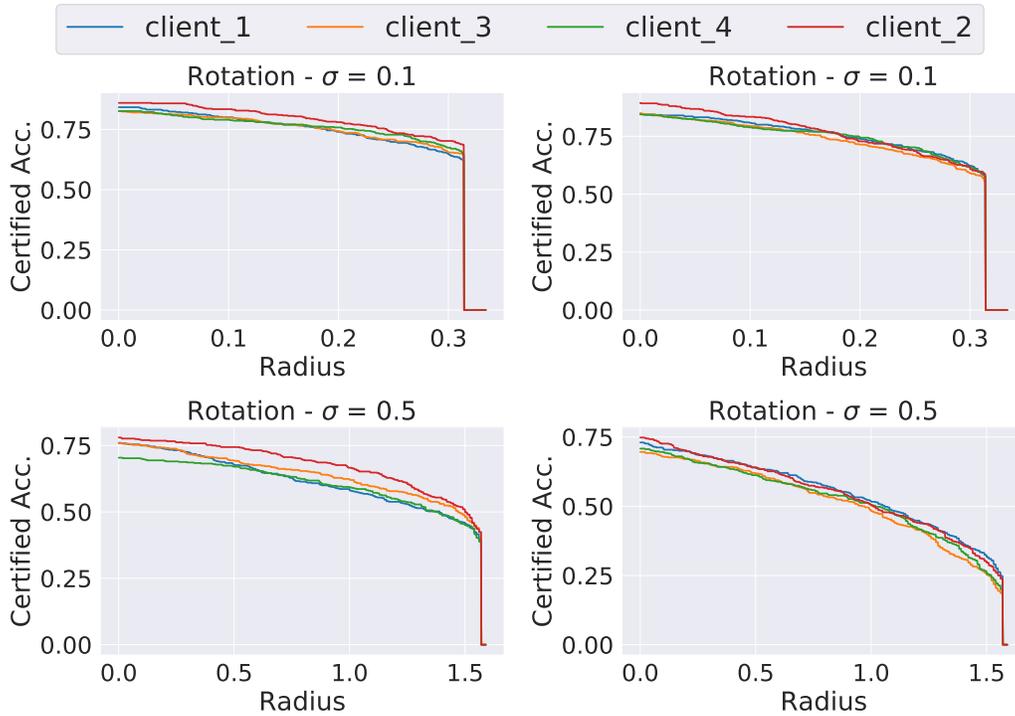


Figure 7: **Ablations for all clients. 4 Clients experiment** Left: Local training. Right: Personalized training.

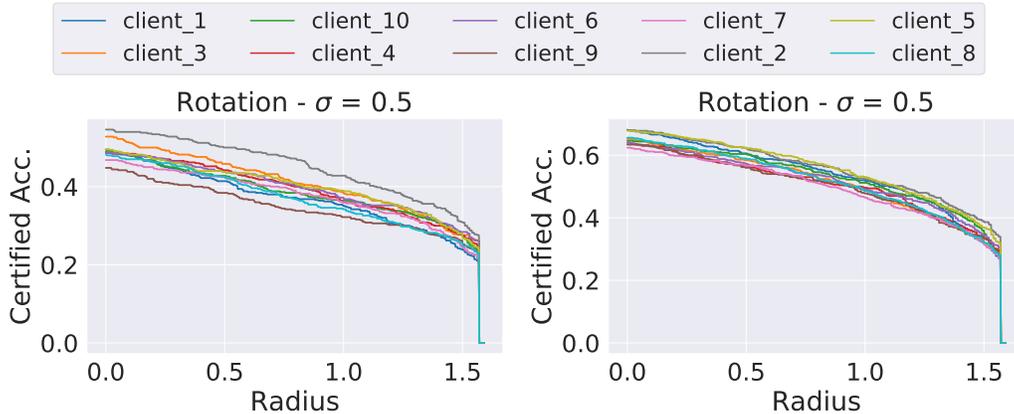


Figure 8: **Ablations for all clients. 10 Clients experiment** Left: Local training. Right: Personalized training.

that arises naturally when data-privacy constraints are introduced into the learning objective: how to develop well-performing models that leverage user data while preserving privacy.

C Compute Power

All in all, our work has the potential to be used by services targeting high-performance private models to benefit users. In particular, we used 20 Nvidia-V100 GPUs for all of our experiments.

D Limitations

There exist several frameworks that characterize federated training and personalization. A limitation of our work is the focus on the popular federated averaging technique. A possible interesting avenue for future work is to benchmark different federated and personalization frameworks in terms of robustness. Moreover, new mixture models could be devised that explicitly target robustness enhancement are left for future works. Moreover, the development of new mixture models explicitly aimed at improving robustness and reliability is also left for future work. At last, in this work we considered a homogeneous split of data across clients. That is, all clients have the same amount, and probably the same set of classes, of data. We note here, while this setup is less realistic to the real world setup where different clients have heterogeneous data splits, we remark here that this serves as the best condition for local training. That is, even when putting local training at advantage, our work showed the superiority of conducting federated training and personalization in providing models that are both accurate and robust. We leave studying the heterogeneous setup for future works.

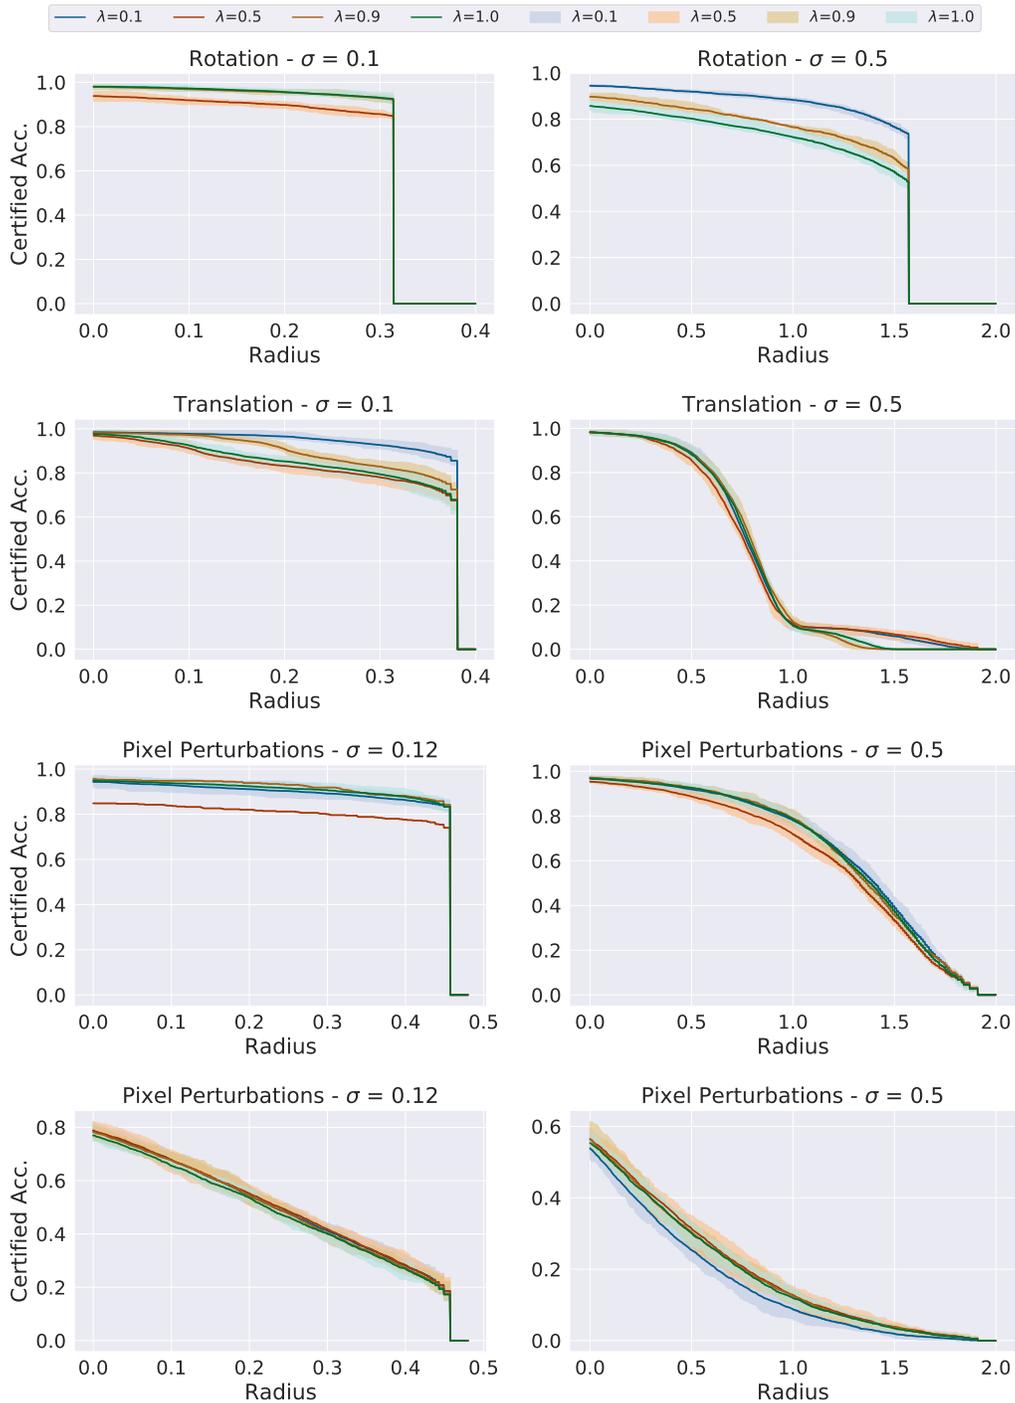


Figure 9: **FL with Mixture of Models.** We analyze the effect of mixture model on certified robustness on MNIST (first three rows) and CIFAR10 (last row). We observe that for most personalization values λ , the mixture of model outperforms the naive federated averaging model.