

RETHINKING THE ROLES OF GRAPHS AND LARGE LANGUAGE MODELS IN KNOWLEDGE-GRAPH-BASED RETRIEVAL-AUGMENTED GENERATION

Anonymous authors

Paper under double-blind review

ABSTRACT

Large Language Models (LLMs) demonstrate strong reasoning abilities but face limitations such as hallucinations and outdated knowledge. Knowledge Graph (KG)-based Retrieval-Augmented Generation (RAG) addresses these issues by grounding LLM outputs in structured external knowledge from KGs. However, current KG-based RAG frameworks still struggle to optimize the trade-off between retrieval accuracy and efficiency in identifying a suitable amount of relevant graph information for the LLM to digest. We introduce SubgraphRAG, extending the KG-based RAG framework that retrieves subgraphs centered on query/topic entities and leverages LLMs for reasoning and answer generation. Our approach innovatively integrates a lightweight multilayer perceptron (MLP) with a parallel triple-scoring mechanism for efficient subgraph retrieval while encoding directional structural distances to enhance retrieval accuracy. The size of retrieved subgraphs can be flexibly adjusted to match the query’s need and the downstream LLM’s reasoning capacity. This design strikes a balance between model complexity and reasoning power, enabling scalable and generalizable retrieval processes. Notably, based on our retrieved subgraphs, smaller models like Llama3.1-8B deliver competitive results with explainable reasoning, while larger models like GPT-4o achieve comparable or better state-of-the-art accuracy compared with previous baselines—all without finetuning. Extensive evaluations on the WebQSP and CWQ benchmarks highlight SubgraphRAG’s strengths in efficiency, accuracy, and reliability by reducing hallucinations and improving response grounding.

1 INTRODUCTION

Large language models (LLMs) have increasingly demonstrated remarkable abilities (Brown et al., 2020; Kojima et al., 2022; Wei et al., 2022; Bubeck et al., 2023; Yao et al., 2023; Huang & Chang, 2023). However, issues like hallucinations (Ji et al., 2023; Huang et al., 2023; Zhang et al., 2023), outdated knowledge (Dhingra et al., 2022; Kasai et al., 2023), and a lack of domain expertise (Li et al., 2023b) undermine their trustworthiness. Retrieval-augmented generation (RAG) has emerged as a promising strategy to mitigate these problems by grounding LLM outputs in external knowledge sources (Shuster et al., 2021; Borgeaud et al., 2022; Vu et al., 2024; Gao et al., 2024b).

While text-based retrieval provides some improvement, graph-based structures offer a more efficient alternative for organizing knowledge (Chein & Mugnier, 2008). Graphs facilitate explicit representation of relationships, reduce information redundancy, and allow for more flexible updates (Robinson et al., 2015). Consequently, recent studies have explored using graph-structured knowledge, particularly knowledge graphs (KGs), as external resources for RAG in LLMs (Pan et al., 2024; Peng et al., 2024; Edge et al., 2024). However, developing effective and efficient frameworks for KG-based RAG remains limited due to the unique challenges posed by the complex structures of KGs.

Firstly, traditional text-based retrieval methods, such as BM25 (Robertson et al., 1994; Robertson & Zaragoza, 2009) or dense retrieval with cosine similarity (Karpukhin et al., 2020), are insufficient for supporting LLMs in complex reasoning tasks (Sun et al., 2018). For instance, a query like “What is the most famous painting by a contemporary of Michelangelo and Raphael?” requires not only retrieving works by their contemporaries but also reasoning about relationships beyond Michelan-

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

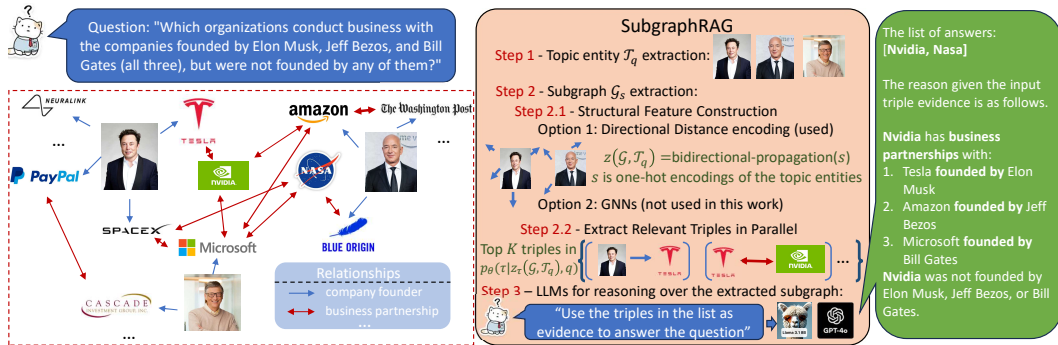


Figure 1: The framework of SubgraphRAG. Retrieved subgraphs consist of relevant triples that are extracted in parallel. Retrieved subgraphs are flexible in their forms and their sizes. In the above example, the relevant subgraph has flexible and complex forms (neither trees nor paths).

gelo and Raphael themselves. Thus, KG retrieval goes beyond basic entity linking, requiring the extraction of nonlocal entities connected through multi-hop, relevant relationships to support reasoning (Jiang et al., 2023a; Luo et al., 2024b; Sun et al., 2024a). Such information is often best represented as KG subgraphs, whose retrieval enables more effective downstream reasoning.

Second, KG-based RAG faces significant computational challenges. Extracting complex structural patterns, such as paths or subgraphs, during KG retrieval is crucial. Efficient similarity search methods like locality-sensitive hashing (Indyk & Motwani, 1998) are not suitable for this task. Therefore, identifying relevant structural information efficiently while meeting the latency requirements of potentially online graph queries and adapting to dynamic updates of KGs is essential to designing a practically applicable KG-based RAG framework (Trivedi et al., 2017; Liang et al., 2024).

Third, extracting structural information must cover the critical evidence needed to answer the query without exceeding the reasoning capacity of LLMs. Expanding the context window increases computational complexity and can degrade RAG performance by introducing irrelevant information (Xu et al., 2024) and causing the “lost in the middle” phenomenon (Liu et al., 2024b). To prevent these issues, redundant structural information should be pruned to keep only relevant evidence within the LLMs’ processing limits, improving accuracy and avoiding hallucinations of LLMs.

Existing KG-based RAG frameworks face limitations for the aforementioned challenges, often due to suboptimal balance between retrieval and reasoning. For example, many approaches rely on LLMs to perform retrieval through iterative searches over KGs, resulting in significant complexity from multiple LLM calls per query (Kim et al.; Gao et al., 2024a; Wang et al., 2024; Guo et al., 2024; Ma et al., 2024; Sun et al., 2024a; Jiang et al., 2024; Jin et al., 2024; Xiong et al., 2024). These methods may also miss relevant entities or relationships due to the limited context windows of LLMs. Conversely, methods that employ lighter models for both retrieval and reasoning, such as LSTMs or GNNs, embed iterative reasoning within the retrieval process itself (Zhang et al., 2022; Liu et al., 2024a; Sun et al., 2019). Despite being efficient, these methods may not well capture the contextual information due to the weak reasoners. Additionally, some approaches retrieve fixed types of subgraphs for efficiency such as paths (Zhang et al., 2022; Luo et al., 2024b), restricting the coverage of critical evidence for LLM reasoning—a point we will explore more in Sec. 3.1.

Design Principles We argue that there is an inherent tradeoff between model complexity and reasoning capability. To effectively search over KGs, which are expected to grow rapidly, knowledge retrievers should remain lightweight, flexible, generalizable, and equipped with basic reasoning abilities to efficiently filter relevant (even if only roughly relevant) information from vast amounts of irrelevant data, while delegating complex reasoning tasks to LLMs. As LLMs continue to demonstrate increasingly sophisticated reasoning abilities and are likely to improve further, this division of labor becomes even more sensible. As long as the retrieved information fits within the LLM’s reasoning capacity, LLMs—leveraging their superior reasoning power—can then perform more fine-grained analysis and provide accurate answers with appropriate prompting. This approach extends the two-stage Recall & Ranking (rough to fine) framework commonly used in traditional information retrieval and recommendation pipelines, with the key advance being that each stage is paired with appropriately tiered reasoning capabilities from AI models to meet the demands of answering

108 complex queries. Besides, for questions proven too challenging, the concept of iterating the above
 109 process can be adopted. However, this consideration is beyond the scope of the current work.

110
 111 **Present Work** Our framework for KG-based RAG, SubgraphRAG (Fig. 1), follows a pipeline that
 112 first retrieves a relevant subgraph around the query’s topic entities, and then employs LLMs to
 113 reason over it. While this approach mirrors some existing methods (He et al., 2021; Jiang et al.,
 114 2023b), SubgraphRAG introduces novel design elements that significantly improve both efficiency
 115 and accuracy by adhering to the aforementioned principles. For efficiency, we employ a lightweight
 116 multilayer perceptron (MLP) combined with parallel triple-scoring for subgraph retrieval. To ensure
 117 accuracy, we encode tailored structural distances from the topic entities as structural features. This
 118 enables our MLP retriever to outperform more complex models, such as GNNs, LLMs, and heuristic
 119 searches, in terms of covering the triples and entities critical for answering the query while main-
 120 taining high efficiency. Additionally, the retrieved subgraphs have flexible forms, with adjustable
 121 sizes to accommodate the varying capacities of LLMs. SubgraphRAG employs unfine-tuned LLMs,
 maintaining generalization, adaptability to updated KGs, and compatibility with black-box LLMs.

122 We evaluate SubgraphRAG on two prominent multi-hop knowledge graph question answering
 123 (KGQA) benchmarks—WebQSP and CWQ. Remarkably, even without fine-tuning, smaller models
 124 like Llama-3.1-8B can achieve competitive performance. Larger models, such as GPT-4o, deliver
 125 state-of-the-art (SOTA) results, surpassing previous methods for most cases. Additionally, LLMs
 126 enhanced by the retrieved subgraphs in SubgraphRAG exhibit a substantial capability of reducing
 127 hallucination by generating knowledge-grounded answers and explanations.

128 129 130 2 PRELIMINARIES

131
132
 133 A KG can be represented as a set of triples, denoted by $\mathcal{G} = \{(h, r, t) \mid h, t \in \mathcal{E}, r \in \mathcal{R}\}$, where \mathcal{E}
 134 represents the set of entities and \mathcal{R} represents the set of relations. Each triple denoted by $\tau = (h, r, t)$
 135 characterizes a fact that the head entity h and the tail entity t follow a directed relation r . In practice,
 136 entities and relations are often associated with a raw text surface form friendly for LLM reasoning.

137 **KG-based RAG** aims to enhance LLM responses using knowledge in the KG as the context. Given
 138 a query q , LLMs may access knowledge indicated by triples in the KG to address the request in q .
 139 The challenge arises in searching for relevant knowledge from the KG which is often large-scale,
 140 and reasoning over the collected knowledge to give the correct response.

141 **Entity Linking** is often adopted as the first step in KG-based RAG, whose goal is to identify the set
 142 of entities $\mathcal{T}_q \subset \mathcal{E}$ directly involved in the query q . The entities in \mathcal{T}_q , named topic entities, provide
 143 valuable inductive bias for retrieval as the triples relevant to q are often close to \mathcal{T}_q .

144 **Knowledge Graph Question Answering (KGQA)** is an important application commonly used to
 145 evaluate KG-based RAG, where the query q is a question that requires finding answers that satisfy
 146 certain constraints. The answer(s) \mathcal{A}_q often corresponds to a set of entities in the KG. A question
 147 that requires multiple triples in the KG as evidence to identify an answer entity is classified as a
 148 complex question necessitating multi-hop reasoning, in contrast to a single-hop question.

149 150 151 3 THE SUBGRAPHRAG FRAMEWORK

152
153
 154 Our proposed framework, SubgraphRAG, adopts a retrieval-and-reasoning pipeline for KG-based
 155 RAG. Specifically, given a query q , SubgraphRAG first extracts knowledge that can be represented
 156 as a subgraph $\mathcal{G}_q \subset \mathcal{G}$, and then LLMs generate the response by reasoning over \mathcal{G}_q . While some
 157 existing works adopt a similar pipeline (Zhang et al., 2022; Luo et al., 2024b; Wu et al., 2023; Wen
 158 et al., 2023), our novelty lies in addressing the challenges in the following three aspects: First, the
 159 extracted \mathcal{G}_q is expected to cover the evidence relevant for answering q as much as possible, while
 160 being limited by some size budget K adjustable according to the capacity of the downstream LLM.
 161 Second, \mathcal{G}_q extraction is extremely efficient and scalable. Third, suitable prompting is used to guide
 the LLM to reason over \mathcal{G}_q and generate the grounded answer with explanations.

3.1 EFFICIENT, FLEXIBLE AND EXPRESSIVE SUBGRAPH RETRIEVAL

Problem Reduction To begin with, we formulate the subgraph retrieval problem and gradually reduce it to an efficiently solvable problem. An LLM can be viewed as an answer generator $\mathbb{P}(\cdot | \mathcal{G}_q, q)$ that takes queries and evidence represented by subgraphs. Given a query q and its answer \mathcal{A}_q , the best subgraph evidence for this LLM is denoted as $\mathcal{G}_q^* = \arg \max_{\mathcal{G}_q \subseteq \mathcal{G}} \mathbb{P}(\mathcal{A}_q | \mathcal{G}_q, q)$. Of course, solving this problem is practically impossible as it requires the knowledge of \mathcal{A}_q . Instead, we aim to learn a subgraph retriever from data and expect this retriever to generalize to unseen future queries.

Specifically, let the subgraph retriever be a distribution $\mathbb{Q}_\theta(\cdot | q, \mathcal{G})$ over the subgraph space of the KG. θ denotes the parameters. Given a training set of question-answer pairs \mathcal{D} , the subgraph retriever learning problem can be formulated as the following problem:

$$\max_{\theta} \mathbb{E}_{(q, \mathcal{A}_q) \sim \mathcal{D}, \mathcal{G}_q \sim \mathbb{Q}_\theta(\mathcal{G}_q | q, \mathcal{G})} \mathbb{P}(\mathcal{A}_q | \mathcal{G}_q, q). \quad (1)$$

This problem is hard to solve due to the complexity of the LLM (\mathbb{P}). Simply evaluating $\mathbb{P}(\mathcal{A}_q | \mathcal{G}_q, q)$ means calling the LLM to generate the particular answer \mathcal{A}_q , which could be costly and only applied to grey/white-box LLMs with accessible output logits, let alone the incomputable gradient $\frac{d\mathbb{P}}{d\mathcal{G}_q}$.

To solve the problem in Eq. 1, we adopt the following idea. If we know the optimal subgraph \mathcal{G}_q^* , the maximum likelihood estimation (MLE) principle can be leveraged to train the retriever $\max_{\theta} \mathbb{E}_{(q, \mathcal{A}_q) \sim \mathcal{D}} \mathbb{Q}_\theta(\mathcal{G}_q^* | \mathcal{G}, q)$. However, getting \mathcal{G}_q^* for an even known question-answer pair (q, \mathcal{A}_q) is computationally hard and LLM-dependent. Instead, we use (q, \mathcal{A}_q) to construct surrogate subgraph evidence with heuristics $\tilde{\mathcal{G}}(q, \mathcal{A}_q)$ and train the retriever based on MLE:

$$\max_{\theta} \mathbb{E}_{(q, \mathcal{A}_q) \sim \mathcal{D}} \mathbb{Q}_\theta(\tilde{\mathcal{G}}_q | \mathcal{G}, q), \quad \text{where } \tilde{\mathcal{G}}_q = \tilde{\mathcal{G}}(q, \mathcal{A}_q). \quad (2)$$

An example of $\tilde{\mathcal{G}}_q$ is the shortest paths between topic entities \mathcal{T}_q and answer entities \mathcal{A}_q . Eq. 2 is conceptually similar to the weak supervision adopted in Zhang et al. (2022). However, the formulation in Eq. 2 indicates that the sampled subgraph does not necessarily follow a fixed type like paths. Instead, the retriever distribution \mathbb{Q}_θ can be factorized into distributions over triples, allowing efficient training, efficient subgraph retrieval, flexible subgraph types, and adjustable subgraph sizes.

Triple Factorization We propose to adopt a retriever that allows a subgraph distribution factorization over triples given some latent variables $z_\tau = z_\tau(\mathcal{G}, q)$ (to be elaborated later):

$$\mathbb{Q}_\theta(\mathcal{G}_q | \mathcal{G}, q) = \prod_{\tau \in \mathcal{G}_q} p_\theta(\tau | z_\tau, q) \prod_{\tau \in \mathcal{G} \setminus \mathcal{G}_q} (1 - p_\theta(\tau | z_\tau, q)), \quad (3)$$

This strategy is inspired by the studies on graph generative models (Kipf & Welling, 2016) and enjoys four benefits: Efficiency in Training - The problem in Eq. 2 can be factorized as $\max_{\theta} \mathbb{E}_{(q, \mathcal{A}_q) \sim \mathcal{D}} \sum_{\tau \in \tilde{\mathcal{G}}_q} \log p_\theta(\tau | z_\tau, q) + \sum_{\tau \in \mathcal{G} \setminus \tilde{\mathcal{G}}_q} \log(1 - p_\theta(\tau | z_\tau, q))$; Efficiency in Sampling - After computing z_τ , we can select triples τ from \mathcal{G} in parallel; Flexibility - Triple combinations can form arbitrary subgraphs; Adjustable Size - Subgraphs formed by top- K triples with different K values can accommodate various LLMs with diverse reasoning capabilities. In practice, \mathbb{Q}_θ can be further simplified given topic entities \mathcal{T}_q (He et al., 2021; Jiang et al., 2023b), by expecting subgraphs only close to the topic entities, i.e., $p_\theta(\tau | z_\tau, q) = 0$ for a τ that is far from \mathcal{T}_q .

Relevant Designs Previous approaches often adopt heuristics and focus on particular types of subgraphs, such as constrained subgraph search (e.g., searching for connected subgraphs (He et al., 2024)), constrained path search from topic entities (Zhang et al., 2022; Wu et al., 2023; Luo et al., 2024b; Sun et al., 2024a; Liu et al., 2024a; Mavromatis & Karypis, 2024; Sun et al., 2024b), and entity selection followed by extracting entity-induced subgraphs, where all triples involving an entity are included together (Yasunaga et al., 2021; Taunk et al., 2023). The loss in flexibility narrows the space of possible retrieved subgraphs, which eventually harms the effectiveness of the RAG.

Directional Distance Encoding (DDE) The latent variable $z_\tau(\mathcal{G}, q)$ models the relationship between a triple τ and the query q given \mathcal{G} . One idea is to employ graph neural networks (GNNs) to compute $z_\tau(\mathcal{G}, q)$ through message passing between entities/relations with attribute and question embeddings. Some previous works indeed adopt GNNs to get entity representations (Yasunaga et al., 2021; Kang et al., 2023; Mavromatis & Karypis, 2024; Liu et al., 2024a). However, GNNs are known to have limited representation power (Xu et al., 2019; Morris et al., 2019; Chen et al., 2020).

```

216 System: Based on the triples retrieved from a knowledge graph, please answer the question. Please return formatted answers as a list, each prefixed with "ans:".
217 User: Triples: (e1, r12, e2) \n (e3, r34, e4) \n ... \n Question: ... // ICL example
218 Assistant: To answer the question, we have to find ... From the triples we can see that ... Therefore, the answers are: \n ans: ... \n ans: ... \n ... // ICL example
219 User: Triples: (ea, rab, eb) \n (ec, rcd, ed) \n ... \n Question: ... // the evaluation question
220 Assistant: To answer the question, we have to find ... From the triples we can see that ... Therefore, the answers are: \n ans: ... \n ans: ... \n ... // the answer

```

Figure 2: The prompt used in SubgraphRAG. Concrete examples can be found in Appendix D).

The structural relationship between τ and q provides valuable information complementing to their semantic relationship. Inspired by the success of distance encoding and labeling trick in enhancing the structural representation power of GNNs (Li et al., 2020; Zhang et al., 2021), we propose a DDE as $z_\tau(\mathcal{G}, q)$ to model the structural relationship. Given topic entities \mathcal{T}_q , let $\mathbf{s}_e^{(0)}$ be a one-hot encoding representing $e \in \mathcal{T}_q$ or $e \notin \mathcal{T}_q$. For the $l + 1$ -th round, we perform feature propagation and compute $\mathbf{s}_e^{(l+1)} = \text{MEAN}\{\mathbf{s}_{e'}^{(l)} \mid (e', \cdot, e) \in \mathcal{G}\}$, and through the reverse direction to account the directed nature of \mathcal{G} , $\mathbf{s}_e^{(r, l+1)} = \text{MEAN}\{\mathbf{s}_{e'}^{(r, l)} \mid (e, \cdot, e') \in \mathcal{G}\}$, where $\mathbf{s}_e^{(r, 0)} = \mathbf{s}_e^{(0)}$. We concatenate the results across all rounds and both directions to obtain the final entity encodings $\mathbf{s}_e = [\mathbf{s}_e^{(0)} \parallel \mathbf{s}_e^{(1)} \parallel \dots \parallel \mathbf{s}_e^{(r, 1)} \parallel \dots]$, which leads to triple encodings as $z_\tau(\mathcal{G}, q) = [\mathbf{s}_h \parallel \mathbf{s}_t]$ that concatenates the head h 's and the tail t 's encodings. In section 4.1, we compare different approaches to compute $z_\tau(\mathcal{G}, q)$ - using GNNs, DDEs or only one-hot encodings of \mathcal{T}_q , and DDEs perform the best.

A Lightweight Implementation For $p_\theta(\cdot \mid z_\tau(\mathcal{G}, q), q)$ We present a lightweight implementation of p_θ that integrates structural and semantic information. Following previous approaches (Karpukhin et al., 2020; Gao et al., 2024b), we employ off-the-shelf pre-trained text encoders to embed all entities/relations in a KG based on their text attributes. These semantic text embeddings are computed and stored in a vector database during the pre-processing stage for efficient retrieval. For a newly arrived question q , we embed q to obtain z_q and retrieve embeddings z_h, z_r, z_t from the vector database for the involved entities and relation. After computing DDEs z_τ , an MLP is employed for binary classification using the concatenated input $[z_q \parallel z_h \parallel z_r \parallel z_t \parallel z_\tau]$.

Relevant Designs We considered several alternative design options but found them less suitable due to concerns regarding efficiency and adaptability to KG updates. Cross-encoders, which concatenate a question and a retrieval candidate for joint embedding (Wolf et al., 2019), potentially offer better retrieval performance. However, due to the inability to pre-compute embeddings, this approach significantly reduces retrieval efficiency when dealing with a large number of retrieval candidates, as is the case in triple retrieval. Li et al. (2023a) embeds each triple as a whole rather than individual entities and relations. However, this approach incurs higher computational and storage costs and exhibits reduced generalizability to the triples that are new combinations of entities and relations. Our lightweight implementation allows for rapid triple scoring while maintaining good generalization.

3.2 PROMPTING-BASED LLM REASONING

We employ an LLM to perform reasoning over \mathcal{G}_q by incorporating the linearized list of triples forming \mathcal{G}_q into the prompt. This approach allows the LLM to ground its reasoning in the retrieved structured knowledge and select the answers \hat{A}_q from the entities within \mathcal{G}_q , mitigating issues like hallucinations and outdated knowledge (Lin et al., 2019; Shuster et al., 2021; Vu et al., 2024). Specifically, we prompt the LLM to generate knowledge-grounded explanations besides the answers, which further effectively reduces hallucinations. We adopt in-context learning (ICL) (Brown et al., 2020) and design dedicated prompt templates with explanation demonstrations to guide LLMs (see Fig. 2).

Without fine-tuning LLMs, we reduce computational costs, enable the usage of SOTA black-box LLMs, and maintain the framework's generalizability for unseen KGs. Fine-tuning also risks enhancing prediction accuracy at the expense of general reasoning and explanatory capabilities. High-quality text-based explanations are typically unavailable for question-answering tasks in practice. As a result, previous KG-based RAG approaches that rely on fine-tuning often depend on larger, unfine-tuned LLMs like GPT-4 to generate explanations as additional training data (Luo et al., 2024b).

Regarding the size K of the retrieved subgraph, while increasing K in principle improves the coverage of relevant information, it also risks introducing more irrelevant information that may ultimately hurt LLM reasoning (Xu et al., 2024; Liu et al., 2024b). Different LLMs are inherently equipped with different sized context window and also exhibit distinct capabilities in reasoning over

Table 1: Evaluation results for retrieval recall and wall-clock time. Best results are in **bold**. Being training-free, cosine similarity and G-Retriever stay unchanged in generalization evaluations.

Model	WebQSP				CWQ				CWQ→WebQSP			WebQSP→CWQ		
	Triples		Entities		Triples		Entities		Triples		Entities	Triples		Entities
	Shortest Path	GPT-4o	Answer	Time (s)	Shortest Path	GPT-4o	Answer	Time (s)	Shortest Path	GPT-4o	Answer	Shortest Path	GPT-4o	Answer
cosine similarity	0.714	0.719	0.708	3	0.488	0.567	0.582	13	0.714	0.719	0.708	0.488	0.567	0.582
SR+NSM w E2E	0.487	0.504	0.707	101	-	-	-	-	-	-	-	-	-	-
Retrieve-Rewrite-Answer	0.058	0.062	0.740	69	-	-	-	-	-	-	-	-	-	-
RoG	0.713	0.388	0.807	948	0.623	0.298	0.841	2327	0.589	0.323	0.658	0.301	0.139	0.412
G-Retriever	0.294	0.325	0.545	672	0.183	0.217	0.375	1530	0.294	0.325	0.545	0.183	0.217	0.375
GNN-RAG	0.522	0.405	0.818	68	0.500	0.386	0.841	160	0.446	0.364	0.691	0.444	0.351	0.697
SubgraphRAG	0.883	0.865	0.944	6	0.811	0.840	0.914	12	0.794	0.776	0.887	0.622	0.623	0.773

Table 2: Breakdown of recall evaluation over # hops. Best results are in **bold**.

Model	Shortest Path Triple Recall					GPT-4o Triple Recall					Answer Entity Recall				
	WebQSP		CWQ			WebQSP		CWQ			WebQSP		CWQ		
	1	2	1	2	≥ 3	1	2	1	2	≥ 3	1	2	1	2	≥ 3
cosine similarity	0.874	0.405	0.629	0.442	0.333	0.847	0.483	0.629	0.511	0.464	0.943	0.253	0.903	0.472	0.289
SR+NSM w E2E	0.565	0.324	-	-	-	0.580	0.376	-	-	-	0.916	0.301	-	-	-
Retrieve-Rewrite-Answer	0.064	0.046	-	-	-	0.062	0.061	-	-	-	0.745	0.729	-	-	-
RoG	0.869	0.415	0.766	0.597	0.253	0.446	0.271	0.347	0.293	0.122	0.874	0.677	0.920	0.827	0.628
G-Retriever	0.335	0.216	0.134	0.205	0.168	0.345	0.284	0.159	0.240	0.226	0.596	0.446	0.377	0.384	0.269
GNN-RAG	0.532	0.502	0.515	0.498	0.446	0.384	0.445	0.328	0.408	0.418	0.810	0.831	0.853	0.841	0.787
MLP	0.828	0.687	0.651	0.690	0.534	0.811	0.781	0.635	0.707	0.616	0.933	0.874	0.932	0.870	0.793
MLP + topic entity	0.944	0.729	0.854	0.750	0.560	0.884	0.775	0.769	0.773	0.647	0.976	0.843	0.956	0.885	0.665
SubgraphRAG	0.953	0.748	0.831	0.820	0.626	0.908	0.809	0.823	0.860	0.755	0.977	0.881	0.946	0.916	0.741

long-context retrieval results (Dubey et al., 2024). As such, although the training of SubgraphRAG retriever is LLM-agnostic, the size K needs to be properly selected per LLM. In Section 4.2, we empirically verify that more powerful LLMs can benefit from incorporating a larger-sized retrieved subgraph, demonstrating the benefit of size-adjustable subgraph retrieval in SubgraphRAG.

Along with the introduction of components in SubgraphRAG, we have introduced the most relevant works. Other relevant works are reviewed in Appendix A due to the page limitation.

4 EXPERIMENTS

We design our empirical studies to examine the effectiveness and efficiency of SubgraphRAG in addressing the various challenges inherent to KG-based RAG, covering both retrieval and reasoning aspects. **Q1**) Overall, to meet the accuracy and low-latency requirements of KG-based RAG, does SubgraphRAG effectively and efficiently retrieve relevant information? **Q2**) For complex questions involving multi-hop reasoning and multiple topic entities, does SubgraphRAG properly integrate structural information for effective retrieval? **Q3**) How effectively does SubgraphRAG perform on KGQA tasks, and how is its accuracy influenced by different factors? **Q4**) To what extent can our pipeline provide effective knowledge-grounded explanations for question answering?

Datasets. We adopt two prominent and challenging KGQA benchmarks that necessitate multi-hop reasoning – WebQSP (Yih et al., 2016) and CWQ (Talmor & Berant, 2018). Both benchmarks utilize Freebase (Bollacker et al., 2008) as the underlying KG. To evaluate the capability of LLM reasoners in knowledge-grounded hallucination-free question answering, we introduce WebQSP-sub and CWQ-sub, where we remove samples whose answer entities are absent from the KG.

4.1 EVALUATION FOR RETRIEVAL (Q1 & Q2)

Baseline Retrievers. **Cosine similarity** performs structure-free triple retrieval based on triple embeddings (Li et al., 2023a). **SR+NSM w E2E** (Zhang et al., 2022) and **Retrieve-Rewrite-Answer** (Wu et al., 2023) propose constrained path search based on pre-trained text encoders. **RoG** (Luo et al., 2024b) adopts a similar strategy but fine-tunes an LLM for relational path prediction. **G-Retriever** (He et al., 2024) combines cosine similarity search with combinatorial optimization to construct a connected subgraph. **GNN-RAG** employs GNNs to predict answer entities and extracts shortest paths between them and topic entities (Mavromatis & Karypis, 2022; 2024).

Implementation Details. We employ gte-large-en-v1.5 (Li et al., 2023c) as pre-trained text encoder for both the cosine similarity baseline and SubgraphRAG, a 434M model that achieves a good balance between efficiency and English retrieval performance, as evidenced by the Massive Text Embedding Benchmark (MTEB) leaderboard (Muennighoff et al., 2023). For supervision signals, there are no ground-truth relevant subgraphs for a query q . Previous path-based subgraph retrievers adopt the shortest paths between the topic and answer entities for the weak supervision signals (Zhang

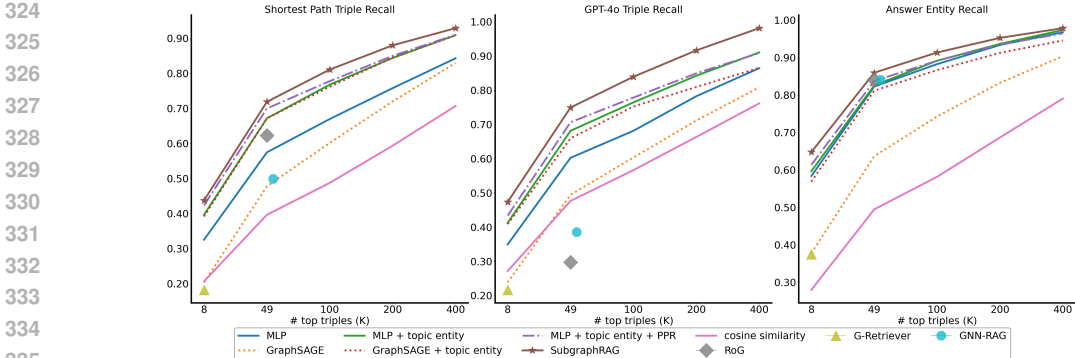


Figure 3: Retrieval effectiveness on CWQ across a spectrum of K values for top- K triple retrieval.

et al., 2022; Luo et al., 2024b). We also utilize these shortest paths as the heuristic relevant subgraphs $\tilde{\mathcal{G}}_q$ to train \mathbb{Q}_θ as in Eq. 2. To reduce the size of candidate triples \mathcal{G} , we construct subgraphs centered at topic entities \mathcal{T}_q , following previous works. See Appendix B.1 for more details.

Evaluation Metrics. Our retrieval evaluation covers both effectiveness and efficiency. For effectiveness, we employ three recall metrics, respectively for shortest path triples (i.e., $\tilde{\mathcal{G}}_q$), GPT-4o-identified relevant triples, and answer entities within retrieved subgraphs. The first metric assesses the ability of the approaches to retrieve the weak supervision signals for training. For more accurate assessment of relevant triple retrieval, we employ GPT-4o to identify ≤ 20 relevant triples for all test set samples, potentially capturing relevant triples beyond the shortest paths (see Appendix D for more details on labeling). We calculate individual recall values per question and average across all questions. For efficiency, we measure wall clock time on a 48GB NVIDIA RTX 6000 Ada GPU, reporting results in seconds. To focus on model computational efficiency, we exclude KG query times from our measurements. For text embedding computation, employed by SubgraphRAG variants and most baselines (cosine similarity, G-Retriever, and GNN-RAG), we only count the time for question embedding computation as the entity and relation embeddings for the entire KG can be pre-computed. Such pre-computation may yield a time-memory trade-off.

Overall Evaluation (Q1). Table 1 shows that SubgraphRAG consistently outperforms all other approaches in retrieval effectiveness. RoG achieves the most competitive baseline performance for retrieving shortest path triples. However, when evaluated on GPT-4o-labeled triples, RoG’s performance drops significantly (45.6% for WebQSP, 52.2% for CWQ), while SubgraphRAG remains robust (2.0% decrease for WebQSP, 3.6% increase for CWQ). This stark difference, despite using the same training signals, empirically validates that SubgraphRAG’s individual triple selection mechanism allows for more flexible and effective subgraph extraction compared to RoG’s constrained path search approach. Regarding **efficiency**, SubgraphRAG is only slightly slower than the cosine similarity baseline on WebQSP while being one to two orders of magnitude faster than other baselines, including GNN-RAG. For the cosine similarity baseline and SubgraphRAG, we report recall metrics based on the top-100 retrieved triples (2.3% of total candidate triples on average). This budget consistently yields robust reasoning performance across LLMs in subsequent experiments.

Generalizability. We further examine the generalizability of the retrievers by training them on dataset A and evaluating on dataset B , denoted as $A \rightarrow B$ in Table 1. Despite an anticipated performance degradation, SubgraphRAG consistently outperforms the alternative approaches.

Table 3: Question-answering performance on WebQSP and CWQ. Best results are in **bold**. By default, our reasoners use the top 100 retrieved triples. Results with 200 and 500 triples (indicated in parentheses) are also shown. Results with (\leftrightarrow) evaluate retriever generalizability, where the retriever is trained on one dataset and applied to the other.

	WebQSP		CWQ	
	Macro-F1	Hit	Macro-F1	Hit
UniKGQA	72.2	-	49.0	-
SR+NSM w E2E	64.1	-	46.3	-
KD-CoT	52.5	68.6	-	55.7
ToG (GPT-4)	-	82.6	-	67.6 ¹
StructGPT	-	74.69	-	-
Retrieve-Rewrite-Answer	-	79.36	-	-
G-Retriever	53.41	73.46	-	-
RoG-Joint	70.26	86.67	54.63	61.94
RoG-Sep	66.45	82.19	53.87	60.55
EID	-	82.5	-	62.0
GNN-RAG	71.3	85.7	59.4	66.8
SubgraphRAG + Llama3.1-8B	70.57	86.61	47.16	56.98
SubgraphRAG + Llama3.1-70B	74.70	86.24	51.78	57.89
SubgraphRAG + ChatGPT	69.21	83.11	49.13	56.27
SubgraphRAG + GPT4o-mini	77.45	90.11	54.13	62.02
SubgraphRAG + GPT4o	76.46	89.80	59.08	66.69
SubgraphRAG + GPT4o-mini (200)	77.82	90.54	54.69	63.49
SubgraphRAG + GPT4o (200)	78.24	90.91	59.42	67.49
SubgraphRAG + GPT4o-mini (500)	77.67	91.22	55.41	64.97
SubgraphRAG + Llama3.1-8B (\leftrightarrow)	66.42	83.42	37.96	48.57
SubgraphRAG + GPT4o-mini (\leftrightarrow)	73.81	88.08	44.69	54.21
SubgraphRAG + GPT4o-mini (\leftrightarrow , 500)	76.20	91.22	50.30	60.80
SubgraphRAG + GPT4o (\leftrightarrow)	74.27	87.10	47.55	54.89
SubgraphRAG + GPT4o (\leftrightarrow , 500)	77.12	89.68	55.14	62.98

Ablation Study for Design Options and Retrieval Size. To evaluate individual component contributions, we conduct an ablation study with several variants. **MLP** is a structure-free variant employing only text embeddings. We consider **GraphSAGE** (Hamilton et al., 2017), a popular GNN, to update entity representations prior to the triple scoring. We further augment both MLP and GraphSAGE with a one-hot-encoding topic entity indicator (**MLP + topic entity** and **GraphSAGE + topic entity**). Following Sun et al. (2018), we incorporate Personalized PageRank (PPR) (Haveliwala, 2002), seeded from the topic entities, to integrate structural information (**MLP + topic entity + PPR**). To account for both the varying capabilities of downstream LLMs and inference cost/latency constraints, we evaluate these variants across a broad spectrum of retrieval sizes (K).

Fig. 3 presents the results on CWQ, with the baselines’ performance and average number of triples retrieved included for reference. Larger retrieval sizes uniformly improve recall across all variants. Equipped with DDE, SubgraphRAG outperforms all baselines and other variants. This demonstrates that SubgraphRAG’s superiority is not solely attributable to larger retrieval sizes. Regarding design options, the topic entity indicator invariably leads to an improvement. In contrast, GNN variants often result in performance degradation compared to their MLP counterparts. We suspect that the diffusion of semantic information introduces noise in triple selection. Finally, PPR fails to reliably yield improvements. For the results on WebQSP, see Appendix B.3, which are also consistent.

Multi-Hop and Multi-Topic Questions (Q2). To evaluate the effectiveness of various approaches in capturing structural information for complex multi-hop and multi-topic questions, we group questions based on the number of hops and topic entities. Table 2 presents the performance breakdown by hop count. SubgraphRAG consistently outperforms other methods on WebQSP and achieves the best overall performance on CWQ. Notably, while the cosine similarity baseline and RoG demonstrate competitive performance for single-hop questions, their performance degrades significantly for multi-hop questions. Appendix B.4 provides a performance breakdown for single-topic and multi-topic questions, focusing exclusively on CWQ due to the predominance of single-topic questions in the WebQSP test set (98.3%). SubgraphRAG consistently exhibits superior performance across all metrics for both single-topic and multi-topic questions. Our comprehensive analysis highlights the remarkable effectiveness of DDE in capturing complex topic-centered structural information essential for challenging questions involving multi-hop reasoning and multiple topic entities.

4.2 KGQA RESULTS (Q3 & Q4)

KGQA Baselines. Besides the baselines in retrieval evaluation, we include more KGQA methods, including UniKGQA (Jiang et al., 2023b), KD-CoT (Wang et al., 2023a), StructGPT (Jiang et al., 2023a), ToG (Sun et al., 2024a), and EtD (Liu et al., 2024a). For RoG, we present two entries: RoG-Joint and RoG-Sep. Originally, RoG fine-tuned its LLMs on the training sets of both WebQSP and CWQ. Yet, this joint training approach leads to significant label leakage, with over 50% of WebQSP test questions (or their variants) appearing in CWQ’s training set, and vice versa. Therefore, we re-trained RoG on each dataset separately, indicated as RoG-Sep.

Evaluation Metrics. Along with the commonly reported Macro-F1 and Hit², we also include Micro-F1 to account for the imbalance in the number of ground-truth answers across samples and Hit@1 for a more inclusive evaluation. To further assess model performance, we introduce score_h, inspired by (Yang et al., 2024), which evaluates how truth-grounded the predicted answers are and the degree of hallucination. This metric penalizes hallucinated answers while favoring missing answers over incorrect ones. Scores are normalized to a range of 0 to 100, with higher scores indicating better truth-grounding in the model’s answers. The scoring strategy is described in detail in Appendix C.

Experiment Settings. We use the vllm (Kwon et al., 2023) framework for efficient LLM inference. For UniKGQA, KD-CoT, Retrieve-Rewrite-Answer, ToG, and EtD, we report their published results due to the difficulty in reproducing them. For StructGPT, we directly use their provided processed files to obtain results for WebQSP. For SR, we include their reported results for WebQSP and CWQ, and further evaluate it on WebQSP-sub as we could not run through SR’s code on the two CWQ datasets. For the remaining baselines, we successfully reproduced their results and evaluated them on additional metrics and datasets, including WebQSP-sub and CWQ-sub. However, we

¹Their Hit computation is different from other baselines, causing potential overestimation in performance.

²The baselines claim to report Hit@1, but they actually compute Hit, which measures whether at least one correct answer appears in the LLM response.

Table 4: Question-answering performance on WebQSP-sub and CWQ-sub. Best results are in **bold**. By default, our reasoners use the top 100 retrieved triples. Results with 200 and 500 triples (indicated in parentheses) are also shown. Results with (\leftrightarrow) evaluate retriever generalizability, where the retriever is trained on one dataset and applied to the other.

	WebQSP-sub					CWQ-sub				
	Macro-F1	Micro-F1	Hit	Hit@1	Score _h	Macro-F1	Micro-F1	Hit	Hit@1	Score _h
SR+NSM w E2E	58.79	37.04	68.63	60.62	64.44	-	-	-	-	-
G-Retriever	54.13	23.84	74.52	67.56	67.97	-	-	-	-	-
RoG-Joint	72.01	47.70	88.90	82.62	76.13	58.61	52.12	66.22	61.17	55.15
RoG-Sep	67.94	43.10	84.03	77.61	72.79	57.69	52.83	64.64	60.64	54.51
SubgraphRAG + Llama3.1-8B	72.10	46.56	88.58	84.80	82.42	54.76	51.76	65.80	59.69	62.89
SubgraphRAG + Llama3.1-70B	75.97	51.64	87.88	85.89	85.57	61.49	59.91	68.43	65.52	67.62
SubgraphRAG + ChatGPT	70.81	44.73	85.18	80.82	81.53	56.37	54.44	64.40	60.99	61.31
SubgraphRAG + GPT4o-mini	78.34	58.44	91.34	87.36	82.21	61.13	58.86	70.01	65.48	64.20
SubgraphRAG + GPT4o	77.61	56.78	91.40	86.40	81.85	65.99	63.18	73.91	68.89	66.57
SubgraphRAG + GPT4o-mini (200)	78.66	58.65	91.73	87.04	81.98	61.58	57.47	71.45	65.87	63.66
SubgraphRAG + GPT4o (200)	79.40	58.91	92.43	87.75	82.46	66.48	61.30	75.14	69.42	66.45
SubgraphRAG + GPT4o-mini (500)	78.46	57.08	92.43	88.01	81.95	62.18	56.86	72.82	66.57	62.77
SubgraphRAG + Llama3.1-8B (\leftrightarrow)	67.91	42.79	85.25	81.21	80.09	43.03	40.73	55.09	47.58	56.78
SubgraphRAG + GPT4o-mini (\leftrightarrow)	74.42	49.41	89.10	84.67	81.35	49.47	45.16	60.18	54.18	58.86
SubgraphRAG + GPT4o-mini (\leftrightarrow , 500)	76.83	52.01	92.30	87.43	81.41	55.58	49.13	67.24	59.69	59.87
SubgraphRAG + GPT4o (\leftrightarrow)	74.98	50.67	88.26	84.73	83.24	52.40	52.28	60.36	56.39	63.70
SubgraphRAG + GPT4o (\leftrightarrow , 500)	77.96	56.40	90.96	86.66	83.35	61.96	58.48	70.47	64.96	66.86

Table 5: Breakdown of QA performance by reasoning hops.

	WebQSP-sub				CWQ-sub					
	1		2		1		2		≥ 3	
	(65.8%)		(34.2%)		(28.0%)		(65.9%)		(6.1%)	
	Marco-F1	Hit	Marco-F1	Hit	Marco-F1	Hit	Marco-F1	Hit	Marco-F1	Hit
G-Retriever	56.41	78.20	45.73	65.35	-	-	-	-	-	-
RoG-Joint	77.05	92.96	62.53	81.54	59.75	66.33	59.70	68.56	41.46	43.27
RoG-Sep	74.50	89.83	55.62	73.45	59.35	66.20	59.45	67.17	31.33	33.33
SubgraphRAG (Llama3.1-8B)	75.50	91.40	65.87	83.62	51.54	63.05	57.52	68.93	41.88	47.37
SubgraphRAG (GPT4o-mini)	80.56	92.86	74.11	88.51	57.36	67.34	63.85	72.74	51.14	54.39

do not include results for G-Retriever on CWQ as it required over 200 hours of computation on 2 NVIDIA RTX 6000 Ada GPUs. If not specified, the LLM reasoners in SubgraphRAG use the top 100 retrieved triples; results using more triples are explicitly noted. All Llama models used are their instruction fine-tuned versions, i.e., Llama3.1-8B(70B)-Instruct. The used GPT models’ versions are gpt-3.5-turbo-1106, gpt-4o-mini-2024-07-18, and gpt-4o-2024-08-06. For all LLM reasoners used in SubgraphRAG, both the temperature and the seed are set to 0 to ensure reproducibility.


Overall Performance. Tables 3 and 4 present the evaluation results, where SubgraphRAG achieves state-of-the-art (SOTA) on both WebQSP and WebQSP-sub. Even with smaller 8B LLMs, our method surpasses previous SOTA approaches by $\leq 4\%$ in Macro-F1 and Hit metrics (excluding RoG-Joint due to test label leakage). With larger models like Llama3.1-70B-Instruct and GPT-4o, SubgraphRAG achieves greater performance, showing $\leq 12\%$ improvement in Macro-F1 and $\leq 9\%$ in Hit. On the more challenging CWQ and CWQ-sub datasets, which require extended reasoning hops, SubgraphRAG performs competitively even with smaller 8B models. When paired with advanced reasoning models like GPT-4o, SubgraphRAG achieves results second only to ToG on CWQ. Notably, SubgraphRAG requires only a single call to GPT-4o, whereas ToG requires 6-8 calls, which increases computational cost, and we were unable to reproduce ToG’s performance using their published code. On CWQ-sub, SubgraphRAG demonstrates gains of $\leq 9\%$ in Macro-F1 and $\leq 11\%$ in Hit, indicating that tasks with greater reasoning complexity benefit substantially from more powerful LLMs. Our method also excels in truth-grounded QA, with Score_h consistently outperforming baselines by $\leq 12\%$, driven by our prompt design that encourages retrieval-grounded reasoning.

Additionally, our framework generalizes well, with retrievers trained on one dataset performing effectively on others. Although moderate performance decay occurs due to domain shift, this can largely be mitigated by including more triples extracted by the retriever. Notably, the decay is generally minor on WebQSP and WebQSP-sub but more pronounced on CWQ and CWQ-sub, potentially due to greater label leakage from the WebQSP test set to the CWQ training set.

Detailed Performance Breakdown & Analysis. Table 5 presents the performance breakdown by reasoning hops. Our method, even with an 8B LLM, shows significantly better results on questions requiring multi-hop reasoning. This improvement can be attributed to our design philosophy, which does not restrict the form of the retrieved subgraphs and leverages unfine-tuned LLMs with ICL examples, fully unlocking their reasoning capabilities. Interestingly, SubgraphRAG shows relatively lower performance on some 1-hop questions in CWQ-sub. Cross-referencing with Table 8, which provides a detailed breakdown of whether the generated answers are truth-grounded, we find that

Table 6: Ablation studies with different retrievers, using the same prompt and Llama3.1-8B-Instruct as the reasoner. Rand refers to random triple sampling, RandNoAns removes triples with ground-truth answers after random sampling, and NoRetriever directly asks questions without KG info.

	WebQSP		CWQ		WebQSP-sub				CWQ-sub					
	Macro-F1	Hit	Macro-F1	Hit	Macro-F1	Micro-F1	Hit	Hit@1	Score _h	Macro-F1	Micro-F1	Hit	Hit@1	Score _h
Rand + SubgraphRAG Reasoner	37.69	60.14	27.34	35.85	37.79	17.79	60.74	54.97	65.06	29.97	29.15	39.15	35.11	52.45
RandNoAns + SubgraphRAG Reasoner	21.18	33.54	16.40	22.71	20.61	8.64	33.03	27.33	47.29	16.47	16.44	23.00	19.42	43.79
NoRetriever + SubgraphRAG Reasoner	35.86	51.90	25.64	32.34	35.03	17.01	51.38	47.59	55.57	27.42	22.66	33.95	30.65	44.87
cosine similarity + SubgraphRAG Reasoner	58.41	74.14	34.59	43.61	59.26	37.31	75.43	71.20	73.16	39.05	35.48	49.02	43.68	55.72
Retrieve-Rewrite-Answer + SubgraphRAG Reasoner	8.96	11.43	-	-	9.11	5.23	11.43	10.84	63.45	-	-	-	-	-
StructGPT + SubgraphRAG Reasoner	62.14	75.00	-	-	62.55	44.72	75.69	73.57	80.82	-	-	-	-	-
G-Retriever + SubgraphRAG Reasoner	48.91	64.50	28.47	34.58	49.92	28.08	65.88	62.60	72.54	31.55	32.22	38.17	35.22	58.22
RoG-Sep + SubgraphRAG Reasoner	57.68	74.39	36.85	45.23	59.36	40.32	76.65	72.61	79.69	44.11	43.69	54.04	47.68	66.18
GNN-RAG + SubgraphRAG Reasoner	62.34	78.81	46.40	54.35	63.93	42.43	80.89	77.10	82.86	55.08	53.38	64.33	59.76	67.55
GNN-RAG (+) + SubgraphRAG Reasoner	52.07	71.38	34.88	43.13	53.01	34.58	72.93	67.99	73.37	39.98	34.60	49.54	44.91	57.42
SubgraphRAG	70.57	86.61	47.16	56.98	72.10	46.56	88.58	84.80	82.42	54.76	51.76	65.80	59.69	62.89
SubgraphRAG (+)	66.42	83.42	37.96	48.57	67.91	42.79	85.25	81.21	80.09	43.03	40.73	55.09	47.58	56.78

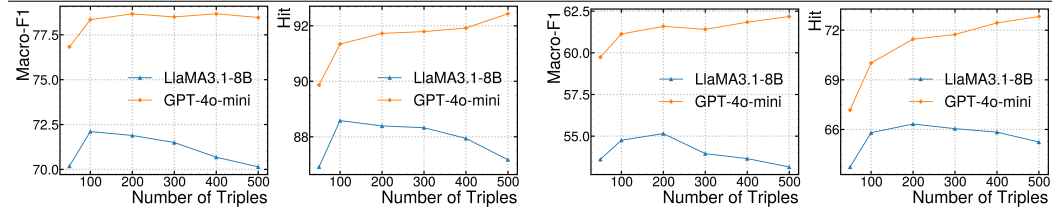

(a) WebQSP-sub

(b) CWQ-sub

Figure 4: Ablation studies on the number of retrieved triples used in LLM reasoners.

previous methods may generate many correct answers that are not actually supported by the retrieved results. Further investigation suggests this discrepancy may partly result from dataset leakage, giving tuning-based methods an advantage: In CWQ, over 60% of test samples have answers that have appeared in the training set, making it easier for these methods to succeed without robust reasoning. Thus, future studies are needed to fully investigate the potential leakage.

Performance with Different Retrievers. To assess the impact of our retriever on the overall performance, we conducted extensive studies by replacing the retrieval results with those from baseline retrievers, while keeping all other settings constant (same prompts, same LLM reasoners). Tables 6 and 9 show the results using Llama3.1 8B and GPT4o-mini as the LLM reasoners, respectively. For retrievers from Retrieve-Rewrite-Answer, StructGPT, G-Retriever, and RoG, we used all their retrieved triples, while for other cases, we kept 100 triples. Clearly, pairing with our retriever yields significantly better performance on all metrics and datasets compared to using baseline retrievers, indicating that our superior results are largely due to the effectiveness of our improved retriever.

Performance with Different # of Retrieved Triples. Irrelevant context can mislead LLMs (Wu et al., 2024), and retrieving more triples may not always improve performance. To investigate this, we conducted experiments (Fig. 4) by feeding Llama 3.1 8B and GPT-4o-mini different numbers of retrieved triples. The results show a significant performance decay in Llama 3.1 8B with more triples, while GPT-4o-mini performs even better with additional retrieved triples. This suggests that different LLMs have varying capacities for robust reasoning, and users should input proper numbers of retrieved results to match the capacity of the used LLM and the available computational budget.

Explainability. By retrieving flexible, high-quality evidence subgraphs as context and exploiting the strong reasoning capabilities of pre-trained LLMs, SubgraphRAG can natively provide effective explanations along with answer predictions. In contrast, explainable predictions with fine-tuned LLMs necessitate extra labeling efforts for preserving explainability (Luo et al., 2024b) or post hoc explainability approaches (Krishna et al., 2023). To illustrate the explainability of our framework, we provide multiple examples of our reasoner’s responses (see Appendix E).

5 CONCLUSION

We propose SubgraphRAG, a KG-based RAG framework that performs efficient and flexible subgraph retrieval followed by prompting unfine-tuned LLMs. SubgraphRAG demonstrates better or comparable accuracy, efficiency, and explainability compared to existing approaches.

REFERENCES

- 540
541
542 Kurt Bollacker, Colin Evans, Praveen Paritosh, Tim Sturge, and Jamie Taylor. Freebase: a collaboratively created graph database for structuring human knowledge. In *Proceedings of the 2008 ACM SIGMOD International Conference on Management of Data*, pp. 1247–1250, 2008.
- 543
544
545 Sebastian Borgeaud, Arthur Mensch, Jordan Hoffmann, Trevor Cai, Eliza Rutherford, Katie Milli-
546 can, George Bm Van Den Driessche, Jean-Baptiste Lespiau, Bogdan Damoc, Aidan Clark, Diego
547 De Las Casas, Aurelia Guy, Jacob Menick, Roman Ring, Tom Hennigan, Saffron Huang, Loren
548 Maggiore, Chris Jones, Albin Cassirer, Andy Brock, Michela Paganini, Geoffrey Irving, Oriol
549 Vinyals, Simon Osindero, Karen Simonyan, Jack Rae, Erich Elsen, and Laurent Sifre. Improving
550 language models by retrieving from trillions of tokens. In *Proceedings of the 39th International
551 Conference on Machine Learning*, pp. 2206–2240, 2022.
- 552
553 Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal,
554 Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel
555 Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler,
556 Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray,
557 Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever,
558 and Dario Amodei. Language models are few-shot learners. In *Advances in Neural Information
559 Processing Systems*, pp. 1877–1901, 2020.
- 560
561 Sébastien Bubeck, Varun Chandrasekaran, Ronen Eldan, Johannes Gehrke, Eric Horvitz, Ece
562 Kamar, Peter Lee, Yin Tat Lee, Yuanzhi Li, Scott Lundberg, Harsha Nori, Hamid Palangi,
563 Marco Tulio Ribeiro, and Yi Zhang. Sparks of artificial general intelligence: Early experiments
564 with gpt-4. *arXiv preprint arXiv:2303.12712*, 2023.
- 565
566 Michel Chein and Marie-Laure Mugnier. *Graph-based knowledge representation: computational
567 foundations of conceptual graphs*. Springer Science & Business Media, 2008.
- 568
569 Zhengdao Chen, Lei Chen, Soledad Villar, and Joan Bruna. Can graph neural networks count
570 substructures? In *Advances in Neural Information Processing Systems*, pp. 10383–10395, 2020.
- 571
572 Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep
573 bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of
574 the North American Chapter of the Association for Computational Linguistics: Human Language
575 Technologies, Volume 1 (Long and Short Papers)*, pp. 4171–4186, 2019.
- 576
577 Bhuwan Dhingra, Jeremy R. Cole, Julian Martin Eisenschlos, Daniel Gillick, Jacob Eisenstein, and
578 William W. Cohen. Time-aware language models as temporal knowledge bases. *Transactions of
579 the Association for Computational Linguistics*, 10:257–273, 2022.
- 580
581 Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha
582 Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, Anirudh Goyal, Anthony
583 Hartshorn, Aobo Yang, Archi Mitra, Archie Sravankumar, Artem Korenev, Arthur Hinsvark,
584 Arun Rao, Aston Zhang, Aurelien Rodriguez, Austen Gregerson, Ava Spataru, Baptiste Roziere,
585 Bethany Biron, Binh Tang, Bobbie Chern, Charlotte Caucheteux, Chaya Nayak, Chloe Bi, Chris
586 Marra, Chris McConnell, Christian Keller, Christophe Touret, Chunyang Wu, Corinne Wong,
587 Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Allonsius, Daniel Song, Danielle Pintz, Danny
588 Livshits, David Esiobu, Dhruv Choudhary, Dhruv Mahajan, Diego Garcia-Olano, Diego Perino,
589 Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy, Elina Lobanova, Emily Dinan, Eric Michael
590 Smith, Filip Radenovic, Frank Zhang, Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis Ander-
591 son, Graeme Nail, Gregoire Mialon, Guan Pang, Guillem Cucurell, Hailey Nguyen, Hannah
592 Korevaar, Hu Xu, Hugo Touvron, Iliyan Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Ishan
593 Misra, Ivan Evtimov, Jade Copet, Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park, Jay Ma-
hadeokar, Jeet Shah, Jelmer van der Linde, Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy
Fu, Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang, Jiecao Yu, Joanna Bitton, Joe Spisak,
Jongsoo Park, Joseph Rocca, Joshua Johnstun, Joshua Saxe, Junteng Jia, Kalyan Vasuden Al-
wala, Kartikeya Upasani, Kate Plawiak, Ke Li, Kenneth Heafield, Kevin Stone, Khalid El-Arini,
Krithika Iyer, Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Lauren Rantala-Yeary, Laurens van der
Maaten, Lawrence Chen, Liang Tan, Liz Jenkins, Louis Martin, Lovish Madaan, Lubo Malo,

594 Lukas Blecher, Lukas Landzaat, Luke de Oliveira, Madeline Muzzi, Mahesh Pasupuleti, Man-
 595 nat Singh, Manohar Paluri, Marcin Kardas, Mathew Oldham, Mathieu Rita, Maya Pavlova,
 596 Melanie Kambadur, Mike Lewis, Min Si, Mitesh Kumar Singh, Mona Hassan, Naman Goyal,
 597 Narjes Torabi, Nikolay Bashlykov, Nikolay Bogoychev, Niladri Chatterji, Olivier Duchenne, Onur
 598 Çelebi, Patrick Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vasic, Peter Weng, Prajjwal Bhar-
 599 gava, Pratik Dubal, Praveen Krishnan, Punit Singh Koura, Puxin Xu, Qing He, Qingxiao Dong,
 600 Ragavan Srinivasan, Raj Ganapathy, Ramon Calderer, Ricardo Silveira Cabral, Robert Stojnic,
 601 Roberta Raileanu, Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ronnie Polidoro, Roshan Sum-
 602 baly, Ross Taylor, Ruan Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sahana Chennabasappa,
 603 Sanjay Singh, Sean Bell, Seohyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Sharan Narang,
 604 Sharath Raparthy, Sheng Shen, Shengye Wan, Shruti Bhosale, Shun Zhang, Simon Vandenhende,
 605 Soumya Batra, Spencer Whitman, Sten Sootla, Stephane Collot, Suchin Gururangan, Sydney
 606 Borodinsky, Tamar Herman, Tara Fowler, Tarek Sheasha, Thomas Georgiou, Thomas Scialom,
 607 Tobias Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal Karn, Vedanuj Goswami, Vibhor Gupta,
 608 Vignesh Ramanathan, Viktor Kerkez, Vincent Gonguet, Virginie Do, Vish Vogeti, Vladan Petro-
 609 vic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whitney Meers, Xavier Martinet, Xiaodong Wang,
 610 Xiaoqing Ellen Tan, Xinfeng Xie, Xuchao Jia, Xuwei Wang, Yaelle Goldschlag, Yashesh Gaur,
 611 Yasmine Babaei, Yi Wen, Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao, Zacharie Delpierre
 612 Coudert, Zheng Yan, Zhengxing Chen, Zoe Papakipos, Aaditya Singh, Aaron Grattafiori, Abha
 613 Jain, Adam Kelsey, Adam Shajnfeld, Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand, Ajay
 614 Menon, Ajay Sharma, Alex Boesenberg, Alex Vaughan, Alexei Baevski, Allie Feinstein, Amanda
 615 Kallet, Amit Sangani, Anam Yunus, Andrei Lupu, Andres Alvarado, Andrew Caples, Andrew
 616 Gu, Andrew Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchandani, Annie Franco, Aparajita
 617 Saraf, Arkabandhu Chowdhury, Ashley Gabriel, Ashwin Bharambe, Assaf Eisenman, Azadeh
 618 Yazdan, Beau James, Ben Maurer, Benjamin Leonhardi, Bernie Huang, Beth Loyd, Beto De
 619 Paola, Bhargavi Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Hancock, Bram Wasti, Bran-
 620 don Spence, Brani Stojkovic, Brian Gamido, Britt Montalvo, Carl Parker, Carly Burton, Catalina
 621 Mejia, Changhan Wang, Changkyu Kim, Chao Zhou, Chester Hu, Ching-Hsiang Chu, Chris Cai,
 622 Chris Tindal, Christoph Feichtenhofer, Damon Civin, Dana Beaty, Daniel Kreymer, Daniel Li,
 623 Danny Wyatt, David Adkins, David Xu, Davide Testuggine, Delia David, Devi Parikh, Diana
 624 Liskovich, Didem Foss, Dingkang Wang, Duc Le, Dustin Holland, Edward Dowling, Eissa Jamil,
 625 Elaine Montgomery, Eleonora Presani, Emily Hahn, Emily Wood, Erik Brinkman, Esteban Ar-
 626 caute, Evan Dunbar, Evan Smothers, Fei Sun, Felix Kreuk, Feng Tian, Firat Ozgenel, Francesco
 627 Caggioni, Francisco Guzmán, Frank Kanayet, Frank Seide, Gabriela Medina Florez, Gabriella
 628 Schwarz, Gada Badeer, Georgia Swee, Gil Halpern, Govind Thattai, Grant Herman, Grigory
 629 Sizov, Guangyi, Zhang, Guna Lakshminarayanan, Hamid Shojanazeri, Han Zou, Hannah Wang,
 630 Hanwen Zha, Haroun Habeeb, Harrison Rudolph, Helen Suk, Henry Aspegren, Hunter Gold-
 631 man, Ibrahim Damlaj, Igor Molybog, Igor Tufanov, Irina-Elena Veliche, Itai Gat, Jake Weissman,
 632 James Geboski, James Kohli, Japhet Asher, Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jennifer
 633 Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe
 634 Cummings, Jon Carvill, Jon Shepard, Jonathan McPhie, Jonathan Torres, Josh Ginsburg, Junjie
 635 Wang, Kai Wu, Kam Hou U, Karan Saxena, Karthik Prasad, Kartikay Khandelwal, Katayoun
 636 Zand, Kathy Matosich, Kaushik Veeraraghavan, Kelly Michelena, Keqian Li, Kun Huang, Kunal
 637 Chawla, Kushal Lakhotia, Kyle Huang, Lailin Chen, Lakshya Garg, Lavender A, Leandro Silva,
 638 Lee Bell, Lei Zhang, Liangpeng Guo, Licheng Yu, Liron Moshkovich, Luca Wehrstedt, Madian
 639 Khabsa, Manav Avalani, Manish Bhatt, Maria Tsimpoukelli, Martynas Mankus, Matan Hasson,
 640 Matthew Lennie, Matthias Reso, Maxim Groshev, Maxim Naumov, Maya Lathi, Meghan Ke-
 641 neally, Michael L. Seltzer, Michal Valko, Michelle Restrepo, Mihir Patel, Mik Vyatskov, Mikayel
 642 Samvelyan, Mike Clark, Mike Macey, Mike Wang, Miquel Jubert Hermoso, Mo Metanat, Mo-
 643 hammad Rastegari, Munish Bansal, Nandhini Santhanam, Natascha Parks, Natasha White, Navy-
 644 ata Bawa, Nayan Singhal, Nick Egebo, Nicolas Usunier, Nikolay Pavlovich Laptev, Ning Dong,
 645 Ning Zhang, Norman Cheng, Oleg Chernoguz, Olivia Hart, Omkar Salpekar, Ozlem Kalinli,
 646 Parkin Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pedro Rittner, Philip Bontrager, Pierre Roux,
 647 Piotr Dollár, Polina Zvyagina, Prashant Ratanchandani, Pritish Yuvraj, Qian Liang, Rachad Alao,
 Rachel Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu Nayani, Rahul Mitra, Raymond Li,
 Rebekkah Hogan, Robin Battey, Rocky Wang, Rohan Maheswari, Russ Howes, Ruty Rinott,
 Sai Jayesh Bondu, Samyak Datta, Sara Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov, Sa-
 tadru Pan, Saurabh Verma, Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lindsay, Shaun Lind-
 say, Sheng Feng, Shenghao Lin, Shengxin Cindy Zha, Shiva Shankar, Shuqiang Zhang, Shuqiang

- 648 Zhang, Sinong Wang, Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala, Stephanie Max, Stephen
649 Chen, Steve Kehoe, Steve Satterfield, Sudarshan Govindaprasad, Sumit Gupta, Sungmin Cho,
650 Sunny Virk, Suraj Subramanian, Sy Choudhury, Sydney Goldman, Tal Remez, Tamar Glaser,
651 Tamara Best, Thilo Kohler, Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim Matthews, Tim-
652 othy Chou, Tzook Shaked, Varun Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai Mohan,
653 Vinay Satish Kumar, Vishal Mangla, Vitor Albiero, Vlad Ionescu, Vlad Poenaru, Vlad Tiberiu
654 Mihailescu, Vladimir Ivanov, Wei Li, Wenchen Wang, Wenwen Jiang, Wes Bouaziz, Will Con-
655 stable, Xiaocheng Tang, Xiaofang Wang, Xiaojian Wu, Xiaolan Wang, Xide Xia, Xilun Wu,
656 Xinbo Gao, Yanjun Chen, Ye Hu, Ye Jia, Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi,
657 Youngjin Nam, Yu, Wang, Yuchen Hao, Yundi Qian, Yuze He, Zach Rait, Zachary DeVito, Zef
658 Rosnbrick, Zhaoduo Wen, Zhenyu Yang, and Zhiwei Zhao. The llama 3 herd of models. *arXiv
659 preprint arXiv:2407.21783*, 2024.
- 660 Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt,
661 and Jonathan Larson. From local to global: A graph rag approach to query-focused summariza-
662 tion. *arXiv preprint arXiv:2404.16130*, 2024.
- 663 Matthias Fey and Jan E. Lenssen. Fast graph representation learning with PyTorch Geometric. In
664 *ICLR Workshop on Representation Learning on Graphs and Manifolds*, 2019.
- 665 Yifu Gao, Linbo Qiao, Zhigang Kan, Zhihua Wen, Yongquan He, and Dongsheng Li. Two-stage
666 generative question answering on temporal knowledge graph using large language models. *arXiv
667 preprint arXiv:2402.16568*, 2024a.
- 668 Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yi Dai, Jiawei Sun, Meng
669 Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A survey.
670 *arXiv preprint arXiv:2312.10997*, 2024b.
- 671 Tiezhen Guo, Qingwen Yang, Chen Wang, Yanyi Liu, Pan Li, Jiawei Tang, Dapeng Li, and Yingyou
672 Wen. Knowledgenavigator: Leveraging large language models for enhanced reasoning over
673 knowledge graph. *Complex & Intelligent Systems*, pp. 1–14, 2024.
- 674 Aric A. Hagberg, Daniel A. Schult, and Pieter J. Swart. Exploring network structure, dynamics, and
675 function using networkx. In *Proceedings of the 7th Python in Science Conference*, pp. 11–15,
676 2008.
- 677 Will Hamilton, Zhitao Ying, and Jure Leskovec. Inductive representation learning on large graphs.
678 In *Advances in Neural Information Processing Systems*, 2017.
- 679 Taher H. Haveliwala. Topic-sensitive pagerank. In *Proceedings of the 11th International Conference
680 on World Wide Web*, pp. 517–526, 2002.
- 681 Gaole He, Yunshi Lan, Jing Jiang, Wayne Xin Zhao, and Ji-Rong Wen. Improving multi-hop knowl-
682 edge base question answering by learning intermediate supervision signals. In *Proceedings of the
683 14th ACM international conference on web search and data mining*, pp. 553–561, 2021.
- 684 Xiaoxin He, Yijun Tian, Yifei Sun, Nitesh V Chawla, Thomas Laurent, Yann LeCun, Xavier Bres-
685 son, and Bryan Hooi. G-retriever: Retrieval-augmented generation for textual graph understand-
686 ing and question answering. *arXiv preprint arXiv:2402.07630*, 2024.
- 687 Yuntong Hu, Zhihan Lei, Zheng Zhang, Bo Pan, Chen Ling, and Liang Zhao. Grag: Graph retrieval-
688 augmented generation. *arXiv preprint arXiv:2405.16506*, 2024.
- 689 Jie Huang and Kevin Chen-Chuan Chang. Towards reasoning in large language models: A survey.
690 In *Findings of the Association for Computational Linguistics: ACL 2023*, pp. 1049–1065, 2023.
- 691 Lei Huang, Weijiang Yu, Weitao Ma, Weihong Zhong, Zhangyin Feng, Haotian Wang, Qianglong
692 Chen, Weihua Peng, Xiaocheng Feng, Bing Qin, and Ting Liu. A survey on hallucination in
693 large language models: Principles, taxonomy, challenges, and open questions. *arXiv preprint
694 arXiv:2311.05232*, 2023.

- 702 Piotr Indyk and Rajeev Motwani. Approximate nearest neighbors: towards removing the curse of
703 dimensionality. In *Proceedings of the Thirtieth Annual ACM Symposium on Theory of Comput-*
704 *ing*, STOC '98, pp. 604–613, New York, NY, USA, 1998. Association for Computing Machin-
705 ery. ISBN 0897919629. doi: 10.1145/276698.276876. URL [https://doi.org/10.1145/](https://doi.org/10.1145/276698.276876)
706 [276698.276876](https://doi.org/10.1145/276698.276876).
- 707 Ziwei Ji, Nayeon Lee, Rita Frieske, Tiezheng Yu, Dan Su, Yan Xu, Etsuko Ishii, Ye Jin Bang,
708 Andrea Madotto, and Pascale Fung. Survey of hallucination in natural language generation. *ACM*
709 *Computing Surveys*, 55(12), 2023.
- 710 Jinhao Jiang, Kun Zhou, Zican Dong, Keming Ye, Wayne Xin Zhao, and Ji-Rong Wen. Structgpt: A
711 general framework for large language model to reason over structured data. In *Proceedings of the*
712 *2023 Conference on Empirical Methods in Natural Language Processing*, pp. 9237–9251, 2023a.
- 713 Jinhao Jiang, Kun Zhou, Xin Zhao, and Ji-Rong Wen. UniKGQA: Unified retrieval and reasoning
714 for solving multi-hop question answering over knowledge graph. In *International Conference on*
715 *Learning Representations*, 2023b.
- 716 Jinhao Jiang, Kun Zhou, Wayne Xin Zhao, Yang Song, Chen Zhu, Hengshu Zhu, and Ji-Rong
717 Wen. Kg-agent: An efficient autonomous agent framework for complex reasoning over knowl-
718 edge graph. *arXiv preprint arXiv:2402.11163*, 2024.
- 719 Bowen Jin, Chulin Xie, Jiawei Zhang, Kashob Kumar Roy, Yu Zhang, Suhang Wang, Yu Meng, and
720 Jiawei Han. Graph chain-of-thought: Augmenting large language models by reasoning on graphs.
721 *arXiv preprint arXiv:2404.07103*, 2024.
- 722 Minki Kang, Jin Myung Kwak, Jinheon Baek, and Sung Ju Hwang. Knowledge graph-augmented
723 language models for knowledge-grounded dialogue generation. *arXiv preprint arXiv:2305.18846*,
724 2023.
- 725 Vladimir Karpukhin, Barlas Oguz, Sewon Min, Patrick Lewis, Ledell Wu, Sergey Edunov, Danqi
726 Chen, and Wen-tau Yih. Dense passage retrieval for open-domain question answering. In
727 *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing*
728 *(EMNLP)*, pp. 6769–6781, 2020.
- 729 Jungo Kasai, Keisuke Sakaguchi, yoichi takahashi, Ronan Le Bras, Akari Asai, Xinyan Velocity Yu,
730 Dragomir Radev, Noah A. Smith, Yejin Choi, and Kentaro Inui. Realtime QA: What’s the answer
731 right now? In *Thirty-seventh Conference on Neural Information Processing Systems Datasets*
732 *and Benchmarks Track*, 2023.
- 733 Jiho Kim, Yeonsu Kwon, Yohan Jo, and Edward Choi. Kg-gpt: A general framework for reason-
734 ing on knowledge graphs using large language models. In *The 2023 Conference on Empirical*
735 *Methods in Natural Language Processing*.
- 736 Thomas N Kipf and Max Welling. Variational graph auto-encoders. *arXiv preprint*
737 *arXiv:1611.07308*, 2016.
- 738 Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large
739 language models are zero-shot reasoners. In *Advances in Neural Information Processing Systems*,
740 2022.
- 741 Satyapriya Krishna, Jiaqi Ma, Dylan Z Slack, Asma Ghandeharioun, Sameer Singh, and Himabindu
742 Lakkaraju. Post hoc explanations of language models can improve language models. In *Advances*
743 *in Neural Information Processing Systems*, 2023.
- 744 Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E.
745 Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model
746 serving with pagedattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating*
747 *Systems Principles*, 2023.
- 748 Benjamin Lefaudeux, Francisco Massa, Diana Liskovich, Wenhan Xiong, Vittorio Caggiano, Sean
749 Naren, Min Xu, Jieru Hu, Marta Tintore, Susan Zhang, Patrick Labatut, Daniel Haziza, Luca
750 Wehrstedt, Jeremy Reizenstein, and Grigory Sizov. xformers: A modular and hackable trans-
751 former modelling library. <https://github.com/facebookresearch/xformers>,
752 2022.

- 756 Pan Li, Yanbang Wang, Hongwei Wang, and Jure Leskovec. Distance encoding: Design provably
757 more powerful neural networks for graph representation learning. *Advances in Neural Information*
758 *Processing Systems*, 33, 2020.
- 759 Shiyang Li, Yifan Gao, Haoming Jiang, Qingyu Yin, Zheng Li, Xifeng Yan, Chao Zhang, and Bing
760 Yin. Graph reasoning for question answering with triplet retrieval. In *Findings of the Association*
761 *for Computational Linguistics: ACL 2023*, pp. 3366–3375, 2023a.
- 762 Xianzhi Li, Samuel Chan, Xiaodan Zhu, Yulong Pei, Zhiqiang Ma, Xiaomo Liu, and Sameena Shah.
763 Are ChatGPT and GPT-4 general-purpose solvers for financial text analytics? a study on several
764 typical tasks. In *Proceedings of the 2023 Conference on Empirical Methods in Natural Language*
765 *Processing: Industry Track*, pp. 408–422, 2023b.
- 766 Zehan Li, Xin Zhang, Yanzhao Zhang, Dingkun Long, Pengjun Xie, and Meishan Zhang. Towards
767 general text embeddings with multi-stage contrastive learning. *arXiv preprint arXiv:2308.03281*,
768 2023c.
- 769 Zijian Li, Qingyan Guo, Jiawei Shao, Lei Song, Jiang Bian, Jun Zhang, and Rui Wang. Graph neural
770 network enhanced retrieval for question answering of llms. *arXiv preprint arXiv:2406.06572*,
771 2024.
- 772 Ke Liang, Lingyuan Meng, Meng Liu, Yue Liu, Wenxuan Tu, Siwei Wang, Sihang Zhou, Xinwang
773 Liu, Fuchun Sun, and Kunlun He. A survey of knowledge graph reasoning on graph types: Static,
774 dynamic, and multi-modal. *IEEE Transactions on Pattern Analysis and Machine Intelligence*,
775 2024.
- 776 Bill Yuchen Lin, Xinyue Chen, Jamin Chen, and Xiang Ren. Kagnet: Knowledge-aware graph
777 networks for commonsense reasoning. In *Proceedings of the 2019 Conference on Empirical*
778 *Methods in Natural Language Processing and the 9th International Joint Conference on Natural*
779 *Language Processing (EMNLP-IJCNLP)*, pp. 2829–2839, 2019.
- 780 Guangyi Liu, Yongqi Zhang, Yong Li, and Quanming Yao. Explore then determine: A gnn-llm syn-
781 ergy framework for reasoning over knowledge graph. *arXiv preprint arXiv:2406.01145*, 2024a.
- 782 Nelson F. Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni, and
783 Percy Liang. Lost in the middle: How language models use long contexts. *Transactions of the*
784 *Association for Computational Linguistics*, 12:157–173, 2024b.
- 785 Haoran Luo, Haihong E, Zichen Tang, Shiyao Peng, Yikai Guo, Wentai Zhang, Chenghao Ma,
786 Guanting Dong, Meina Song, Wei Lin, Yifan Zhu, and Anh Tuan Luu. ChatKBQA: A generate-
787 then-retrieve framework for knowledge base question answering with fine-tuned large language
788 models. In *Findings of the Association for Computational Linguistics: ACL 2024*, pp. 2039–2056,
789 2024a.
- 790 Linhao Luo, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. Reasoning on graphs: Faithful and
791 interpretable large language model reasoning. In *International Conference on Learning Repre-*
792 *sentations*, 2024b.
- 793 Shengjie Ma, Chengjin Xu, Xuhui Jiang, Muzhi Li, Huaren Qu, and Jian Guo. Think-on-graph 2.0:
794 Deep and interpretable large language model reasoning with knowledge graph-guided retrieval.
795 *arXiv preprint arXiv:2407.10805*, 2024.
- 796 Costas Mavromatis and George Karypis. ReaRev: Adaptive reasoning for question answering over
797 knowledge graphs. In *Findings of the Association for Computational Linguistics: EMNLP 2022*,
798 pp. 2447–2458, 2022.
- 799 Costas Mavromatis and George Karypis. Gnn-rag: Graph neural retrieval for large language model
800 reasoning. *arXiv preprint arXiv:2405.20139*, 2024.
- 801 Christopher Morris, Martin Ritzert, Matthias Fey, William L. Hamilton, Jan Eric Lenssen, Gaurav
802 Rattan, and Martin Grohe. Weisfeiler and leman go neural: higher-order graph neural networks.
803 In *Proceedings of the Thirty-Third AAAI Conference on Artificial Intelligence and Thirty-First*
804 *Innovative Applications of Artificial Intelligence Conference and Ninth AAAI Symposium on Ed-*
805 *ucational Advances in Artificial Intelligence*, 2019.

- 810 Niklas Muennighoff, Nouamane Tazi, Loic Magne, and Nils Reimers. MTEB: Massive text em-
811 bedding benchmark. In *Proceedings of the 17th Conference of the European Chapter of the*
812 *Association for Computational Linguistics*, pp. 2014–2037, 2023.
- 813
- 814 Shirui Pan, Linhao Luo, Yufei Wang, Chen Chen, Jiapu Wang, and Xindong Wu. Unifying large
815 language models and knowledge graphs: A roadmap. *IEEE Transactions on Knowledge and Data*
816 *Engineering*, 36(7):3580–3599, 2024.
- 817 Adam Paszke, Sam Gross, Francisco Massa, Adam Lerer, James Bradbury, Gregory Chanan, Trevor
818 Killeen, Zeming Lin, Natalia Gimelshein, Luca Antiga, Alban Desmaison, Andreas Kopf, Edward
819 Yang, Zachary DeVito, Martin Raison, Alykhan Tejani, Sasank Chilamkurthy, Benoit Steiner,
820 Lu Fang, Junjie Bai, and Soumith Chintala. Pytorch: An imperative style, high-performance deep
821 learning library. In *Advances in Neural Information Processing Systems*, pp. 8024–8035, 2019.
- 822
- 823 Boci Peng, Yun Zhu, Yongchao Liu, Xiaohe Bo, Haizhou Shi, Chuntao Hong, Yan Zhang, and
824 Siliang Tang. Graph retrieval-augmented generation: A survey. *arXiv preprint arXiv:2408.08921*,
825 2024.
- 826 Stephen Robertson and Hugo Zaragoza. The probabilistic relevance framework: Bm25 and beyond.
827 *Found. Trends Inf. Retr.*, 3(4):333–389, 2009.
- 828
- 829 Stephen E. Robertson, Steve Walker, Susan Jones, Micheline Hancock-Beaulieu, and Mike Gatford.
830 Okapi at trec-3. In *TREC*, volume 500-225 of *NIST Special Publication*, pp. 109–126, 1994.
- 831
- 832 Ian Robinson, Jim Webber, and Emil Eifrem. *Graph databases: new opportunities for connected*
833 *data.* ” O’Reilly Media, Inc.”, 2015.
- 834 Kurt Shuster, Spencer Poff, Moya Chen, Douwe Kiela, and Jason Weston. Retrieval augmentation
835 reduces hallucination in conversation. In *Findings of the Association for Computational Linguis-*
836 *tics: EMNLP 2021*, pp. 3784–3803, 2021.
- 837
- 838 Haitian Sun, Bhuwan Dhingra, Manzil Zaheer, Kathryn Mazaitis, Ruslan Salakhutdinov, and
839 William Cohen. Open domain question answering using early fusion of knowledge bases and
840 text. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Pro-*
841 *cessing*, pp. 4231–4242, 2018.
- 842 Haitian Sun, Tania Bedrax-Weiss, and William Cohen. Pullnet: Open domain question answering
843 with iterative retrieval on knowledge bases and text. In *Proceedings of the 2019 Conference on*
844 *Empirical Methods in Natural Language Processing and the 9th International Joint Conference*
845 *on Natural Language Processing (EMNLP-IJCNLP)*, pp. 2380–2390, 2019.
- 846
- 847 Jiashuo Sun, Chengjin Xu, Luminyuan Tang, Saizhuo Wang, Chen Lin, Yeyun Gong, Lionel Ni,
848 Heung-Yeung Shum, and Jian Guo. Think-on-graph: Deep and responsible reasoning of large
849 language model on knowledge graph. In *International Conference on Learning Representations*,
850 2024a.
- 851 Lei Sun, Zhengwei Tao, Youdi Li, and Hiroshi Arakawa. Oda: Observation-driven agent for inte-
852 grating llms and knowledge graphs. *arXiv preprint arXiv:2404.07677*, 2024b.
- 853
- 854 Alon Talmor and Jonathan Berant. The web as a knowledge-base for answering complex questions.
855 In *Proceedings of the 2018 Conference of the North American Chapter of the Association for*
856 *Computational Linguistics: Human Language Technologies, Volume 1 (Long Papers)*, pp. 641–
857 651, 2018.
- 858 Dhaval Taunk, Lakshya Khanna, Siri Venkata Pavan Kumar Kandru, Vasudeva Varma, Charu
859 Sharma, and Makarand Tapaswi. Grapeqa: Graph augmentation and pruning to enhance question-
860 answering. In *Companion Proceedings of the ACM Web Conference 2023*, pp. 1138–1144, 2023.
- 861
- 862 Rakshit Trivedi, Hanjun Dai, Yichen Wang, and Le Song. Know-evolve: Deep temporal reasoning
863 for dynamic knowledge graphs. In *international conference on machine learning*, pp. 3462–3471.
PMLR, 2017.

- 864 Tu Vu, Mohit Iyyer, Xuezhi Wang, Noah Constant, Jerry Wei, Jason Wei, Chris Tar, Yun-Hsuan
865 Sung, Denny Zhou, Quoc Le, and Thang Luong. FreshLLMs: Refreshing large language models
866 with search engine augmentation. In *Findings of the Association for Computational Linguistics*
867 *ACL 2024*, pp. 13697–13720, 2024.
- 868
869 Keheng Wang, Feiyu Duan, Sirui Wang, Peiguang Li, Yunsen Xian, Chuantao Yin, Wenge Rong,
870 and Zhang Xiong. Knowledge-driven cot: Exploring faithful reasoning in llms for knowledge-
871 intensive question answering. *arXiv preprint arXiv:2308.13259*, 2023a.
- 872
873 Xintao Wang, Qianwen Yang, Yongting Qiu, Jiaqing Liang, Qianyu He, Zhouhong Gu, Yanghua
874 Xiao, and Wei Wang. Knowledgept: Enhancing large language models with retrieval and storage
875 access on knowledge bases. *arXiv preprint arXiv:2308.11761*, 2023b.
- 876
877 Yu Wang, Nedim Lipka, Ryan A Rossi, Alexa Siu, Ruiyi Zhang, and Tyler Derr. Knowledge graph
878 prompting for multi-document question answering. In *Proceedings of the AAAI Conference on*
Artificial Intelligence, volume 38, pp. 19206–19214, 2024.
- 879
880 Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, brian ichter, Fei Xia, Ed H. Chi,
881 Quoc V Le, and Denny Zhou. Chain of thought prompting elicits reasoning in large language
882 models. In *Advances in Neural Information Processing Systems*, 2022.
- 883
884 Yilin Wen, Zifeng Wang, and Jimeng Sun. Mindmap: Knowledge graph prompting sparks graph of
885 thoughts in large language models. *arXiv preprint arXiv:2308.09729*, 2023.
- 886
887 Thomas Wolf, Victor Sanh, Julien Chaumond, and Clement Delangue. Transfertransfo: A
888 transfer learning approach for neural network based conversational agents. *arXiv preprint*
arXiv:1901.08149, 2019.
- 889
890 Thomas Wolf, Lysandre Debut, Victor Sanh, Julien Chaumond, Clement Delangue, Anthony Moi,
891 Pierric Cistac, Tim Rault, Remi Louf, Morgan Funtowicz, Joe Davison, Sam Shleifer, Patrick
892 von Platen, Clara Ma, Yacine Jernite, Julien Plu, Canwen Xu, Teven Le Scao, Sylvain Gugger,
893 Mariama Drame, Quentin Lhoest, and Alexander Rush. Transformers: State-of-the-art natural
894 language processing. In *Proceedings of the 2020 Conference on Empirical Methods in Natural*
Language Processing: System Demonstrations, pp. 38–45, 2020.
- 895
896 Siye Wu, Jian Xie, Jiangjie Chen, Tinghui Zhu, Kai Zhang, and Yanghua Xiao. How easily do
897 irrelevant inputs skew the responses of large language models? *arXiv preprint arXiv:2404.03302*,
2024.
- 898
899 Yike Wu, Nan Hu, Guilin Qi, Sheng Bi, Jie Ren, Anhuan Xie, and Wei Song. Retrieve-rewrite-
900 answer: A kg-to-text enhanced llms framework for knowledge graph question answering. *arXiv*
preprint arXiv:2309.11206, 2023.
- 901
902 Guanming Xiong, Junwei Bao, and Wen Zhao. Interactive-KBQA: Multi-turn interactions for
903 knowledge base question answering with large language models. In *Proceedings of the 62nd*
Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers), pp.
904 10561–10582, 2024.
- 905
906 Keyulu Xu, Weihua Hu, Jure Leskovec, and Stefanie Jegelka. How powerful are graph neural
907 networks? In *International Conference on Learning Representations*, 2019.
- 908
909 Peng Xu, Wei Ping, Xianchao Wu, Lawrence McAfee, Chen Zhu, Zihan Liu, Sandeep Subramanian,
910 Evelina Bakhturina, Mohammad Shoeybi, and Bryan Catanzaro. Retrieval meets long context
911 large language models. In *International Conference on Learning Representations*, 2024.
- 912
913 Xiao Yang, Kai Sun, Hao Xin, Yushi Sun, Nikita Bhalla, Xiangsen Chen, Sajal Choudhary,
914 Rongze Daniel Gui, Ziran Will Jiang, Ziyu Jiang, et al. Crag-comprehensive rag benchmark.
915 *arXiv preprint arXiv:2406.04744*, 2024.
- 916
917 Shunyu Yao, Dian Yu, Jeffrey Zhao, Izhak Shafran, Thomas L. Griffiths, Yuan Cao, and Karthik R
Narasimhan. Tree of thoughts: Deliberate problem solving with large language models. In *Ad-*
vances in Neural Information Processing Systems, 2023.

918 Michihiro Yasunaga, Hongyu Ren, Antoine Bosselut, Percy Liang, and Jure Leskovec. Qa-gnn:
919 Reasoning with language models and knowledge graphs for question answering. In *North Amer-*
920 *ican Chapter of the Association for Computational Linguistics (NAACL)*, 2021.
921

922 Wen-tau Yih, Matthew Richardson, Chris Meek, Ming-Wei Chang, and Jina Suh. The value of
923 semantic parse labeling for knowledge base question answering. In *Proceedings of the 54th*
924 *Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp.
925 201–206, 2016.

926 Jing Zhang, Xiaokang Zhang, Jifan Yu, Jian Tang, Jie Tang, Cuiping Li, and Hong Chen. Subgraph
927 retrieval enhanced model for multi-hop knowledge base question answering. In *Proceedings of the*
928 *60th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*,
929 pp. 5773–5784, 2022.

930 Muhan Zhang, Pan Li, Yinglong Xia, Kai Wang, and Long Jin. Labeling trick: A theory of using
931 graph neural networks for multi-node representation learning. *Advances in Neural Information*
932 *Processing Systems*, 34:9061–9073, 2021.
933

934 Yue Zhang, Yafu Li, Leyang Cui, Deng Cai, Lemao Liu, Tingchen Fu, Xinting Huang, Enbo Zhao,
935 Yu Zhang, Yulong Chen, Longyue Wang, Anh Tuan Luu, Wei Bi, Freda Shi, and Shuming Shi.
936 Siren’s song in the ai ocean: A survey on hallucination in large language models. *arXiv preprint*
937 *arXiv:2309.01219*, 2023.
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971

A ADDITIONAL RELATED WORK

The field of KGQA has evolved significantly over time. Early approaches to KGQA do not rely on LLMs for answer generation (Yasunaga et al., 2021; Taunk et al., 2023; Zhang et al., 2022; Lin et al., 2019; Sun et al., 2019), though they often employ pre-trained language models (PLMs) like BERT as text encoders (Devlin et al., 2019). These methods typically search for answer entities with GNNs Yasunaga et al. (2021); Taunk et al. (2023); Lin et al. (2019) or LSTM-based models Sun et al. (2019); Zhang et al. (2022).

With the rapid advancement of LLMs in recent years, researchers began to leverage them in KGQA. For instance, recent work has explored using LLMs as translators, converting natural language questions into executable SPARQL queries for KG databases to retrieve the answers (Jiang et al., 2023a; Wang et al., 2023b; Luo et al., 2024a; Xiong et al., 2024).

Contemporary approaches have further expanded the role of LLMs, utilizing them for both knowledge retrieval from KGs and reasoning (Kim et al.; Gao et al., 2024a; Wang et al., 2024; Guo et al., 2024; Ma et al., 2024; Sun et al., 2024a; Jiang et al., 2024; Jin et al., 2024). The strength of this strategy lies in LLMs’ ability to handle multi-hop tasks by breaking them down into manageable steps. However, as discussed in Section 1, this often necessitates multiple LLM calls, resulting in high latency. To mitigate this issue, some frameworks have attempted to fine-tune LLMs to memorize knowledge, but this reduces their ability to generalize to dynamically updated or novel KGs (Luo et al., 2024b; Mavromatis & Karypis, 2024). Other models have explored fine-tuning adapters embedded in fixed LLMs to better preserve their general reasoning capabilities while adapting to specific KGs (He et al., 2024; Gao et al., 2024a; Hu et al., 2024).

In parallel with these developments, several approaches have emerged that, like our approach, allow LLMs to reason over subgraphs (Kim et al.; Liu et al., 2024a; Li et al., 2023a; Guo et al., 2024; Wu et al., 2023; Li et al., 2024; Wen et al., 2023), though they employ different retrieval strategies. Kim et al. breaks queries into sub-queries, retrieving evidence for each sub-query before reasoning over the collected evidence. Guo et al. (2024) uses PLM-based entity extraction followed by multi-hop expansion for retrieval. Li et al. (2023a) linearizes KG triples into natural language for global triple retrieval using BM25 or dense passage retrievers. Wen et al. (2023) extracts topic entities and merges triples into the retrieved subgraph using two heuristic methods: connecting topic entities via paths and retrieving their 1-hop neighbors.

While these subgraph retrieval strategies share similarities with SubgraphRAG, they lack several key advantages of it, such as retrieval efficiency, adjustable subgraph sizes, and flexible subgraph types. Consequently, they frequently result in suboptimal coverage of relevant information in the retrieved subgraphs. SubgraphRAG addresses these limitations, offering a more comprehensive and adaptable approach to KGQA that builds upon and extends the capabilities of existing methods, while fully leveraging the power of advanced LLMs.

B ADDITIONAL EXPERIMENT DETAILS FOR SUBGRAPH RETRIEVAL

B.1 ADDITIONAL IMPLEMENTATION AND EVALUATION DETAILS

For Retrieve-Rewrite-Answer, RoG, G-Retriever, GNN-RAG, and SR+NSM w E2E, we utilize their official open-source implementations for training and evaluation. While a pre-trained RoG model is publicly available, it was jointly trained on the training subset of both WebQSP and CWQ, causing a label leakage issue due to sample duplication across the two datasets. To address this, we retrain the RoG model separately on the training subset of WebQSP and CWQ. Both Retrieve-Rewrite-Answer and G-Retriever were originally only evaluated on the WebQSP dataset. We managed to adapt the G-Retriever codebase for an evaluation on the CWQ dataset. While SR+NSM w E2E originally also reports the results for CWQ, we failed in running the official codebase for this dataset.

RoG, G-Retriever, the cosine similarity baseline, GNN-RAG, and all SubgraphRAG variants perform relevant subgraph retrieval from the identical rough subgraphs. These subgraphs are centered around the topic entities and are included in the released RoG implementation. In contrast, Retrieve-Rewrite-Answer directly loads and queries the raw KG.

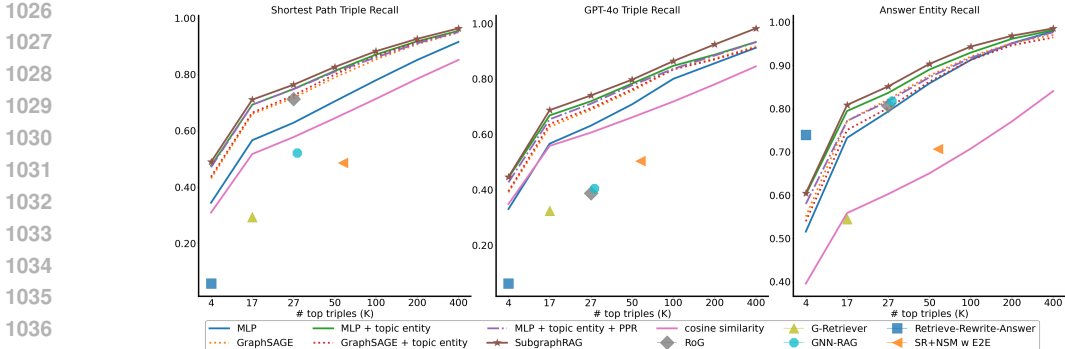


Figure 5: Retrieval effectiveness on WebQSP across a spectrum of K values for top- K triple retrieval.

Table 7: Breakdown of recall evaluation for CWQ over topic entity count. Best results are in **bold**.

Model	Shortest Path Triples		GPT-4o-labeled Triples		Answer Entities	
	Single (46.3%)	Multiple (53.7%)	Single (46.3%)	Multiple (53.7%)	Single (46.3%)	Multiple (53.7%)
cosine similarity	0.586	0.403	0.587	0.499	0.517	0.638
RoG	0.711	0.547	0.324	0.275	0.769	0.903
G-Retriever	0.245	0.128	0.289	0.156	0.393	0.360
GNN-RAG	0.496	0.503	0.369	0.403	0.829	0.851
MLP	0.788	0.568	0.777	0.600	0.894	0.873
MLP + topic entity	0.858	0.690	0.819	0.718	0.894	0.889
SubgraphRAG	0.877	0.754	0.871	0.820	0.911	0.916

GraphSAGE originally only deals with node attributes and we propose a straightforward extension of it for handling both the node attributes and edge attributes. Let \mathbf{z}_e be the text embedding of an entity $e \in \mathcal{E}$ and \mathbf{z}_r be the text embedding of a relation $r \in \mathcal{R}$. A GraphSAGE layer updates entity representations with

$$\mathbf{z}_{\mathcal{N}(e)}^{l+1} = \text{MEAN}(\{[\mathbf{z}_{e'}^l \parallel \mathbf{z}_r] \mid (e', r, e) \in \mathcal{G}\}), \tag{4}$$

$$\mathbf{z}_e^{l+1} = \sigma([\mathbf{z}_e^l \parallel \mathbf{z}_{\mathcal{N}(e)}^{l+1}]), \tag{5}$$

$$\mathbf{z}_e^0 = \mathbf{z}_e, \tag{6}$$

where $\sigma(\cdot)$ is an MLP. Empirically we find that 1-layer GraphSAGE yields the best performance.

B.2 IMPLEMENTATION DEPENDENCIES

Our implementation is based on the following packages: PyTorch (Paszke et al., 2019), Transformers (Wolf et al., 2020), xFormers (Lefaudeux et al., 2022), NetworkX (Hagberg et al., 2008), and PyTorch Geometric (Fey & Lenssen, 2019). We employ the built-in implementation of PPR from NetworkX.

B.3 ADDITIONAL EXPERIMENT RESULTS FOR VARYING K IN TOP-K TRIPLE RETRIEVAL

Fig. 5 presents the performance of SubgraphRAG variants on WebQSP across a spectrum of K values for top- K triple retrieval, which is consistent with the observations made for CWQ.

B.4 EVALUATION BREAKDOWN OVER TOPIC ENTITY COUNT

See table 7.

1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133

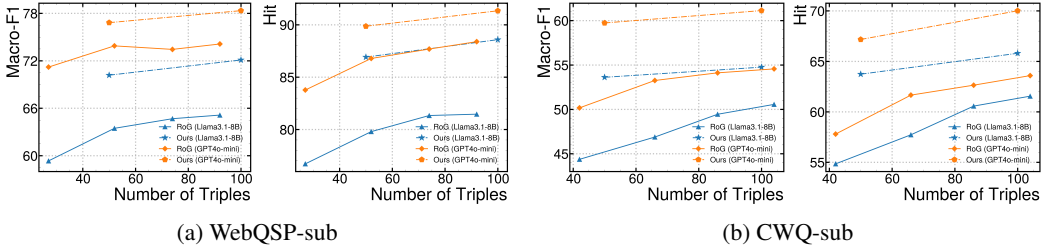


Figure 6: Ablation studies on the number of retrieved triples and the used retrievers in SubgraphRAG. The triples from RoG’s retriever are generated using beam search with sizes {3, 6, 9, 12}, and all the experiments use SubgraphRAG’s un-fine-tuned LLM reasoners.

Table 8: Detailed performance of truth-grounded QA. No Ans Samples refers to cases where LLM reasoners refuse to answer; NR (Not Retrieved) indicates answers not present in the retrieved triples, while R (Retrieved) indicates answers found within the retrieved triples.

Dataset	Method	Samples w/ Ans Entities in KG				Samples w/o Ans Entities in KG		
		No Ans Samples Total Samples	Wrong Ans Total Ans	Correct Ans (NR) Correct Ans	Wrong Ans (NR) Wrong Ans	No Ans Samples Total Samples	Wrong Ans (NR) Total Ans	Wrong Ans (R) Total Ans
WebQSP	RoG-Joint	0/1559 = 0%	4605/10206 = 45%	170/5601 = 3%	1178/4605 = 26%	0/69 = 0%	24/126 = 19%	70/126 = 56%
	RoG-Sep	0/1559 = 0%	6867/12401 = 55%	327/5534 = 6%	2494/6867 = 36%	0/69 = 0%	71/162 = 44%	43/162 = 27%
	SubgraphRAG (Llama3.1-8B)	29/1559 = 2%	1397/5850 = 24%	59/4453 = 1%	84/1397 = 6%	13/69 = 19%	16/107 = 15%	71/107 = 66%
	SubgraphRAG (GPT4o-mini)	12/1559 = 1%	1802/8011 = 22%	37/6209 = 1%	126/1802 = 7%	7/69 = 10%	17/83 = 20%	31/83 = 37%
CWQ	RoG-Joint	0/2848 = 0%	3651/6709 = 54%	305/3058 = 10%	1293/3651 = 35%	0/683 = 0%	1835/2729 = 67%	363/2729 = 13%
	RoG-Sep	0/2848 = 0%	3183/6129 = 52%	341/2946 = 12%	1295/3183 = 41%	0/683 = 0%	1840/2620 = 70%	268/2620 = 10%
	SubgraphRAG (Llama3.1-8B)	210/2848 = 7%	2417/5028 = 48%	21/2611 = 1%	98/2417 = 4%	199/683 = 29%	114/1052 = 11%	819/1052 = 78%
	SubgraphRAG (GPT4o-mini)	203/2848 = 7%	2194/5205 = 42%	30/3011 = 1%	159/2194 = 7%	137/683 = 20%	170/953 = 18%	564/953 = 59%

C SUPPLEMENTARY KGQA RESULTS

Truth-grounded QA Analysis. Table 8 provides a detailed analysis of truth-grounding in generated answers, showing that previous methods often produce correct answers that are unsupported by the retrieved results, increasing the risk of hallucination. In particular, our method is significantly less likely to generate answers that are not present in the retriever results (the NR answers in the table). For instance, on CWQ-sub, more than 10% of RoG’s correct answers are NR, while SubgraphRAG keeps this to just 1%. SubgraphRAG can also decline to answer when there is insufficient evidence, with refusal rates increasing from 2% to 19% on WebQSP and from 7% to 29% on CWQ for questions lacking answers in the KG, compared to questions with KG-supported answers. In contrast, baseline models consistently provide answers even when supporting evidence is absent. Together, these qualities make SubgraphRAG a more trustworthy and truth-grounded KGQA framework.

To obtain a single metric to assess the degree of truth-grounded QA performance, we follow (Yang et al., 2024) to develop a scoring strategy to aggregate the results of these tables. Specifically, for samples with answer entities present in the KG, correct answers receive a score of +1, incorrect answers -1, and missing answers 0. For samples without answer entities in the KG, missing answers, answers with entities found in the retrieved results, and answers with entities not found in the retrieved results are scored +1, -1, and -1.5, respectively. Denote s_i as the score yielded for sample i and a_i the number of answers outputted by the LLM reasoner for this sample. For a dataset with n samples: $\text{Score}_h = \text{Normalize} \left(\frac{1}{n} \sum_{i=0}^n \frac{s_i}{a_i} \right)$, where we use min-max normalization with $\text{min} = 0$ and $\text{max} = 100$. This metric penalizes hallucinated answers while favoring missing answers over incorrect ones.

Performance with Different Retrievers. To assess the impact of our retriever on overall performance as analyzed in Sec. 4.2, Table 9 provides additional ablation results using GPT4o-mini as the reasoner.

Performance with Different # of Retrieved Triples. Fig. 4 shows how our SubgraphRAG would perform with different numbers of retrieved triples. To further demonstrate the superior performance of our proposed retriever module, we also scale RoG’s retriever with more retrieved triples by increasing its beam search sizes (noting that this substantially increases computational costs). As shown in Fig. 6, clearly, even when using RoG’s retriever with more triples in SubgraphRAG, our proposed retriever consistently achieves significantly better results, further demonstrating the effectiveness of our retriever module.

Table 9: Ablation studies with different retrievers, using the same prompt and GPT4o-mini as the reasoner. Rand refers to random triple sampling, RandNoAns removes triples with ground-truth answers after random sampling, and NoRetriever directly asks questions without KG info.

	WebQSP		CWQ		WebQSP-sub				CWQ-sub					
	Macro-F1	Hit	Macro-F1	Hit	Macro-F1	Micro-F1	Hit	Hit@1	Score _h	Macro-F1	Micro-F1	Hit	Hit@1	Score _h
Rand + SubgraphRAG Reasoner	47.70	68.37	33.13	39.82	47.15	23.74	68.57	64.59	69.67	35.55	34.26	42.94	40.48	54.81
RandNoAns + SubgraphRAG Reasoner	36.83	49.63	25.69	30.70	35.77	14.62	48.94	44.96	57.12	26.25	26.11	31.60	29.21	48.80
NoRetriever + SubgraphRAG Reasoner	47.49	71.01	33.43	42.25	46.68	25.53	70.94	62.67	60.22	35.66	31.11	44.66	39.99	44.24
cosine similarity + SubgraphRAG Reasoner	64.94	78.19	41.23	49.22	65.26	43.84	78.90	74.15	73.03	45.07	42.27	53.83	49.37	57.06
Retrieve-Rewrite-Answer + SubgraphRAG Reasoner	38.26	53.62	-	-	37.54	19.62	53.37	50.10	67.68	-	-	-	-	-
StructGPT + SubgraphRAG Reasoner	71.62	82.68	-	-	71.66	59.05	82.87	80.44	81.48	-	-	-	-	-
G-Retriever + SubgraphRAG Reasoner	59.28	75.25	36.79	42.23	59.55	35.19	76.01	72.87	76.31	39.55	39.42	45.47	43.29	57.67
RoG-Sep + SubgraphRAG Reasoner	70.08	82.25	44.30	51.15	70.91	54.69	83.45	78.51	81.00	49.85	50.40	57.51	52.35	64.27
GNN-RAG + SubgraphRAG Reasoner	73.27	85.93	52.91	59.64	74.24	53.92	87.24	83.39	84.41	60.89	59.86	68.43	64.04	67.71
GNN-RAG (+) + SubgraphRAG Reasoner	61.19	78.99	43.42	51.37	61.41	42.02	79.79	74.98	76.11	48.04	43.7	56.88	52.32	59.45
SubgraphRAG	77.45	90.11	54.13	62.02	78.34	58.44	91.34	87.36	82.21	61.13	58.86	70.01	65.48	64.20
SubgraphRAG (+)	73.81	88.08	44.69	54.21	74.42	49.41	89.10	84.67	81.35	49.47	45.16	60.18	54.18	58.86

D PROMPT TEMPLATES

Fig. 7 is the detailed prompt template used in our experiments for all samples, and Fig. 8 provides the prompt employed to label relevant triples via GPT-4o.

1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241

```

Input Prompts for KGQA

System:
Based on the triples retrieved from a knowledge graph, please answer the question. Please return formatted answers as a list, each
prefixed with "ans:".

User: // ICL example
Triplets:
(Lou Seal,sports.mascot.team,San Francisco Giants)
(San Francisco Giants,sports.sports.team.championships,2012 World Series)
(San Francisco Giants,sports.sports.championship_event.champion,2014 World Series)
(San Francisco Giants,time.participant.event,2014 Major League Baseball season)
(San Francisco Giants,time.participant.event,2010 World Series)
(San Francisco Giants,time.participant.event,2010 Major League Baseball season)
(San Francisco Giants,sports.sports.team.championships,2014 World Series)
(San Francisco Giants,sports.sports.team.mascot,Crazy Crab)
(San Francisco Giants,sports.sports.team.championships,2010 World Series)
(San Francisco Giants,sports.professional_sports.team.owner_s,Bill Neukom)
(San Francisco Giants,time.participant.event,2012 World Series)
(San Francisco,sports.sports.team.location.teams,San Francisco Giants)
(San Francisco Giants,sports.sports.team.arena_stadium,AT&T Park)
(AT&T Park,location.location.events,2012 World Series)
(m.011zsc4_,organization.leadership.organization,San Francisco Giants)
(San Francisco Giants,sports.sports.team.previously_known_as,New York Giants)
(AT&T Park,location.location.events,2010 World Series)
(Crazy Crab,sports.mascot.team,San Francisco Giants)
(New York Giants,baseball.baseball.team.league,National League)
(San Francisco Giants,sports.sports.team.colors,Black)
(San Francisco Giants,sports.sports.team.previously_known_as,New York Gothsams)
(m.0k079qm,base.schemastaging.team_training_ground.relationship.team,San Francisco Giants)
(m.0k079ry,base.schemastaging.team_training_ground.relationship.team,San Francisco Giants)
(2010 World Series,time.event.locations,AT&T Park)
(San Francisco Giants,time.participant.event,2012 Major League Baseball season)
(San Francisco Giants,baseball.baseball.team.league,National League)
(m.0crt80,sports.sports.league_participation.league,National League West)
(San Francisco Giants,sports.sports.team.location,San Francisco)
(San Francisco Giants,sports.sports.team.sport,Baseball)
(m.05n6dtn,baseball.baseball.team.stats.team,San Francisco Giants)

Question:
What year did the team with mascot named Lou Seal win the World Series?

Assistant: // ICL example
To find the year the team with mascot named Lou Seal won the World Series, we need to find the team with mascot named Lou
Seal and then find the year they won the World Series.
From the triplets, we can see that Lou Seal is the mascot of the San Francisco Giants.
Now, we need to find the year the San Francisco Giants won the World Series.
From the triplets, we can see that San Francisco Giants won the 2010 World Series and 2012 World Series and 2014 World Series.
So, the team with mascot named Lou Seal (San Francisco Giants) won the World Series in 2010, 2012, and 2014.
Therefore, the formatted answers are:
ans: 2014 (2014 World Series)
ans: 2012 (2012 World Series)
ans: 2010 (2010 World Series)

User: // Sample to infer
Triplets:
(e_a, r_ab, e_b) // Retrieved triples
(e_c, r_cd, e_d)
...
Question:
what's ...? // Q in datasets

```

Figure 7: Detailed prompt for LLM question-answering used in our experiments for all samples.

1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295

Input Prompts for Labeling Relevant Triples via GPT-4o

System:
Based on the triplets retrieved from a knowledge graph, please select relevant triplets for answering the question. Please return formatted triplets as a list, each prefixed with "evidence:".

User: // Sample to infer
Triplets:
(e_a, r_{ab}, e_b) // Retrieved triples
(e_c, r_{cd}, e_d)
...
Question:
what's ...? // Q in datasets

Figure 8: Detailed prompt for labeling triples via GPT-4o.

1296 E EXPLAINABILITY EXAMPLES
 1297
 1298
 1299
 1300
 1301

1302 To demonstrate the superior explainability of our approach, we provide multiple example responses
 1303 from our LLM reasoners below, which cover questions requiring different reasoning hops and logic
 1304 chains. We have also included examples of our LLM reasoners refusing to answer due to insufficient
 1305 information in Appendix E.2, which helps to provide more truth-grounded answers. Due to limited
 1306 space, we do not include retrieved triples for all the examples, but one will be able to find full
 1307 prediction files in our released repository.
 1308
 1309
 1310
 1311
 1312

1313 E.1 LLM RESPONSES WITH EXPLAINABLE REASONING
 1314
 1315
 1316
 1317
 1318
 1319
 1320
 1321
 1322
 1323
 1324
 1325
 1326
 1327
 1328
 1329

CWQ-WebQTest-100_bf66fd89b6e9fc5fcb96c8b3f7a0e616

1330 **Question:**

The people from the country that contains Nord-Ouest Department speak what languages today?

1331 **Retrieved Triples:**

1332 (Haiti,location.country.languages_spoken,Haitian Creole)
 1333 (Haiti,location.country.first_level_divisions,Nord-Ouest Department)
 1334 (Haiti,location.country.official_language,French)
 1335 (French,language.human_language.countries_spoken_in,Haiti)
 1336 (Nord-Ouest Department,location.administrative_division.first_level_division_of,Haiti)
 1337 (Haiti,location.country.languages_spoken,French)
 1338 (Haiti,location.country.administrative_divisions,Nord-Ouest Department)
 1339 (Haiti,location.country.official_language,Haitian Creole)
 1340 (Nord-Ouest Department,location.location.containedby,Haiti)
 1341 (Haitian Creole,language.human_language.main_country,Haiti)
 1342 ...

1343 **LLM Response:**

1344 To find the languages spoken in the country that contains Nord-Ouest Department, we need to find the country that contains
 1345 Nord-Ouest Department.
 1346 From the triplets, we can see that Nord-Ouest Department is contained by Haiti.
 1347 So, the country that contains Nord-Ouest Department is Haiti.
 1348 From the triplets, we can see that Haiti speaks Haitian Creole and French.
 1349 Therefore, the people from the country that contains Nord-Ouest Department (Haiti) speak Haitian Creole and French today.
 The formatted answer is:
 ans: Haitian Creole
 ans: French

1350 **Ground-truth:**

1351 Haitian Creole
 1352 French

1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403

CWQ-WebQTest-1320_c5498ca807d2e1ec30d4c8fdd41f0bf7

Question:

What stadium does the team with mascot named Hank play at?

Retrieved Triples:

(Milwaukee Brewers,sports.sports_team.team_mascot,Hank)
(Hank,sports.mascot.team,Milwaukee Brewers)
(Milwaukee Brewers,sports.sports_team.previously_known_as,Seattle Pilots)
(Seattle Pilots,sports.defunct_sports_team.later_known_as,Milwaukee Brewers)
(Milwaukee Brewers,sports.sports_team.arena_stadium,Miller Park)
(Milwaukee Brewers,sports.sports_team.location,Milwaukee)
(Miller Park,sports.sports_facility.teams,Milwaukee Brewers)
(Milwaukee,sports.sports_team.location.teams,Milwaukee Brewers)
(Miller Park.location.location.containedby,Milwaukee)
(Milwaukee Brewers,baseball.baseball_team.current_coaches.m.0527c88)
...

LLM Response:

To find the stadium where the team with mascot named Hank plays, we need to find the team with mascot named Hank and then find the stadium they play at.

From the triplets, we can see that Hank is the mascot of the Milwaukee Brewers.

Now, we need to find the stadium where the Milwaukee Brewers play.

From the triplets, we can see that the Milwaukee Brewers play at Miller Park.

Therefore, the formatted answer is:

ans: Miller Park

Ground-truth:

Miller Park

CWQ-WebQTrn-2152_92fba37c9723caee68665ad9a5e4a468

Question:

Which of team owners Tom Hicks sports team are in the American League West?

Retrieved Triples:

(Texas Rangers,sports.professional_sports_team.owner_s,Tom Hicks)
(Tom Hicks,sports.sports_team.owner.teams_owned,Texas Rangers)
(Dallas Stars,sports.professional_sports_team.owner_s,Tom Hicks)
(Seattle Pilots,sports.defunct_sports_team.later_known_as,Milwaukee Brewers)
(Tom Hicks,sports.sports_team.owner.teams_owned,Dallas Stars)
(United States of America,base.locations.countries.states_provinces_within,Alabama)
(Houston Astros,sports.professional_sports_team.owner_s,Drayton McLane, Jr.)
(m.0crt2r,sports.sports_league_participation.team,Los Angeles Angels of Anaheim)
(United States of America,base.aareas.schema.administrative_area.administrative_children,Alabama)
(m.0crt31,sports.sports_league_participation.team,Anaheim Angels)
(United States of America,base.aareas.schema.administrative_area.administrative_children,Washington, D.C.)
(United States of America,base.locations.countries.states_provinces_within,Mississippi)
(m.0crt3v,sports.sports_league_participation.team,California Angels)
(United States of America,base.aareas.schema.administrative_area.administrative_children,Mississippi)
(American League West,baseball.baseball_division.teams,Texas Rangers)
...

LLM Response:

To find the teams owned by Tom Hicks that are in the American League West, we need to find the teams owned by Tom Hicks and then find the teams in the American League West.

From the triplets, we can see that Tom Hicks owns the Texas Rangers and Dallas Stars.

Now, we need to find the teams in the American League West.

From the triplets, we can see that the teams in the American League West are Texas Rangers, Los Angeles Angels of Anaheim, Seattle Mariners, Oakland Athletics, and Seattle Pilots.

So, among the teams owned by Tom Hicks (Texas Rangers and Dallas Stars), only Texas Rangers is in the American League West.

Therefore, the formatted answer is:

ans: Texas Rangers

Ground-truth:

Texas Rangers

1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457

CWQ-WebQTrn-557_960c16ffdb29e173df0577fc76c7455d

Question:
In the film with the character named Winged Monkey #7, who played Dorothy?

LLM Response:
To find the actor who played Dorothy in the film with the character named Winged Monkey #7, we need to find the film that Winged Monkey #7 is in and then find the actor who played Dorothy in that film.
From the triplets, we can see that Winged Monkey #7 is in the film "The Wizard of Oz" (m.0yj6tr7).
Now, we need to find the actor who played Dorothy in "The Wizard of Oz".
From the triplets, we can see that Judy Garland (m.0k6y72) played Dorothy in "The Wizard of Oz".
Therefore, the formatted answer is:
ans: Judy Garland

Ground-truth:
Judy Garland

CWQ-WebQTrn-2904_cb8d941f825c5dd7b2d6f3faef7f9229

Question:
What city is home for Lauren Conrad and had a mayor named Willie Brown?

LLM Response:
To find the city that is home for Lauren Conrad and had a mayor named Willie Brown, we need to find the city where Lauren Conrad lives and the city where Willie Brown was the mayor.
From the triplets, we can see that Lauren Conrad lived in Los Angeles (m.043jjv4) and San Francisco (m.04hy_14).
From the triplets, we can see that Willie Brown was the mayor of San Francisco.
Therefore, the city that is home for Lauren Conrad and had a mayor named Willie Brown is San Francisco.
So, the formatted answer is:
ans: San Francisco

Ground-truth:
San Francisco

CWQ-WebQTrn-124_405a78f132e69f4771aff40d07cd0294

Question:
Which movie did Angelina Jolie direct, that was produced by Erwin Stoff?

LLM Response:
To find the movie that Angelina Jolie directed, which was produced by Erwin Stoff, we need to find the movies that Angelina Jolie directed and the movies that Erwin Stoff produced.
From the triplets, we can see that Angelina Jolie directed the following movies:
- In the Land of Blood and Honey
- Unbroken
- By the Sea
From the triplets, we can see that Erwin Stoff produced the following movies:
- Unbroken
- The Day the Earth Stood Still
- Edge of Tomorrow
- Water for Elephants
- Austin Powers: The Spy Who Shagged Me
- The Blind Side
- The Replacements
- I Am Legend
- Hardball
- The Lake House
- Street Kings
- 47 Ronin
Now, we need to find the common movie between Angelina Jolie's directed movies and Erwin Stoff's produced movies.
The common movie is Unbroken.
Therefore, the formatted answer is:
ans: Unbroken

Ground-truth:
Unbroken

1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511

WebQSP-WebQTest-33

Question:

what timezone is sweden

Retrieved Triples:

(Sweden,location.location.time_zones,Central European Time Zone)
(Sweden,location.country.languages_spoken,Finnish Language)
(Finnish Language,language.human_language.countries_spoken_in,Sweden)
(Sweden,location.country.languages_spoken,Turoyo Language)
(Sweden,location.country.official_language,Swedish Language)
(Spain,location.location.time_zones,Central European Time Zone)
(Stockholm,location.location.time_zones,Central European Time Zone)
(Unitary state,government.form_of_government.countries,Sweden)
(Swedish Language,language.human_language.countries_spoken_in,Finland)
(Sweden,location.country.languages_spoken,Swedish Language)
...

LLM Response:

To find the timezone of Sweden, we can look for the triplets that contain Sweden and have a property related to timezones. From the triplets, we can see that Sweden is located in the Central European Time Zone. Therefore, the answer is:
ans: Central European Time Zone

Ground-truth:

Central European Time Zone

WebQSP-WebQTest-188

Question:

where did bristol palin go to school

Retrieved Triples:

(m.0byl4zl,education.education.institution,Wasilla High School)
(Wasilla High School,education.educational_institution.students_graduates,m.0byl4zl)
(Juneau-Douglas High School,education.educational_institution.students_graduates,m.0cpcbwp)
(m.0cpcbwp,education.education.institution,Juneau-Douglas High School)
(Bristol Palin,people.person.education,m.0byl4zl)
(Bristol Palin,people.person.education,m.0cpcbwp)
(Bristol Palin,people.person.education,m.0cpcbwp)
(m.0cpcbwp,education.education.institution,West Anchorage High School)
(West Anchorage High School,education.educational_institution.students_graduates,m.0cpcbwp)
(m.0byl4zl,education.education.student,Bristol Palin)
(m.0cpcbwp,education.education.student,Bristol Palin)
(m.0cpcbwp,education.education.student,Bristol Palin)
(m.04tlm1z,education.education.institution,Wasilla High School)
(m.0n1g77g,education.education.institution,Wasilla High School)
(Wasilla High School,education.educational_institution.students_graduates,m.04tlm1z)
(Wasilla High School,education.educational_institution.students_graduates,m.0n1g77g)
(Bristol Palin,people.person.place_of_birth,Wasilla)
(Wasilla,location.location.people_born_here,Bristol Palin)
(Bristol Palin,people.person.nationality,United States of America)
(Levi Johnston,people.person.place_of_birth,Wasilla)
...

LLM Response:

To find where Bristol Palin went to school, we need to find the educational institutions that Bristol Palin attended. From the triplets, we can see that Bristol Palin attended the following educational institutions:
- Wasilla High School (m.0byl4zl)
- Juneau-Douglas High School (m.0cpcbwp)
- West Anchorage High School (m.0cpcbwp)
Therefore, the formatted answers are:
ans: Wasilla High School
ans: Juneau-Douglas High School
ans: West Anchorage High School

Ground-truth:

West Anchorage High School
Wasilla High School
Juneau-Douglas High School

1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565

WebQSP-WebQTest-760

Question:

what party does barack obama belong to

Retrieved Triples:

(Barack Obama,influence.influence_node.influenced_by,Saul Alinsky)
 (Barack Obama,organization.organization_founder.organizations_founded,National Commission on Fiscal Responsibility and Reform)
 (Barack Obama presidential campaign, 2012,government.election_campaign.party,Democratic Party)
 (Barack Obama,government.politician.election_campaigns,Barack Obama presidential primary campaign, 2008)
 (Barack Obama,government.politician.party,m.03gjhww)
 (Barack Obama,government.politician.election_campaigns,Barack Obama 1996 Illinois Senate Campaign)
 (Barack Obama 2004 US Senate Campaign,government.election_campaign.party,Democratic Party)
 (Barack Obama,influence.influence_node.influenced_by,Reinhold Niebuhr)
 (m.03gjhww,government.political_party_tenure.party,Democratic Party)
 (Barack Obama,organization.organization_founder.organizations_founded,White House Task Force to Protect Students from Sexual Assault)
 (Barack Obama presidential primary campaign, 2008,government.election_campaign.party,Democratic Party)
 (Barack Obama 1996 Illinois Senate Campaign,government.election_campaign.party,Democratic Party)
 (Barack Obama,base.politicalconventions.presidential_nominee.nominated_at,2008 Democratic National Convention)
 (Barack Obama,government.politician.government_positions_held,m.03h96h6)
 (Barack Obama,government.politician.election_campaigns,Barack Obama 2004 US Senate Campaign)
 ...

LLM Response:

From the triplets, we can see that Barack Obama is associated with the Democratic Party in several instances:

1. (Barack Obama,government.politician.party,m.03gjhww)
2. (Barack Obama 2004 US Senate Campaign,government.election_campaign.party,Democratic Party)
3. (Barack Obama 1996 Illinois Senate Campaign,government.election_campaign.party,Democratic Party)
4. (Barack Obama presidential primary campaign, 2008,government.election_campaign.party,Democratic Party)
5. (Democratic Party presidential primaries, 2008,government.primary_election.party,Democratic Party)
6. (m.03gjhww,government.political_party_tenure.party,Democratic Party)

Therefore, the formatted answer is:

ans: Democratic Party

Ground-truth:

Democratic Party

WebQSP-WebQTest-62

Question:

what was jesse james killed with

LLM Response:

To find what Jesse James was killed with, we need to find the cause of his death.

From the triplets, we can see that Jesse James was killed by Assassination.

Now, we need to find the cause of Assassination.

From the triplets, we can see that Assassination includes causes of death such as Assassination in ways which appear natural,

Assassination by 'Accident', Assassination by firearm, and Assassination by 'Suicide'.

However, we are looking for what Jesse James was killed with, not how he was killed.

From the triplets, we can see that Firearm is a cause of death that includes causes of death such as Assassination by firearm.

Therefore, Jesse James was killed with a Firearm.

So, the answer is:

ans: Firearm

Ground-truth:

Firearm

1566 E.2 LLM REFUSAL TO ANSWER DUE TO INSUFFICIENT INFORMATION
1567
1568
1569
1570
1571

1572 WebQSP-WebQTest-386

1573 **Question:**

1574 how deep is lake merritt oakland

1575 **LLM Response:**

1576 To find the depth of Lake Merritt in Oakland, we need to look for any information related to the depth of Lake Merritt.

1577 From the triplets, we can see that Lake Merritt is a lake, but there is no direct information about its depth.

1578 However, we can see that Lake Merritt is a National Historic Landmark (m.06.44f4,

1579 protected_sites.natural_or_cultural_site_listing.designation_as_national_or_cultural_site, m.06.44f4) and a National Historic

1580 Landmark (m.06.44f4, protected_sites.natural_or_cultural_site_listing.category_or_criteria, National Historic Landmark).

1581 We can also see that Lake Merritt is a lake (Lake Merritt, common.topic.notable.types, Lake) and it is located in Oakland (Lake

1582 Merritt, location.location.containedby, Oakland).

1583 But there is no information about the depth of Lake Merritt.

1584 However, we can see that there is a mention of a location with geolocation m.0cs7t50 (Lake Merritt, location.location.geolocation,

1585 m.0cs7t50), but this does not provide any information about the depth of the lake.

1586 Therefore, based on the given triplets, we cannot find any information about the depth of Lake Merritt.

1587 ans: not available

1588 **Ground-truth:**1589 3.048
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608

1609 WebQSP-WebQTest-612

1610 **Question:**

1611 who does jeremy shockey play for in 2012

1612 **LLM Response:**

1613 To find out who Jeremy Shockey played for in 2012, we need to find the team he played for and the year he played for that team.

1614 From the triplets, we can see that Jeremy Shockey played for the New Orleans Saints, Carolina Panthers, Miami Hurricanes

1615 football, and New York Giants.

1616 However, we need to find the year he played for each of these teams.

1617 From the triplets, we can see that Jeremy Shockey played for the New Orleans Saints in 2007,

1618 for the Carolina Panthers in 2007,

1619 for the Miami Hurricanes football in 2001,

1620 and for the New York Giants in 2002.

1621 However, there is no information about Jeremy Shockey playing for any of these teams in 2012.

1622 Therefore, we cannot determine which team Jeremy Shockey played for in 2012 based on the given triplets.

1623 ans: not available

1624 **Ground-truth:**1625 Carolina Panthers
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639

1640 CWQ-WebQTest-397_0b3a8b0643fac530a078012a025201fa

1641 **Question:**

1642 Harvard Board of Overseers is part of the school with what colors?

1643 **LLM Response:**

1644 To find the school with the colors that Harvard Board of Overseers is part of, we need to find the parent organization of Harvard

1645 Board of Overseers.

1646 From the triplets, we can see that Harvard Board of Overseers is a child of Harvard University.

1647 Now, we need to find the colors of Harvard University.

1648 From the triplets, we can see that there is no direct information about the colors of Harvard University. However, we can see that

1649 Harvard University is a parent of Harvard Board of Overseers, and Harvard Board of Overseers is a child of Harvard University.

1650 But we can also see that Harvard University is a parent of itself (Harvard

1651 University,education.educational_institution.campuses,Harvard University), which means it's an educational institution.

1652 However, there is no information about the colors of Harvard University.

1653 **Ground-truth:**

1654 Crimson

1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673

CWQ-WebQTest-1528_2f6fb6d585b98261a3ae6d2a112a4c91

Question:
What movie starring Logan Lerman that was edited by Thomas J Nordberg?

LLM Response:
To find the movie starring Logan Lerman that was edited by Thomas J Nordberg, we need to find the movies edited by Thomas J Nordberg and then find the ones starring Logan Lerman.
From the triplets, we can see that the following movies were edited by Thomas J Nordberg:
- Scary Movie 2
- The Host
- I Love You Phillip Morris
- U Turn
- Any Given Sunday
- The Guardian
- Alexander
Now, we need to find the movies among these that star Logan Lerman.
From the triplets, we can see that Logan Lerman starred in the following movies:
- What Women Want
- The Perks of Being a Wallflower
- Fury
- Percy Jackson: Sea of Monsters
- Noah
- Riding in Cars with Boys
- 3:10 to Yuma
However, none of these movies are among the ones edited by Thomas J Nordberg.
But, we can see that Fury is not edited by Thomas J Nordberg but Fury is related to another film edited by Thomas J Nordberg.
The film Fury is related to Fury (2014) which is a film edited by Thomas J Nordberg.

Ground-truth:
What Women Want

CWQ-WebQTest-12_c701ad2b5b8ef3f3ed26dd2ed8703d05

Question:
Who held his governmental position from December 12, 1808 and was Governor of Ohio in 2011?

LLM Response:
To find the answer, we need to find a person who held a governmental position from December 12, 1808 and was Governor of Ohio in 2011.
From the triplets, we can see that there is no direct information about a person holding a governmental position from December 12, 1808. However, we can find a person who was Governor of Ohio in 2011.
From the triplets, we can see that Mike DeWine was the Governor of Ohio.
However, there is no information about Mike DeWine holding a governmental position from December 12, 1808.
We can also see that there is no information about any other person holding a governmental position from December 12, 1808.
Therefore, we cannot find a person who held a governmental position from December 12, 1808 and was Governor of Ohio in 2011.
ans: not available

Ground-truth:
Return J. Meigs, Jr.