

Long Context Transfer from Language to Vision

Anonymous authors

Paper under double-blind review

Abstract

Video sequences offer valuable temporal information, but existing large multimodal models (LMMs) fall short in understanding extremely long videos. Many works address this by reducing the number of visual tokens using visual resamplers. Alternatively, in this paper, we approach this problem from the perspective of the language model. By simply extrapolating the context length of the language backbone, we enable LMMs to comprehend orders of magnitude more visual tokens without any video training. We call this phenomenon *long context transfer* and carefully ablate its properties. To effectively measure LMMs’ ability to generalize to long contexts in the vision modality, we develop V-NIAH (Visual Needle-In-A-Haystack), a purely synthetic long vision benchmark inspired by the language model’s NIAH test. Our proposed Long Video Assistant (LongVA) can process 2000 frames or over 200K visual tokens without additional complexities. With its extended context length, LongVA achieves state-of-the-art performance on Video-MME and MLVU among 7B-scale models by densely sampling more input frames.

1 Introduction

Driven by the progress of Large Language Models (LLMs) (Brown et al., 2020; Team, 2023; Touvron et al., 2023; Gemini, 2024; Ormazabal et al., 2024; Mistral, 2024; Cohere, 2024), multiple studies are conducted to extend their capability to understand images and videos (Li et al., 2023b; Dai et al., 2023; Qwen, 2024; Liu et al., 2023c). With modality alignment and visual instruction tuning, these Large Multimodal Models (LMMs) have shown impressive abilities such as captioning and visual question-answering. While current LMMs have demonstrated promising performance on tasks involving single images and short videos (Song et al., 2024b; Lin et al., 2023a; Maaz et al., 2023; Zhang et al., 2023), effectively processing and understanding extremely long videos remains a significant challenge (Wang et al., 2024b).

One primary reason for this challenge is the excessive number of visual tokens generated by the vision encoder. For instance, LLaVA-1.6 (Liu et al., 2024b) can produce 576 to 2880 visual tokens for a single image. The number of visual tokens increases significantly with the addition of more frames. To address this problem, numerous methods have been proposed to reduce the number of visual tokens. One popular direction is to modify the visual resampler that connects the vision encoder and LLM, aiming to extract fewer tokens (Li et al., 2023b;d; Cai et al., 2024; Cheng et al., 2024). Alternative approaches (Chen et al., 2024a; Shang et al., 2024; Jin et al., 2024; Zhou et al., 2024b) employ heuristic techniques to prune or merge the visual features. However, despite these efforts, Table 1 demonstrates that the majority of current LMMs are still limited in their ability to process a large number of frames effectively.

Another issue hindering the development of high-performance long video LMMs is the lack of high-quality long video datasets. In Table 2, we list the average video length of existing video instruction tuning data. Most datasets consist of video clips within 1 minute. Even if some datasets do contain longer videos, the corresponding text pairs are generated by annotating only several frames within that video, lacking long and dense supervision signals.

Given the circumstance, in this paper, instead of reducing the visual tokens, we identify the more critical issue limiting the visual context length in existing LMMs: the context length of the language model backbone. Given a language model, we first extend its context length by training on longer text data. We then use this

Model	Tokens/Frames*	Training Max Frames*	LM Backbone	LM Context Length
MPLUG-Owl-video (Ye et al., 2024)	256	4	LLaMA	4K
MovieChat (Song et al., 2024b)	32	8	Vicuna-v0	2K
Video-LLaVA (Zhang et al., 2023)	49	8	Vicuna-1.5	4K
VideoChat (Li et al., 2024b)	32/196	8	Vicuna-v0	2K
LLaVA-NeXT-Video (Zhang et al., 2024b)	144	16	Vicuna-1.5	4K
ST-LLM (Liu et al., 2024c)	256	16	Vicuna-1.1	2K
Video-LLaMA (Cheng et al., 2024)	32	32	LLaMA-2	4K
Chat-UniVi (Jin et al., 2023)	112	64	Vicuna-1.5	4K
TimeChat (Ren et al., 2024)	4	96	LLaMA-2	4K
Video-ChatGPT (Maaz et al., 2023)	256	100	Vicuna-1.1	2K
LLaMA-VID (Li et al., 2023d)	2	300	Vicuna-1.5	4K
LongVA (Ours)	144	-	Qwen2-Extended	224K+

Table 1: To enable longer video inputs, previous works train fewer visual tokens to increase the maximum frames during training. Our LongVA, on the other hand, enables long video capability by extending the backbone language model. *We report it based on the best available information from their paper or released codebase.

context-extended LM as the backbone to perform modality alignment and visual instruction tuning without any long video text pairs. By training this way, the context length of the language model is directly transferred to that of the LMMs. We further proposed *UniRes*, a unified encoding scheme that represents videos as extended images, enhancing the capability fusion between images and videos. To facilitate benchmarking and accurately assess the context length in the visual domain, we created V-NIAH, a synthetic visual benchmark based on the Needle-in-a-haystack test (Gregory, 2024) used in language models. Our model, Long Video Assistant (LongVA), is capable of accurately retrieving visual information from 2000 frames or more than 200K visual tokens. Experiments show that additional frames during inference lead to improved performance on long video question-answering benchmarks, and LongVA achieves state-of-the-art performance among 7B models on the Video-MME (Fu et al., 2024a) and MLVU (Zhou et al., 2024a) dataset. In summary, our paper makes the following contributions:

- (1) **Long Context Transfer:** We discovered the *long context transfer* phenomenon where the context of the language model can be directly transferred to the modality-aligned multi-modal models.
- (2) **Visual Needle-In-A-Haystack (V-NIAH):** We proposed the V-NIAH benchmark to test LMMs ability in locating and retrieving visual information over extremely long contexts.
- (3) **Long Video Assistant (LongVA):** With *long context transfer* and *UniRes*, we developed LongVA that can perceive more than 200K visual tokens, achieving SoTA performance on the Video-MME and MLVU dataset.

2 Related Work

Vision Language Connector in Large Multimodal Models Existing studies explore different architectures to extract and inject visual features into LLMs. One line of work (Alayrac et al., 2022; Li et al., 2023a; Awadalla et al., 2023; Laurençon et al., 2023), pioneered by Flamingo (Alayrac et al., 2022), adopts a resampler to compress the visual feature and inserts cross-gated attention layers into the LLM. Some other works still use a reampler (Li et al., 2023b; Zhu et al., 2023; Qwen, 2024) while directly feeding the image feature into the input layer of the language model. The LLaVA series (Liu et al., 2024b; 2023b;c) use a simple and scalable design to directly project the image features into language model without any pooling or resampling. When the field moves from image-only models to include multi-image and video inputs, more modifications to the visual language connector were proposed. Zhang et al. (2024b) and Cai et al. (2024) use a simple average pooling. Jin et al. (2024) dynamically drop the visual tokens. Cheng et al. (2024) adopt a spatial-temporal convolution to better capture the dynamics of video data and reduce feature size. Our proposed context transfer from text to image is orthogonal to those works and can further enable LMMs to understand more frames.

Table 2: Existing Video SFT Datasets

Dataset Name	Video Length (sec.)	Text Length
VideoChatGPT-100K (Maaz et al., 2023)	123.4	68.0
LLaVA-Hound-255K (Zhang et al., 2024a)	52.4	37.6
ShareGPT4Video (Chen et al., 2024b)	26.6	273.3
TimeIT (Ren et al., 2024)	190.8	52.5
VideoChat (Li et al., 2024b)	9.5	59.0

Table 3: Video Benchmarks

Benchmark Name	Video Length (sec.)
VideoChatGPT (Maaz et al., 2023)	108.0
NexTQA (Xiao et al., 2021b)	42.9
EgoSchema (Mangalam et al., 2023)	179.8
VideoMME (Fu et al., 2024a)	1017.0
V-NIAH (Ours)	∞

Context Extrapolation in Transformer Transformer does not directly work on sequences longer than its training length. To alleviate that, various RoPE-based (Su et al., 2023) extension techniques (Chen et al., 2023a; bloc97, 2024; Rozière et al., 2024; Peng et al., 2023; Ding et al., 2024) have been proposed to allow for training-free context extrapolation. Efforts have also been made on data curation (Fu et al., 2024b; Xiong et al., 2023; Bai et al., 2024) and system optimization (Li et al., 2023c; Liu et al., 2023a; Jacobs et al., 2023) during long context training. There has been limited exploration of the context extrapolation in the domain of LMMs. Liu et al. (2024a) are closest to our work and train LMM with long context language models, but they do not benchmark the effective visual context length of their model.

Video Language Benchmarks Recent years have witnessed significant progress in Video Question-Answering (Antol et al. (2015)). To accurately measure the progress of the video LMMs’ performance, researchers have developed various benchmarks encompassing a broad spectrum of tasks. These range from fundamental visual perception tasks such as activity recognition (Yu et al. (2019a)), concept detection (Xu et al., 2017), and counting (Jang et al., 2017), to more complex visual reasoning tasks including compositional (Grunde-McLaughlin et al., 2021), causal (Xiao et al., 2021a; Yi et al., 2019; Xu et al., 2021), and situated reasoning (Wu et al., 2021). However, most of those benchmarks focus on short videos, lacking data and metrics to test LMMs’ capability over a long context. Inspired by the NIAH test (Gregory, 2024) in the language model community, we proposed V-NIAH to benchmark LMMs’ ability over long visual inputs with the minimum overhead of data collection and human annotation. Several concurrent works also developed multimodal versions of the Needle-in-a-haystack test (Wang et al., 2024c; Zhou et al., 2024a; Song et al., 2024a; Wang et al., 2024a). However, they only measure on several hundreds of frames and lack a strong baseline to properly analyze the properties of visual context length.

3 Long Video Assistant

As in Figure 1, this paper centers around the hypothesis that *if the modality of vision and language can be truly aligned, the capability to handle long contexts could also transfer from text to vision*, and this could happen even without explicit long video training. Our methodology is thus very straightforward. Given a language model, we first perform long context training purely on language to extend its text context (Section 3.1). We then detailed how we augment this language model with long visual capabilities by training solely on short image data in Section 3.2.

3.1 Training Long Language Model

We use Qwen2-7B-Instruct (Team, 2024) as the backbone language model and perform continued pretraining with a context length of 224K¹ over a total of 900M tokens. We follow Xiong et al. (2023) to increase RoPE (Su et al., 2023) base frequency during the continued pretraining and specifically set it to 1B. A constant learning rate of 1e-5 is maintained for a batch size of one million tokens across 1,000 training steps. Following Fu et al. (2024b), we construct the dataset used for long context training from Slimpajama (Cerebras, 2023) by upsampling documents longer than 4096 and keeping the domain mixture ratio unchanged. Multiple documents are packed into a single sequence separated by a BOS token.

We employed several optimization strategies to perform training on such long sequences. These includes FlashAttention-2 (Dao, 2023), Ring Attention (Liu et al., 2023a; Li et al., 2023c), activation checkpointing,

¹224K is the maximum we can fit with 8×A100-80G for Qwen-2-7B. We find that the embedding size significantly impacts the maximum sequence length in our optimized codebase. Qwen2 has a huge vocabulary of 152K tokens. For LLaMA2 with 32K vocabulary, we can train it with 700K context length.

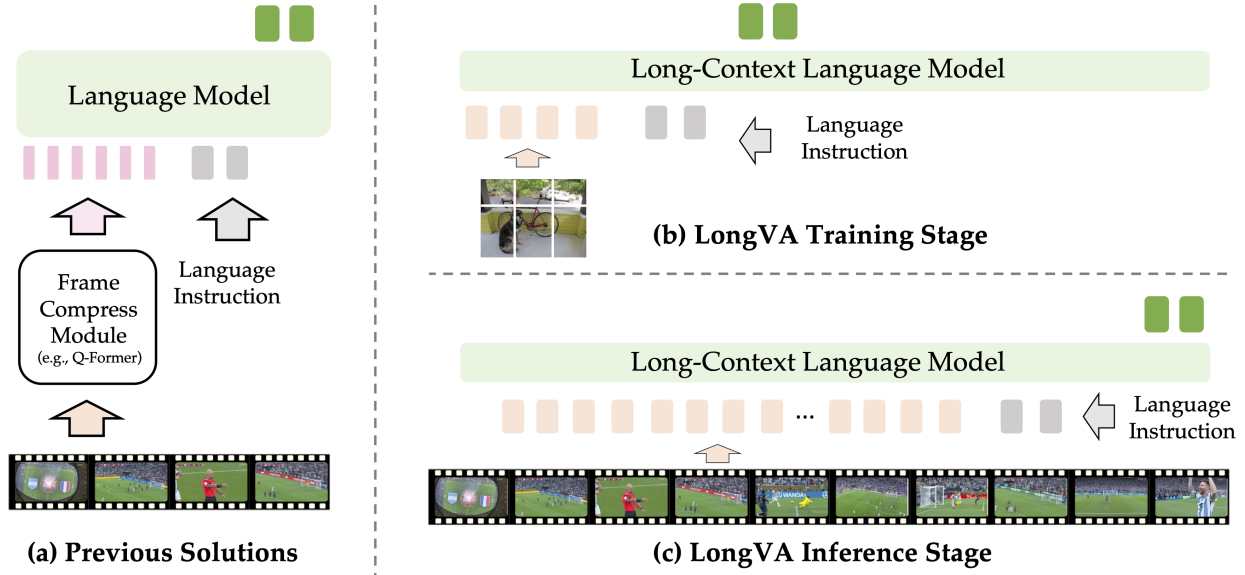


Figure 1: **Left:** to develop long vision models, previous studies proposed better visual resamplers to reduce the number of visual tokens. **Right:** LongVA approaches this problem from the angle of the language model. We leverage image data (short visual input) to align long-context LLM with vision. During the test time, LongVA can zero-shot process extremely long videos, thanks to the property of long context transfer.

and parameter offload (Rajbhandari et al., 2020). To balance the load across different GPUs, we shard the sequence in a zigzag way (Zhu, 2024) in ring attention. The resulting training framework is memory efficient and maintains very high GPU occupancy. Note that we do not use any parameter-efficient methods such as LoRA (Hu et al., 2021) or approximate attention (Child et al., 2019). With those optimizations, the compute used in long context training is minimal compared to that of language model pretraining, making it feasible for academic budgets. The long context training can finish in 2 days with 8 A100 GPUs.

In Figure 7, we evaluate the extended Qwen2 with the Needle-in-a-haystack (NIAH) test (AI, 2023; Gregory, 2024). It achieves perfect results within the training context length (224K) and generalizes even further. We find the vanilla NIAH to be a relatively trivial benchmark and further test it with 5 distractors randomly inserted into the documents. The detailed configuration can be found in Appendix 9.

3.2 Aligning Long Language Model Using Short Vision Data

Inspired by the *AnyRes* encoding scheme in LLaVA-NeXT (Liu et al., 2024b; Li et al., 2024a), we designed *UniRes* that provides a unified encoding scheme for both images and videos, as shown in Figure 2. Unlike *AnyRes* which retains a small base image and flattens ViT patches across the grids, *UniRes* removes the base image, flattens patches within each grid, and 2x2 pool the visual features by default (Appendix 10). This approach allows us to maintain consistent representation when extending image data into videos where multiple frames are viewed as multiple grids in a row.

Specifically, *UniRes* divides an input image of resolution $a \times b$ into smaller grids, each with a resolution of 336×336 pixels. This results in $(a//336) \times (b//336)$ grids. For very high-resolution images, we limit the maximum number of grids to 49, resizing images larger than this threshold. Each grid is separately encoded using CLIP-ViT-L-336px (Radford et al., 2021) and then projected through a 2-layer MLP to match the LM’s input dimension, resulting in 576 features per grid. We then apply 2x2 average pooling, finally converting an $a \times b$ image into $(a//336) \times (b//336) \times 144$ tokens. During inference, this visual encoding scheme allows videos to be represented as very long images (even though we do not train on videos). An N -frame video is treated as an image of size $336 \times (336 \times N)$, divided into N grids where each grid corresponds to a video

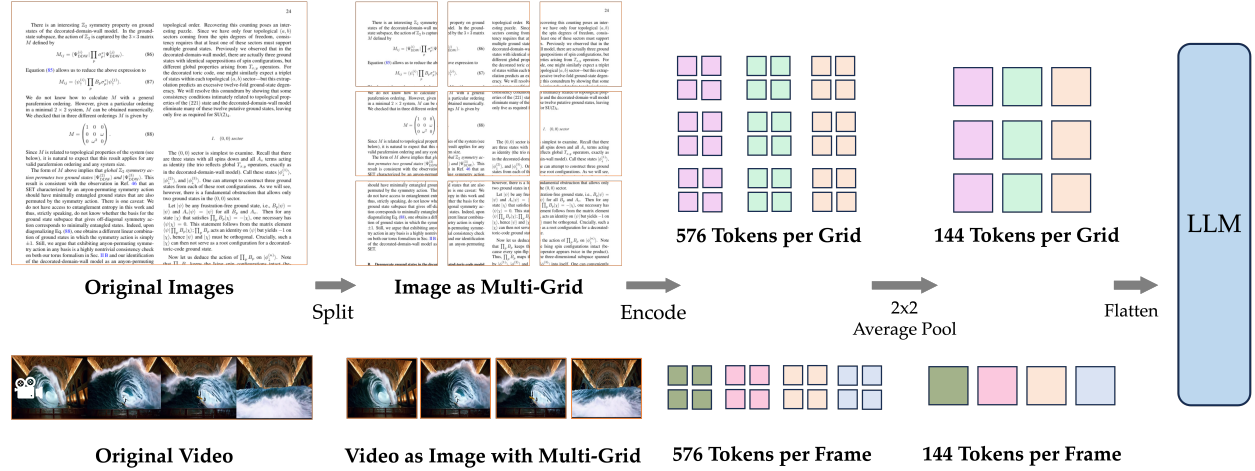


Figure 2: *UniRes*'s unified encoding scheme of images and videos. During training, images are divided into multiple grids. During inference, videos are treated as extended images with each frame considered as a grid.

frame. Using CLIP encoding, MLP projection, and average pooling, an N -frame video is encoded into $144N$ visual tokens.

To clearly ablate the long context transfer phenomenon from language to vision, we adopt a *train short, test long* protocol where we only use image-text data during training, but test on long videos. We trained our model using the same data recipe and two-stage training approach as LLaVA-1.6. Our experiments show that compared to *AnyRes*, *UniRes* has slightly lower scores on low-resolution image benchmarks (Table 7) but performs better on V-NIAH (Figure 4) and Video-MME (Table 4). We believe the unified encoding scheme for images and videos is crucial, thus choosing this as the encoding scheme of LongVA. The image-text alignment can be finished in 1.5 days. With 2 days for long context training on text, the total training cost of LongVA is 3.5 days on $8 \times A100$ -80G.

It is worth noting previous work largely inspired the design choice of LongVA. For example, Xiong et al. (2023) first demonstrates the effectiveness of long context continued pretraining with increased RoPE base frequency (thus decreasing the rotation angles). We sample the long text data following the guidance of (Fu et al., 2024b). We adopt the same vision encoder and training data as that of LLaVA-1.6 (Liu et al., 2024b). We try to keep our methods as simple as possible to clearly show the phenomenon of long context transfer without other confounders.

4 V-NIAH

To measure the context length of language models on extremely long input, earlier works calculate perplexity scores over long documents. Recently, many have started using the Needle-in-a-Haystack (NIAH) test to benchmark LLMs' ability to retrieve long context information precisely. We note that there is so far no benchmark to measure the visual context length of LLMs. To evaluate LongVA's capacity to locate and retrieve long-range visual information, we extend the NIAH test from text to video and propose V-NIAH.

As shown in Table 9, we designed 5 video question-answering problems as the needle and inserted each as a single frame into hours-long videos. We sampled the videos at 1 FPS as the visual input. The image of the needle is sourced from existing VQA benchmarks or AI-generated to avoid any contamination. The AI-generated images and questions are purposely chosen to be "counterfactual" or "counter-commonsense", ensuring the model cannot answer based on language knowledge alone. Each question includes a "locating prompt" so that a capable system or human can locate the needle frame from the video haystack and answer the question.

When testing LongVA with visual inputs of up to 3000 frames, one difficulty we encountered was that processing a 200K-token input requires up to 100GB of GPU memory for the KV cache for a 7B LM like

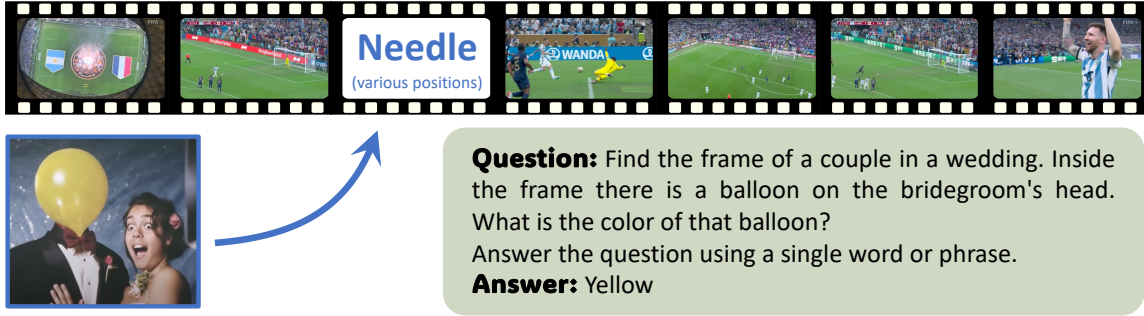


Figure 3: V-NIAH consists of a haystack video, a needle image, and a question related to the needle. The needle is inserted at various positions in the haystack video.

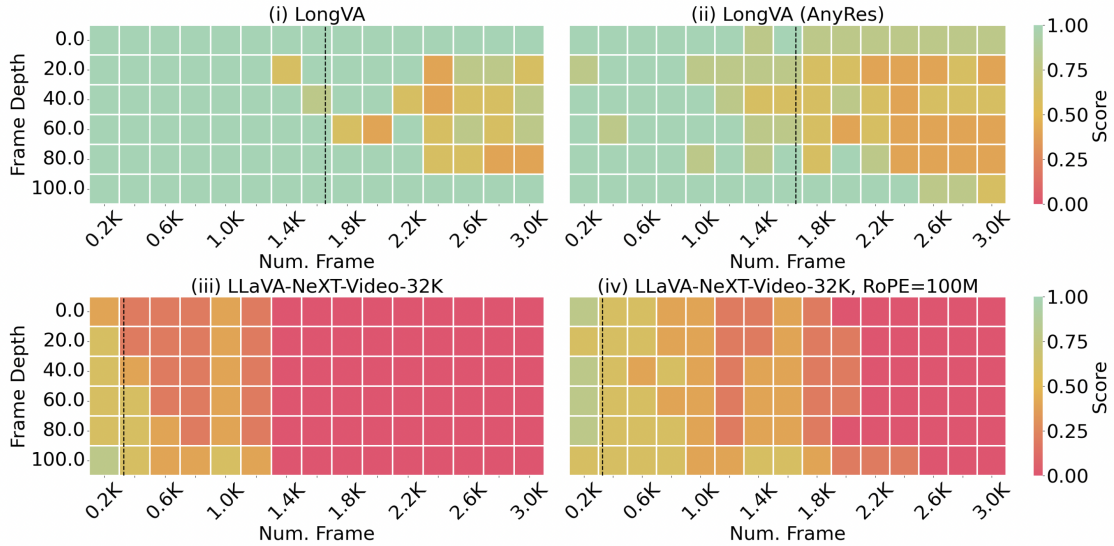


Figure 4: The V-NIAH results of LongVA and its baselines. The x-axis represents the total number of frames in the video haystack. The y-axis shows the position where the needle image is located. For instance, a frame depth of 0% would place the needle image at the very beginning of the video. The black dotted line denotes the training length of the backbone language model, with each frame corresponding to 144 tokens.

LLaMA. Even with advanced LM serving systems like vLLM (Kwon et al., 2023) with tensor parallelism to shard the KV cache across multiple GPUs, the sampling process remains extremely slow due to limited memory and batchsize. To address this, we used "perplexity-based" evaluation to measure the correctness of the model output. We first encode all frames and save their corresponding visual embeddings. During the evaluation, we only load the language model from LongVA and concatenate the visual embeddings, question tokens, and answer tokens for a single forward pass with ring attention. This approach makes the workload compute-bound and eliminates the need to cache the KV state. The model's output is considered correct only if the highest output logits index of all tokens in the answer span matches the correct answer.

5 Experiments

We primarily assess the long visual capability of LongVA on two benchmarks: V-NIAH (Section 5.1 and Video-MME (Fu et al., 2024a) (Section 5.2). V-NIAH provides quick signals about the visual context length of LongVA. However, it only tests the model's ability to retrieve information and does not cover other abilities necessary for a real-world long video assistant. Therefore, we also include LongVA's performance

Model	LLM Params	Frames	Short	Medium	Long	Overall
InternVL-Chat-V1.5 (Chen et al., 2023b)	20B	10	60.2	46.4	45.6	50.7
LLaVA-NeXT-Video-34B (Zhang et al., 2024b)	34B	32	61.7	50.1	44.3	52.0
VILA-1.5 (Lin et al., 2023b)	34B	8	68.1	58.1	50.8	59.0
Qwen-VL-Chat (Qwen, 2024)	7B	4	46.9	38.7	37.8	41.1
Video-LLaVA (Lin et al., 2023a)	7B	8	45.3	38.0	36.2	39.9
ST-LLM (Liu et al., 2024c)	7B	64	45.7	36.8	31.3	37.9
VideoChat2-Mistral (Li et al., 2024b)	7B	16	48.3	37.0	33.2	39.5
Chat-UniVi-V1.5 (Jin et al., 2023)	7B	64	45.7	40.3	35.8	40.6
VideoLLaMA2 (Cheng et al., 2024)	8B	16	56.0	45.4	42.1	47.9
LLaVA-NeXT-Qwen2	7B	32	59.8	48.2	44.7	50.9
LongVA	7B	8	55.6	46.0	41.7	47.7
		16	59.9	47.0	43.8	50.2
		32	61.7	49.1	45.9	52.2
		64	61.8	51.7	44.6	52.7
		128	61.6	50.6	47.1	53.1
		384	60.9	49.9	46.1	52.3

Table 4: Performance comparison of various LMMs on Video-MME (Fu et al., 2024a) *without subtitles*. LongVA achieves state-of-the-art results among 7B models. Its performance also increases with denser sampling of video frames.

on Video-MME, a comprehensive evaluation suite for video LMMs that includes diverse data types and qualitative annotations. Video-MME is an ideal benchmark for assessing LMMs’ ability to handle long videos in real-world scenarios, given its average video duration of 1017 seconds and the inclusion of short, medium, and long subsets. We further include the benchmark results on MLVU (Zhou et al., 2024a) in Appendix 7.

We mainly compare LongVA against other image and video LMMs. To validate the phenomenon of *long context transfer*, we trained LLaVA-Next-Qwen2, a baseline model based on Qwen2-7B-Instruct using the LLaVA-NeXT (Liu et al., 2023b; Li et al., 2024a) training recipe. Additionally, we trained LongVA (*AnyRes*) to showcase the advantages of our *UniRes* encoding scheme. The difference between LongVA and our baselines can be found in Table 5.

5.1 V-NIAH Results

Long context transfers from language to vision Figure 4 shows the V-NIAH performance of LongVA and other LMMs. Specifically, Figure 4 (iii) demonstrates that the visual context length of LLaVA-NeXT-Video-32K (Zhang et al., 2024b) is constrained by the 32K context length of its language backbone, Mistral-7B-Instruct-v0.2 (Jiang et al., 2023), equivalent to approximately 200 frames. Beyond this limit, the V-NIAH accuracy drops significantly. As a stronger baseline, we include the results of LLaVA-NeXT-Video-32K enhanced with a training-free length extrapolation algorithm (bloc97, 2024) by increasing its RoPE base frequency. We empirically determine the optimal extrapolation frequency by choosing from [3M, 10M, 30M, 100M, 300M, 1B]. As indicated in Figure 4 (iv), although this training-free extrapolation allows the model to process information across an extended context, the improvement is marginal. These findings led us to develop LongVA, a model that unlocks the visual context by extending the language model purely on text. As shown in Figure 4 (i), LongVA can almost perfectly retrieve information and answer the needle question for input frames fewer than 2000. Although we only trained LongVA’s language backbone on a context length of 224K (equivalent to 1555 frames), it generalizes well beyond that, maintaining satisfactory performance within 3000 frames. Those results clearly corroborate of hypothesis of *long context transfer*.

Unified encoding enables better visual context extrapolation We also present the V-NIAH heatmap of LongVA trained with *AnyRes* encoding scheme, keeping all other factors unchanged in Figure 4 (ii). LongVA-*AnyRes* demonstrates strong retrieval capabilities. However, its performance still lags behind

Model	Qwen2-224K	UniRes
LLaVA-Next-Qwen2	×	×
LongVA (<i>AnyRes</i>)	✓	×
LongVA	✓	✓

Table 5: LongVA and its baselines.

Model	frames	NeXTQA		ActivityNetQA Score	Consistency	VideoChatGPT				Video-DD Score
		MC	OE			Correctness	Detail	Context	Temporal	
LLaVA-NeXT-Video	32	57.93	26.90	3.20	3.12	3.39	3.29	3.92	2.60	3.32
LongVA	8	50.78	27.71	2.73	3.73	3.09	3.14	3.72	2.39	3.19
LongVA	16	61.61	27.87	2.78	3.61	3.13	3.15	3.75	2.40	3.22
LongVA	32	67.08	27.87	2.80	3.65	3.08	3.10	3.74	2.28	3.19
LongVA	64	68.27	27.81	2.84	3.64	3.05	3.09	3.77	2.44	3.14
LongVA-DPO	32	69.26	28.02	2.80	4.07	3.55	3.32	4.09	2.86	3.58

Table 6: Video evaluation results for LongVA on various short video benchmarks with comparison to 7B scale models.

LongVA trained with UniRes. We believe that the unified representation of images and videos in UniRes, where a video is encoded in the same way as a long image, enhances the long context transfer from language to vision. This approach also facilitates effective training with short vision data (images) and enables zero-shot understanding of long videos during inference.

5.2 Video Evaluation

On Video-MME (Table 4), LongVA achieves *state-of-the-art* performance among LMMs under 10B parameters, rivaling much larger ones such as LLaVA-NeXT-Video-34B (Zhang et al., 2024b) and InternVL-Chat-V1.5 (Chen et al., 2023b). Notably, LongVA is trained without any video data, so its performance on video can be considered *zero-shot*. As the number of sampled frames increases, LongVA shows improved performance on the long subset, handling up to 384 frames². Even though LongVA’s score slightly drops when we upsample from 128 to 384 frames, it maintains a competitive performance. To our knowledge, LongVA is the *only* open-source model that can handle such large input frames on Video-MME. These findings highlight the *long context transfer* effect, where LongVA, originating from a long context language model, can process significantly more frames than its baseline, despite being trained on the same multimodal data.

We also tested LongVA on shorter benchmarks with average video durations under 120 seconds. As indicated in Table 6, although LongVA scores higher with more densely sampled frames on datasets such as NeXTQA (Xiao et al., 2021b) and ActivityNetQA (Yu et al., 2019b), the gains quickly plateau and are not as significant as those observed in Video-MME, which can be attributed to the shorter duration of these datasets. On the VideoChatGPT (Maaz et al., 2023) and Video Detailed Description (Video-DD) (Maaz et al., 2023) benchmarks, increasing frames does not lead to better performance, and LongVA generally achieves lower scores compared to LLaVA-NeXT-Video-7B. Since both benchmarks use OpenAI’s GPT API as a judge, we believe their metrics are closely related to the answering format. To address this, we perform a lightweight Direct Preference Optimization (DPO) on the LLaVA-Hound-DPO (Zhang et al., 2024a) dataset. We observe significantly improved performance for LongVA-DPO, confirming the findings in Zhang et al. (2024a).

5.3 Image Evaluation

Model	AI2D	ChartQA	DocVQA	InfoVQA	RealworldQA	MMMU
LLaVA-1.6-Vicuna	66.6	54.8	74.4	37.1	57.8	35.1
LLaVA-NeXT-LLaMA3	71.6	69.5	78.2	37.6	60.0	41.7
LLaVA-NeXT-Qwen2	73.5	74.0	81.3	42.0	61.6	41.9
LongVA (<i>AnyRes</i>)	73.1	74.4	81.5	43.3	62.4	42.1
LongVA (<i>UniRes</i>)	70.7	70.4	80.8	49.4	60.0	42.6

Table 7: Image evaluation results for LongVA on multiple benchmarks. Compared to other image multimodal models, our methods maintain high performance and achieve better scores on InfoVQA (Mathew et al., 2020). We further evaluate our model on various image benchmarks to investigate the image performance of LongVA (Table 7). Compared to the LongVA (*AnyRes*) baseline, LongVA with *UniRes* achieves significantly increased

²We limited our analysis to 384 frames due to computational and memory constraints as detailed in Section 4.

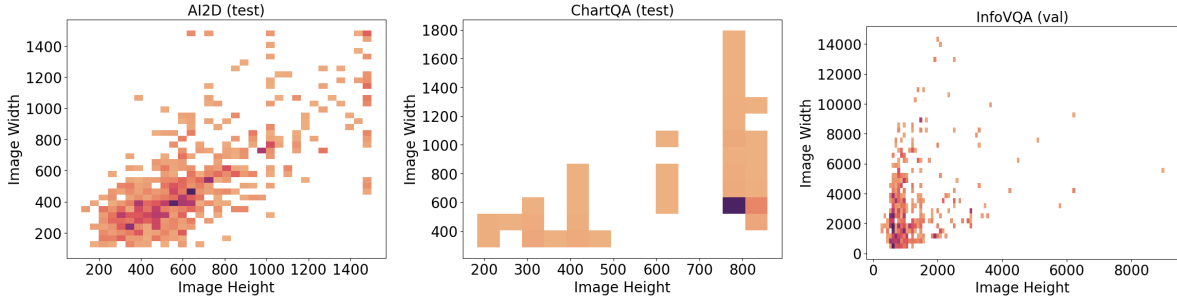


Figure 5: The 2D-histogram of the image width and height of different image benchmarks. InfoVQA(Mathew et al., 2020) consists of many high-resolution images compared to other benchmarks.

performance on InfoVQA (Mathew et al., 2020), while the scores drop to some extent on AI2D (Kembhavi et al., 2016) and ChartQA (Masry et al., 2022). On DocVQA (Mathew et al., 2020), RealworldQA (xAI, 2024), and MMMU (Yue et al., 2023), LongVA is able to match its baseline’s performance. To better understand this phenomenon, we recorded and analyzed the image size of those datasets, as shown in Figure 5. We found that InfoVQA consists of higher-resolution images, while many images in AI2D and ChartQA are smaller than 768×768 . Compared to *Anyres*, *UniRes* operate 2×2 average pooling on each image, reducing to $1/4$ visual tokens per image grid. However, the grid upper bound is set to 49 for *UniRes* while 4 for *AnyRes*, so *UniRes* may produce more image grids if the input images are of higher resolution. By using more grids per image, *UniRes* allocates more visual tokens on datasets such as InfoVQA, achieving superior performance compared to the previous 7B LLaVA model. However, most of the images in ChartQA and AI2D require fewer than 4 grids to represent. This may explain why the image performance decreases on those benchmarks.

6 Qualitative Results

The qualitative results of LongVA-DPO are illustrated in Figure 6. The short video example comes from (Xie et al., 2023) and the two long videos are sourced from link1 and link2, respectively. In the figure, LongVA accurately describes the short, humorous video involving individuals playfully interacting with condiments. It also identifies specific details in long videos, such as the color of a train and the colors of umbrellas used in a scene, showcasing its proficiency in retrieving and interpreting visual information over extended video contexts. These capabilities highlight LongVA’s potential to overcome the challenges associated with processing and understanding extremely long videos.

7 MLVU Results

Table 8 includes the evaluation results by the authors of MLVU (Zhou et al., 2024a) on their benchmark. LongVA achieves *state-of-the-art* results among open-source models and is only second to GPT-4o.

8 Visual Needle In A Haystack Test

Table 9 lists the five VQA needles we used for V-NIAH. The 5 visual questions and answers are the only places where human annotation is involved in the construction of V-NIAH, making it an ideal testbed to benchmark LMMs’ long context capability.

9 Needle In A Haystack Test

When evaluating the Needle In A Haystack task (Gregory, 2024), we focus specifically on an easier-to-evaluate variant (AI, 2023) that involves identifying and retrieving random numbers associated with various randomly assigned cities from the context. The input to the language model has below template:

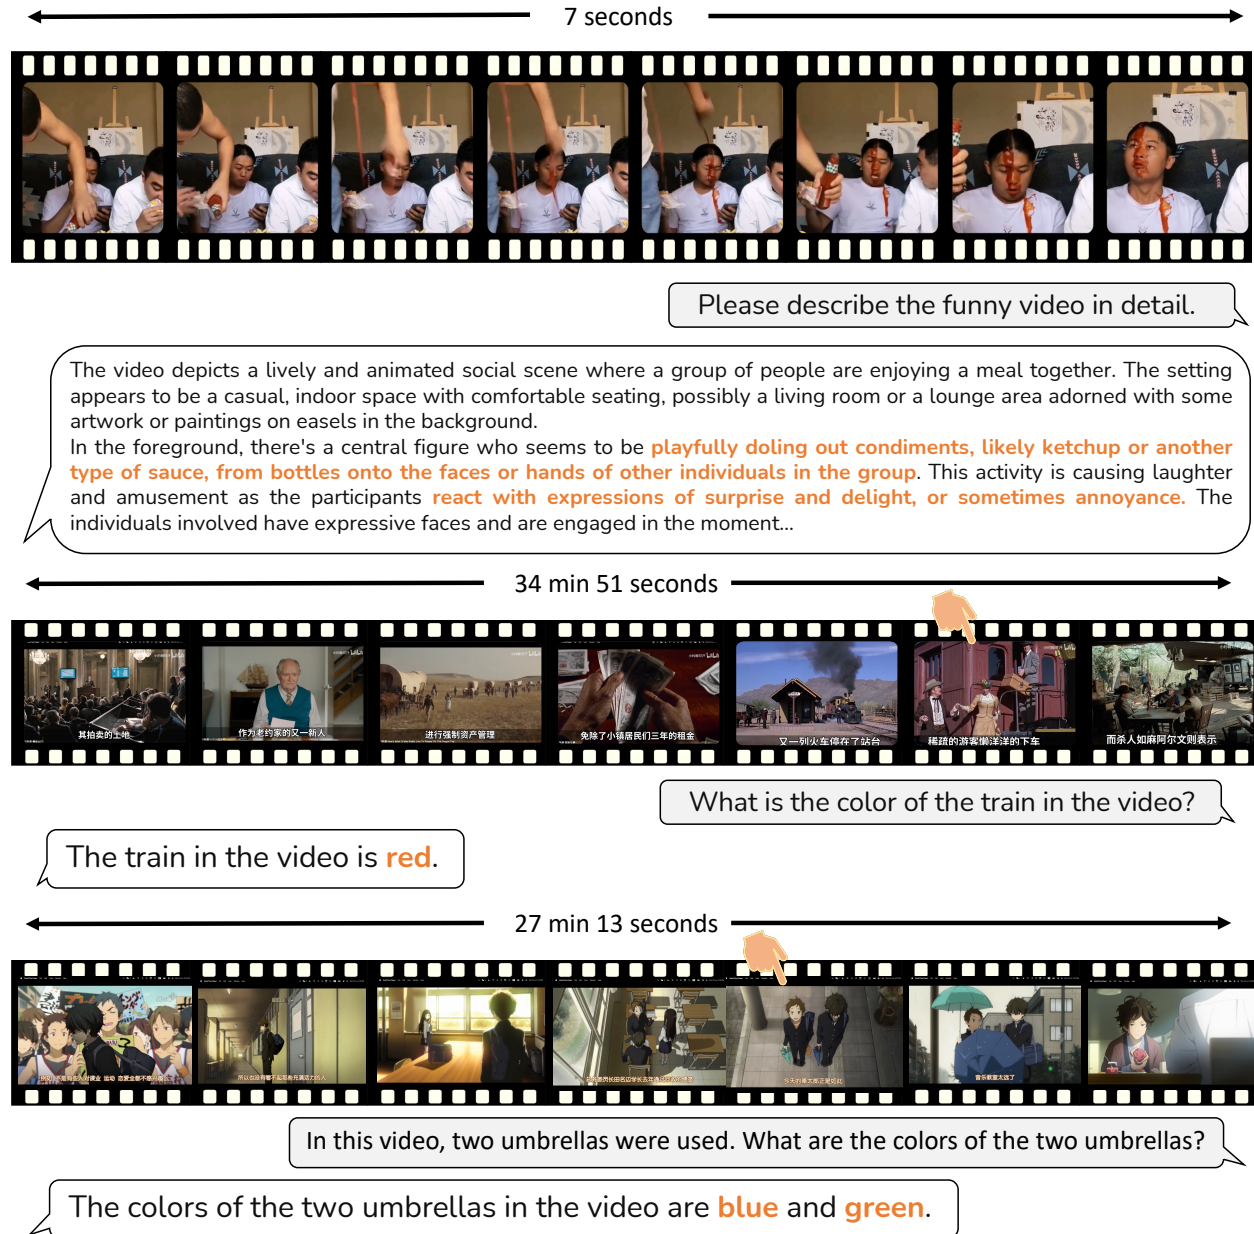


Figure 6: Qualitative Result of the LongVA-DPO. Our model demonstrates superior capability in understanding both short and long videos.

Methods	Input	Holistic			Single Detail		Multi Detail				Averages	
		TR	AR	VS	NQA	ER	PQA	SSC	AO	AC	M-Avg	G-Avg
GPT-4o (OpenAI, 2024)	0.5 fps	87.4	74.5	4.90	64.8	57.1	65.1	6.69	56.7	46.3	64.6	5.80
LLaVA-1.6 (Liu et al., 2024b)	16 frm	60.6	41.0	2.11	43.1	38.4	41.0	4.35	25.5	25.7	39.3	3.23
InternVL-1.5 (Chen et al., 2023b)	16 frm	78.8	67.0	3.16	52.7	43.5	54.4	4.88	32.8	23.8	50.4	4.02
MovieChat (Song et al., 2024b)	2048 frm	29.5	25.0	2.33	24.2	24.7	25.8	3.23	28.6	22.8	25.8	2.78
TimeChat (Ren et al., 2024)	96 frm	23.1	27.0	2.54	24.5	28.4	25.8	4.29	24.7	32.0	30.9	3.42
LLaMA-VID (Li et al., 2023d)	1 fps	50.8	34.5	3.22	30.1	32.7	32.5	5.22	23.9	27.8	33.2	4.22
MA-LMM (He et al., 2024)	1000 frm	51.9	35.5	2.12	43.1	38.9	35.8	4.80	25.1	24.3	36.4	3.46
ShareGPT4Video (Chen et al., 2024b)	16 frm	75.8	51.5	2.52	47.6	43.2	48.4	5.02	34.0	23.3	46.4	3.77
VideoChat2_HD (Li et al., 2024b)	16 frm	77.3	60.5	3.38	46.2	48.9	50.1	4.59	23.2	29.1	47.9	3.99
VideoLlaMA2 (Cheng et al., 2024)	16 frm	74.6	64.5	2.79	49.9	43.8	45.1	5.18	34.0	27.4	48.5	3.99
LongVA (ours)	256 frm	83.3	58.5	3.39	69.3	50.0	67.2	5.26	38.6	27.2	56.3	4.33

Table 8: Evaluation results by the authors of MLVU (Zhou et al., 2024a). The highest scores excluding GPT-4o are bolden. TR: Topic Reasoning. AR: Anomaly Recognition. VS: Video Summary; NQA: Needle QA; ER: Ego Reasoning; PQA: Plot QA; SSC: Sub-Scene Captioning; AO: Action Order; AC: Action Count; M-Avg: the average performance of multiple-choice tasks; G-Avg: the average performance of generation tasks.

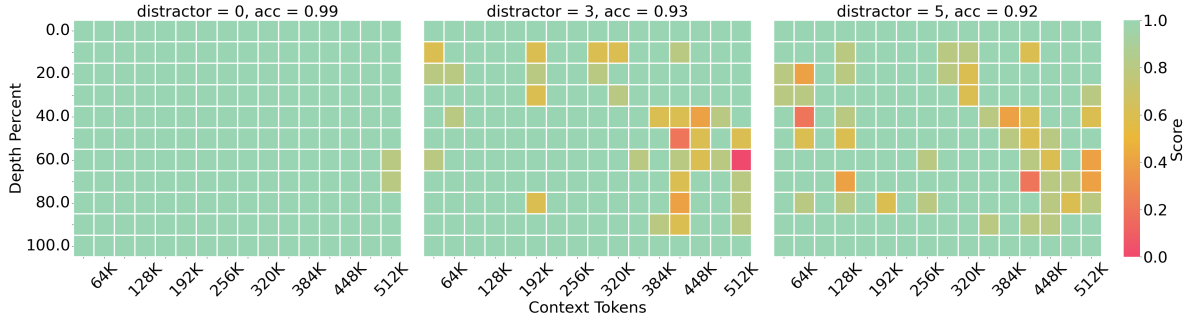


Figure 7: The NIAH results of Qwen-7B-Instruct after long context training.

```
This is a very long story book: <book> {haystack + needle + haystack} </book>.\n
Based on the content of the book, Question: What is the special magic Singapore
number? Answer: The special magic Singapore number is:
```

We insert a needle with the key Singapore and a 7-digit randomly sampled magic number as the value into the haystack of Paul Graham’s Essays. The needle has the following format:

```
\nThe special magic {City} number is: {XXXXXXX}.\n
```

We iterate over various document depths (where the needle is placed) and context lengths to measure the performance. For each depth and context length, we conducted the test 5 times, each time with a different 7-digit needle. We also come up with a harder version where we also insert several (3 or 5) other needles with the same format but different city name as distractors. The results are shown in Figure 7.

10 UniRes Encoding Scheme

Figure 8 indicates the difference between *AnyRes* and *UniRes*. Given a high-resolution image and assuming we use CLIP-ViT-L-336px as the vision encoder, both *AnyRes* and *UniRes* will divide it into multiple grids, each with the size 336x336. However, *AnyRes* will have a smaller version of the full image as the base image and prepended before the high-resolution image grids. Additionally, *UniRes* flattens the encoded image feature in a raster-order *within* each grid, while *AnyRes* combines all the grids as a big feature map and flattens them *across* the border of the grid. *UniRes* also apply 2x2 average pooling on the image feature. As

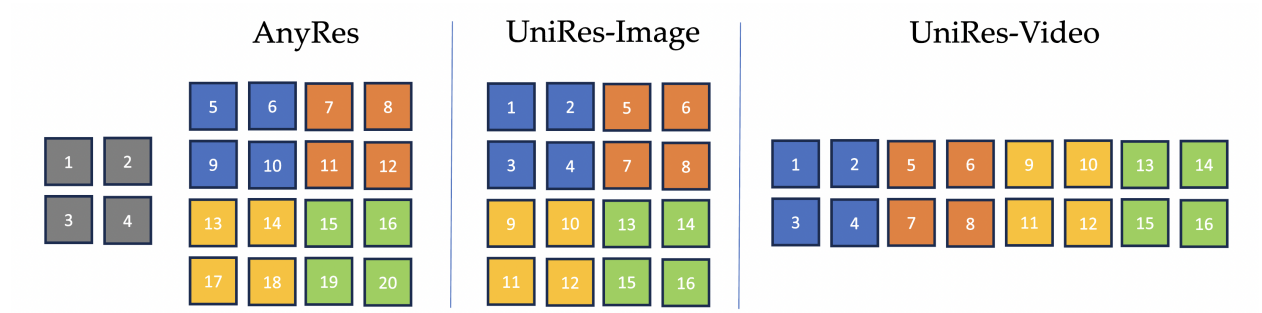


Figure 8: The difference between *AnyRes* and *UniRes*, assuming the image is divided into 2x2 grids and the video has 4 frames. The number indicates the flattening order. Additionally, *UniRes* applies 2x2 average pooling to both images and videos *after* the MLP projector between the vision encoder and the language model.

context length of video LMMs. We hope this work inspires further research in the field of long video LMMs and multimodal agents.

References

- Arize AI. Llm testneedleinahaystack, 2023. URL https://github.com/Arize-ai/LLMTest_NeedleInAHaystack. 4, 9
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, Roman Ring, Eliza Rutherford, Serkan Cabi, Tengda Han, Zhitao Gong, Sina Samangooei, Marianne Monteiro, Jacob L Menick, Sebastian Borgeaud, Andy Brock, Aida Nematzadeh, Sahand Sharifzadeh, Mikołaj Bińkowski, Ricardo Barreira, Oriol Vinyals, Andrew Zisserman, and Karén Simonyan. Flamingo: a visual language model for few-shot learning. In S. Koyejo, S. Mohamed, A. Agarwal, D. Belgrave, K. Cho, and A. Oh (eds.), *Advances in Neural Information Processing Systems*, volume 35, pp. 23716–23736. Curran Associates, Inc., 2022. URL https://proceedings.neurips.cc/paper_files/paper/2022/file/960a172bc7fbf0177ccccbb411a7d800-Paper-Conference.pdf. 2
- Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pp. 2425–2433, 2015. 3
- Anas Awadalla, Irena Gao, Josh Gardner, Jack Hessel, Yusuf Hanafy, Wanrong Zhu, Kalyani Marathe, Yonatan Bitton, Samir Gadre, Shiori Sagawa, Jenia Jitsev, Simon Kornblith, Pang Wei Koh, Gabriel Ilharco, Mitchell Wortsman, and Ludwig Schmidt. Openflamingo: An open-source framework for training large autoregressive vision-language models. *arXiv preprint arXiv:2308.01390*, 2023. 2
- Yushi Bai, Xin Lv, Jiajie Zhang, Yuze He, Ji Qi, Lei Hou, Jie Tang, Yuxiao Dong, and Juanzi Li. Longalign: A recipe for long context alignment of large language models, 2024. 3
- bloc97. Ntk-aware scaled rope allows llama models to have extended (8k+) context size without any fine-tuning and minimal perplexity degradation., 2024. URL https://www.reddit.com/r/LocalLLaMA/comments/141z7j5/ntkaware_scaled_rope_allows_llama_models_to_have/. 3, 7
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 1877–1901. Curran Associates, Inc., 2020. URL https://proceedings.neurips.cc/paper_files/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf. 1
- Mu Cai, Jianwei Yang, Jianfeng Gao, and Yong Jae Lee. Matryoshka multimodal models, 2024. 1, 2
- Cerebras. cerebras slimpajama-627b, 2023. URL <https://huggingface.co/datasets/cerebras/SlimPajama-627B>. 3
- Liang Chen, Haozhe Zhao, Tianyu Liu, Shuai Bai, Junyang Lin, Chang Zhou, and Baobao Chang. An image is worth 1/2 tokens after layer 2: Plug-and-play inference acceleration for large vision-language models, 2024a. 1
- Lin Chen, Xilin Wei, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Bin Lin, Zhenyu Tang, Li Yuan, Yu Qiao, Dahua Lin, Feng Zhao, and Jiaqi Wang. Sharegpt4video: Improving video understanding and generation with better captions, 2024b. 3, 11
- Shouyuan Chen, Sherman Wong, Liangjian Chen, and Yuandong Tian. Extending context window of large language models via positional interpolation. *arXiv preprint arXiv:2306.15595*, 2023a. 3
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Zhong Muyan, Qinglong Zhang, Xizhou Zhu, Lewei Lu, et al. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023b. 7, 8, 11

- Zesen Cheng, Sicong Leng, Hang Zhang, Yifei Xin, Xin Li, Guanzheng Chen, Yongxin Zhu, Wenqi Zhang, Ziyang Luo, Deli Zhao, and Lidong Bing. Videollama 2: Advancing spatial-temporal modeling and audio understanding in video-llms, 2024. 1, 2, 7, 11
- Rewon Child, Scott Gray, Alec Radford, and Ilya Sutskever. Generating long sequences with sparse transformers, 2019. 4
- Cohere. Introducing command r+: A scalable llm built for business, 2024. URL <https://cohere.com/blog/command-r-plus-microsoft-azure>. 1
- Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-language models with instruction tuning, 2023. 1
- Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning, 2023. 3
- Yiran Ding, Li Lyna Zhang, Chengruidong Zhang, Yuanyuan Xu, Ning Shang, Jiahang Xu, Fan Yang, and Mao Yang. Longrope: Extending llm context window beyond 2 million tokens. *arXiv preprint arXiv:2402.13753*, 2024. 3
- Chaoyou Fu, Yuhan Dai, Yondong Luo, Lei Li, Shuhuai Ren, Renrui Zhang, Zihan Wang, Chenyu Zhou, Yunhang Shen, Mengdan Zhang, Peixian Chen, Yanwei Li, Shaohui Lin, Sirui Zhao, Ke Li, Tong Xu, Xiawu Zheng, Enhong Chen, Rongrong Ji, and Xing Sun. Video-mme: The first-ever comprehensive evaluation benchmark of multi-modal llms in video analysis, 2024a. 2, 3, 6, 7
- Yao Fu, Rameswar Panda, Xinyao Niu, Xiang Yue, Hannaneh Hajishirzi, Yoon Kim, and Hao Peng. Data engineering for scaling language models to 128k context, 2024b. 3, 5
- Gemini. Gemini: A family of highly capable multimodal models, 2024. 1
- Kamradt Gregory. Llmtest needleinahaystack, 2024. URL https://github.com/gkamradt/LLMTest_NeedleInAHaystack. 2, 3, 4, 9
- Madeleine Grunde-McLaughlin, Ranjay Krishna, and Maneesh Agrawala. Agqa: A benchmark for compositional spatio-temporal reasoning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 11287–11297, 2021. 3
- Bo He, Hengduo Li, Young Kyun Jang, Menglin Jia, Xuefei Cao, Ashish Shah, Abhinav Shrivastava, and Ser-Nam Lim. Ma-lmm: Memory-augmented large multimodal model for long-term video understanding, 2024. URL <https://arxiv.org/abs/2404.05726>. 11
- Edward J. Hu, Yelong Shen, Phillip Wallis, Zeyuan Allen-Zhu, Yuanzhi Li, Shean Wang, Lu Wang, and Weizhu Chen. Lora: Low-rank adaptation of large language models, 2021. 4
- Sam Ade Jacobs, Masahiro Tanaka, Chengming Zhang, Minjia Zhang, Shuaiwen Leon Song, Samyam Rajbhandari, and Yuxiong He. DeepSpeed ulyssees: System optimizations for enabling training of extreme long sequence transformer models, 2023. 3
- Yunseok Jang, Yale Song, Youngjae Yu, Youngjin Kim, and Gunhee Kim. Tgif-qa: Toward spatio-temporal reasoning in visual question answering. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2758–2766, 2017. 3
- Albert Q. Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot, Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, L  lio Renard Lavaud, Marie-Anne Lachaux, Pierre Stock, Teven Le Scao, Thibaut Lavril, Thomas Wang, Timoth  e Lacroix, and William El Sayed. Mistral 7b, 2023. 7
- Peng Jin, Ryuichi Takanobu, Caiwan Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding. *arXiv preprint arXiv:2311.08046*, 2023. 2, 7

- Peng Jin, Ryuichi Takanobu, Wancai Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified visual representation empowers large language models with image and video understanding, 2024. 1, 2
- Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A diagram is worth a dozen images, 2016. 9
- Woosuk Kwon, Zhuohan Li, Siyuan Zhuang, Ying Sheng, Lianmin Zheng, Cody Hao Yu, Joseph E. Gonzalez, Hao Zhang, and Ion Stoica. Efficient memory management for large language model serving with page-dattention. In *Proceedings of the ACM SIGOPS 29th Symposium on Operating Systems Principles*, 2023. 6
- Hugo Laurençon, Lucile Saulnier, Léo Tronchon, Stas Bekman, Amanpreet Singh, Anton Lozhkov, Thomas Wang, Siddharth Karamcheti, Alexander M. Rush, Douwe Kiela, Matthieu Cord, and Victor Sanh. Obelics: An open web-scale filtered dataset of interleaved image-text documents, 2023. 2
- Bo Li, Yuanhan Zhang, Liangyu Chen, Jinghao Wang, Jingkan Yang, and Ziwei Liu. Otter: A multi-modal model with in-context instruction tuning, 2023a. 2
- Bo Li, Hao Zhang, Kaichen Zhang, Dong Guo, Yuanhan Zhang, Renrui Zhang, Feng Li, Ziwei Liu, and Chunyuan Li. Llava-next: What else influences visual instruction tuning beyond data?, May 2024a. URL <https://llava-vl.github.io/blog/2024-05-25-llava-next-ablations/>. 4, 7
- Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image pre-training with frozen image encoders and large language models, 2023b. 1, 2
- KunChang Li, Yinan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang, and Yu Qiao. Videochat: Chat-centric video understanding, 2024b. 2, 3, 7, 11
- Shenggui Li, Fuzhao Xue, Chaitanya Baranwal, Yongbin Li, and Yang You. Sequence parallelism: Long sequence training from system perspective. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 2391–2404, Toronto, Canada, July 2023c. Association for Computational Linguistics. doi: 10.18653/v1/2023.acl-long.134. URL <https://aclanthology.org/2023.acl-long.134>. 3
- Yanwei Li, Chengyao Wang, and Jiaya Jia. Llama-vid: An image is worth 2 tokens in large language models, 2023d. 1, 2, 11
- Bin Lin, Yang Ye, Bin Zhu, Jiayi Cui, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united visual representation by alignment before projection, 2023a. 1, 7
- Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz, Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models, 2023b. 7
- Hao Liu, Matei Zaharia, and Pieter Abbeel. Ring attention with blockwise transformers for near-infinite context, 2023a. 3
- Hao Liu, Wilson Yan, Matei Zaharia, and Pieter Abbeel. World model on million-length video and language with ringattention. *arXiv preprint*, 2024a. 3
- Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction tuning, 2023b. 2, 7
- Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning, 2023c. 1, 2
- Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee. Llava-next: Improved reasoning, ocr, and world knowledge, January 2024b. URL <https://llava-vl.github.io/blog/2024-01-30-llava-next/>. 1, 2, 4, 5, 11
- Ruyang Liu, Chen Li, Haoran Tang, Yixiao Ge, Ying Shan, and Ge Li. St-llm: Large language models are effective temporal learners, 2024c. 2, 7

- Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt: Towards detailed video understanding via large vision and language models, 2023. 1, 2, 3, 8
- Karttikeya Mangalam, Raiymbek Akshulakov, and Jitendra Malik. Egoschema: A diagnostic benchmark for very long-form video language understanding, 2023. 3
- Ahmed Masry, Do Xuan Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. Chartqa: A benchmark for question answering about charts with visual and logical reasoning, 2022. 9
- Minesh Mathew, Dimosthenis Karatzas, R Manmatha, and CV Jawahar. Docvqa: A dataset for vqa on document images. corr abs/2007.00398 (2020). *arXiv preprint arXiv:2007.00398*, 2020. 8, 9
- Mistral. Mixtral 8x22b: Cheaper, better, faster, stronger, 2024. URL <https://mistral.ai/news/mixtral-8x22b/>. 1
- OpenAI. Hello gpt-4o, 2024. URL <https://openai.com/index/hello-gpt-4o/>. 11
- Aitor Ormazabal, Che Zheng, Cyprien de Masson d’Autume, Dani Yogatama, Deyu Fu, Donovan Ong, Eric Chen, Eugenie Lamprecht, Hai Pham, Isaac Ong, et al. Reka core, flash, and edge: A series of powerful multimodal language models. *arXiv preprint arXiv:2404.12387*, 2024. 1
- Bowen Peng, Jeffrey Quesnelle, Honglu Fan, and Enrico Shippole. Yarn: Efficient context window extension of large language models. In *The Twelfth International Conference on Learning Representations*, 2023. 3
- Qwen. Introducing qwen-vl, 2024. URL <https://qwenlm.github.io/blog/qwen-vl/>. 1, 2, 7
- Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, Gretchen Krueger, and Ilya Sutskever. Learning transferable visual models from natural language supervision, 2021. 4
- Samyam Rajbhandari, Jeff Rasley, Olatunji Ruwase, and Yuxiong He. Zero: Memory optimizations toward training trillion parameter models, 2020. 4
- Shuhuai Ren, Linli Yao, Shicheng Li, Xu Sun, and Lu Hou. Timechat: A time-sensitive multimodal large language model for long video understanding, 2024. 2, 3, 11
- Baptiste Rozière, Jonas Gehring, Fabian Gloeckle, Sten Sootla, Itai Gat, Xiaoqing Ellen Tan, Yossi Adi, Jingyu Liu, Romain Sauvestre, Tal Remez, Jérémy Rapin, Artyom Kozhevnikov, Ivan Evtimov, Joanna Bitton, Manish Bhatt, Cristian Canton Ferrer, Aaron Grattafiori, Wenhan Xiong, Alexandre Défossez, Jade Copet, Faisal Azhar, Hugo Touvron, Louis Martin, Nicolas Usunier, Thomas Scialom, and Gabriel Synnaeve. Code llama: Open foundation models for code, 2024. 3
- Yuzhang Shang, Mu Cai, Bingxin Xu, Yong Jae Lee, and Yan Yan. Llava-prumerge: Adaptive token reduction for efficient large multimodal models, 2024. 1
- Dingjie Song, Shunian Chen, Guiming Hardy Chen, Fei Yu, Xiang Wan, and Benyou Wang. Milebench: Benchmarking mllms in long context, 2024a. URL <https://arxiv.org/abs/2404.18532>. 3
- Enxin Song, Wenhao Chai, Guanhong Wang, Yucheng Zhang, Haoyang Zhou, Feiyang Wu, Haozhe Chi, Xun Guo, Tian Ye, Yanting Zhang, Yan Lu, Jenq-Neng Hwang, and Gaoang Wang. Moviechat: From dense token to sparse memory for long video understanding, 2024b. 1, 2, 11
- Jianlin Su, Yu Lu, Shengfeng Pan, Ahmed Murtadha, Bo Wen, and Yunfeng Liu. Roformer: Enhanced transformer with rotary position embedding, 2023. 3
- PaLM Team. Palm 2 technical report, 2023. 1
- Qwen2 Team. Qwen2 technical report, 2024. 3

- Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, Aurelien Rodriguez, Armand Joulin, Edouard Grave, and Guillaume Lample. Llama: Open and efficient foundation language models, 2023. 1
- Hengyi Wang, Haizhou Shi, Shiwei Tan, Weiye Qin, Wenyuan Wang, Tunyu Zhang, Akshay Nambi, Tanuja Ganu, and Hao Wang. Multimodal needle in a haystack: Benchmarking long-context capability of multimodal large language models, 2024a. URL <https://arxiv.org/abs/2406.11230>. 3
- Wei Han Wang, Zehai He, Wenyi Hong, Yean Cheng, Xiaohan Zhang, Ji Qi, Shiyu Huang, Bin Xu, Yuxiao Dong, Ming Ding, and Jie Tang. Lvbench: An extreme long video understanding benchmark, 2024b. 1
- Weiyun Wang, Shuibo Zhang, Yiming Ren, Yuchen Duan, Tiantong Li, Shuo Liu, Mengkang Hu, Zhe Chen, Kaipeng Zhang, Lewei Lu, Xizhou Zhu, Ping Luo, Yu Qiao, Jifeng Dai, Wenqi Shao, and Wenhao Wang. Needle in a multimodal haystack, 2024c. 3
- Bo Wu, Shoubin Yu, Zhenfang Chen, Joshua B Tenenbaum, and Chuhan Gan. Star: A benchmark for situated reasoning in real-world videos. In *Thirty-fifth Conference on Neural Information Processing Systems Datasets and Benchmarks Track (Round 2)*, 2021. 3
- xAI. Grok-1.5 vision preview, apr 2024. URL <https://x.ai/blog/grok-1.5v>. 9
- Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-answering to explaining temporal actions. In *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, pp. 9777–9786, 2021a. 3
- Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa:next phase of question-answering to explaining temporal actions, 2021b. 3, 8
- Binzhu Xie, Sicheng Zhang, Zitang Zhou, Bo Li, Yuanhan Zhang, Jack Hessel, Jingkang Yang, and Ziwei Liu. Funqa: Towards surprising video comprehension. *GitHub repository*, 2023. 9
- Wenhao Xiong, Jingyu Liu, Igor Molybog, Hejia Zhang, Prajjwal Bhargava, Rui Hou, Louis Martin, Rashmi Rungta, Karthik Abinav Sankararaman, Barlas Oguz, Madihan Khabsa, Han Fang, Yashar Mehdad, Sharan Narang, Kshitiz Malik, Angela Fan, Shruti Bhosale, Sergey Edunov, Mike Lewis, Sinong Wang, and Hao Ma. Effective long-context scaling of foundation models, 2023. 3, 5
- Dejing Xu, Zhou Zhao, Jun Xiao, Fei Wu, Hanwang Zhang, Xiangnan He, and Yueting Zhuang. Video question answering via gradually refined attention over appearance and motion. In *Proceedings of the 25th ACM international conference on Multimedia*, pp. 1645–1653, 2017. 3
- Li Xu, He Huang, and Jun Liu. Sutd-trafficqa: A question answering benchmark and an efficient network for video reasoning over traffic events. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp. 9878–9888, 2021. 3
- Qinghao Ye, Haiyang Xu, Guohai Xu, Jiabo Ye, Ming Yan, Yiyang Zhou, Junyang Wang, Anwen Hu, Pengcheng Shi, Yaya Shi, Chenliang Li, Yuanhong Xu, Hehong Chen, Junfeng Tian, Qi Qian, Ji Zhang, Fei Huang, and Jingren Zhou. mplug-owl: Modularization empowers large language models with multimodality, 2024. 2
- Kexin Yi, Chuhan Gan, Yunzhu Li, Pushmeet Kohli, Jiajun Wu, Antonio Torralba, and Joshua B Tenenbaum. Clevrer: Collision events for video representation and reasoning. *arXiv preprint arXiv:1910.01442*, 2019. 3
- Zhou Yu, Dejing Xu, Jun Yu, Ting Yu, Zhou Zhao, Yueting Zhuang, and Dacheng Tao. Activitynet-qa: A dataset for understanding complex web videos via question answering. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 33, pp. 9127–9134, 2019a. 3
- Zhou Yu, Dejing Xu, Jun Yu, Ting Yu, Zhou Zhao, Yueting Zhuang, and Dacheng Tao. Activitynet-qa: A dataset for understanding complex web videos via question answering, 2019b. 8

- Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun, Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and Wenhui Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning benchmark for expert agi, 2023. 9
- Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual language model for video understanding, 2023. 1, 2
- Ruohong Zhang, Liangke Gui, Zhiqing Sun, Yihao Feng, Keyang Xu, Yuanhan Zhang, Di Fu, Chunyuan Li, Alexander Hauptmann, Yonatan Bisk, and Yiming Yang. Direct preference optimization of video large multimodal models from language model reward, 2024a. 3, 8
- Yuanhan Zhang, Bo Li, haotian Liu, Yong jae Lee, Liangke Gui, Di Fu, Jiashi Feng, Ziwei Liu, and Chunyuan Li. Llava-next: A strong zero-shot video understanding model, April 2024b. URL <https://llava-vl.github.io/blog/2024-04-30-llava-next-video/>. 2, 7, 8
- Junjie Zhou, Yan Shu, Bo Zhao, Boya Wu, Shitao Xiao, Xi Yang, Yongping Xiong, Bo Zhang, Tiejun Huang, and Zheng Liu. Mlvu: A comprehensive benchmark for multi-task long video understanding, 2024a. 2, 3, 7, 9, 11
- Xingyi Zhou, Anurag Arnab, Shyamal Buch, Shen Yan, Austin Myers, Xuehan Xiong, Arsha Nagrani, and Cordelia Schmid. Streaming dense video captioning, 2024b. 1
- Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. Minigpt-4: Enhancing vision-language understanding with advanced large language models, 2023. 2
- Zilin Zhu. Ring flash attention, 2024. <https://github.com/zhuzilin/ring-flash-attention>. 4