

# D-FINE: REDEFINE REGRESSION TASK IN DETRS AS FINE-GRAINED DISTRIBUTION REFINEMENT

Anonymous authors

Paper under double-blind review

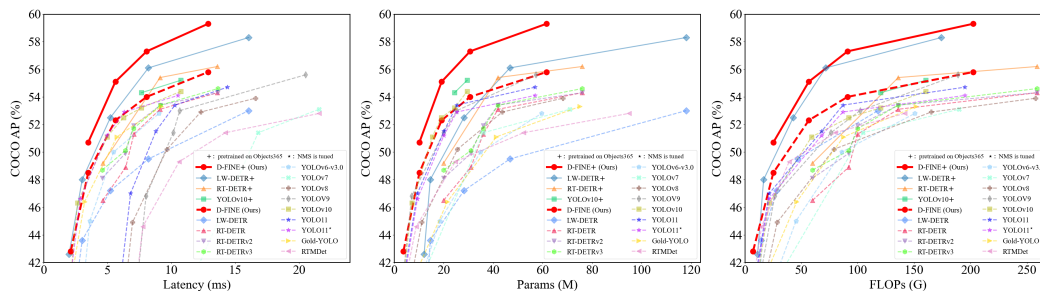


Figure 1: Comparisons with other detectors in terms of latency (left), model size (mid), and computational cost (right). We measure end-to-end latency using TensorRT FP16 on an NVIDIA T4 GPU.

## ABSTRACT

We introduce **D-FINE**, a powerful real-time object detector that achieves outstanding localization precision by redefining the bounding box regression task in DETR models. D-FINE comprises two key components: **Fine-grained Distribution Refinement (FDR)** and **Global Optimal Localization Self-Distillation (GO-LSD)**. FDR transforms the regression process from predicting fixed coordinates to iteratively refining probability distributions, providing a fine-grained intermediate representation that significantly enhances localization accuracy. GO-LSD is a bidirectional optimization strategy that transfers localization knowledge from refined distributions to shallower layers through self-distillation, while also simplifying the residual prediction tasks for deeper layers. Additionally, D-FINE incorporates lightweight optimizations in computationally intensive modules and operations, achieving a better balance between speed and accuracy. Specifically, D-FINE-L/X achieves 54.0%/55.8% AP on the COCO dataset at 124/78 FPS on an NVIDIA T4 GPU. When pretrained on Objects365, D-FINE-L/X attains **57.1%/59.3%** AP, surpassing all existing real-time detectors. Furthermore, our method significantly enhances the performance of a wide range of DETR models by up to 5.3% AP with negligible extra parameters and training costs. Our code and models will be made publicly available.

## 1 INTRODUCTION

The demand for real-time object detection has been increasing across various applications (Arani et al., 2022). Among the most influential real-time detectors are the YOLO series (Redmon et al., 2016a; Wang et al., 2023a;b; Glenn., 2023; Wang & Liao, 2024; Wang et al., 2024a; Glenn., 2024), widely recognized for their efficiency and robust community ecosystem. As a strong competitor, the Detection Transformer (DETR) (Carion et al., 2020; Zhu et al., 2020; Liu et al., 2021; Li et al., 2022; Zhang et al., 2022) offers distinct advantages due to its transformer-based architecture, which allows for global context modeling and direct set prediction without reliance on Non-Maximum Suppression (NMS) and anchor boxes. However, they are often hindered by high latency and computational demands (Zhu et al., 2020; Liu et al., 2021; Li et al., 2022; Zhang et al., 2022). RT-DETR (Zhao et al., 2024) addresses these limitations by developing a real-time variant, offering an end-to-end alternative to YOLO detectors. Moreover, LW-DETR (Chen et al., 2024) has shown that DETR can

054 achieve higher performance ceilings than YOLO, especially when trained on large-scale datasets  
055 like Objects365 (Shao et al., 2019).

056 Despite the substantial progress made in real-time object detection, **there remain potential aspects**  
057 **for improvement in detector performance.** One key **aspect** is the formulation of bounding box re-  
058 gression. Most detectors predict bounding boxes by regressing fixed coordinates, treating edges  
059 as precise values modeled by Dirac delta distributions (Liu et al., 2016; Ren et al., 2015; Tian  
060 et al., 2019; Lyu et al., 2022). **While this approach has shown significant success in maintaining**  
061 **efficiency, using fixed coordinates inherently comes with limitations in modeling localization uncer-**  
062 **tainty.** Consequently, models are constrained to use L1 loss and IoU loss, which provide insufficient  
063 guidance for adjusting each edge independently (Girshick, 2015). This makes the optimization pro-  
064 cess sensitive to small coordinate changes, **potentially** leading to slow convergence and suboptimal  
065 performance. Although methods like GFocal (Li et al., 2020; 2021) address uncertainty through  
066 probability distributions, they remain limited by anchor dependency, coarse localization, and lack of  
067 iterative refinement. Another **aspect** lies in maximizing the efficiency of real-time detectors, which  
068 are constrained by limited computation and parameter budgets to maintain speed. Knowledge distil-  
069 lation (KD) is a promising solution, transferring knowledge from larger teachers to smaller students  
070 to improve performance without increasing costs (Hinton et al., 2015). However, traditional KD  
071 methods like Logit Mimicking and Feature Imitation have proven inefficient for detection tasks and  
072 can even cause performance drops in state-of-the-art models (Zheng et al., 2022). In contrast, local-  
073 ization distillation (LD) has shown better results for detection. Nevertheless, integrating LD remains  
074 challenging due to its substantial training overhead and incompatibility with anchor-free detectors.

075 To address these issues, we propose **D-FINE**, a novel real-time object detector that redefines bound-  
076 ing box regression and introduces an effective self-distillation strategy. Our approach tackles the  
077 problems of difficult optimization in fixed-coordinate regression, the inability to model localiza-  
078 tion uncertainty, and the need for effective distillation with less training cost. We introduce **Fine-**  
079 **grained Distribution Refinement (FDR)** to transform bounding box regression from predicting  
080 fixed coordinates to modeling probability distributions, providing a more fine-grained intermediate  
081 representation. FDR refines these distributions iteratively in a residual manner, allowing for progres-  
082 sively finer adjustments and improving localization precision. Recognizing that deeper layers pro-  
083 duce more accurate predictions by capturing richer localization information within their probability  
084 distributions, we introduce **Global Optimal Localization Self-Distillation (GO-LSD)**. GO-LSD  
085 transfers localization knowledge from deeper layers to **shallower** ones with negligible extra training  
086 cost. By aligning **shallower** layers’ predictions with refined outputs from later layers, the model  
087 learns to produce better early adjustments, accelerating convergence and improving overall perfor-  
088 mance. Furthermore, we streamline computationally intensive modules and operations in existing  
089 real-time DETR architectures (Zhao et al., 2024; Chen et al., 2024), making D-FINE faster and  
090 more lightweight. While such modifications typically result in performance loss, FDR and GO-LSD  
091 effectively mitigate this degradation, achieving a better balance between speed and accuracy.

092 Experimental results on the COCO dataset (Lin et al., 2014a) demonstrate that D-FINE achieves  
093 state-of-the-art performance in real-time object detection, surpassing existing models in accuracy  
094 and efficiency. D-FINE-L and D-FINE-X achieve 54.0% and 55.8% AP, respectively on COCO  
095 [val2017](#), running at 124 FPS and 78 FPS on an NVIDIA T4 GPU. After pretraining on larger  
096 datasets like Objects365 (Shao et al., 2019), the D-FINE series attains up to **59.3%** AP, surpassing  
097 all existing real-time detectors, showcasing both scalability and robustness. Moreover, our method  
098 enhances a variety of DETR models by up to 5.3% AP with negligible extra parameters and training  
099 costs, demonstrating its flexibility and generalizability. In conclusion, D-FINE pushes the perfor-  
100 mance boundaries of real-time detectors. By addressing key challenges in bounding box regression  
101 and distillation efficiency through FDR and GO-LSD, we offer a meaningful step forward in object  
102 detection, inspiring further exploration in the field.

## 103 2 RELATED WORK

104 **Real-Time / End-to-End Object Detectors.** The YOLO series has led the way in real-time ob-  
105 ject detection, evolving through innovations in architecture, data augmentation, and training tech-  
106 niques (Redmon et al., 2016a; Wang et al., 2023a;b; Glenn., 2023; Wang & Liao, 2024; Glenn.,  
107 2024). While efficient, YOLOs typically rely on Non-Maximum Suppression (NMS), which intro-

duces latency and instability between speed and accuracy. DETR (Carion et al., 2020) revolutionizes object detection by removing the need for hand-crafted components like NMS and anchors. Traditional DETRs (Zhu et al., 2020; Meng et al., 2021; Zhang et al., 2022; Wang et al., 2022; Liu et al., 2021; Li et al., 2022; Chen et al., 2022a;c) have achieved excellent performance but at the cost of high computational demands, making them unsuitable for real-time applications. Recently, RT-DETR (Zhao et al., 2024) and LW-DETR (Chen et al., 2024) have successfully adapted DETR for real-time use. Concurrently, YOLOv10 (Wang et al., 2024a) also eliminates the need for NMS, marking a significant shift towards end-to-end detection within the YOLO series.

**Distribution-Based Object Detection.** Traditional bounding box regression methods (Redmon et al., 2016b; Liu et al., 2016; Ren et al., 2015) rely on Dirac delta distributions, treating bounding box edges as precise and fixed, which makes modeling localization uncertainty challenging. To address this, recent models have employed Gaussian or discrete distributions to represent bounding boxes (Choi et al., 2019; Li et al., 2020; Qiu et al., 2020; Li et al., 2021), enhancing the modeling of uncertainty. However, these methods all rely on anchor-based frameworks, which limits their compatibility with modern anchor-free detectors like YOLOX (Ge et al., 2021) and DETR (Carion et al., 2020). Furthermore, their distribution representations are often formulated in a coarse-grained manner and lack effective refinement, hindering their ability to achieve more accurate predictions.

**Knowledge Distillation.** Knowledge distillation (KD) (Hinton et al., 2015) is a powerful model compression technique. Traditional KD typically focuses on transferring knowledge through Logit Mimicking (Zagoruyko & Komodakis, 2017; Mirzadeh et al., 2020; Son et al., 2021). Fit-Nets (Romero et al., 2015) initially propose Feature Imitation, which has inspired a series of subsequent works that further expand upon this idea (Chen et al., 2017; Dai et al., 2021; Guo et al., 2021; Li et al., 2017; Wang et al., 2019). Most approaches for DETR (Chang et al., 2023; Wang et al., 2024b) incorporate hybrid distillations of both logit and various intermediate representations. Recently, localization distillation (LD) (Zheng et al., 2022) demonstrates that transferring localization knowledge is more effective for detection tasks. Self-distillation (Zhang et al., 2019; 2021) is a special case of KD which enables earlier layers to learn from the model’s own refined outputs, requiring far fewer additional training costs since there’s no need to separately train a teacher model.

### 3 PRELIMINARIES

**Bounding box regression** in object detection has traditionally relied on modeling Dirac delta distributions, either using centroid-based  $\{x, y, w, h\}$  or edge-distance  $\{c, \mathbf{d}\}$  forms, where the distances  $\mathbf{d} = \{t, b, l, r\}$  are measured from the anchor point  $\mathbf{c} = \{x_c, y_c\}$ . However, the Dirac delta assumption, which treats bounding box edges as precise and fixed, makes it difficult to model localization uncertainty, especially in ambiguous cases. **This rigid representation may limit optimization and potentially lead to localization errors with small prediction shifts.**

To address these problems, GFocal (Li et al., 2020; 2021) regresses the distances from anchor points to the four edges using discretized probability distributions, offering a more flexible modeling of the bounding box. In practice, bounding box distances  $\mathbf{d} = \{t, b, l, r\}$  is modeled as:

$$\mathbf{d} = d_{\max} \sum_{n=0}^N \frac{n}{N} \mathbf{P}(n), \quad (1)$$

where  $d_{\max}$  is a scalar that limits the maximum distance from the anchor center, and  $\mathbf{P}(n)$  denotes the probability of each candidate distance of four edges. While GFocal introduces a step forward in handling ambiguity and uncertainty through probability distributions, specific challenges in its regression approach persist: (1) *Anchor Dependency*: Regression is tied to the anchor box center, limiting prediction diversity and compatibility with anchor-free frameworks. (2) *No Iterative Refinement*: Predictions are made in one shot without iterative refinements, reducing regression robustness. (3) *Coarse Localization*: Fixed distance ranges and uniform bin intervals can lead to coarse localization, especially for small objects, because each bin represents a wide range of possible values.

**Localization Distillation (LD)** is a promising approach, demonstrating that transferring localization knowledge is more effective for detection tasks (Zheng et al., 2022). Built upon GFocal, it enhances student models by distilling valuable localization knowledge from teacher models, rather than simply mimicking classification logits or feature maps. Despite its advantages, the method still relies on anchor-based architectures and incurs additional training costs.

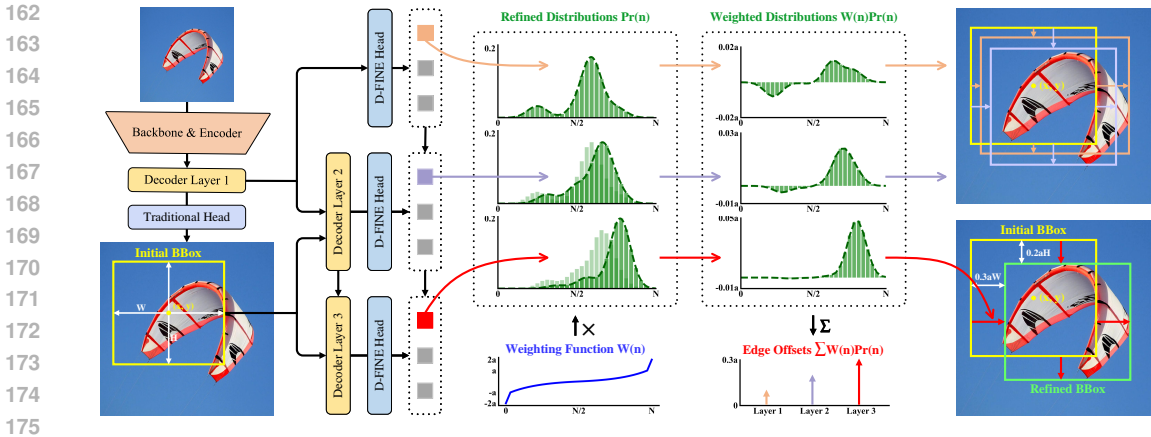


Figure 2: Overview of D-FINE with FDR. The probability distributions that act as a more fine-grained intermediate representation are iteratively refined by the decoder layers in a residual manner. Non-uniform weighting functions are applied to allow for finer localization.

## 4 METHOD

We propose **D-FINE**, a powerful real-time object detector that excels in speed, size, computational cost, and accuracy. D-FINE addresses the shortcomings of existing bounding box regression approaches by leveraging two key components: **Fine-grained Distribution Refinement (FDR)** and **Global Optimal Localization Self-Distillation (GO-LSD)**, which work in tandem to significantly enhance performance with negligible additional parameters and training time cost.

(1) **FDR** iteratively optimizes probability distributions that act as corrections to the bounding box predictions, providing a more fine-grained intermediate representation. This approach captures and optimizes the uncertainty of each edge independently. By leveraging the non-uniform weighting function, FDR allows for more precise and incremental adjustments at each decoder layer, improving localization accuracy and reducing prediction errors. FDR operates within an anchor-free, end-to-end framework, enabling a more flexible and robust optimization process.

(2) **GO-LSD** distill localization knowledge from refined distributions into shallower layers. As training progresses, the final layer produces increasingly precise soft labels. Shallower layers align their predictions with these labels through GO-LSD, leading to more accurate predictions. As early-stage predictions improve, the subsequent layers can focus on refining smaller residuals. This mutual reinforcement creates a synergistic effect, leading to progressively more accurate localization.

To further enhance the efficiency of D-FINE, we streamline computationally intensive modules and operations in existing real-time DETR architectures (Zhao et al., 2024), making D-FINE faster and more lightweight. Although these modifications typically result in some performance loss, FDR and GO-LSD effectively mitigate this degradation. The detailed modifications are listed in Table 4.

### 4.1 FINE-GRAINED DISTRIBUTION REFINEMENT

**Fine-grained Distribution Refinement (FDR)** iteratively optimizes a fine-grained distribution generated by the decoder layers, as shown in Figure 2. In the first decoder layer, preliminary bounding boxes are predicted by a traditional bounding box regression head, while the D-FINE head generates the initial probability distributions for the four edges (top, bottom, left, right). The preliminary bounding boxes serve as reference boxes, while subsequent layers focus on refining them by adjusting distributions in a residual manner. The refined distributions are then applied to adjust the four edges of the corresponding initial bounding box, progressively improving its accuracy with each iteration.

Mathematically, let  $\mathbf{b}^0 = \{x, y, w, h\}$  denote the initial bounding box prediction, where  $\{x, y\}$  represents the predicted center of the bounding box, and  $\{w, h\}$  represent the width and height of the box. We can then convert  $\mathbf{b}^0$  into the center coordinates  $\mathbf{c}^0 = \{x, y\}$  and the edge distances

$\mathbf{d}^0 = \{t, b, l, r\}$ , which represent the distances from the center to the top, bottom, left, and right edges. For the  $l$ -th layer, the refined edge distances  $\mathbf{d}^l = \{t^l, b^l, l^l, r^l\}$  are computed as:

$$\mathbf{d}^l = \mathbf{d}^0 + \{h, h, w, w\} \cdot \sum_{n=0}^N W(n) \mathbf{Pr}^l(n), \quad l \in \{1, 2, \dots, L\}, \quad (2)$$

where  $\mathbf{Pr}^l(n) = \{\text{Pr}_t^l(n), \text{Pr}_b^l(n), \text{Pr}_l^l(n), \text{Pr}_r^l(n)\}$  represents four separate distributions, one for each edge. Each distribution predicts the likelihood of candidate offset values for the corresponding edge. These candidates are determined by the weighting function  $W(n)$ , where  $n$  indexes the discrete bins out of  $N$ , with each bin corresponding to a potential edge offset. The weighted sum of the distributions produces the edge offsets. These edge offsets are then scaled by the height  $h$  and width  $w$  of the initial bounding box, ensuring the adjustments are proportional to the box size.

The refined distributions are updated using residual adjustments, defined as follows:

$$\mathbf{Pr}^l(n) = \text{Softmax}(\text{logits}^l(n)) = \text{Softmax}(\Delta \text{logits}^l(n) + \text{logits}^{l-1}(n)), \quad (3)$$

where logits from the previous layer  $\text{logits}^{l-1}(n)$  reflect the confidence in each bin’s offset value for the four edges. The current layer predicts the residual logits  $\Delta \text{logits}^l(n)$ , which are added to the previous logits to form updated logits  $\text{logits}^l(n)$ . These updated logits are then normalized using the softmax function, producing the refined probability distributions.

To facilitate precise and flexible adjustments, the weighting function  $W(n)$  is defined as:

$$W(n) = \begin{cases} 2 \cdot W(1) = -2a & n = 0 \\ c - c \left(\frac{a}{c} + 1\right)^{\frac{N-2n}{N-2}} & 1 \leq n < \frac{N}{2} \\ -c + c \left(\frac{a}{c} + 1\right)^{\frac{-N+2n}{N-2}} & \frac{N}{2} \leq n \leq N-1 \\ 2 \cdot W(N-1) = 2a & n = N, \end{cases} \quad (4)$$

where  $a$  and  $c$  are hyper-parameters controlling the upper bounds and curvature of the function. As shown in Figure 2, the shape of  $W(n)$  ensures that when bounding box prediction is near accurate, small curvature in  $W(n)$  allows for finer adjustments. Conversely, if the bounding box prediction is far from accurate, the larger curvature near the edges and the sharp changes at the boundaries of  $W(n)$  ensure sufficient flexibility for substantial corrections.

To further improve the accuracy of our distribution predictions and align them with ground truth values, inspired by Distribution Focal Loss (DFL) (Li et al., 2020), we propose a new loss function, Fine-Grained Localization (FGL) Loss, which is computed as:

$$\mathcal{L}_{\text{FGL}} = \sum_{l=1}^L \left( \sum_{k=1}^K \text{IoU}_k \left( \omega_{\leftarrow} \cdot \text{CE} \left( \mathbf{Pr}^l(n)_k, n_{\leftarrow} \right) + \omega_{\rightarrow} \cdot \text{CE} \left( \mathbf{Pr}^l(n)_k, n_{\rightarrow} \right) \right) \right) \\ \omega_{\leftarrow} = \frac{|\phi - W(n_{\rightarrow})|}{|W(n_{\leftarrow}) - W(n_{\rightarrow})|}, \quad \omega_{\rightarrow} = \frac{|\phi - W(n_{\leftarrow})|}{|W(n_{\leftarrow}) - W(n_{\rightarrow})|}, \quad (5)$$

where  $\mathbf{Pr}^l(n)_k$  represents the probability distributions corresponding to the  $k$ -th prediction.  $\phi$  is the relative offset calculated as  $\phi = (\mathbf{d}^{GT} - \mathbf{d}^0) / \{h, h, w, w\}$ .  $\mathbf{d}^{GT}$  represents the ground truth edge-distance and  $n_{\leftarrow}, n_{\rightarrow}$  are the bin indices adjacent to  $\phi$ . The cross-entropy (CE) losses with weights  $\omega_{\leftarrow}$  and  $\omega_{\rightarrow}$  ensure that the interpolation between bins aligns precisely with the ground truth offset. By incorporating IoU-based weighting, FGL loss encourages distributions with lower uncertainty to become more concentrated, resulting in more precise and reliable bounding box regression.

## 4.2 GLOBAL OPTIMAL LOCALIZATION SELF-DISTILLATION

**Global Optimal Localization Self-Distillation** (GO-LSD) utilizes the final layer’s refined distribution predictions to distill localization knowledge into the shallower layers, as shown in Figure 3. This process begins by applying Hungarian Matching (Carion et al., 2020) to the predictions from each layer, identifying the local bounding box matches at every stage of the model. To perform a global

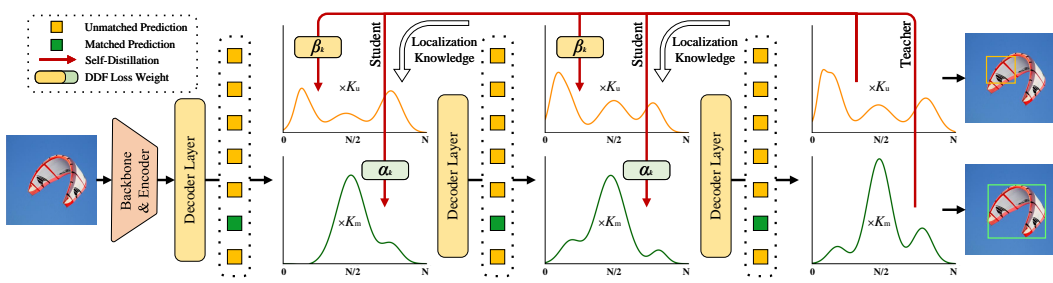


Figure 3: Overview of GO-LSD process. Localization knowledge from the final layer’s refined distributions is distilled into shallower layers through DDF loss with decoupled weighting strategies.

optimization, GO-LSD aggregates the matching indices from all layers into a unified union set. This union set combines the most accurate candidate predictions across layers, ensuring that they all benefit from the distillation process. In addition to refining the global matches, GO-LSD also optimizes unmatched predictions during training to improve overall stability, leading to improved overall performance. Although the localization is optimized through this union set, the classification task still follows a one-to-one matching principle, ensuring that there are no redundant boxes. This strict matching means that some predictions in the union set are well-localized but have low confidence scores. These low-confidence predictions often represent candidates with precise localization, which still need to be distilled effectively.

To address this, we introduce Decoupled Distillation Focal (DDF) Loss, which applies decoupled weighting strategies to ensure that high-IoU but low-confidence predictions are given appropriate weight. The DDF Loss also weights matched and unmatched predictions according to their quantity, balancing their overall contribution and individual losses. This approach results in more stable and effective distillation. The Decoupled Distillation Focal Loss  $\mathcal{L}_{\text{DDF}}$  is then formulated as:

$$\mathcal{L}_{\text{DDF}} = T^2 \sum_{l=1}^{L-1} \left( \sum_{k=1}^{K_m} \alpha_k \cdot \mathbf{KL} \left( \mathbf{Pr}^l(n)_k, \mathbf{Pr}^L(n)_k \right) + \sum_{k=1}^{K_u} \beta_k \cdot \mathbf{KL} \left( \mathbf{Pr}^l(n)_k, \mathbf{Pr}^L(n)_k \right) \right) \\ \alpha_k = \text{IoU}_k \cdot \frac{\sqrt{K_m}}{\sqrt{K_m} + \sqrt{K_u}}, \quad \beta_k = \text{Conf}_k \cdot \frac{\sqrt{K_u}}{\sqrt{K_m} + \sqrt{K_u}}, \quad (6)$$

where  $\mathbf{KL}$  represents the Kullback-Leibler divergence (Hinton et al., 2015), and  $T$  is the temperature parameter used for smoothing logits. The distillation loss for the  $k$ -th matched prediction is weighted by  $\alpha_k$ , where  $K_m$  and  $K_u$  are the numbers of matched and unmatched predictions, respectively. For the  $k$ -th unmatched prediction, the weight is  $\beta_k$ , with  $\text{Conf}_k$  denoting the classification confidence.

## 5 EXPERIMENTS

### 5.1 EXPERIMENT SETUP

To validate the effectiveness of our proposed methods, we conduct experiments on the COCO (Lin et al., 2014a) and Objects365 (Shao et al., 2019) datasets. We evaluate our D-FINE using the standard COCO metrics, including Average Precision (AP) averaged over IoU thresholds from 0.50 to 0.95, as well as AP at specific thresholds ( $\text{AP}_{50}$  and  $\text{AP}_{75}$ ) and AP across different object scales: small ( $\text{AP}_S$ ), medium ( $\text{AP}_M$ ), and large ( $\text{AP}_L$ ). Additionally, we provide model efficiency metrics by reporting the number of parameters (#Params.), computational cost (GFLOPs), and end-to-end latency. The latency is measured using TensorRT FP16 on an NVIDIA T4 GPU.

### 5.2 COMPARISON WITH REAL-TIME DETECTORS ON COCO

Table 1 provides a comprehensive comparison between D-FINE and various real-time object detectors on COCO val2017. D-FINE achieves an excellent balance between efficiency and accuracy across multiple metrics. Specifically, **D-FINE-L** attains an AP of 54.0% with 31M parameters and

Table 1: Performance comparison of various real-time object detectors on COCO val2017.

Model	#Params.	GFLOPs	Latency (ms)	AP <sup>val</sup>	AP <sub>50</sub> <sup>val</sup>	AP <sub>75</sub> <sup>val</sup>	AP <sub>S</sub> <sup>val</sup>	AP <sub>M</sub> <sup>val</sup>	AP <sub>L</sub> <sup>val</sup>
<i>Non-end-to-end Real-time Object Detectors</i>									
YOLOv6-L	59M	150	9.04	52.8	70.3	57.7	34.4	58.1	70.1
YOLOv7-L	36M	104	16.81	51.2	69.7	55.5	35.2	55.9	66.7
YOLOv7-X	71M	189	21.57	52.9	71.1	57.4	36.9	57.7	68.6
YOLOv8-L	43M	165	12.31	52.9	69.8	57.5	35.3	58.3	69.8
YOLOv8-X	68M	257	16.59	53.9	71.0	58.7	35.7	59.3	70.7
YOLOv9-C	25M	102	10.66	53.0	70.2	57.8	36.2	58.5	69.3
YOLOv9-E	57M	189	20.53	55.6	72.8	60.6	40.2	61.0	71.4
Gold-YOLO-L	75M	152	9.21	53.3	70.9	-	33.8	58.9	69.9
RTMDet-L	52M	80	14.23	51.3	68.9	55.9	33.0	55.9	68.4
RTMDet-X	95M	142	21.59	52.8	70.4	57.2	35.9	57.3	69.1
YOLO11-L	25M	87	10.28	53.4	70.1	58.2	35.6	59.1	69.2
YOLO11-X	57M	195	14.39	54.7	71.6	59.5	37.7	59.7	70.2
YOLO11-L*	25M	87	6.31	52.9	69.4	57.7	35.2	58.7	68.8
YOLO11-X*	57M	195	10.52	54.1	70.8	58.9	37.0	59.2	69.7
<i>End-to-end Real-time Object Detectors</i>									
YOLOv10-L	24M	120	7.66	53.2	70.1	58.1	35.8	58.5	69.4
YOLOv10-X	30M	160	10.74	54.4	71.3	59.3	37.0	59.8	70.9
RT-DETR-R50	42M	136	9.12	53.1	71.3	57.7	34.8	58.0	70.0
RT-DETR-R101	76M	259	13.61	54.3	72.7	58.6	36.0	58.8	72.1
RT-DETR-HG-L	32M	107	9.25	53.0	71.7	57.3	34.6	57.4	71.2
RT-DETR-HG-X	67M	234	14.01	54.8	73.1	59.4	35.7	59.6	72.9
RT-DETRv2-L	42M	136	9.15	53.4	71.6	57.4	36.1	57.9	70.8
RT-DETRv2-X	76M	259	13.66	54.3	72.8	58.8	35.8	58.8	72.1
RT-DETRv3-L	42M	136	9.12	53.4	-	-	-	-	-
RT-DETRv3-X	76M	259	13.61	54.6	-	-	-	-	-
LW-DETR-L	47M	72	8.21	49.5	-	-	-	-	-
LW-DETR-X	118M	174	16.06	53.0	-	-	-	-	-
<b>D-FINE-L (Ours)</b>	31M	91	8.07	<b>54.0</b>	71.6	58.4	36.5	58.0	71.9
<b>D-FINE-X (Ours)</b>	62M	202	12.89	<b>55.8</b>	73.7	60.2	37.3	60.5	73.4
<i>End-to-end Real-time Object Detectors (Pretrained on Objects365)</i>									
YOLOv10-L	24M	120	7.66	54.0	71.0	58.9	36.5	59.2	70.5
YOLOv10-X	30M	160	10.74	54.9	71.9	59.8	37.6	60.2	71.7
RT-DETR-R50	42M	136	9.12	55.3	73.4	60.1	37.9	59.9	71.8
RT-DETR-R101	76M	259	13.61	56.2	74.6	61.3	38.3	60.5	73.5
LW-DETR-L	47M	72	8.21	56.1	74.6	60.9	37.2	60.4	73.0
LW-DETR-X	118M	174	16.06	58.3	76.9	63.3	40.9	63.3	74.8
<b>D-FINE-L (Ours)</b>	31M	91	8.07	<b>57.1</b>	74.7	62.0	40.0	61.5	74.2
<b>D-FINE-X (Ours)</b>	62M	202	12.89	<b>59.3</b>	76.8	64.6	42.3	64.2	76.4

\* : NMS is tuned with a confidence threshold of 0.01.

91 GFLOPs, maintaining a low latency of 8.07 ms. Additionally, **D-FINE-X** achieves an AP of 55.8% with 62M parameters and 202 GFLOPs, operating with a latency of 12.89 ms.

As depicted in Figure 1, which shows scatter plots of latency vs. AP, parameter count vs. AP, and FLOPs vs. AP, **D-FINE** consistently outperforms other state-of-the-art models across all key dimensions. **D-FINE-L** achieves a higher AP (54.0%) compared to YOLOv10-L (53.2%), RT-DETR-R50 (53.1%), and LW-DETR-X (53.0%), while requiring fewer computational resources (91 GFLOPs vs. 120, 136, and 174). Similarly, **D-FINE-X** surpasses YOLOv10-X and RT-DETR-R101 by achieving superior performance (55.8% AP vs. 54.4% and 54.3%) and demonstrating greater efficiency in terms of lower parameter count, GFLOPs, and latency.

We further pretrain **D-FINE** and YOLOv10 on the Objects365 dataset (Shao et al., 2019), before finetuning them on COCO. After pretraining, both **D-FINE-L** and **D-FINE-X** exhibit significant performance improvements, achieving AP of **57.1%** and **59.3%**, respectively. These enhancements enable them to outperform YOLOv10-L and YOLOv10-X by 3.1% and 4.4% AP, thereby positioning them as the top-performing models in this comparison. What’s more, following the pretraining protocol of YOLOv8 (Glenn., 2023), YOLOv10 is pretrained on Objects365 for 300 epochs. In contrast, **D-FINE** requires only 21 epochs to achieve its substantial performance gains. These find-

Table 2: Performance comparison of various real-time object detectors on CrowdHuman.

Model	#Params.	GFLOPs	Latency (ms)	AP <sup>val</sup>	AP <sub>50</sub> <sup>val</sup>	AP <sub>75</sub> <sup>val</sup>	AP <sub>S</sub> <sup>val</sup>	AP <sub>M</sub> <sup>val</sup>	AP <sub>L</sub> <sup>val</sup>
YOLOv8-S	11M	29	6.96	50.4	78.1	-	-	-	-
YOLOv8-M	26M	79	9.66	53.9	80.7	-	-	-	-
YOLOv9-S	7M	26	8.02	50.5	77.1	-	-	-	-
YOLOv10-S	7M	22	2.65	50.6	78.6	-	-	-	-
RT-DETR-R18	20M	61	4.63	54.1	82.3	-	-	-	-
RT-DETRv2-S	20M	60	4.59	54.2	82.6	52.2	19.4	36.8	47.2
<b>D-FINE-S (Ours)</b>	<b>10M</b>	<b>25</b>	<b>3.49</b>	<b>55.5</b>	<b>87.1</b>	60.1	28.4	44.5	52.7

Table 3: Effectiveness of FDR and GO-LSD across various DETR models on COCO val2017.

Model	#Params.	#Epochs	AP <sup>val</sup>	AP <sub>50</sub> <sup>val</sup>	AP <sub>75</sub> <sup>val</sup>	AP <sub>S</sub> <sup>val</sup>	AP <sub>M</sub> <sup>val</sup>	AP <sub>L</sub> <sup>val</sup>
Deformable-DETR	40M	12	43.7	62.2	46.9	26.4	46.4	57.9
+ FDR & GO-LSD	40M	12	47.1 (+3.4)	64.7	50.8	29.0	50.3	62.8
DAB-DETR	48M	12	44.2	62.5	47.3	27.5	47.1	58.6
+ FDR & GO-LSD	48M	12	49.5 (+5.3)	67.2	54.1	31.8	53.2	63.3
DN-DETR	48M	12	46.0	64.8	49.9	27.7	49.1	62.3
+ FDR & GO-LSD	48M	12	49.7 (+3.7)	67.5	54.4	31.8	53.4	63.8
DINO	47M	12	49.0	66.6	53.5	32.0	52.3	63.0
+ FDR & GO-LSD	47M	12	51.6 (+2.6)	68.6	56.3	33.8	55.6	65.3
DINO	47M	24	50.4	68.3	54.8	33.3	53.7	64.8
+ FDR & GO-LSD	47M	24	52.4 (+2.0)	69.5	56.9	34.6	55.7	66.2

ings corroborate the conclusions of LW-DETR (Chen et al., 2024), demonstrating that DETR-based models benefit substantially more from pretraining compared to other detectors like YOLOs.

### 5.3 COMPARISON WITH REAL-TIME DETECTORS ON CROWDHUMAN

Table 2 compares D-FINE-S with state-of-the-art real-time detectors on the CrowdHuman dataset (Shao et al., 2018). D-FINE-S achieves the highest AP<sup>val</sup> (55.5%) and AP<sub>50</sub><sup>val</sup> (87.1%) among all models, with only 10M parameters, 25 GFLOPs, and a latency of 3.49ms.

### 5.4 EFFECTIVENESS ON VARIOUS DETR MODELS

Table 3 demonstrates the effectiveness of FDR and GO-LSD across multiple DETR-based object detectors on COCO val2017. These methods are designed for flexibility and can be seamlessly integrated into Deformable DETR, DAD-DETR, DN-DETR, and DINO, consistently boosting detection accuracy by 2.0% to 5.3% without increasing the number of parameters and computational burden. These results highlight the effectiveness of FDR and GO-LSD in enhancing localization precision and maximizing efficiency, demonstrating their adaptability and substantial impact across various end-to-end detection frameworks.

### 5.5 ABLATION STUDY

#### 5.5.1 THE ROADMAP TO D-FINE

Table 4 showcases the stepwise progression from the baseline model (RT-DETR-HGNetv2-L (Zhao et al., 2024)) to our proposed D-FINE framework. Starting with the baseline metrics of 53.0% AP, 32M parameters, 110 GFLOPs, and 9.25 ms latency, we first remove all the decoder projection layers. This modification reduces GFLOPs to 97 and cuts the latency to 8.02 ms, although it decreases AP to 52.4%. To address this drop, we introduce the Target Gating Layer, which recovers the AP to 52.8% with only a marginal increase in computational cost.



Table 4: Step-by-step modifications from baseline model to D-FINE. Each step shows changes in AP, the number of parameters, latency, and FLOPs.

Model	AP <sup>val</sup>	#Params.	Latency (ms)	GFLOPs
baseline: RT-DETR-HGNetv2-L (Zhao et al., 2024)	53.0	32M	9.25	110
Remove Decoder Projection Layers	52.4	32M	8.02	97
+ <b>Target Gating Layers</b>	52.8	33M	8.15	98
Encoder CSP layers → GELAN (Wang & Liao, 2024)	53.5	46M	10.69	167
Reduce Hidden Dimension in GELAN by half	52.8	31M	8.01	91
Uneven Sampling Points (S: 3, M: 6, L: 3)	52.9	31M	7.90	91
RT-DETRv2 Training Strategy (Lv et al., 2024)	53.0	31M	7.90	91
+ <b>FDR</b>	53.5	31M	8.07	91
+ <b>GO-LSD</b>	<b>54.0 (+1.0)</b>	<b>31M (-3%)</b>	<b>8.07(-13%)</b>	<b>91 (-17%)</b>

Table 5: Distillation methods comparison in terms of performance, training time, and GPU memory usage. GO-LSD achieves the highest AP<sup>val</sup> with minimal additional training cost.

Methods	AP <sup>val</sup>	Time/Epoch	Memory	FDR-based Methods	AP <sup>val</sup>	Time/Epoch	Memory
baseline	53.0	29min	8552M	baseline + FDR	53.8	30min	8730M
Logit Mimicking	52.6	31min	8554M	Localization Distill.	53.7	31min	8734M
Feature Imitation	52.9	31min	8554M	GO-LSD	<b>54.5</b>	31min	8734M

The Target Gating Layer is strategically placed after the decoder’s cross-attention module, replacing the residual connection. It allows queries to dynamically switch their focus on different targets across layers, effectively preventing information entanglement. The mechanism operates as follows:

$$\mathbf{x} = \sigma([\mathbf{x}_1, \mathbf{x}_2] \mathbf{W}^T + \mathbf{b})_1 \cdot \mathbf{x}_1 + \sigma([\mathbf{x}_1, \mathbf{x}_2] \mathbf{W}^T + \mathbf{b})_2 \cdot \mathbf{x}_2 \quad (7)$$

where  $\mathbf{x}_1$  represents the previous queries and  $\mathbf{x}_2$  is the cross-attention result.  $\sigma$  is the sigmoid activation function applied to the concatenated outputs, and  $[\cdot]$  represents the concatenation operation.

Next, we replace the encoder’s CSP layers with GELAN layers (Wang & Liao, 2024). This substitution increases AP to 53.5% but also raises the parameter count, GFLOPs, and latency. To mitigate the increased complexity, we reduce the hidden dimension of GELAN, which balances the model’s complexity and maintains AP at 52.8% while improving efficiency. We further optimize the sampling points by implementing uneven sampling across different scales (S: 3, M: 6, L: 3), which slightly increases AP to 52.9%. However, alternative sampling combinations such as (S: 6, M: 3, L: 3) and (S: 3, M: 3, L: 6) result in a minor performance drop of 0.1% AP. Adopting the RT-DETRv2 training strategy (Lv et al., 2024) (see Appendix A.1.1 for details) enhances AP to 53.0% without affecting the number of parameters or latency. Finally, the integration of FDR and GO-LSD modules elevates AP to 54.0%, achieving a 13% reduction in latency and a 17% reduction in GFLOPs compared to the baseline model. These incremental modifications demonstrate the robustness and effectiveness of our D-FINE framework.

### 5.5.2 COMPARISON OF DISTILLATION METHODS

Table 5 compares different distillation methods based on performance, training time, and GPU memory usage. The baseline model achieves an AP of 53.0%, with a training time of 29 minutes per epoch and memory usage of 8552 MB on four NVIDIA RTX 4090 GPUs. Due to the instability of one-to-one matching in DETR, traditional distillation techniques like Logit Mimicking and Feature Imitation do not improve performance; Logit Mimicking reduces AP to 52.6%, while Feature Imitation achieves 52.9%. Incorporating our FDR module increases AP to 53.8% with minimal additional training cost. Applying vanilla Localization Distillation (Zheng et al., 2022) further increases AP to 53.7%. Our GO-LSD method achieves the highest AP of 54.5%, with only a 6% increase in training time and a 2% rise in memory usage compared to the baseline. Notably, no lightweight optimizations are applied in this comparison, focusing purely on distillation performance.

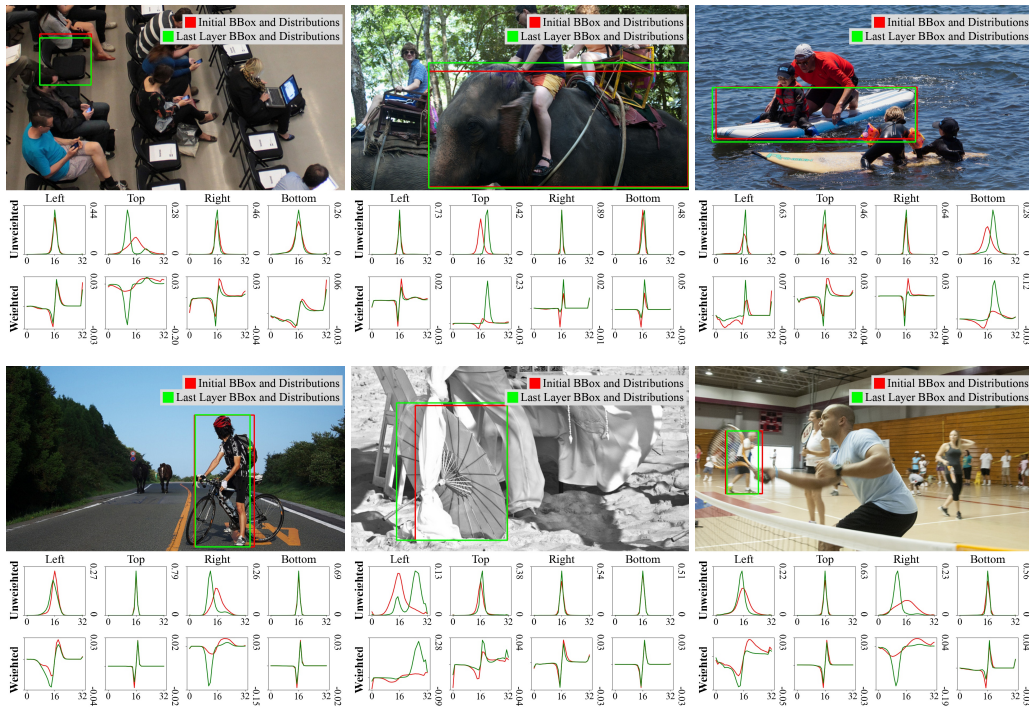


Figure 4: Visualization of FDR across detection scenarios with initial and refined bounding boxes, along with unweighted and weighted distributions, highlighting improved localization accuracy.

## 5.6 VISUALIZATION ANALYSIS

Figure 4 illustrates the process of FDR across various detection scenarios. We display the filtered detection results with two bounding boxes overlaid on the images. The red boxes represent the initial predictions from the first decoder layer, while the green boxes denote the refined predictions from the final decoder layer. The final predictions align more closely with the target objects. The first row under the images shows the unweighted probability distributions for the four edges (left, top, right, bottom). The second row shows the weighted distributions, where the weighting function  $W(n)$  has been applied. The red curves represent the initial distributions, while the green curves show the final, refined distributions. The weighted distributions emphasize finer adjustments near accurate predictions and allow for enabling rapid changes for larger adjustments, further illustrating how FDR refines the offsets of initial bounding boxes, leading to increasingly precise localization.

## 6 CONCLUSION

In this paper, we introduce D-FINE, a powerful real-time object detector that redefines the bounding box regression task in DETR models through Fine-grained Distribution Refinement (FDR) and Global Optimal Localization Self-Distillation (GO-LSD). Experimental results on the COCO dataset demonstrate that D-FINE achieves state-of-the-art accuracy and efficiency, surpassing all existing real-time detectors. **Limitation and Future Work:** However, the performance gap between lighter D-FINE models and other compact models remains small. One possible reason is that shallow decoder layers may yield less accurate final-layer predictions, limiting the effectiveness of distilling localization knowledge into earlier layers. Addressing this challenge necessitates enhancing the localization capabilities of lighter models without increasing inference latency. Future research could investigate advanced architectural designs or novel training paradigms that allow for the inclusion of additional sophisticated decoder layers during training while maintaining lightweight inference by simply discarding them at test time. We hope D-FINE inspires further advancements in this area.

## REFERENCES

- 540  
541  
542 Elahe Arani, Shruthi Gowda, Ratnajit Mukherjee, Omar Magdy, Senthilkumar Kathiresan, and  
543 Bahram Zonooz. A comprehensive study of real-time object detection networks across multi-  
544 ple domains: A survey. *arXiv preprint arXiv:2208.10895*, 2022.
- 545 Nicolas Carion, Francisco Massa, Gabriel Synnaeve, Nicolas Usunier, Alexander Kirillov, and  
546 Sergey Zagoruyko. End-to-end object detection with transformers. In *European Conference*  
547 *on Computer Vision*, pp. 213–229. Springer, 2020.
- 548  
549 Jiahao Chang, Shuo Wang, Hai-Ming Xu, Zehui Chen, Chenhongyi Yang, and Feng Zhao. De-  
550 trdistill: A universal knowledge distillation framework for detr-families. In *Proceedings of the*  
551 *IEEE/CVF International Conference on Computer Vision*, pp. 6898–6908, 2023.
- 552 Guobin Chen, Wongun Choi, Xiang Yu, Tony Han, and Manmohan Chandraker. Learning efficient  
553 object detection models with knowledge distillation. In *NeurIPS*, 2017.
- 554  
555 Qiang Chen, Xiaokang Chen, Gang Zeng, and Jingdong Wang. Group detr: Fast training conver-  
556 gence with decoupled one-to-many label assignment. *arXiv preprint arXiv:2207.13085*, 2022a.
- 557  
558 Qiang Chen, Jian Wang, Chuchu Han, Shan Zhang, Zexian Li, Xiaokang Chen, Jiahui Chen, Xi-  
559 aodi Wang, Shuming Han, Gang Zhang, Haocheng Feng, Kun Yao, Junyu Han, Errui Ding, and  
560 Jingdong Wang. Group detr v2: Strong object detector with encoder-decoder pretraining, 2022b.
- 561  
562 Qiang Chen, Jian Wang, Chuchu Han, Shan Zhang, Zexian Li, Xiaokang Chen, Jiahui Chen, Xiaodi  
563 Wang, Shuming Han, Gang Zhang, et al. Group detr v2: Strong object detector with encoder-  
564 decoder pretraining. *arXiv preprint arXiv:2211.03594*, 2022c.
- 565  
566 Qiang Chen, Xiangbo Su, Xinyu Zhang, Jian Wang, Jiahui Chen, Yunpeng Shen, Chuchu Han,  
567 Ziliang Chen, Weixiang Xu, Fanrong Li, et al. Lw-detr: A transformer replacement to yolo for  
568 real-time detection. *arXiv preprint arXiv:2406.03459*, 2024.
- 569  
570 Jiwoong Choi, Dayoung Chun, Hyun Kim, and Hyuk-Jae Lee. Gaussian YOLOv3: An accurate and  
571 fast object detector using localization uncertainty for autonomous driving. In *ICCV*, 2019.
- 572  
573 Cheng Cui, Ruoyu Guo, Yuning Du, Dongliang He, Fu Li, Zewu Wu, Qiwen Liu, Shilei Wen,  
574 Jizhou Huang, Xiaoguang Hu, Dianhai Yu, Errui Ding, and Yanjun Ma. Beyond self-supervision:  
575 A simple yet effective network distillation alternative to improve backbones, 2021.
- 576  
577 Xing Dai, Zeren Jiang, Zhao Wu, Yiping Bao, Zhicheng Wang, Si Liu, and Erjin Zhou. General  
578 instance distillation for object detection. In *CVPR*, 2021.
- 579  
580 Zheng Ge, Songtao Liu, Feng Wang, Zeming Li, and Jian Sun. Yolox: Exceeding yolo series in  
581 2021. *arXiv preprint arXiv:2107.08430*, 2021.
- 582  
583 Ross Girshick. Fast R-CNN. In *ICCV*, 2015.
- 584  
585 Jocher Glenn. Yolov8. <https://docs.ultralytics.com/models/yolov8/>, 2023.
- 586  
587 Jocher Glenn. Yolo11. <https://docs.ultralytics.com/models/yolo11/>, 2024.
- 588  
589 Jianyuan Guo, Kai Han, Yunhe Wang, Han Wu, Xinghao Chen, Chunjing Xu, and Chang Xu. Dis-  
590 tilling object detectors via decoupled features. In *CVPR*, 2021.
- 591  
592 Geoffrey Hinton, Oriol Vinyals, and Jeff Dean. Distilling the knowledge in a neural network. *arXiv*  
593 *preprint arXiv:1503.02531*, 2015.
- 594  
595 Feng Li, Hao Zhang, Shilong Liu, Jian Guo, Lionel M Ni, and Lei Zhang. Dn-detr: Accelerate  
596 detr training by introducing query denoising. In *Proceedings of the IEEE/CVF Conference on*  
597 *Computer Vision and Pattern Recognition*, pp. 13619–13627, 2022.
- 598  
599 Quanquan Li, Shengying Jin, and Junjie Yan. Mimicking very efficient network for object detection.  
600 In *CVPR*, 2017.

- 594 Xiang Li, Wenhai Wang, Lijun Wu, Shuo Chen, Xiaolin Hu, Jun Li, Jinhui Tang, and Jian Yang.  
595 Generalized Focal Loss: learning qualified and distributed bounding boxes for dense object de-  
596 tection. In *NeurIPS*, 2020.
- 597 Xiang Li, Wenhai Wang, Xiaolin Hu, Jun Li, Jinhui Tang, and Jian Yang. Generalized focal loss v2:  
598 Learning reliable localization quality estimation for dense object detection. In *CVPR*, 2021.
- 600 Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr  
601 Dollár, and C. Lawrence Zitnick. Microsoft coco: Common objects in context. In *ECCV*, 2014a.
- 602 Tsung-Yi Lin, Michael Maire, Serge Belongie, James Hays, Pietro Perona, Deva Ramanan, Piotr  
603 Dollár, and C Lawrence Zitnick. Microsoft coco: Common objects in context. In *European*  
604 *Conference on Computer Vision*, pp. 740–755. Springer, 2014b.
- 606 Shilong Liu, Feng Li, Hao Zhang, Xiao Yang, Xianbiao Qi, Hang Su, Jun Zhu, and Lei Zhang. Dab-  
607 detr: Dynamic anchor boxes are better queries for detr. In *International Conference on Learning*  
608 *Representations*, 2021.
- 609 Wei Liu, Dragomir Anguelov, Dumitru Erhan, Christian Szegedy, Scott Reed, Cheng-Yang Fu, and  
610 Alexander C. Berg. Ssd: Single shot multibox detector. In *ECCV*, 2016.
- 612 Wenyu Lv, Yian Zhao, Qinyao Chang, Kui Huang, Guanzhong Wang, and Yi Liu. Rt-detr2: Im-  
613 proved baseline with bag-of-freebies for real-time detection transformer, 2024.
- 614 Chengqi Lyu, Wenwei Zhang, Haian Huang, Yue Zhou, Yudong Wang, Yanyi Liu, Shilong Zhang,  
615 and Kai Chen. Rtmddet: An empirical study of designing real-time object detectors. *ArXiv*,  
616 abs/2212.07784, 2022.
- 618 Depu Meng, Xiaokang Chen, Zejia Fan, Gang Zeng, Houqiang Li, Yuhui Yuan, Lei Sun, and Jing-  
619 dong Wang. Conditional detr for fast training convergence. In *Proceedings of the IEEE/CVF*  
620 *International Conference on Computer Vision*, pp. 3651–3660, 2021.
- 621 Seyed Iman Mirzadeh, Mehrdad Farajtabar, Ang Li, Nir Levine, Akihiro Matsukawa, and Hassan  
622 Ghasemzadeh. Improved knowledge distillation via teacher assistant. In *AAAI*, 2020.
- 623 Heqian Qiu, Hongliang Li, Qingbo Wu, and Hengcan Shi. Offset bin classification network for  
624 accurate object detection. In *CVPR*, 2020.
- 626 Joseph Redmon, Santosh Divvala, Ross Girshick, and Ali Farhadi. You only look once: Unified,  
627 real-time object detection. In *Proceedings of the IEEE/CVF Conference on Computer Vision and*  
628 *Pattern Recognition*, pp. 779–788, 2016a.
- 629 Joseph Redmon, Santosh Divvala, Ross Girshick, and Ali Farhadi. You only look once: Unified,  
630 real-time object detection. In *CVPR*, 2016b.
- 632 Shaoqing Ren, Kaiming He, Ross Girshick, and Jian Sun. Faster R-CNN: Towards real-time object  
633 detection with region proposal networks. In *NeurIPS*, 2015.
- 634 Adriana Romero, Nicolas Ballas, Samira Ebrahimi Kahou, Antoine Chassang, Carlo Gatta, and  
635 Yoshua Bengio. Fitnets: Hints for thin deep nets. In *ICLR*, 2015.
- 637 Olga Russakovsky, Jia Deng, Hao Su, Jonathan Krause, Sanjeev Satheesh, Sean Ma, Zhiheng  
638 Huang, Andrej Karpathy, Aditya Khosla, Michael Bernstein, et al. Imagenet large scale visual  
639 recognition challenge. *International Journal of Computer Vision*, 115:211–252, 2015.
- 640 Shuai Shao, Zijian Zhao, Boxun Li, Tete Xiao, Gang Yu, Xiangyu Zhang, and Jian Sun. Crowdhu-  
641 man: A benchmark for detecting human in a crowd. *arXiv preprint arXiv:1805.00123*, 2018.
- 642 Shuai Shao, Zeming Li, Tianyuan Zhang, Chao Peng, Gang Yu, Xiangyu Zhang, Jing Li, and Jian  
643 Sun. Objects365: A large-scale, high-quality dataset for object detection. In *Proceedings of the*  
644 *IEEE/CVF International Conference on Computer Vision*, pp. 8430–8439, 2019.
- 645 Wonchul Son, Jaemin Na, Junyong Choi, and Wonjun Hwang. Densely guided knowledge distilla-  
646 tion using multiple teacher assistants. In *ICCV*, 2021.

- 648 Zhi Tian, Chunhua Shen, Hao Chen, and Tong He. FCOS: Fully convolutional one-stage object  
649 detection. In *ICCV*, 2019.
- 650
- 651 Ao Wang, Hui Chen, Lihao Liu, Kai Chen, Zijia Lin, Jungong Han, and Guiguang Ding. Yolov10:  
652 Real-time end-to-end object detection. In *The European Conference on Computer Vision (ECCV)*,  
653 2024a.
- 654 Chengcheng Wang, Wei He, Ying Nie, Jianyuan Guo, Chuanjian Liu, Yunhe Wang, and Kai Han.  
655 Gold-yolo: Efficient object detector via gather-and-distribute mechanism. In *Advances in Neural*  
656 *Information Processing Systems*. Curran Associates, Inc., 2023a.
- 657
- 658 Chien-Yao Wang and Hong-Yuan Mark Liao. YOLOv9: Learning what you want to learn using  
659 programmable gradient information. *arXiv preprint arXiv:2402.13616*, 2024.
- 660
- 661 Chien-Yao Wang, Alexey Bochkovskiy, and Hong-Yuan Mark Liao. Yolov7: Trainable bag-of-  
662 freebies sets new state-of-the-art for real-time object detectors. In *Proceedings of the IEEE/CVF*  
663 *Conference on Computer Vision and Pattern Recognition*, pp. 7464–7475, 2023b.
- 664
- 665 Tao Wang, Li Yuan, Xiaopeng Zhang, and Jiashi Feng. Distilling object detectors with fine-grained  
666 feature imitation. In *CVPR*, 2019.
- 667
- 668 Yingming Wang, Xiangyu Zhang, Tong Yang, and Jian Sun. Anchor detr: Query design for  
669 transformer-based detector. In *Proceedings of the AAAI Conference on Artificial Intelligence*,  
670 pp. 2567–2575, 2022.
- 671
- 672 Yu Wang, Xin Li, Shengzhao Weng, Gang Zhang, Haixiao Yue, Haocheng Feng, Junyu Han, and  
673 Errui Ding. Kd-detr: Knowledge distillation for detection transformer with consistent distillation  
674 points sampling. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern*  
675 *Recognition*, pp. 16016–16025, 2024b.
- 676
- 677 Sergey Zagoruyko and Nikos Komodakis. Paying more attention to attention: Improving the perfor-  
678 mance of convolutional neural networks via attention transfer. In *ICLR*, 2017.
- 679
- 680 Hao Zhang, Feng Li, Shilong Liu, Lei Zhang, Hang Su, Jun Zhu, Lionel Ni, and Heung-Yeung  
681 Shum. Dino: Detr with improved denoising anchor boxes for end-to-end object detection. In  
682 *International Conference on Learning Representations*, 2022.
- 683
- 684 Linfeng Zhang, Chenglong Bao, and Kaisheng Ma. Self-distillation: Towards efficient and compact  
685 neural networks. *IEEE Transactions on Pattern Analysis and Machine Intelligence*, 44(8):4388–  
686 4403, 2021.
- 687
- 688 Yian Zhao, Wenyu Lv, Shangliang Xu, Jinman Wei, Guanzhong Wang, Qingqing Dang, Yi Liu, and  
689 Jie Chen. Detsr beat yolos on real-time object detection. In *The IEEE Conference on Computer*  
690 *Vision and Pattern Recognition (CVPR)*, 2024.
- 691
- 692 Zhaohui Zheng, Rongguang Ye, Ping Wang, Dongwei Ren, Wangmeng Zuo, Qibin Hou, and Ming-  
693 Ming Cheng. Localization distillation for dense object detection. In *Proceedings of the IEEE/CVF*  
694 *Conference on Computer Vision and Pattern Recognition*, pp. 9407–9416, 2022.
- 695
- 696 Xizhou Zhu, Weijie Su, Lewei Lu, Bin Li, Xiaogang Wang, and Jifeng Dai. Deformable detr: De-  
697 formable transformers for end-to-end object detection. In *International Conference on Learning*  
698 *Representations*, 2020.
- 699
- 700
- 701

## A APPENDIX

### A.1 IMPLEMENTATION DETAILS

#### A.1.1 HYPERPARAMETER CONFIGURATIONS

Table 6 summarizes the hyperparameter configurations for the D-FINE models. All variants use HGNetV2 backbones pretrained on ImageNet (Cui et al., 2021; Russakovsky et al., 2015) and the AdamW optimizer. D-FINE-X is set with an embedding dimension of 384 and a feedforward dimension of 2048, while the other models use 256 and 1024, respectively. The D-FINE-X and D-FINE-L have 6 decoder layers, while D-FINE-M and D-FINE-S have 4 and 3 decoder layers. The GELAN module progressively reduces hidden dimension and depth from D-FINE-X with 192 dimensions and 3 layers to D-FINE-S with 64 dimensions and 1 layer. The base learning rate and weight decay for D-FINE-X and D-FINE-L are  $2.5 \times 10^{-4}$  and  $1.25 \times 10^{-4}$ , respectively, while D-FINE-M and D-FINE-S use  $2 \times 10^{-4}$  and  $1 \times 10^{-4}$ . Smaller models also have higher backbone learning rates than larger models. The total batch size is 32 across all variants. Training schedules include 72 epochs with advanced augmentation (RandomPhotometricDistort, RandomZoomOut, RandomIoUCrop, and RMultiScaleInput) followed by 2 epochs without advanced augmentation for D-FINE-X and D-FINE-L, and 120 epochs with advanced augmentation followed by 4 epochs without advanced augmentation for D-FINE-M and D-FINE-S (RT-DETRv2 Training Strategy (Lv et al., 2024) in Table 4). The number of pretraining epochs is 21 for D-FINE-X and D-FINE-L models, while for D-FINE-M and D-FINE-S models, it ranges from 28 to 29 epochs.

Table 6: Hyperparameter configurations for different D-FINE models.

Setting	D-FINE-X	D-FINE-L	D-FINE-M	D-FINE-S
Backbone Name	HGNetv2-B5	HGNetv2-B4	HGNetv2-B2	HGNetv2-B0
Optimizer	AdamW	AdamW	AdamW	AdamW
Embedding Dimension	384	256	256	256
Feedforward Dimension	2048	1024	1024	1024
GELAN Hidden Dimension	192	128	128	64
GELAN Depth	3	3	2	1
Decoder Layers	6	6	4	3
Queries	300	300	300	300
$a, c$ in $W(n)$	0.5, 0.125	0.5, 0.25	0.5, 0.25	0.5, 0.25
Bin Number $N$	32	32	32	32
Sampling Point Number	(S: 3, M: 6, L: 3)	(S: 3, M: 6, L: 3)	(S: 3, M: 6, L: 3)	(S: 3, M: 6, L: 3)
Temperature $T$	5	5	5	5
Base LR	$2.5e-4$	$2.5e-4$	$2e-4$	$2e-4$
Backbone LR	$2.5e-6$	$1.25e-5$	$2e-5$	$1e-4$
Weight Decay	$1.25e-4$	$1.25e-4$	$1e-4$	$1e-4$
Weight of $\mathcal{L}_{VFL}$	1	1	1	1
Weight of $\mathcal{L}_{BBox}$	5	5	5	5
Weight of $\mathcal{L}_{GIUO}$	2	2	2	2
Weight of $\mathcal{L}_{FGL}$	0.15	0.15	0.15	0.15
Weight of $\mathcal{L}_{DDF}$	1.5	1.5	1.5	1.5
Total Batch Size	32	32	32	32
EMA Decay	0.9999	0.9999	0.9999	0.9999
Epochs (w/ + w/o Adv. Aug.)	72 + 2	72 + 2	120 + 4	120 + 4
Epochs (Pretrain + Finetune)	21 + 31	21 + 32	29 + 49	28 + 58

#### A.1.2 DATASETS SETTINGS

For pretraining, following the approach in (Chen et al., 2022b; Zhang et al., 2022; Chen et al., 2024), we combine the images from the Objects365 (Shao et al., 2019) train set with the validate set, excluding the first 5k images. To further improve training efficiency, we resize all images with resolutions exceeding  $640 \times 640$  down to  $640 \times 640$  beforehand. We use the standard COCO2017 (Lin et al., 2014b) data splitting policy, training on COCO `train2017`, and evaluating on COCO `val2017`.

## A.2 VISUALIZATION OF D-FINE PREDICTIONS

Figure 5 demonstrates the robustness of the D-FINE-X model, visualizing its predictions in various challenging scenarios. These include occlusion, low-light conditions, motion blur, depth of field effects, rotation, and densely populated scenes with numerous objects in close proximity. Despite these difficulties, the model accurately identifies and localizes objects, such as animals, vehicles, and people. This visualization highlights the model’s ability to handle complex real-world conditions while maintaining robust detection performance.

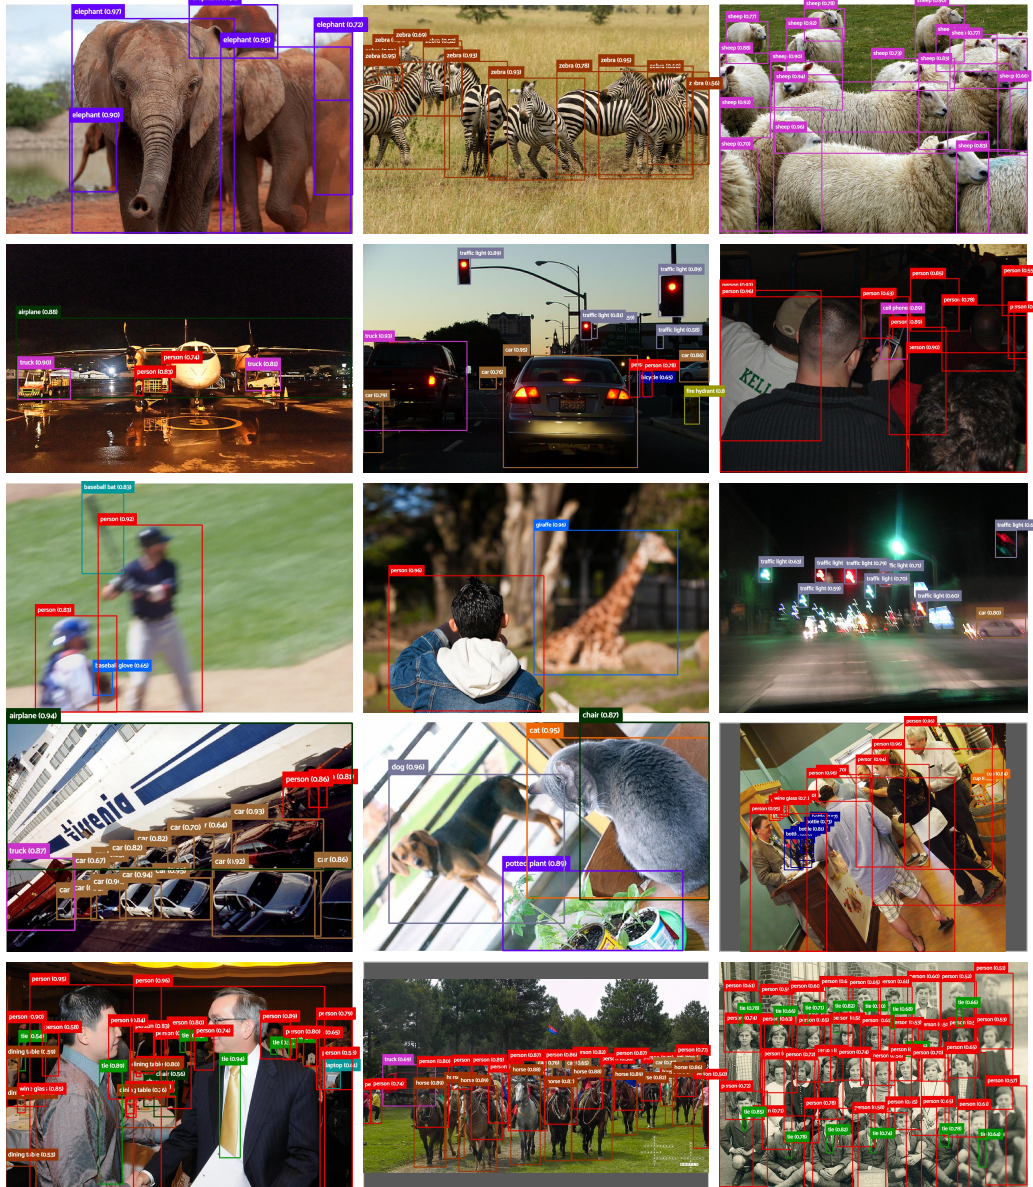


Figure 5: Visualization of D-FINE-X (without pre-training on Objects365) predictions under challenging conditions, including occlusion, low light, motion blur, depth of field effects, rotation, and densely populated scenes (confidence threshold=0.5).

## A.3 COMPARISON WITH LIGHTER DETECTORS

Table 8 presents a comprehensive comparison of D-FINE models with various lightweight real-time object detectors in the S and M model sizes on the COCO val2017. D-FINE-S achieves an impressive AP of 48.5%, surpassing other lightweight models such as Gold-YOLO-S (46.4%) and RT-DETRv2-S (48.1%), while maintaining a low latency of 3.49 ms with only 10.2M parameters and 25.2 GFLOPs. Pretraining on Objects365 further boosts D-FINE-S to 50.7%, marking an improvement of +2.2%. Similarly, D-FINE-M attains an AP of 52.3% with 19.2M parameters and 56.6 GFLOPs at 5.62 ms, outperforming YOLOv10-M (51.1%) and RT-DETRv2-M (49.9%). Pretraining on Objects365 consistently enhances D-FINE-M, yielding a +2.8% gain. These results demonstrate that D-FINE models strike an excellent balance between accuracy and efficiency, consistently surpassing other state-of-the-art lightweight detectors while preserving real-time performance.

Table 7: Performance comparison of S and M sized real-time object detectors on COCO val2017.

Model	#Params.	GFLOPs	Latency (ms)	AP <sup>val</sup>	AP <sub>50</sub> <sup>val</sup>	AP <sub>75</sub> <sup>val</sup>	AP <sub>S</sub> <sup>val</sup>	AP <sub>M</sub> <sup>val</sup>	AP <sub>L</sub> <sup>val</sup>
<i>Non-end-to-end Real-time Object Detectors</i>									
YOLOv6-S	7M	17	3.62	45.0	61.8	48.9	24.3	50.2	62.7
YOLOv6-M	35M	86	5.48	50.0	66.9	54.6	30.6	55.4	67.3
YOLOv8-S	11M	29	6.96	44.9	61.8	48.6	25.7	49.9	61.0
YOLOv8-M	26M	79	9.66	50.2	67.2	54.6	32.0	55.7	66.4
YOLOv9-S	7M	26	8.02	44.9	61.8	48.6	25.7	49.9	61.0
YOLOv9-M	20M	76	10.15	50.2	67.2	54.6	32.0	55.7	66.4
Gold-YOLO-S	22M	46	2.01	46.4	63.4	-	25.3	51.3	63.6
Gold-YOLO-M	41M	88	3.21	51.1	68.5	-	32.3	56.1	68.6
RTMDet-S	9M	15	7.77	44.6	61.9	48.1	24.9	48.5	62.5
RTMDet-M	25M	39	10.62	49.4	66.8	53.7	30.3	53.9	66.2
YOLO11-S	9M	22	6.81	46.6	63.4	50.3	28.7	51.3	64.1
YOLO11-M	20M	68	8.79	51.2	67.9	55.3	33.0	56.7	67.5
YOLO11-S*	9M	22	2.86	47.0	63.9	50.7	29.0	51.7	64.4
YOLO11-M*	20M	68	4.95	51.5	68.5	55.7	33.4	57.1	67.9
<i>End-to-end Real-time Object Detectors</i>									
YOLOv10-S	7M	22	2.65	46.3	63.0	50.4	26.8	51.0	63.8
YOLOv10-M	15M	59	4.97	51.1	68.1	55.8	33.8	56.5	67.0
RT-DETR-R18	20M	61	4.63	46.5	63.8	50.4	28.4	49.8	63.0
RT-DETR-R34	31M	93	6.43	48.9	66.8	52.9	30.6	52.4	66.3
RT-DETRv2-S	20M	60	4.59	48.1	65.1	57.4	36.1	57.9	70.8
RT-DETRv2-M	31M	92	6.40	49.9	67.5	58.6	35.8	58.6	72.1
RT-DETRv3-R18	20M	61	4.63	48.7	-	-	-	-	-
RT-DETRv3-R34	31M	93	6.43	50.1	-	-	-	-	-
LW-DETR-S	15M	17	3.02	43.6	-	-	-	-	-
LW-DETR-M	28M	43	5.23	47.2	-	-	-	-	-
<b>D-FINE-N (Ours)</b>	<b>4M</b>	<b>7.2</b>	<b>2.12</b>	<b>42.8</b>	<b>60.2</b>	<b>45.4</b>	<b>22.8</b>	<b>46.8</b>	<b>61.9</b>
<b>D-FINE-S (Ours)</b>	<b>10M</b>	<b>25</b>	<b>3.49</b>	<b>48.5</b>	<b>65.6</b>	<b>52.6</b>	<b>29.1</b>	<b>52.2</b>	<b>65.4</b>
<b>D-FINE-M (Ours)</b>	<b>19M</b>	<b>57</b>	<b>5.55</b>	<b>52.3</b>	<b>69.8</b>	<b>56.4</b>	<b>33.2</b>	<b>56.5</b>	<b>70.2</b>
<i>End-to-end Real-time Object Detectors (Pretrained on Objects365)</i>									
RT-DETR-R18	20M	61	4.63	49.2	66.6	53.5	33.2	52.3	64.8
LW-DETR-S	15M	17	3.02	48.0	66.9	51.7	26.8	52.5	65.5
LW-DETR-M	28M	43	5.23	52.6	72.0	56.7	32.6	57.7	70.7
<b>D-FINE-S (Ours)</b>	<b>10M</b>	<b>25</b>	<b>3.49</b>	<b>50.7</b>	<b>67.6</b>	<b>55.1</b>	<b>32.7</b>	<b>54.6</b>	<b>66.5</b>
<b>D-FINE-M (Ours)</b>	<b>19M</b>	<b>57</b>	<b>5.62</b>	<b>55.1</b>	<b>72.6</b>	<b>59.7</b>	<b>37.9</b>	<b>59.4</b>	<b>71.7</b>

\* : NMS is tuned with a confidence threshold of 0.01.

## A.4 HYPERPARAMETER SENSITIVITY ANALYSIS

Appendix A.3 presents a subset of hyperparameter ablation studies evaluating the sensitivity of our model to key parameters in the FDR and GO-LSD modules. We examine the weighting function parameters  $a$  and  $c$ , the number of distribution bins  $N$ , and the temperature  $T$  used for smoothing logits in the KL divergence.



Table 8: Performance comparison of real-time object detectors on Objects365.

Model	#Params.	GFLOPs	Latency (ms)	AP <sup>val</sup>	AP <sub>50</sub> <sup>val</sup>
RT-DETR-R18	20M	61	4.63	22.9	31.2
RT-DETR-R50	42M	136	9.12	35.1	46.2
RT-DETR-R101	76M	259	13.61	36.8	48.3
YOLOv10-L	24M	120	7.66	34.2	44.9
YOLOv10-X	30M	160	10.74	34.9	45.8
<b>D-FINE-S (Ours)</b>	10M	25	3.49	<b>31.0</b>	41.0
<b>D-FINE-M (Ours)</b>	19M	57	5.55	<b>38.6</b>	49.7
<b>D-FINE-L (Ours)</b>	31M	91	8.07	<b>44.7</b>	56.9
<b>D-FINE-X (Ours)</b>	62M	202	12.89	<b>49.5</b>	62.4

Table 9: Hyperparameter ablation studies on D-FINE-L.  $\epsilon$  is a very small value.  $\tilde{a}$ ,  $\tilde{c}$  indicate that  $a$  and  $c$  are learnable parameters.

$a, c$	$\frac{1}{4}, \frac{1}{4}$	$\frac{1}{2}, \frac{1}{\epsilon}$	$\frac{1}{2}, \frac{1}{4}$	$\frac{1}{2}, \frac{1}{8}$	$1, \frac{1}{4}$	$\tilde{a}, \tilde{c}$
AP <sup>val</sup>	52.7	53.0	<b>53.3</b>	53.2	53.2	53.1
$N$	4	8	16	<b>32</b>	64	128
AP <sup>val</sup>	53.3	53.4	53.5	<b>53.7</b>	53.6	53.6
$T$	1	2.5	<b>5</b>	7.5	10	20
AP <sup>val</sup>	53.2	53.7	<b>54.0</b>	53.8	53.7	53.5

(1) Setting  $a = \frac{1}{2}$  and  $c = \frac{1}{4}$  yields the highest AP of 53.3%. Notably, treating  $a$  and  $c$  as learnable parameters ( $\tilde{a}, \tilde{c}$ ) slightly decreases AP to 53.1%, suggesting that fixed values simplify the optimization process. When  $c$  is extremely large, the weighting function approximates the linear function with equal intervals, resulting in a suboptimal AP of 53.0%. Additionally, values of  $a$  that are too large or too small can reduce fineness or limit flexibility, adversely affecting localization precision. (2) Increasing the number of distribution bins improves performance, with a maximum AP of 53.7% achieved at  $N = 32$ . Beyond  $N = 32$ , no significant gain is observed. (3) The temperature  $T$  controls the smoothing of logits during distillation. An optimal AP of 54.0% is achieved at  $T = 5$ , indicating a balance between softening the distribution and preserving effective knowledge transfer.

#### A.5 CLARIFICATION ON THE INITIAL LAYER REFINEMENT

In the main text, we define the refined distributions at layer  $l$  as:

$$\mathbf{Pr}^l(n) = \text{Softmax} \left( \Delta \text{logits}^l(n) + \text{logits}^{l-1}(n) \right), \quad (8)$$

where  $\Delta \text{logits}^l(n)$  are the residual logits predicted by layer  $l$ , and  $\text{logits}^{l-1}(n)$  are the logits from the previous layer.

For the initial layer ( $l = 1$ ), there is no previous layer, so the formula simplifies to:

$$\mathbf{Pr}^1(n) = \text{Softmax} \left( \text{logits}^1(n) \right). \quad (9)$$

Here,  $\text{logits}^1(n)$  are the logits predicted by the first layer.

This clarification ensures the formulation is consistent and mathematically rigorous for all layers.