

Examining LLMs Ability to Summarize Code Through Mutation-Analysis

Anonymous Author(s)

Abstract

As developers increasingly rely on LLM-generated code summaries for documentation, testing, and review, it is important to study whether these summaries accurately reflect what the program actually does. LLMs often produce confident descriptions of what the code looks like it should do (intent), while missing subtle edge cases or logic changes that define what it actually does (behavior). We present a mutation-based evaluation methodology that directly tests whether a summary truly matches the code's logic. Our approach generates a summary, injects a targeted mutation into the code, and checks if the LLM updates its summary to reflect the new behavior. We validate it through three experiments totalling 624 mutation-summary evaluations across 62 programs. First, on 12 controlled synthetic programs with 324 mutations varying in type (statement, value, decision) and location (beginning, middle, end). We find that summary accuracy decreases sharply with complexity from 76.5% for single functions to 17.3% for multi-threaded systems, while mutation type and location exhibit weaker effects. Second, testing 150 mutated samples on 50 human-written programs from the Less Basic Python Problems (LBPP) dataset confirms the same failure patterns persist as models often describe algorithmic intent rather than actual mutated behavior with a summary accuracy rate of 49.3%. Furthermore, while a comparison between GPT-4 and GPT-5.2 shows a substantial performance leap (from 49.3% to 85.3%) and an improved ability to identify mutations as "bugs", both models continue to struggle with distinguishing implementation details from standard algorithmic patterns. This work establishes mutation analysis as a systematic approach for assessing whether LLM-generated summaries reflect program behavior rather than superficial textual patterns.

ACM Reference Format:

Anonymous Author(s). 2018. Examining LLMs Ability to Summarize Code Through Mutation-Analysis. In *Proceedings of (Conference acronym 'XX)*. ACM, New York, NY, USA, 9 pages. <https://doi.org/XXXXXXX.XXXXXXX>

1 Introduction

While writing code may be the most visible part of software development, a significant portion of a developer's time is actually spent trying to understand code that already exists. [2, 23]. Whether it's reviewing a teammate's work, working with legacy systems, or joining a new team, developers constantly need to read and comprehend a piece of code. In fast-paced development environments, code summaries offer a simple and effective way to quickly understand what a piece of code does. A good summary can save time, cognitive effort, and help with routine coding tasks like debugging, reviewing, onboarding, or working with unfamiliar codebases. On the other hand, an inaccurate or incomplete summary can waste time, or

lead developers to draw the wrong conclusions about how the code works, which may lead to errors and defects in the software.

The emergence of tools powered by large language models (LLMs) such as ChatGPT [3], and GitHub Copilot [1] has fundamentally reshaped how developers interact with code [24, 26, 28]. Among their many applications, code summarization has received growing attention, with developers increasingly relying on these systems to interpret unfamiliar code. While the output of these tools often appears confident, it's not always clear whether it reflects what the code actually does. Prior work has shown that even experienced developers can misinterpret code due to small but deceptive patterns known as "atoms of confusion" [9–11]. These are short snippets of code that look harmless but cause misunderstanding because of how they are written or where they appear. Just like certain patterns can lead humans to make mistakes, these models may also misrepresent parts of the code leading to summaries that sound plausible but are inaccurate. This raises the question of whether these summaries truly track the underlying behavior of the code or merely reflect surface level patterns.

One way to evaluate how well a human summarizes code is to ask them to explain it, then check whether that explanation reflect what the code actually does [13]. If a change is made to the code, then the explanation should change too. This paper adopts a similar approach to evaluate LLM-based code summarization by comparing the summaries a model generates before and after a behavior-changing modification is applied to the code. Our approach checks whether a summary updates when the code's behavior changes. This motivates an evaluation that tests whether summaries are grounded in the provided code. Since LLMs are trained to predict likely text, their summaries may rely on familiar patterns and common implementations which can lead them to describe what the code appears intended to do rather than what it actually does after a subtle edit. To introduce these changes in a systematic manner, we apply *mutations* to transform the code. Mutations are a concept from software testing [5] where faults are introduced into correct programs to evaluate test suites. We use them as a way to introduce meaningful changes for evaluating code summaries.

Listing 1 shows an example of a mutation applied to a function. The model (GPT-4 in this case) summarizes both the original and mutated versions as "This method returns the smallest element in the heap" despite the fact that the mutated version returns the last element instead. Throughout the paper and in our replication package, we provide many more examples of cases where LLMs produces accurate summaries and where it fails to describe the actual behavior of the code. By comparing summaries across behavior-altering mutations, we can test whether a model is responding to the specific implementation details of the program or producing a description consistent with the intended pattern. Using this mutation-based evaluation, we observe a considerable number of

Conference acronym 'XX, Woodstock, NY
2018. ACM ISBN 978-1-4503-XXXX-X/2018/06
<https://doi.org/XXXXXXX.XXXXXXX>

cases where the model does not capture the introduced behavioral changes, even when they alter the intended outcome of the code.

```

117 # Original Version
118
119 1 # Original Version
120 2 def get_min(self):
121 3     if not self.heap:
122 4         return None
123 5     return self.heap[0]
124 6
125 # Mutated Version
126 7 # Mutated Version
127 8 def get_min(self):
128 9     if not self.heap:
129 10        return None
130 11    return self.heap[-1]
131

```

Listing 1: Snippet of original compared to snippet of `val_e_2` from `sample05`. The value returned from the function is changed from the first element on line 5 to the last element on line 11.

This paper contributes a mutation-based methodology for evaluating LLM code summarization using targeted code modifications. We apply this methodology in three complementary ways. First, we construct a controlled synthetic dataset designed to control for program size, mutation location, and structural complexity (spanning single-function to multi-threaded architectures). In this setting, we analyze performance as a function of program size and structural complexity, mutation type, and mutation location, allowing us to identify which dimensions most strongly affect whether a summary reflects a change in the code’s logic. Second, we evaluate the same methodology on a dataset of human-written programs to test whether the observed findings persist when the code is not model-generated. This addresses the concern that results from model-generated code may not transfer to code written by developers. Third, we repeat the evaluation across a newer generation model, enabling a direct comparison of whether newer models are more capable of tracking the code’s logic under the same evaluation conditions. This work positions mutation analysis as a practical evaluation framework for comparing LLM-generated code summaries across models, datasets, and program characteristics.

2 Background and Related Work

Several recent studies have investigated the capabilities of LLMs in explaining and summarizing code [8, 13, 17, 25, 26, 31, 35]. Sun et al. [33] conducted a systematic evaluation of code summarization using LLMs, analyzing prompting techniques, model settings, and performance across different programming languages. Ahmed et al. [4] investigated whether adding structured semantic facts from code to the LLM prompts improves code summarization, finding that this approach enhances summarization performance. Existing benchmarks like CodeXGLUE [19] and HumanEvalExplain [25] were also developed to evaluate code summarization performance. Most prior work in this field has primarily relied on metrics like BLEU [27], ROUGE-L [15], METEOR [7], or BERTScore [39] to assess summary quality. However, these metrics have been shown to correlate poorly with human judgments [21, 30]. To address this, recent research has explored alternative approaches. Wu et al. [38] introduced CodeRPE, a framework that uses LLMs as evaluators of code summaries by assigning them different roles to provide different perspectives. Sun et al. [34] studied summarization strategies for higher-level code units and investigated the use of LLMs as

evaluators. Their findings suggest LLMs can approximate human judgment but may exhibit a bias toward the summaries generated by itself. Similarly, Mastropaolo et al. [21] proposed SIDE, a metric that uses contrastive learning to assess how well a summary aligns with the semantics of the code independent of reference summaries. In contrast to prior work that relies on automated metrics or LLM-based evaluation, we assess summary correctness through human judgment. We also focus on whether LLM-generated summaries accurately capture the behavior and the intent of the code providing a more comprehensive evaluation.

There has been a growing interest in evaluating how well LLMs understand code, especially using mutation-based or metamorphic testing approaches. Ma et al. [20] introduced an evaluation method for dynamic behavior understanding of code using mutation analysis. Specifically, they performed an equivalent mutant detection test where they prompted the LLM to determine whether a given mutant was equivalent to the original code. Li et al. [14] also adapt this idea and propose Mutation-based Consistency Testing (MCT) where small semantic-altering changes are injected into code. They then provide the LLM with the code and its human-written description to test whether the LLM can correctly detect subtle inconsistencies between the code and its natural language summary. Similarly, Haroon et al. [12] applied semantic-preserving code mutations (SPMs) to faulty real-world programs and test whether LLMs can locate the faults, essentially testing the code understanding ability of the LLM. Likewise, Wang et al. [37] explore using LLMs to generate mutants. They show that GPT-4 can produce syntactically valid mutations that are close to real-world bugs comparable to traditional mutation tools. Our work similarly adopts a mutation-testing perspective, but differs from all of the above in that it focuses on whether the model’s summaries change when the underlying code is subtly modified. This shift lets us examine the model’s internal consistency and sensitivity to semantic perturbations in code.

One could argue that our work is on code understanding and that we should look at it from that lens. However, based on feedback from the previous version of this paper, we recognize that LLMs rely on the Transformer architecture to statistically predict the most likely next token based on patterns learned from vast amounts of text [36]. They inherently are not understanding code. This is supported by research conducted at Anthropic [6] where they state that currently they are only able to see if models can think or not with prompts that are only 10 words long. Even with those and only in the case of poetry can they see that the model may think a few words ahead and not just the next word. In math problems they find that the models will not follow logical steps. All of this indicates that at the very least, we do not know if models can understand code or not. We can only see that it can summarize code. Therefore, we stick to code summarization as the topic for this paper

3 Research Questions

We validate our mutation-based evaluation methodology through three questions:

- **RQ1:** How do complexity, program size, mutation type, and mutation location influence the model’s summarization performance?
- **RQ2:** Are the same limitations seen in human-written code?

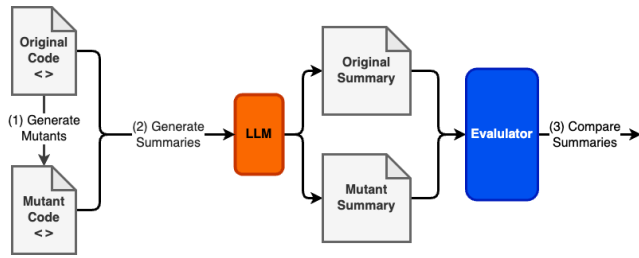


Figure 1: Overview of process.

- **RQ3:** How does summarization reliability change across model generations?

4 Experimental Process

We describe our experimental process, as outlined in Figure 1.

(1) Generate Mutants

Given an original code sample, we first generate mutants by injecting changes into the original code. Each type of mutation targets a different aspect of the code and serves as a proxy for evaluating how well the model is able to capture each of these aspects. (a) **Statement mutations** remove, duplicate, or rearrange specific statements in the code. This results in statements being executed in a different order, more than once, or not at all, causing changes in the program flow. (b) **Value mutations** modify parameters or constant values in the code and are intended to test the model’s ability to reflect these changes in its summaries. (c) **Decision mutations** modify arithmetic or logic operators which affect the program’s decision-making logic.

(2) Generate Summaries

After the mutants have been generated, we produce summaries for each of the mutants as well as the original code. For this study, we define a *summary* as the natural language explanation of a code snippet’s logic and behavior generated by an LLM. We produce these summaries by feeding the code into the model with the fixed prompt: (“Explain the following code snippet in plain English.”) This prompt structure aligns with prior studies that concluded that the use of LLMs is beneficial [13, 26, 31]. To ensure reproducibility and prevent context leakage, we instantiate a fresh session for each sample and set the temperature to 0 to enforce deterministic output.

(3) Compare Summaries

The final stage of our pipeline involves the *evaluator*, which compares the summary of the mutated code against the original to determine if the behavioral change was detected. We explicitly chose human evaluators over automated systems for two critical reasons. First, we rejected heuristic-based metrics such as BLEU [27]. While standard in Natural Language Processing, recent literature indicates these metrics correlate poorly with semantic correctness outside of machine translation tasks [29]. They are particularly ill-suited for code summarization, where functionally identical logic can be described in vastly different words, rendering n-gram overlap an unreliable proxy for accuracy. Second, we considered but ultimately

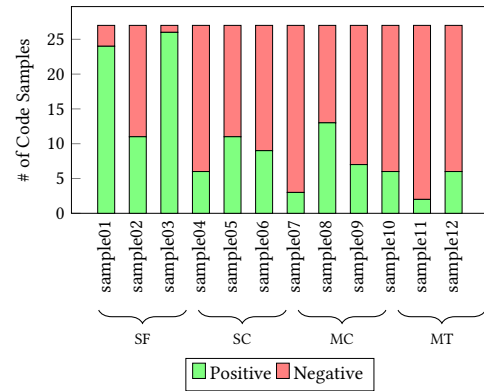


Figure 2: Results of detecting mutations across the different code samples.

rejected execution-based evaluation methods used in recent benchmarks [8, 16, 25]. These methods typically attempt to regenerate executable code from the summary and run unit tests. However, this approach lacks the precision required for our specific objective. Because our mutations are often subtle semantic perturbations (e.g., modifying a single comparator or return value), the noise introduced by the re-generation process could obscure whether the summary itself accurately captured the change.

Instead, we compared the summaries manually. When comparing the two summaries manually, the criteria we used was whether we could identify the mutation by comparing the two summaries. If the two summaries were different and we were able to identify change that was applied by comparing the two summaries, then the code sample was considered a *positive* result. If we were not able to identify the change from the two summaries, then the code sample was considered a *negative* result. This would mean that for two different pieces of code, the model generated the same summary and as a result, we conclude that it did not accurately summarize the code.

4.1 Positive

An example of a code sample that was classified as positive is `sample01/val/b2`. Listing 2 displays a snippet of the the original and mutated code samples. The summary for the original snippet says: *It first checks if the length of the list is greater than 1, because a list with only one element is already sorted.* and the summary for the mutated snippet says: *The function first checks if the length of the array ‘arr’ is greater than 2.* This shows that the mutation was clearly identified in the summaries and that they are different. Other code samples that have been classified in this category also had their mutations surfaced in the summaries with a similar level of clarity. In some cases, the mutation is not only identified, but also recognized as an error from the original code. An example of this is `sample01/val/b1`, which is shown in Listing 3. Here, the summary for the mutated code says: *However, there is a mistake in the code: the array is being split into two halves using ‘len(arr) // 3’ instead of ‘len(arr) // 2’.* From this, it appears that the model recognized the intended merge sort algorithm and was actually able to point out the mistake and what to do to fix it.

```

349 1 # Original Version
350 2 def merge_sort(arr):
351 3     if len(arr) > 1:
352 4         mid = len(arr) // 2
353 5
354 6 # Mutated Version
355 7 def merge_sort(arr):
356 8     if len(arr) > 2:
357 9         mid = len(arr) // 2

```

Listing 2: Snippet of original compared to snippet of val_b_2 from sample02. The '1' value on line 3 was changed to '2' on line 8.

```

360 1 # Original Version
361 2 def merge_sort(arr):
362 3     if len(arr) > 1:
363 4         mid = len(arr) // 2
364 5
365 6 # Mutated Version
366 7 def merge_sort(arr):
367 8     if len(arr) > 1:
368 9         mid = len(arr) // 3

```

Listing 3: Snippet of original compared to snippet of val_b_1 from sample01. The '2' value on line 4 was changed to '3' on line 9.

4.2 Negative

One way a sample is classified as a negative if the mutated summary still describes the original behaviour. This means that the summary is wrong and does not accurately describe the behaviour of the mutated code. An example of this is sample01/desc/b2, as shown in Listing 4. The summary for the mutated code still says *It first checks if the length of the list is greater than 1.*, even though the mutation changes the behaviour of the code to check if the length of the list is less than one. sample02/desc/b1 shows that even a mutation applied to a well-known algorithm can go unrecognized. Listing 5 shows the implementation of the find operation for a union-find data structure in Kruskal's algorithm, which is a well-known algorithm for finding the minimum spanning tree of a graph. The mutation inverts the logic for when a node is determined to be a parent of itself, however, this goes unnoticed by the model. The mutated summary still says: *If 'i' is not its own parent (indicating that it is part of a larger set), the function recursively calls itself until it finds the root.* This is the behaviour of the original code, and is no longer correct for the mutated version. Another way a sample could be classified as a negative is if neither summaries explicitly described the mutated behaviour. That is, if the original and mutated summary both accurately describe the original and mutated code. Revisiting our earlier example of Kruskal's algorithm, we observe a case of this in sample02/stmt/b2, shown in Listing 6. Here, we removed the return value from the find operation when a node is a parent of itself. Python will implicitly return None in this case instead of the index of the node itself. This change is incompatible with the rest of the code and will result in an error, but this is not recognized by the model. In Listing 7 are relevant snippets from the original and mutated summaries. We can see that the return value is not encoded into either summary and as a result, the mutation cannot be detected from the summaries. The difference between this case and the previous examples lies in the reason the mutation

```

407 1 # Original Version
408 2 def merge_sort(arr):
409 3     if len(arr) > 1:
410 4         mid = len(arr) // 2
411 5
412 6 # Mutated Version
413 7 def merge_sort(arr):
414 8     if len(arr) < 1:
415 9         mid = len(arr) // 2

```

Listing 4: Snippet of original compared to snippet of desc_b_2 from sample01. The '<' sign on line 3 was changed to '>' on line 8.

```

418 1 # Original Version
419 2 def find(parent, i):
420 3     if parent[i] == i:
421 4         return i
422 5     return find(parent, parent[i])
423 6
424 7 # Mutated Version
425 8 def find(parent, i):
426 9     if parent[i] != i:
427 10        return i
428 11        return find(parent, parent[i])

```

Listing 5: Snippet of original compared to snippet of desc_b_2 from sample01. The '==' comparator on line 3 was changed to '!=' on line 9.

```

432 1 # Original Version
433 2 def find(parent, i):
434 3     if parent[i] == i:
435 4         return i
436 5     return find(parent, parent[i])
437 6
438 7 # Mutated Version
439 8 def find(parent, i):
440 9     if parent[i] == i:
441 10        return
442 11        return find(parent, parent[i])

```

Listing 6: Snippet of original compared to snippet of stmt_b_2 from sample02. 'return i' on line 4 was changed to 'return' on line 10.

is not detected. In this case, the summaries generated are not precise or detailed enough to encode the parts of the code that are relevant to the mutation. On the other hand, in the previous example, the summaries do encode the relevant parts of the code, but the wrong information is encoded.

5 Results and Discussion

In this section, we will answer the three research questions using the results we collected and discuss the implications of these answers.

5.1 RQ1: How do complexity, program size, mutation type, and mutation location influence the model's summarization performance?

Dataset Selection and Rationale. We evaluate summarization using two datasets, we describe the second one in RQ2 and RQ3. The first one consists of controlled synthetic programs: We construct 12

```

465 Snippet of Original Summary:
466 `find(parent, i)`: This is a helper function that implements the "
467   find" operation of the Union-Find data structure. It takes an
468   array `parent` and an element `i`, and it recursively finds
469   the root (representative) of the set that `i` belongs to. If
470   `i` is its own parent, it is the root; otherwise, the
471   function follows the chain of parents until it finds the root
472   .
473 Snippet of Mutated Summary:
474 `find(parent, i)`: This is a helper function that implements the "
475   find" operation of the Union-Find algorithm. It takes an
476   array `parent` and an element `i`, and it recursively finds
477   the root (or representative) of the set that `i` belongs to.
478   If `i` is its own parent, it is the root.

```

Listing 7: Snippets of summaries of the original compared to of stmt_m_3 from sample12

Python programs spanning four structural complexity categories: single function (SF), single class (SC), multiple classes (MC), and multiple classes with multithreading (MT), with three programs per category. This dataset is designed to support controlled analysis as it allows us to vary program complexity and to place mutations in specific regions of the code (beginning, middle, end) while keeping other factors fixed. The programs were created using GPT-4 with manually crafted prompts and manual edits.

Mutated Samples. For each of the 12 controlled programs, we generate variants by varying mutations along two dimensions. The first is mutation type: statement, value, and decision. The second is mutation location: we place the mutation in the first, middle, or last third of the code. To reduce the risk that results are driven by a single edit, we create multiple distinct mutants for each (type, location) combination. This design yields 324 mutated samples in total and enables an analysis of how summarization behavior changes with program complexity, mutation type, and where the change occurs in the code.

Location of Mutation: This factor looks at whether the location of a change within the code affects how likely an LLM is to reflect it in its summary. The motivation behind this is the primacy/recency effect in humans [32], where humans tend to remember best items that appear first, followed by those at the end, and weakest for those in the middle. Since LLMs also use attention mechanisms that assign varying levels of importance to different parts of an input sequence [36], it is possible that a similar phenomenon may occur. Additionally, Liu et al. showed that large language models tend to perform poorly at identifying relevant information in the middle of large contexts compared to the beginning and end [18].

Choice of Model. We used GPT-4 (gpt-4-1106-preview) for RQ1, which was state-of-the-art at the time of study design (mid-2024) and remains widely deployed in research and practice. While newer models have since been released, the labor-intensive nature of manual classification (324 mutations with dual annotation) necessitated focusing on a single model for depth. Rather than replacing this data with every new release, we use it to establish a concrete reference point. By documenting the limitations of this established model first, we can accurately measure the progress of the field when we compare it against the newer GPT-5.2 model in RQ3.

Inter-Rater Reliability. Two authors independently classified the 324 mutants. Inter-rater agreement was 96.6%, with Cohen’s

$\kappa = 0.928$, indicating almost perfect agreement. Disagreements (3.4%) were resolved through discussion, and the reconciled labels were used in all analyses.

Effect of Program Size and Complexity. A chi-square test revealed a significant association between program complexity and summarization accuracy, $\chi^2(3) = 69.04$, $p < 0.001$, with a large effect size (Cramér’s $V = 0.462$). Accuracy decreased monotonically as complexity increased: 76.5% for single-function programs, 33.3% for single-class programs, 28.4% for multi-class systems, and 17.3% for multi-threaded systems. To better visualize the results along this dimension, we present Figure 3, which aggregates the results by complexity categories. As code becomes more complex, summarizing it requires capturing relationships across functions, classes, and execution paths. Program size exhibited a similarly strong effect. Positive cases had a median size of 60 Lines of Code (LOC), whereas negative cases had a median size of 116 LOC. A Mann–Whitney U test confirmed that this difference was significant ($U = 5481$, $p < 0.001$). These results highlight a challenge for GPT-4 based code summarization, as real-world code is typically larger, more complex, and composed of multiple interconnected components.

Effect of Mutation type and Location In contrast, mutation type did not exhibit a statistically significant association with accuracy, $\chi^2(2) = 1.95$, $p = 0.378$. Likewise, mutation location within the program showed no significant association with summarization performance, $\chi^2(2) = 0.23$, $p = 0.890$. For better visualization, we present Figure 4 and 5 which shows the results aggregated by the mutation type and mutation location, respectively, across the different complexity categories. Within the SF complexity category, positive rates are nearly identical across mutation types (74–78%), suggesting mutation type has little practical effect on short single-function programs. As complexity increases, differences by mutation type become more pronounced: in SC, decision mutations show the lowest positive rate (19%) compared to statement (33%) and value (48%), and in MC performance drops most for decision and statement mutations (22% and 15%) while value mutations remain higher (48%). Across categories, value mutations are generally handled better than statement or decision mutations, except in the MT setting where value mutations degrade sharply. One plausible explanation is that in multithreaded code, the same value can be changed by different threads at different times. This adds complexity that GPT-4 may not be able to reason about effectively, given that there are multiple threads of execution and values changing simultaneously. Additionally, we found no clear correlation between the location of a mutation and GPT-4’s summarization accuracy, suggesting that all parts of the code are treated with similar attention during summarization.

Modes of Failure: Missing Details vs. Hallucinated Intent. Manual analysis reveals two failure modes. In the first, the summary is too abstract it omits the mutated logic entirely, describing high-level intent that applies equally to original and mutated versions. This reflects a granularity problem where the summary fails to capture implementation details. In the second, the summary explicitly describes the original program’s behavior rather than the mutated version. Here the model produces a description aligned with expected algorithmic patterns even when the mutation contradicts that pattern. The second failure mode is particularly revealing. Consider sample01/stmt/m1: a $j+=1$ line is removed from merge sort, but

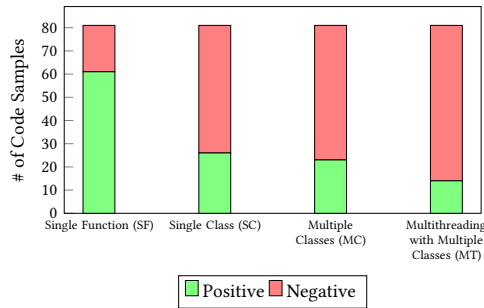


Figure 3: Results across the complexity categories.

the summary still claims the index is incremented, a canonical step in merge sort widely available in training data. Similarly, in sample06/desc/b3, the hashmap load factor calculation is mutated from `self.size / self.capacity` to `self.size * self.capacity`, yet the summary still says "If the load factor (size divided by capacity) exceeds 0.7." GPT-4 appears to recognize the function as hashmap insertion and assumes standard internal behavior without verifying the actual implementation. We also observe that string literals can mislead the model. In sample07/val/e2, the `list_customers` function originally prints customer names with their wallet values. The mutated version prints the cart contents instead but retains the "Wallet: " string prefix. GPT-4's summary for the mutated version still claims it "prints out the list of customers and their wallet balances" despite wallet values no longer being printed. The hard-coded string literal appears to anchor the model's interpretation, causing it to describe what the string suggests rather than what the code outputs.

Implications. These findings suggest that GPT-4's summarization relies heavily on structural cues, naming conventions, and typical implementation patterns. When code follows canonical patterns, the model describes the expected algorithm. When mutations introduce deviations, even to well-known algorithms, the model often continues describing the pattern it expects rather than the code it reads. As architectural complexity increases, this tendency produces progressively more failures because the model must track relationships across multiple components.

5.2 RQ2: Are the same limitations seen in human-written code?

Dataset Selection and Rationale. To evaluate whether the summarization limitation observed in RQ1 generalize to human-written code, we selected the Less Basic Python Problems (LBPP) dataset [22] as our evaluation corpus. LBPP is a collection of 161 programming problems specifically designed to be more challenging than benchmarks like HumanEval [8]. Importantly, LBPP was created through a process involving human annotators with competitive programming experience who were instructed to develop problems from scratch or from non-publicly available sources. The LBPP dataset offers several advantages for our evaluation purposes. First, it consists of human-written Python solutions that reflect real programming practices and patterns of human developers. Second, the problems are intentionally more difficult than other similar benchmarks. Third, LBPP was explicitly designed to be uncontaminated

problems and solutions were verified not to overlap with existing training datasets, reducing the risk that GPT-4's performance might be affected by memorization. From the full LBPP dataset, we randomly selected 50 programs for our analysis. This subset size was chosen to balance thoroughness with the manual evaluation effort required for our mutation-based methodology. While smaller than the controlled synthetic dataset used in RQ1 (12 programs with 324 total mutations), this sample size is appropriate given that our primary objective is to demonstrate that the mutation-based evaluation methodology can reveal similar limitations across different code sources. For each of the 50 programs, we applied three mutations (statement, decision, and value), yielding 150 mutated samples total for evaluation.

Classification Process. Given the high inter-rater agreement achieved in RQ1 (Cohen's $\kappa = 0.928$), the classification for RQ2 was performed by a single author who was part of the original annotation team. This approach maintains consistency with the established classification criteria while efficiently scaling the evaluation to include human-written code. We applied the same classification criteria ('Positive' vs. 'Negative') established in previous sections.

Results. Our manual classification results show that GPT-4 successfully detected 74 out of 150 mutations (49.3%). Breaking down by mutation type, we observe performance patterns consistent with RQ1. Value mutations achieved the highest detection rate at 58.0%, while statement and decision mutations showed similar, lower rates at 46.0% and 44.0% respectively. This ordering with value mutations being most reliably detected aligns with the trend observed in the controlled synthetic dataset, particularly in the lower complexity categories. The improved overall performance on LBPP (49.3%) compared to the synthetic dataset (38.9%) is primarily attributable to the structural characteristics of the programs. Most LBPP problems are function-level implementations, similar to the Single Function (SF) category in RQ1, which achieved a 76.5% detection rate. Because the LBPP dataset doesn't include complex multi-class or multi-threaded code, the average scores are naturally higher.

Error Pattern Consistency. Qualitative analysis of the misclassified cases in LBPP reveals error patterns strikingly similar to those documented in RQ1. We observed the same two failure modes: (1) summaries that are too abstract to capture the specific mutated logic, and (2) summaries that describe the intended or expected behavior of the original code rather than the actual behavior of the mutated version. For example, in LBPP task python/071, a statement mutation affecting node interleaving logic went undetected, with the mutated summary still describing the algorithm "as if it correctly appends alternating nodes," despite the mutation breaking this behavior. The most revealing are cases where GPT-4's summaries describe correct algorithmic patterns even when the code has been mutated to violate those patterns. In several graph algorithm implementations, mutations that changed program's logic were not reflected in the summaries, which continued to describe standard traversal or search procedures. This mirrors the findings from RQ1 where mutations to well-known algorithms (merge sort, heap operations, Kruskal's algorithm) were similarly missed when they deviated from canonical implementations.

Implications The results from RQ2 confirm that the limitations identified through mutation-based evaluation in the controlled synthetic setting are not artifacts of model-generated code. The same

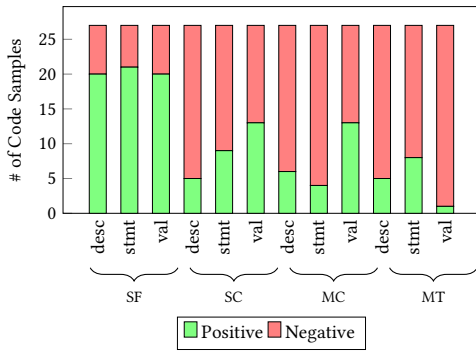


Figure 4: Results across the different mutation types, grouped by complexity categories.

challenge persists in human-written code. The fact that similar failure patterns emerge across both datasets, particularly the tendency to summarize intent rather than actual behavior, suggests that these limitations are related to how current LLMs approach code summarization. This consistency validates our approach as a reliable tool for assessing summarization quality independent of how the code was produced, making it a practical evaluation framework for real-world applications where developers increasingly rely on LLM-generated code summaries to understand both human-written and AI-generated codebases.

5.3 RQ3: How does summarization reliability change across model generations?

Motivation and Experimental Design A key advantage of the mutation-based evaluation is its ability to enable model comparison. Unlike benchmark leaderboards that may reflect dataset contamination, our methodology applies identical mutations to the same code and measures whether different models detect the same behavioral changes. To demonstrate this capability, we compared GPT-4 (gpt-4-1106-preview, released November 2023) against GPT-5.2 (gpt-5.2, released January 2025) on the chosen set from the LBPP dataset [22] (50 programs, 150 mutations). Both models received identical prompts, identical code samples, and identical mutations, with classifications performed using the same criteria established in RQ2.

Results. The improvement found to be substantial as GPT-5.2 detects 85.3% of mutations compared to GPT-4's 49.3%. This 36.0 percentage point gain represents genuine progress in code summarization over 14 months of model development. For context, GPT-5.2's performance exceeds even the RQ1 single-function baseline (76.5%), suggesting that newer models are approaching reliability on simple functions. This improvement is consistent across all mutation categories as shown in Table 1, with the largest gains in decision mutations (+44.0pp) and substantial improvements in both value (+34.0pp) and statement (+30.0pp) mutations.

What Changed? Beyond the quantitative improvement, GPT-5.2 exhibits a different failure mode. When GPT-5.2 detects mutations, it frequently identifies them as errors. Analysis shows that in more than 48% of detected cases, GPT-5.2 includes explicit language like "will crash," "bug," "incorrect," or "should be.". This pattern suggests GPT-5.2 is also recognizing when code is wrong. This

Table 1: Mutation-detection accuracy by type for GPT-4 vs. GPT-5.2

Mutation Type	GPT-4	GPT-5.2	Improvement
Statement	46.0%	76%	+30.0pp
Decision	44.0%	88.0%	+44.0pp
Value	58.0%	92.0%	+34.0pp
Overall	49.3%	85.3%	+36.0pp

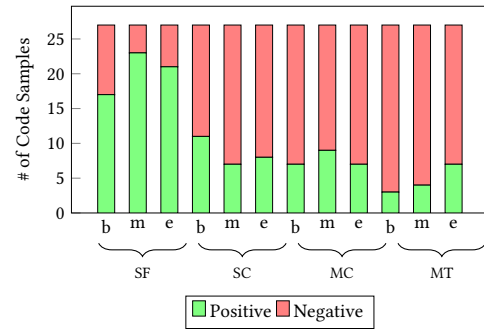


Figure 5: Results across the different mutation locations, grouped by complexity categories.

makes sense for LBPP as competitive programming problems follow canonical algorithmic patterns, and mutations often violate these patterns in obvious ways. GPT-5.2 still missed 22/150 mutations (14.6%). Failures cluster in statement mutations (12 missed) compared to value mutations (4 missed), suggesting the model handles incorrect constant values better than control flow changes. Moreover, LBPP is mostly single-function code, so this is a best-case setting. Whether GPT-5.2 maintains performance on the complex multi-class and multi-threaded code remains an open question, we expect performance would degrade, though likely not to GPT-4's levels. In many cases, both models detect the mutation but still describe the behavior as if it were the intended behavior, rather than adjusting the explanation to reflect how the function's logic has actually changed. This could mean that the model's success could be driven by recognizing deviations from canonical patterns, not deep reasoning.

Implications This comparison indicates that mutation analysis is a systematic way to measure progress in how well a model performs at code summarization. By testing models separated by 14 months, we can answer a key question: Did the model actually get better at tracking logic, or did it just get better at sounding confident? The data shows GPT-5.2 made substantial improvement under identical conditions. However, an 85.3% success rate on simple single-function code is still too risky for high-stakes systems. This methodology provides the evidence needed to make informed deployment decisions rather than relying on general capability benchmarks.

6 Threats to Validity

6.1 Internal Validity

Choice of Dataset. For RQ1, we used programs created with GPT-4 and manual edits. Since GPT-4 largely authored this code, it may

find it easier to summarize than unfamiliar code. This could inflate RQ1 detection rates. However, we view this as establishing an upper bound: if GPT-4 struggles to summarize code it helped create, performance on truly unfamiliar code may be worse. RQ2 addresses this concern by testing human-written LBPP programs, where similar failure patterns emerged. Additionally, LBPP mainly contains short, single-function algorithm problems, which makes it a relatively simple setting compared to larger, multi-class or multi-threaded systems. Because of this, the results in RQ3 should be seen as performance in a best-case scenario. Real-world codebases are typically more interconnected and structurally complex, and performance may differ in those settings. We use LBPP to provide a controlled comparison, but the same mutation-based method can be applied to more complex repositories in future work.

Classification Process. Two authors independently classified the 324 RQ1 mutants with 96.6% agreement (Cohen's $\kappa = 0.928$). Disagreements were resolved through discussion. For RQ2 and RQ3, classification was performed by a single author from the original team, using the same criteria established during RQ1 and keeping the decision simple: whether the behavioral change could be identified from the two summaries. This approach balances thoroughness with the practical constraints of manual evaluation. We provide all classifications in our replication package.

Prompt Design. We used the prompt "Explain the following code snippet in plain English," similar to prompts shown to be useful in prior work. While prompt engineering could potentially improve performance, our goal is to evaluate current summarization capabilities under realistic conditions rather than to optimize for maximum accuracy. The methodology supports testing alternative prompts, researchers can apply different prompting strategies and use mutation-based evaluation to measure their effectiveness.

6.2 External Validity

Choice of Mutation Types. The mutations we made to each code sample were constructed manually, following the guidelines for generating mutants from mutation testing [5]. Although our mutations do not cover the full space of possible mutations, this is not a concern for our study. We simply use mutations as a systematic way to introduce controlled changes to the code. Our focus is on whether the model reflects these changes in its summaries, not on the mutations themselves. What matters for our analysis is that the mutation changes the behavior of the code in a meaningful way. That said, the point here is not to model "typical bugs," it is to make sure the code's behavior actually changes and then check whether the summary changes too. For a more realistic setup, the same evaluation can be run using mutations mined from commits, bug fixes, or domain-specific edits.

Choice of Models. Our primary analysis focuses on GPT-4, which was state-of-the-art at the time of study design and remains widely deployed in research and practice. We acknowledge that LLM development is rapid, making comprehensive multi-model evaluation challenging given the labor-intensive nature of manual classification. However, the same evaluation procedure can be repeated with different models. RQ3 demonstrates this by comparing GPT-4 to GPT-5.2 under identical conditions, revealing substantial

improvement (49.3% \rightarrow 85.3%) in mutation detection. While all current models share the transformer architecture [36], the magnitude of limitations varies across implementations. These findings indicate that mutation-based evaluation provides a systematic approach for comparing model performance across generations, though comprehensive evaluation of additional model families remains valuable future work.

7 Conclusion

A convincing LLM-generated code summary is not enough. What matters is whether the summary actually follows the program's behavior. In this paper, we introduced a mutation-based evaluation methodology that answers this directly by applying controlled mutations that change what the code does, then measure whether the model's summary updates in a way that reflects the behavioral change. Across our experiments, we show that our mutation-based technique allows us to see how well a model can summarize. Summaries are most valuable and where failures are easiest to miss as it matters for downstream tasks documentation, test generation, and code review. If the summary reflects the expected intent of a familiar pattern instead of the program's actual behavior after a subtle edit, downstream tools and developers may inherit that mismatch. Our evaluation should move beyond surface similarity metrics, which have repeatedly been found to align poorly with human judgment in summarization settings. Our methodology addresses this by giving a repeatable stress test you can run on any repository. One can swap in mutations that match their domain, try alternative prompts, compare models, and quantify which configurations are genuinely more helpful. If we want to use LLM summaries as dependable engineering artifacts, they should react to changes in code's logic as reliably as a careful human reviewer would. Our mutation-based summarization evaluation provides a replicable path to measure and improve that standard.

Data Availability: Our dataset and code are available at the following online repository: <https://doi.org/10.5281/zenodo.15549625>.

References

- [1] [n. d.]. <https://github.com/features/copilot>
- [2] [n. d.]. Artificial Intelligence - the state of developer ecosystem in 2023. <https://www.jetbrains.com/lp/devecosystem-2023/ai/>
- [3] 2022. Introducing ChatGPT. <https://openai.com/index/chatgpt>
- [4] Toufique Ahmed, Kunal Suresh Pai, Premkumar Devanbu, and Earl Barr. 2024. Automatic semantic augmentation of language model prompts (for code summarization). In *Proceedings of the IEEE/ACM 46th international conference on software engineering*. 1–13.
- [5] James H Andrews, Lionel C Briand, Yvan Labiche, and Akbar Siami Namin. 2006. Using mutation analysis for assessing and comparing testing coverage criteria. *IEEE Transactions on Software Engineering* 32, 8 (2006), 608–624.
- [6] Anthropic. 2025. Tracing the thoughts of a large language model. <https://www.anthropic.com/research/tracing-thoughts-language-model>. Accessed: 2025-05-22.
- [7] Satanjeev Banerjee and Alon Lavie. 2005. METEOR: An automatic metric for MT evaluation with improved correlation with human judgments. In *Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*. 65–72.
- [8] Mark Chen, Jerry Tworek, Heewoo Jun, Qiming Yuan, Henrique Ponde de Oliveira Pinto, Jared Kaplan, Harri Edwards, Yuri Burda, Nicholas Joseph, Greg Brockman, et al. 2021. Evaluating large language models trained on code. *arXiv preprint arXiv:2107.03374* (2021).
- [9] José Aldo Silva da Costa, Rohit Ghayl, Fernando Castor, Pablo Roberto Fernandes de Oliveira, Márcio Ribeiro, and Baldoíno Fonseca. 2023. Seeing confusion through a new lens: on the impact of atoms of confusion on novices' code comprehension. *Empirical Software Engineering* 28, 4 (2023), 81.

- 929 [10] Benedito De Oliveira, Márcio Ribeiro, José Aldo Silva Da Costa, Rohit Gheyi, 987
 930 Guilherme Amaral, Rafael de Mello, Anderson Oliveira, Alessandro Garcia, Rod- 988
 931 rigo Bonifácio, and Balduino Fonseca. 2020. Atoms of confusion: The eyes do 989
 932 not lie. In *Proceedings of the XXXIV Brazilian Symposium on Software Engineering*. 990
 243–252.
- 933 [11] Dan Gopstein, Jake Iannacone, Yu Yan, Lois DeLong, Yanyan Zhuang, Martin 991
 934 K-C Yeh, and Justin Cappos. 2017. Understanding misunderstandings in source 992
 935 code. In *Proceedings of the 2017 11th Joint Meeting on Foundations of Software 993
 936 Engineering*. 129–139.
- 937 [12] Sabaat Haroon, Ahmad Faraz Khan, Ahmad Humayun, Waris Gill, Abdul Haddi 994
 938 Amjad, Ali R Butt, Mohammad Taha Khan, and Muhammad Ali Gulzar. 2025. 995
 939 How Accurately Do Large Language Models Understand Code? *arXiv preprint 996
 940 arXiv:2504.04372* (2025).
- 941 [13] Juho Leinonen, Paul Denny, Stephen MacNeil, Sami Sarsa, Seth Bernstein, Joanne 997
 942 Kim, Andrew Tran, and Arto Hellas. 2023. Comparing code explanations created 998
 943 by students and large language models. In *Proceedings of the 2023 Conference on 999
 944 Innovation and Technology in Computer Science Education V. 1*. 124–130.
- 945 [14] Ziyu Li and Donghwan Shin. 2024. Mutation-based consistency testing for evalu- 1000
 946 ating the code understanding capability of llms. In *Proceedings of the IEEE/ACM 1001
 947 3rd International Conference on AI Engineering-Software Engineering for AI*. 150– 1002
 948 159.
- 949 [15] Chin-Yew Lin. 2004. Rouge: A package for automatic evaluation of summaries. 1003
 950 In *Text summarization branches out*. 74–81.
- 951 [16] Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. 2023. Is 1004
 952 Your Code Generated by ChatGPT Really Correct? Rigorous Evaluation of Large 1005
 953 Language Models for Code Generation. In *Thirty-seventh Conference on Neural 1006
 954 Information Processing Systems*. <https://openreview.net/forum?id=1qvx610Cu7> 1007
 955 [17] Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. 2024. Is your 1008
 956 code generated by chatgpt really correct? rigorous evaluation of large language 1009
 957 models for code generation. *Advances in Neural Information Processing Systems* 36 (2024). 1010
 958 [18] Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, 1011
 959 Fabio Petroni, and Percy Liang. 2024. Lost in the middle: How language models 1012
 960 use long contexts. *Transactions of the Association for Computational Linguistics* 12 (2024), 157–173.
- 961 [19] Shuai Lu, Daya Guo, Shuo Ren, Junjie Huang, Alexey Svyatkovskiy, Ambrosio 1013
 962 Blanco, Colin Clement, Dawn Drain, Daxin Jiang, Duyu Tang, et al. 2021. 1014
 963 Codexglue: A machine learning benchmark dataset for code understanding and 1015
 964 generation. *arXiv preprint arXiv:2102.04664* (2021).
- 965 [20] Wei Ma, Shangqing Liu, Zhihao Lin, Wenhan Wang, Qiang Hu, Ye Liu, Cen 1016
 966 Zhang, Liming Nie, Li Li, and Yang Liu. 2023. Lms: Understanding code syntax 1017
 967 and semantics for code analysis. *arXiv preprint arXiv:2305.12138* (2023).
- 968 [21] Antonio Mastropaolo, Matteo Ciniselli, Massimiliano Di Penta, and Gabriele 1018
 969 Bavota. 2024. Evaluating code summarization techniques: A new metric and an 1019
 970 empirical characterization. In *Proceedings of the IEEE/ACM 46th International 1020
 971 Conference on Software Engineering*. 1–13.
- 972 [22] Alexandre Matton, Tom Sherborne, Dennis Aumiller, Elena Tommasone, Milad 1021
 973 Alizadeh, Jingyi He, Raymond Ma, Maxime Voisin, Ellen Gilsenan-McMahon, 1022
 974 and Matthias Gallé. 2024. On leakage of code generation evaluation datasets. In 1023
 975 *Findings of the Association for Computational Linguistics: EMNLP 2024*. 13215– 1024
 976 13223.
- 977 [23] Roberto Minelli, Andrea Mocci, and Michele Lanza. 2015. I know what you did 1025
 978 last summer—an investigation of how developers spend their time. In *2015 IEEE 1026
 979 23rd international conference on program comprehension*. IEEE, 25–35.
- 980 [24] Lefteris Moussiades and George Zografos. 2023. OpenAI’s GPT4 as coding 1027
 981 assistant. *arXiv preprint arXiv:2309.12732* (2023).
- 982 [25] Niklas Muennighoff, Qian Liu, Armel Zebaze, Qinkai Zheng, Binyuan Hui, 1028
 983 Terry Yue Zhuo, Swayam Singh, Xiangru Tang, Leandro Von Werra, and Shayne 1029
 984 Longpre. 2023. Octopack: Instruction tuning code large language models. *arXiv 1030
 985 preprint arXiv:2308.07124* (2023).
- 986 [26] Daye Nam, Andrew Macvean, Vincent Hellendoorn, Bogdan Vasilescu, and Brad 1031
 987 Myers. 2023. In-ide generation-based information support with a large language 1032
 988 model. *arXiv preprint arXiv:2307.08177* (2023).
- 989 [27] Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. 2002. Bleu: a 1033
 990 method for automatic evaluation of machine translation. In *Proceedings of the 1034
 991 40th annual meeting of the Association for Computational Linguistics*. 311–318.
- 992 [28] Zeeshan Rasheed, Malik Abdul Sami, Muhammad Waseem, Kai-Kristian Kemell, 1035
 993 Xiaofeng Wang, Anh Nguyen, Kari Systä, and Pekka Abrahamsson. 2024. AI- 1036
 994 powered Code Review with LLMs: Early Results. *arXiv preprint arXiv:2404.18496* 1037
 995 (2024).
- 996 [29] Ehud Reiter. 2018. A structured review of the validity of BLEU. *Computational 1038
 997 Linguistics* 44, 3 (2018), 393–401.
- 998 [30] Devjeet Roy, Sarah Fakhoury, and Venera Arnaudova. 2021. Reassessing auto- 1039
 999 matic evaluation metrics for code summarization tasks. In *Proceedings of the 29th 1040
 1000 ACM Joint Meeting on European Software Engineering Conference and Symposium 1041
 1001 on the Foundations of Software Engineering*. 1105–1116.
- 1002 [31] Sami Sarsa, Paul Denny, Arto Hellas, and Juho Leinonen. 2022. Automatic 1042
 1003 generation of programming exercises and code explanations using large language 1043
 1004 models. In *Proceedings of the 2022 ACM Conference on International Computing 1044
 1005 Education Research-Volume 1*. 27–43.
- 1006 [32] David A Sousa. 2016. Primacy/recency effect. 1045
- 1007 [33] Weisong Sun, Yun Miao, Yuekang Li, Hongyu Zhang, Chunrong Fang, Yi Liu, 1046
 1008 Gelei Deng, Yang Liu, and Zhenyu Chen. 2024. Source code summarization in the 1047
 1009 era of large language models. *arXiv preprint arXiv:2407.07959* (2024).
- 1010 [34] Weisong Sun, Yiran Zhang, Jie Zhu, Zhihui Wang, Chunrong Fang, Yonglong 1048
 1011 Zhang, Yebo Feng, Jiangping Huang, Xingya Wang, Zhi Jin, et al. 2025. Com- 1049
 1012 menting Higher-level Code Unit: Full Code, Reduced Code, or Hierarchical Code 1050
 1013 Summarization. *arXiv preprint arXiv:2503.10737* (2025).
- 1014 [35] Balázs Szalontai, Gergő Szalay, Tamás Márton, Anna Sike, Balázs Pintér, and 1051
 1015 Tibor Gregorics. 2024. Large Language Models for Code Summarization. *arXiv 1052
 1016 preprint arXiv:2405.19032* (2024).
- 1017 [36] Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, 1053
 1018 Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. 2017. Attention is all 1054
 1019 you need. *Advances in neural information processing systems* 30 (2017).
- 1020 [37] Bo Wang, Mingda Chen, Youfang Lin, Mike Papadakis, and Jie M Zhang. 2024. 1055
 1021 An exploratory study on using large language models for mutation testing. *arXiv 1056
 1022 preprint arXiv:2406.09843* (2024).
- 1023 [38] Yang Wu, Yao Wan, Zhaoyang Chu, Wenting Zhao, Ye Liu, Hongyu Zhang, 1057
 1024 Xuanhua Shi, and Philip S Yu. 2024. Can Large Language Models Serve as 1058
 1025 Evaluators for Code Summarization? *arXiv preprint arXiv:2412.01333* (2024).
- 1026 [39] Tianyi Zhang, Varsha Kishore, Felix Wu, Kilian Q Weinberger, and Yoav 1059
 1027 Artzi. 2019. Bertscore: Evaluating text generation with bert. *arXiv preprint 1060
 1028 arXiv:1904.09675* (2019).