

ACCELERATING TRANSFORMER INFERENCE AND TRAINING WITH 2:4 ACTIVATION SPARSITY

Anonymous authors

Paper under double-blind review

ABSTRACT

In this paper, we demonstrate how to leverage 2:4 sparsity, a popular hardware-accelerated GPU sparsity pattern, to activations to accelerate large language model training and inference. Crucially we exploit the intrinsic sparsity found in Squared-ReLU activations to provide this acceleration with **no accuracy loss**. Our approach achieves up to 1.3x faster Feed Forward Network (FFNs) in both the forwards and backwards pass. This work highlights the potential for sparsity to play a key role in accelerating large language model training and inference.

1 INTRODUCTION & RELATED WORK

The rapid growth of Large Language Models (LLMs) in recent years has been driven by a corresponding surge in GPU FLOPs. While some of this gain has come from hardware improvements, a large portion has come from reducing operator precision from 32 \rightarrow 16 \rightarrow 8 bits. However, as we approach the 0 bit quantization asymptote, researchers have turned to alternative methods to reduce LLM compute. One promising approach is sparsity, which seeks to avoid unnecessary computation to accelerate the model.

Existing work on sparsity for LLMs has primarily focused on inference. SparseGPT (Frantar & Alistarh, 2023) and others have shown that existing dense LLM weights can be made sparse, either through post training pruning (Sun et al., 2023; Zhang et al., 2024) or fine-tuning (Kurtic et al., 2023), enabling subsequent inference acceleration. Sparsity has also been applied to activations (Liu et al., 2024b; Lee et al., 2024) to speed up batch size=1 decode inference workloads via selective weight loading.

Mozaffari et al. (2024), Hu et al. (2024) were able to accelerate LLM training with 2:4 sparsity, but applied to the model weights. Moreover, in all of these works, the final sparse model comes with a small reduction in model accuracy compared to the dense model.

In this paper, we investigate the application of 2:4 sparsity to accelerate both LLM training and inference by sparsifying model activations. Crucially, we exploit the intrinsic sparsity found in certain activation functions, which is not present in the dense model weights.

Squared ReLU: Recently, SwiGLU = ($Swish_\beta(XW_1) \odot XW_3$) W_2 (Shazeer, 2020) has been used as the activation function in the Feed-Forward Network blocks (FFN) of multiple LLMs (Touvron et al., 2023) (Liu et al., 2024a). However, (So et al., 2021) suggests that Squared-ReLU = ($\max(0, XW_1)^2$) W_2 is at least as good as SwiGLU, which we confirmed in our experiments (Table 2). Larger models have since been trained successfully with Square-ReLU (Adler et al., 2024).

While the model accuracy remains similar, switching the activation function to Squared-ReLU has an interesting side-effect: activation sparsity naturally emerges during training. Intuitively, this makes sense as $Swish_\beta(x) = \frac{x}{1+e^{-\beta x}}$ will be 0 if and only if $x = 0$ whereas $ReLU^2 = \max(0, x)^2$ maps any $x < 0$ to 0. In theory, with normal centered inputs, we expect to see 50% sparsity in the activations - which is what we observe at model initialization. In practice, however, we observe that the sparsity level rapidly increases during training, reaching 85-98% depending on the layer (Figure 1). While we do not offer an explanation for the emergence of this phenomenon, this means that a Squared ReLU model spends a large amount of GPU time and energy multiplying zeros.

Hardware-accelerated (2:4) sparsity: To accelerate this model, we leverage sparsity. Modern GPUs have specialized units for matrix multiplication (TensorCores), and these units can only ac-

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

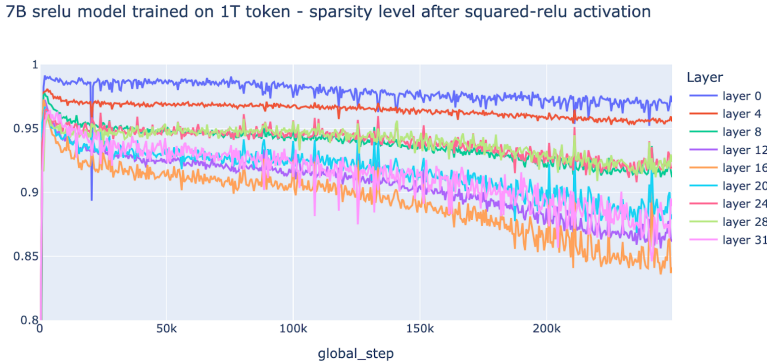


Figure 1: We plot the sparsity level progression of different FFN layers over a training run. Replacing SwiGLU with Squared-ReLU does not impact the model accuracy (See Table2), and makes the FFN activations highly sparse during training & inference (84-98% sparse for this model).

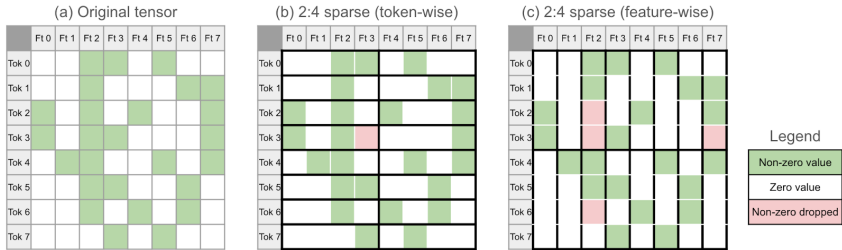


Figure 2: Given an activation tensor A of shape $[seqLen, features]$ (Figure 2a), we can accelerate the computation of AB if A is 2:4-sparse token-wise (Figure 2b), or $A^T B$ if A is 2:4-sparse feature-wise (Figure 2c). To respect the 2:4 sparsity constraint, it is possible that some values need to be dropped when the tensor A is sparsified (in red). The more sparse the original tensor is, the less likely we are to drop values - if no values are dropped, the calculation is exact.

celerate a single sparsity format: 2:4 sparsity (Mishra et al., 2021). A tensor is 2:4 sparse if for every 4 consecutive values, at most 2 are non-zeros (Figure2). If a tensor A is 2:4-sparse (50% sparsity), it is theoretically possible to compute AB 2x faster, because we skip every other multiplication - in practice we see 1.5x-1.7x speedups for 2:4 FP8 matrix multiplication on H100 compared to dense FP8 depending on the matrix shape.

2 APPROACH

Inspired by Jeong et al. (2024), we aim to approximate the second ¹ matrix multiply of the FFN, $Y_2 W_2$, with a 2:4 sparse matrix multiply, as $Y_2 = ReLU^2(X_1 W_1)$ and is mostly zero. If more than 2 elements are non-zeros in a block of 4 in Y_2 , we naively keep the 2 highest magnitude scalars and drop the others. In practice, $\sim 1\%$ of non-zero values are dropped, but this can vary depending on the sparsity level.

```
def ffn_srelu(x, w1, w2):
    y = x @ w1
    y = F.relu(y) ** 2
    y = sparsify24(y)
    y = to_fp8_rowwise(y)
    return y @ w2
```

- | Existing fp8 matmul (rowwise)
- | [new] Single fused kernel for srelu + sparsification + fp8 rowwise quantization
- | [new] Row-wise fp8 2:4 GEMM

Figure 3: Pseudo-code for our proposed replacement FP8 Squared-ReLU FFN.

¹Note that the first linear layer cannot be accelerated as its inputs are not sparse. Further savings could be achieved if the residual can be made sparse.

We implemented 2 new kernels, so that the entire FFN forward pass can be implemented with only 3 kernels: the existing FP8 matmul for the first linear layer, a new kernel that applies the activation, the sparsification, and FP8 quantization, and another new 2:4 GEMM kernel that supports FP8 rowwise scaling. To sparsify the activations we adapt the fast sparsification routines outlined in Cai et al.²

Notably, this also provides inference speedups in the compute bound regime (Figure5), such as during prefilling, with speculative decoding, or higher batch sizes. This is different from existing activation sparsity work (Liu et al., 2024b; Lee et al., 2024) that aims at reducing the amount of weights loaded from memory, which can only accelerate batch size=1 decode.

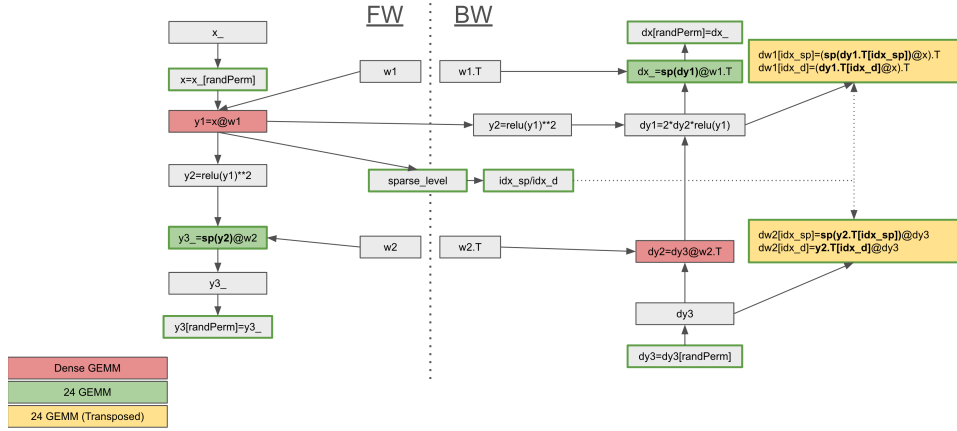


Figure 4: The compute graph for a Squared-ReLU FFN during training. As $ReLU^2(y_1)$ is highly sparse, any matrix multiplication involving y_2 or dy_1 can be accelerated. In total, 4 matrix multiplications out of 6 can be accelerated, when considering both the forward and backward passes.

Unfortunately the sparse GEMMs in the backwards pass are more difficult to accelerate. NVIDIA GPUs can only accelerate sparsity along the reduction dimension. During the backwards pass when we calculate $\frac{\partial W_2}{\partial y_3} = y_2^T \frac{\partial y_3}{\partial L}$ we reduce on the feature dimension, and therefore y_2 must be sparsified feature-wise (Figure2b) to leverage hardware acceleration. Naively sparsifying as we did in the forwards pass yields poor accuracy, due to the following reasons:

Some individual features are not sufficiently sparse (e.g. 20% sparsity only) and are unable to be sparsified. Therefore, we introduce *Optimization 1*) split the sparse tensors into 2 tensors: a tensor with 95% of the features, that can be 2:4 sparsified feature-wise, and a tensor with the remaining of the values, containing the non-sparse features. This means that we execute 2 GEMMs: a 2:4 sparse GEMM with 95% of the flops, and a dense one with 5% of the flops. The dense GEMM in the forward pass, $Y_1 = XW_1$ can compute the column level sparsity in the epilogue for free, while a cheap argsort kernel is then used to partition features into sparse and non-sparse features.

Features are highly correlated among consecutive tokens. For instance, a feature might be 99% sparse, but non-zero on 10 consecutive tokens. For this reason, we apply *Optimization 2*) a fixed permutation to the tokens before entering the FFN and shuffle them back after. These tokens permutations can be fused into the existing add/quantize/normalize operations before and after the FFN. In fact, it is possible to implement all the pointwise operations of the backward pass in a single fused kernel, including the transposition/FP8 scaling, and the split of tensors in dense & sparse counterparts.

Finally, we sparsify feature-wise on top of the token-wise sparsification mask computed in the forward pass to maintain training stability, as sparsifying feature-wise would otherwise allow for some values that are dropped in the forwards pass to reappear. We also train the models densely for the first 1k iterations (warmup), as the sparsity at initialization is roughly 50%, and few training steps are required to increase to 90%+ sparsity.

²These routines have been open sourced in torchao (torchao maintainers & contributors, 2024)

3 EXPERIMENTAL RESULTS

We are still actively developing the kernels and fusions outlined above to show end-to-end speedups for training but have 1) **accuracy experiments on LLM pretraining that show no accuracy loss** and 2) **kernel benchmarks of the FFN forwards pass and backwards split-GEMM that show up to a 1.3x speedup**. We advocate for further scaling of sparse transformers to validate the approach with larger models, as well as exploration into why Squared-ReLU models have such high levels of intrinsic sparsity.

Experiment	Final Perplexity
Dense training (SwiGLU)	2.654
Dense training (Squared-ReLU)	2.651
2:4 recipe (5% of the features dense in BW)	2.652
2:4 - no warmup	2.657
2:4 - naively sparsify backward GEMMs	2.682
2:4 - no permuting rows	2.919 (plateaus very early)
2:4 - no sparsify y_1 in BW pass	3.735 (diverges after step $\sim 42k$)

Table 1: LLM pretraining accuracy. These experiments were ran on an 1.5B LLM trained for 63B tokens on DCLM with emulated 2:4 sparsity. Please see Appendix for more details.

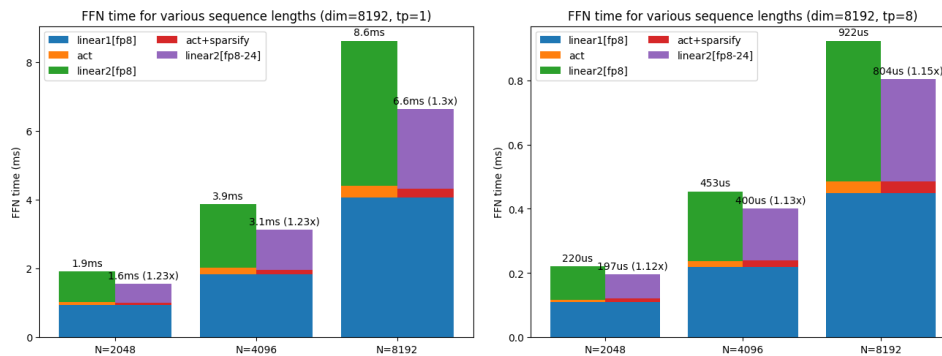


Figure 5: Our kernels can accelerate the FFN forward pass up to 30%, depending on the model dimension and batch size. Larger models or larger batch sizes lead to higher speedups. All FP8 matrix multiplications are done with row-wise scaling, to match the baseline training recipe.

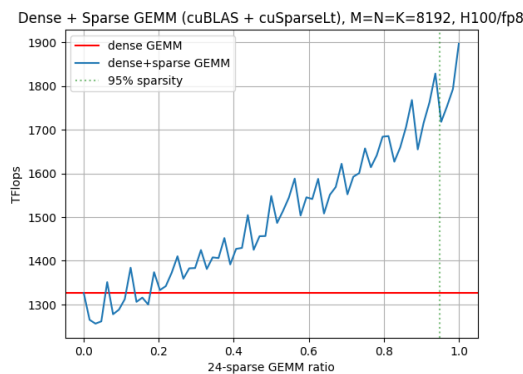


Figure 6: split GEMM TFLOPs across different split ratios. We decompose the feature-wise sparse GEMMs found in the backwards pass as 95% 2:4-sparse and 5% dense, which incurs a small performance hit compared to having a fully 2:4 sparse GEMM, but is still faster than a fully dense GEMM. Operand A contains 90% of zeros.

REFERENCES

- 216
217
218 Bo Adler, Niket Agarwal, Ashwath Aithal, Dong H Anh, Pallab Bhattacharya, Annika Brundyn,
219 Jared Casper, Bryan Catanzaro, Sharon Clay, Jonathan Cohen, et al. Nemotron-4 340b technical
220 report. *arXiv preprint arXiv:2406.11704*, 2024.
- 221
222 Jesse Cai, Daniel Haziza, and Supriya Rao. Accelerating Neural Network Training
223 with Semi-Structured (2:4) Sparsity — pytorch.org. [https://pytorch.org/blog/
224 accelerating-neural-network-training/](https://pytorch.org/blog/accelerating-neural-network-training/). [Accessed 07-02-2025].
- 225
226 Elias Frantar and Dan Alistarh. Sparsegpt: Massive language models can be accurately pruned in
227 one-shot, 2023.
- 228
229 Yuezhou Hu, Jun Zhu, and Jianfei Chen. S-ste: Continuous pruning function for efficient 2:4 sparse
230 pre-training, 2024.
- 231
232 Geonhwa Jeong, Po-An Tsai, Abhimanyu R. Bambhaniya, Stephen W. Keckler, and Tushar Krishna.
233 Abstracting sparse dnn acceleration via structured sparse tensor decomposition, 2024.
- 234
235 Eldar Kurtic, Denis Kuznedelev, Elias Frantar, Michael Goin, and Dan Alistarh. Sparse fine-tuning
236 for inference acceleration of large language models, 2023.
- 237
238 Donghyun Lee, Je-Yong Lee, Genghan Zhang, Mo Tiwari, and Azalia Mirhoseini. Cats:
239 Contextually-aware thresholding for sparsity in large language models, 2024.
- 240
241 Aixin Liu, Bei Feng, Bing Xue, Bingxuan Wang, Bochao Wu, Chengda Lu, Chenggang Zhao,
242 Chengqi Deng, Chenyu Zhang, Chong Ruan, et al. Deepseek-v3 technical report. *arXiv preprint
243 arXiv:2412.19437*, 2024a.
- 244
245 James Liu, Pragaash Ponnusamy, Tianle Cai, Han Guo, Yoon Kim, and Ben Athiwaratkun. Training-
246 free activation sparsity in large language models, 2024b. URL [https://arxiv.org/abs/
247 2408.14690](https://arxiv.org/abs/2408.14690).
- 248
249 Asit Mishra, Jorge Albericio Latorre, Jeff Pool, Darko Stosic, Dusan Stosic, Ganesh Venkatesh,
250 Chong Yu, and Paulius Micikevicius. Accelerating sparse deep neural networks, 2021.
- 251
252 Mohammad Mozaffari, Amir Yazdanbakhsh, Zhao Zhang, and Maryam Mehri Dehnavi. Slope:
253 Double-pruned sparse plus lazy low-rank adapter pretraining of llms, 2024.
- 254
255 Noam Shazeer. Glu variants improve transformer, 2020.
- 256
257 David R. So, Wojciech Mańke, Hanxiao Liu, Zihang Dai, Noam Shazeer, and Quoc V. Le. Primer:
258 Searching for efficient transformers for language modeling, 2021.
- 259
260 Mingjie Sun, Zhuang Liu, Anna Bair, and J. Zico Kolter. A simple and effective pruning approach
261 for large language models. *arXiv preprint arXiv:2306.11695*, 2023.
- 262
263 torchao maintainers and contributors. torchao: Pytorch native quantization and sparsity for training
264 and inference, October 2024. URL <https://github.com/pytorch/torchao>.
- 265
266 Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée
267 Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and
268 efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- 269
Yingtao Zhang, Haoli Bai, Haokun Lin, Jialin Zhao, Lu Hou, and Carlo Vittorio Cannistraci. Plug-
and-play: An efficient post-training pruning method for large language models. In *The Twelfth
International Conference on Learning Representations*, 2024. URL [https://openreview.
net/forum?id=Tr01Px9w0F](https://openreview.net/forum?id=Tr01Px9w0F).

A APPENDIX

Table 2: *LLM training hyperparameters. We use the same hyperparameters for training the SwiGLU and Squared-ReLU variants, and modify the FFN hidden dimension to ensure we have the same total number of model parameters*

Hyperparameter	Value for 1B model	Value for 7B model
Training dataset	DCLM	DCLM
Number of GPUs	64xH100	256xH100
Global batch size (tokens)	1M	2M
Training iterations	35k (37B tokens)	100k (209B tokens)
Optimizer	AdamW ($\beta_1 = 0.9, \beta_2 = 0.95$)	AdamW ($\beta_1 = 0.9, \beta_2 = 0.95$)
Learning rate	$3e - 3$	$1e - 3$
Learning rate schedule	5,000 linear warmup steps + cosine	2,000 linear warmup steps + cosine
Gradient clipping	1.0	1.0
Weight decay	0.033	0.1
Model dimension	2048	4096
FFN hidden dimension	8192	16384
Number of layers	25	32
Number of attention heads	16	32