DECOUPLED MEANFLOW: TURNING FLOW MODELS INTO FLOW MAPS FOR ACCELERATED SAMPLING

Anonymous authors

Paper under double-blind review

ABSTRACT

Denoising generative models, such as diffusion and flow-based models, produce high-quality samples but require many denoising steps due to discretization error. Flow maps, which estimate the average velocity between timesteps, mitigate this error and enable faster sampling. However, their training typically demands architectural changes that limit compatibility with pretrained flow models. We introduce *Decoupled MeanFlow*, a simple decoding strategy that converts flow models into flow map models without architectural modifications. Our method conditions the final blocks of diffusion transformers on the subsequent timestep, allowing pretrained flow models to be directly repurposed as flow maps. Combined with enhanced training techniques, this design enables high-quality generation in as few as 1–4 steps. Notably, we find that training flow models and subsequently converting them is more efficient and effective than training flow maps from scratch. On ImageNet 256×256, our model attains a 1-step FID of 2.16, surpassing prior art by a large margin, and achieves a 4-step FID of 1.51, matching the performance of standard flow models while delivering over 125× faster inference.

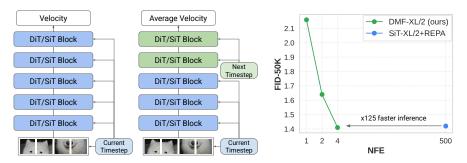


Figure 1: Accelerating diffusion transformer via Decoupled MeanFlow. (Left) Our model, Decoupled MeanFlow (DMF), converts a flow model into a flow map by decoding the intermediate representation with next timestep r, while preserving the original architecture. (Right) Fine-tuning DMF-XL/2 to predict average velocity (Geng et al., 2025a) significantly accelerates the sampling speed (\times 125 faster) of flow model (SiT-XL+REPA; Yu et al. 2025), while maintaining the quality.

1 Introduction

Diffusion models (Sohl-Dickstein et al., 2015; Ho et al., 2020; Song et al., 2021) and flow models (Lipman et al., 2023; Albergo et al., 2023) have emerged as effective and scalable approaches for generating high-quality visual data, including images (Ramesh et al., 2021; Saharia et al., 2022; Rombach et al., 2022; Esser et al., 2024) and videos (Blattmann et al., 2023; Brooks et al., 2024; Polyak et al., 2024; Wan et al., 2025). Despite their success, improving sampling efficiency remains a key challenge, since producing high-quality samples typically requires many denoising iterations.

To address this inefficiency, recent research has explored principled methods for designing diffusion models with fewer sampling steps. Consistency models (Song et al., 2023; Song & Dhariwal, 2024; Lu & Song, 2025; Geng et al., 2025b; Peng et al., 2025; Heek et al., 2024) enforce consistency between the denoised outputs from adjacent timesteps, enabling 1- or 2-step generation. While promising,



Figure 2: **Qualitative examples.** Selected samples from our DMF-XL/2+ models trained on ImageNet 512×512 (top row) and ImageNet 256×256 (bottom row) using NFE = 1 (left), 2 (middle), 4 (right).

these models struggle to scale effectively beyond two steps (Sabour et al., 2025). Another line of work focuses on learning *flow maps*, which models the average velocity between two timesteps (Kim et al., 2024; Geng et al., 2025a; Sabour et al., 2025; Boffi et al., 2024; 2025). In particular, MeanFlow (Geng et al., 2025a) provides a principled generalization of flow matching, showing that flow maps can achieve performance comparable to standard flow models.

While MeanFlow demonstrates the potential of flow maps, its architectural design remains underexplored. Specifically, it integrates the next timestep information throughout the diffusion transformer (Peebles & Xie, 2023), implicitly assuming that both encoder and decoder must rely on it. Yet, this assumption may be unnecessary: the encoder's role is to extract a representation from noisy inputs, where incorporating future timestep information may add little value. In contrast, the decoder is precisely where the next timestep should matter, as it governs how the model predicts future states.

In this paper, we introduce *Decoupled MeanFlow (DMF)*, a simple approach that transforms pretrained flow models into flow maps without altering their architecture. Our key idea is to decouple the diffusion transformer into encoder and decoder components: the encoder processes the current timestep, while the decoder incorporates the next timestep (see Fig. 1). This formulation avoids unnecessary architectural modifications while retaining compatibility with existing flow models.

Our design is inspired by recent works to rethink the representational structure of generative models, such as representation alignment (Yu et al., 2025), regularization (Wang & He, 2025), and masked modeling (Li et al., 2024). We hypothesize that the next timestep information is irrelevant during representation encoding and only necessary in decoding for learning flow maps.

Our approach offers several advantages. DMF can fully reuse the pretrained flow model without architectural modification. As a result, any flow model can be seamlessly repurposed as a flow map model. We show that even without fine-tuning, the converted models can produce high-quality samples, often surpassing their original flow model counterparts (Fig. 3b). Moreover, fine-tuning only the decoder substantially accelerates sampling while preserving quality (Fig. 3c).

Beyond the method itself, we provide a comprehensive analysis of Decoupled MeanFlow. We show that fine-tuning from pretrained flow models not only yields higher performance than training flow maps from scratch, but also requires fewer training compute, making our approach more efficient (Fig. 4). Moreover, our study reveals that the representational capacity plays a critical role in learning effective flow maps, highlighting the importance of encoder–decoder decoupling (Tab. 1 and Tab. 2).

Quantitatively, Decoupled MeanFlow sets a new state-of-the-art in few-step generative modeling. On ImageNet 256×256 , our model achieves a 1-step FID of 2.16, significantly surpassing prior 1-step diffusion models and other generative approaches such as GANs (Sauer et al., 2022) and normalizing flows (Gu et al., 2025). When increasing the number of steps to 4, DMF reaches an FID of 1.51, matching the performance of multi-step flow models (Yu et al., 2025) that require over $100 \times$ more computation during inference (see Tab. 3). We further validate our approach on ImageNet 512×512 , where we show that DMF achieves 1-step FID of 2.28, matching the performance of prior art (sCD (Lu & Song, 2025)), while using $2 \times$ fewer model parameters (see Tab. 4).

2 RELATED WORK

1-step diffusion and flow models. Research on accelerating diffusion models has advanced from both practical and theoretical perspectives. To mitigate the high sampling cost of pretrained diffusion models, distillation-based methods have shown strong promise (Salimans & Ho, 2022; Meng et al., 2023; Yin et al., 2024b;a; Heek et al., 2024). Beyond distillation, *consistency models* (Song et al., 2023; Song & Dhariwal, 2024; Lu & Song, 2025; Geng et al., 2025b; Zhou et al., 2025) introduced a principled approach to learn a single-step denoiser by enforcing consistency constraints across adjacent timesteps. More recently, several works have proposed learning *flow maps* (Kim et al., 2024; Boffi et al., 2024; 2025; Geng et al., 2025a; Sabour et al., 2025), which generalize consistency models by modeling the transition between arbitrary pairs of timesteps. While prior efforts primarily focus on designing objectives for learning flow maps, our work instead investigates architectural design, drawing on the structural similarities between flow models and flow maps.

Decoupled architectures for generative modeling. Another line of work explores *decoupled architectures*, typically separating encoder and decoder roles, to improve visual generative modeling. Several studies (Yu et al., 2025; Wang & He, 2025; Wang et al., 2025) demonstrate that strengthening the representational capacity of the encoder in diffusion transformers (Peebles & Xie, 2023) enhances both scalability and performance of diffusion and flow models. Alternatively, MAR (Li et al., 2024) employs an encoder–decoder design for masked autoregressive generation, inspired by the success of MAE (He et al., 2022) in representation learning. Our work shares this emphasis on the role of representation, but extends the perspective toward flow map learning, enabling few-step generation while maintaining alignment with underlying flow models.

3 Preliminaries

Flow models. Flow models (Lipman et al., 2023; Albergo et al., 2023) (or diffusion models (Ho et al., 2020; Song et al., 2021)) consist of a forward process that adds noise to the data, and a reverse process that gradually denoises noisy input to clean data. Formally, given a data $\mathbf{x}_0 \sim p_{\text{data}}$ and noise $\epsilon \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$, the forward process at time $t \in [0, 1]$ is given by $\mathbf{x}_t = \alpha_t \mathbf{x}_0 + \sigma_t \epsilon$, where α_t and σ_t are coefficients that satisfy $\alpha_0 = \sigma_1 = 1$ and $\alpha_1 = \sigma_0 = 0$. Training a flow model \mathbf{v}_θ is usually done by predicting the velocity $\mathbf{v}(\mathbf{x}, t) = \alpha_t' \mathbf{x}_0 + \sigma_t' \epsilon$, and the flow matching objective is given as follows:

$$\mathcal{L}_{FM}(\theta) = \mathbb{E}_{\mathbf{x}_t, t} [\|\mathbf{v}_{\theta}(\mathbf{x}_t, t) - \mathbf{v}(\mathbf{x}, t)\|^2]. \tag{1}$$

Given the velocity $\mathbf{v}_{\theta}(\mathbf{x},t)$, the generative reverse process obtains a sample by solving the probability flow ODE for \mathbf{x}_t , *i.e.*, $d\mathbf{x}_t = \mathbf{v}_{\theta}(\mathbf{x}_t,t)dt$. Note that the exact solution of ODE for \mathbf{x}_t from time t to r is given as $\mathbf{x}_r = \mathbf{x}_t + \int_t^r \mathbf{v}_{\theta}(\mathbf{x}_\tau,\tau)d\tau$. In practice, since the integration is intractable, we resort to numerical methods, *e.g.*, Euler's method, where the solution \mathbf{x}_r from \mathbf{x}_t is given by $\mathbf{x}_r = \mathbf{x}_t + (r-t)\mathbf{v}_{\theta}(\mathbf{x}_t,t)$. However, such numerical approaches require a large number of denoising steps or high-order methods (Karras et al., 2022; Lu et al., 2022; 2025) to achieve high-quality samples due to the time-discretization error.

Flow maps. To accelerate the sampling, recent works (Kim et al., 2024; Geng et al., 2025a; Sabour et al., 2025; Boffi et al., 2024) propose to learn a flow map between two timesteps that accelerate the inference speed via reducing the discretization error. Let $\mathbf{u}_{\theta}(\mathbf{x}_{t},t,r)$ be a flow map of \mathbf{x}_{t} from t to r, and the ODE solver with flow map model be $\mathbf{x}_{r} = \mathbf{x}_{t} + (r - t)\mathbf{u}_{\theta}(\mathbf{x}_{t},t,r)$. Then the time-discretization error of the flow map ODE solver can be written as following:

$$\operatorname{Err}(\mathbf{x}_{t}, t, r) = \left\| \int_{t}^{r} \mathbf{v}(\mathbf{x}_{\tau}, \tau) d\tau - (r - t) \mathbf{u}_{\theta}(\mathbf{x}_{t}, t, r) \right\|^{2}.$$
 (2)

One can derive the training objective for the flow map model by minimizing the time-discretization error Eq. (2). Specifically, since the integration is non-achievable, MeanFlow (Geng et al., 2025a) introduced a training objective that minimizes the gradient norm of discretization error:

$$\mathcal{L}_{MF}(\theta) = \mathbb{E}_{\mathbf{x}_t, r} \left[\left\| \mathbf{u}_{\theta}(\mathbf{x}_t, t, r) - \mathbf{v}(\mathbf{x}_t, t) - (r - t) \frac{\mathrm{d}}{\mathrm{d}t} \mathbf{u}_{\theta}(\mathbf{x}_t, t, r) \right\|^2 \right], \tag{3}$$

where the last term is computed by Jacobian-vector product (JVP) between primal vectors $(\partial_{\mathbf{x}}\mathbf{u}_{\theta}, \partial_{t}\mathbf{u}_{\theta}, \partial_{r}\mathbf{u}_{\theta})$ and tangent vectors $(\mathbf{v}, \mathbf{1}, \mathbf{0})$ using following identity:

$$\frac{\mathrm{d}}{\mathrm{d}t}\mathbf{u}_{\theta}(\mathbf{x}_{t},t,r) = \frac{\mathrm{d}\mathbf{x}_{t}}{\mathrm{d}t}\frac{\partial\mathbf{u}_{\theta}}{\partial\mathbf{x}_{t}} + \frac{\partial\mathbf{u}_{\theta}}{\partial t} = \mathbf{v}(\mathbf{x}_{t},t)\frac{\partial\mathbf{u}_{\theta}}{\partial\mathbf{x}_{t}} + \frac{\partial\mathbf{u}_{\theta}}{\partial t}.$$

In practice, to eliminate the double backpropagation for JVP and ease the optimization (Lu & Song, 2025; Frans et al., 2025; Geng et al., 2025b), we set $\mathbf{u}_{\text{tgt}} = \mathbf{v} + (r-t) \frac{\mathrm{d}\mathbf{u}_{\theta}}{\mathrm{d}t}$ and optimize with $\mathcal{L}_{\text{MF}}(\theta) = \mathbb{E}_{\mathbf{x}_t,r}[\|\mathbf{u}_{\theta} - \mathrm{sg}(\mathbf{u}_{\text{tgt}})\|^2]$, where sg is a stop-gradient operator. Remark that minimizing Eq. (3) alone cannot make the discretization error to be zero, as it only optimizes the gradient norm to be zero (*i.e.*, first-order condition). Thus, it requires to satisfy boundary condition (*i.e.*, r = t), which becomes equivalent to flow matching objective as in Eq. (1).

Designing flow map architecture. To encode the timestep into the diffusion model, it is common practice to use positional embedding layer (Ho et al., 2020; Vaswani et al., 2017) that conditions throughout the layers. For instance, Diffusion Transformer (DiT; Peebles & Xie 2023) uses timestep embeddings to modulate the outputs of MLP and attention layers inside the transformer blocks. To implement flow maps, recent approaches (Zhou et al., 2025; Geng et al., 2025a; Sabour et al., 2025) use an extra timestep embedding layer for r and add the embeddings from t and t (or t-t) for the condition embedding (see Appendix B.1 for visualization).

Model Guidance. Classifier-free guidance (CFG; Ho & Salimans 2022) is a common practice to enhance conditional generation, where it interpolates between conditional and unconditional velocities to control. However, CFG comes at the cost of doubling the inference compute. To reduce the inference cost, *model guidance* (MG; Tang et al. 2025) adjusts a target velocity as following:

$$\mathbf{v}^{\text{tgt}}(\mathbf{x}_t, t, \mathbf{y}) = \mathbf{v}(\mathbf{x}_t, t) + \omega (\mathbf{v}_{\theta}(\mathbf{x}_t, t, \mathbf{y}) - \mathbf{v}_{\theta}(\mathbf{x}_t, t)), \tag{4}$$

where \mathbf{y} is a condition and $\omega \in (0,1)$ is a model guidance scale. Then, training with MG is done by applying stop-gradient operator to \mathbf{v}_{tgt} and replace \mathbf{v} with \mathbf{v}^{tgt} in Eq. (1). Notably, MG is effective when training flow map, which enables high-quality 1-step generation (Geng et al., 2025a).

4 Proposed method

4.1 DECOUPLED MEANFLOW

Previous works have shown that diffusion and flow models implicitly perform representation learning (Li et al., 2023; Xiang et al., 2023; Chen et al., 2024), and improving the representations further enhances the generation capability (Yu et al., 2025; Wang et al., 2025; Wang & He, 2025). As such, one can reinterpret a flow model $\mathbf{v}_{\theta}(\mathbf{x}_{t},t)$ as the composition of an encoder $f_{\theta}: \mathcal{X} \times [0,1] \to \mathcal{H}$ and a decoder $g_{\theta}: \mathcal{H} \times [0,1] \to \mathcal{X}$ such that $\mathbf{v}_{\theta} = g_{\theta} \circ f_{\theta}$, where $\mathbf{h}_{t} = f_{\theta}(\mathbf{x}_{t},t)$ and $\mathbf{v}_{\theta}(\mathbf{x}_{t},t) = g_{\theta}(\mathbf{h}_{t},t)$.

From this perspective, the representation encoded by f_{θ} should also matter in learning a high-quality flow map. However, the architectural design of flow maps remains unclear. Previous works (Kim et al., 2024; Zhou et al., 2025; Geng et al., 2025a) follow a straightforward approach that the next timestep r is provided to both the encoder and the decoder. Yet, this design may introduce redundancy: the encoder's task is to extract semantic features from \mathbf{x}_t , for which the next timestep r may be irrelevant. Conversely, once the encoder produces \mathbf{h}_t , the decoder's role is to predict the average velocity toward timestep r, which may no longer require the original t.

These observations motivate us to decouple timestep conditioning in the encoder and decoder. Specifically, we propose to drop r from the encoder and t from the decoder, leading to the formulation $\mathbf{u}_{\theta}(\mathbf{x}_{t},t,r)=g_{\theta}(f_{\theta}(\mathbf{x}_{t},t),r)$. We refer to this architectural design as *Decoupled MeanFlow (DMF)*, as the encoder and decoder are conditioned on different timesteps in a complementary manner. Following Yu et al. (2025), we partition the diffusion transformer into the first d layers as encoder

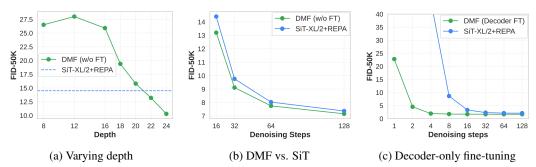


Figure 3: **Pretrained flow model as a flow map.** Comparison between pretrained flow model (SiT-XL/2+REPA; Yu et al. 2025) and converted flow map (*i.e.*, see Fig. 1) with FID-50K is reported. (a) Converted DMF without fine-tuning (DMF w/o FT) outperforms SiT-XL+REPA when chosen proper decoder depth. (b) Fixing depth to 22 and varying the denoising steps, DMF w/o FT consistently outperform pretrained SiT-XL/2+REPA. (c) By freezing the encoder and fine-tuning the decoder with flow map loss with guidance, decoder-tuned DMF (DMF Decoder FT) achieves substantial gain in sampling efficiency compared to SiT-XL/2+REPA with CFG.

 f_{θ} and the remaining $\ell - d$ layers as decoder g_{θ} , where ℓ is the total number of blocks. To avoid introducing additional parameters, we reuse the same timestep embedding layer for both t and r, preserving the velocity prediction module of the original flow model (see Fig. 1).

Your flow model is secretly a flow map. This formulation suggests that any pretrained flow model can be converted into a flow map via DMF. To test this hypothesis, we take the SiT-XL/2+REPA (Yu et al., 2025) pretrained on ImageNet (Deng et al., 2009), convert it into a flow map (DMF-XL/2) without any fine-tuning, and compare their generative performance. We generate 50K samples using the Euler solver without classifier-free guidance (CFG) and evaluate FID (Heusel et al., 2017).

In Fig. 3a, we vary the encoder depth d for DMF with 16 denoising steps. Interestingly, DMF consistently improves as the decoder becomes smaller, and even outperforms the original SiT model in several settings. In Fig. 3b, fixing d=22, DMF maintains a clear advantage across denoising steps from 16 to 128. These results confirm that flow models can be transformed into flow maps without any fine-tuning, and that carefully choosing the encoder–decoder split can even yield better generative quality. We further investigate this finding across different flow models (see Appendix C).

Representation matters for flow map. We next study how encoder representations influence flow map quality. To this end, we freeze the encoder (d = 22) and fine-tune only the decoder (and timestep embeddings layers) using the flow map training objective Eq. (3) with model guidance. We fine-tune SiT-XL/2+REPA for 40 epochs on ImageNet.

As shown in Fig. 3c, the decoder fine-tuned DMF achieves substantial efficiency gains: with only 8 denoising steps, it reaches FID=1.76, outperforming the baseline SiT-XL/2+REPA with CFG scale 1.5. This demonstrates that high-quality encoder representations learned by flow models can be effectively transferred to flow maps through DMF. However, we also observe that the 1-step performance remains limited when the encoder is frozen, indicating that the encoder must be jointly optimized to unlock the full potential of 1-step generative modeling.

4.2 IMPLEMENTATION

Training algorithm. Since our method combines the flow matching (FM) loss Eq. (1) with the MeanFlow (MF) loss Eq. (3), we sample two independent sets of noise and timesteps: $(\epsilon_{\text{FM}}, t_{\text{FM}})$ for FM loss, and $(\epsilon_{\text{MF}}, t_{\text{MF}}, r_{\text{MF}})$ for MF loss. For each data sample $\mathbf{x}_0 \sim p_{\text{data}}$, we compute the total loss as the sum of FM and MF losses. We remark that while reusing the same (ϵ, t) for both FM and MF objectives is possible, it often destabilizes training. The procedure is summarized in Algorithm 1.

Flow matching warm-up. Training flow maps is typically more expensive than training flow models due to additional forward passes. For example, computing the MF loss requires Jacobian–vector product (JVP) computations, which can cause memory issues if attention operations are not carefully

¹In contrast, Geng et al. (2025b) splits batch into two groups (e.g., 75% for FM and 25% for MF).




Figure 4: Effect of Flow Matching warmup. We plot 1-step FID for DMF-L/2 trained from scratch, DMF-L/2 fine-tuned from SiT-L/2 400K and 800K pretrained models. We plot total training compute used for training. We see that fine-tuned model quickly recovers 1-step performance, and DMF-L/2 fine-tuned from 800K SiT-L/2 model achieves better performance than others, while using fewer total training flops.

optimized (Lu & Song, 2025). The cost further increases when model guidance is applied, since guidance-aware targets must be computed.

To mitigate this, we adopt a two-stage strategy: first train a flow model with FM loss, then convert it into DMF and fine-tune with MF loss added. We find that pretrained flow models adapt rapidly to flow maps, especially when their representations are strong, *e.g.*, models trained longer or enhanced with representation alignment (Yu et al., 2025) converge faster (see Tab. 1). As a result, our strategy achieves significantly better scaling than training a flow map from scratch (see Fig. 4).

Adaptive weighted Cauchy loss. In practice, the MF loss exhibits high variance, which can hinder stable training. Prior works (Song & Dhariwal, 2024; Geng et al., 2025b; Lu & Song, 2025; Geng et al., 2025a) introduce robust losses to address this. Inspired by these, we employ the Cauchy (Lorentzian) loss (Black & Anandan, 1996; Barron, 2019), defined as

$$\mathcal{L}_{\text{Cauchy}}(\theta) = \log \left(\mathcal{L}_{\text{MF}}(\theta) + c \right),$$
 (5)

where c > 0 is a constant. Like Huber (Song & Dhariwal, 2024) and ℓ_1 losses (Geng et al., 2025b), the Cauchy loss behaves linearly near zero but suppresses the effect of large outliers.

To further improve stability, we follow Karras et al. (2024b) and incorporate adaptive weighting by modeling the residual error distribution of the MSE as Cauchy for each (t,r) pair. This yields the adaptive weighted Cauchy loss (see Appendix A.1 for derivation):

$$\mathcal{L}_{DMF}(\theta) = \mathbb{E}_{\mathbf{x}_t, r} \left[\log \left(e^{-\phi(t, r)} \left\| \mathbf{u}_{\theta}(\mathbf{x}_t, t, r) - \mathbf{v}(\mathbf{x}_t, t) - (r - t) \frac{\mathrm{d}\mathbf{u}_{\theta}(\mathbf{x}_t, t, r)}{\mathrm{d}t} \right\|^2 + 1 \right) + \frac{\phi(t, r)}{2} \right],$$
(6)

where $\phi:[0,1]\times[0,1]\to\mathbb{R}$ is a weighting function. The same formulation is used for FM loss.

Time proposal. Sampling timesteps from a logit-normal distribution has proven effective for training flow models (Karras et al., 2022; Esser et al., 2024). For flow maps, however, we require (t, r) pairs with t > r. Following Geng et al. (2025b), we generate (t, r) by drawing two logit-normal samples and taking their maximum and minimum.

Notably, as shown in Fig. 3, DMF models converted from flow models already predict accurate average velocities when r is close to t. For 1-step generation, it is therefore beneficial to sample pairs where t and r are far apart, particularly with r close to zero. To encourage this, we modify the proposal distribution accordingly, which accelerates 1-step generative modeling (see Appendix A.2).

Samplers. Note that the generation for DMF model can be done by Euler's method, *i.e.*, $\mathbf{x}_r = \mathbf{x}_t + (r-t)\mathbf{u}_{\theta}(\mathbf{x}_t, t, r)$. Alternatively, as the model becomes capable of 1-step sampling, we also consider restart sampler (Song et al., 2023), which predicts $\hat{\mathbf{x}}_0$, and diffuses into \mathbf{x}_r . Formally, the algorithm of restart sampler can be written as follows:

$$\hat{\mathbf{x}}_0 \leftarrow \mathbf{x}_t - t\mathbf{u}_\theta(\mathbf{x}_t, t, 0), \qquad \mathbf{x}_r \leftarrow \alpha_r \hat{\mathbf{x}}_0 + \sigma_r \epsilon',$$
 (7)

where $\epsilon' \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$. Note that the restart sampler is as performative as Euler sampler, and we observe trade-offs between them when evaluted with different metrics, *e.g.*, see Fig. 5.

Table 1: **Ablation study.** All models are fine-tuned from flow model (SiT-L/2) trained for 400K iterations. Depth denotes the number of encoder layers for DMF models, where total number of layers is 24. MG denotes the usage of model guidance (MG) during fine-tuning, and REPA denotes usage of representation alignment during flow model training. We report 1-step (NFE = 1) and 2-step (NFE = 2) FID, IS, FD_{DINOv2} for each MF-L/2 and DMF-L/2 model. We denote \downarrow and \uparrow to indicate whether lower or higher values are better, respectively.

				1-step (NFE = 1)		2-	2-step (NFE = 2)		
Method	Depth	MG	REPA	FID ↓	IS ↑	FD _{DINOv2} ↓	FID ↓	IS ↑	FD _{DINOv2} ↓
MF-L/2	-	Х	Х	20.6	72.7	540.1	18.1	77.6	476.3
DMF-L/2	12	Х	X	21.9	69.3	545.1	17.9	79.2	477.9
DMF-L/2	16	Х	X	20.1	75.0	531.5	17.6	80.4	470.5
DMF-L/2	18	X	Х	19.3	79.0	531.6	17.3	81.4	461.1
DMF-L/2	20	X	X	19.5	79.2	541.4	17.4	81.1	462.8
MF-L/2	-	/	Х	5.27	185.1	291.2	4.09	214.9	215.7
DMF-L/2	18	/	Х	4.53	197.8	275.6	3.58	225.3	197.4
MF-L/2	-	Х	~	15.8	90.5	421.7	12.6	102.7	361.2
DMF-L/2	18	X	/	14.2	99.7	419.9	11.8	105.6	340.2
MF-L/2	-	V	~	3.65	219.8	205.2	2.63	257.3	136.8
DMF-L/2	18	/	/	3.10	229.8	199.7	2.51	264.6	127.3

5 EXPERIMENTS

Dataset and model. We conduct our experiments on ImageNet (Deng et al., 2009) dataset following ADM (Dhariwal & Nichol, 2021) preprocessing protocols. We use latent Diffusion Transformer (DiT;Peebles & Xie 2023) as our backbone, where we perform generative modeling on the latent space using pretrained VAE (Rombach et al., 2022). To train flow models, we follow SiT (Ma et al., 2024) and REPA (Yu et al., 2025) when using representation alignment. See Appendix B for details.

Implementation. For each experiment, we use BF16 mixed-precision to prevent overflow, and Flash-Attention (Dao, 2024) to save GPU memory and accelerate training. Similar to (Lu & Song, 2025), we use custom implementation of Flash-Attention to support JVP computation.

Evaluation. We evaluate the 1-step (NFE = 1) and 2-step (NFE = 2) generation with Euler solver by default. For comparison, we use Fréchet Inception Distance (FID; Heusel et al. 2017), Inception score (IS; Salimans et al. 2016), and Fréchet Distance with DINOv2-L/14 (Oquab et al., 2023) (FD_{DINOv2}; Stein et al. 2023) evaluated for 50K samples.

5.1 ABLATION STUDY

We validate the effectiveness of DMF and study the effect of each component through experiments. Specifically, we aim to answer the following questions:

- How effective is DMF architecture in learning flow map? (Tab. 1, Tab. 2)
- How does the representation quality affects the few-step generative modeling? (Tab. 1, Fig. 4)
- How can we efficiently train flow map model? (Fig. 4, Tab. 2)

Decoder depth ablation. We analyze the effectiveness of DMF when fine-tuning from flow models. We first train SiT-L/2 model for 400K iterations, then convert into DMF model and fine-tune for 100K iterations. We compare DMF models with MeanFlow(MF;Geng et al. 2025b), where we strictly follow their setup including model guidance scale. In Tab. 1, we report FID, IS, and FD_{DINOv2} of fine-tuned MF-L/2 and DMF-L/2 models with different depth. We observe that DMF-L/2 achieves lower FID and FD_{DINOv2}, and higher IS compared to MF-L/2 when depth is properly chosen. Notably, we found depth=18 (*i.e.*, 6 blocks for decoder) performs the best, and depth = 16 and depth = 20 are comparable, which aligns with Fig. 3. When fine-tuned with MG, DMF-L/2 significantly improves 1-step and 2-step performance, and significantly outperforms MF-L/2.

Effect of encoder representation. Furthermore, we investigate the effect of representation quality in learning flow map. To this end, we train SiT-L/2+REPA for 400K iterations following (Yu et al.,

Table 2: **Comparison with MeanFlow** on ImageNet 256×256. We compare FID of DMF and MeanFlow (MF; Geng et al. 2025a) models of various size. For each, we apply same guidance as of MF models. FID results of MF models are excerpted from their paper. DMF models do flow matching warm-up for 160 epochs, and fine-tuned for 40 and 80 epochs, *i.e.*, 200 and 240 epochs total, respectively. Note that DMF models require fewer training FLOPs than MF.

Model	Epochs	NFE	#Params	FID↓
MF-B/2	240	1	131M	6.17
DMF-B/2	200	1	131M	6.08
	240	1	131M	5.63
MF-L/2	240	1	459M	3.84
DMF-L/2	200	1	459M	3.45
	240	1	459M	3.24
MF-XL/2	240	1	676M	3.43
DMF-XL/2	200	1	675M	3.02
	240	1	675M	2.83
MF-XL/2	240	2	676M	2.93
DMF-XL/2	240	2	675M	2.56

Table 2: **Comparison with MeanFlow** on ImageNet 256 \times 256 benchmark. CFG geNet 256 \times 256. We compare FID of DMF and is applied if possible (indicated by 2 \times). † denotes MeanFlow (MF; Geng et al. 2025a) models of our base flow model to compare.

Method	NFE	#Params	FID↓				
GANs / Normalizing Flows / Autoregressive models							
StyleGAN-XL (Sauer et al., 2022)	1	166M	2.30				
VAR-d30 (Tian et al., 2024)	2×10	2B	1.92				
MAR-H/2 (Li et al., 2024)	2×256	943M	1.55				
STARFlow (Gu et al., 2025)	1	1.4B	2.40				
Diffusion / Flow models							
ADM (Dhariwal & Nichol, 2021)	2×250	554M	10.94				
LDM (Rombach et al., 2022)	2×250	400M	3.60				
RIN (Jabri et al., 2023)	1000	410M	3.42				
SimDiff (Hoogeboom et al., 2023)	2×512	2B	2.77				
U-ViT-H/2 (Bao et al., 2023)	2×50	501M	2.29				
DiffIT (Hatamizadeh et al., 2024)	2×250	561M	1.73				
DiT-XL/2 (Peebles & Xie, 2023)	2×250	675M	2.27				
SiT-XL/2 (Ma et al., 2024)	2×250	675M	2.06				
SiT-XL/2+REPA [†] (Yu et al., 2025)	2×250	675M	1.42				
Few-step diffusion / flow models							
Shortcut-XL/2 (Frans et al., 2025)	1	676M	10.60				
	4	676M	7.80				
IMM-XL/2 (Zhou et al., 2025)	2×1	676M	7.77				
	2×2	676M	3.99				
	2×4	676M	2.51				
MF-XL/2+ (Geng et al., 2025b)	2	676M	2.20				
DMF-XL/2+ (ours)	1	675M	2.16				
	2	675M	1.64				
	4	675M	1.51				

2025) and fine-tune MF-L/2 and DMF-L/2 model with it. Note that we do not use REPA during fine-tuning as it shows diminishing gain. As shown in Tab. 1, both MF-L/2 and DMF-L/2 achieves better performance when initialized with SiT-L/2+REPA, while DMF-L/2 outperforms MF-L/2. The results are consistent when applied with MG. The results show that the encoder representation helps flow map modeling, where DMF architecture achieves higher gain due to its design.

Training efficiency. Next, we examine the efficiency of flow-matching warmup. To this end, we compare DMF-L/2 trained from scratch, and DMF-L/2 initialized from SiT-L/2 trained for 400K and 800K iterations. We use same MG config for each training. In Fig. 4, we plot the 1-step FID (NFE = 1) and training FLOPS for each approach. We observe that the flow models quickly adapts to flow maps, and starting from SiT-L/2 800K model achieves the best performance when using same training compute. We hypothesize that longer flow model training leads to better representation, which helps learning flow map. As of practical consideration, our results show that allocating training budget more on flow model training is more efficient, as adapting to flow map is easier yet expensive.

5.2 Comparison


Comparison with MeanFlow. Given the observations from Sec. 5.1, we conduct system-level comparison between DMF and MF models of various sizes (B/2, L/2, and XL/2) with same guidance configuration. For DMF models, we train with flow matching loss for 160 epochs, and continue train with flow map loss for 80 epochs. Tab. 2 compares FID-50K of MF and DMF models. We observe that DMF models trained for 200 epochs achieves lower FID scores than MF models trained for 240 epochs, demonstrating its efficiency in training. Furthermore, DMF models trained for 240 epochs significantly outperforms MF models. In particular, DMF-XL/2 achieves 1-step FID=3.10, achieving state-of-the-art result on 1-step diffusion / flow models. We also remark that the training FLOPs of each DMF is smaller than MF counterpart, as flow matching is much cheaper than flow map training.


ImageNet benchmark. Following our observation in Tab. 1, we initialize DMF model from longer trained SiT-XL/2+REPA to explore the limit of DMF model, and conduct fine-tuning with model guidance applied. Then we compare our final model, DMF-XL/2+, with other few-step models (Frans et al., 2025; Zhou et al., 2025; Geng et al., 2025b; Lu & Song, 2025; Sabour et al., 2025), diffusion / flow models (Dhariwal & Nichol, 2021; Rombach et al., 2022; Jabri et al., 2023; Bao et al., 2023; Hatamizadeh et al., 2024; Peebles & Xie, 2023; Ma et al., 2024; Yu et al., 2025; Karras et al., 2024b), and various generative models such as GANs (Sauer et al., 2022), Normalizing Flows (Gu et al., 2025), and autoregressive models (Tian et al., 2024; Li et al., 2024).

Table 4: **ImageNet 512** \times **512 benchmark.** CFG is applied if possible (indicated by 2 \times). * used AutoGuidance (Karras et al., 2024a) for distillation. † denotes our base flow model to compare.

Method	NFE	#Params	FID ↓				
GANs / Normalizing Flows / Autoregressive models							
StyleGAN-XL (Sauer et al., 2022)	1	168M	2.41				
STARFlow (Gu et al., 2025)	1	3B	3.00				
VAR-d36 (Tian et al., 2024)	2×10	2.3B	2.63				
MAR-L (Li et al., 2024)	2×64	481M	1.73				
Diffusion / Flow models							
ADM (Dhariwal & Nichol, 2021)	2×250	559M	3.85				
SimDiff (Hoogeboom et al., 2023)	2×512	2B	3.02				
DiffIT (Hatamizadeh et al., 2024)	2×250	561M	2.67				
DiT-XL/2 (Peebles & Xie, 2023)	2×250	675M	3.04				
SiT-XL/2 (Ma et al., 2024)	2×250	675M	2.62				
SiT-XL/2+REPA [†] (Yu et al., 2025)	2×250	675M	1.91				
EDM2-XXL (Karras et al., 2024b)	2×250	1.5B	1.81				

Method	NFE	#Params	FID↓				
Few-step Diffusion / Flow models							
sCD-L (Lu & Song, 2025)	1	778M	2.55				
	2	778M	2.04				
sCD-XL (Lu & Song, 2025)	1	1.1B	2.40				
	2	1.1B	1.93				
sCD-XXL (Lu & Song, 2025)	1	1.5B	2.28				
	2	1.5B	1.88				
AYF-S* (Sabour et al., 2025)	1	280M	3.32				
	2	280M	1.87				
	4	280M	1.70				
DMF-XL/2+ (ours)	1	675M	2.28				
(, , , , , , , , , , , , , , , , , , ,	2	675M	1.95				
	4	675M	1.90				








Figure 5: **Euler vs. Restart samplers.** We compare Euler and Restart samplers with DMF-XL/2+ trained on ImageNet 256×256. FID-50K, Inception score (IS), and Fréchet distance DINOv2 (FD_{DINOv2}) are reported. We plot results for SiT-XL/2+REPA using 250 step SDE sampler with CFG.

ImageNet 256×**256** comparison. In Tab. 3, we notice that DMF-XL/2+ achieves 1-NFE FID=2.16, significantly outperforms 1-step diffusion / flow baselines, and strong 1-NFE baselines StyleGAN-XL (FID=2.30) and STARFlow (FID=2.40). Furthermore, DMF-XL/2+ achieves 4-NFE FID of 1.51, matching performance of SiT-XL/2+REPA (FID=1.42), which requires ×125 more NFE.

ImageNet 512×**512 comparison.** We further experiment DMF on ImageNet 512 resolution. Similarly, we train SiT-XL/2+REPA for 240 epochs, and conduct DMF fine-tuning for 100 epochs. As shown in Tab. 4, DMF-XL/2+ achieves 1-NFE FID of 2.28, matching the performance to prior 1-step state-of-the-art baseline sCD-XXL (Lu & Song, 2025), while using fewer model parameters. Also, we find that DMF-XL/2+ matches SiT-XL/2+REPA when increasing NFE to 4, consistent to the results in Tab. 3. We provide qualitative examples in Fig. 2 and Appendix E.

Choice of sampler. Lastly, we compare DMF-XL/2+ and SiT-XL/2+REPA on various metrics (FID-50K, IS, and FD_{DINOv2}), with Euler and Restart sampler. For SiT-XL/2+REPA, we strictly follow their original setup, *e.g.*, SDE Euler-Maruyama sampler for 250 steps, CFG with guidance interval (Kynkäänniemi et al., 2024). In Fig. 5, we plot the results. We observe that DMF-XL/2+ with Euler sampler achieves lower FD_{DINOv2} than SiT-XL/2+REPA when using NFE larger than 3, while showing slightly higher FID. Furthermore, when with Restart sampler, DMF-XL/2+ achieves higher IS and lower FD_{DINOv2}. In general, we find that Restart solver generates more diverse samples due to the stochasticity throughout sampling, which we qualitatively visualize in Appendix E.

6 CONCLUSION

This paper introduces Decoupled MeanFlow (DMF), an efficient and effective method to learn flow maps for fast generative modeling. Specifically, we show that DMF can seamlessly convert flow models into flow maps, and fine-tuning DMF models with flow map training loss achieves high-quality 1-step generative models. We hope our work promotes future research about efficient inference-time scaling, as well as post-training algorithms that can enhance the generation quality and controllability. We discuss limitations and future directions in Appendix D.

ETHICS STATEMENT

Our work advances visual generative AI, which carries potential risks of misuse such as disinformation, deepfakes, or biased outputs. We emphasize that our methods are intended for responsible applications, and we encourage safeguards like watermarking, dataset auditing, and alignment techniques to ensure safe and ethical deployment.

REPRODUCIBILITY STATEMENT

We provide details to reproduce our results in Sec. 5, Appendix B. We will release the code and model checkpoints to reproduce the results in the paper.

REFERENCES

Michael S Albergo, Nicholas M Boffi, and Eric Vanden-Eijnden. Stochastic interpolants: A unifying framework for flows and diffusions. *arXiv preprint arXiv:2303.08797*, 2023. 1, 3

Fan Bao, Shen Nie, Kaiwen Xue, Yue Cao, Chongxuan Li, Hang Su, and Jun Zhu. All are worth words: A vit backbone for diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023. 8

Jonathan T Barron. A general and adaptive robust loss function. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2019. 6

 Michael J Black and Paul Anandan. The robust estimation of multiple motions: Parametric and piecewise-smooth flow fields. *Computer vision and image understanding*, 1996. 6

Andreas Blattmann, Tim Dockhorn, Sumith Kulal, Daniel Mendelevitch, Maciej Kilian, Dominik Lorenz, Yam Levi, Zion English, Vikram Voleti, Adam Letts, et al. Stable video diffusion: Scaling latent video diffusion models to large datasets. *arXiv preprint arXiv:2311.15127*, 2023. 1, 19

Nicholas M Boffi, Michael S Albergo, and Eric Vanden-Eijnden. Flow map matching. *arXiv preprint* arXiv:2406.07507, 2024. 2, 3

Nicholas M Boffi, Michael S Albergo, and Eric Vanden-Eijnden. How to build a consistency model: Learning flow maps via self-distillation. *arXiv preprint arXiv:2505.18825*, 2025. 2, 3

Tim Brooks, Bill Peebles, Connor Holmes, Will DePue, Yufei Guo, Li Jing, David Schnurr, Joe Taylor, Troy Luhman, Eric Luhman, Clarence Ng, Ricky Wang, and Aditya Ramesh. Video generation models as world simulators. 2024. URL https://openai.com/research/video-generation-models-as-world-simulators. 1

Xinlei Chen, Zhuang Liu, Saining Xie, and Kaiming He. Deconstructing denoising diffusion models for self-supervised learning. *arXiv preprint arXiv:2401.14404*, 2024. 4

Tri Dao. Flashattention-2: Faster attention with better parallelism and work partitioning. In *The Twelfth International Conference on Learning Representations*, 2024. 7, 17

Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. Imagenet: A large-scale hierarchical image database. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2009. 5, 7

Prafulla Dhariwal and Alexander Nichol. Diffusion models beat gans on image synthesis. In *Advances in neural information processing systems*, 2021. 7, 8, 9

Stefan Elfwing, Eiji Uchibe, and Kenji Doya. Sigmoid-weighted linear units for neural network function approximation in reinforcement learning. *Neural networks*, 2018. 17

Patrick Esser, Robin Rombach, and Bjorn Ommer. Taming transformers for high-resolution image synthesis. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2021. 19

- Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for high-resolution image synthesis. In *International Conference on Machine Learning*, 2024. 1, 6, 18, 19
 - Kevin Frans, Danijar Hafner, Sergey Levine, and Pieter Abbeel. One step diffusion via shortcut models. In *International Conference on Learning Representations*, 2025. 4, 8
 - Zhengyang Geng, Mingyang Deng, Xingjian Bai, J Zico Kolter, and Kaiming He. Mean flows for one-step generative modeling. *arXiv preprint arXiv:2505.13447*, 2025a. 1, 2, 3, 4, 6, 8, 18
 - Zhengyang Geng, Ashwini Pokle, Weijian Luo, Justin Lin, and J Zico Kolter. Consistency models made easy. In *International Conference on Learning Representations*, 2025b. 1, 3, 4, 5, 6, 7, 8, 16
 - Jiatao Gu, Tianrong Chen, David Berthelot, Huangjie Zheng, Yuyang Wang, Ruixiang Zhang, Laurent Dinh, Miguel Angel Bautista, Josh Susskind, and Shuangfei Zhai. Starflow: Scaling latent normalizing flows for high-resolution image synthesis. *arXiv preprint arXiv:2506.06276*, 2025. 3, 8, 9
 - Ali Hatamizadeh, Jiaming Song, Guilin Liu, Jan Kautz, and Arash Vahdat. Diffit: Diffusion vision transformers for image generation. In *European Conference on Computer Vision*, 2024. 8, 9
 - Kaiming He, Xinlei Chen, Saining Xie, Yanghao Li, Piotr Dollár, and Ross Girshick. Masked autoencoders are scalable vision learners. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2022. 3
 - Jonathan Heek, Emiel Hoogeboom, and Tim Salimans. Multistep consistency models. *arXiv preprint* arXiv:2403.06807, 2024. 1, 3
 - Martin Heusel, Hubert Ramsauer, Thomas Unterthiner, Bernhard Nessler, and Sepp Hochreiter. Gans trained by a two time-scale update rule converge to a local nash equilibrium. In *Advances in Neural Information Processing Systems*, 2017. 5, 7
 - Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance. *arXiv preprint arXiv:2207.12598*, 2022. 4
 - Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising diffusion probabilistic models. In *Advances in Neural Information Processing Systems*, 2020. 1, 3, 4
 - Emiel Hoogeboom, Jonathan Heek, and Tim Salimans. simple diffusion: End-to-end diffusion for high resolution images. In *International Conference on Machine Learning*, 2023. 8, 9
 - Allan Jabri, David J Fleet, and Ting Chen. Scalable adaptive computation for iterative generation. In *International Conference on Machine Learning*, 2023. 8
 - Tero Karras, Samuli Laine, Miika Aittala, Janne Hellsten, Jaakko Lehtinen, and Timo Aila. Analyzing and improving the image quality of stylegan. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2020. 15
 - Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. Elucidating the design space of diffusion-based generative models. In *Advances in Neural Information Processing Systems*, 2022. 3, 6
 - Tero Karras, Miika Aittala, Tuomas Kynkäänniemi, Jaakko Lehtinen, Timo Aila, and Samuli Laine. Guiding a diffusion model with a bad version of itself. *Advances in Neural Information Processing Systems*, 2024a. 9
 - Tero Karras, Miika Aittala, Jaakko Lehtinen, Janne Hellsten, Timo Aila, and Samuli Laine. Analyzing and improving the training dynamics of diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2024b. 6, 8, 9
 - Alex Kendall, Yarin Gal, and Roberto Cipolla. Multi-task learning using uncertainty to weigh losses for scene geometry and semantics. In *CVPR*, 2018. 15

- Dongjun Kim, Chieh-Hsin Lai, Wei-Hsiang Liao, Naoki Murata, Yuhta Takida, Toshimitsu Uesaka,
 Yutong He, Yuki Mitsufuji, and Stefano Ermon. Consistency trajectory models: Learning probability flow ODE trajectory of diffusion. In *International Conference on Learning Representations*,
 2024. 2, 3, 4
 - Diederik P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. *arXiv preprint* arXiv:1412.6980, 2014. 17
 - Tuomas Kynkäänniemi, Miika Aittala, Tero Karras, Samuli Laine, Timo Aila, and Jaakko Lehtinen. Applying guidance in a limited interval improves sample and distribution quality in diffusion models. *Advances in Neural Information Processing Systems*, 2024. 9
 - Kyungmin Lee, Xiahong Li, Qifei Wang, Junfeng He, Junjie Ke, Ming-Hsuan Yang, Irfan Essa, Jinwoo Shin, Feng Yang, and Yinxiao Li. Calibrated multi-preference optimization for aligning diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2025. 19
 - Alexander C Li, Mihir Prabhudesai, Shivam Duggal, Ellis Brown, and Deepak Pathak. Your diffusion model is secretly a zero-shot classifier. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023. 4
 - Tianhong Li, Yonglong Tian, He Li, Mingyang Deng, and Kaiming He. Autoregressive image generation without vector quantization. In *Advances in Neural Information Processing Systems*, 2024. 2, 3, 8, 9
 - Yaron Lipman, Ricky T. Q. Chen, Heli Ben-Hamu, Maximilian Nickel, and Matthew Le. Flow matching for generative modeling. In *International Conference on Learning Representations*, 2023. 1, 3
 - Jie Liu, Gongye Liu, Jiajun Liang, Yangguang Li, Jiaheng Liu, Xintao Wang, Pengfei Wan, Di Zhang, and Wanli Ouyang. Flow-grpo: Training flow matching models via online rl. arXiv preprint arXiv:2505.05470, 2025. 19
 - Ilya Loshchilov and Frank Hutter. Decoupled weight decay regularization. arXiv preprint arXiv:1711.05101, 2017. 17
 - Cheng Lu and Yang Song. Simplifying, stabilizing and scaling continuous-time consistency models. In *International Conference on Learning Representations*, 2025. 1, 3, 4, 6, 7, 8, 9, 17
 - Cheng Lu, Yuhao Zhou, Fan Bao, Jianfei Chen, Chongxuan Li, and Jun Zhu. Dpm-solver: A fast ode solver for diffusion probabilistic model sampling in around 10 steps. In *Advances in Neural Information Processing Systems*, 2022. 3
 - Cheng Lu, Yuhao Zhou, Fan Bao, Jianfei Chen, Chongxuan Li, and Jun Zhu. Dpm-solver++: Fast solver for guided sampling of diffusion probabilistic models. *Machine Intelligence Research*, 2025.
 - Nanye Ma, Mark Goldstein, Michael S Albergo, Nicholas M Boffi, Eric Vanden-Eijnden, and Saining Xie. Sit: Exploring flow and diffusion-based generative models with scalable interpolant transformers. In *European Conference on Computer Vision*, 2024. 7, 8, 9
 - Nanye Ma, Shangyuan Tong, Haolin Jia, Hexiang Hu, Yu-Chuan Su, Mingda Zhang, Xuan Yang, Yandong Li, Tommi Jaakkola, Xuhui Jia, et al. Inference-time scaling for diffusion models beyond scaling denoising steps. *arXiv preprint arXiv:2501.09732*, 2025. 19
 - Chenlin Meng, Robin Rombach, Ruiqi Gao, Diederik Kingma, Stefano Ermon, Jonathan Ho, and Tim Salimans. On distillation of guided diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023. 3
 - Maxime Oquab, Timothée Darcet, Théo Moutakanni, Huy Vo, Marc Szafraniec, Vasil Khalidov, Pierre Fernandez, Daniel Haziza, Francisco Massa, Alaaeldin El-Nouby, et al. Dinov2: Learning robust visual features without supervision. *arXiv preprint arXiv:2304.07193*, 2023. 7
 - William Peebles and Saining Xie. Scalable diffusion models with transformers. In *IEEE International Conference on Computer Vision*, 2023. 2, 3, 4, 7, 8, 9, 17, 18

- Yansong Peng, Kai Zhu, Yu Liu, Pingyu Wu, Hebei Li, Xiaoyan Sun, and Feng Wu. Flow-anchored consistency models. *arXiv preprint arXiv:2507.03738*, 2025. 1
 - Adam Polyak, Amit Zohar, Andrew Brown, Andros Tjandra, Animesh Sinha, Ann Lee, Apoorv Vyas, Bowen Shi, Chih-Yao Ma, Ching-Yao Chuang, et al. Movie gen: A cast of media foundation models. *arXiv preprint arXiv:2410.13720*, 2024. 1
 - Aditya Ramesh, Mikhail Pavlov, Gabriel Goh, Scott Gray, Chelsea Voss, Alec Radford, Mark Chen, and Ilya Sutskever. Zero-shot text-to-image generation. In *International Conference on Machine Learning*, 2021. 1
 - Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2022. 1, 7, 8, 17
 - Amirmojtaba Sabour, Sanja Fidler, and Karsten Kreis. Align your flow: Scaling continuous-time flow map distillation. *arXiv preprint arXiv:2506.14603*, 2025. 2, 3, 4, 8, 9
 - Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily L Denton, Kamyar Ghasemipour, Raphael Gontijo Lopes, Burcu Karagol Ayan, Tim Salimans, et al. Photorealistic text-to-image diffusion models with deep language understanding. In *Advances in Neural Information Processing Systems*, 2022. 1
 - Tim Salimans and Jonathan Ho. Progressive distillation for fast sampling of diffusion models. In *International Conference on Learning Representations*, 2022. 3
 - Tim Salimans, Ian Goodfellow, Wojciech Zaremba, Vicki Cheung, Alec Radford, and Xi Chen. Improved techniques for training gans. In *Advances in Neural Information Processing Systems*, 2016. 7
 - Axel Sauer, Katja Schwarz, and Andreas Geiger. Stylegan-xl: Scaling stylegan to large diverse datasets. In *ACM SIGGRAPH conference proceedings*, 2022. 3, 8, 9
 - Jascha Sohl-Dickstein, Eric Weiss, Niru Maheswaranathan, and Surya Ganguli. Deep unsupervised learning using nonequilibrium thermodynamics. In *International Conference on Machine Learning*, 2015. 1
 - Yang Song and Prafulla Dhariwal. Improved techniques for training consistency models. In *International Conference on Learning Representations*, 2024. 1, 3, 6
 - Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-based generative modeling through stochastic differential equations. In *International Conference on Learning Representations*, 2021. 1, 3
 - Yang Song, Prafulla Dhariwal, Mark Chen, and Ilya Sutskever. Consistency models. In *International Conference on Machine Learning*, 2023. 1, 3, 6
 - George Stein, Jesse Cresswell, Rasa Hosseinzadeh, Yi Sui, Brendan Ross, Valentin Villecroze, Zhaoyan Liu, Anthony L Caterini, Eric Taylor, and Gabriel Loaiza-Ganem. Exposing flaws of generative model evaluation metrics and their unfair treatment of diffusion models. In *Advances in Neural Information Processing Systems*, 2023. 7
 - Zhicong Tang, Jianmin Bao, Dong Chen, and Baining Guo. Diffusion models without classifier-free guidance. *arXiv preprint arXiv:2502.12154*, 2025. 4
 - Keyu Tian, Yi Jiang, Zehuan Yuan, Bingyue Peng, and Liwei Wang. Visual autoregressive modeling: Scalable image generation via next-scale prediction. In *Advances in neural information processing systems*, 2024. 8, 9
 - Philippe Tillet, Hsiang-Tsung Kung, and David Cox. Triton: an intermediate language and compiler for tiled neural network computations. In *Proceedings of the 3rd ACM SIGPLAN International Workshop on Machine Learning and Programming Languages*, 2019. 17

- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in Neural Information Processing Systems*, 2017. 4
- Bram Wallace, Meihua Dang, Rafael Rafailov, Linqi Zhou, Aaron Lou, Senthil Purushwalkam, Stefano Ermon, Caiming Xiong, Shafiq Joty, and Nikhil Naik. Diffusion model alignment using direct preference optimization. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2024. 19
- Team Wan, Ang Wang, Baole Ai, Bin Wen, Chaojie Mao, Chen-Wei Xie, Di Chen, Feiwu Yu, Haiming Zhao, Jianxiao Yang, Jianyuan Zeng, Jiayu Wang, Jingfeng Zhang, Jingren Zhou, Jinkai Wang, Jixuan Chen, Kai Zhu, Kang Zhao, Keyu Yan, Lianghua Huang, Mengyang Feng, Ningyi Zhang, Pandeng Li, Pingyu Wu, Ruihang Chu, Ruili Feng, Shiwei Zhang, Siyang Sun, Tao Fang, Tianxing Wang, Tianyi Gui, Tingyu Weng, Tong Shen, Wei Lin, Wei Wang, Wei Wang, Wenmeng Zhou, Wente Wang, Wenting Shen, Wenyuan Yu, Xianzhong Shi, Xiaoming Huang, Xin Xu, Yan Kou, Yangyu Lv, Yifei Li, Yijing Liu, Yiming Wang, Yingya Zhang, Yitong Huang, Yong Li, You Wu, Yu Liu, Yulin Pan, Yun Zheng, Yuntao Hong, Yupeng Shi, Yutong Feng, Zeyinzi Jiang, Zhen Han, Zhi-Fan Wu, and Ziyu Liu. Wan: Open and advanced large-scale video generative models. *arXiv preprint arXiv:2503.20314*, 2025. 1, 19
- Runqian Wang and Kaiming He. Diffuse and disperse: Image generation with representation regularization. *arXiv preprint arXiv:2506.09027*, 2025. 2, 3, 4
- Shuai Wang, Zhi Tian, Weilin Huang, and Limin Wang. Ddt: Decoupled diffusion transformer. *arXiv* preprint arXiv:2504.05741, 2025. 3, 4
- Weilai Xiang, Hongyu Yang, Di Huang, and Yunhong Wang. Denoising diffusion autoencoders are unified self-supervised learners. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2023. 4
- Zeyue Xue, Jie Wu, Yu Gao, Fangyuan Kong, Lingting Zhu, Mengzhao Chen, Zhiheng Liu, Wei Liu, Qiushan Guo, Weilin Huang, et al. Dancegrpo: Unleashing grpo on visual generation. *arXiv* preprint arXiv:2505.07818, 2025. 19
- Tianwei Yin, Michaël Gharbi, Taesung Park, Richard Zhang, Eli Shechtman, Fredo Durand, and Bill Freeman. Improved distribution matching distillation for fast image synthesis. In *Advances in Neural Information Processing Systems*, 2024a. 3
- Tianwei Yin, Michaël Gharbi, Richard Zhang, Eli Shechtman, Fredo Durand, William T Freeman, and Taesung Park. One-step diffusion with distribution matching distillation. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2024b. 3
- Yuanyang Yin, Yaqi Zhao, Mingwu Zheng, Ke Lin, Jiarong Ou, Rui Chen, Victor Shea-Jay Huang, Jiahao Wang, Xin Tao, Pengfei Wan, et al. Towards precise scaling laws for video diffusion transformers. In *IEEE Conference on Computer Vision and Pattern Recognition*, 2025. 19
- Sihyun Yu, Sangkyung Kwak, Huiwon Jang, Jongheon Jeong, Jonathan Huang, Jinwoo Shin, and Saining Xie. Representation alignment for generation: Training diffusion transformers is easier than you think. In *International Conference on Learning Representations*, 2025. 1, 2, 3, 4, 5, 6, 7, 8, 9, 17
- Linqi Zhou, Stefano Ermon, and Jiaming Song. Inductive moment matching. In *International Conference on Machine Learning*, 2025. 3, 4, 8, 18

TRAINING ALGORITHM

756

758

760

761

762

763

764

765

766

769 770

771

772 773 774

775

776 777

778

779

781

782 783 784

785 786

787

788

789

790

791

792 793

794

795

797

798

799

800

801 802

804 805

806

808

809

We provide a detailed algorithm to train Decoupled MeanFlow model in Algorithm 1.

Algorithm 1 Training Algorithm for Decoupled MeanFlow

Require: Dataset \mathcal{D} , flow map \mathbf{u}_{θ} , weighting function ϕ , learning rate $\eta > 0$, constant c > 0, time proposal for FM loss $(\mu_{\text{FM}}, \Sigma_{\text{FM}})$, time proposal for MF loss $(\mu_{\text{MF}}^{(1)}, \mu_{\text{MF}}^{(2)}, \Sigma_{\text{MF}}^{(1)}, \Sigma_{\text{MF}}^{(2)})$, model guidance scale $\omega > 0$, class dropout probability q > 0, guidance interval $[g_{\text{low}}, g_{\text{high}}]$

- 1: while not converged do
- Sample $(\mathbf{x}, \mathbf{y}) \sim \mathcal{D}$ and drop \mathbf{y} with probability q
- Sample $\tau_{\rm FM} \sim \mathcal{N}(\mu_{\rm FM}, \Sigma_{\rm FM}), t_{\rm FM} \leftarrow (1 + e^{-\tau_{\rm FM}})^{-1}$, and noise $\epsilon_{\rm FM} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$
- Diffuse $\mathbf{x}_{t_{\text{FM}}} \leftarrow \alpha_{t_{\text{FM}}} \mathbf{x}_0 + \sigma_{t_{\text{FM}}} \epsilon_{\text{FM}}$, and $\mathbf{v}_{t_{\text{FM}}} \leftarrow \alpha'_{t_{\text{FM}}} \mathbf{x}_0 + \sigma'_{t_{\text{FM}}} \epsilon_{\text{FM}}$
- $\mathbf{v}_{\text{FM}}^{\text{tgt}} \leftarrow \mathbf{v}_{t_{\text{FM}}} + \omega(\mathbf{u}_{\theta}(\mathbf{x}_{t_{\text{FM}}}, t_{\text{FM}}, t_{\text{FM}}, \mathbf{y}) \mathbf{u}_{\theta}(\mathbf{x}_{t_{\text{FM}}}, t_{\text{FM}}, t_{\text{FM}}) \text{ if } t_{\text{FM}} \in [g_{\text{low}}, g_{\text{high}}] \text{ else } \mathbf{v}_{t_{\text{FM}}}$ Detach gradient $\mathbf{v}_{\text{FM}}^{\text{tgt}} \leftarrow \text{sg}(\mathbf{v}_{\text{FM}}^{\text{tgt}})$
- $\mathcal{L}_{\text{FM}}(\theta) \leftarrow \log\left(e^{-\phi(t_{\text{FM}}, t_{\text{FM}})} \left\| \mathbf{u}_{\theta}(\mathbf{x}_{t_{\text{FM}}}, t_{\text{FM}}, t_{\text{FM}}) \mathbf{v}_{\text{FM}}^{\text{tgt}} \right\|^{2} + c\right) + \phi(t_{\text{FM}}, t_{\text{FM}})$
- Sample $\tau_1 \sim \mathcal{N}\left(\mu_{\text{MF}}^{(1)}, \Sigma_{\text{MF}}^{(1)}\right), \tau_2 \sim \mathcal{N}\left(\mu_{\text{MF}}^{(2)}, \Sigma_{\text{MF}}^{(2)}\right), t_1 \leftarrow (1 + e^{-\tau_1})^{-1}, t_2 \leftarrow (1 + e^{-\tau_2})^{-1}$
- Let t_{MF} , $r_{MF} \leftarrow \max(t_1, t_2)$, $\min(t_1, t_2)$, noise $\epsilon_{MF} \sim \mathcal{N}(\mathbf{0}, \mathbf{I})$
- Diffuse $\mathbf{x}_{t_{\text{MF}}} \leftarrow \alpha_{t_{\text{MF}}} \mathbf{x}_0 + \sigma_{t_{\text{MF}}} \epsilon_{\text{MF}}$, and $\mathbf{v}_{t_{\text{MF}}} \leftarrow \alpha'_{t_{\text{MF}}} \mathbf{x}_0 + \sigma'_{t_{\text{MF}}} \epsilon_{\text{MF}}$
- $\mathbf{v}_{\mathrm{MF}}^{\mathrm{tgt}} \leftarrow \mathbf{v}_{t_{\mathrm{MF}}} + \omega(\mathbf{u}_{\theta}(\mathbf{x}_{t_{\mathrm{MF}}}, t_{\mathrm{MF}}, t_{\mathrm{MF}}, \mathbf{y}) \mathbf{u}_{\theta}(\mathbf{x}_{t_{\mathrm{MF}}}, t_{\mathrm{MF}}, t_{\mathrm{MF}}) \text{ if } t_{\mathrm{MF}} \in [g_{\mathrm{low}}, g_{\mathrm{high}}] \text{ else } \mathbf{v}_{t_{\mathrm{MF}}}$ Set target $\mathbf{u}^{\mathrm{tgt}} = \mathbf{v}_{\mathrm{MF}}^{\mathrm{tgt}} + (r_{\mathrm{MF}} t_{\mathrm{MF}}) \frac{\mathrm{d}\mathbf{u}_{\theta}}{\mathrm{d}t}$ and detach gradient $\mathbf{u}_{\mathrm{MF}}^{\mathrm{tgt}} \leftarrow \mathrm{sg}(\mathbf{u}_{\mathrm{MF}}^{\mathrm{tgt}})$
- 12:
- $\mathcal{L}_{\mathrm{MF}}(\theta) \leftarrow \log \left(e^{-\phi(t_{\mathrm{MF}}, r_{\mathrm{MF}})} \left\| \mathbf{u}_{\theta}(\mathbf{x}_{t_{\mathrm{MF}}}, t_{\mathrm{MF}}, r_{\mathrm{MF}}) \mathbf{u}_{\mathrm{MF}}^{\mathrm{tgt}} \right\|^{2} + c \right) + \phi(t_{\mathrm{MF}}, r_{\mathrm{MF}})$ 13:
- Compute total loss $\mathcal{L}(\theta) \leftarrow \mathcal{L}_{FM}(\theta) + \mathcal{L}_{MF}(\theta)$ 14:
- Update $\theta \leftarrow \theta \eta \nabla_{\theta} \mathcal{L}(\theta), \phi \leftarrow \phi \eta \nabla_{\phi} \mathcal{L}(\theta)$
- 16: end while

TRAINING LOSS

The loss weighting is shown to be important when training diffusion and flow models. As such, Karras et al. (2020) proposed to adaptively learn the weighting function by casting as a multi-task learning problem. In particular, let us denote \mathcal{L}_t be the flow matching loss for timestep t. Following Kendall et al. (2018), they consider each loss \mathcal{L}_t as a Gaussian distribution modeled standard deviation σ_t , where the maximum likelihood estimation of overall loss results in

$$\mathcal{L} = \frac{1}{2} \mathbb{E}_t \left[\frac{1}{\sigma_t^2} \mathcal{L}_t + \log \sigma_t^2 \right] = \frac{1}{2} \mathbb{E}_t \left[\frac{\mathcal{L}_t}{e^{u_t}} + u_t \right], \tag{8}$$

where $u_t = \log \sigma_t^2$ is a log-variance. At a high-level, if the model is uncertain about the task at time t, i.e., if u_t is high, then the contribution of \mathcal{L}_t is decreased. In practice, they use an MLP layer with Fourier time encoding to model $u_t = \phi(t)$.

Similarly, we consider the loss for flow map training as $\mathcal{L}_{t,r}$. However, as the flow map loss $\mathcal{L}_{t,r}$ is intrinsically of high-variance, and prone to the outliers, modeling with Gaussian distribution may be suboptimal. To this end, we consider Cauchy distribution, has heavier tails than Gaussian. Note that the probability density function of Cauchy distribution is given as

$$p(x; x_0, \gamma) = \frac{1}{\pi \gamma} \frac{1}{1 + (\frac{x - x_0}{\gamma})^2},$$

where x_0 is a location and γ is a scale parameter. Then we model each loss output with additional parameter $\gamma_{t,r}$, and the maximum likelihood estimation of the overall loss is given by

$$\mathcal{L} = \mathbb{E}_{t,r} \left[\log \left(\frac{1}{\gamma_{t,r}^2} \mathcal{L}_{t,r} + 1 \right) + \frac{1}{2} \log \gamma_{t,r}^2 \right] = \mathbb{E}_{t,r} \left[\log \left(\frac{\mathcal{L}_{t,r}}{e^{u_{t,r}}} + 1 \right) + \frac{1}{2} u_{t,r} \right], \tag{9}$$

where $u_{t,r} = \log \gamma_{t,r}^2$ and we omit terms for π as it does not affect training. For implementation, we concatenate the positional embeddings of t and r and use an MLP layer to train $u_{t,r} = \phi(t,r)$, which gives us Eq. (6).

A.2 TIMESTEP PROPOSAL

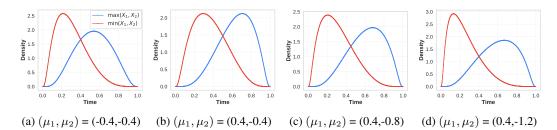


Figure 6: **Time proposal.** The probability density distribution of $\max(X_1, X_2)$ and $\min(X_1, X_2)$, where $X_1 \sim \text{LogitNormal}(\mu_1, 1, 0)$, and $X_2 \sim \text{LogitNormal}(\mu_2, 1.0)$. The red line depicts distribution of t_{MF} and blue line depicts distribution of t_{MF} . We use (d) as our default choice.

As we mentioned in Sec. 4, we sample t and r from the maximum and minimum of two logit-normal distributions. To characterize the distribution, note that for any two independent continuous random variables X, Y with densities f_X, f_Y , and CDFs F_X, F_Y , the order statistics give us following:

$$\begin{split} F_{\max}(z) &= \Pr[\max(X,Y) \leq z] = F_X(z) F_Y(z), \\ f_{\max}(z) &= \frac{\mathrm{d}}{\mathrm{d}z} F_X(z) F_Y(z) = f_X(z) F_Y(z) + F_X(z) f_Y(z), \\ F_{\min}(z) &= \Pr[\min(X,Y) \leq z] = 1 - \Pr[X > z, Y > z] = 1 - (1 - F_X(z))(1 - F_Y(z)), \\ f_{\min}(z) &= \frac{\mathrm{d}}{\mathrm{d}z} [F_X(z) + F_Y(z) - F_X(z) F_Y(z)] = f_X(z)[1 - F_Y(z)] + f_Y(z)[1 - F_X(z)], \end{split}$$

where f_{max} , f_{min} are densities and F_{max} , F_{min} are CDFs of $\max(X,Y)$ and $\min(X,Y)$, respectively. We consider logit-normal distribution with location of μ and scale of 1, i.e., $\text{LN}(\mu,1)$. Then for two independent logit-normal distributions X_1 and X_2 with scale parameters μ_1 and μ_2 , the densities of $\max(X_1,X_2)$ and $\min(X_1,X_2)$ is given as follows:

$$\begin{split} f_{\text{max}}(z) &= \frac{\phi(\text{logit}(z) - \mu_1)\Phi(\text{logit}(z) - \mu_2) + \phi(\text{logit}(z) - \mu_2)\Phi(\text{logit}(z) - \mu_1)}{z(1-z)} \\ f_{\text{min}}(z) &= \frac{\phi(\text{logit}(z) - \mu_1)[1 - \Phi(\text{logit}(z) - \mu_2)] + \phi(\text{logit}(z) - \mu_2)[1 - \Phi(\text{logit}(z) - \mu_1)]}{z(1-z)}, \end{split}$$

where $\operatorname{logit}(z) = \log \frac{z}{1-z}$, $\phi(z) = \frac{1}{\sqrt{2\pi}} e^{-z^2/2}$, $\Phi(z) = \int_{-\infty}^{z} \phi(u) du$. By using the above formula, we plot the distribution of $\max(X_1, X_2)$ and $\min(X_1, X_2)$ in Fig. 6 by varying μ_1 and μ_2 . Note that as we increase the gap between μ_1 and μ_2 , the $\min(X_1, X_2)$ is sampled close to zero.

We hypothesize that choosing r close to zero improves the 1-step generative modeling. To validate this, we conduct an ablation study with identical setup as in Tab. 1, by varying μ_1 and μ_2 . Note that $(\mu_1, \mu_2) = (-0.4, -0.4)$ is the original setup used in MeanFlow (Geng et al., 2025b). As shown in Tab. 5, choosing r closer to zero leads to better 1-step performance. By choosing $(\mu_1, \mu_2) = (0.4, -1.2)$, we achieve the best results, which we use as our default configuration.

Table 5: 1-step results by varying (μ_1, μ_2) .

(μ_1,μ_2)	FID	IS	FD _{DINOv2}
(-0.4, -0.4)	20.3	78.1	571.4
(0.4, -0.4)	19.7	78.8	548.2
(0.4, -0.8)	19.6	78.1	540.3
(0.4, -1.2)	19.3	79.0	531.6

IMPLEMENTATION

Table 6:	Configurations	for ImageNe	t experiments.
----------	----------------	-------------	----------------

Tabl	Table 6: Configurations for ImageNet experiments.						
	DMF-B/2	DMF-L/2	DMF-XL/2	DMF-XL/2+	DMF-XL/2+		
Model							
Resolution	256×256	256×256	256×256	256×256	512×512		
Params (M)	131	459	675	675	675		
FLOPS (G)	23.1	80.7	118.6	118.6	524.6		
Hidden dim.	768	1024	1152	1152	1152		
Heads	12	16	16	16	16		
Patch size	2×2	2×2	2×2	2×2	2×2		
Sequence length	256	256	256	256	1024		
Layers	12	24	28	28	28		
Decoder depth	8	18	20	20	20		
Optimization							
Optimizer	Ada	mW (Kingma	a & Ba, 2014; I	oshchilov & Hutt	er, 2017)		
Batch size			256				
Learning rate	1e-4						
Adam (β_1, β_2)	(0.9, 0.95)						
Adam ϵ			1e-8				
Adam weight decay			0.0				
EMA decay rate			0.9999)			
Flow model training							
Training iteration	800K	800K	800K	4M	1.2M		
Class dropout probability			0.1				
Time proposal μ_{FM}	0.0	0.0	0.0	-	0.0		
REPA alignment depth	-	-	-	8	8		
REPA vision ecoder	-	-	-	DINOv2-B/14	DINOv2-B/14		
Flow map training							
Training iteration			400K				
Class dropout probability	0.1						
Time proposal $\mu_{\rm FM}$			0.0				
Time proposal $(\mu_{\mathrm{MF}}^{(1)}, \mu_{\mathrm{MF}}^{(2)})$	(0.4, -1.2)						
Model guidance scale ω	0.5	0.6	0.6	0.6	0.6		
Guidance interval	[0.0, 1.0]	[0.0, 0.7]	[0.0, 0.7]	[0.0, 0.7]	[0.0, 0.8]		

We use latent Diffusion Transformer (DiT; Peebles & Xie 2023) as our backbone. We use pretrained Stable Diffusion VAE (Rombach et al., 2022) to compress an image with downsampling ratio of 8 and channel dimension of 4, e.g., a 256×256 image is compressed into a latent with size $4 \times 32 \times 32$. When training flow models with REPA (Yu et al., 2025), the loss function is given by $\mathcal{L} = \mathcal{L}_{FM} + \lambda \mathcal{L}_{REPA}$, where \mathcal{L}_{REPA} is a cosine-similarity loss between embeddings of intermediate output of transformer layer and vision encoder outputs. We use 3 layers MLP with SiLU activation (Elfwing et al., 2018) for alignment loss, and $\lambda = 0.5$. For DMF-XL/2+ ImageNet 256×256, we initialize the model from pretrained SiT-XL/2+REPA using checkpoints from their official repository.² For ImageNet 512×512, we trained SiT-XL/2+REPA following their implementation, while adding logit-normal sampling during training. This leads to FID=1.90 with 128 step Euler sampler with Heun's method and CFG scale of 1.35, which we report in Tab. 4. The detailed configurations are shown in Tab. 6.

To enhance training speed, we use customized Flash-Attention (Dao, 2024) using Triton (Tillet et al., 2019). As Flash-Attention currently do not support JVP computation, we follow similar approach introduced in Lu & Song (2025), where we compute both attention outputs and JVP outputs at a single forward pass, using PyTorch's dual forward-mode automatic differentation.

We use automatic mixed-precision with brain floating point 16 (BF16) throughout experiments. We find that using floating point 16 (FP16) often incurs instability, especially when training with model guidance. When using BF16, we did not observe any such behavior.

²https://github.com/sihyun-yu/REPA

For sampling, we use uniform time-discretization when using multiple denoising steps. We find this works well for both Euler and Restart sampler, where shifting the time schedule (Esser et al., 2024) shows marginal improvement or not. Furthermore, as we conduct class-condition dropout during training, it is possible to perform CFG at inference. However, we find that CFG does not help improving the performance, especially when trained with model guidance.

B.1 ARCHITECTURE

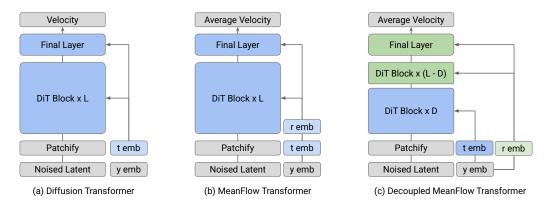


Figure 7: Comparison of transformers.

Fig. 7 depicts the transformer architectures we used. The Diffusion Transformer computes the condition embedding by sum of class embedding (y embed) and timestep embedding (t embed). For MeanFlow Transformer (Geng et al., 2025a; Zhou et al., 2025), an additional timestep embedding layer is used, and the condition embedding is computed by the sum of y embed, t embed, and t embed, where t is the next timestep. Then the condition embedding is fed to all DiT blocks and final layers, t e.g., for modulation of outputs from attention layer and feedforward layer with AdaLN (Peebles & Xie, 2023). On the other hand, Decoupled MeanFlow Transformer use same timestep embedding for t and computes condition embedding for encoders by sum of t embed and t embed, and sum of t embed and t embed for decoders. Note that for MeanFlow Transformer, we feed t – t as input to the t embedding layer, following their observation.

C ADDITIONAL OBSERVATION

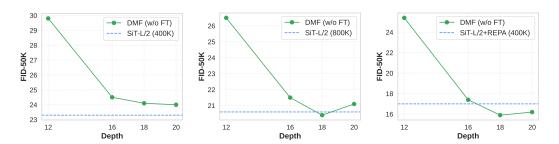


Figure 8: **Strong flow models are better flow map.** We compare the gap between flow model and DMF converted flow map by varying the flow model. We show results for SiT-L/2 trained for 400K and 800K iterations, and SiT-L/2+REPA trained for 400K iterations. FID-50K is reported by sampling with 16-step Euler sampler without using CFG.

As shown in Fig. 3, the DMF model converted from pretrained flow model often outperforms flow model without fine-tuning. We further analyze this phenomenon in details. To study, we exploit SiT-L/2 models trained for 400K and 800K iterations, and SiT-L/2+REPA model trained for 400K iterations. We vary the depth of DMF model by 12, 16, 18, and 20, similar to the setup in Tab. 1.

As shown in Fig. 8, we find that the DMF models from SiT-L/2 400K model do not show gain in compared to their base model. However, as training proceeds, the DMF model from SiT-L/2 800K starts to outperform its base model by setting appropriate depth. Furthermore, we notice that DMF model significantly outperforms when initialized from SiT-L/2+REPA 400K model, even trained for only 400K iterations. We hypothesize that this is due to the representational capacity of base flow model in turning to flow map. As training proceeds, it is well-known that the model forms a representational knowledge, thus SiT-L/2 800K model tends to be better flow map than SiT-L/2 400K model. On the other hand, if we explicitly align the model with self-supervised representation, the model quickly forms the representation, which helps to form better flow map.

D DISCUSSION

Limitations. Although our method demonstrates substantial improvements in FID, IS, and FD_{DINOv2} , we frequently observe visual artifacts in generated samples, particularly under the 1-step setting. We attribute this issue partly to the constraints of our current experimental setup, which relies on the VAE latent space and the ImageNet dataset, both of which contain inherent quality limitations. As a next step, it would be valuable to validate the effectiveness of DMF on large-scale text-to-image (Esser et al., 2021) and text-to-video (Wan et al., 2025) models.

Future directions. We believe our approach opens a promising line of research toward efficient training and inference of diffusion and flow models. For example, reducing inference cost may enable a re-examination of scaling laws for diffusion models (Esser et al., 2024; Blattmann et al., 2023; Yin et al., 2025), allowing more compute to be allocated per denoising step. Another promising direction is inference-time scaling (Ma et al., 2025), such as searching over initial or intermediate noise states using Restart solvers. Finally, extending post-training algorithms, which have so far been mainly studied for diffusion and flow models (Wallace et al., 2024; Lee et al., 2025; Liu et al., 2025; Xue et al., 2025), to flow maps remains an open challenge.

E QUALITATIVE EXAMPLES

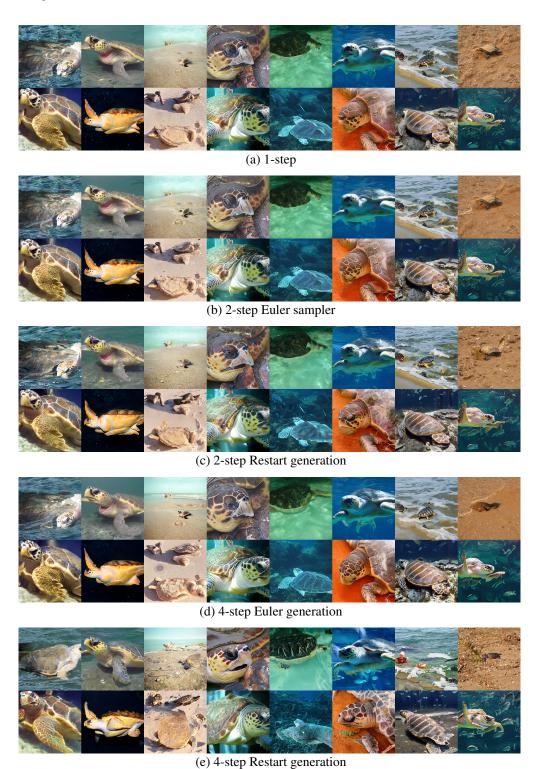


Figure 9: Generation with DMF-XL/2+-512 with class id 33: loggerhead turtle



Figure 10: Generation with DMF-XL/2+-512 with class id 291: lion

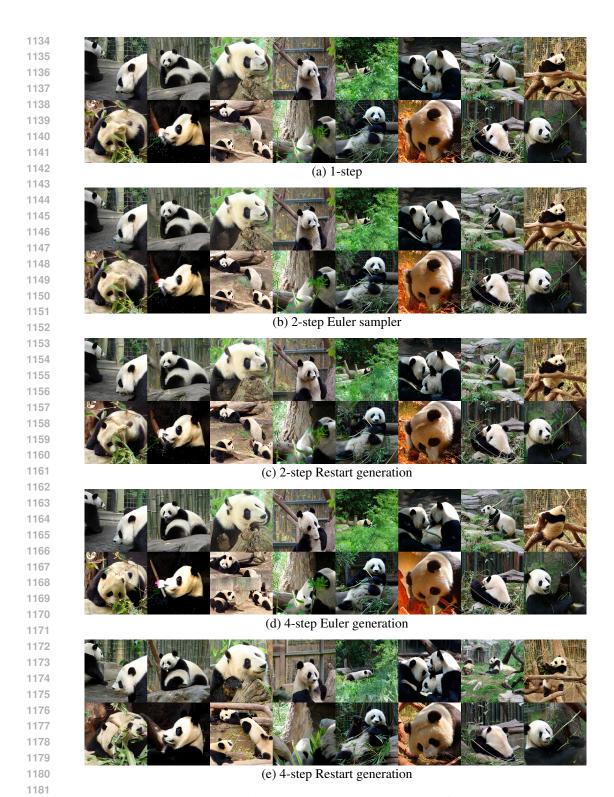


Figure 11: Generation with DMF-XL/2+-512 with class id 388: panda

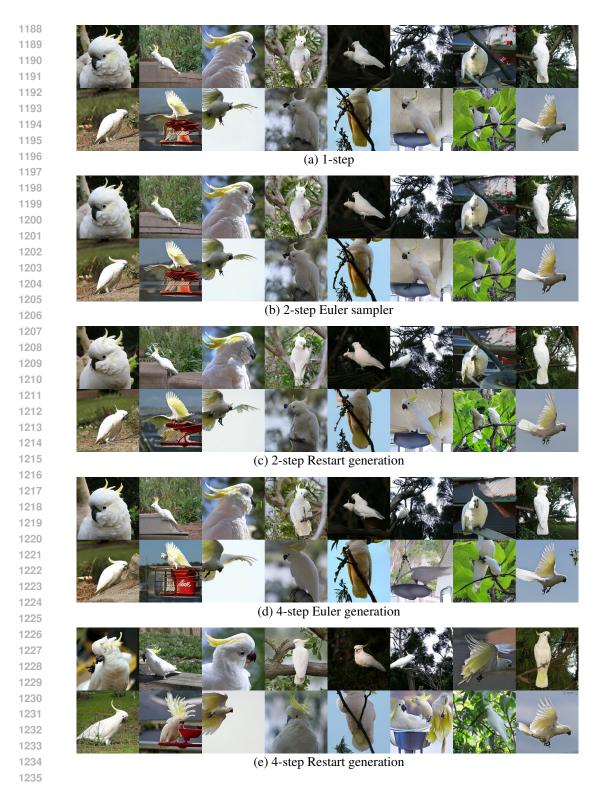


Figure 12: Generation with DMF-XL/2+-256 with class id 89: sulphur-crested cockatoo



Figure 13: Generation with DMF-XL/2+-256 with class id 360: otter



Figure 14: Generation with DMF-XL/2+-256 with class id 933: cheeseburger