

PHYSBENCH: BENCHMARKING AND ENHANCING VISION-LANGUAGE MODELS FOR PHYSICAL WORLD UNDERSTANDING

Anonymous authors

Paper under double-blind review

ABSTRACT

Understanding the physical world is a fundamental challenge in embodied AI, critical for enabling agents to perform complex tasks and operate safely in real-world environments. While Vision-Language Models (VLMs) have shown great promise in reasoning and task planning for embodied agents, their ability to comprehend physical phenomena remains extremely limited. To close this gap, we introduce PhysBench, a comprehensive benchmark designed to evaluate VLMs’ physical world understanding capability across a diverse set of tasks. PhysBench contains 100,000 entries of interleaved video-image-text data, categorized into four major domains: physical object properties, physical object relationships, physical scene understanding, and physics-based dynamics, further divided into 19 subclasses and 8 distinct capability dimensions. Our extensive experiments, conducted on 39 representative VLMs, reveal that while these models excel in common-sense reasoning, they struggle with understanding the physical world—likely due to the absence of physical knowledge in their training data and the lack of embedded physical priors. To tackle the shortfall, we introduce PhysAgent, a novel framework that combines the generalization strengths of VLMs with the specialized expertise of vision models, significantly enhancing VLMs’ physical understanding across a variety of tasks, including an 18.4% improvement on GPT-4o. **Furthermore, our results demonstrate that enhancing VLMs’ physical world understanding capabilities can help embodied agents such as MOKA.** We believe that PhysBench and PhysAgent offer valuable insights and contribute to bridging the gap between VLMs and physical world understanding. Project site: <https://anoy1314.github.io/>

1 INTRODUCTION

Understanding the physical world is a fundamental challenge in embodied AI (Gupta et al., 2021; Srivastava et al., 2021). Embodied agents are required to understand the physical properties of objects (e.g., mass, stiffness) to accurately interact with these objects. They also need to understand the relationships of physical objects to operate efficiently in cluttered environments, understand the structure of physical scenes for safe navigation and manipulation, and anticipate the outcomes of interactions and physics-based dynamics for better planning and preventing accidents. These capabilities of intuitive physics (McCloskey et al., 1983; Carey, 2000) are innate to humans and can also greatly benefit embodied agents, allowing them to perform complex tasks and operate safely in real-world scenarios (Kill & Kim, 2020).

Vision-language models (VLMs) (Liu et al., 2024c; Achiam et al., 2023; Team et al., 2023) have emerged as promising solutions for building embodied agents (Liu et al., 2024a; Nasiriany et al., 2024; Huang et al., 2023a). Trained on large amounts of human knowledge, these models have developed strong capabilities in reasoning and task planning (Yue et al., 2024; Lu et al., 2024; Kim et al., 2024; Niu et al., 2024; Zhen et al., 2024). However, relying solely on these capabilities is insufficient for developing generalist embodied agents. A series of studies have highlighted a gap in understanding the physical world, leading to operational errors (Liu et al., 2024a), such as mishandling fragile objects (Wang et al., 2023c) or failing to recognize appropriate grasping affordances (Guo et al., 2024). **Since these agents operate in and interact with the real world, VLMs must possess a comprehensive understanding of the physical world—a critical yet underexplored domain.** This deficiency in physical world understanding limits the effective deployment of VLMs in embodied applications (Liu et al., 2024a; Guo et al., 2024).






Common VQA	⚙️ Physical Object Property	↗️ Physical Object Relationships
 <p>Q What are the things I should be cautious about when I visit here? A When visiting the pier over the lake, there are a few things you should be cautious about. First, ensure that you ...</p>	 <p>Q Which object has greater elasticity? A. Green ball B. White ball C. Same elasticity D. Cannot determine</p>	 <p>Q What is the object closest to the teacup in the Figure? A. The pastry B. The peach C. The knife D. The spoon ✓</p>
🌳 Physical Scene Understanding	⚖️ Physics-based Dynamics	
 <p>Q How does the viewpoint alter? A. Moves downward B. Rotates to the right ✓ C. Moves upward D. Rotates upward</p>	 <p>Q Which object will the cart hit first? A. The red cube ✓ B. The blue cube C. The green cube D. The yellow cube</p>	

Figure 1: **Common VQA** tasks typically involve questions about visual content and general knowledge. **PhysBench** emphasizes understanding the physical world, encompassing 4 dimensions.

To further investigate this issue, we pose **two fundamental questions**: (1) *Do VLMs possess an understanding of the physical world, and if not, what factors contribute to this limitation?* (2) *How can we enhance VLMs’ physical world understanding capabilities and facilitate the effective deployment of embodied agents like MOKA?*

To answer the above questions and comprehensively assess the extent of the gap between VLMs and physical world understanding, we introduce PhysBench, a dataset comprising 100,000 interleaved video-image-text entries. Given the difficulty of acquiring such data, where expressing specific properties often requires multiple images, we undertook a five-step process, spending a total of 4,000 hours on annotation. We systematically evaluate 39 representative VLM across four domains—physical object properties, physical object relationships, physical scene understanding, and physics-based dynamics—encompassing 19 sub-tasks, as shown in Figure 1. Our extensive experiments reveal that (1) *most current VLMs exhibit poor understanding of the physical world*, particularly in physical scene understanding and physics-based dynamics, with closed-source models significantly outperforming open-source ones; and (2) *the training data for VLMs is likely a major factor contributing to their subpar performance*, as it often lacks the necessary physical knowledge. Notably, when VLMs were fine-tuned on our physically grounded data, their performance improved.

To further improve VLM’s physical world understanding capabilities, we propose PhysAgent, a unified framework that incorporates vision foundation models and a physics knowledge memory. By analyzing the sources of errors for VLMs on PhysBench, we identified perceptual inaccuracies and insufficient knowledge as the primary causes of mistakes. To address these issues, we incorporated vision foundation models to enhance perceptual capabilities and assist VLMs in handling tasks they typically struggle with, such as depth estimation and numerical distance calculation. Additionally, we integrated a knowledge memory module to embed essential knowledge about the physical world, which can be selectively invoked by PhysAgent. Unlike previous methods designed for physical reasoning (Zheng et al., 2024; Tung et al., 2023), PhysAgent retains the strong generalization abilities of VLMs and their capacity to solve open-ended problems, without relying on manually predefined processing logic or being limited to specific tasks. Experimental results demonstrate that PhysAgent improves GPT-4o’s zero-shot performance on PhysBench by 18.4%. Furthermore, we investigate how physical world understanding helps the deployment of embodied agents through extensive robotic manipulation experiments on MOKA (Liu et al., 2024a). Specifically, we employ two approaches: fine-tuning the VLM with PhysBench and utilizing PhysAgent for zero-shot inference across five representative manipulation tasks. The improvement in those tasks further validates that PhysBench and PhysAgent can facilitate the **deployment of embodied agents like MOKA**.

We hope this work offers valuable insights and contributes to bridging the gap between VLMs and physical world understanding, ultimately advancing embodied AI toward human-level capabilities. In summary, this paper has two technical contributions: (1) We present PhysBench, a large-scale benchmark for evaluating the performances of vision-language models in physical world understanding. We identify the key challenges through extensive studies and provide insights into why the existing VLMs have insufficient physical world understanding capabilities. (2) We propose PhysAgent, a unified approach that improves VLMs’ physical world understanding abilities. Through extensive experiments, we demonstrate that enhancing VLMs’ comprehension of physical environments can significantly facilitate the deployment of embodied agents.

2 RELATED WORK

Physical Comprehension Datasets. Early benchmarks (Riochet et al., 2018; Rajani et al., 2020) were developed primarily for vision-only models, while more recent efforts (Yi et al., 2019; Chen et al., 2022; Wang et al., 2024e) have predominantly focused on simple visual primitives, such as spheres, cubes, and rigid object collision events, often restricted to a limited set of simulated scenarios (Zheng et al., 2024; Tung et al., 2023). We summarize the key features of these various benchmarks and compare them against our benchmark in Table 1. However, existing VQA datasets assessing physical knowledge (Lu et al., 2022; He et al., 2024) mainly focus on commonsense reasoning rather than physical world perception. Spatial VQA benchmarks (Chen et al., 2024a; Lyu et al., 2024; Bonnen et al., 2024; Wang et al., 2024c) emphasize geometric relationships in 3D scene, which represent only a part of the physical. In contrast, PhysBench is the first comprehensive dataset designed to evaluate models’ understanding of the physical world, encompassing a wide variety of scenarios and tasks not covered by previous benchmarks.

Physical Reasoning Models. Models for understanding the physical world generally fall into two categories. The first comprises physics-specialized models (Guen & Thome, 2020; Duan et al., 2022), which are typically limited to predicting the next state and are not applicable to other tasks. The second includes physical oracle models (Zheng et al., 2024; Tung et al., 2023), which are suitable for only a narrow range of tasks due to their reliance on predefined rules. These models often require training additional modules like R-CNN, and their probabilistic outputs restrict them to classification tasks, limiting their ability to handle open-ended questions. In contrast, PhysAgent offers greater flexibility and adaptability across a broader spectrum of problems without these limitations.

Vision-Language Models. Vision-Language Models (VLMs) are large-scale models that integrate visual modalities with language understanding (Wu et al., 2023b; Zhan et al., 2024; Dai et al., 2024). In recent years, there has been a surge of work leveraging VLMs as agents for embodied AI (Liu et al., 2024a; Nasiriany et al., 2024). Although these approaches are generalizable, they face challenges due to weak physical world understanding capabilities (Liu et al., 2024a; Guo et al., 2024). By employing PhysBench and PhysAgent, these shortcomings can be mitigated, enhancing the physical world understanding capabilities of VLMs and enabling more reliable robotic control. Additionally, spatial VLMs Bonnen et al. (2024) have identified that most VLMs lack 3D spatial reasoning capabilities due to insufficient data. However, since spatial reasoning represents only a subset of physical world understanding, our work aims to provide a more comprehensive evaluation and improvement of VLMs’ physical world understanding abilities. For additional related work, see Appendix G.

Table 1: A comparison between PhysBench and other physical understanding question-answering benchmarks reveals that PhysBench is a comprehensive dataset, covering a wide range of tasks related to physical world understanding.

	Property	Attribute	Location	Velocity	Temperature	Camera	Light	Collision	Manipulation	Fluid	Interleaved	Size	More than cube
144	CLEVRER Yi et al. (2019)	✓	✗	✗	✗	✗	✗	✓	✗	✗	✗	300,000	✗
	Cater Girdhar & Ramanan (2019)	✓	✗	✗	✗	✗	✗	✓	✗	✗	✗	5,500	✗
145	CRIPP-VQA Patel et al. (2022)	✓	✗	✗	✗	✗	✗	✓	✗	✗	✗	5,000	✗
	ComPhy Chen et al. (2022)	✓	✗	✗	✗	✗	✗	✓	✗	✗	✗	99,844	✗
146	EmbSpatial Du et al. (2024)	✗	✗	✓	✗	✗	✗	✓	✗	✗	✗	3,600	✓
	Physion Bear et al. (2021)	✓	✗	✗	✗	✗	✗	✓	✓	✗	✗	17,200	✓
147	Physion++ Tung et al. (2023)	✓	✓	✗	✗	✗	✗	✓	✗	✗	✗	2,000	✓
	ComPhy Zheng et al. (2024)	✓	✗	✗	✗	✗	✗	✓	✗	✗	✗	6,500	✓
148	SuperCLEVR Wang et al. (2024e)	✓	✗	✗	✓	✗	✗	✓	✗	✗	✗	1,200	✗
	PhysBench	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100,000	✓

3 PHYSBENCH

To assess VLMs’ physical world understanding ability, we first define the concept of physical world understanding and introduce PhysBench in Section 3.1. Next, we provide a detailed description of the data collection process in Section 3.2. Utilizing PhysBench, we conduct experiments to determine whether VLMs can effectively comprehend the physical world in Section 3.3. Finally, in Section 3.4, we discuss the potential reasons for poor performance.

3.1 OVERVIEW OF PHYSBENCH

Understanding the physical world is essential yet fundamentally challenging for embodied AI, as systems must perceive, interpret, and predict the properties and dynamics of objects and environments. This involves comprehending object properties and relationships, interpreting environmental scenes, and anticipating interaction outcomes based on visual cues and core physical principles to ensure safe and effective operation.



Figure 2: Sampled PhysBench examples from four major dimensions mentioned in Section 3.1. Due to space constraints, we present only the correct answers (as each question in our dataset is a four-option multiple-choice with one correct answer) and defer additional examples to Appendix C.

However, existing datasets often focus solely on image content and commonsense reasoning, neglecting the four fundamental aspects of the physical world mentioned above. To address this gap, we propose PhysBench, which comprehensively evaluates VLMs’ perception of the physical world across four major task categories of the physical world: (1) *Physical Object Property*: Assessment of physical attributes of objects such as mass, size, density, tension, friction, bending stiffness, elasticity, and plasticity. (2) *Physical Object Relationships*: Evaluation of spatial relationships involving objects’ relative or absolute positions and motions. (3) *Physical Scene Understanding*: Interpretation of environmental factors, including light sources, viewpoints, temperature, etc. (4) *Physics-based Dynamics*: Understanding of physical events like collisions, throwing, fluid dynamics, explosions, and other phenomena. Each category corresponds to specific sub-task types and ability types, whose distributions are shown in Figures 3. Detailed examples of specific tasks are illustrated in Figure 2, with additional examples provided in Appendix H. A comprehensive description of sub-task types and ability types is available in Appendix C.

PhysBench is structured as a multiple-choice questionnaire, presenting four options for each question with only one correct answer. The primary statistics of PhysBench are presented in Table 2 and detailed in Appendix D. Recognizing that different types of tasks possess unique characteristics, we utilize videos and multiple images to effectively convey features that are difficult to capture in a single image—such as elasticity, mass, density, and environmental factors like temperature, humidity, light source, and viewpoint. The dataset also includes objects with similar initial states but differing properties, leading to different future outcomes. This enriches the dataset and allows for a wider range of observable physical behaviors. Consequently, PhysBench draws its data from the internet, real-world captures, and simulations, making it a mixed-format benchmark that integrates text, images, and videos. PhysBench dataset consists of 100,000 entries, organized into 19 subclasses and 8 distinct capability dimensions. For convenience, we selected a subset of 10,002 entries, which are more challenging and diverse, as the test set, and 200 entries as the validation set for parameter choosing. The experimental results presented in this paper, unless otherwise specified, are based on the test set. The performance of VLMs on PhysBench-val can be found in Appendix F.4. Benchmark release details can be found in Appendix B.8.

216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269

Statistic	Number
Total questions	10,002
- only one image	1,766 (18.6%)
- only one video	2,749 (44.8%)
- interleave	1,902 (20.1%)
Unique number of images	10,058
Unique number of videos	3,260
3D Assets	678
Maximum question length	48
Maximum choice length	20
Average question length	16.5
Average choice length	4.4

Table 2: Key statistics.

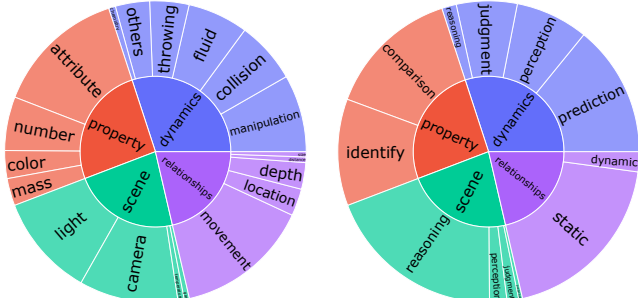


Figure 3: Subtype distribution and ability distribution

3.2 DATASET COLLECTION PROCESS

To ensure data quality, all questions were manually annotated by graduate students in STEM fields and further refined through a rigorous review process after collecting and clipping the raw images or videos. To maintain consistency in annotations, we implemented multiple rounds of cleaning and validation throughout the following steps. We have preserved intermediate outputs from the annotation process, such as depth and reflectance maps for simulator-generated data and human-annotated physical principles for many web-sourced videos. The process involves the following sequential steps: (a) *Video Collection*. Videos and images are gathered from web searches, simulations, and real-world captures. The collection process uses predefined simulation rules, LLM-guided queries, and other strategies to find related images or videos (see Appendix A). Human annotators further refine the data by clipping and annotating physical principles in the images or videos. (b) *Video Captioning*. Human-annotated raw videos are processed through automatic filtering, followed by GPT-4o annotations that generate captions with human check. (c) *Questions Design*. For videos annotated with physical principles, we generate physics-related questions using both manual design and GPT-4o, following predefined rules. An automated filter and manual review processes eliminate irrelevant questions. (d) *File Organization*. The remaining valid questions are categorized by task, sub-task, and ability type by human experts. (e) *Quality Check*. The organized dataset undergoes a human review to ensure that the questions are physical world relevant, rely on all input information, are not grounded in common sense, and are accurately categorized with clear questions and corresponding answers. Due to space limitations, the collection guidelines are provided in Appendix B.

3.3 CAN VLMS UNDERSTAND THE PHYSICAL WORLD

To assess whether VLMS can understand the physical world, we evaluated 39 representative VLMS on PhysBench and found that a significant performance gap remains between VLMS and human-level understanding. The primary results are presented in Table 3, while detailed analyses of sub-task performance and ability types across the four task categories are provided in Appendix F.3.

Setup. Our evaluation was conducted under three configurations: (a) *Image VLMS*, which support only single-image input (e.g., LLaVA-1.5 and BLIP-2); (b) *Video VLMS*, designed for video comprehension (e.g., Chat-UniVi and PLLaVA); and (c) *General VLMS*, which support multiple images and interleaved inputs (e.g., VILA-1.5 and GPT-4o). It is important to note that the data used for evaluating setups (a) and (b) is a subset of PhysBench test subset with interleaved QA pairs removed, whereas setup (c) was evaluated on the full dataset. For most models, we followed the standard protocol outlined in VLMEvalKit Contributors (2023), setting the temperature to 0. For models that do not support multiple images as input, we employed two methods: the *merge* method, where video frames are concatenated into a single image (Fu et al., 2024; Zhang et al., 2024a; Jiang et al., 2024), and the *seq* method, where video frames are input sequentially as individual images. Notably, only models using the *seq* setup can handle interleaved text-image sequences. For details on VLM prompts and hyperparameters, see Appendix E.

VLMS exhibit a limited understanding of the physical world. Our evaluation indicates that most models achieve an average accuracy of approximately 40%, which is significantly below human-level performance. Even the best-performing model, GPT-4o, attains only 49.49% accuracy, underscoring the substantial gap between current VLMS and true comprehension of the physical world.

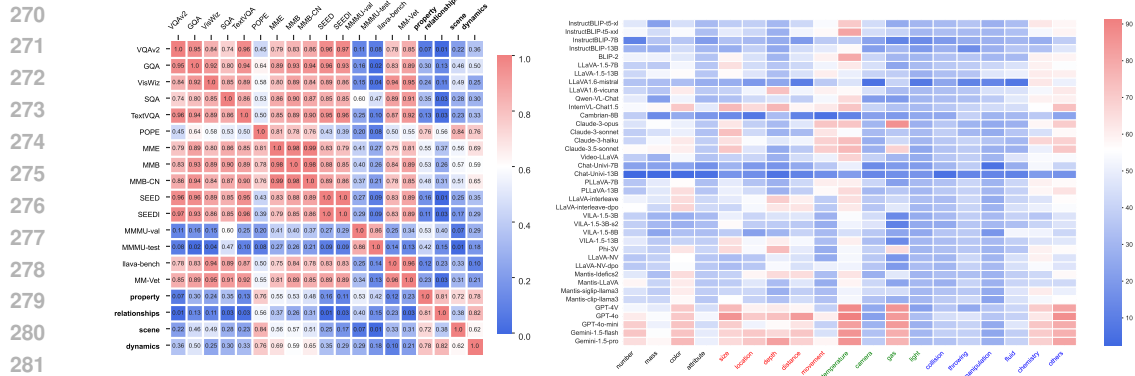


Figure 4: (a) Correlation map between 4 tasks in PhysBench and 15 other vision-language benchmarks. (b) The visualization of model performance across 19 sub-tasks is presented, where different colors represent the respective categories. The four colors, from left to right, represent physical object property, physical object relationships, physical scene, and physical-based dynamics.

	Size	Format	Property	Relationships	Scene	Dynamics	Avg
Random Choice	-	-	25.00	25.00	25.00	25.00	25.00
Human	-	-	97.10	95.67	94.91	95.68	95.87
Image VLM							
InstructBLIP-t5-xl Dai et al. (2024)	4B	merge	35.35	36.67	37.45	35.95	36.24
InstructBLIP-t5-xxl Dai et al. (2024)	12B	merge	41.11	38.47	37.89	36.42	38.51
InstructBLIP-7B Dai et al. (2024)	7B	merge	21.94	29.00	19.53	27.45	23.82
InstructBLIP-13B Dai et al. (2024)	13B	merge	31.69	33.19	23.13	30.64	29.94
BLIP-2 Li et al. (2023c)	12B	merge	41.70	40.83	36.25	36.93	38.61
LLaVA-1.5-7B Liu et al. (2023a)	7B	merge	38.44	41.53	38.60	42.69	40.09
LLaVA-1.5-13B Liu et al. (2023a)	13B	merge	41.31	42.50	34.40	44.38	40.45
LLaVA1.6-mistral Liu et al. (2024b)	7B	merge	29.77	22.22	8.54	20.58	20.30
LLaVA1.6-vicuna Liu et al. (2024b)	7B	merge	40.26	59.72	38.60	42.65	42.28🏆
Qwen-VL-Chat Bai et al. (2023b)	9B	merge	35.97	43.33	26.47	41.27	35.63
InternVL-Chat1.5 Chen et al. (2024c)	26B	merge	53.08	70.14	37.01	44.78	47.51🏆
Cambrian-8B Tong et al. (2024)	8B	merge	23.27	17.92	23.02	29.29	24.61
Claude-3-opus Anthropic (2024)	-	merge	41.97	40.97	30.63	36.50	37.00
Claude-3-sonnet Anthropic (2024)	-	merge	37.86	40.00	32.23	36.89	36.18
Claude-3-haiku Anthropic (2024)	-	merge	43.28	53.33	30.06	39.93	39.44
Claude-3.5-sonnet Anthropic (2024)	-	merge	46.46	41.11	27.89	37.60	38.05
Video VLM							
Video-LLaVA Lin et al. (2023a)	7B	seq	36.82	36.11	33.69	40.52	37.04
Chat-Univi-7B Jin et al. (2023)	7B	seq	19.28	20.97	18.86	28.46	22.19
Chat-Univi-13B Jin et al. (2023)	13B	seq	4.30	11.53	15.67	11.47	10.36
PLLaVA-7B Xu et al. (2024)	7B	seq	38.02	35.83	36.34	39.89	37.94🏆
PLLaVA-13B Xu et al. (2024)	13B	seq	39.91	38.33	31.52	40.76	37.70🏆
General VLM + Interleaved data							
LLaVA-interleave Li et al. (2024b)	7B	seq	47.23	44.62	35.64	37.21	41.00
LLaVA-interleave-dpo Li et al. (2024b)	7B	seq	47.97	42.67	33.73	38.78	40.83
VILA-1.5-3B Lin et al. (2023b)	3B	seq	32.40	33.02	34.84	35.78	34.11
VILA-1.5-3B-s2 Lin et al. (2023b)	3B	seq	33.14	30.26	35.72	33.00	33.07
VILA-1.5-8B Lin et al. (2023b)	8B	seq	33.41	29.88	30.85	35.91	32.85
VILA-1.5-13B Lin et al. (2023b)	13B	seq	40.53	40.15	31.96	36.07	37.15
Phi-3V Abdin et al. (2024)	4B	seq	43.67	37.92	34.93	36.92	38.42
LLaVA-NV Zhang et al. (2024b)	7B	seq	38.33	30.83	34.00	37.17	35.42
LLaVA-NV-dpo Zhang et al. (2024b)	7B	seq	38.83	44.31	33.86	37.21	37.43
Mantis-Idefics2 Jiang et al. (2024)	8B	seq	41.97	41.44	29.53	36.56	37.39
Mantis-LLaVA Jiang et al. (2024)	7B	seq	44.48	30.45	36.25	34.73	36.69
Mantis-siglip-llama3 Jiang et al. (2024)	8B	seq	42.47	32.78	36.83	37.51	37.64
Mantis-clip-llama3 Jiang et al. (2024)	8B	seq	40.61	35.11	32.45	38.36	36.92
GPT-4V Achiam et al. (2023)	-	seq	49.59	45.77	26.34	42.15	41.26
GPT-4o Achiam et al. (2023)	-	seq	56.91	64.80	30.15	46.99	49.49🏆
GPT-4o-mini Achiam et al. (2023)	-	seq	53.54	44.24	30.59	42.90	43.15
Gemini-1.5-flash Team et al. (2023)	-	seq	57.41	52.24	34.32	40.93	46.07
Gemini-1.5-pro Team et al. (2023)	-	seq	57.26	63.61	36.52	41.56	49.11🏆

Table 3: **Evaluation results for 39 VLMs.** The evaluation of General VLMs is based on the data from Video and Image VLM evaluations, with the addition of interleaved data. “Seq” refers to sequential input of frames of videos, while “merge” refers to merging video frames into a single image. **Bold** indicates the best result, and underline indicates the second best in each group.

As shown in Figure 4(b), considerable room for improvement remains, particularly in tasks related to physical scene understanding and physics-based dynamics.

Closed-source models generally perform better. As shown in Figure 5(b), the GPT series and Gemini-1.5 models significantly outperform open-source models. Notably, GPT-4 surpasses the best open-source model, LLaVA-interleave, by 20.7%, indicating a substantial gap between open-source and closed-source models. However, we did not observe a clear advantage with Claude, a finding that aligns with results from other benchmarks (Cao et al., 2024; Wu et al., 2024c).

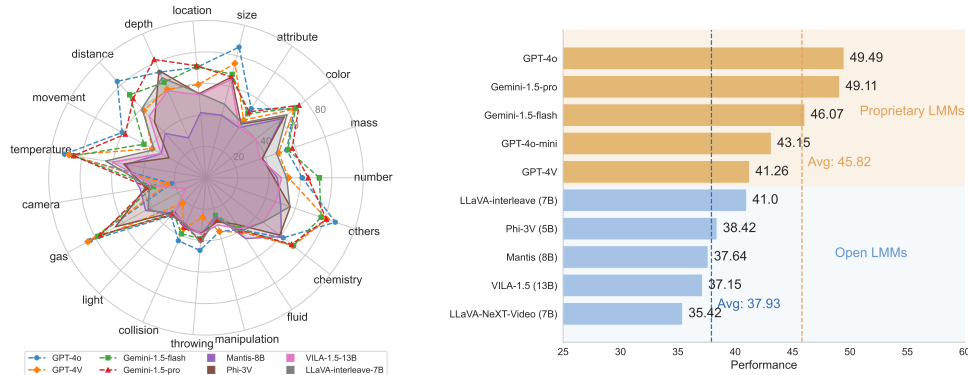


Figure 5: (a) The performance of 8 representative open-source General VLMs across 19 sub-tasks in PhysBench, which support interleaved inputs. The closer it is to the circular boundary, the better. (b) The overall performance of those 8 VLMs. Closed-source models generally perform better.

3.4 WHY DO VLMs STRUGGLE WITH PHYSICAL WORLD UNDERSTANDING

To further investigate why VLMs struggle with physical world understanding, we analyzed PhysBench and discovered that it differs significantly from common VQA tasks. Additionally, we found that the performance of larger model size or more training data does not result in clear improvements on PhysBench, which may be *due to a lack of physical world knowledge in the training data*. Furthermore, we found that many errors stem from this deficiency; when we augmented the models with physical world knowledge, their performance improved. This further suggests that the gap between VLMs and physical world understanding may be attributed to limitations in the training data.

Physical world understanding differs significantly from common VQA tasks. To assess the relationships between our tasks and other VLM benchmarks, we adopted the methodology proposed by (Tong et al., 2024; Fang et al., 2024) to construct a correlation map, as shown in Figure 4(a). Details on the construction of the correlation map are provided in Appendix F.6. **Our analysis reveals that PhysBench differs significantly from traditional VLM benchmarks, exhibiting closer alignment with POPE (Li et al., 2023h) in tasks such as hallucination detection, while also showing that performance does not consistently improve with increased data or model scale.**

VLMs’s physical world understanding ability does not scale with model size, data, or frames. (1) *Model Size Scalability.* Figure 6(a) shows that increasing model size using the same dataset significantly enhances performance on common QA tasks. However, this improvement does not extend to PhysBench, where gains are limited or even negative. For instance, while VILA-1.5’s performance improves by 7.1% on common QA tasks when scaling from 3B to 7B parameters, it


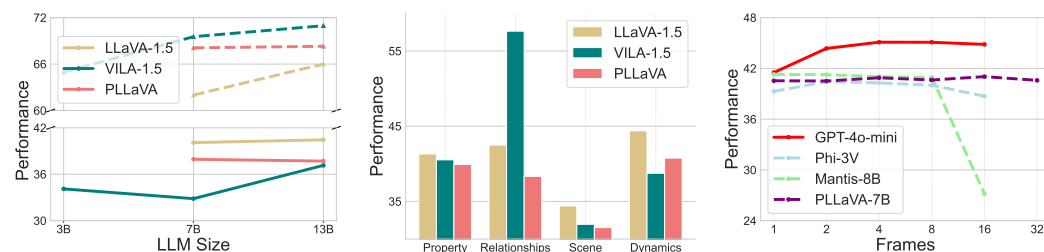


Figure 6: (a) Model size scalability. The solid line shows the average performance across 14 common QA tasks (Table 22), while the dashed line represents PhysBench results. (b) Data scalability. VILA and PLLaVA expand upon LLaVA’s architecture by utilizing more data. (c) Frame scalability.

378 decreases by 3.8% on PhysBench. (2) *Data Scalability*. As shown in Figure 6(b), scaling up the
 379 dataset offers limited benefits for physical comprehension. PLLaVA and VILA-1.5, larger-data vari-
 380 ants of LLaVA-1.5, exhibit minimal improvement or even a decline in performance on PhysBench
 381 compared to LLaVA-1.5. Analysis of the additional data (Appendix D.2) reveals it is predominantly
 382 descriptive, focusing on content description rather than enhancing physical understanding. Nev-
 383 ertheless, VILA-1.5’s spatial reasoning abilities have significantly improved, aligning with trends
 384 observed in other benchmarks (Yu et al., 2023b; Li et al., 2023a). (3) *Frame Scalability*. Figure 6(c)
 385 indicates that the three open-source models are insensitive to the number of frames, performing
 386 similarly to single-frame inputs, with performance sometimes decreasing as frames increase. This
 387 suggests that current models cannot effectively utilize multi-frame information. Notably, increasing
 388 the number of frames led Mantis to frequently fail to follow instructions or refuse to answer, and
 389 expanding beyond eight frames did not yield further improvements.

390 **Perceptual and knowledge gaps constitute the majority of errors.** To investigate the poor perfor-
 391 mance of VLMs on PhysBench, we randomly selected 500 questions and obtained explanations from
 392 three models—GPT-4o, Phi-3V, and Gemini-1.5-flash. Expert annotators classified the root causes
 393 of the mispredictions into six categories: perception errors, reasoning errors, lack of knowledge,
 394 refusal to answer, failure to follow instructions, and annotation errors in the dataset. The distribu-
 395 tion of these error types is shown in Figure 7, with selected cases and detailed analyses provided in
 396 Appendix I. The error distribution reveals that perceptual errors account for 37%, 40%, and 45% of
 397 the mistakes made by GPT-4o, Gemini-1.5-flash, and Phi-3V, respectively, while lack of knowledge
 398 constitutes 34%, 35%, and 23% of errors for these models. This analysis suggests that perceptual er-
 399 rors and knowledge gaps are the primary sources of mispredictions, indicating that while the models
 400 are adept at extracting information from text and visual inputs, their physical world understanding
 and complex reasoning abilities remain limited.

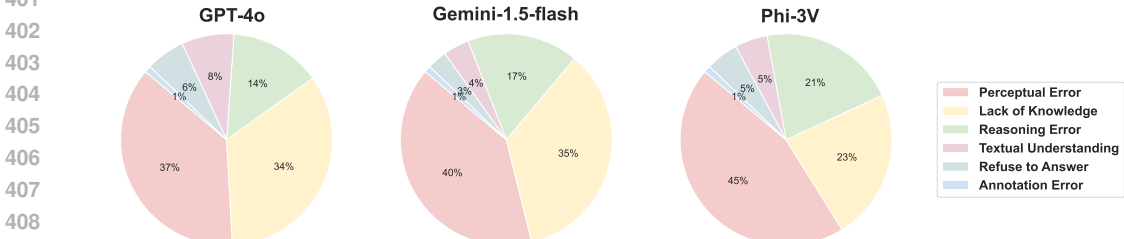

401
402
403
404
405
406
407
408
409
410 Figure 7: Distribution of error types for GPT-4V, Gemini-1.5-flash, Phi-3V.

411 **Can VLMs transfer physical world knowledge?** Our error analysis revealed that inadequate phys-
 412 ical world knowledge and reasoning capabilities were key contributors to the models’ poor perfor-
 413 mance. To investigate whether introducing additional examples could enhance performance, we
 414 conducted tests on 200 entries of PhysBench, pairing each with a similar example. These additional
 415 examples were incorporated through fine-tuning or in-context learning. As shown in Figure 9(b),
 416 the performance improvements after adding physical world knowledge examples indicate that VLMs
 417 can transfer physical knowledge to some extent. This suggests that the original data’s lack of phys-
 418 ical world knowledge was a significant factor in the models’ suboptimal performance.

419
420 **4 PHYSAGENT**

421
422 Recognizing perceptual inaccuracies and knowledge gaps as key sources of error shown in Sec-
 423 tion 3.4, we introduce PhysAgent in Section 4.1 to improve VLMs’ understanding of the physical
 424 world by integrating vision foundation models for enhanced perception and incorporating phys-
 425 ical knowledge memory. To verify whether enhancing VLMs’ physical understanding facilitates the
 426 deployment of embodied agents, we conducted five embodied agent tasks as detailed in Section 4.2.

427
428 **4.1 HOW TO ENHANCE VLMs FOR PHYSICAL WORLD UNDERSTANDING**

429
430 We propose PhysAgent, a novel framework that integrates knowledge memory and vision foun-
 431 dation models to enhance physical world understanding in VLMs. This framework is inspired by
 our findings in Section 3.4, where we identified perceptual errors and insufficient knowledge as the

primary causes of mistakes in VLMs. To address these shortcomings, we establish a *knowledge memory* that provides prior physical world knowledge and rules. Additionally, we utilize vision *foundational models* namely Depth Anything (Yang et al., 2024), SAM (Kirillov et al., 2023), and GroundingDINO (Liu et al., 2023b) to achieve enhanced visual perception. These models enable us to identify object types and spatial locations, and further acquire information about objects’ dynamics through VLM reasoning or retrieval from memory. They also help solve problems that VLMs cannot address, such as estimating depth and numerical distances. Unlike prior physical reasoning models that are confined to specific tasks and struggle to adapt to natural language queries, our method aims to fully leverage the reasoning and generalization capabilities of VLMs. Experiments on PhyBench show that PhysAgent improves performance by 18.4% on GPT-4o.

As illustrated in Figure 8, given a question, PhysAgent follows three key steps: (1) *Task-specific Prompt Activation*: PhysAgent first classifies the question and activates task-specific prompts, incorporating relevant physical knowledge for different tasks. For instance, for a question about light, it retrieves knowledge on the relationship between light source movement and shadow direction to assist the VLMs. (2) *Foundation Models Integration*: PhysAgent processes the foundation model’s outputs, leveraging VLM reasoning capabilities. For example, it identifies objects in the scene using GroundingDINO and retrieves relevant attributes from the knowledge memory. (3) *Chain-of-Thoughts Reasoning*: PhysAgent then engages in chain-of-thought reasoning, conducting a self-verification step to ensure logical consistency before providing the final answer.

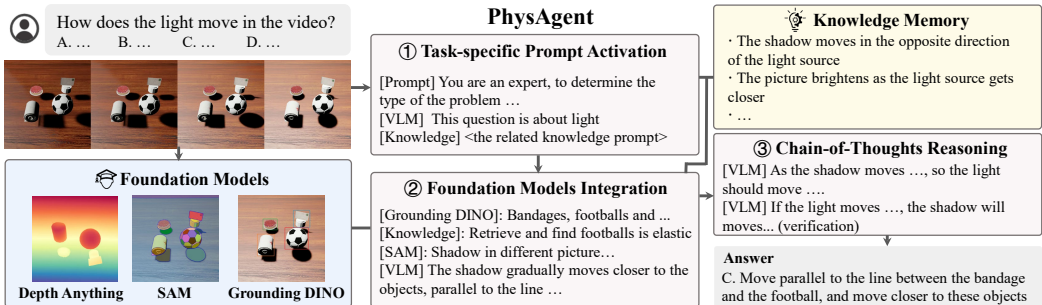


Figure 8: Architecture of PhysAgent. PhysAgent employs a three-step reasoning process to address the problem: activating task-specific prompts, integrating foundation models, and reasoning.

Baselines. We utilized three prompt methods: Chain of Thought (CoT) (Kojima et al., 2023), Desp-CoT (Wu et al., 2023d), and Pure Language Reasoning (PLR), in addition to an oracle method, ContPhy (Zheng et al., 2024), which served as our baseline. Detailed descriptions of the prompt strategies and the implementation of ContPhy are provided in Appendix E.6 and Appendix E.7.

Results. The results in Figure 9(a), lead to the following conclusions: (1) *Prompting methods are unstable, and using pure language yields catastrophic results.* As observed, the CoT strategy has minimal impact, while both Desp-CoT and PLR show a decline in performance. This suggests that descriptive prompts are not particularly effective for addressing the questions, implying that our dataset requires a deeper understanding of the videos or images to answer accurately. (2) *ContPhy even worsens performance.* In three out of four tasks, ContPhy underperforms compared to its base model, GPT-4o, due to suboptimal module invocation and limited flexibility in its logical templates, which struggle to adapt to diverse scenarios. Additionally, ContPhy relies on models like RCNN to process visual information instead of directly leveraging GPT-4o, leading to potential information loss and subsequent performance degradation. (3) *PhysAgent consistently improves zero-shot performance,* notably achieving a 49.5% improvement for GPT-4o in Scene. Compared to the CoT, Desp-CoT, and PLR prompting strategies, our method demonstrates consistent improvements.

4.2 CAN PHYSICAL WORLD UNDERSTANDING HELP IN EMBODIED APPLICATIONS

Despite gaining significant attention in recent years for their strong generalization capabilities, VLMs as embodied agents (Liu et al., 2024a) still exhibit fundamental operational errors during physical world interactions. In this section, we investigate whether enhancing the physical world perception abilities of VLMs can improve their performance in downstream embodied agent tasks.

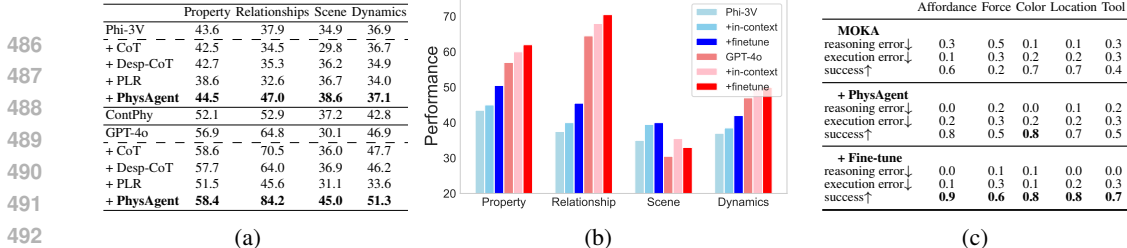


Figure 9: (a) Performance comparison of various methods. (b) Analysis of physical world knowledge transfer. (c) Performance evaluation across five embodied tasks as described in Figure 10.

To evaluate embodied agents, we designed five fundamental manipulation tasks as shown in Figure 10(a). The specifics of these tasks, along with the corresponding testing methods and language instructions, can be found in Appendix F.5. These tasks require the agents to possess a basic understanding of spatial relations and the physical properties of objects. Specifically, we utilized MuJoCo (Todorov et al., 2012) and the 7-DoF Franka Emika robotic arm from Menagerie (Zakka et al., 2022), building our simulation platform based on MOKA (Liu et al., 2024a) as the embodied agent approach to test these embodied tasks. The VLM we used in these tasks is GPT-4o.

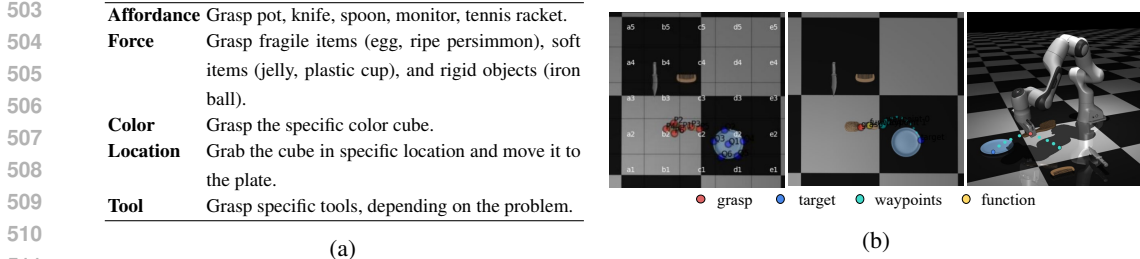


Figure 10: (a) Description of each of the testing tasks. (b) Marked observation, predicted affordances, and motion in MOKA. MOKA leverages a VLM to generate key points and waypoints, and then converts these affordance representations into executable motions for the robotic arm.

As illustrated in Figure 10(b), MOKA prompts the VLM to generate key points and additional attributes for affordance representation based on free-form language instructions and visual observations of the environment. Since the five tasks we tested were relatively basic and did not require decomposition into subtasks, we could directly invoke the VLM in a question-answering format to address the operational challenges. This approach ensures seamless compatibility between the pipelines of PhysAgent and MOKA. Once the key points and waypoints were obtained from the VLM, MOKA converted these affordance representations into executable motions for the robotic arm. To evaluate the impact of enhanced physical-world understanding on embodied tasks, we applied two methods to MOKA’s VLM: (1) fine-tuning it with PhysBench, and (2) employing PhysAgent to zero-shot assist in reasoning about affordance representations.

As shown in Figure 9(c), we observe consistent improvements after fine-tuning with a subset of PhysBench, indicating that the benchmark’s data is of high quality and suitable for use as demonstration data in open-world robotics tasks. Additionally, PhysAgent consistently yields stable zero-shot gains across all five tasks, with significant progress observed in the force task in Figure 10(a).

5 CONCLUSION

In conclusion, we introduce PhysBench, a benchmark designed to assess Vision-Language Models’ understanding of the physical world. Through experiments on 39 models, we identified significant gaps in physical world understanding, particularly in open-source models, due to inadequate training data. To address this, we developed PhysAgent, a novel framework that improves physical reasoning by 18.4% on GPT-4o. Additionally, we demonstrated the utility of our dataset and approach in robotic tasks, helping to advance the understanding of the physical world in machine intelligence.

Statement. We provide a detailed discussion of limitations, broader impacts, ethical considerations, and reproducibility in Appendix J.

REFERENCES

- 540
541
542 Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany
543 Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 technical re-
544 port: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*,
545 2024.
- 546 Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Ale-
547 man, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical
548 report. *arXiv preprint arXiv:2303.08774*, 2023.
- 549 01. AI, :, Alex Young, Bei Chen, Chao Li, Chengen Huang, Ge Zhang, Guanwei Zhang, Heng
550 Li, Jiangcheng Zhu, Jianqun Chen, Jing Chang, Kaidong Yu, Peng Liu, Qiang Liu, Shawn Yue,
551 Senbin Yang, Shiming Yang, Tao Yu, Wen Xie, Wenhao Huang, Xiaohui Hu, Xiaoyi Ren, Xinyao
552 Niu, Pengcheng Nie, Yuchi Xu, Yudong Liu, Yue Wang, Yuxuan Cai, Zhenyu Gu, Zhiyuan Liu,
553 and Zonghong Dai. Yi: Open foundation models by 01.ai, 2024.
- 554 Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel
555 Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language
556 model for few-shot learning. *Advances in neural information processing systems*, 35:23716–
557 23736, 2022.
- 558 Zahid Ali, Chesser Luke, and Carbone Timothy. Unsplash, 2023.
- 559 Anthropic. About claude models. [https://docs.anthropic.com/en/docs/
560 about-claude/models](https://docs.anthropic.com/en/docs/about-claude/models), 2024. Accessed: 2024-09-03.
- 561
562 Daman Arora, Himanshu Gaurav Singh, and Mausam. Have llms advanced enough? a challenging
563 problem solving benchmark for large language models, 2023.
- 564 Tayfun Ates, M Samil Atesoglu, Cagatay Yigit, Ilker Kesen, Mert Kobas, Erkut Erdem, Aykut
565 Erdem, Tilbe Goksun, and Deniz Yuret. Craft: A benchmark for causal reasoning about forces
566 and interactions. *arXiv preprint arXiv:2012.04293*, 2020.
- 567
568 Jinze Bai, Shuai Bai, Yunfei Chu, Zeyu Cui, Kai Dang, Xiaodong Deng, Yang Fan, Wenbin Ge,
569 Yu Han, Fei Huang, Binyuan Hui, Luo Ji, Mei Li, Junyang Lin, Runji Lin, Dayiheng Liu, Gao Liu,
570 Chengqiang Lu, Keming Lu, Jianxin Ma, Rui Men, Xingzhang Ren, Xuancheng Ren, Chuanqi
571 Tan, Sinan Tan, Jianhong Tu, Peng Wang, Shijie Wang, Wei Wang, Shengguang Wu, Benfeng
572 Xu, Jin Xu, An Yang, Hao Yang, Jian Yang, Shusheng Yang, Yang Yao, Bowen Yu, Hongyi
573 Yuan, Zheng Yuan, Jianwei Zhang, Xingxuan Zhang, Yichang Zhang, Zhenru Zhang, Chang
574 Zhou, Jingren Zhou, Xiaohuan Zhou, and Tianhang Zhu. Qwen technical report. *arXiv preprint
575 arXiv:2309.16609*, 2023a.
- 576
577 Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang
578 Zhou, and Jingren Zhou. Qwen-vl: A frontier large vision-language model with versatile abilities.
579 *arXiv preprint arXiv:2308.12966*, 2023b.
- 580 Max Bain, Arsha Nagrani, Gül Varol, and Andrew Zisserman. Frozen in time: A joint video and
581 image encoder for end-to-end retrieval. In *Proceedings of the IEEE/CVF International Conference
582 on Computer Vision*, pp. 1728–1738, 2021.
- 583 Fabien Baradel, Natalia Neverova, Julien Mille, Greg Mori, and Christian Wolf. Cophy: Counter-
584 factual learning of physical dynamics. *arXiv preprint arXiv:1909.12000*, 2019.
- 585
586 Daniel M Bear, Elias Wang, Damian Mrowca, Felix J Binder, Hsiao-Yu Fish Tung, RT Pramod,
587 Cameron Holdaway, Sirui Tao, Kevin Smith, Fan-Yun Sun, et al. Physion: Evaluating physical
588 prediction from vision in humans and machines. *arXiv preprint arXiv:2106.08261*, 2021.
- 589 Ali Furkan Biten, Ruben Tito, Andres Mafra, Lluís Gomez, Marçal Rusinol, Ernest Valveny,
590 CV Jawahar, and Dimosthenis Karatzas. Scene text visual question answering. In *Proceedings of
591 the IEEE/CVF international conference on computer vision*, pp. 4291–4301, 2019.
- 592
593 OC Blender. Blender—a 3d modelling and rendering package. *Retrieved. represents the sequence
of Constructs 1 to, 4*, 2018.

- 594 Tyler Bonnen, Stephanie Fu, Yutong Bai, Thomas O’Connell, Yoni Friedman, Nancy Kanwisher,
595 Joshua B Tenenbaum, and Alexei A Efros. Evaluating multiview object consistency in humans
596 and image models. *arXiv preprint arXiv:2409.05862*, 2024.
597
- 598 Minwoo Byeon, Beomhee Park, Haecheon Kim, Sungjun Lee, Woonhyuk Baek, and Saehoon Kim.
599 Coyo-700m: Image-text pair dataset, 2022.
600
- 601 Holger Caesar, Varun Bankiti, Alex H. Lang, Sourabh Vora, Venice Erin Liong, Qiang Xu, Anush
602 Krishnan, Yu Pan, Giancarlo Baldan, and Oscar Beijbom. nuscenes: A multimodal dataset for
603 autonomous driving. *arXiv preprint arXiv:1903.11027*, 2019.
- 604 Xu Cao, Bolin Lai, Wenqian Ye, Yunsheng Ma, Joerg Heintz, Jintai Chen, Jianguo Cao, and James M
605 Reh. What is the visual cognition gap between humans and multimodal llms? *arXiv preprint*
606 *arXiv:2406.10424*, 2024.
607
- 608 Susan Carey. The origin of concepts. *Journal of Cognition and Development*, 1(1):37–41, 2000.
609
- 610 Angel Chang, Angela Dai, Thomas Funkhouser, Maciej Halber, Matthias Niessner, Manolis Savva,
611 Shuran Song, Andy Zeng, and Yinda Zhang. Matterport3d: Learning from rgb-d data in indoor
612 environments. *arXiv preprint arXiv:1709.06158*, 2017.
- 613 Boyuan Chen, Zhuo Xu, Sean Kirmani, Brain Ichter, Dorsa Sadigh, Leonidas Guibas, and Fei Xia.
614 Spatialvlm: Endowing vision-language models with spatial reasoning capabilities. In *Proceedings*
615 *of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 14455–
616 14465, June 2024a.
- 617 Lin Chen, Jisong Li, Xiaoyi Dong, Pan Zhang, Conghui He, Jiaqi Wang, Feng Zhao, and Dahua
618 Lin. Sharegpt4v: Improving large multi-modal models with better captions. *arXiv preprint*
619 *arXiv:2311.12793*, 2023.
620
- 621 Qiguang Chen, Libo Qin, Jin Zhang, Zhi Chen, Xiao Xu, and Wanxiang Che. M³cot: A novel
622 benchmark for multi-domain multi-step multi-modal chain-of-thought, 2024b. URL <https://arxiv.org/abs/2405.16473>.
623
- 624 Zhe Chen, Weiyun Wang, Hao Tian, Shenglong Ye, Zhangwei Gao, Erfei Cui, Wenwen Tong,
625 Kongzhi Hu, Jiapeng Luo, Zheng Ma, et al. How far are we to gpt-4v? closing the gap to com-
626 mercial multimodal models with open-source suites. *arXiv preprint arXiv:2404.16821*, 2024c.
627
- 628 Zhenfang Chen, Kexin Yi, Yunzhu Li, Mingyu Ding, Antonio Torralba, Joshua B Tenenbaum, and
629 Chuang Gan. Comphy: Compositional physical reasoning of objects and events from videos.
630 *arXiv preprint arXiv:2205.01089*, 2022.
631
- 632 An-Chieh Cheng, Hongxu Yin, Yang Fu, Qiushan Guo, Ruihan Yang, Jan Kautz, Xiaolong Wang,
633 and Sifei Liu. Spatialrgpt: Grounded spatial reasoning in vision-language models. In *NeurIPS*,
634 2024.
- 635 Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng,
636 Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna: An
637 open-source chatbot impressing gpt-4 with 90%* chatgpt quality, March 2023. URL <https://lmsys.org/blog/2023-03-30-vicuna/>.
638
639
- 640 Wei Chow, Juncheng Li, Qifan Yu, Kaihang Pan, Hao Fei, Zhiqi Ge, Shuai Yang, Siliang Tang,
641 Hanwang Zhang, and Qianru Sun. Unified generative and discriminative training for multi-modal
642 large language models. *arXiv preprint arXiv:2411.00304*, 2024.
- 643 Hyung Won Chung, Le Hou, Shayne Longpre, Barret Zoph, Yi Tay, William Fedus, Yunxuan Li,
644 Xuezhi Wang, Mostafa Dehghani, Siddhartha Brahma, et al. Scaling instruction-finetuned lan-
645 guage models. *Journal of Machine Learning Research*, 25(70):1–53, 2024.
646
- 647 OpenCompass Contributors. Opencompass: A universal evaluation platform for foundation models.
GitHub repository, 2023.

- 648 Chenhang Cui, Yiyang Zhou, Xinyu Yang, Shirley Wu, Linjun Zhang, James Zou, and Huaxiu Yao.
649 Holistic analysis of hallucination in gpt-4v(ision): Bias and interference challenges, 2023. URL
650 <https://arxiv.org/abs/2311.03287>.
651
- 652 Angela Dai, Angel X Chang, Manolis Savva, Maciej Halber, Thomas Funkhouser, and Matthias
653 Nießner. Scannet: Richly-annotated 3d reconstructions of indoor scenes. In *Proceedings of the*
654 *IEEE conference on computer vision and pattern recognition*, pp. 5828–5839, 2017.
- 655 Wenliang Dai, Junnan Li, Dongxu Li, Anthony Meng Huat Tiong, Junqi Zhao, Weisheng Wang,
656 Boyang Li, Pascale N Fung, and Steven Hoi. Instructblip: Towards general-purpose vision-
657 language models with instruction tuning. *Advances in Neural Information Processing Systems*,
658 36, 2024.
- 659 Abhishek Das, Satwik Kottur, Khushi Gupta, Avi Singh, Deshraj Yadav, José MF Moura, Devi
660 Parikh, and Dhruv Batra. Visual dialog. In *Proceedings of the IEEE conference on computer*
661 *vision and pattern recognition*, pp. 326–335, 2017.
- 662 Mengfei Du, Binhao Wu, Zejun Li, Xuanjing Huang, and Zhongyu Wei. Embspatial-bench: Bench-
663 marking spatial understanding for embodied tasks with large vision-language models. *arXiv*
664 *preprint arXiv:2406.05756*, 2024.
- 665 Jiafei Duan, Samson Yu, Soujanya Poria, Bihan Wen, and Cheston Tan. Pip: Physical interaction
666 prediction via mental simulation with span selection. In *European Conference on Computer*
667 *Vision*, pp. 405–421. Springer, 2022.
- 668 Desmond Elliott, Stella Frank, Khalil Sima’an, and Lucia Specia. Multi30k: Multilingual english-
669 german image descriptions. *arXiv preprint arXiv:1605.00459*, 2016.
- 670 Taoran Fang, Wei Zhou, Yifei Sun, Kaiqiao Han, Lvbin Ma, and Yang Yang. Exploring correlations
671 of self-supervised tasks for graphs. *arXiv preprint arXiv:2405.04245*, 2024.
- 672 Yuxin Fang, Wen Wang, Binhui Xie, Quan Sun, Ledell Wu, Xinggang Wang, Tiejun Huang, Xinlong
673 Wang, and Yue Cao. Eva: Exploring the limits of masked visual representation learning at scale.
674 In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp.
675 19358–19369, 2023.
- 676 Xingyu Fu, Yushi Hu, Bangzheng Li, Yu Feng, Haoyu Wang, Xudong Lin, Dan Roth, Noah A
677 Smith, Wei-Chiu Ma, and Ranjay Krishna. Blink: Multimodal large language models can see but
678 not perceive. *arXiv preprint arXiv:2404.12390*, 2024.
- 679 Chuang Gan, Jeremy Schwartz, Seth Alter, Damian Mrowca, Martin Schrimpf, James Traer, Julian
680 De Freitas, Jonas Kubilius, Abhishek Bhandwaldar, Nick Haber, et al. Threedworld: A platform
681 for interactive multi-modal physical simulation. *arXiv preprint arXiv:2007.04954*, 2020.
- 682 Zhiqi Ge, Juncheng Li, Qifan Yu, Wei Zhou, Siliang Tang, and Yueting Zhuang. Demon24: Acm
683 mm24 demonstrative instruction following challenge. In *Proceedings of the 32nd ACM Interna-*
684 *tional Conference on Multimedia*, pp. 11426–11428, 2024.
- 685 James J Gibson. *The ecological approach to visual perception: classic edition*. Psychology press,
686 2014.
- 687 Rohit Girdhar and Deva Ramanan. Cater: A diagnostic dataset for compositional actions and tem-
688 poral reasoning. *arXiv preprint arXiv:1910.04744*, 2019.
- 689 Raghav Goyal, Samira Ebrahimi Kahou, Vincent Michalski, Joanna Materzynska, Susanne West-
690 phal, Heuna Kim, Valentin Haenel, Ingo Fruend, Peter Yianilos, Moritz Mueller-Freitag, et al.
691 The” something something” video database for learning and evaluating visual common sense. In
692 *Proceedings of the IEEE international conference on computer vision*, pp. 5842–5850, 2017a.
- 693 Yash Goyal, Tejas Khot, Douglas Summers-Stay, Dhruv Batra, and Devi Parikh. Making the v in vqa
694 matter: Elevating the role of image understanding in visual question answering. In *Proceedings*
695 *of the IEEE conference on computer vision and pattern recognition*, pp. 6904–6913, 2017b.

- 702 Kristen Grauman, Andrew Westbury, Eugene Byrne, Zachary Chavis, Antonino Furnari, Rohit Gird-
703 har, Jackson Hamburger, Hao Jiang, Miao Liu, Xingyu Liu, et al. Ego4d: Around the world in
704 3,000 hours of egocentric video. In *Proceedings of the IEEE/CVF Conference on Computer Vision
705 and Pattern Recognition*, pp. 18995–19012, 2022.
- 706
707 Vincent Le Guen and Nicolas Thome. Disentangling physical dynamics from unknown factors for
708 unsupervised video prediction. In *Proceedings of the IEEE/CVF conference on computer vision
709 and pattern recognition*, pp. 11474–11484, 2020.
- 710 Dingkun Guo, Yuqi Xiang, Shuqi Zhao, Xinghao Zhu, Masayoshi Tomizuka, Mingyu Ding, and Wei
711 Zhan. Phygrasp: Generalizing robotic grasping with physics-informed large multimodal models,
712 2024. URL <https://arxiv.org/abs/2402.16836>.
- 713
714 Agrim Gupta, Silvio Savarese, Surya Ganguli, and Li Fei-Fei. Embodied intelligence via learning
715 and evolution. *Nature communications*, 12(1):5721, 2021.
- 716 Danna Gurari, Qing Li, Abigale J Stangl, Anhong Guo, Chi Lin, Kristen Grauman, Jiebo Luo, and
717 Jeffrey P Bigham. Vizwiz grand challenge: Answering visual questions from blind people. In
718 *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 3608–3617,
719 2018.
- 720
721 John K Haas. A history of the unity game engine. *Diss. Worcester Polytechnic Institute*, 2014.
- 722
723 Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Leng Thai, Junhao Shen, Jinyi Hu,
724 Xu Han, Yujie Huang, Yuxiang Zhang, et al. Olympiadbench: A challenging benchmark for
725 promoting agi with olympiad-level bilingual multimodal scientific problems. *arXiv preprint
726 arXiv:2402.14008*, 2024.
- 727
728 Kaiming He, Xiangyu Zhang, Shaoqing Ren, and Jian Sun. Deep residual learning for image recog-
729 nition. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp.
770–778, 2016.
- 730
731 Kaiming He, Georgia Gkioxari, Piotr Dollár, and Ross Girshick. Mask r-cnn. In *Proceedings of the
732 IEEE international conference on computer vision*, pp. 2961–2969, 2017.
- 733
734 Dan Hendrycks, Collin Burns, Steven Basart, Andy Zou, Mantas Mazeika, Dawn Song, and
735 Jacob Steinhardt. Measuring massive multitask language understanding. *arXiv preprint
arXiv:2009.03300*, 2020.
- 736
737 Jinchang Hou, Chang Ao, Haihong Wu, Xiangtao Kong, Zhigang Zheng, Daijia Tang, Chengming
738 Li, Xiping Hu, Ruifeng Xu, Shiwen Ni, and Min Yang. E-eval: A comprehensive chinese k-12
739 education evaluation benchmark for large language models, 2024.
- 740
741 Wenlong Huang, Chen Wang, Ruohan Zhang, Yunzhu Li, Jiajun Wu, and Li Fei-Fei. Voxposer:
742 Composable 3d value maps for robotic manipulation with language models. *arXiv preprint
arXiv:2307.05973*, 2023a.
- 743
744 Yuzhen Huang, Yuzhuo Bai, Zhihao Zhu, Junlei Zhang, Jinghan Zhang, Tangjun Su, Junteng Liu,
745 Chuancheng Lv, Yikai Zhang, Jiayi Lei, Yao Fu, Maosong Sun, and Junxian He. C-eval: A
746 multi-level multi-discipline chinese evaluation suite for foundation models, 2023b.
- 747
748 Drew A Hudson and Christopher D Manning. Gqa: A new dataset for real-world visual reasoning
749 and compositional question answering. In *Proceedings of the IEEE/CVF conference on computer
vision and pattern recognition*, pp. 6700–6709, 2019.
- 750
751 Baoxiong Jia, Yixin Chen, Huangyue Yu, Yan Wang, Xuesong Niu, Tengyu Liu, Qing Li, and Siyuan
752 Huang. Sceneverse: Scaling 3d vision-language learning for grounded scene understanding. In
753 *European Conference on Computer Vision*, pp. 289–310. Springer, 2025.
- 754
755 Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot,
Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al.
Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.

- 756 Dongfu Jiang, Xuan He, Huaye Zeng, Cong Wei, Max W.F. Ku, Qian Liu, and Wenhui Chen. Mantis:
757 Interleaved multi-image instruction tuning. *arXiv2405.01483*, 2024.
758
- 759 Peng Jin, Ryuichi Takanobu, Caiwan Zhang, Xiaochun Cao, and Li Yuan. Chat-univi: Unified vi-
760 sual representation empowers large language models with image and video understanding. *arXiv*
761 *preprint arXiv:2311.08046*, 2023.
- 762 Justin Johnson, Bharath Hariharan, Laurens Van Der Maaten, Li Fei-Fei, C Lawrence Zitnick, and
763 Ross Girshick. Clevr: A diagnostic dataset for compositional language and elementary visual
764 reasoning. In *Proceedings of the IEEE conference on computer vision and pattern recognition*,
765 pp. 2901–2910, 2017.
- 766 Kushal Kafle and Christopher Kanan. An analysis of visual question answering algorithms. In
767 *Proceedings of the IEEE international conference on computer vision*, pp. 1965–1973, 2017.
- 768 Andrej Karpathy and Li Fei-Fei. Deep visual-semantic alignments for generating image descrip-
769 tions. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp.
770 3128–3137, 2015.
- 771 Will Kay, Joao Carreira, Karen Simonyan, Brian Zhang, Chloe Hillier, Sudheendra Vijaya-
772 narasimhan, Fabio Viola, Tim Green, Trevor Back, Paul Natsev, et al. The kinetics human action
773 video dataset. *arXiv preprint arXiv:1705.06950*, 2017.
- 774 Alexander Khazatsky, Karl Pertsch, Suraj Nair, Ashwin Balakrishna, Sudeep Dasari, Siddharth
775 Karamcheti, Soroush Nasiriany, Mohan Kumar Srirama, Lawrence Yunliang Chen, Kirsty Ellis,
776 Peter David Fagan, Joey Hejna, Masha Itkina, Marion Lepert, Yecheng Jason Ma, Patrick Tree
777 Miller, Jimmy Wu, Suneel Belkhale, Shivin Dass, Huy Ha, Arhan Jain, Abraham Lee, Young-
778 woon Lee, Marius Memmel, Sungjae Park, Ilija Radosavovic, Kaiyuan Wang, Albert Zhan, Kevin
779 Black, Cheng Chi, Kyle Beltran Hatch, Shan Lin, Jingpei Lu, Jean Mercat, Abdul Rehman, Pan-
780 nag R Sanketi, Archit Sharma, Cody Simpson, Quan Vuong, Homer Rich Walke, Blake Wulfe,
781 Ted Xiao, Jonathan Heewon Yang, Arefeh Yavary, Tony Z. Zhao, Christopher Agia, Rohan Bai-
782 jal, Mateo Guaman Castro, Daphne Chen, Qiuyu Chen, Trinity Chung, Jaimyn Drake, Ethan Paul
783 Foster, Jensen Gao, David Antonio Herrera, Minh Heo, Kyle Hsu, Jiaheng Hu, Donovan Jack-
784 son, Charlotte Le, Yunshuang Li, Kevin Lin, Roy Lin, Zehan Ma, Abhiram Maddukuri, Suvir Mir-
785 chandani, Daniel Morton, Tony Nguyen, Abigail O’Neill, Rosario Scalise, Derick Seale, Victor
786 Son, Stephen Tian, Emi Tran, Andrew E. Wang, Yilin Wu, Annie Xie, Jingyun Yang, Patrick Yin,
787 Yunchu Zhang, Osbert Bastani, Glen Berseth, Jeannette Bohg, Ken Goldberg, Abhinav Gupta,
788 Abhishek Gupta, Dinesh Jayaraman, Joseph J Lim, Jitendra Malik, Roberto Martín-Martín, Sub-
789 ramanian Ramamoorthy, Dorsa Sadigh, Shuran Song, Jiajun Wu, Michael C. Yip, Yuke Zhu,
790 Thomas Kollar, Sergey Levine, and Chelsea Finn. Droid: A large-scale in-the-wild robot manip-
791 ulation dataset. 2024.
- 792 Jihyung Kil, Zheda Mai, Justin Lee, Zihe Wang, Kerrie Cheng, Lemeng Wang, Ye Liu, Arpita
793 Chowdhury, and Wei-Lun Chao. Compbench: A comparative reasoning benchmark for multi-
794 modal llms. *arXiv preprint arXiv:2407.16837*, 2024.
- 795 Carina Kill and Ohnshim Kim. Mental mechanics: How humans reason through a physical world.
796 *Mental*, 2020.
- 797 Moo Jin Kim, Karl Pertsch, Siddharth Karamcheti, Ted Xiao, Ashwin Balakrishna, Suraj Nair,
798 Rafael Rafailov, Ethan Foster, Grace Lam, Pannag Sanketi, Quan Vuong, Thomas Kollar, Ben-
799 jamin Burchfiel, Russ Tedrake, Dorsa Sadigh, Sergey Levine, Percy Liang, and Chelsea Finn.
800 Openvla: An open-source vision-language-action model. *arXiv preprint arXiv:2406.09246*, 2024.
- 801 Alexander Kirillov, Eric Mintun, Nikhila Ravi, Hanzi Mao, Chloe Rolland, Laura Gustafson, Tete
802 Xiao, Spencer Whitehead, Alexander C Berg, Wan-Yen Lo, et al. Segment anything. In *Proceed-*
803 *ings of the IEEE/CVF International Conference on Computer Vision*, pp. 4015–4026, 2023.
- 804 Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large
805 language models are zero-shot reasoners. *Advances in neural information processing systems*,
806 35:22199–22213, 2022.
- 807
808
809

- 810 Takeshi Kojima, Shixiang Shane Gu, Machel Reid, Yutaka Matsuo, and Yusuke Iwasawa. Large
811 language models are zero-shot reasoners, 2023. URL [https://arxiv.org/abs/2205.](https://arxiv.org/abs/2205.11916)
812 11916.
- 813 Eric Kolve, Roozbeh Mottaghi, Winson Han, Eli VanderBilt, Luca Weihs, Alvaro Herrasti, Matt
814 Deitke, Kiana Ehsani, Daniel Gordon, Yuke Zhu, et al. Ai2-thor: An interactive 3d environment
815 for visual ai. *arXiv preprint arXiv:1712.05474*, 2017.
- 816 Jonathan Krause, Justin Johnson, Ranjay Krishna, and Li Fei-Fei. A hierarchical approach for
817 generating descriptive image paragraphs. In *Proceedings of the IEEE conference on computer*
818 *vision and pattern recognition*, pp. 317–325, 2017.
- 819 Zihang Lai, Senthil Purushwalkam, and Abhinav Gupta. The functional correspondence problem. In
820 *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp. 15772–15781,
821 2021.
- 822 Paul Lerner, Olivier Ferret, Camille Guinaudeau, Hervé Le Borgne, Romaric Besançon, José G
823 Moreno, and Jesús Lovón Melgarejo. Viquae, a dataset for knowledge-based visual question
824 answering about named entities. In *Proceedings of the 45th International ACM SIGIR Conference*
825 *on Research and Development in Information Retrieval*, pp. 3108–3120, 2022.
- 826 Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ra-
827 masesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, Yuhuai Wu, Behnam
828 Neyshabur, Guy Gur-Ari, and Vedant Misra. Solving quantitative reasoning problems with lan-
829 guage models, 2022.
- 830 Bohao Li, Rui Wang, Guangzhi Wang, Yuying Ge, Yixiao Ge, and Ying Shan. Seed-bench: Bench-
831 marking multimodal llms with generative comprehension. *arXiv preprint arXiv:2307.16125*,
832 2023a.
- 833 Bohao Li, Yuying Ge, Yixiao Ge, Guangzhi Wang, Rui Wang, Ruimao Zhang, and Ying Shan.
834 Seed-bench: Benchmarking multimodal large language models. In *Proceedings of the IEEE/CVF*
835 *Conference on Computer Vision and Pattern Recognition*, pp. 13299–13308, 2024a.
- 836 Feng Li, Renrui Zhang, Hao Zhang, Yuanhan Zhang, Bo Li, Wei Li, Zejun Ma, and Chunyuan Li.
837 Llava-next-interleave: Tackling multi-image, video, and 3d in large multimodal models, 2024b.
838 URL <https://arxiv.org/abs/2407.07895>.
- 839 Juncheng Li, Kaihang Pan, Zhiqi Ge, Minghe Gao, Wei Ji, Wenqiao Zhang, Tat-Seng Chua, Siliang
840 Tang, Hanwang Zhang, and Yueting Zhuang. Fine-tuning multimodal llms to follow zero-shot
841 demonstrative instructions. In *The Twelfth International Conference on Learning Representations*,
842 2023b.
- 843 Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. Blip-2: Bootstrapping language-image
844 pre-training with frozen image encoders and large language models. In *International conference*
845 *on machine learning*, pp. 19730–19742. PMLR, 2023c.
- 846 KunChang Li, Yinan He, Yi Wang, Yizhuo Li, Wenhai Wang, Ping Luo, Yali Wang, Limin Wang,
847 and Yu Qiao. Videochat: Chat-centric video understanding. *arXiv preprint arXiv:2305.06355*,
848 2023d.
- 849 Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen,
850 Ping Luo, Limin Wang, and Yu Qiao. Mvbench: A comprehensive multi-modal video under-
851 standing benchmark, 2023e.
- 852 Kunchang Li, Yali Wang, Yinan He, Yizhuo Li, Yi Wang, Yi Liu, Zun Wang, Jilan Xu, Guo Chen,
853 Ping Luo, et al. Mvbench: A comprehensive multi-modal video understanding benchmark. In
854 *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, pp.
855 22195–22206, 2024c.
- 856 Lei Li, Yuwei Yin, Shicheng Li, Liang Chen, Peiyi Wang, Shuhuai Ren, Mukai Li, Yazheng Yang,
857 Jingjing Xu, Xu Sun, Lingpeng Kong, and Qi Liu. M³it: A large-scale dataset towards multi-
858 modal multilingual instruction tuning. *arXiv preprint arXiv:2306.04387*, 2023f.
- 859
860
861
862
863

- 864 Yanwei Li, Chengyao Wang, and Jiaya Jia. Llama-vid: An image is worth 2 tokens in large language
865 models. *arXiv preprint arXiv:2311.17043*, 2023g.
- 866
- 867 Yifan Li, Yifan Du, Kun Zhou, Jinpeng Wang, Wayne Xin Zhao, and Ji-Rong Wen. Evaluating
868 object hallucination in large vision-language models. *arXiv preprint arXiv:2305.10355*, 2023h.
- 869
- 870 Yuncheng Li, Yale Song, Liangliang Cao, Joel Tetreault, Larry Goldberg, Alejandro Jaimes, and
871 Jiebo Luo. Tgif: A new dataset and benchmark on animated gif description. In *Proceedings of
872 the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 4641–4650, 2016.
- 873
- 874 Yunzhu Li, Jiajun Wu, Russ Tedrake, Joshua B Tenenbaum, and Antonio Torralba. Learning par-
875 ticle dynamics for manipulating rigid bodies, deformable objects, and fluids. *arXiv preprint
arXiv:1810.01566*, 2018.
- 876
- 877 Zekun Li, Xianjun Yang, Kyuri Choi, Wanrong Zhu, Ryan Hsieh, HyeonJung Kim, Jin Hyuk Lim,
878 Sungyoung Ji, Byungju Lee, Xifeng Yan, et al. Mmsci: A multimodal multi-discipline dataset for
phd-level scientific comprehension. *arXiv preprint arXiv:2407.04903*, 2024d.
- 879
- 880 Bin Lin, Bin Zhu, Yang Ye, Munan Ning, Peng Jin, and Li Yuan. Video-llava: Learning united
881 visual representation by alignment before projection. *arXiv preprint arXiv:2311.10122*, 2023a.
- 882
- 883 Ji Lin, Hongxu Yin, Wei Ping, Yao Lu, Pavlo Molchanov, Andrew Tao, Huizi Mao, Jan Kautz,
884 Mohammad Shoeybi, and Song Han. Vila: On pre-training for visual language models, 2023b.
- 885
- 886 Xiongkun Linghu, Jianguo Huang, Xuesong Niu, Xiaojian Ma, Baoxiong Jia, and Siyuan Huang.
887 Multi-modal situated reasoning in 3d scenes. *arXiv preprint arXiv:2409.02389*, 2024.
- 888
- 889 Fangchen Liu, Kuan Fang, Pieter Abbeel, and Sergey Levine. Moka: Open-vocabulary robotic
890 manipulation through mark-based visual prompting. *arXiv preprint arXiv:2403.03174*, 2024a.
- 891
- 892 Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction
893 tuning, 2023a.
- 894
- 895 Haotian Liu, Chunyuan Li, Yuheng Li, Bo Li, Yuanhan Zhang, Sheng Shen, and Yong Jae Lee.
896 Llava-next: Improved reasoning, ocr, and world knowledge, January 2024b. URL [https://
llava-vl.github.io/blog/2024-01-30-llava-next/](https://llava-vl.github.io/blog/2024-01-30-llava-next/).
- 897
- 898 Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances
899 in neural information processing systems*, 36, 2024c.
- 900
- 901 Junpeng Liu, Yifan Song, Bill Yuchen Lin, Wai Lam, Graham Neubig, Yuanzhi Li, and Xiang
902 Yue. Visualwebbench: How far have multimodal llms evolved in web page understanding and
903 grounding?, 2024d.
- 904
- 905 Shilong Liu, Zhaoyang Zeng, Tianhe Ren, Feng Li, Hao Zhang, Jie Yang, Chunyuan Li, Jianwei
906 Yang, Hang Su, Jun Zhu, et al. Grounding dino: Marrying dino with grounded pre-training for
907 open-set object detection. *arXiv preprint arXiv:2303.05499*, 2023b.
- 908
- 909 Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan,
910 Jiaqi Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around
911 player? *arXiv preprint arXiv:2307.06281*, 2023c.
- 912
- 913 Yuanxin Liu, Shicheng Li, Yi Liu, Yuxiang Wang, Shuhuai Ren, Lei Li, Sishuo Chen, Xu Sun,
914 and Lu Hou. Tempcompass: Do video llms really understand videos? *arXiv preprint
arXiv:2403.00476*, 2024e.
- 915
- 916 Pan Lu, Swaroop Mishra, Tanglin Xia, Liang Qiu, Kai-Wei Chang, Song-Chun Zhu, Oyvind Tafjord,
917 Peter Clark, and Ashwin Kalyan. Learn to explain: Multimodal reasoning via thought chains for
science question answering. *Advances in Neural Information Processing Systems*, 35:2507–2521,
2022.
- 918
- 919 Pan Lu, Hritik Bansal, Tony Xia, Jiacheng Liu, Chunyuan Li, Hannaneh Hajishirzi, Hao Cheng, Kai-
Wei Chang, Michel Galley, and Jianfeng Gao. Mathvista: Evaluating mathematical reasoning of
foundation models in visual contexts. In *International Conference on Learning Representations
(ICLR)*, 2024.

- 918 Ruiyuan Lyu, Tai Wang, Jingli Lin, Shuai Yang, Xiaohan Mao, Yilun Chen, Runsen Xu, Haifeng
919 Huang, Chenming Zhu, Dahua Lin, et al. Mmscan: A multi-modal 3d scene dataset with hierar-
920 chical grounded language annotations. *arXiv preprint arXiv:2406.09401*, 2024.
- 921
- 922 Xiaojian Ma, Silong Yong, Zilong Zheng, Qing Li, Yitao Liang, Song-Chun Zhu, and Siyuan Huang.
923 Sqa3d: Situated question answering in 3d scenes. In *International Conference on Learning Rep-*
924 *resentations*, 2023. URL <https://openreview.net/forum?id=IDJx97BC38>.
- 925 Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt:
926 Towards detailed video understanding via large vision and language models. *arXiv preprint*
927 *arXiv:2306.05424*, 2023a.
- 928
- 929 Muhammad Maaz, Hanoona Rasheed, Salman Khan, and Fahad Shahbaz Khan. Video-chatgpt:
930 Towards detailed video understanding via large vision and language models. *arXiv:2306.05424*,
931 2023b.
- 932 Arjun Majumdar, Anurag Ajay, Xiaohan Zhang, Pranav Putta, Sriram Yenamandra, Mikael Henaff,
933 Sneha Silwal, Paul Mcvay, Oleksandr Maksymets, Sergio Arnaud, Karmesh Yadav, Qiyang Li,
934 Ben Newman, Mohit Sharma, Vincent Berges, Shiqi Zhang, Pulkit Agrawal, Yonatan Bisk, Dhruv
935 Batra, Mrinal Kalakrishnan, Franziska Meier, Chris Paxton, Sasha Sax, and Aravind Rajeswaran.
936 Openeqa: Embodied question answering in the era of foundation models. In *Conference on*
937 *Computer Vision and Pattern Recognition (CVPR)*, 2024.
- 938 Karttikeya Mangalam, Raiymbek Akshulakov, and Jitendra Malik. Egoschema: A diagnostic bench-
939 mark for very long-form video language understanding. *Advances in Neural Information Process-*
940 *ing Systems*, 36, 2024.
- 941
- 942 Kenneth Marino, Mohammad Rastegari, Ali Farhadi, and Roozbeh Mottaghi. Ok-vqa: A visual
943 question answering benchmark requiring external knowledge. In *Conference on Computer Vision*
944 *and Pattern Recognition (CVPR)*, 2019.
- 945 Minesh Mathew, Dimosthenis Karatzas, and CV Jawahar. Docvqa: A dataset for vqa on document
946 images. In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*,
947 pp. 2200–2209, 2021.
- 948
- 949 Michael McCloskey, Allyson Washburn, and Linda Felch. Intuitive physics: the straight-down belief
950 and its origin. *Journal of Experimental Psychology: Learning, Memory, and Cognition*, 9(4):636,
951 1983.
- 952 Fanqing Meng, Jin Wang, Chuanhao Li, Quanfeng Lu, Hao Tian, Jiaqi Liao, Xizhou Zhu, Jifeng
953 Dai, Yu Qiao, Ping Luo, Kaipeng Zhang, and Wenqi Shao. Mmiu: Multimodal multi-image
954 understanding for evaluating large vision-language models, 2024. URL <https://arxiv.org/abs/2408.02718>.
- 955
- 956 Antoine Miech, Dimitri Zhukov, Jean-Baptiste Alayrac, Makarand Tapaswi, Ivan Laptev, and Josef
957 Sivic. Howto100m: Learning a text-video embedding by watching hundred million narrated
958 video clips. In *Proceedings of the IEEE/CVF international conference on computer vision*, pp.
959 2630–2640, 2019.
- 960
- 961 Anand Mishra, Shashank Shekhar, Ajeet Kumar Singh, and Anirban Chakraborty. Ocr-vqa: Visual
962 question answering by reading text in images. In *2019 international conference on document*
963 *analysis and recognition (ICDAR)*, pp. 947–952. IEEE, 2019.
- 964
- 965 Soroush Nasiriany, Fei Xia, Wenhao Yu, Ted Xiao, Jacky Liang, Ishita Dasgupta, Annie Xie, Danny
966 Driess, Ayzaan Wahid, Zhuo Xu, Quan Vuong, Tingnan Zhang, Tsang-Wei Edward Lee, Kuang-
967 Huei Lee, Peng Xu, Sean Kirmani, Yuke Zhu, Andy Zeng, Karol Hausman, Nicolas Heess,
968 Chelsea Finn, Sergey Levine, and Brian Ichter. Pivot: Iterative visual prompting elicits actionable
969 knowledge for vlms. 2024.
- 970 Dantong Niu, Yuvan Sharma, Giscard Biamby, Jerome Quenum, Yutong Bai, Baifeng Shi, Trevor
971 Darrell, and Roei Herzig. Llarva: Vision-action instruction tuning enhances robot learning. *arXiv*
preprint arXiv:2406.11815, 2024.

- 972 Octo Model Team, Dibya Ghosh, Homer Walke, Karl Pertsch, Kevin Black, Oier Mees, Sudeep
973 Dasari, Joey Hejna, Charles Xu, Jianlan Luo, Tobias Kreiman, You Liang Tan, Lawrence Yunliang
974 Chen, Pannag Sanketi, Quan Vuong, Ted Xiao, Dorsa Sadigh, Chelsea Finn, and Sergey Levine.
975 Octo: An open-source generalist robot policy. In *Proceedings of Robotics: Science and Systems*,
976 Delft, Netherlands, 2024.
- 977 Kaihang Pan, Siliang Tang, Juncheng Li, Zhaoyu Fan, Wei Chow, Shuicheng Yan, Tat-Seng Chua,
978 Yueting Zhuang, and Hanwang Zhang. Auto-encoding morph-tokens for multimodal llm. *arXiv*
979 *preprint arXiv:2405.01926*, 2024.
- 981 Maitreya Patel, Tejas Gokhale, Chitta Baral, and Yezhou Yang. Cripp-vqa: Counterfactual
982 reasoning about implicit physical properties via video question answering. *arXiv preprint*
983 *arXiv:2211.03779*, 2022.
- 984 Zhiliang Peng, Wenhui Wang, Li Dong, Yaru Hao, Shaohan Huang, Shuming Ma, and Furu Wei.
985 Kosmos-2: Grounding multimodal large language models to the world. *ArXiv*, abs/2306.14824,
986 2023. URL <https://api.semanticscholar.org/CorpusID:259262263>.
- 988 Charles R Qi, Hao Su, Kaichun Mo, and Leonidas J Guibas. Pointnet: Deep learning on point sets
989 for 3d classification and segmentation. In *Proceedings of the IEEE conference on computer vision*
990 *and pattern recognition*, pp. 652–660, 2017.
- 992 Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal,
993 Girish Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual
994 models from natural language supervision. In *International conference on machine learning*, pp.
995 8748–8763. PMLR, 2021.
- 996 Nazneen Fatema Rajani, Rui Zhang, Yi Chern Tan, Stephan Zheng, Jeremy Weiss, Aadit Vyas, Ab-
997 hijit Gupta, Caiming Xiong, Richard Socher, and Dragomir Radev. Esprit: Explaining solutions
998 to physical reasoning tasks. *arXiv preprint arXiv:2005.00730*, 2020.
- 1000 Tianhe Ren, Shilong Liu, Ailing Zeng, Jing Lin, Kunchang Li, He Cao, Jiayu Chen, Xinyu Huang,
1001 Yukang Chen, Feng Yan, et al. Grounded sam: Assembling open-world models for diverse visual
1002 tasks. *arXiv preprint arXiv:2401.14159*, 2024.
- 1003 Ronan Riochet, Mario Ynocente Castro, Mathieu Bernard, Adam Lerer, Rob Fergus, Véronique
1004 Izard, and Emmanuel Dupoux. Intphys: A framework and benchmark for visual intuitive physics
1005 reasoning. *arXiv preprint arXiv:1803.07616*, 2018.
- 1007 Paul-Edouard Sarlin, Daniel DeTone, Tomasz Malisiewicz, and Andrew Rabinovich. Superglue:
1008 Learning feature matching with graph neural networks. In *Proceedings of the IEEE/CVF confer-*
1009 *ence on computer vision and pattern recognition*, pp. 4938–4947, 2020.
- 1010 Piyush Sharma, Nan Ding, Sebastian Goodman, and Radu Soricut. Conceptual captions: A cleaned,
1011 hypernymed, image alt-text dataset for automatic image captioning. In *Proceedings of ACL*, 2018.
- 1013 Oleksii Sidorov, Ronghang Hu, Marcus Rohrbach, and Amanpreet Singh. Textcaps: a dataset for
1014 image captioning with reading comprehension. In *Computer Vision—ECCV 2020: 16th European*
1015 *Conference, Glasgow, UK, August 23–28, 2020, Proceedings, Part II 16*, pp. 742–758. Springer,
1016 2020.
- 1017 Karen Simonyan and Andrew Zisserman. Very deep convolutional networks for large-scale image
1018 recognition. *arXiv preprint arXiv:1409.1556*, 2014.
- 1020 Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh,
1021 and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF*
1022 *conference on computer vision and pattern recognition*, pp. 8317–8326, 2019.
- 1024 Noah Snavely, Steven M. Seitz, and Richard Szeliski. Photo tourism: Exploring photo collections
1025 in 3d. In *SIGGRAPH Conference Proceedings*, pp. 835–846, New York, NY, USA, 2006. ACM
Press. ISBN 1-59593-364-6.

- 1026 Sanjana Srivastava, Chengshu Li, Michael Lingelbach, Roberto Martín-Martín, Fei Xia, Kent
1027 Vainio, Zheng Lian, Cem Gokmen, Shyamal Buch, Karen Liu, Silvio Savarese, Hyowon Gweon,
1028 Jiajun Wu, and Li Fei-Fei. Behavior: Benchmark for everyday household activities in virtual,
1029 interactive, and ecological environments. In *Conference in Robot Learning (CoRL)*, pp. accepted,
1030 2021.
- 1031 Alane Suhr, Mike Lewis, James Yeh, and Yoav Artzi. A corpus of natural language for visual
1032 reasoning. In *Proceedings of the 55th Annual Meeting of the Association for Computational
1033 Linguistics (Volume 2: Short Papers)*, pp. 217–223, 2017.
- 1034 Alane Suhr, Stephanie Zhou, Ally Zhang, Iris Zhang, Huajun Bai, and Yoav Artzi. A corpus for
1035 reasoning about natural language grounded in photographs. *arXiv preprint arXiv:1811.00491*,
1036 2018.
- 1037 Deborah Sulsky, Shi-Jian Zhou, and Howard L Schreyer. Application of a particle-in-cell method to
1038 solid mechanics. *Computer physics communications*, 87(1-2):236–252, 1995.
- 1039 Dídac Surís, Sachit Menon, and Carl Vondrick. Vipergpt: Visual inference via python execution for
1040 reasoning. In *Proceedings of the IEEE/CVF International Conference on Computer Vision*, pp.
1041 11888–11898, 2023.
- 1042 Ryota Tanaka, Kyosuke Nishida, and Sen Yoshida. Visualmrc: Machine reading comprehension on
1043 document images. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 35,
1044 pp. 13878–13888, 2021.
- 1045 Gemini Team, Rohan Anil, Sebastian Borgeaud, Yonghui Wu, Jean-Baptiste Alayrac, Jiahui Yu,
1046 Radu Soricut, Johan Schalkwyk, Andrew M Dai, Anja Hauth, et al. Gemini: a family of highly
1047 capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
- 1048 Emanuel Todorov, Tom Erez, and Yuval Tassa. Mujoco: A physics engine for model-based control.
1049 In *2012 IEEE/RSJ international conference on intelligent robots and systems*, pp. 5026–5033.
1050 IEEE, 2012.
- 1051 Shengbang Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Manoj Middepogu, Sai Charitha
1052 Akula, Jihan Yang, Shusheng Yang, Adithya Iyer, Xichen Pan, Austin Wang, Rob Fergus, Yann
1053 LeCun, and Saining Xie. Cambrian-1: A fully open, vision-centric exploration of multimodal
1054 llms. *arXiv preprint arXiv:2406.16860*, 2024.
- 1055 Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée
1056 Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and
1057 efficient foundation language models. *arXiv preprint arXiv:2302.13971*, 2023.
- 1058 Fish Tung, Mingyu Ding, Zhenfang Chen, Daniel M. Bear, Chuang Gan, Joshua B. Tenenbaum,
1059 Daniel L. K. Yamins, Judith Fan, and Kevin A. Smith. Physion++: Evaluating physical scene
1060 understanding that requires online inference of different physical properties. *arXiv*, 2023.
- 1061 Andong Wang, Bo Wu, Sunli Chen, Zhenfang Chen, Haotian Guan, Wei-Ning Lee, Li Erran Li, and
1062 Chuang Gan. Sok-bench: A situated video reasoning benchmark with aligned open-world knowl-
1063 edge. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*,
1064 pp. 13384–13394, 2024a.
- 1065 Chen Wang, Linxi Fan, Jiankai Sun, Ruohan Zhang, Li Fei-Fei, Danfei Xu, Yuke Zhu, and An-
1066 ima Anandkumar. Mimicplay: Long-horizon imitation learning by watching human play. *arXiv
1067 preprint arXiv:2302.12422*, 2023a.
- 1068 Fei Wang, Xingyu Fu, James Y Huang, Zekun Li, Qin Liu, Xiaogeng Liu, Mingyu Derek Ma,
1069 Nan Xu, Wenxuan Zhou, Kai Zhang, et al. Muirbench: A comprehensive benchmark for robust
1070 multi-image understanding. *arXiv preprint arXiv:2406.09411*, 2024b.
- 1071 Tai Wang, Xiaohan Mao, Chenming Zhu, Runsen Xu, Ruiyuan Lyu, Peisen Li, Xiao Chen, Wenwei
1072 Zhang, Kai Chen, Tianfan Xue, Xihui Liu, Cewu Lu, Dahua Lin, and Jiangmiao Pang. Embod-
1073 edscan: A holistic multi-modal 3d perception suite towards embodied ai. In *IEEE Conference on
1074 Computer Vision and Pattern Recognition (CVPR)*, 2024c.

- 1080 Weihan Wang, Qingsong Lv, Wenmeng Yu, Wenyi Hong, Ji Qi, Yan Wang, Junhui Ji, Zhuoyi Yang,
1081 Lei Zhao, Xixuan Song, et al. Cogvlm: Visual expert for pretrained language models. *arXiv*
1082 *preprint arXiv:2311.03079*, 2023b.
1083
- 1084 Xiaoxuan Wang, Ziniu Hu, Pan Lu, Yanqiao Zhu, Jieyu Zhang, Satyen Subramaniam, Arjun R.
1085 Loomba, Shichang Zhang, Yizhou Sun, and Wei Wang. Scibench: Evaluating college-level sci-
1086 entific problem-solving abilities of large language models, 2024d.
- 1087 Xingrui Wang, Wufei Ma, Angtian Wang, Shuo Chen, Adam Kortylewski, and Alan Yuille. Compo-
1088 sitional 4d dynamic scenes understanding with physics priors for video question answering. *arXiv*
1089 *preprint arXiv:2406.00622*, 2024e.
1090
- 1091 Yi Ru Wang, Jiafei Duan, Dieter Fox, and Siddhartha Srinivasa. Newton: Are large language models
1092 capable of physical reasoning? *arXiv preprint arXiv:2310.07018*, 2023c.
1093
- 1094 Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du,
1095 Andrew M Dai, and Quoc V Le. Finetuned language models are zero-shot learners. *arXiv preprint*
1096 *arXiv:2109.01652*, 2021.
- 1097 Johannes Welbl, Nelson F. Liu, and Matt Gardner. Crowdsourcing multiple choice science ques-
1098 tions. In Leon Derczynski, Wei Xu, Alan Ritter, and Tim Baldwin (eds.), *Proceedings of*
1099 *the 3rd Workshop on Noisy User-generated Text*, pp. 94–106, Copenhagen, Denmark, September
1100 2017. Association for Computational Linguistics. doi: 10.18653/v1/W17-4413. URL
1101 <https://aclanthology.org/W17-4413>.
- 1102 Bo Wu, Shoubin Yu, Zhenfang Chen, Joshua B Tenenbaum, and Chuang Gan. Star: A benchmark
1103 for situated reasoning in real-world videos. *arXiv preprint arXiv:2405.09711*, 2024a.
1104
- 1105 Haoning Wu, Zicheng Zhang, Erli Zhang, Chaofeng Chen, Liang Liao, Annan Wang, Chunyi Li,
1106 Wenxiu Sun, Qiong Yan, Guangtao Zhai, et al. Q-bench: A benchmark for general-purpose
1107 foundation models on low-level vision. *arXiv preprint arXiv:2309.14181*, 2023a.
1108
- 1109 Haoning Wu, Dongxu Li, Bei Chen, and Junnan Li. Longvideobench: A benchmark for long-context
1110 interleaved video-language understanding. *arXiv preprint arXiv:2407.15754*, 2024b.
- 1111 Jiajun Wu, Joseph J Lim, Hongyi Zhang, Joshua B Tenenbaum, and William T Freeman. Physics
1112 101: Learning physical object properties from unlabeled videos. In *BMVC*, volume 2, pp. 7,
1113 2016.
1114
- 1115 Qiucheng Wu, Handong Zhao, Michael Saxon, Trung Bui, William Yang Wang, Yang Zhang, and
1116 Shiyu Chang. Vsp: Assessing the dual challenges of perception and reasoning in spatial planning
1117 tasks for vlms. *arXiv preprint arXiv:2407.01863*, 2024c.
- 1118 Shengqiong Wu, Hao Fei, Leigang Qu, Wei Ji, and Tat-Seng Chua. Next-gpt: Any-to-any multi-
1119 modal llm. *ArXiv*, abs/2309.05519, 2023b. URL [https://api.semanticscholar.org/](https://api.semanticscholar.org/CorpusID:261696650)
1120 [CorpusID:261696650](https://api.semanticscholar.org/CorpusID:261696650).
1121
- 1122 Weijia Wu, Yuzhong Zhao, Zhuang Li, Jiahong Li, Hong Zhou, Mike Zheng Shou, and Xiang
1123 Bai. A large cross-modal video retrieval dataset with reading comprehension. *arXiv preprint*
1124 *arXiv:2305.03347*, 2023c.
1125
- 1126 Yifan Wu, Pengchuan Zhang, Wenhan Xiong, Barlas Oguz, James C. Gee, and Yixin Nie. The
1127 role of chain-of-thought in complex vision-language reasoning task, 2023d. URL [https://](https://arxiv.org/abs/2311.09193)
1128 arxiv.org/abs/2311.09193.
- 1129 Yuxin Wu, Alexander Kirillov, Francisco Massa, Wan-Yen Lo, and Ross Girshick. Detectron2.
1130 <https://github.com/facebookresearch/detectron2>, 2019.
1131
- 1132 Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-
1133 answering to explaining temporal actions. In *Proceedings of the IEEE/CVF conference on com-
puter vision and pattern recognition*, pp. 9777–9786, 2021a.

- 1134 Junbin Xiao, Xindi Shang, Angela Yao, and Tat-Seng Chua. Next-qa: Next phase of question-
1135 answering to explaining temporal actions. In *Proceedings of the IEEE/CVF conference on com-
1136 puter vision and pattern recognition*, pp. 9777–9786, 2021b.
- 1137 Binzhu Xie, Sicheng Zhang, Zitang Zhou, Bo Li, Yuanhan Zhang, Jack Hessel, Jingkang Yang, and
1138 Ziwei Liu. Funqa: Towards surprising video comprehension. *arXiv preprint arXiv:2306.14899*,
1139 2023.
- 1140 Dejing Xu, Zhou Zhao, Jun Xiao, Fei Wu, Hanwang Zhang, Xiangnan He, and Yueting Zhuang.
1141 Video question answering via gradually refined attention over appearance and motion. In *Pro-
1142 ceedings of the 25th ACM international conference on Multimedia*, pp. 1645–1653, 2017.
- 1143 Jun Xu, Tao Mei, Ting Yao, and Yong Rui. Msr-vtt: A large video description dataset for bridging
1144 video and language. In *Proceedings of the IEEE conference on computer vision and pattern
1145 recognition*, pp. 5288–5296, 2016.
- 1146 Lin Xu, Yilin Zhao, Daquan Zhou, Zhijie Lin, See Kiong Ng, and Jiashi Feng. Pllava : Parameter-
1147 free llava extension from images to videos for video dense captioning, 2024.
- 1148 Antoine Yang, Antoine Miech, Josef Sivic, Ivan Laptev, and Cordelia Schmid. Just ask: Learning to
1149 answer questions from millions of narrated videos. In *Proceedings of the IEEE/CVF international
1150 conference on computer vision*, pp. 1686–1697, 2021.
- 1151 Lihe Yang, Bingyi Kang, Zilong Huang, Zhen Zhao, Xiaogang Xu, Jiashi Feng, and Hengshuang
1152 Zhao. Depth anything v2. *arXiv:2406.09414*, 2024.
- 1153 Kexin Yi, Chuang Gan, Yunzhu Li, Pushmeet Kohli, Jiajun Wu, Antonio Torralba, and Joshua B
1154 Tenenbaum. Clevrer: Collision events for video representation and reasoning. *arXiv preprint
1155 arXiv:1910.01442*, 2019.
- 1156 Shukang Yin, Chaoyou Fu, Sirui Zhao, Ke Li, Xing Sun, Tong Xu, and Enhong Chen. A survey on
1157 multimodal large language models. *arXiv preprint arXiv:2306.13549*, 2023.
- 1158 Kaining Ying, Fanqing Meng, Jin Wang, Zhiqian Li, Han Lin, Yue Yang, Hao Zhang, Wenbo Zhang,
1159 Yuqi Lin, Shuo Liu, Jiayi Lei, Quanfeng Lu, Runjian Chen, Peng Xu, Renrui Zhang, Haozhe
1160 Zhang, Peng Gao, Yali Wang, Yu Qiao, Ping Luo, Kaipeng Zhang, and Wenqi Shao. Mmt-bench:
1161 A comprehensive multimodal benchmark for evaluating large vision-language models towards
1162 multitask agi, 2024.
- 1163 Qifan Yu, Juncheng Li, Yu Wu, Siliang Tang, Wei Ji, and Yueting Zhuang. Visually-prompted
1164 language model for fine-grained scene graph generation in an open world. In *Proceedings of the
1165 IEEE/CVF International Conference on Computer Vision*, pp. 21560–21571, 2023a.
- 1166 Qifan Yu, Juncheng Li, Longhui Wei, Liang Pang, Wentao Ye, Bosheng Qin, Siliang Tang, Qi Tian,
1167 and Yueting Zhuang. Hallucidoctor: Mitigating hallucinatory toxicity in visual instruction data.
1168 In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2024.
- 1169 Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang,
1170 and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv
1171 preprint arXiv:2308.02490*, 2023b.
- 1172 Zhou Yu, Dejing Xu, Jun Yu, Ting Yu, Zhou Zhao, Yueting Zhuang, and Dacheng Tao. Activitynet-
1173 qa: A dataset for understanding complex web videos via question answering. In *Proceedings of
1174 the AAAI Conference on Artificial Intelligence*, volume 33, pp. 9127–9134, 2019.
- 1175 Shenghai Yuan, Jinfa Huang, Yongqi Xu, Yaoyang Liu, Shaofeng Zhang, Yujun Shi, Ruijie Zhu,
1176 Xinhua Cheng, Jiebo Luo, and Li Yuan. Chronomagic-bench: A benchmark for metamorphic
1177 evaluation of text-to-time-lapse video generation. *arXiv preprint arXiv:2406.18522*, 2024.
- 1178 Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens,
1179 Dongfu Jiang, Weiming Ren, Yuxuan Sun, Cong Wei, Botao Yu, Ruibin Yuan, Renliang Sun,
1180 Ming Yin, Boyuan Zheng, Zhenzhu Yang, Yibo Liu, Wenhao Huang, Huan Sun, Yu Su, and
1181 Wenhao Chen. Mmmu: A massive multi-discipline multimodal understanding and reasoning
1182 benchmark for expert agi. In *Proceedings of CVPR*, 2024.

- 1188 Kevin Zakka, Yuval Tassa, and MuJoCo Menagerie Contributors. MuJoCo Menagerie: A col-
1189 lection of high-quality simulation models for MuJoCo, 2022. URL [http://github.com/
1190 google-deepmind/mujoco_menagerie](http://github.com/google-deepmind/mujoco_menagerie).
- 1191
1192 Michał Zawalski, William Chen, Karl Pertsch, Oier Mees, Chelsea Finn, and Sergey Levine. Robotic
1193 control via embodied chain-of-thought reasoning. *arXiv preprint arXiv:2407.08693*, 2024.
- 1194 Jun Zhan, Junqi Dai, Jiasheng Ye, Yunhua Zhou, Dong Zhang, Zhigeng Liu, Xin Zhang,
1195 Ruibin Yuan, Ge Zhang, Linyang Li, Hang Yan, Jie Fu, Tao Gui, Tianxiang Sun, Yu-
1196 gang Jiang, and Xipeng Qiu. Anygpt: Unified multimodal llm with discrete sequence mod-
1197 eling. *ArXiv*, abs/2402.12226, 2024. URL [https://api.semanticscholar.org/
1198 CorpusID:267750101](https://api.semanticscholar.org/CorpusID:267750101).
- 1199 Hang Zhang, Xin Li, and Lidong Bing. Video-llama: An instruction-tuned audio-visual lan-
1200 guage model for video understanding. *arXiv preprint arXiv:2306.02858*, 2023. URL [https:
1201 //arxiv.org/abs/2306.02858](https://arxiv.org/abs/2306.02858).
- 1202
1203 Jieyu Zhang, Weikai Huang, Zixian Ma, Oscar Michel, Dong He, Tanmay Gupta, Wei-Chiu Ma,
1204 Ali Farhadi, Aniruddha Kembhavi, and Ranjay Krishna. Task me anything. *arXiv preprint
1205 arXiv:2406.11775*, 2024a.
- 1206 Yuanhan Zhang, Bo Li, haotian Liu, Yong jae Lee, Liangke Gui, Di Fu, Jiashi Feng, Ziwei Liu, and
1207 Chunyuan Li. Llava-next: A strong zero-shot video understanding model, April 2024b. URL
1208 <https://llava-vl.github.io/blog/2024-04-30-llava-next-video/>.
- 1209
1210 Haoyu Zhen, Xiaowen Qiu, Peihao Chen, Jincheng Yang, Xin Yan, Yilun Du, Yining Hong,
1211 and Chuang Gan. 3d-vla: 3d vision-language-action generative world model. *arXiv preprint
1212 arXiv:2403.09631*, 2024.
- 1213 Zhicheng Zheng, Xin Yan, Zhenfang Chen, Jingzhou Wang, Qin Zhi Eddie Lim, Joshua B Tenen-
1214 baum, and Chuang Gan. Contphy: Continuum physical concept learning and reasoning from
1215 videos. In *International Conference on Machine Learning*. PMLR, 2024.
- 1216
1217 Junjie Zhou, Yan Shu, Bo Zhao, Boya Wu, Shitao Xiao, Xi Yang, Yongping Xiong, Bo Zhang,
1218 Tiejun Huang, and Zheng Liu. Mlvu: A comprehensive benchmark for multi-task long video
1219 understanding. *arXiv preprint arXiv:2406.04264*, 2024.
- 1220 Luowei Zhou, Chenliang Xu, and Jason Corso. Towards automatic learning of procedures from web
1221 instructional videos. In *Proceedings of the AAAI Conference on Artificial Intelligence*, 2018.
- 1222
1223 Shuyan Zhou, Frank F Xu, Hao Zhu, Xuhui Zhou, Robert Lo, Abishek Sridhar, Xianyi Cheng,
1224 Yonatan Bisk, Daniel Fried, Uri Alon, et al. Webarena: A realistic web environment for building
1225 autonomous agents. *arXiv preprint arXiv:2307.13854*, 2023.
- 1226 Wanrong Zhu, Jack Hessel, Anas Awadalla, Samir Yitzhak Gadre, Jesse Dodge, Alex Fang, Young-
1227 jae Yu, Ludwig Schmidt, William Yang Wang, and Yejin Choi. Multimodal c4: An open, billion-
1228 scale corpus of images interleaved with text. *Advances in Neural Information Processing Systems*,
1229 36, 2024.
- 1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241

1242	CONTENTS	
1243		
1244	A Detailed Dataset Collection Process	26
1245	A.1 Simulation	26
1246	A.2 Web	26
1247	A.3 Real-world	27
1248		
1249		
1250	B Data Annotation Protocol	27
1251	B.1 General Guidelines	27
1252	B.2 Data Format and Structure	28
1253	B.3 Quality Control and Validation	28
1254	B.4 Handling Ambiguities	29
1255	B.5 Ethical Considerations	29
1256	B.6 Data Contamination Considerations	29
1257	B.7 Annotation Platform	29
1258	B.8 Benchmark Preparation and Release	29
1259	B.9 More Details of the Annotation Pipeline	30
1260		
1261		
1262	C Detailed Task Description	31
1263	C.1 Ability Description	31
1264	C.2 Physical Object Property Sub-task	31
1265	C.3 Physical Object Relationships Sub-task	32
1266	C.4 Physical Scene Understanding Sub-task	32
1267	C.5 Physics-based Dynamics Sub-task	33
1268		
1269		
1270		
1271	D More Dataset Analysis	34
1272	D.1 Global Statics	34
1273	D.2 Word Statics and Word Cloud	35
1274		
1275	E More Details on the Setup	37
1276	E.1 Prompt for LLMs	37
1277	E.2 3D Assets	39
1278	E.3 Model Hyperparameters	39
1279	E.3.1 Image VLM	39
1280	E.3.2 Video VLM	41
1281	E.3.3 General VLM	42
1282	E.4 Prompt for VLM test	43
1283	E.5 Reference Datasets Summary	44
1284	E.6 Prompt Strategies	44
1285	E.7 ViperGPT Implementation	45
1286	E.8 Human Performance	46
1287		
1288		
1289		
1290	F More Experiments Results	46
1291		
1292		
1293		
1294		
1295		

1296	F.1	GroundingDINO Configuration	46
1297	F.2	Effect of Visual Prompting	47
1298	F.3	More PhysBench Results	48
1299	F.4	PhysBench-val Results	54
1300	F.5	Embodied Tasks Detailed Description	55
1301	F.6	Correlation Map	56
1302	F.7	Performance on Related Benchmarks	57
1303	F.8	Comparison with other VLA Models	58
1304	F.9	Details for Figure 9(a)	58
1305			
1306			
1307			
1308			
1309	G	More Related Works	60
1310			
1311	H	More Examples	62
1312	H.1	Physical Object Property Sub-task	62
1313	H.2	Physical Object Relationships Sub-task	62
1314	H.3	Physical Scene Understanding Sub-task	62
1315	H.4	Physics-based Dynamics Sub-task	62
1316			
1317			
1318			
1319	I	Error Study	76
1320	I.1	Detailed Statics	76
1321	I.2	Main Reason Analysis	76
1322	I.3	Case Study	76
1323			
1324			
1325	J	Discussion and Statement	138
1326	J.1	Limitation	138
1327	J.2	Boarder Impact	138
1328	J.3	Ethics Statement	139
1329	J.4	Reproducibility Statement	139
1330			
1331			
1332			
1333			
1334			
1335			
1336			
1337			
1338			
1339			
1340			
1341			
1342			
1343			
1344			
1345			
1346			
1347			
1348			
1349			

A DETAILED DATASET COLLECTION PROCESS

A.1 SIMULATION

We use (Blender, 2018) as our simulation platform. We utilized 679 objects and 470 HDR images to generate simulated videos and images. During each simulation, we concurrently save images or videos of depth, normal, and albedo, as well as the corresponding configuration files, which include the position, angle, movement, and other properties of the object light source.

Image generation. In addition to ambient lighting, we employed two point lights and one sunlight. To ensure data diversity, the positions of the camera and the arrangement of objects (ensuring no overlap and that all objects are captured by the camera) were randomized to some extent. Drawing from the object attribute annotation methods described in Newton (Wang et al., 2023c), we cleaned and re-annotated our data to develop a comprehensive table of objects and their attributes. Utilizing this table, we delineate the relational semantics between different objects and the corresponding queries. Following the approach in BLINK (Fu et al., 2024), each object in the simulated images is demarcated with a bounding box rather than being explicitly mentioned in the text, thereby enhancing the evaluation of the model’s image comprehension capabilities.

Despite imposing considerable constraints on our code and meticulously annotating the 3D assets, there remains the possibility of minor object overlaps or incomplete captures of objects by the camera. To ensure that objects in the data are clearly identifiable, we employed GroundingDINO (Liu et al., 2023b) for detection. We only accept images where the labels detected by GroundingDINO match exactly in content and quantity with the generated labels. This process also provides us with the bounding boxes of objects for subsequent annotation. During the later stages of annotation, manual inspection of the images is conducted to ensure accuracy. To improve the detection success rate of GroundingDINO and reduce the probability of false detections, we set the `box_threshold` to 0.2 and the `text_threshold` to 0.2. Specifically, these parameter settings were obtained through a grid search, with detailed results presented in Table 13.

Videos with varying lighting conditions. We used only one point light source and arranged objects on a plane to render shadows. The variations in lighting include three aspects: the color of the light, the position of the light source, and the intensity of the light. In terms of the light source position, the movement involves translations along the x, y, and z axes. To avoid ambiguity in lateral directions (Du et al., 2024), during the dataset generation, the movement questions are typically framed in terms of moving along the line connecting two objects rather than simply asking for the direction of movement.

Videos with varying camera conditions. We used the same lighting and other configurations as in the image generation process. During video recording, we randomly altered the camera’s position or shooting angle to capture the videos.

Fulid. We used assets from ContPhy (Zheng et al., 2024) and Unity (Haas, 2014) to generate videos across four types: fluid, rope, cloth, and ball, with 350, 250, 200, and 200 videos respectively. The videos were then manually annotated.

A.2 WEB

For web data collection, we primarily use predefined topics (e.g., gases) to retrieve relevant videos or images from the internet (such as middle school physics experiments). After filtering and cleaning the data, we proceed with annotation. Additionally, we leverage large language models (LLMs) to generate suitable descriptions of physics-related concepts, which we then use to search for corresponding videos, followed by further cleaning and annotation.

In addition to the network data collection process described in Section 3.2, we employ the following methods to gather data.

Unsplash. We use high-quality and high-resolution images from Unsplash Ali et al. (2023). 57,859 images are downloaded, and finally we use only about 6,000 images.

Manipulation. We sampled approximately 500 videos from DROID (Khazatsky et al., 2024), Ego4D (Grauman et al., 2022), and MimicPlay (Wang et al., 2023a), providing detailed annotations to generate QA pairs categorized under object-manipulation tasks. The primary focus of these questions is to determine the appropriate sequence of actions based on given instructions, which are derived from the original datasets’ descriptions of actions. Figure 42’s both first and second examples provide an example of this task. First, we filtered the videos to select those with a strong alignment between the instructions and the visuals, ensuring that the videos were clear, unambiguous, and matched the instructions well. Next, we identified 3-4 keyframes from these videos. The task involved sorting these key frames in the correct order to execute the instructions properly. Additionally, we used FunKPoint (Lai et al., 2021) to annotate the affordance (Gibson, 2014) points in individual images from the original dataset. Specific examples of these annotations can be found in Figure 42’s third and fourth examples.

nuScenes. We cropped and annotated videos from the nuScenes (Caesar et al., 2019) mini and test datasets, ultimately obtaining 1,356 QA pairs for spatial movement tasks. We categorized the questions into types such as left turn, straight, and right turn, and included arrows on the images to indicate the direction. The questions asked participants to identify which image they might see based on the indicated direction, as illustrated in Figure 28.

Visual Prompt. In certain tasks, we utilized Visual Prompts (Fu et al., 2024), and through experimentation, we identified an alternative annotation method, detailed in Appendix F.2. For tasks using Visual Prompts, we set the image size to 1024×1024 pixels. In this scale, we standardized the Visual Prompt to a red circle with a 30-pixel radius and white text options with a font size of 65 pixels. The positions of the options’ centers in the dataset are recorded in the following format:

```
"A": [ 734, 922 ], "B": [ 202, 898 ], "C": [ 343, 115 ], "D": [ 410, 559 ]
```

Visual Correspondences. Drawing inspiration from Fu et al. (2024); Sarlin et al. (2020), we also annotated a portion of the corresponding point data using visual prompts. Specific examples can be found in Figure 24.

A.3 REAL-WORLD

We also collected some real-world videos and images, primarily covering sub-tasks related to light, camera, and physical dynamics such as collisions. An iPhone 13 Pro Max was used as the recording device, and all images are in RGBD format.

B DATA ANNOTATION PROTOCOL

B.1 GENERAL GUIDELINES

As previously discussed, there is a significant gap in existing benchmarks, which primarily assess vision-language models (VLMs) based on descriptive tasks without adequately addressing their physical perception and reasoning abilities. To bridge this gap, our benchmark, PhysBench, is designed to provide a comprehensive evaluation framework for physical perception, integrating visual understanding with the assessment of physical properties, spatial relationships, and dynamic phenomena. This approach aims to advance AI systems toward more general-purpose capabilities in real-world physical environments. Our benchmark follows the guidelines outlined below for data collection:

- **General Principles:**

- Annotations must be accurate, consistent, and adhere to a high standard of academic rigor.
- It covers multiple tasks and topics to mirror real-world applications.
- It incorporates diverse visual contexts and physics knowledge to foster a well-rounded evaluation.
- It offers varying levels of challenge to effectively probe and uncover the potential limitations of current models.


- 1458 – It provides robust evaluation settings for deterministic assessments.
 1459
 1460 • **Specific Instructions:**
 1461 – All questions must contain one or more images.
 1462 – All questions should be written in English.
 1463 – All questions should meet the college-level difficulty.
 1464 – Questions should not be ambiguous and must be answerable with one of the given
 1465 options.
 1466 – Clearly categorize each question.
 1467 – Annotate all fields, including the question, answer options and other things that follow
 1468 the format requirement.
 1469 • **Review Process:** Ensure that every annotation undergoes a peer review to maintain high
 1470 standards and minimize errors.

1471 Annotations such as physical properties, spatial relationships, dynamic interactions, and environ-
 1472 mental factors are also collected, providing detailed examples that demonstrate the physical percep-
 1473 tion and reasoning capabilities of the models for further analysis and usage.
 1474

1475 B.2 DATA FORMAT AND STRUCTURE


1476
 1477 Detailed examples of annotated question examples as shown in Figure 11 are provided in the guid-
 1478 ance to serve as a reference for the annotators.


- 1479
 1480 • **JSON File Format:** The structured JSON format will include fields for number, question
 1481 type, question text, answer options (for multiple-choice), correct answer, question diffi-
 1482 culty, and explanation (if there exists).
 1483 • **Naming Conventions:**
 1484 – Each collected sample will be stored in a separate JSON file following a standard
 1485 naming rule: **subject_{Number}.json**
 1486 – Image Files: **image_{QuesNum}_{ImageNum}.png**


1487 


1488

1489 Following the content of the video, which option's corresponding
 1490 picture will happen first?

1491 A. 

1492 B. 

1493 C. 

1494 D. 

1495

1496

1497

1498

1499

```

1500 {
1501   "scene": "black background",
1502   "object": [
1503     "glass",
1504     "rubber_bullet"
1505   ],
1506   "source": "web",
1507   "file_name": [
1508     "iNINChj51Aqn.mp4",
1509     "iNINChj51Aqj.png",
1510     "iNINChj51Aqk.png",
1511     "iNINChj51Aql.png",
1512     "iNINChj51Aqm.png"
1513   ],
1514   "question": "Following the content of the <video>, which option's
1515     corresponding picture will happen first?\nA. <image>\nB. <image>\nC.
1516     <image>\nD. <image>",
1517   "answer": "A",
1518   "task_type": "dynamics",
1519   "sub_type": "collision",
1520   "ability_type": "prediction",
1521   "description": null,
1522   "mode": "general"
1523 },
  
```

1501 Figure 11: A question-answer pair case in PhysBench and its JSON representation.
 1502

1503 B.3 QUALITY CONTROL AND VALIDATION

- 1504 • A secondary review team will rigorously vet annotations for quality and adherence to guide-
 1505 lines.
 1506 • Regular audits of random samples from the dataset will be conducted to ensure sustained
 1507 quality and consistency.
 1508 • Periodic training sessions will be held to update annotators on best practices and any
 1509 changes in annotation guidelines.
 1510 • Feedback mechanisms will be established to promptly address and rectify any identified
 1511 errors or inconsistencies in the annotations.

1512 B.4 HANDLING AMBIGUITIES

1513
1514 Instances of ambiguity or unclear data should be flagged for detailed review. These instances will be
1515 collaboratively examined during team meetings to establish a standardized approach for annotation.
1516

1517 B.5 ETHICAL CONSIDERATIONS


- 1518 • **Copyright and Licensing:** Adherence to copyright and licensing regulations is strictly enforced. Data from sources that prohibit copying or redistribution will be explicitly avoided.
- 1519
- 1520 • **Data Privacy:** Compliance with privacy laws and ethical standards in data handling is paramount. Annotators must avoid collecting questions that contain any private information.
- 1521
- 1522 • **Ethical Data Usage:** All data collection and usage must respect ethical guidelines. This includes avoiding biased or harmful content and ensuring that the datasets promote fairness and inclusivity.
- 1523
- 1524
- 1525
- 1526

1527 B.6 DATA CONTAMINATION CONSIDERATIONS

1528
1529 The risk of data contamination can be mitigated by assigning annotators to carefully select questions
1530 that extend beyond straightforward queries with easily accessible answers. It is essential that tasks
1531 rely on provided videos or images for answers rather than the common knowledge of large language
1532 models. This approach is beneficial for creating benchmarks that genuinely test the model’s ability
1533 to comprehend and synthesize information from diverse and challenging sources.
1534

1535 B.7 ANNOTATION PLATFORM

1536
1537 We developed a GUI-based annotation platform, as shown in Figure 12, designed to assist human
1538 experts in the data annotation process. Through this program, experts can easily view various media
1539 content, such as videos and images, and perform annotations and edits directly within an intuitive
1540 interface. The streamlined layout enhances the user experience, ensuring that experts can complete
1541 annotation tasks efficiently and accurately, thereby improving the quality and efficiency of the annotations.
1542 The purpose of this tool is to simplify the complex annotation workflow, reduce manual
1543 effort, and make the annotation process more efficient.

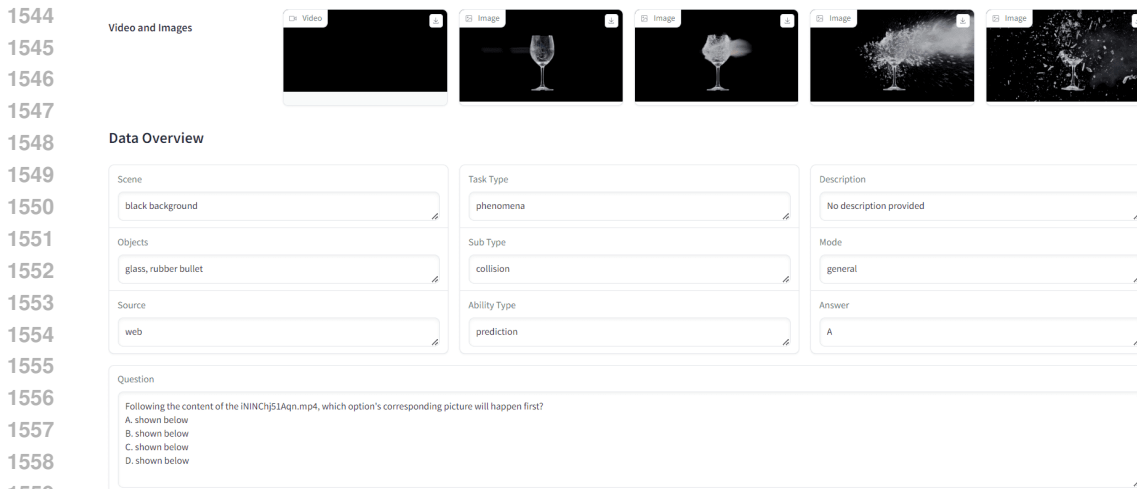

1560
1561 Figure 12: Annotation Platform.

1562 B.8 BENCHMARK PREPARATION AND RELEASE

1563
1564 The full PhysBench dataset consists of 100,000 question-answer pairs. For convenience, we selected
1565 a subset of 10,002 entries, which are more challenging and diverse, as the test set, and 200

1566 entries as the validation set (PhysBench-val) for parameter choosing since the answers for the Phys-
1567 Bench will not be publicly available and are hosted similarly to Yue et al. (2024). The experimental
1568 results presented in this paper, unless otherwise specified, are based on the test set. The PhysBench-
1569 val subset contains 200 examples and is designed for model development validation, particularly
1570 for those with limited computational resources. Importantly, the answer labels for the remaining
1571 set will not be publicly released to prevent data leakage, and we will maintain an online evaluation
1572 platform. It should be noted that the scores we refer to for PhysBench are based on the entire test
1573 dataset, including the validation split.

1574 To ensure that each source dataset is well represented in the validation split and that the distribution
1575 of sub-task types and ability types in the validation set is similar to that of the entire dataset, we
1576 adopted the following sampling strategy: 1. Randomly sample questions to ensure that the distribu-
1577 tion of sub-task and ability types in the validation set matches the full dataset. 2. Randomly sample
1578 the remaining questions from each source dataset based on its proportion in the entire dataset.

1579 Additionally, we conducted several quality checks to address any potential errors.
1580

1581 B.9 MORE DETAILS OF THE ANNOTATION PIPELINE

1582 As described in Section 3.2, all questions were manually annotated by graduate students in STEM
1583 fields and subsequently refined through a rigorous review process. The detailed workflow is depicted
1584 in Figure 13, where the icon 🧑 denotes stages involving human participation. The annotators were
1585 divided into three groups, each comprising six individuals. During the annotation process, either a
1586 GUI interface similar to Figure 12 or direct editing of JSON files was employed. The first group was
1587 responsible for video collection, the final group handled quality checks, and the intermediate group
1588 completed the remaining steps. A comprehensive explanation of this process is provided below.
1589

1590 **Video Collection.** Videos and images were sourced through web searches, simulations, and real-
1591 world recordings. The collection process utilized predefined simulation rules, LLM-guided queries,
1592 and other strategies to identify relevant content. Specifically, for data that could be simulated, we
1593 generated it using pre-written simulation scripts, as described in Section A. Additionally, we con-
1594 ducted YouTube searches for videos, leveraging captions generated by GPT to guide annotators in
1595 collecting videos. We also sought compilations on topics like "interesting physical phenomena." For
1596 real-world recordings, we pre-designed scenarios and objects to capture. Given the complexity of
1597 collecting such data, we employed GPT as heuristic tools to expand the search scope and enrich the
1598 dataset's diversity. Finally, annotators curated the videos by trimming them to retain only relevant
1599 segments and provided detailed physical descriptions, such as the direction of shadow movement or
1600 the causes of observed events.

1601 **Question Design.** In the previous step, we utilized GPT to generate annotations for videos. This
1602 approach was adopted after observing that directly inputting a video and prompting GPT to gen-
1603 erate question-answer pairs in an in-context learning format often led to suboptimal adherence to
1604 instructions. Instead of focusing on generating questions, GPT tended to explain the video con-
1605 tent. Additionally, inputting videos directly consumed more tokens, increasing computational costs.
1606 Furthermore, annotating videos with captions was considered beneficial for subsequent research
1607 leveraging our dataset. Given the complexity of collecting such data, we employed GPT as a heuris-
1608 tic strategy to broaden the scope of search and enhance the diversity of our dataset. GPT generated
1609 questions using an in-context learning approach, with the templates provided in Appendix E.1. No-
1610 tably, all final questions were curated and verified by human annotators, with GPT serving only as a
1611 reference.

1612 **File Organization.** We presented annotators with examples and detailed classification criteria, as
1613 outlined in Appendix C and Appendix H. Annotators were then instructed to categorize tasks ac-
1614 cordingly and structure each task in the JSON format shown in Figure 11.

1615 **Quality Check.** After organizing the dataset, we conduct a two-stage review process to ensure its
1616 quality. The dataset undergoes human verification to confirm that the questions are relevant to the
1617 physical world, rely on all provided input information, are not solely based on common sense, and
1618 are accurately categorized with clear questions and corresponding answers. The first stage involves
1619 filtering and refining the questions, while the second stage focuses on thorough validation to ensure
data accuracy and consistency.

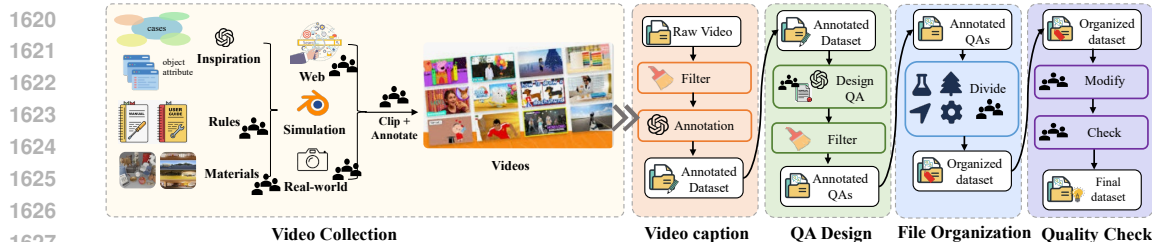


Figure 13: **Annotation Pipeline.** Icon  indicate stages involving human participation.

Given the difficulty of acquiring such data, where expressing specific properties often requires multiple images, we undertook a five-step process, spending a total of **4,000 hours** on annotation.

C DETAILED TASK DESCRIPTION

This section primarily introduces the definitions of the various capabilities and sub-tasks. Specific examples can be found in Appendix H. As illustrated in Figure 1, humans not only accurately comprehend visual content but also draw upon knowledge to explain and reason about the scenes they observe. This is the primary goal of most VQA datasets. Building on this foundation, several studies have focused on the commonsense understanding of the geometric relationships and properties within the 3D world. However, the real physical world encompasses not only 3D geometric relationships but also includes object properties (e.g., elasticity, ductility), physical object relationships (e.g., velocity, acceleration, depth), physical scene and environmental factors understanding (e.g., temperature, camera parameters, lighting conditions), and the principles and mechanisms of physical dynamics (e.g., the sequence of collisions, energy transfer, fluid flow, simple physical and chemical reactions, optical and electromagnetic dynamics). To address this gap, we propose PhysBench, which aims to bring Vision-Language Models closer to achieving spatial intelligence (Gupta et al., 2021; Srivastava et al., 2021).

C.1 ABILITY DESCRIPTION

Table 4 presents the description of capability types for PhysBench. The tasks are categorized into four types: physical properties, physical object relationships, physical scene, and physics-based dynamics. Each task type corresponds to different capability types such as recognition, comparison, prediction, judgment, reasoning, and perception, with detailed descriptions provided for each. Specifically, the physical properties task type includes the recognition of object properties and comparisons between the physical properties of different objects. The physical object relationships task type distinguishes between static and dynamic relationships of objects. The physical scene understanding task type involves the prediction, judgment, reasoning, and perception of changes in environmental conditions. The physics-based dynamics task type evaluates the ability to predict, judge, reason, and perceive various physics-based dynamics or phenomena.

C.2 PHYSICAL OBJECT PROPERTY SUB-TASK

Table 5 describes the sub-tasks for object types in PhysBench. The object types are divided into four subcategories: number, mass, color, and attributes. Specifically, the “number” subcategory involves the count of certain objects or changes in their quantity; the “mass” subcategory focuses on approximate changes in object mass, mass estimation, or mass comparison; the “color” subcategory describes the color of objects or color changes; and the “attributes” subcategory covers object characteristics such as rigidity, fluidity, gas, hardness, malleability, elasticity, smoothness, and sharpness.

Notably, our dataset imposes more rigorous evaluations on conventional attributes like mass and color. For instance, in the case of counting tasks, previous works (Kafle & Kanan, 2017; Yi et al., 2019; Chen et al., 2022) typically only require identifying the number of objects in an image. In contrast, our dataset often ties quantities to specific object attributes (e.g., “How many objects of a certain color are outside the plate?” or “How many objects are not blurred by the camera?”).

Table 4: Ability Type Description for PhysBench.

Task type	Ability type	Description
Physical Object Property	Identify	Identify a physical property of an object.
	Comparison	Comparison of the same physical property between different objects, or changes in a specific property over time.
Physical Object Relationships	Static	The static spatial properties of an object.
	Dynamic	The dynamic spatial properties of an object, meaning the spatial properties are changing dynamically.
Physical Scene Understanding	Prediction	Predict what might happen if a certain environmental condition is changed, or what will happen next.
	Judgment	Judge what will be different if a certain environmental condition is modified.
	Reasoning	Explain the occurrence reason or condition of the environment.
	Perception	Understand what environment condition change has occurred and what its definition is, or determine the environmental attributes that caused the phenomenon to occur.
Physics-based Dynamics	Prediction	Predict what might happen if a certain object or object attribute in the video is changed, or what will happen next.
	Judgment	Judge what will change if a certain attribute is modified, or, for example, the sequence in which actions occur.
	Reasoning	Explaining the occurrence reason or condition of phenomena.
	Perception	Understand what phenomenon has occurred and what its definition is, or determine the physical attributes that caused the phenomenon to occur.

Table 5: Sub-task Description for Physical Object Property Type in PhysBench.

Sub type	Description
Number	The number of certain objects or changes in the number of objects.
Mass	Approximate changes in mass, mass estimation, or mass comparisons.
Color	Color of an object or changes in color.
Attribute	The attributes or types of objects, such as rigid body, fluid, gas, stiffness, malleability, elasticity, smoothness, sharpness, <i>etc.</i>

C.3 PHYSICAL OBJECT RELATIONSHIPS SUB-TASK

Table 6 presents the descriptions of physical object relationships sub-tasks in PhysBench. The relationships types are divided into five subcategories: size, location, depth, distance, and movement. Specifically, the “size” subcategory relates to the dimensions of an object; the “location” subcategory describes the absolute and relative positions of objects, including tasks related to object localization and spatial information processing; the “depth” subcategory focuses on an object’s depth relative to the camera or depth comparisons between different objects; the “distance” subcategory involves the comparison or estimation of distances between objects as well as their absolute size; and the “movement” subcategory addresses the analysis of movement direction, changes in speed, and changes in acceleration.

C.4 PHYSICAL SCENE UNDERSTANDING SUB-TASK

Table 7 describes the sub-tasks for physical scene understanding types in PhysBench. The physical scene understanding types are divided into four subcategories: temperature, camera, gas, and light. Specifically, the “temperature” subcategory involves temperature and its fluctuations, as well as dynamics caused by these changes; the “camera” subcategory focuses on changes in camera position and the resulting effects; the “gas” subcategory covers conditions of the gas environment, such as high pressure, low pressure, or vacuum states; and the “light” subcategory describes the color tone of the light source (warm or cool), changes in the position of the light source, light intensity, and the nature of the light source (point or surface).

Table 6: Sub-task Description for Physical Object Relationships Type in PhysBench.

Sub type	Description
Size	The size of the object.
Location	Positional relationships (absolute and relative), including directly or indirectly locating objects and other tasks involving spatial information.
Depth	Depth of an object relative to the camera or depth comparisons between different objects.
Distance	Comparison or estimation of distances between objects or their absolute sizes.
Motion	Motion, velocity, acceleration and the direction of movement, changes in speed, or changes in acceleration.

Table 7: Sub-task Description for Physical Scene Understanding Type in PhysBench.

Sub type	Description
Temperature	The temperature and its changes, as well as phenomena caused by temperature fluctuations.
Camera	The position of the camera and its changes, along with phenomena caused by shifts in camera position.
Gas	The gas environment encompasses conditions such as air pressure, humidity, airflow direction, and intensity.
Light	Includes the color tone of the light source (warm or cool), changes in the position of the light source, its intensity, and the nature of the light source (point or surface).

C.5 PHYSICS-BASED DYNAMICS SUB-TASK

Table 8 describes the sub-tasks for physics-based dynamics types in PhysBench. The physics-based dynamics types are divided into six subcategories: collision, throwing, manipulation, fluid, chemistry, and other physics-based dynamics. Specifically, the “collision” subcategory includes physics-based dynamics such as friction between objects, collisions, and explosions; the “throwing” subcategory involves physical world dynamics and phenomena such as throwing and falling; the “manipulation” subcategory focuses on the manipulation of deformable objects and affordance-based sequence arrangements; the “fluid” subcategory covers fluid motion, shapes, and other fluid-related dynamics; the “chemistry” subcategory involves basic chemical reactions or other dynamics or phenomena related to chemistry in the physical world; and the “other” subcategory includes various other dynamics related to the physical world.

Table 8: Sub-task Description for Physics-based Dynamics Type in PhysBench

Sub type	Description
Collision	Friction between objects, collisions, explosions, and similar dynamics.
Throwing	Throwing, falling, and other physical world dynamics.
Manipulation	Manipulation of deformable objects and affordance-based sequence arrangements.
Fluid	Fluid motion, shapes, and other fluid-related dynamics.
Chemistry	Basic chemical reactions or other dynamics involving chemical knowledge in the physical world.
Others	Other dynamics related to the physical world.

All of our questions are designed as multiple-choice, with only one correct answer among the four options. Referring to BLINK (Fu et al., 2024), the visual prompt is set as a red circle with a 10px size, which has been found to be the most suitable.

D MORE DATASET ANALYSIS

D.1 GLOBAL STATICS

Question Distribution. Figure 14 further elucidates the distribution of word counts, highlighting the diverse patterns of questions. The average word of the questions within PhysBench is 16.53, while the maximum number of words in a question reaches 48.

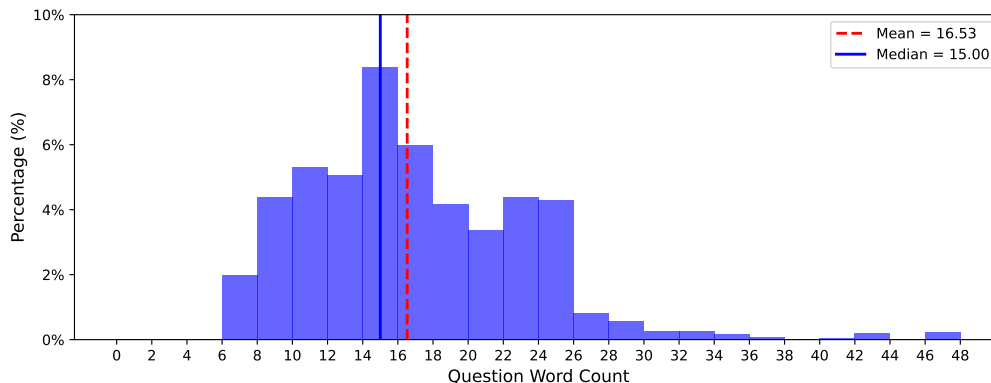


Figure 14: The distribution of the number of words per question in PhysBench. Questions with a length greater than 48 are categorized as 47 for visualization simplicity.

Option Distribution. Figure 15 further elucidates the distribution of word counts, highlighting the diverse patterns of options. The average number of words in the options within PhysBench is 4.36, while the maximum number of words in a question reaches 20. It is worth noting that an “option” here refers to the text following a choice, such as “A. Point A,” where the character length is 2.

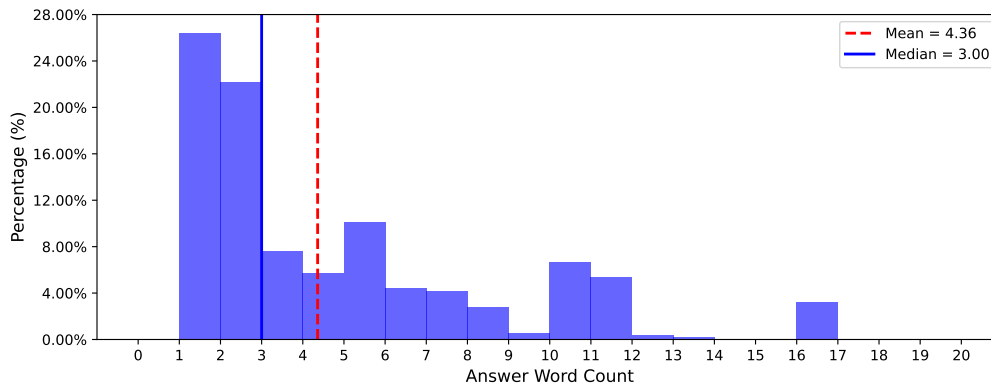


Figure 15: The distribution of the number of words per question in PhysBench. Options with a length greater than 20 are categorized as 20 for visualization simplicity.

Image Resolution. The resolution of most images falls within the 1024-2048 range, accounting for approximately 79.7% of the total images. Only four images in the dataset have a resolution below 256. The minimum resolution is 183, while the maximum is 7201.

Video Resolution. Similarly, the majority of videos have a resolution between 1024-2048, covering about 98.6% of the total videos. Only 1.3% of videos have a resolution below 1024. The highest video resolution is 1920, and the lowest is 370.

Video Frames. Considering that VLMs typically extract keyframes when processing videos—generally selecting 6-8 frames—the total number of frames in the videos doesn’t need to be large. However, this doesn’t imply that our videos are limited to 6–8 frames. The frame counts are primarily distributed in the ranges of 30–45 frames and 60+ frames, accounting for 59.4% and 35.9% of the total, respectively. The distribution charts for image and video resolution, as well as video frame counts, can be seen in Figure 16.

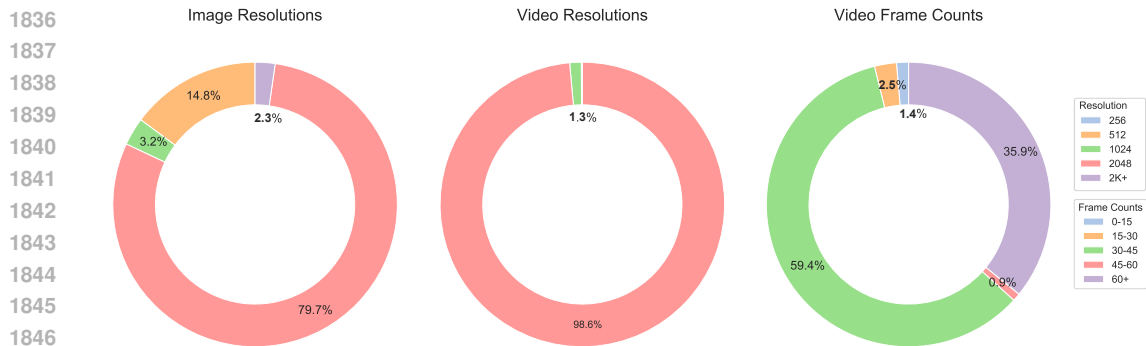


Figure 16: The distribution charts for image and video resolution, as well as video frame counts. From left to right: the distribution of image resolution, the distribution of video resolution, and the distribution of video frame counts.

D.2 WORD STATICS AND WORD CLOUD

We created a word cloud and word frequency chart for our dataset, as shown in Figure 17. It reveals a significant presence of terms related to physical world perception, such as “direction,” “camera,” “phenomenon,” “effects,” “relationship,” and “light.” Additionally, we generated a word cloud and word frequency chart for the **LLaVA-1.5-13B** training data, which includes 595K pretraining samples and 665K instruction-tuning samples, as illustrated in Figure 18.

VILA-1.5-13B. In the pretraining data, CC3M (Sharma et al., 2018) and COYO (Byeon et al., 2022) 25M primarily consist of image captions, while MMC4 (Zhu et al., 2024) 25M includes webpage descriptions, none of which significantly contribute to the model’s understanding of the physical world. Therefore, we mainly focus on the instruction-tuning data. The LLaVA-1.5-SFT-665K instruction-tuning data has already been used in LLaVA-1.5-13B, so it is not considered further. Additionally, FLAN (Wei et al., 2021) consists purely of text data and is thus also excluded from consideration.


The data used for VILA-1.5-13B includes the following:

- Captioning: Image Paragraph Captioning (Krause et al., 2017), MSR-VTT (Xu et al., 2016), TextCaps (Sidorov et al., 2020)
- Reasoning: CLEVR (Johnson et al., 2017), NLVR (Suhr et al., 2017), VisualMRC (Tanaka et al., 2021)
- Translation: Multi30k (Elliott et al., 2016)
- VQA: ActivityNet-QA (Yu et al., 2019), DocVQA (Mathew et al., 2021), GQA (Hudson & Manning, 2019), iVQA (Yang et al., 2021), MSRVTT-QA (Xu et al., 2017), MSVD-QA (Xu et al., 2017), OCR-VQA (Mishra et al., 2019), ST-VQA (Biten et al., 2019), Vi-QuAE (Lerner et al., 2022), VQA2 (Goyal et al., 2017b), Visual Dialog (Das et al., 2017)

According to the guidelines from the VILA repository, the aforementioned instruction-tuning data is all included in M³IT (Li et al., 2023f). Therefore, we use M³IT to analyze the training data for VILA-1.5. The final word frequency statistics and word cloud for the VILA-1.5-13B training data are shown in Figure 19.

PLLaVA-13B. PLLaVA-13B is based on LLaVA-Next (Liu et al., 2024b), with LLaVA-Next incorporating additional data from ShareGPT-4V (Chen et al., 2023) compared to LLaVA-1.5-13B. The main enhancement from LLaVA-Next to PLLaVA-13B is the addition of 783k instructional video-to-text tuning data, enabling LLaVA-Next to handle video input. Specifically, the training data are sourced from the dataset used in VideoChat2 (Li et al., 2023e), which includes data for various video understanding tasks, such as 27k conversation videos from VideoChat (Li et al., 2023d) and VideoChatGPT (Maaz et al., 2023b), 80k classification task data from Kinetics (Kay et al., 2017) and Sth-SthV2 (Goyal et al., 2017a), 450k captioned data from Webvid (Bain et al., 2021), YouCook2 (Zhou et al., 2018), TextVR (Wu et al., 2023c), and VideoChat, 117 reasoning data points from NextQA (Xiao et al., 2021b) and CLEVRER (Yi et al., 2019), and 109k annotated question-answering samples from Webvid, TGIF (Li et al., 2016), and Ego4D (Grauman et al., 2022).

1944 Observing Figure 18 19 20, we can see that the most frequent words in the training data of LLaVA-
 1945 1.5-13B, VILA-1.5-13B, and PLLaVA-13B are terms like 'description', 'phrase', 'summary', 're-
 1946 gion', and similar words. Keywords such as 'direction' appear much less frequently. We have
 1947 listed the frequency of several key terms from our dataset in the training data of LLaVA-1.5-13B,
 1948 VILA-1.5-13B, and PLLaVA-13B, as shown in Figure 21. Although PLLaVA-13B includes words
 1949 like 'collides' and 'camera', they are primarily used to describe phenomena without addressing the
 1950 underlying physical mechanisms, which may explain why PLLaVA-13B shows no substantial im-
 1951 provement.

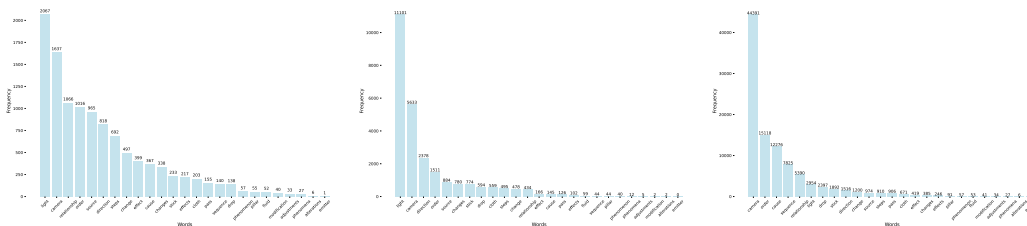

1962 Figure 21: The frequency of common terms in PhysBench within the training data of the LLaVA-
 1963 1.5-13B, VILA-1.5-13B, and PLLaVA-13B models.

1964
 1965
 1966
 1967 **E MORE DETAILS ON THE SETUP**

1968
 1969
 1970 **E.1 PROMPT FOR LLMs**

1971
 1972 **Video Cases Prompt.** The general system prompt for LLMs to generate video or image cases is as
 1973 follows:
 1974

```

    1975
    1976
    1977 You are an assistant that communicates only in JSON and is an expert in physics. Do not write
    1978 normal text.
    1979 Your response should be in JSON format with the following string fields:
    1980 1. 'video description': A description of the video.
    1981 2. 'question': A multiple-choice question based on the video's content.
    1982 3. 'answer': A response to the question, with one of the values being 'A', 'B', 'C', or 'D'.
    1983 For the same 'video description', you may provide multiple question-answer pairs, which should
    1984 be presented in a list format.
    1985 Important notes: 1. The 'question' should not contain details from the 'video description'. 2. The
    1986 relationship between each question-answer pair is one of juxtaposition, not progression.
    1987 The following is a conversation between the user and the assistant. Ensure that the assistant's
    1988 answers are as rich and informative as possible.
    1989
    
```

1990 Then we will use the below sentence as the first turn chat and let the LLMs give the more cases in the
 1991 latter turns. We replace the examples provided in the first turn to enable GPT to generate more
 1992 diverse responses. Notably, some of the examples generated by GPT do not fully align with the
 1993 data standards defined in Appendix B. We use these examples solely as references to collect more
 1994 diverse data. However, as described in Section 3.2, the subsequent data annotation undergoes a
 1995 rigorous five-step manual process to ensure high data quality.

1996 The process of generating VQA templates is similar: questions are generated based on the captions
 1997 of the input video or image. However, QA templates are more focused, targeting specific types of
 relationships, such as those related to spatial positioning.

1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051

```
{ "role": "system", "content": "(Contents of the color block above) }
{ "role": "user", "content": "give me some cases" }
{ "role": "assistant", "content":
  • Video Description: A ball thrown horizontally from a cliff
    – Questions:
      1. What causes the ball to fall downward?
        A. Air resistance
        B. Gravitational force
        C. Magnetism
        D. Elastic collision
      2. Which of the following affects how far the ball travels horizontally?
        A. Mass of the ball
        B. Initial velocity of the ball
        C. Color of the ball
        D. Shape of the ball
      3. What happens if the ball is thrown with a higher initial velocity?
        A. It travels farther horizontally
        B. It travels shorter horizontally
        C. It stops mid-air
        D. It moves vertically upward
    – Answers: [B, B, A]
  • Video Description: A feather falling in a vacuum chamber
    – Questions:
      1. What happens if the vacuum chamber is filled with air?
        A. The feather falls faster
        B. The feather falls at the same speed
        C. The feather floats
        D. The feather rises upward
      2. What would happen to the action if it happened in a strong magnetic field?
        A. It would fall faster
        B. It would float
        C. It would fall slower
        D. It would remain unaffected
    – Answers: [A, D]
  },
{ "role": "user", "content": "give me some cases" }
```

Caption. video or image caption system prompt is as follows:

You are an outstanding video annotator and physicist.
Your task is to provide a detailed description of a given video based on the user’s input video and a brief description of the video.
The description should include, but is not limited to, the following aspects:

1. The content of the video.
2. The principles behind the phenomena observed in the video.
3. The properties of certain objects within the video, such as estimated size, mass, color, and type.
4. Various spatial information, including relative and absolute positions, sizes, distances, and movements.

Ensure that the descriptions are thorough, precise, and reflect your expertise in physics.

Answer Extraction. The prompt used to instruct GPT-4o is illustrated as follows:

The following sentences contain answers (one of A, B, C, D) and corresponding analysis.
Your role is to find the answer.
Please return only one of the four letters: A, B, C, or D.
The sentences are:

E.2 3D ASSETS

The overview of the 3D assets is shown in Figure 22. After defining the object attribute table, we selected 678 objects and annotated their attributes accordingly. For each object, we then adjusted its size and position to ensure that multiple objects (typically 4-5 in our dataset) do not overlap and remain clearly visible. These objects were subsequently used for simulations.

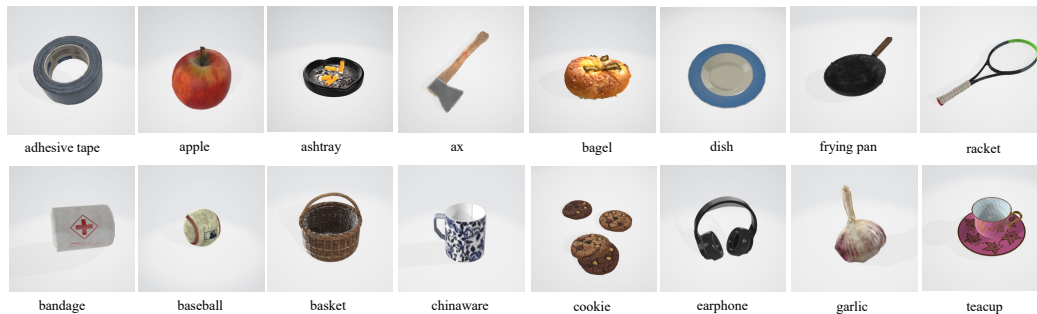


Figure 22: **3D Assets Sample**. We have 678 objects and 470 HDR environment in total for simulation.

E.3 MODEL HYPERPARAMETERS

In our experiments, we conducted comparisons with some of the most recent and representative MLLMs in the following. In our experiments, we conducted comparisons with some of the most recent and representative MLLMs in the following. We divided the models into three categories: **Image VLM**, **Video VLM**, and **General VLM**, according to whether they support only one image input, support a video input (also supports image), or support interlaced video and multiple images.

Following Zhang et al. (2024a), for Image VLMs, we concatenate multiple frames from a video (defaulting to 8 frames) into a single image, arranged from left to right and bottom to top, before inputting it into the model. Thus, both Image VLMs and Video VLMs were tested on question-answer pairs involving only a single image or video, which represent a subset of PhysBench. In contrast, General VLMs, which support interleaved image-text sequences, were tested on the full PhysBench test split.

For most open-source models, we used the hyperparameter `torch_dtype = torch.float16`. However, for some models that only support `torch_dtype = torch.bfloat16`, we used `torch_dtype = torch.bfloat16` for those cases. Additionally, for other parameter settings, we generally followed the configurations provided in the original papers, their code repositories, or the examples from Hugging Face.

E.3.1 IMAGE VLM

The following is a description of the specific models reviewed, as well as the specific parameter configurations, can be found in Table 9.

- **BLIP-2** (Li et al., 2023c) employs a dual-stage strategy to bridge the modality gap effectively, utilizing a lightweight Q-Former pre-trained on 129 million image-text pairs. In the first stage, the model initiates the learning of vision-language representations by leveraging a frozen image encoder, ViT-g/14 from EVA-CLIP (Fang et al., 2023). In the subsequent stage, a frozen LLM, FlanT5 (Chung et al., 2024), is employed to facilitate vision-to-language generative learning. This innovative approach enables effective zero-shot instructed image-to-text generation. The tested version is BLIP2-t5-xxl (we call it as BLIP-2 in this paper).
- **InstructBLIP** (Dai et al., 2024) is derived from the pre-trained BLIP-2 model (Li et al., 2023c), which integrates a ViT-g/14 image encoder, a Vicuna (Chiang et al., 2023), and a Q-Former that bridges these two components. During the vision-language instruction tuning process, only the Q-Former is fine-tuned, utilizing data from 13 distinct visual question-answering datasets. The tested version is InstructBLIP-t5-xl (we call it as InstructBLIP-

- 2106 t5-xl in this paper), InstructBLIP-t5-xxl (we call it as InstructBLIP-t5-xxl in this paper),
 2107 InstructBLIP-vicuna-7b (we call it as InstructBLIP-7B in this paper) and InstructBLIP-
 2108 vicuna-13b (we call it as InstructBLIP-13B in this paper). It is worth noting that both
 2109 InstructBLIP-vicuna-7b and InstructBLIP-vicuna-13b provided no responses to a small part
 2110 of questions. For these instances, we disregarded these questions and did not assign any
 2111 scores.
- 2112 • **LLaVA-1.5** Liu et al. (2023a). LLaVA (Liu et al., 2024c) establishes a connection between
 2113 the visual encoder ViT-L/14 from CLIP (Radford et al., 2021) and the language decoder
 2114 LLaMA (Touvron et al., 2023) using a lightweight, fully connected (FC) layer. Initially,
 2115 the system trains this FC layer with 595K image-text pairs, while keeping both the visual
 2116 encoder and LLM static. Subsequently, LLaVA fine-tunes both the FC layer and the LLM
 2117 using a dataset of 158K instructional vision-language pairs. LLaVa-1.5 (Liu et al., 2023a)
 2118 is an enhanced version of LLaVA, trained on additional datasets. The tested version is
 2119 LLaVa-1.5-7b and LLaVa-1.5-13b (we call it as LLaVA-1.5-7B and LLaVA-1.5-13B in
 2120 this paper).
 - 2121 • **Qwen-VL-Chat** (Bai et al., 2023b) introduces a series of large-scale vision-language mod-
 2122 els (LVLMs) designed to perceive and understand both text and images. The Qwen-VL
 2123 series is built upon the Qwen-LM (Bai et al., 2023a) foundation, augmented with visual
 2124 capabilities through a meticulously designed visual receptor, input-output interface, and a
 2125 three-stage training pipeline using a multilingual multimodal cleaned corpus. These mod-
 2126 els excel in image description, question-answering, grounding, and text-reading by align-
 2127 ing image-caption-box tuples. The series includes Qwen-VL and Qwen-VL-Chat, both of
 2128 which achieve state-of-the-art performance on a broad range of visual-centric benchmarks
 2129 and real-world dialog benchmarks, demonstrating their superiority over existing vision-
 2130 language chatbots. The tested version is Qwen-VL-Chat, as Qwen-VL-Chat have stronger
 instruction fellow ability than Qwen-VL.
 - 2131 • **LLaVA-NeXT** (Liu et al., 2024b) is the latest iteration in the LLaVA series (Liu et al.,
 2132 2024c), building upon the foundation of LLaVA-1.5 (Liu et al., 2023a). This new model
 2133 enhances visual reasoning, OCR, and world knowledge capabilities. It increases input im-
 2134 age resolution to four times more pixels, supporting resolutions up to 672x672, 336x1344,
 2135 and 1344x336. LLaVA-NeXT features an improved visual instruction tuning data mix-
 2136 ture, further enhancing its visual reasoning and OCR capabilities. Additionally, it sup-
 2137 ports better visual conversations across various scenarios and applications, demonstrating
 2138 improved world knowledge and logical reasoning. Despite these enhancements, LLaVA-
 2139 NeXT maintains the minimalist design and data efficiency of its predecessor, utilizing less
 2140 than 1M visual instruction tuning samples. The tested versions are LLaVA-NeXT-mistral-
 2141 7b (LLaVA1.6-mistral) and LLaVA-NeXT-vicuna-7b (LLaVA1.6-vicuna), with the base
 2142 models being Mistral-7b (Jiang et al., 2023) and Vicuna-7b (Chiang et al., 2023), respec-
 2143 tively (we call it as LLaVA1.6-mistral and LLaVA1.6-vicuna in this paper).
 - 2144 • **InternVL-Chat-V1-5** (Chen et al., 2024c) is an open-source multimodal large language
 2145 model with enhanced visual understanding through a continuous learning vision encoder,
 2146 dynamic high-resolution image processing, and a high-quality bilingual dataset. The tested
 2147 version is InternVL-Chat-V1-5-quantable (we call it as InternVL-Chat1.5), as the GPU
 memory size restriction of 40G A6000.
 - 2148 • **Cambrian-1** (Tong et al., 2024) is a family of multimodal large language models (MLLMs)
 2149 designed with a vision-centric approach. This model series addresses the gap between lan-
 2150 guage models and visual representation learning by thoroughly evaluating various visual
 2151 representations. Cambrian-1 introduces the Spatial Vision Aggregator (SVA), a dynamic
 2152 and spatially-aware connector that integrates high-resolution vision features with large lan-
 2153 guage models (LLMs) via cross-attention layers (Dai et al., 2024) while reducing the num-
 2154 ber of tokens. The tested version is Cambrian-1-8b (we call it as Cambrian-8B in this
 2155 paper).
 - 2156 • **Claude** (Anthropic, 2024) is a large language model developed by Anthropic with a strong
 2157 focus on safety, interpretability, and alignment. It has been designed to align with human
 2158 intent and values, using various methodologies like reinforcement learning from human
 2159 feedback (RLHF) to ensure that the model behaves as intended. Claude integrates mecha-
 nisms to reduce harmful or biased outputs and is optimized for interactive dialogue across

2160 a range of domains. In this paper, the tested version is Claude-3-opus, Claude-3-sonnet,
 2161 Claude-3-haiku, Claude-3.5-sonnet. Except for Claude-3-haiku, where images were used
 2162 in their original size, the images for the other three models were resized to 128×128 due to
 2163 cost considerations. Notably, both Claude-3-sonnet and Claude-3.5-sonnet demonstrated
 2164 poor adherence to instructions, often failing to provide direct answers as requested in the
 2165 prompt, instead offering explanations alongside the options. Therefore, we used GPT-4o to
 2166 extract the answers for scoring, with the prompt provided in Appendix E.1.

2168	Model	Generation Setup
2169	BLIP-2	torch_dtype = torch.float16, max_new_tokens = 200
2170	InstructBLIP-t5-xl	torch_dtype = torch.float16, max_new_tokens = 200
2171	InstructBLIP-t5-xxl	torch_dtype = torch.float16, max_new_tokens = 200
2172	InstructBLIP-7B	torch_dtype = torch.float16, max_new_tokens = 200
2173	InstructBLIP-13B	torch_dtype = torch.float16, max_new_tokens = 200
2174	LLaVA-1.5-7B	torch_dtype = torch.float16, max_new_tokens = 200, do_sample = False
2175	LLaVA-1.5-13B	torch_dtype = torch.float16, max_new_tokens = 200, do_sample = False
2176	Qwen-VL-Chat	torch_dtype = torch.bfloat16
2177	LLaVA1.6-mistral	torch_dtype = torch.float16, max_new_tokens = 200, do_sample = False
2178	LLaVA1.6-vicuna	torch_dtype = torch.float16, max_new_tokens = 200, do_sample = False
2179	InternVL-Chat1.5	torch_dtype = torch.bfloat16, max_new_tokens = 512, num_beams = 1, do_sample = False
2180	Cambrian-8B	torch_dtype = torch.float16, max_new_tokens = 512, temperature = 0, num_beams = 1, use_cache = True
2181	Claude-3-opus	max_new_tokens = 1000, temperature = 0
2182	Claude-3-sonnet	max_new_tokens = 1000, temperature = 0
2183	Claude-3-haiku	max_new_tokens = 1000, temperature = 0
2184	Claude-3.5-sonnet	max_new_tokens = 1000, temperature = 0

2185 Table 9: Generating parameters for Image VLM. Parameters not explicitly stated indicate the use of
 2186 the model’s default system settings.

2187 E.3.2 VIDEO VLM

2188 The following is a description of the specific models reviewed, as well as the specific parameter
 2189 configurations, can be found in Table 10.

- 2190 • **Chat-Univi** (Jin et al., 2023) is a unified vision-language model capable of comprehending
 2191 and engaging in conversations involving both images and videos through a unified visual
 2192 representation. Chat-Univi employs a set of dynamic visual tokens to uniformly represent
 2193 images and videos, enabling it to efficiently utilize a limited number of visual tokens to cap-
 2194 ture the spatial details necessary for images and the comprehensive temporal relationships
 2195 required for videos. This approach is supported by a multiscale representation that allows
 2196 the model to perceive both high-level semantic concepts and low-level visual details. The
 2197 tested version is Chat-Univi-7B and Chat-Univi-13B.
- 2198 • **Video-LLaVA** (Lin et al., 2023a) is a sophisticated multi-modal framework designed to
 2199 empower large language models (LLMs) with the ability to understand both visual and au-
 2200 ditory content in videos. Unlike previous models that handle either visual or audio signals
 2201 independently, Video-LLaVA integrates both to achieve comprehensive video comprehen-
 2202 sion. The tested version is Video-LLaVA-7b (we call it as Video-LLaVA in this paper).
- 2203 • **PLLaVA** (Xu et al., 2024)(Pooling LLaVA) is an advanced video understanding model
 2204 designed to extend image-based models to video, enabling dense video caption genera-
 2205 tion. The model employs a simple yet powerful pooling module to bridge image-finetuned
 2206

Vision-Language Models (Vision-LLM) into the video domain, achieving significant performance improvements in video captioning tasks. The tested versions are PLLaVA-7B and PLLaVA-13B. Notably, since the model uses `num_frame` as a parameter during loading, our approach for processing images involved duplicating the image for the `num_frames` input.

We also evaluated VideoChatGPT (Maaz et al., 2023a), Video-LLaMA (Zhang et al., 2023), and VideoChat2 (Li et al., 2024c), and observed that these models exhibit poor instruction-following capabilities. Despite repeatedly prompting them to provide options, the models consistently responded with descriptions of the video or image content rather than addressing the questions posed. As a result, we did not include specific evaluation metrics for these models in our study.

Model	Generation Setup
Video-LLaVA	<code>torch_dtype = torch.float16, max_new_tokens = 1024, temperature = 0.1, use_cache = True, do_sample = True</code>
Chat-Univi-7B	<code>torch_dtype = torch.float16, max_new_tokens = 10, temperature = 0, num_beams = 1, use_cache = True, do_sample = False, top_p = None, output_scores = True, return_dict_in_generate = True, length_penalty = 1</code>
Chat-Univi-13B	<code>torch_dtype = torch.float16, max_new_tokens = 10, temperature = 0, num_beams = 1, use_cache = True, do_sample = False, top_p = None, output_scores = True, return_dict_in_generate = True, length_penalty = 1</code>
PLLaVA-7B	<code>conv_mode = conv_eval_videoqabench, max_new_tokens = 256, do_sample = False</code>
PLLaVA-13B	<code>conv_mode = conv_eval_videoqabench, max_new_tokens = 256, do_sample = False</code>

Table 10: Generating parameters for Video VLM. Parameters not explicitly stated indicate the use of the model’s default system settings.

E.3.3 GENERAL VLM

The following is a description of the specific models reviewed, as well as the specific parameter configurations, can be found in Table 11.

- **LLaVA-NeXT-Interleave** (Li et al., 2024b) is a multimodal large language model that extends LLaVA’s capabilities to handle multi-image, video, and 3D data. By using an interleaved data format, it unifies single-image and multi-modal tasks, enabling it to transfer knowledge across different scenarios. The model is trained on the M4-Instruct dataset, which includes over a million samples spanning multi-image, video, and 3D tasks. The tested versions are `llava-interleave-qwen-7b-hf` (we call it as LLaVA-interleave) and `llava-interleave-qwen-7b-dpo-hf` (we call it as LLaVA-interleave-dpo in this paper).
- **VILA-1.5** (Lin et al., 2023b) is a multimodal visual language model (VLM) designed to handle both multi-image and video understanding tasks. It is pretrained on large-scale interleaved image-text data, which enhances its ability to perform tasks such as video reasoning and in-context learning. The tested versions are VILA-1.5-3B, VILA-1.5-3B-s2, VILA-1.5-8B and VILA-1.5-13B.
- **Phi-3V** (Abdin et al., 2024). Phi-3 is a family of open AI models developed by Microsoft, designed to be the most capable and cost-effective small language models (SLMs) available. Phi-3 models outperform other models of the same size and even those in the next size up across various language, reasoning, coding, and math benchmarks. Phi-3V is the VLM based on Phi-3. The tested version is Phi-3V-128k (we call it as Phi-3V in this paper).
- **LLaVA-NeXT-Video** (Zhang et al., 2024b) is a multimodal large language model designed to excel in video understanding tasks through zero-shot modality transfer. Trained primarily on image data, it demonstrates impressive performance on video tasks by leveraging deep learning models with DPO training and AI feedback. The model supports various deployment scenarios, from cloud environments to edge devices, making it highly versatile.

2268 It is part of the broader LLaVA-NeXT suite, focused on advancing visual-language integra-
 2269 tion. The tested version are LLaVA-NeXT-Video-7B-Qwen and LLaVA-NeXT-Video-7B-
 2270 Qwen-dpo, we call them as LLaVA-NV and LLaVA-NV-dpo respectively in this paper.
 2271

- 2272 • **Mantis** (Jiang et al., 2024) is a multimodal large language model designed for interleaved
 2273 multi-image tasks. Built on the LLaMA-3 architecture, it excels in co-reference, reason-
 2274 ing, comparison, and temporal understanding. Mantis uses the Mantis-Instruct dataset,
 2275 containing 721K examples, to train on various multi-image skills. It achieves state-of-the-
 2276 art performance on some interleaved benchmarks, while maintaining strong single-image
 2277 performance on par with CogVLM (Wang et al., 2023b). The tested version are Mantis-
 2278 Idefics2, Mantis-LLaVA, Mantis-siglip-llama3 and Mantis-clip-llama3.
- 2279 • **GPT** (Achiam et al., 2023). GPT-4V is an advanced multimodal model that extends GPT-
 2280 4’s capabilities with integrated vision processing, allowing it to understand and generate
 2281 text based on visual inputs. GPT-4o is an optimized variant designed for better performance
 2282 in language tasks while maintaining lower computational requirements. GPT-4o-mini is
 2283 a more lightweight version of GPT-4o, designed for deployment in resource-constrained
 2284 environments while still providing strong performance in language understanding and gener-
 2285 ation tasks. The version of GPT-4V used is GPT-4-turbo. Notably, due to token length
 2286 limitations, all images were resized to 512×512 before being input into GPT. Our testing
 2287 was conducted around mid-August 2024, using the most advanced model available at that
 2288 time. The remaining models were also tested during this period.
- 2289 • **Gemini-1.5** (Team et al., 2023). Gemini-1.5-Flash and Gemini-1.5-Pro are advanced mul-
 2290 timodal large language models, each designed with distinct capabilities for different perfor-
 2291 mance needs. Gemini-1.5-Flash emphasizes fast processing and efficient memory usage,
 2292 making it ideal for tasks requiring speed on devices with limited resources. Our testing of
 2293 Gemini-1.5-Flash and Gemini-1.5-Pro was conducted around mid-August 2024.

2294 E.4 PROMPT FOR VLM TEST

2295 Referring to Liu et al. (2024c), during testing, we appended an end prompt to each question-answer
 2296 pair (i.e., the value corresponding to the “question” key in the Figure 11). The end prompt is as
 2297 follows:
 2298

2299 Answer with the option’s letter from the given choices directly. You can only answer one letter
 2300 from A, B, C, or D.

2301 Consistent with Zhang et al. (2024a), when asking video-related questions to Image VLMs, we
 2302 prepend the prompt with the following statement:
 2303

2304 This is a series of images sampled at equal intervals from the beginning to the end of a video.
 2305 Based on the series of images, output the best option for the question.
 2306

2307 For Video VLMs, due to their weaker instruction-following capabilities, we provided additional
 2308 prompts during testing to guide the models in selecting the correct answer rather than simply de-
 2309 scribing the video content. (Despite this, many models still responded with video descriptions rather
 2310 than answering the questions, as noted in Appendix E.3.2.) For Video LLMs, if the question involves
 2311 only a single image input, we prepend the following statement:
 2312

2313 Based on the image, output the best option for the question. You must only output the option.

2314 Add the last line in the prompt:

2315 The best choice option is:

2316 If the input involves only a single video, we prepend the following statement:
 2317

2318 This is a series of images sampled at equal intervals from the beginning to the end of a video.
 2319 Based on the series of images, answer the question. Based on the video, output the best option for
 2320 the question. You must only output the option.
 2321

Model	Generation Setup
LLaVA-interleave	torch_dtype = torch.float16, max_new_tokens = 10, do_sample = False
LLaVA-interleave-dpo	torch_dtype = torch.float16, max_new_tokens = 10, do_sample = False
VILA-1.5-3B	torch_dtype = torch.float16, max_new_tokens = 4000, temperature = 0.1, num_beams = 1, use_cache = False, do_sample = False, top_p = None
VILA-1.5-3B-s2	torch_dtype = torch.float16, max_new_tokens = 4000, temperature = 0.1, num_beams = 1, use_cache = False, do_sample = False, top_p = None
VILA-1.5-8B	torch_dtype = torch.float16, max_new_tokens = 4000, temperature = 0.1, num_beams = 1, use_cache = False, do_sample = False, top_p = None
VILA-1.5-13B	torch_dtype = torch.float16, max_new_tokens = 4000, temperature = 0.1, num_beams = 1, use_cache = False, do_sample = False, top_p = None
Phi-3V	torch_dtype = torch.float16, max_new_tokens = 500, temperature = 0, do_sample = False, length_penalty = 1, repetition_penalty = 1 (When in error analysis the max_new_tokens is set to 5000)
LLaVA-NV	torch_dtype = torch.float16, max_new_tokens = 10
LLaVA-NV-dpo	torch_dtype = torch.bfloat16, max_new_tokens = 10
Mantis-Idefics2	torch_dtype = torch.bfloat16, max_new_tokens = 10, do_sample = False
Mantis-LLaVA	torch_dtype = torch.bfloat16, max_new_tokens = 1, num_beams = 1, do_sample = False, length_penalty = 1, repetition_penalty = 1
Mantis-siglip-llama3	torch_dtype = torch.bfloat16, max_new_tokens = 1, num_beams = 1, do_sample = False
Mantis-clip-llama3	torch_dtype = torch.bfloat16, max_new_tokens = 1, num_beams = 1, do_sample = False
GPT-4V	max_new_tokens = 300, temperature = 0, seed = 42
GPT-4o	max_new_tokens = 300, temperature = 0, seed = 42 (When in error analysis the max_new_tokens is set to 2000)
GPT-4o-mini	max_new_tokens = 300, temperature = 0, seed = 42
Gemini-1.5-flash	stream = True
Gemini-1.5-pro	stream = True

Table 11: Generating parameters for General VLM. Parameters not explicitly stated indicate the use of the model’s default system settings.

E.5 REFERENCE DATASETS SUMMARY

Our dataset was entirely annotated by humans and underwent two rounds of rigorous filtering and screening. The data sources we utilized, along with their respective uses, are detailed in Table 12.

E.6 PROMPT STRATEGIES

In Section 4.1, we explore several prompting strategies: Chain of Thought (CoT) (Kojima et al., 2023) with the prompt ”Let’s think step-by-step!”; Desp-CoT (Wu et al., 2023d), which begins with an image description prompt; and Pure Language Reasoning (PLR), similar to Mathvista (Lu et al., 2024). The specific prompt content can be found in Appendix E.6. Following the settings of Kojima et al. (2022); Chen et al. (2024b), we extract the final generated answer through GPT-4o-mini. In this section, we provide the prompts used to implement these three strategies. Note that for Phi-3V:

(1.1) The prompt for CoT (Kojima et al., 2023) is:

Let’s think step by step! Start by selecting the correct option’s letter from the given choices, then provide a detailed explanation of your thought process.

(1.2) The prompt for Desp-CoT (Wu et al., 2023d) is:

2376 Table 12: Datasets Reference for our PhysBench. 'None' indicates that the dataset does not explicitly
 2377 state which license is being used.

Dataset	License	Description of usage
2379 Unsplash Ali et al. (2023)	https://unsplash.com/license	We crawled some images for annotation and labeling.
2380 ContPhy Zheng et al. (2024)	CC-BY 4.0	We used his code to generate some of the simulation data.
2381 ChronoMagic-Bench Yuan et al. (2024)	Apache 2.0	As source data, we annotated some QA.
2382 DROID Khazatsky et al. (2024)	CC-BY 4.0	As source data, we annotated some QA data belonging to physics-based dynamics–manuplation type.
2383 Ego4D Grauman et al. (2022)	CC-BY 4.0	As source data, we annotated some QA data belonging to physics-based dynamics–manuplation type.
2384 MimicPlay Wang et al. (2023a)	CC-BY 4.0	As source data, we annotated some QA data belonging to physics-based dynamics–manuplation type.
2385 nuScenes Caesar et al. (2019)	CC BY-NC-SA 4.0	As source data, we annotated some QA data belonging to spatial movement type.
2386 Netwon Wang et al. (2023c)	CC-BY 4.0	As reference data for us to create the attribute table for objects.
2387 FunKPoint Lai et al. (2021)	None	As source data, we annotated some QA data belonging to physics-based dynamics–manuplation type.
2388 PhotoTourism Snavely et al. (2006)	None	As source data, we annotated some QA data belonging to physical scene understanding–camera type.

2390

2391

2392

2393

2394

Each image or video is followed by a description, which you can refer to. Answer with the option’s letter from the given choices directly.

2395

(1.3) The prompt for PLR is:

2396

2397

2398

Each image or video is replaced by description. Answer with the option’s letter from the given choices directly.

2399

2400

For GPT-4o:

2401

2402

2403

2404

(2.1) The prompt for CoT (Kojima et al., 2023) is:

Let’s think step by step! Start by selecting the correct option’s letter from the given choices, then provide a detailed explanation of your thought process.

2405

2406

2407

2408

2409

2410

(2.2) The prompt for Desp-CoT (Wu et al., 2023d) is:

Each image or video is followed by a description, which you can refer to. Answer with the option’s letter from the given choices directly.

2411

2412

2413

(2.3) The prompt for PLR is:

Each image or video is replaced by description. Answer with the option’s letter from the given choices directly.

2414

2415

2416

2417

2418

We used the following prompts to generate the corresponding descriptions for each model (for image descriptions, “video” is replaced with “image” where applicable):

Give me the description of this video.

2419

2420

2421

2422

2423

2424

2425

E.7 VIPERGPT IMPLEMENTATION

Following the methodology described in ContPhy (Zheng et al., 2024), since the code for its model, ContPro, has not been released, we implemented an oracle neural-symbolic model using ViperGPT (Surís et al., 2023), which we refer to as ContPhy, and evaluated it on the PhysBench. Similar to ContPhy (Zheng et al., 2024), we decomposed the question-answering task into four main modules: video perception, physical simulation, program parser, and symbolic execution.

2426

2427

2428

2429

Given a raw video, the video perception module detects objects and their associated static attributes using the MASK-RCNN detector (He et al., 2017). The physical simulator takes point clouds as input and predicts object dynamics across various scenarios using dynamic prediction models (Li et al., 2018; Sulsky et al., 1995). The program parser, powered by a large language model (we use GPT-4o), translates the question query into executable Python programs. Based on the detected

2430 object attributes and predicted dynamics, the symbolic executor runs the programs to derive the
2431 answer to the question.

2432
2433 Since neuro-symbolic approaches rely on pre-trained domain-specific modules to extract objects’
2434 static attributes, physical properties, and dynamic trajectories, this method is not suitable for the
2435 complex and diverse tasks in PhysBench. For instance, in ContPhy, simulating four types of
2436 tasks—rope, cloth, ball, and fluid—requires pre-training three models: MASK R-CNN (He et al.,
2437 2017) based on Detectron2 (Wu et al., 2019), DPI-Net (Li et al., 2018), and Material Point Method
2438 (MPM) (Sulsky et al., 1995). Given the variety of tasks in PhysBench, where even individual tasks
2439 within certain subcategories can differ significantly, it is impractical to design and call a specific
2440 module for every task. Therefore, we designed an Oracle model for the QA pairs generated through
2441 specific simulations to ensure that the tasks are similar enough to allow the use of consistent logical
2442 processing templates following Zheng et al. (2024), while GPT-4o directly provided answers for
2443 the remaining questions without invoking additional modules or running Python code.

2443 Following the approach in ContPhy, we use ResNet-50 (He et al., 2016) as the backbone for MASK
2444 R-CNN to densely detect object locations in each frame and associate static attributes such as color
2445 and material. We use the default config from Detectron2, while the number of classes is different
2446 across scenarios. Specifically, the batch size is 16 for 8 GPUs thus each mini-batch has 2 images per
2447 GPU. We train the model for about $10k$ iterations, with a learning rate of 0.01. For image size, we
2448 keep the original resolution.

2449 We fine-tune the network using the training set data from all simulations. For scenes involving fluid
2450 and soft-body dynamics, we adopt MPM, while DPI-Net is used for other tasks. The training data
2451 for these two modules is similar to that of MASK R-CNN, and the overall training procedure is
2452 comparable to ContPhy. After extracting objects’ static attributes, physical properties, and dynamic
2453 trajectories, and parsing the natural language query into an executable program, we run the program
2454 using the object states as input and produce the predicted answer. Due to the rich diversity and
2455 versatile resources of our dataset, it is challenging to ensure that templates perfectly fit all predefined
2456 modules. For example, some videos become significantly distorted when rescaled into a square
2457 format, and in certain videos, fluids are difficult to extract as points due to their similar color to
2458 the environment. For the specific training parameters of MPM and DPI-Net, we have kept them
2459 consistent with ContPhy.

2460 E.8 HUMAN PERFORMANCE

2461
2462 To evaluate human performance on PhysBench, we recruited 12 graduate students in STEM fields
2463 and provided monetary compensation for their participation. Each question was assigned to all
2464 annotators. To ensure the quality of the results, we followed the methodology of MathVista (Lu
2465 et al., 2024) by implementing qualification questions during participant recruitment. These questions
2466 tested basic knowledge of physical world concepts, and only those who answered the qualification
2467 questions correctly were deemed eligible for the study. Given the large number of questions in
2468 PhysBench, the testing was divided into 10 sessions, delivered as online questionnaires with no time
2469 constraints for completion. The average score across all participants was used as the final measure
2470 of human performance.

2471 F MORE EXPERIMENTS RESULTS

2472 F.1 GROUNDINGDINO CONFIGURATION

2473
2474
2475
2476
2477 GroundingDINO has two key parameters: `box_threshold` and `text_threshold`. The `box_threshold`
2478 parameter is used to filter predictions based on the confidence level of the detected bounding boxes,
2479 ensuring that only boxes with confidence scores above this threshold are retained. On the other hand,
2480 the `text_threshold` parameter filters predictions based on their relevance to the input text prompt,
2481 retaining only those that meet or exceed this threshold.

2482
2483 It is important to note that the filtered phrases may contain a significant number of duplicates. To
address this, we consider a prediction successful only if the set of output phrases matches exactly


2484 with the set of input phrases, ensuring both completeness and accuracy. The detailed experimental
 2485 results are presented in Table 13.
 2486

2487 Table 13: **GroundingDINO Accuracy with different box threshold and text threshold.** The
 2488 number of samples tested is 1000.
 2489

2490	box threshold	text threshold	0.1	0.2	0.3	0.4	0.5	0.6	0.7
2491		0.1	0.015	0	0	0	0	0	0
2492		0.2	0.015	0.075	0.005	0.005	0	0	0
2493		0.3	0.01	0.03	0.06	0.01	0.005	0	0
2494		0.4	0.005	0.015	4	4	0	0	0
2495		0.5	0.005	0.005	0	0	0	0	0
2496		0.6	0.005	0	0	0	0	0	0
2497		0.7	0.005	0	0	0	0	0	0

2498 F.2 EFFECT OF VISUAL PROMPTING

2500 To enhance the VLM’s responsiveness to visual prompts, we assessed its sensitivity to these prompts.
 2501 The images used in our tests were all 1024×1024 pixels. We employed two different annotation
 2502 methods for depth and attribute sub-tasks, as illustrated in Figure 23, drawing on BLINK (Fu et al.,
 2503 2024) for reference. For depth, the default color for circles is red. Method (a) follows the ap-
 2504 proach introduced in the BLINK paper, while the second method aligns exactly with the instances in
 2505 BLINK-eval. Additionally, the prompts for both methods are largely similar to those in the BLINK-
 2506 eval examples. Similarly, for attributes, we experimented with two annotation methods, denoted
 2507 as (c) and (d) in Figure 23. However, since the white text doesn’t look very clear in the yellow
 2508 checkbox in the first method, the yellow color was selected.
 2509

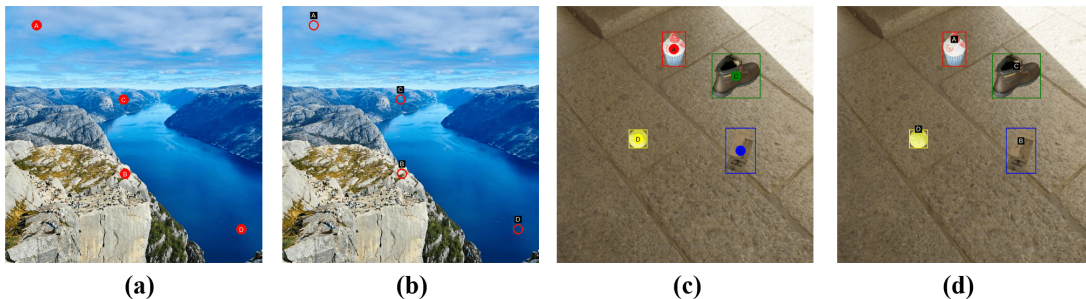

2520 Figure 23: **Several different labeling methods.** (a) (b) are two methods for labeling depth. (c) (d)
 2521 are two labeling methods for attributes. Attribute also try (a)(b)
 2522

2523 The test images comprise 1000 samples, with a uniform circle radius of 20 pixels and a font size of
 2524 25 pixels. The detailed experimental results are presented in Table 14. For samples (a) and (b), the
 2525 text prompts require selecting the location or object indicated by the prompt, while samples (c) and
 2526 (d) involve identifying a bounding box or point. For instance, answers for (c) and (d) might be "A.
 2527 The object enclosed in the red box at point A" using both color and letter identifiers.

2528 Based on the experimental results, we find that the outcomes for (a) and (b) are similar in terms of
 2529 depth and attribute, though (a) performs slightly better. For attributes, (c) and (d) yield results close
 2530 to random, likely because the tested models cannot perceive color differences in the bounding boxes,
 2531 thus failing to answer effectively. However, (a) and (b) significantly improve accuracy. Therefore,
 2532 we ultimately decided to use the annotation method in (a).

2533 Building on the findings of the previous experiment, we further tested the impact of varying circle
 2534 sizes using the annotation method, which showed the best model performance. The corresponding
 2535 results are detailed in Table 15. Additionally, the text size was consistently 5 pixels larger than the
 2536 center of the circle. Based on the previous experiment, we adopted the annotation method (a) for
 2537 all subsequent annotations. Therefore, we used method (a) to test depth, with a sample size of 1000
 images.

Table 14: Comparison of Visual Prompts for Depth and Attribute Annotation.

	Depth		Attribute			
	Prompt (a)	Prompt (b)	Prompt (a)	Prompt (b)	Prompt (c)	Prompt(d)
LLaVA-1.5-7b	27.3	27.2	31.5	29.9	25.3	25.2
LLaVA-1.5-13b	21.2	20.2	41.1	38.5	26.0	25.6
Phi-3V-128k	78.2	75.8	41.2	40.1	24.8	25.1
VILA-1.5-8b	19.9	20.3	27.9	26.1	25.9	24.7

We have tested 6 scales as shown in Figure 24 and the results indicate that for LLaVA-1.5, larger sizes generally yield better results. For Phi-3V and VILA-1.5, the optimal radius is 30 pixels, although performance does not show a significant relationship on either side of 30 pixels. Most models show low sensitivity to size variations, except for LLaVA-1.5-7b. To balance performance and aesthetics, we ultimately selected a radius size of 30 pixels.

Table 15: Effects of different visual prompt circle radius on Depth task performance.

	10	20	30	40	50	60
LLaVA-1.5-7b	19.2	27.3	27.3	28.4	30.9	31.2
LLaVA-1.5-13b	19.9	21.2	24.9	25.2	25.8	27.9
Phi-3V-128k	74.7	78.2	78.8	76.8	73.1	73.0
VILA-1.5-8b	20.3	19.9	26.9	25.3	26.7	22.2



Figure 24: Visual Prompt with Different Size.

F.3 MORE PHYSBENCH RESULTS

The performance of 39 models across 8 ability categories in PhysBench is shown in Table 16 (the ability classifications for the physical scene understanding and physics-based dynamics categories are the same, though their content differs slightly, and are combined here for display). Detailed ability classifications can be found in Appendix C.1.

The details for Ability Type, Physical Object Property, Physical Object Relationships, Physical Scene Understanding, and Physics-based Dynamics can be found in Table 16, Table 17, Table 18, Table 19, Table 20, respectively.

2592
2593
2594
2595
2596
2597
2598
2599
2600
2601
2602
2603
2604
2605
2606
2607
2608
2609
2610
2611
2612
2613
2614
2615
2616
2617
2618
2619
2620
2621
2622
2623
2624
2625
2626
2627
2628
2629
2630
2631
2632
2633
2634
2635
2636
2637
2638
2639
2640
2641
2642
2643
2644
2645

Model	Identify	Comparison	Static	Dynamic	Perception	Prediction	Judgment	Reasoning
Image VLM								
InstructBLIP-t5-xl Dai et al. (2024)	48.30	25.39	36.38	35.76	40.06	34.07	42.74	35.83
InstructBLIP-t5-xxl Dai et al. (2024)	57.63	28.40	33.21	53.64	41.90	32.62	47.58	36.28
InstructBLIP-7B Dai et al. (2024)	25.02	19.31	30.98	24.50	32.21	23.74	29.91	18.28
InstructBLIP-13B Dai et al. (2024)	39.49	25.70	32.46	35.33	35.88	27.12	33.62	20.18
BLIP-2 Li et al. (2023c)	55.97	30.78	36.01	53.64	42.51	33.24	48.15	34.29
LLaVA-1.5-7B Liu et al. (2023a)	47.78	31.26	40.30	45.70	47.40	39.90	45.01	37.38
LLaVA-1.5-13B Liu et al. (2023a)	52.48	32.70	42.16	42.38	51.17	40.87	43.02	32.65
LLaVA1.6-mistral Liu et al. (2024b)	36.79	23.82	23.13	21.19	29.15	15.93	28.21	4.97
LLaVA1.6-vicuna Liu et al. (2024b)	52.48	30.78	65.49	42.38	49.75	39.08	43.30	37.13
Qwen-VL-Chat Bai et al. (2023b)	51.44	23.75	44.96	39.74	45.16	37.09	50.14	24.25
InternVL-Chat1.5 Chen et al. (2024c)	64.78	43.96	74.81	56.29	53.62	41.35	44.16	34.39
Cambrian-8B Tong et al. (2024)	28.60	18.57	20.52	13.25	22.02	33.65	11.68	25.65
Claude-3-opus Anthropic (2024)	53.71	32.70	35.82	58.28	43.93	32.90	43.30	27.83
Claude-3-sonnet Anthropic (2024)	47.78	29.97	36.75	52.32	38.43	36.47	43.02	30.22
Claude-3-haiku Anthropic (2024)	53.71	34.95	52.05	60.93	47.20	35.71	43.87	27.73
Claude-3.5-sonnet Anthropic (2024)	61.46	34.33	36.19	58.94	43.32	34.00	47.01	25.15
Video VLM								
Video-LLaVA Lin et al. (2023a)	47.08	29.15	35.45	35.10	42.71	40.59	43.59	31.16
Chat-Univi-7B Jin et al. (2023)	25.46	14.54	18.10	31.79	24.16	29.74	31.05	18.29
Chat-Univi-13B Jin et al. (2023)	6.10	3.07	12.50	7.95	13.86	9.00	9.69	17.10
PLLaVA-7B Xu et al. (2024)	47.95	30.31	31.72	49.67	42.71	39.42	40.46	34.74
PLLaVA-13B Xu et al. (2024)	50.39	31.60	36.94	43.71	44.44	39.77	41.60	29.17
General VLM + Interleaved Data								
LLaVA-interleave Li et al. (2024b)	59.37	37.68	44.21	49.02	47.40	39.07	28.52	32.74
LLaVA-interleave-dpo Li et al. (2024b)	61.73	37.41	42.90	36.60	47.81	40.84	28.77	31.40
VILA-1.5-3B Lin et al. (2023b)	38.01	28.46	32.15	40.52	39.65	36.15	32.99	33.65
VILA-1.5-3B-s2 Lin et al. (2023b)	38.71	29.22	29.12	39.87	39.04	30.97	31.71	34.99
VILA-1.5-8B Lin et al. (2023b)	39.06	29.15	28.97	39.87	37.41	42.48	21.23	30.54
VILA-1.5-13B Lin et al. (2023b)	50.74	32.90	39.25	47.71	44.24	35.94	31.97	29.44
Phi-3V Abdin et al. (2024)	55.01	34.68	36.64	52.94	47.81	35.06	32.35	32.74
LLaVA-NV Zhang et al. (2024b)	47.78	31.26	29.85	38.56	42.41	38.76	31.63	32.22
LLaVA-NV-dpo Zhang et al. (2024b)	47.52	32.22	45.28	40.52	43.53	38.35	32.01	31.74
Mantis-Idedics2 Jiang et al. (2024)	55.36	31.88	41.18	41.83	42.92	36.76	33.25	27.00
Mantis-LLaVA Jiang et al. (2024)	59.81	32.76	29.28	41.18	41.18	36.28	30.43	33.75
Mantis-siglip-llama3 Jiang et al. (2024)	55.01	32.63	32.72	30.72	42.41	40.84	31.46	34.47
Mantis-clip-llama3 Jiang et al. (2024)	52.40	31.60	34.71	36.60	40.16	42.75	31.33	30.68
GPT-4V Achiam et al. (2023)	65.13	37.41	44.05	64.71	55.15	34.99	41.43	24.41
GPT-4o Achiam et al. (2023)	71.23	45.73	64.20	71.90	56.37	42.75	43.99	28.63
GPT-4o-mini Achiam et al. (2023)	74.46	36.86	42.90	60.13	55.45	41.25	35.04	27.96
Gemini-1.5-flash Team et al. (2023)	74.89	43.55	51.51	60.78	54.23	39.05	33.76	31.69
Gemini-1.5-pro Team et al. (2023)	72.28	45.46	63.57	65.36	53.41	37.92	37.08	34.85

Table 16: **Evaluation Results for 39 VLMs Categorized by Ability Dimensions.** PhysBench includes two evaluation dimensions: ability and task. Table 3 presents results categorized by the task-type dimension.

2646
2647
2648
2649
2650
2651
2652
2653
2654
2655
2656
2657
2658
2659
2660
2661
2662
2663
2664
2665
2666
2667
2668
2669
2670
2671
2672
2673
2674
2675
2676
2677
2678
2679
2680
2681
2682
2683
2684
2685
2686
2687
2688
2689
2690
2691
2692
2693
2694
2695
2696
2697
2698
2699

Model	Number	Mass	Color	Attribute
Image VLM				
InstructBLIP-t5-xl Dai et al. (2024)	47.14	22.18	44.33	31.37
InstructBLIP-t5-xxl Dai et al. (2024)	52.86	43.00	54.00	33.22
InstructBLIP-7B Dai et al. (2024)	11.23	34.93	35.57	20.66
InstructBLIP-13B Dai et al. (2024)	29.12	28.67	43.33	30.77
BLIP-2 Li et al. (2023c)	51.30	50.85	47.33	34.63
LLaVA-1.5-7B Liu et al. (2023a)	38.99	36.86	52.67	35.42
LLaVA-1.5-13B Liu et al. (2023a)	41.59	52.22	56.67	35.63
LLaVA1.6-mistral Liu et al. (2024b)	34.49	32.42	32.67	26.76
LLaVA1.6-vicuna Liu et al. (2024b)	41.07	35.15	61.33	36.41
Qwen-VL-Chat Bai et al. (2023b)	48.35	21.50	51.33	30.45
InternVL-Chat1.5 Chen et al. (2024c)	53.73	57.68	71.00	48.12
Cambrian-8B Tong et al. (2024)	38.13	14.68	25.67	18.52
Claude-3-opus Anthropic (2024)	45.75	54.95	50.33	35.77
Claude-3-sonnet Anthropic (2024)	38.30	44.71	50.00	33.64
Claude-3-haiku Anthropic (2024)	40.73	53.24	62.00	38.18
Claude-3.5-sonnet Anthropic (2024)	56.67	58.02	60.33	36.69
Video VLM				
Video-LLaVA Lin et al. (2023a)	38.13	28.33	53.00	34.49
Chat-Univi-7B Jin et al. (2023)	22.70	22.87	23.00	16.32
Chat-Univi-13B Jin et al. (2023)	2.43	3.07	4.00	5.32
PLLaVA-7B Xu et al. (2024)	35.36	48.46	56.33	33.07
PLLaVA-13B Xu et al. (2024)	34.84	47.44	65.00	35.06
General VLM + Interleaved Data				
LLaVA-interleave Li et al. (2024b)	51.30	47.44	65.33	41.66
LLaVA-interleave-dpo Li et al. (2024b)	55.29	41.30	67.33	42.23
VILA-1.5-3B Lin et al. (2023b)	39.17	29.01	27.00	31.37
VILA-1.5-3B-s2 Lin et al. (2023b)	38.82	30.72	28.00	32.29
VILA-1.5-8B Lin et al. (2023b)	39.86	24.23	33.33	32.72
VILA-1.5-13B Lin et al. (2023b)	48.01	36.52	40.00	38.47
Phi-3V Abdin et al. (2024)	43.15	37.88	63.00	40.81
LLaVA-NV Zhang et al. (2024b)	35.70	38.57	55.67	35.70
LLaVA-NV-dpo Zhang et al. (2024b)	36.40	39.59	54.67	36.34
Mantis-Idedics2 Jiang et al. (2024)	47.49	32.76	65.33	36.69
Mantis-LLaVA Jiang et al. (2024)	58.41	40.27	61.33	35.98
Mantis-siglip-llama3 Jiang et al. (2024)	45.41	37.88	61.00	38.11
Mantis-clip-llama3 Jiang et al. (2024)	42.29	40.96	57.67	36.05
GPT-4V Achiam et al. (2023)	52.51	48.81	71.00	43.79
GPT-4o Achiam et al. (2023)	61.18	54.27	71.00	52.52
GPT-4o-mini Achiam et al. (2023)	69.67	50.85	72.33	43.29
Gemini-1.5-flash Team et al. (2023)	72.10	54.95	72.33	48.65
Gemini-1.5-pro Team et al. (2023)	64.99	58.02	75.00	50.04

Table 17: Evaluation Results for 39 VLMs in PhysBench Physical Object Property Sub-task (the fifth last column of Table 3).

2700
2701
2702
2703
2704
2705
2706
2707
2708
2709
2710
2711
2712
2713
2714
2715
2716
2717
2718
2719
2720
2721
2722
2723
2724
2725
2726
2727
2728
2729
2730
2731
2732
2733
2734
2735
2736
2737
2738
2739
2740
2741
2742
2743
2744
2745
2746
2747
2748
2749
2750
2751
2752
2753

Model	Size	Location	Depth	Distance	Movement
Image VLM					
InstructBLIP-t5-xl Dai et al. (2024)	37.50	38.72	30.53	41.67	53.93
InstructBLIP-t5-xxl Dai et al. (2024)	48.21	41.35	27.72	51.67	57.30
InstructBLIP-7B Dai et al. (2024)	33.93	30.92	26.35	20.00	37.08
InstructBLIP-13B Dai et al. (2024)	26.79	39.10	25.26	43.33	48.31
BLIP-2 Li et al. (2023c)	58.93	44.74	29.47	46.67	59.55
LLaVA-1.5-7B Liu et al. (2023a)	64.29	43.23	35.09	41.67	51.69
LLaVA-1.5-13B Liu et al. (2023a)	57.14	46.24	32.63	45.00	60.67
LLaVA1.6-mistral Liu et al. (2024b)	26.79	19.55	24.56	10.00	37.08
LLaVA1.6-vicuna Liu et al. (2024b)	39.29	51.88	72.98	51.67	59.55
Qwen-VL-Chat Bai et al. (2023b)	33.93	42.11	45.96	38.33	52.81
InternVL-Chat1.5 Chen et al. (2024c)	75.00	66.17	76.14	58.33	61.80
Cambrian-8B Tong et al. (2024)	14.29	7.89	31.93	11.67	5.62
Claude-3-opus Anthropic (2024)	62.50	38.72	31.23	46.67	71.91
Claude-3-sonnet Anthropic (2024)	73.21	42.11	28.77	31.67	62.92
Claude-3-haiku Anthropic (2024)	64.29	54.14	47.37	51.67	68.54
Claude-3.5-sonnet Anthropic (2024)	71.43	46.24	25.96	36.67	69.66
Video VLM					
Video-LLaVA Lin et al. (2023a)	39.29	40.60	27.72	43.33	50.56
Chat-Univi-7B Jin et al. (2023)	28.57	19.55	17.89	25.00	35.96
Chat-Univi-13B Jin et al. (2023)	17.86	16.17	6.32	11.67	15.73
PLLaVA-7B Xu et al. (2024)	48.21	34.59	28.42	41.67	60.67
PLLaVA-13B Xu et al. (2024)	50.00	42.86	28.42	38.33	57.30
General VLM + Interleaved Data					
LLaVA-interleave Li et al. (2024b)	48.21	53.95	69.47	60.00	37.48
LLaVA-interleave-dpo Li et al. (2024b)	41.07	53.26	62.46	63.33	36.17
VILA-1.5-3B Lin et al. (2023b)	50.00	40.89	45.61	46.67	28.42
VILA-1.5-3B-s2 Lin et al. (2023b)	57.14	37.80	37.19	36.67	26.76
VILA-1.5-8B Lin et al. (2023b)	37.50	22.34	29.47	40.00	31.47
VILA-1.5-13B Lin et al. (2023b)	64.29	52.92	60.35	53.33	32.57
Phi-3V Abdin et al. (2024)	66.07	53.61	74.39	48.33	26.69
LLaVA-NV Zhang et al. (2024b)	32.14	35.40	49.47	45.00	26.00
LLaVA-NV-dpo Zhang et al. (2024b)	32.14	35.74	53.68	45.00	50.55
Mantis-Idefics2 Jiang et al. (2024)	39.29	58.42	65.61	65.00	32.50
Mantis-LLaVA Jiang et al. (2024)	37.50	47.08	31.93	46.67	26.56
Mantis-siglip-llama3 Jiang et al. (2024)	41.07	41.58	27.72	38.33	32.23
Mantis-clip-llama3 Jiang et al. (2024)	55.36	39.86	33.68	43.33	33.89
GPT-4V Achiam et al. (2023)	75.00	59.45	61.40	58.33	38.87
GPT-4o Achiam et al. (2023)	85.71	70.45	73.33	83.33	60.58
GPT-4o-mini Achiam et al. (2023)	69.64	51.55	57.19	63.33	39.21
Gemini-1.5-flash Team et al. (2023)	67.86	70.79	66.32	71.67	44.81
Gemini-1.5-pro Team et al. (2023)	66.07	71.48	82.11	68.33	58.30

Table 18: Evaluation Results for 39 VLMs in PhysBench Object Relationships Sub-task (the fourth last column of Table 3).

2754
2755
2756
2757
2758
2759
2760
2761
2762
2763
2764
2765
2766
2767
2768
2769
2770
2771
2772
2773
2774
2775
2776
2777
2778
2779
2780
2781
2782
2783
2784
2785
2786
2787
2788
2789
2790
2791
2792
2793
2794
2795
2796
2797
2798
2799
2800
2801
2802
2803
2804
2805
2806
2807

Model	Temperature	Camera	Gas	Light
Image VLM				
InstructBLIP-t5-xl Dai et al. (2024)	70.59	43.26	26.00	30.03
InstructBLIP-t5-xxl Dai et al. (2024)	80.88	43.36	40.00	30.30
InstructBLIP-7B Dai et al. (2024)	36.76	22.94	12.00	14.74
InstructBLIP-13B Dai et al. (2024)	57.35	21.61	30.61	19.86
BLIP-2 Li et al. (2023c)	79.41	40.90	30.00	29.48
LLaVA-1.5-7B Liu et al. (2023a)	61.76	44.58	24.00	31.76
LLaVA-1.5-13B Liu et al. (2023a)	50.00	40.06	38.00	28.03
LLaVA1.6-mistral Liu et al. (2024b)	45.59	5.66	40.00	8.01
LLaVA1.6-vicuna Liu et al. (2024b)	57.35	44.67	32.00	31.76
Qwen-VL-Chat Bai et al. (2023b)	66.18	20.55	20.00	29.66
InternVL-Chat1.5 Chen et al. (2024c)	72.06	40.43	34.00	31.48
Cambrian-8B Tong et al. (2024)	11.76	22.05	20.00	24.66
Claude-3-opus Anthropic (2024)	72.06	29.59	86.00	27.93
Claude-3-sonnet Anthropic (2024)	54.41	31.39	36.00	31.30
Claude-3-haiku Anthropic (2024)	73.53	26.86	42.00	29.94
Claude-3.5-sonnet Anthropic (2024)	75.00	27.80	68.00	24.48
Video VLM				
Video-LLaVA Lin et al. (2023a)	67.65	39.40	30.00	26.02
Chat-Univi-7B Jin et al. (2023)	50.00	14.80	20.00	20.75
Chat-Univi-13B Jin et al. (2023)	20.59	13.29	16.00	17.93
PLLaVA-7B Xu et al. (2024)	60.29	40.81	22.00	31.12
PLLaVA-13B Xu et al. (2024)	66.18	30.63	36.00	30.39
General VLM + Interleaved Data				
LLaVA-interleave Li et al. (2024b)	64.71	36.48	41.82	32.85
LLaVA-interleave-dpo Li et al. (2024b)	61.76	35.34	47.27	30.21
VILA-1.5-3B Lin et al. (2023b)	54.41	43.26	14.55	26.11
VILA-1.5-3B-s2 Lin et al. (2023b)	51.47	46.18	10.91	25.48
VILA-1.5-8B Lin et al. (2023b)	44.12	36.29	23.64	25.02
VILA-1.5-13B Lin et al. (2023b)	60.29	32.52	14.55	30.21
Phi-3V Abidin et al. (2024)	52.94	38.93	65.45	29.48
LLaVA-NV Zhang et al. (2024b)	52.94	36.29	18.18	31.12
LLaVA-NV-dpo Zhang et al. (2024b)	51.47	35.25	20.00	31.94
Mantis-Idedics2 Jiang et al. (2024)	63.24	27.43	47.27	29.39
Mantis-LLaVA Jiang et al. (2024)	58.82	41.28	23.64	30.57
Mantis-siglip-llama3 Jiang et al. (2024)	51.47	42.41	43.64	30.57
Mantis-clip-llama3 Jiang et al. (2024)	52.94	33.93	27.27	30.21
GPT-4V Achiam et al. (2023)	88.24	25.07	85.45	22.02
GPT-4o Achiam et al. (2023)	91.18	22.05	83.64	32.67
GPT-4o-mini Achiam et al. (2023)	82.35	28.56	83.64	27.75
Gemini-1.5-flash Team et al. (2023)	85.29	33.74	78.18	30.48
Gemini-1.5-pro Team et al. (2023)	85.29	37.32	76.36	31.85

Table 19: Evaluation Results for 39 VLMs in PhysBench Physical 🌳 Scene Understanding Sub-task (the third last column of Table 3).

2808
2809
2810
2811
2812
2813
2814
2815
2816
2817
2818
2819
2820
2821
2822
2823
2824
2825
2826
2827
2828
2829
2830
2831
2832
2833
2834
2835
2836
2837
2838
2839
2840
2841
2842
2843
2844
2845
2846
2847
2848
2849
2850
2851
2852
2853
2854
2855
2856
2857
2858
2859
2860
2861

Model	Collision	Throwing	Manipulation	Fluid	Chemistry	Others
Image VLM						
InstructBLIP-t5-xl Dai et al. (2024)	31.49	34.68	27.89	32.41	62.16	58.16
InstructBLIP-t5-xxl Dai et al. (2024)	32.72	31.35	29.90	33.33	52.70	58.84
InstructBLIP-7B Dai et al. (2024)	19.97	26.60	27.96	29.94	27.03	38.10
InstructBLIP-13B Dai et al. (2024)	28.26	15.44	27.89	35.65	33.78	46.60
BLIP-2 Li et al. (2023c)	33.64	35.39	30.40	31.17	59.46	58.84
LLaVA-1.5-7B Liu et al. (2023a)	36.25	37.77	41.21	45.37	59.46	55.10
LLaVA-1.5-13B Liu et al. (2023a)	33.18	34.92	46.73	50.15	60.81	60.20
LLaVA1.6-mistral Liu et al. (2024b)	24.12	11.64	12.81	7.56	62.16	50.34
LLaVA1.6-vicuna Liu et al. (2024b)	33.03	35.39	44.97	45.22	52.70	61.90
Qwen-VL-Chat Bai et al. (2023b)	32.57	33.25	37.19	47.84	59.46	59.86
InternVL-Chat1.5 Chen et al. (2024c)	35.94	39.90	42.71	43.67	55.41	73.47
Cambrian-8B Tong et al. (2024)	24.88	39.43	28.89	30.56	36.49	23.47
Claude-3-opus Anthropic (2024)	35.79	28.98	25.63	27.78	58.11	69.73
Claude-3-sonnet Anthropic (2024)	38.25	30.64	26.13	35.19	44.59	57.48
Claude-3-haiku Anthropic (2024)	35.94	39.90	34.42	30.40	67.57	68.37
Claude-3.5-sonnet Anthropic (2024)	34.25	37.05	27.64	28.09	50.00	71.09
Video VLM						
Video-LLaVA Lin et al. (2023a)	35.48	38.48	29.15	46.30	54.05	53.74
Chat-Univi-7B Jin et al. (2023)	29.80	37.77	5.78	26.39	52.70	40.48
Chat-Univi-13B Jin et al. (2023)	5.38	12.59	12.81	11.27	20.27	17.01
PLLaVA-7B Xu et al. (2024)	33.79	40.86	28.89	41.20	59.46	57.14
PLLaVA-13B Xu et al. (2024)	36.25	39.43	29.90	39.20	58.11	63.61
General VLM + Interleaved Data						
LLaVA-interleave Li et al. (2024b)	31.98	41.57	26.30	40.43	45.95	56.40
LLaVA-interleave-dpo Li et al. (2024b)	33.63	40.38	28.59	44.60	50.00	54.22
VILA-1.5-3B Lin et al. (2023b)	31.07	38.00	30.88	39.35	35.14	45.78
VILA-1.5-3B-s2 Lin et al. (2023b)	25.64	35.63	30.76	33.02	40.54	45.78
VILA-1.5-8B Lin et al. (2023b)	35.29	37.05	18.58	52.16	51.35	41.42
VILA-1.5-13B Lin et al. (2023b)	32.43	35.87	30.88	38.73	45.95	46.87
Phi-3V Abdin et al. (2024)	33.18	35.39	28.95	35.34	59.46	56.68
LLaVA-NV Zhang et al. (2024b)	29.71	41.57	29.35	44.44	59.46	45.90
LLaVA-NV-dpo Zhang et al. (2024b)	29.41	39.43	30.92	44.44	54.05	46.45
Mantis-Idefics2 Jiang et al. (2024)	32.88	33.25	28.59	38.43	41.89	57.49
Mantis-LLaVA Jiang et al. (2024)	27.75	40.14	28.11	40.74	43.24	41.96
Mantis-siglip-llama3 Jiang et al. (2024)	34.09	35.87	25.33	46.14	60.81	50.14
Mantis-clip-llama3 Jiang et al. (2024)	36.95	41.33	22.92	45.06	52.70	56.13
GPT-4V Achiam et al. (2023)	35.29	25.18	35.22	41.20	70.27	81.20
GPT-4o Achiam et al. (2023)	43.74	46.32	35.22	39.20	62.16	86.92
GPT-4o-mini Achiam et al. (2023)	37.41	39.90	25.33	46.76	71.62	78.75
Gemini-1.5-flash Team et al. (2023)	38.86	38.95	24.61	38.43	70.27	77.38
Gemini-1.5-pro Team et al. (2023)	34.24	39.43	27.62	39.81	68.92	80.93

Table 20: Evaluation Results for 39 VLMs in PhysBench Physics-based Δ Dynamics Sub-task (the second last column of Table 3).

F.4 PHYSBENCH-VAL RESULTS

	Size	Format	Property	Relationships	Scene	Dynamics	Avg
Random Choice	-	-	25.00	25.00	25.00	25.00	25.00
Image VLM							
InstructBLIP-t5-xl Dai et al. (2024)	4B	merge	40.54	47.62	45.95	44.44	44.69
InstructBLIP-t5-xxl Dai et al. (2024)	12B	merge	48.65	52.38	43.24	49.21	48.60
InstructBLIP-7B Dai et al. (2024)	7B	merge	28.57	30.95	36.36	35.48	33.14
InstructBLIP-13B Dai et al. (2024)	13B	merge	30.56	32.50	60.00	36.51	37.80
BLIP-2 Li et al. (2023c)	12B	merge	51.35	52.38	37.84	46.03	46.93
LLaVA-1.5-7B Liu et al. (2023a)	7B	merge	37.84	54.76	43.24	52.38	48.04
LLaVA-1.5-13B Liu et al. (2023a)	13B	merge	56.76	52.38	29.73	42.86	45.25
LLaVA1.6-mistral Liu et al. (2024b)	7B	merge	43.24	30.95	35.14	39.68	37.43
LLaVA1.6-vicuna Liu et al. (2024b)	7B	merge	59.46	42.86	37.84	49.21	47.49
Qwen-VL-Chat Bai et al. (2023b)	9B	merge	40.54	45.24	40.54	44.44	43.02
InternVL-Chat1.5 Chen et al. (2024c)	26B	merge	62.16	61.90	54.05	57.14	58.66 🏆
Cambrian-8B Tong et al. (2024)	8B	merge	8.11	21.43	21.62	28.57	21.23
Claude-3-opus Anthropic (2024)	-	merge	45.95	61.90	45.95	57.14	<u>53.63</u> 🏆
Claude-3-sonnet Anthropic (2024)	-	merge	40.54	66.67	43.24	38.10	46.37
Claude-3-haiku Anthropic (2024)	-	merge	56.76	59.52	35.14	49.21	50.28
Claude-3.5-sonnet Anthropic (2024)	-	merge	54.05	69.05	40.54	50.79	<u>53.63</u> 🏆
Video VLM							
Video-LLaVA Lin et al. (2023a)	7B	seq	43.24	33.33	48.65	52.38	45.25
Chat-Univi-7B Jin et al. (2023)	7B	seq	24.32	28.57	29.73	33.33	29.61
Chat-Univi-13B Jin et al. (2023)	13B	seq	8.11	21.43	18.92	17.46	16.76
PLLaVA-7B Xu et al. (2024)	7B	seq	48.65	47.62	32.43	53.97	<u>46.93</u> 🏆
PLLaVA-13B Xu et al. (2024)	13B	seq	51.35	50.00	40.54	58.73	51.40 🏆
General VLM + Interleaved data							
LLaVA-interleave Li et al. (2024b)	7B	seq	48.65	59.57	43.24	51.90	51.50
LLaVA-interleave-dpo Li et al. (2024b)	7B	seq	40.54	48.94	48.65	50.63	48.00
VILA-1.5-3B Lin et al. (2023b)	3B	seq	37.84	51.06	43.24	36.71	41.50
VILA-1.5-3B-s2 Lin et al. (2023b)	3B	seq	35.14	51.06	43.24	36.71	41.00
VILA-1.5-8B Lin et al. (2023b)	8B	seq	24.32	29.79	43.24	36.71	34.00
VILA-1.5-13B Lin et al. (2023b)	13B	seq	32.43	51.06	37.84	45.57	43.00
Phi-3V Abdin et al. (2024)	4B	seq	54.05	61.70	51.35	49.37	53.50
LLaVA-NV Zhang et al. (2024b)	7B	seq	45.95	40.43	32.43	46.15	42.21
LLaVA-NV-dpo Zhang et al. (2024b)	7B	seq	48.65	41.86	29.73	46.15	42.56
Mantis-Idefics2 Jiang et al. (2024)	8B	seq	40.54	46.81	43.24	45.57	44.50
Mantis-LLaVA Jiang et al. (2024)	7B	seq	43.24	29.79	45.95	35.44	37.50
Mantis-siglip-llama3 Jiang et al. (2024)	8B	seq	67.57	34.04	40.54	40.51	44.00
Mantis-clip-llama3 Jiang et al. (2024)	8B	seq	54.05	42.55	35.14	44.30	44.00
GPT-4V Achiam et al. (2023)	-	seq	62.16	68.09	43.24	67.09	62.00
GPT-4o Achiam et al. (2023)	-	seq	72.97	74.47	54.05	62.03	65.50 🏆
GPT-4o-mini Achiam et al. (2023)	-	seq	64.86	57.45	45.95	63.29	59.00
Gemini-1.5-flash Team et al. (2023)	-	seq	64.86	74.47	54.05	63.29	64.50
Gemini-1.5-pro Team et al. (2023)	-	seq	59.46	70.21	56.76	68.35	<u>65.00</u> 🏆


Table 21: **Evaluation results for 39 vision-language models in PhysBench-val.** Note that the evaluation of General VLMs is based on the data from Video and Image VLM evaluations, with the addition of interleaved data, meaning that the full test dataset of PhysBench is being assessed. In this context, “seq” refers to the sequential input of images after frame selection from videos, while “merge” refers to merging video frames into a single image.

2916
2917

F.5 EMBODIED TASKS DETAILED DESCRIPTION

2918
2919
2920
2921
2922
2923
2924
2925
2926


To further validate the effectiveness of our data and method, we built a simulation platform using MuJoCo (Todorov et al., 2012) and the Franka Emika Panda from Menagerie (Zakka et al., 2022), and conducted tests on five embodied tasks. Using the proposed mark-based visual prompting technique with GroundedSAM (Ren et al., 2024) and farthest point sampling (Qi et al., 2017), MOKA (Liu et al., 2024a) converts affordance reasoning into a series of visual question-answering problems that pre-trained VLMs can solve. The setup matches MOKA, and the general visual setup can be seen in Figure 25(a)(b). Our tabletop environment only has one top-down camera, which is the primary camera used in MOKA to capture RGBD images. For each task, we report the number of successes out of 10 trials following the setting of Liu et al. (2024a).

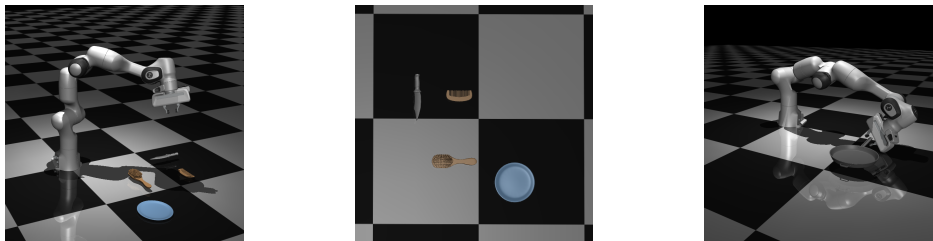2927
2928
2929
2930
2931
2932
2933
2934

2935

(a)

(b)

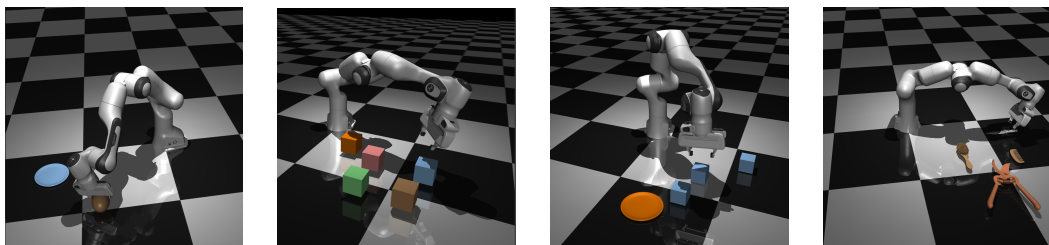2936
2937
2938
2939
2940
2941
2942
2943

(d)

(e)

(f)

(g)

2944
2945
2946
2947
2948
2949
2950

Figure 25: (a) Overview of the simulation platform. (b) Top-down view of the area. (c) Affordance test: Testing whether the robotic arm correctly grasps the object. (d) Force test: Testing whether the robotic arm can properly grasp deformable, fragile, and rigid objects. (e) Color test: Testing whether the robotic arm can pick up the correct colored object among identical ones. (f) Number test: Testing whether the robotic arm can grasp a specific number of objects. (g) Tool test: Testing whether the robotic arm can select the correct tool given a specific scenario.

2951
2952
2953
2954
2955
2956
2957
2958
2959
2960
2961
2962
2963
2964
2965
2966
2967
2968
2969

We present the specific language instructions given to the VLM in Figure 26. It is important to note that, for each task, we only provide a single example. For instance, while we tested five objects in the Affordance task—pot, knife, spoon, monitor, and tennis racket—we only used the tennis racket as an example here. For each task, we report the success rate over 10 trials, following the MOKA protocol. ”Specifically, the test content and evaluation methods for each task are as follows: (1) Affordance test: This test evaluates whether the robotic arm can correctly grasp various objects. Figure 25(c) illustrates the robotic arm successfully grasping a pot. In total, we tested the grasping ability on 10 items, including a pot, knife, spoon, spatula, monitor, tennis racket, phone, and others. Specifically, we tested 5 objects—pot, knife, spoon, monitor, and tennis racket—attempting to grasp each object twice. (2) Force Test: This test evaluates the robotic arm’s capacity to properly grasp deformable, fragile, and rigid objects. Due to simulation constraints, the evaluation was based on the robotic arm’s output metrics. We tested fragile items (e.g., egg, ripe persimmon), soft items (e.g., jelly, plastic cup), and rigid objects (e.g., iron ball), with two attempts per object. It should be noted that the simulation system models all objects as rigid bodies, meaning that breakage during grasping is not depicted. Furthermore, while using the MOKA system to control the Panda robotic arm, we were unable to directly manipulate the gripper’s size. Instead, we provided the VLM with approximate object dimensions, allowing the VLM to determine the necessary gripping force to evaluate success or failure.” (3) Color test: This test evaluates whether the robotic arm can accurately pick up the correctly colored object from a set of identical items. As shown in Figure 25(e), the blocks are identical except for their color, and the task requires selecting the object of the designated color. We tested five colors—blue, pink, brown, green, and orange—conducting two trials for each color.

(4) Location test: This test evaluates whether the robotic arm can correctly grasp objects at specific locations. The goal is to ensure that the robotic arm accurately grasps the required objects based on their positions. Specifically, we tested with three blocks, requiring the arm to grasp the middle block (4 attempts), the block farthest from the plate (3 attempts), and the block closest to the plate (3 attempts). (5) Tool test: This test assesses whether the robotic arm can select the appropriate tool for a given task. For instance, as shown in Figure 25(g), the task is: "If you need to cut a watermelon, which tool should you grasp?" In this scenario, the robotic arm is expected to grasp the fruit knife. In total, we posed 5 questions, with 2 attempts per question, requiring the robotic arm to select and grasp different target tools for each task.

On the other hand, these five tasks require minimal consideration of height (or depth) information, making the evaluation more fundamental. For MOKA’s waypoints selected from free space, their height must be explicitly specified for accurate deprojection into 3D space, as they are not anchored to any objects. For this reason, in typical tabletop manipulation scenarios, MOKA primarily focuses on cases where the waypoints are at the same height as the target point.

Affordance	Grasp the tennis racket.
Force	Grasp the egg.
Color	Grasp the blue cube.
Location	Grab the block farthest from the plate and move it to the plate.
Tool	Grasp the tools for cutting a watermelon.

Figure 26: The language description of the testing tasks.

We present an overview of our implementation of MOKA in Algorithm 1. Our experiments aim to enhance the VLM’s ability to understand the physical world and validate its impact on downstream embodied agent tasks. Specifically, we employ two methods to improve the VLM: first, fine-tuning the VLM using PhysBench, and second, incorporating the PhysAgent to assist during VLM inference. It is worth noting that the five tasks we address are relatively fundamental, unlike the complex multi-action tasks described in the MOKA paper, which require hierarchical decomposition from high- to low-level actions. In our case, the tasks can be executed directly without such decomposition.”

Algorithm 1 MOKA Pipeline

- 1: **Input:** Vision-language Model \mathcal{M} , Task instruction l , text prompt for low-level reasoning p_{low} and initial observation s
- 2: Get observation s from the top-down camera
- 3: Propose keypoint and waypoint candidates and get annotated image $f(s_k)$
- 4: Query \mathcal{M} for low-level motion reasoning, obtain $y_{low} = \mathcal{M}([p_{low}, l, f(s)])$
- 5: Execute y_{low} on the robot in simulation

F.6 CORRELATION MAP

Following the approach of Tong et al. (2024); Fang et al. (2024), we used the Pearson correlation coefficient to construct a relationship matrix. The data used to build this matrix can be found in Table 22.

	VQAv2	GQA	VisWiz	SQA	TextVQA	POPE	MME	MMB	MMBCN	SEED	SEEDI	MMMUval	MMMUtest	LLaVA-bench
LLaVA-1.5-7B	78.5	62.0	50.0	66.8	58.2	85.9	1510.7	64.3	58.3	61.5	67.0	33.2	31.1	63.4
LLaVA-1.5-13B	80.0	63.3	53.6	71.6	61.3	85.9	1531.3	67.7	63.6	62.4	68.2	36.4	33.6	70.7
InstructBLIP-7B	61.1	49.2	34.5	60.5	50.1	78.8	1210.1	36.0	23.7	53.4	58.8	32.9	30.6	60.9
InstructBLIP-13B	62.3	49.5	33.4	63.1	50.7	78.9	1212.8	42.0	25.0	55.2	61.7	35.7	33.8	58.2
Qwen-VL-Chat	78.2	57.5	38.9	68.2	61.5	85.6	1487.5	60.6	56.7	58.2	65.4	35.9	32.9	64.1
VILA-1.5-3B	80.4	61.5	53.5	69.0	60.4	85.9	1442.4	63.4	52.7	60.9	67.9	33.3	30.8	75.9
VILA-1.5-3B-s2	79.8	61.4	61.3	69.6	63.4	85.3	1431.7	62.8	52.2	60.0	66.4	32.8	31.3	76.7
VILA-1.5-8B	80.9	61.9	58.7	79.9	66.3	84.4	1577.0	72.3	66.2	64.2	71.4	36.9	36.0	80.0
VILA-1.5-13B	82.8	64.3	62.6	80.1	65.0	86.3	1569.6	74.9	66.3	65.1	72.6	37.9	33.6	80.8
BLIP-2	41.0	44.6	29.4	61.0	42.1	85.3	1293.8	44.0	27.0	46.4	49.7	35.4	34.0	56.2

Table 22: The performance of the 10 models used to construct the correlation map across 15 other VLM benchmarks.

The correlation presented in Figure 4(a) illustrates the relationships between the four major categories in PhysBench and other tasks. Additionally, we provide a detailed correlation map between PhysBench and 15 other vision-language benchmarks in Figure 27 below.

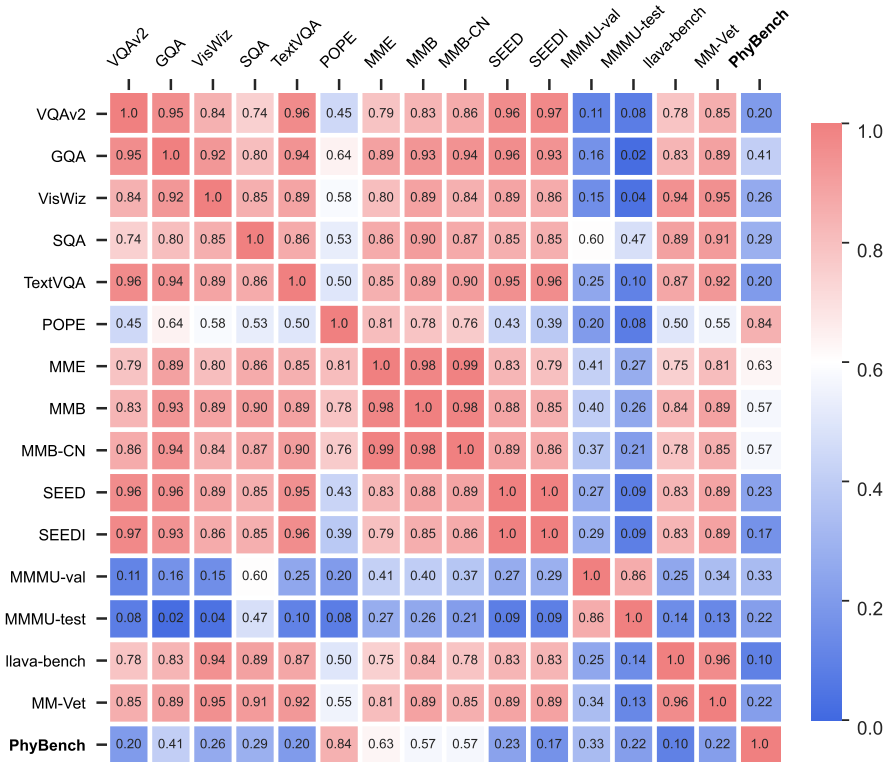


Figure 27: Correlation map between PhysBench and 15 other vision-language benchmarks.

F.7 PERFORMANCE ON RELATED BENCHMARKS

To further evaluate the contribution of our data and model to understanding the physical world, we conducted tests on three existing benchmarks related to physical-world perception. Notably, these benchmarks focus on specific aspects of physical-world perception, whereas our PhysBench provides a more comprehensive and holistic evaluation, as summarized in Table 1. Furthermore, since these datasets were not originally designed for VLMs, we applied necessary preprocessing to adapt them for our evaluations.

Setup. *EmbSpatial* (Du et al., 2024) is a benchmark designed to evaluate spatial understanding within embodied environments with source image come from MP3D (Chang et al., 2017), ScanNet (Dai et al., 2017) and AI2-THOR (Kolve et al., 2017). We utilized its benchmark dataset for testing purposes. *ContPhy* (Zheng et al., 2024) is a benchmark aimed at assessing visual models’ capabilities in perceiving continuous physical phenomena and properties. It comprises four simulation systems based on Unity3D: Fluid Hourglass, Rope-Pulley System, Cloth Magic Trick, and Ball Playground. Since ContPhy primarily targets visual and physical models, we selected 200 items for each of the four categories (split evenly between property-based and dynamics-based tasks) and translate them into multiple-choice format suitable for VLMs. The question prompts were modified to better align with the answering capabilities of VLMs. *Physion++* (Tung et al., 2023) evaluates the impact of physical properties such as mass, friction, elasticity, and deformability on physical phenomena. It leverages the ThreeDWorld simulation platform (Gan et al., 2020) to generate a series of videos, each paired with a corresponding question. The videos consist of an inference phase, where artificial systems can identify objects’ mechanical properties, followed by a prediction phase, where the model must predict whether two specified objects will collide after the video ends. Physion++ is primarily designed for vision models such as ResNet (He et al., 2016) and VGG (Simonyan & Zisserman, 2014), with answers in the form of binary classification (yes/no), derived by converting model outputs into probabilities. To adapt Physion++ for VLMs, we processed the videos and

reformulated the questions into natural language prompts, adding necessary contextual hints. For example, if a video includes a transition phase, we explicitly include a statement like, "The black screen in the video marks a transition in objects or scenes" in the prompt. Due to the small size of the test set, we combined the train and test sets, resulting in 250 VQA pairs for evaluation. During fine-tuning with PhysBench, we modified the options to an open-ended format. The results, presented in Table 23, are reported in terms of accuracy. All parameter settings and configurations are kept consistent with those outlined in the main text.

Table 23: Performance on Three Related Benchmarks.

	ContPhy-Property	ContPhy-Dynamics	Physion++	EmbSpatial
Phi-3V	49.25	43.25	68.80	55.91
Phi-3V + finetune	64.50	62.75	82.20	66.95
Phi-3V + PhysAgent	52.00	44.75	78.40	62.28

Results. As presented in Table 23, leveraging PhysBench data for fine-tuning or in a zero-shot setting with PhysAgent leads to performance improvements across the benchmarks, particularly in Physion++, where improvements of 19.50% and 9.6% are observed, with fine-tuning achieving the most significant gains. These results highlight the effectiveness of our data and methods in enhancing the capability of Vision-Language Models to comprehend the physical world.

F.8 COMPARISON WITH OTHER VLA MODELS





Setup. We selected OpenVLA-7B (Kim et al., 2024) and Octo (Octo Model Team et al., 2024) for evaluation. To test our approach on the Franka Emika Panda 7-DoF robotic arm, we fine-tuned both OpenVLA and Octo. Following the data-efficient adaptation protocol outlined for OpenVLA (Kim et al., 2024), we conducted full fine-tuning of all model parameters using a small dataset of 25 samples (5 per task) tailored to the target simulated robotics tasks. The fine-tuning data was designed to be similar but not identical to the downstream data, with some objects replaced. All fine-tuning parameters and configurations adhered to those specified in the original implementations. Testing was conducted under the same tasks (details in Appendix F.5) and conditions as described in Section 4.2. For all tasks in Section 4.2, we conducted five independent experiments and report the results as average success rates \pm standard error.

Results. As shown in Table 24, MOKA-based methods exhibit superior generalizability, with MOKA outperforming both Octo and OpenVLA. Moreover, fine-tuning using PhyBench or employing PhysAgent in a zero-shot setting significantly improves manipulation performance, achieving a 250% and 180% increase, respectively, in the force task. These results further validate the effectiveness of our dataset and approach.



Table 24: Success Rate across Five Embodied Task.

Method	Affordance	Force	Color	Location	Tool
MOKA	0.56 \pm 0.05	0.20 \pm 0.07	0.70 \pm 0.07	0.66 \pm 0.05	0.36 \pm 0.08
MOKA + finetune	0.86 \pm 0.09	0.70 \pm 0.04	0.76 \pm 0.05	0.78 \pm 0.08	0.72 \pm 0.11
MOKA + PhysAgent	0.74 \pm 0.04	0.56 \pm 0.04	0.74 \pm 0.08	0.68 \pm 0.04	0.40 \pm 0.13
Octo	0.24 \pm 0.08	0.12 \pm 0.04	0.24 \pm 0.11	0.16 \pm 0.05	0.10 \pm 0.07
OpenVLA	0.54 \pm 0.05	0.28 \pm 0.05	0.64 \pm 0.05	0.32 \pm 0.11	0.28 \pm 0.08



F.9 DETAILS FOR FIGURE 9(A)

In this section, we provide the specific numerical values for the four columns presented in Figure 9(a). Specifically, consistent with the classifications mentioned in Section 3.1, Table 25 details the results for the Property and Relationships columns, while Table 26 outlines the results for the Scene and Dynamics columns.

3132
3133
3134
3135
3136
3137
3138
3139
3140
3141
3142
3143
3144
3145
3146
3147
3148
3149
3150
3151
3152
3153
3154
3155
3156
3157
3158
3159
3160
3161
3162
3163
3164
3165
3166
3167
3168
3169
3170
3171
3172
3173
3174
3175
3176
3177
3178
3179
3180
3181
3182
3183
3184
3185

Table 25: **Detailed Results for Figure 9(a) (Part I)**. The first five columns correspond to Property, while the last four columns pertain to Relationships.

Method	Number	Mass	Color	Attribute	Size	Location	Depth	Distance	Movement
ContPhy	62.22	47.10	62.67	48.33	67.86	59.79	67.72	70.00	46.06
Phi-3V	43.15	37.88	63.00	40.81	66.07	53.61	74.39	48.33	26.69
+ CoT	44.89	36.18	60.33	39.11	39.29	48.45	60.35	50.00	26.42
+ Desp-CoT	49.22	29.01	67.00	37.62	66.07	53.61	62.46	55.00	24.69
+ PLR	43.67	26.62	59.67	34.63	58.93	41.92	30.53	43.33	30.43
+ PhysAgent	45.10	40.27	64.67	40.53	67.86	54.98	74.74	66.67	26.76
GPT-4o	61.18	54.27	71.00	52.52	85.71	70.45	73.33	83.33	60.58
+ CoT	63.43	56.66	71.67	54.22	82.14	74.23	75.44	83.33	67.91
+ Desp-CoT	65.16	55.29	71.00	52.16	80.36	68.38	70.18	71.67	61.20
+ PLR	68.63	41.98	66.00	47.27	66.07	57.73	59.30	53.33	43.91
+ PhysAgent	67.07	54.27	73.33	55.86	87.50	78.35	74.04	95.00	71.99

Table 26: **Details Results for Figure 9(a) (Part II)**. The first four columns correspond to Scene, while the last six columns pertain to Dynamics.

Method	Temperature	Camera	Gas	Light	Collision	Throwing	Manipulation	Fluid	Chemistry	Others
ContPhy	73.53	33.08	74.55	36.21	39.67	42.52	36.07	50.15	40.54	58.04
Phi-3V	52.94	38.93	65.45	29.48	33.18	35.39	28.95	35.34	59.46	56.68
+ CoT	55.88	30.73	50.91	26.93	31.83	31.35	31.72	40.43	47.30	50.41
+ Desp-CoT	58.82	40.15	67.27	30.30	34.99	32.07	28.47	31.94	56.76	50.68
+ PLR	67.65	39.96	67.27	30.94	32.13	28.03	25.69	35.03	56.76	51.50
+ PhysAgent	72.06	38.93	70.91	34.58	36.05	35.39	29.55	35.49	67.57	65.67
GPT-4o	91.18	22.05	83.64	32.67	43.74	46.32	35.22	39.20	62.16	86.92
+ CoT	91.18	30.73	74.55	36.49	45.40	46.32	35.71	41.67	64.86	85.56
+ Desp-CoT	85.29	29.41	80.00	39.95	44.19	42.28	30.52	43.83	70.27	85.83
+ PLR	88.24	30.73	89.09	34.94	38.01	34.68	24.85	37.50	66.22	79.56
+ PhysAgent	95.59	41.19	85.45	43.49	45.25	47.27	52.11	44.91	67.57	87.47

G MORE RELATED WORKS

Vision-Language Models. Vision-Language Models (VLMs) are large language models that integrate visual modalities, such as images and videos, with language knowledge (Wu et al., 2023b; Zhan et al., 2024; Dai et al., 2024). Notable models like BLIP-2 (Li et al., 2023c) and LLaVA (Liu et al., 2024c) have advanced image-captioning datasets and visual instruction tuning, with LLaVA-Next further improving single-image performance at higher computational costs (Liu et al., 2024b). Subsequent models, such as QwenVL (Bai et al., 2023b), CogVLM (Wang et al., 2023b), and Yi-VL (AI et al., 2024), have followed a similar architecture to LLaVA. As single-image and text interaction technologies continue to mature, many recent VLMs (Alayrac et al., 2022; Peng et al., 2023; Pan et al., 2024; Lin et al., 2023b) are now capable of handling complex visual tasks with interleaved images or videos, enabling VLMs to tackle more sophisticated tasks (Lu et al., 2024; Yu et al., 2024) and paving the way for interactions with the real physical world.

Vision-Language Benchmarks VLMs (Liu et al., 2024c; Achiam et al., 2023; Pan et al., 2024; Yu et al., 2023a; Chow et al., 2024) have inherited and advanced many intriguing features from text-only LMs. Benchmarks for VLMs have rapidly emerged to evaluate performance in areas such as image question answering (Ying et al., 2024), in-context response (Yu et al., 2023b), chart understanding (Li et al., 2024d), and web comprehension (Liu et al., 2024d; Zhou et al., 2023). Some benchmarks cover spatial relations understanding (Li et al., 2023a), but often overlook the ability to devise complex spatial action plans based on physical world comprehension. Recently, new benchmarks have also emerged that focus on the ability to understand multiple images in long contexts (Zhang et al., 2024a; Kil et al., 2024; Jiang et al., 2024; Wu et al., 2023a; Li et al., 2024c; Ge et al., 2024) and complex realistic environments (Fu et al., 2024). However, these benchmarks—whether based on answering questions from images, videos, or tables, or using visual prompts (Fu et al., 2024)—ultimately rely on responding to the content of the given images rather than the true perception of the physical world, thus falling short of achieving spatial intelligence (Gupta et al., 2021).

Table 27: **Comparison between PhysBench and other vision-language benchmarks.** In the format, I, T, V present text, image, and video. Annotated means annotate the existing dataset, like MSCOCO Karpathy & Fei-Fei (2015). LLaVA^{Wd}: LLaVA-Bench(In-the-Wild)-Detail Liu et al. (2024c). Reasoning means that it requires the VLMs’ reasoning ability to answer the question.

Dataset	Size (k)	Format	Interleaving	Source	Domain	Reasoning
VQA-v2 Goyal et al. (2017b)	1,105,904	I+T	✗	Annotated	Image content	✗
GQA Hudson & Manning (2019)	22,669,678	I+T	✗	Annotated	Image content	✗
VizWiz Gurari et al. (2018)	32,000	I+T	✗	Annotated	Image content	✗
TextVQA Singh et al. (2019)	45,000	I+T	✗	Annotated	Image content	✗
OKVQA Marino et al. (2019)	14,000	I+T	✗	Annotated	Image content	✗
SEED Li et al. (2023a)	19,000	V+I+T	✗	Annotated	Image and video content	✗
MMBench Liu et al. (2023c)	3,000	I+T	✗	Annotated	Image content	✗
MME Yin et al. (2023)	1,297	I+T	✗	Annotated	Image content	✗
POPE Li et al. (2023b)	18,000	I+T	✗	Annotated	Image hallucination detection	✗
MM-Vet Yu et al. (2023b)	200	I+T	✗	Annotated	Image chat	✗
LLaVA ^{Wd} Liu et al. (2024c)	60	I+T	✗	Annotated	Image chat	✗
SQA ¹ Lu et al. (2022)	6,000	I+T	✗	Annotated	Image content	✗
NLVR2 Subr et al. (2018)	6,967	I+T	✗	Annotated	Image content	✗
MathVista Lu et al. (2024)	6,141	I+T	✗	Annotated	Math	✓
BLINK Fu et al. (2024)	1,901	I+T	✓	Annotated, Chart	Visual prompt	✗
Mantis-eval Jiang et al. (2024)	217	I+T	✓	Annotated	Image chat	✗
Q-Bench Wu et al. (2023a)	2,990	I+T	✓	Annotated	Image content	✗
MMMU Yue et al. (2024)	11,500	I+T	✓	Annotated, Web, Textbook	Image content	✗
PhysBench	100,000	V+I+T	✓	Annotated, Web, Simulation, Real-world	Physical property and dynamics	✓

Video Benchmarks. With the growing interest in video understanding, the development of benchmarks for VLMs has become increasingly emphasized. In video comprehension, the research community has made significant strides, particularly for short videos. There are specialized benchmarks for temporal perception (Yu et al., 2019; Wu et al., 2024a), action understanding (Liu et al., 2024e; Mangalam et al., 2024), video classification (Kay et al., 2017), video reasoning (Xiao et al., 2021a; Xie et al., 2023), video captioning (Miech et al., 2019; Xu et al., 2016), video question-answering (Zhou et al., 2024; Li et al., 2023g; 2024c), long video comprehension (Wu et al., 2024b), and interleaved video-text question-answering (Wang et al., 2024a). However, these works primarily focus on evaluating video content and do not explore the underlying mechanisms of video representation or address true physical world perception. Furthermore, during our experiments, we observed significant challenges with current video VLMs in following instructions and answering questions,

as the models frequently output descriptions of the video rather than directly addressing the posed questions.

Interleaved Vision-Language Benchmarks. VLMs are increasingly processing longer and more complex inputs. Along with this development, several benchmarks with interleaved inputs have emerged (Li et al., 2023b; Wang et al., 2024b; Meng et al., 2024). For example, SEED-Bench (Li et al., 2023a; 2024a) focuses on video understanding, BLINK (Fu et al., 2024) introduces visual prompts, and NLVR2 (Suhr et al., 2018) differentiates between two images. However, all of these benchmarks still primarily assess content description based on images, without evaluating physical understanding or perception abilities. Furthermore, current interleaved benchmarks only involve images and text, while PhysBench is a dataset that interweaves video, image, and text inputs. A detailed comparison with the previously mentioned benchmarks and other vision-language benchmarks can be found in Table 27.

Science-related Benchmarks. In addition to the benchmarks related to physical world comprehension mentioned in Section 2, there are also benchmarks that assess models’ understanding through middle or university-level physics exam questions. SciQ (Welbl et al., 2017), ScienceQA (Lu et al., 2022), E-EVAL (Hou et al., 2024), MMLU-STEM (Hendrycks et al., 2020), and C-Eval-STEM (Huang et al., 2023b) include some physics-related questions, but these datasets often allow questions to be answered simply by analyzing the provided images, lacking the complexity of reasoning and computational tasks. JEEBench (Arora et al., 2023) requires multistep reasoning with physics knowledge but is limited in scope and purely text-based. SciBench (Wang et al., 2024d), OlympiadBench (He et al., 2024), MathVista (Lu et al., 2024), and OCWCourses (Lewkowycz et al., 2022) provide college-level physics questions. However, these benchmarks mainly consist of homework and exam-style questions, focusing more on mathematical reasoning and general knowledge rather than true physical world comprehension. In contrast, our PhysBench is the first systematic and comprehensive question-answering benchmark specifically designed for understanding the real physical world.

Table 28: A comparison between PhysBench and other physical understanding benchmarks not in question-answering format.

	Property	Attribute	Location	Velocity	Temperature	Camera	Light	Collision	Manipulation	Fluid	Interleaved	Size
Physics 101 Wu et al. (2016)	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	17,408
IntPhys Riochet et al. (2018)	✓	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	15,000
ESPRIT Rajani et al. (2020)	✗	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	2,441
CRAFT Ates et al. (2020)	✓	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	57,000
CoPhy Baradel et al. (2019)	✓	✗	✗	✗	✗	✗	✗	✓	✗	✗	✗	216,000
PhysBench	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	100,000

3D Science VQA. Recently, multi-modal 3D perception has garnered increasing attention due to its connection to the physical world, driving rapid advancements in the field. SQA3D (Ma et al., 2023) highlights the importance of “situations” within contextual understanding. EmbodiedScan (Wang et al., 2024c) and SceneVerse (Jia et al., 2025) expand the scope by collecting more scenes or annotating additional objects, scaling annotations to the millions. OpenEQA (Majumdar et al., 2024), SpatialRGPT-Bench (Cheng et al., 2024), MMScan (Lyu et al., 2024), and MSNN (Linghu et al., 2024) integrate comprehensive annotations, adapting the task into a VQA format. However, these studies primarily focus on geometric relationships, which represent only a subset of the broader understanding of the physical world, as discussed in Section 2. Our work prioritizes a more holistic evaluation of the physical world perception capabilities of VLMs across four major task categories: Physical Object Properties, Physical Object Relationships, Physical Scene Understanding, and Physics-based Dynamics. Additionally, the spatial components in our dataset differ significantly from those in existing Spatial VQA datasets. While such benchmarks typically rely on 3D point cloud scenes or interleaved 2D images from multiple viewpoints, our dataset uses interleaved images to capture physical world dynamics, such as viewpoint rotations and the progression of physical phenomena.

VLMs for Robotic Manipulation. Recently, two main approaches have been proposed for applying Vision-Language Models (VLMs) (Liu et al., 2024c; Achiam et al., 2023; Team et al., 2023) to robotic manipulation: (a) *directly generating actions* (Kim et al., 2024; Octo Model Team et al., 2024; Zawalski et al., 2024; Niu et al., 2024) and (b) *employing VLMs as agents* (Liu et al., 2024a; Nasiriany et al., 2024; Huang et al., 2023a). Approach (a) involves directly outputting actions, which requires extensive training—for instance, OpenVLA was trained using $64 \times A100$ GPUs—and pro-

3294 duces embodied-specific actions that necessitate targeted fine-tuning. In contrast, approach (b) gen-
 3295 erates affordance representations through VLMs, which are subsequently converted into actions.
 3296 This method requires less training and exhibits stronger generalization capabilities. However, it
 3297 suffers from weaker perception capabilities in the physical world, leading to performance limita-
 3298 tions (Liu et al., 2024a). As demonstrated in the experiments in Section F.8, our data and methods
 3299 effectively address these limitations.

3300

3301 H MORE EXAMPLES

3302

3303 We use red color as **right answer**. We use red to indicate the correct answer (**correct answer**). It is
 3304 important to note that, to reduce difficulty and facilitate evaluation, we employed a multiple-choice
 3305 format rather than open-ended responses. For space-saving purposes, the example figures in the
 3306 main text do not display the available options.

3307

3308 H.1 PHYSICAL OBJECT PROPERTY SUB-TASK

3309

3310

3311 Question

3312

3313

3314

3315

3316

3317

3318

3319



3314 The color of the original spots on the chameleon's body has not changed during the process of changing
 3315 its color. What color are these spots?

3317 Answer

3318 A. Black B. Green **C. White** D. Blue

3319

3320

3321

3322

3323

3324

3325

3326

3327

3328

3329

3330

3331

3332

3333

3334

3335

3336

3337

3338

3339

3340

3341

3342

3343

3344

3345

3346

3347

Figure 28: Example for object color. Ability Type is identify.

3322 H.2 PHYSICAL OBJECT RELATIONSHIPS SUB-TASK

3323

3324

3325

3326

3327

3328

3329

3330

3331

3332

3333

3334

3335

3336

3337

3338

3339

3340

3341

3342

3343

3344

3345

3346

3347

3348

3349

3350

3351

3352

3353

3354

3355

3356

3357


3358

3359

3360

3348
3349
3350
3351
3352
3353
3354
3355
3356
3357
3358
3359
3360
3361
3362
3363
3364
3365
3366
3367
3368
3369
3370
3371
3372
3373
3374
3375
3376
3377
3378
3379
3380
3381
3382
3383
3384
3385
3386
3387
3388
3389
3390
3391
3392
3393
3394
3395
3396
3397
3398
3399
3400
3401

Question



The weight of the object about the size of a ping-pong ball is closest to which of the following options?

Answer

A. 5g B. 50g C. 500g D. 5kg

Question



Which fruit in the picture is most likely to be the heaviest individually?

Answer

A. Watermelon B. Pear C. Plum D. Peach

Question



What can be said about the mass of the brown cube compared to the white sphere?

Answer

A. The brown cube is less massive B. The white sphere is less massive
C. They have the same mass D. Cannot answer

Figure 29: Three examples related to object mass, categorized by the following ability types: identification, comparison, and comparison.

3402
3403
3404
3405
3406
3407
3408
3409
3410
3411
3412
3413
3414
3415
3416
3417
3418
3419
3420
3421
3422
3423
3424
3425
3426
3427
3428
3429
3430
3431
3432
3433
3434
3435
3436
3437
3438
3439
3440
3441
3442
3443
3444
3445
3446
3447
3448
3449
3450
3451
3452
3453
3454
3455

Question



How many blueberries are there outside the plate?

Answer

A. 1 B. 2 C. 3 D. 4

Question



How many of the books pictured have covers with titles beginning with P?

Answer

A. 1 B. 2 C. 3 D. 4

Question



Following the content of the video, How many eggs were broken?

Answer

A. 1 B. 2 C. 3 D. 4

Question



How many balls are moving close together without separating?

Answer

A. 2 B. 3 C. 4 D. 6

Figure 30: Four examples related to object number, ability types are all identification.

3456
3457
3458
3459
3460
3461
3462
3463
3464
3465
3466
3467
3468
3469
3470
3471
3472
3473
3474
3475
3476
3477
3478
3479
3480
3481
3482
3483
3484
3485
3486
3487
3488
3489
3490
3491
3492
3493
3494
3495
3496
3497
3498
3499
3500
3501
3502
3503
3504
3505
3506
3507
3508
3509

Question



In the photo, which point with option signifies the object with the most sharp?

Answer

A. Point A B. Point B C. Point C D. Point D

Question




Can you tell me which point with option in the image points to the object that has the least brittle?

Answer

A. Point A B. Point B C. Point C D. Point D

Question




Which point with option in the photograph pinpoints the object with the most stiff?

Answer

A. Point A B. Point B C. Point C D. Point D

Question



Which point with option in the image marks the object that exhibits the most elastic?

Answer

A. Point A B. Point B C. Point C D. Point D

Question



Which point with option in the photograph captures the object that has the most malleable?

Answer

A. Point A B. Point B C. Point C D. Point D

Question



Which point with option in the image isolates the object with the most soft?


Answer

A. Point A B. Point B C. Point C D. Point D

Figure 31: Six examples of object attributes include sharpness, brittleness, stiffness, elasticity, malleability, and softness.



3510
3511
3512
3513
3514
3515
3516
3517
3518
3519
3520
3521
3522
3523
3524
3525
3526
3527
3528
3529
3530
3531
3532
3533
3534
3535
3536
3537
3538
3539
3540
3541
3542
3543
3544
3545
3546
3547
3548
3549
3550
3551
3552
3553
3554
3555
3556
3557
3558
3559
3560
3561
3562
3563



Question




Moving according to the arrow in the picture, which of the following options are you most likely to encounter?

Answer

A.  B. 



C.  D. 



Question




Following the direction indicated by the arrow in the picture, which of the following options are you most likely to encounter?

Answer

A.  B. 

C.  D. 

Question




What is the relationship between the speeds of the two objects in the video after they begin to fall?

Answer

A. Both objects have the same speed.
B. The egg consistently falls faster than the feather.
C. The feather consistently falls faster than the egg.
D. Initially, the egg falls faster, but the feather eventually surpasses it.

Figure 32: Three examples for movement, categorized by the following ability types: static, static and dynamic.

Question



Determine which point is nearest to the camera:

Answer

A. Point A is nearest B. Point B is nearest C. Point C is nearest D. Point D is nearest

Figure 33: An example for depth. Ability Type is static.

3564
3565
3566
3567
3568
3569
3570
3571
3572
3573
3574
3575
3576
3577
3578
3579
3580
3581
3582
3583
3584
3585
3586
3587
3588
3589
3590
3591
3592
3593
3594
3595
3596
3597
3598
3599
3600
3601
3602
3603
3604
3605
3606
3607
3608
3609
3610
3611
3612
3613
3614
3615
3616
3617

Question



Find the point that is closest to the river:

Answer

A. Point A is the closest B. Point B is the closest C. Point C is the closest D. Point D is the closest

Question



What value is the distance between each of the three small bowls placed side by side closest to?

Answer

A.3mm B.3cm C.10cm D.20cm

Question



What is farthest from the key in the picture?

Answer

A. Pen B. Camera C. Watch D. Glasses

Figure 34: Three examples for distance. Ability Type is static, static and dynamic.

Question



What is happening to the size of the ice cube in the video?

Answer

A. Increasing B. Decreasing C. No change D. Increasing first and then decreasing

Question



Which object is the biggest in volume?

Answer

A. red cube B. purple cube C. green cube D. orange cube

Figure 35: Two examples for size. Ability Type is dynamic and static.

3618
3619
3620
3621
3622
3623
3624
3625
3626
3627
3628
3629
3630
3631
3632
3633
3634
3635
3636
3637
3638
3639
3640
3641
3642
3643
3644
3645
3646
3647
3648
3649
3650
3651
3652
3653
3654
3655
3656
3657
3658
3659
3660
3661
3662
3663
3664
3665
3666
3667
3668
3669
3670
3671

Question



Among these points, which one is not on the same sunflower as the other 3 points?

Answer

A. Point A B. Point B C. Point C D. Point D

Question




What is the object above the egg?

Answer

A. Milk B. Yogurt C. Banana D. Egg

Question



How does the moon pass through the sun in the video?

Answer

A. From the lower left corner to the upper right corner of the picture
B. From the upper left corner to the lower right corner of the picture
C. From the lower right corner to the upper left corner of the picture
D. From the upper right corner to the lower left corner of the picture

Question

Which point with the option in the image  is corresponds to the reference point P in the 

How does the moon pass through the sun in the video?

Answer

A. Point A B. Point B C. Point C D. Point D

Figure 36: Four examples for location. Ability Type is static, static, dynamic and static.

3672
 3673
 3674
 3675
 3676
 3677
 3678
 3679
 3680
 3681
 3682
 3683
 3684
 3685
 3686
 3687
 3688
 3689
 3690
 3691
 3692
 3693
 3694
 3695
 3696
 3697
 3698
 3699
 3700
 3701
 3702
 3703
 3704
 3705
 3706
 3707
 3708
 3709
 3710
 3711
 3712
 3713
 3714
 3715
 3716
 3717
 3718
 3719
 3720
 3721
 3722
 3723
 3724
 3725

Question



Where is the light source in the picture?

Answer

- A. In the clouds on the upper right of the screen
- B. In the lower left corner of the screen
- C. A little above the center of the screen
- D. In the exact center of the screen

Question



Reflecting on the events in the video, which of the following alterations to the light source is most likely to result in the phenomenon observed?

Answer

- A. The color of the light changes from yellow to pink
- B. It's just that the light source is weaker and the light source position remains the same
- C. Move parallel to the line between the drumstick and the ballet skirt
- D. It's just that the light source is stronger and the light source position remains the same

Question




From the events in the video, which of the listed changes to the light source is most likely to have resulted in the observed phenomenon?

Answer

- A. Move parallel to the line between the postcard and the cake
- B. The color of the light changes from orange to blue
- C. The color of the light changes from lime yellow to green
- D. The light source moves downward

Question



Taking into account the phenomena observed in the video, which of the following changes to the light source is most likely to have led to this result?

Answer

- A. It's just that the light source is stronger and the light source position remains the same
- B. It's just that the light source is weaker and the light source position remains the same
- C. The color of the light changes from red to purple
- D. The color of the light changes from yellow to blue

Figure 37: Four examples illustrating environmental lighting conditions. The corresponding ability types are perception, reasoning, reasoning, and reasoning.

3726
3727
3728
3729
3730
3731
3732
3733
3734
3735
3736
3737
3738
3739
3740
3741
3742
3743
3744
3745
3746
3747
3748
3749
3750
3751
3752
3753
3754
3755
3756
3757
3758
3759
3760
3761
3762
3763
3764
3765
3766
3767
3768
3769
3770
3771
3772
3773
3774
3775
3776
3777
3778
3779

Question



How does the brightness in the picture change?

Answer

- A. First it gets brighter, then it gets darker
- B. First it gets darker, then it gets brighter**
- C. It keeps getting darker
- D. t keeps changing

Figure 38: Examples for environmental lighting conditions (Continued). Ability Type is judgement.

Question



What happens to the gas pressure inside the bottle before open it?

Answer

- A. Increases**
- B. Decreases
- C. Stays the same
- D. Varies randomly

Figure 39: Example for environmental gas conditions and the ability type of it is perception.

Question



What oven temperature range is typically used for the phenomenon shown in the video?

Answer

- A. Under 100°C
- B. Approximately 200°C**
- C. Nearly 400°C
- D. Over 600°C

Question



What is the possible cause of the phenomenon in the video?

Answer

- A. Increased humidity
- B. Increased temperature**
- C. Decreased temperature
- D. Decreased humidity

Figure 40: Two examples for environmental temperature conditions and the ability types of them are all perception.

3780
3781
3782
3783
3784
3785
3786
3787
3788
3789
3790
3791
3792
3793
3794
3795
3796
3797
3798
3799
3800
3801
3802
3803
3804
3805
3806
3807
3808
3809
3810
3811
3812
3813
3814
3815
3816
3817
3818
3819
3820
3821
3822
3823
3824
3825
3826
3827
3828
3829
3830
3831
3832
3833

Question



At the beginning of the video, how does the camera's focal length change?

Answer

- A. Focus length remains unchanged
- B. Focus length increases**
- C. Focus length decreases
- D. Unknown

Question



Based on the phenomenon in the video, which of the following camera changes can produce the effect in the video?

Answer

- A. Move parallel to the line between the motor and the wash basin
- B. Move parallel to the line between the bunk bed and the wash basin
- C. The camera moves upward or downward**
- D. The camera rotates along the horizontal axis (left or right)

Question




From the video, which of these camera changes could be responsible for the depicted phenomenon?

Answer

- A. The camera is farther away from the objects**
- B. Move parallel to the line between the cupcake and the sponge
- C. The camera is closer to the objects
- D. Move parallel to the line between the cupcake and the blackboard

Question



Based on the phenomenon in the video, which of the following camera changes can produce the effect in the video?

Answer


- A. The camera rotates along the vertical axis (upside or downside).**
- B. The camera is closer to the objects
- C. The camera rotates along the horizontal axis (left or right).
- D. The camera moves upward or downward

Figure 41: Four examples illustrating environment camera conditions. The corresponding ability types are perception, reasoning, reasoning and reasoning.

3834
3835
3836
3837
3838
3839
3840
3841
3842
3843
3844
3845
3846
3847
3848
3849
3850
3851
3852
3853
3854
3855
3856
3857
3858
3859
3860
3861
3862
3863
3864
3865
3866
3867
3868
3869
3870
3871
3872
3873
3874
3875
3876
3877
3878
3879
3880
3881
3882
3883
3884
3885
3886
3887

Question

Select the option that shows the correct procedure to put on a pair of gloves.




Answer

- A. 1 - 3 - 2 **B. 3 - 2 - 1**
C. 2 - 1 - 3 D. 1 - 2 - 3

Question


Which of the following options lists the steps in the correct sequence to put the carrot in the microwave?

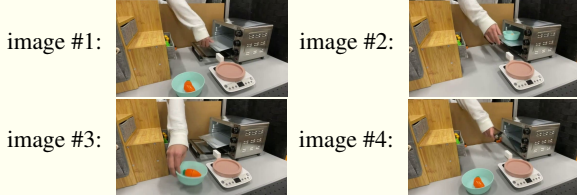

Answer

- A. 2 - 1 - 4 - 3 **B. 1 - 3 - 2 - 4**
C. 2 - 3 - 1 - 4 D. 2 - 4 - 3 - 1

Question



To poke the watering can, which point is most suitable?

Answer

- A. B. C. **D.**

Question



In order to pick up the cup, which of the following color points has reasonable affordance?

Answer

- A. B. C. **D.**

Question



Answer

- A. Remove the small ball from the clay block.
B. Add another ball to the clay block.
C. Air-dry the clay block.
D. Press the small ball into the clay block.

Figure 42: Five examples illustrating phenonema manipulation. The corresponding ability types are judgment, judgment, perception, perception and reasoning.

3888
3889
3890
3891
3892
3893
3894
3895
3896
3897
3898
3899
3900
3901
3902
3903
3904
3905
3906
3907
3908
3909
3910
3911
3912
3913
3914
3915
3916
3917
3918
3919
3920
3921
3922
3923
3924
3925
3926
3927
3928
3929
3930
3931
3932
3933
3934
3935
3936
3937
3938
3939
3940
3941

Question



Following the content of the video, which option's corresponding picture will happen first?

Answer




Figure 43: Example for phenonema collision and the ability type of it is prediction.

Question



Why are the phenomena happens in the video?

Answer

- A. Because they are lighter than air.
- B. Due to the presence of ferric oxide in the match heads.
- C. Because they are coated with a special glue.
- D. Due to static electricity on the magnet.

Figure 44: Example for phenonema chemistry and the ability type of it is perception.

Question



What will happen to the white ball?

Answer

- A. It will drop into the right pit.
- B. It will not drop into the right pit.
- C. Its movement cannot be determined.
- D. It will drop into the left pit.

Figure 45: Example for phenonema throwing and the ability type of it is prediction.

3942
3943
3944
3945
3946
3947
3948
3949
3950
3951
3952
3953
3954
3955
3956
3957
3958
3959
3960
3961
3962
3963
3964
3965
3966
3967
3968
3969
3970
3971
3972
3973
3974
3975
3976
3977
3978
3979
3980
3981
3982
3983
3984
3985
3986
3987
3988
3989
3990
3991
3992
3993
3994
3995

Question




Which bottle contains the fastest diffusion rate?

Answer

A. The one on the left B. The one in the middle C. The one on the right D. Both are equally fast

Question



We already know that the liquid poured in is water, so what is the original yellow liquid?

Answer

A. Orange juice B. Oil C. Beer D. Urine

Question




Which color object looks the most viscous in the video?

Answer

A. Transparent liquid B. Light yellow color liquid C. Thick yellow liquid D. Dark blue liquid

Question



We already know that the red particles in the picture are liquid particles. In which area of the picture does the liquid flow fastest?

Answer


A. All parts of the image are at the same speed.
B. the leftmost part of the picture
C. the middle part of the picture
D. the rightmost part of the picture

Figure 46: Four examples illustrating phenomena fluid. The corresponding ability types are perception, reasoning, perception and perception.

3996
3997
3998
3999
4000
4001
4002
4003
4004
4005
4006
4007
4008
4009
4010
4011
4012
4013
4014
4015
4016
4017
4018
4019
4020
4021
4022
4023
4024
4025
4026
4027
4028
4029
4030
4031
4032
4033
4034
4035
4036
4037
4038
4039
4040
4041
4042
4043
4044
4045
4046
4047
4048
4049

Question

Among the listed choices, which one outlines the proper sequence of events in candle burning?




Answer

- A. 2 - 3 - 1 B. 1 - 2 - 3 C. 1 - 3 - 2 **D. 3 - 1 - 2**

Question

Which of the following options presents the correct order of occurrences in fruit rotting?



Answer

- A. 3 - 2 - 1 **B. 2 - 3 - 1** C. 1 - 3 - 2 D. 1 - 2 - 3

Question



The light first passes through the convex lens and then the concave lens. Slide the

concave lens close to the convex lens. Which of the following options will correspond to the phenomenon in the picture?

Answer

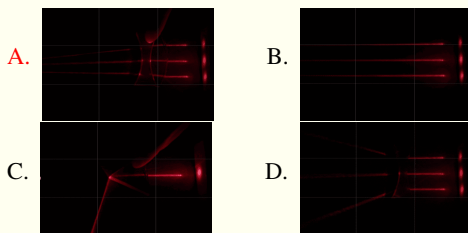


Figure 47: Three examples illustrating phenonema others. The corresponding ability types are reasoning, reasoning and prediction.

I ERROR STUDY

I.1 DETAILED STATICS

In this section, we present a case study analysis of the error types made by GPT-4V, Gemini-1.5-flash, and Phi-3V across various tasks. The errors are classified into the following five categories. Other less frequent error types are not included in this analysis. For the analysis, as mentioned in Section 3.4, we selected 500 samples for each model, but due to space limitations, we present only 60 of them here, as shown in Table 29.

Perception Error : VLMs fail to recognize, classify, or detect the objects or content in images. VLMs are constrained by the representation power of visual encoders, and these errors account for the majority of them. See examples in Figure 48, Figure 50, *etc.*

Reasoning Error : VLMs can recognize the text and visual content exactly but make errors in reasoning, leading to incorrect results. See examples in Figure 65, Figure 81, *etc.*

Lack of Knowledge : VLMs do not have specific knowledge so they finally get a wrong answer. See examples in Figure 57, Figure 71.

Refuse to Answer : VLMs refuse to answer questions and stop answering immediately. See examples in Figure 54.

Fail to Follow Instruction : VLMs fail to correctly understand instructions and provide erroneous answers. For example, VLMs may not understand the specified conditions in the instruction (see Figure 74).

I.2 MAIN REASON ANALYSIS

Perceptual Errors: Perceptual errors can be classified into two categories: basic perceptual errors and domain-specific perceptual errors. Basic perceptual errors occur when the model successfully understands the given information but fails to interpret fundamental visual objects correctly. In contrast, domain-specific perceptual errors arise when the model misinterprets visual inputs due to a lack of understanding of specialized conditions. Moreover, GPT-4V often exhibits a bias towards textual information, prioritizing text over visual inputs—a trend highlighted in recent studies Cui et al. (2023). A notable example is shown in Figure 68, where the model mistakenly identified the plate as part of the background, leading to incorrect depth estimation. This underscores the importance of seeking a balanced approach to enhance the model’s interpretative capabilities.

Reasoning Errors: Sometimes, even when the model correctly interprets the text, images, and question, it fails to establish a rigorous logical chain, leading to incorrect conclusions. These types of mistakes, known as reasoning errors, are illustrated in Figures 65 and 78. In the first example, the model mistakenly assumes that friction can only exist if the machine rotates faster than the object, overlooking the presence of another object, which results in an incorrect answer. In the second example, while the model correctly identifies that the temperature of the wrapped paper is significantly lower than that of the other object, it incorrectly attributes this phenomenon to the flame’s temperature, leading to an erroneous conclusion.

Lack of Knowledge: Another major cause of errors is the model’s lack of relevant knowledge. A notable example is shown in Figure 71, where the model incorrectly assumes that light bending in water is due to refraction. The model clearly does not understand the concept of total internal reflection in water, leading to an incorrect conclusion.

Other Errors: The remaining errors, such as those related to textual understanding, refusal to answer, annotation mistakes, and answer extraction issues, account for only a small proportion. However, they remain significant and should not be overlooked.

I.3 CASE STUDY

Table 29: Table index of case study figures by meta-task with associated error categories.

Case Figure	Meta-task	Subtask	GPT-4o	Gemini-1.5-flash	Phi-3V
4104					
4105					
4106					
4107	Figure 48	Scene	Light	Perception Error	Perception Error
4108	Figure 49	Dynamics	Collision	Reasoning Error	Reasoning Error
4109	Figure 50	Dynamics	Throwing	Perception Error	Perception Error
4110	Figure 51	Scene	Light	Perception Error	Perception Error
4111	Figure 52	Scene	Camera	Perception Error	Reasoning Error
4112	Figure 53	Scene	Camera	Perception Error	Reasoning Error
4113	Figure 54	Dynamics	Chemistry	Reasoning Error	Refuse to Answer
4114	Figure 55	Dynamics	Manipulation	Perception Error	Success
4115	Figure 56	Dynamics	Manipulation	Perception Error	Perception Error
4116	Figure 57	Property	Attribute	Perception Error	Perception Error
4117	Figure 58	Property	Color	Perception Error	Reasoning Error
4118	Figure 59	Property	Mass	Reasoning Error	Perception Error
4119	Figure 60	Property	Mass	Reasoning Error	Success
4120	Figure 61	Property	Number	Success	Success
4121	Figure 62	Property	Number	Perception Error	Perception Error
4122	Figure 63	Property	Number	Perception Error	Refuse to Answer
4123	Figure 64	Property	Attribute	Perception Error	Success
4124	Figure 65	Relationships	Movement	Lack of Knowledge	Lack of Knowledge
4125	Figure 66	Relationships	Movement	Perception Error	Perception Error
4126	Figure 67	Relationships	Depth	Reasoning Error	Reasoning Error
4127	Figure 68	Relationships	Depth	Reasoning Error	Reasoning Error
4128	Figure 69	Relationships	Depth	Reasoning Error	Success
4129	Figure 70	Relationships	Distance	Success	Success
4130	Figure 71	Relationships	Distance	Perception Error	Reasoning Error
4131	Figure 72	Relationships	Distance	Reasoning Error	Reasoning Error
4132	Figure 73	Relationships	Size	Reasoning Error	Lack of Knowledge
4133	Figure 74	Relationships	Size	Perception Error	Reasoning Error
4134	Figure 75	Dynamics	Others	Lack of Knowledge	Lack of Knowledge
4135	Figure 76	Relationships	Size	Success	Success
4136	Figure 77	Scene	Camera	Perception Error	Perception Error
4137	Figure 78	Relationships	Location	Perception Error	Perception Error
4138	Figure 79	Relationships	Location	Perception Error	Fail to follow instruction
4139	Figure 80	Relationships	Location	Perception Error	Reasoning Error
4140	Figure 81	Scene	Camera	Perception Error	Success
4141	Figure 82	Scene	Temperature	Perception Error	Perception Error
4142	Figure 83	Scene	Temperature	Perception Error	Perception Error
4143	Figure 84	Dynamics	Gas	Reasoning Error	Reasoning Error
4144	Figure 85	Dynamics	Gas	Reasoning Error	Reasoning Error
4145	Figure 86	Dynamics	Manipulation	Reasoning Error	Reasoning Error
4146	Figure 87	Relationships	Depth	Reasoning Error	Perception Error
4147	Figure 88	Dynamics	Fluid	Reasoning Error	Perception Error
4148	Figure 89	Relationships	Fluid	Perception Error	Perception Error
4149	Figure 90	Dynamics	Others	Perception Error	Perception Error
4150	Figure 91	Dynamics	Others	Perception Error	Perception Error
4151	Figure 92	Dynamics	Collision	Perception Error	Perception Error
4152	Figure 93	Scene	Light	Reasoning Error	Perception Error
4153	Figure 94	Scene	Light	Reasoning Error	Perception Error
4154	Figure 95	Scene	Camera	Perception Error	Perception Error
4155	Figure 96	Relationships	Location	Success	Perception Error
4156	Figure 97	Relationships	Location	Perception Error	Perception Error
4157	Figure 98	Relationships	Location	Perception Error	Perception Error
	Figure 99	Dynamics	Others	Reasoning Error	Reasoning Error
	Figure 100	Scene	Camera	Perception Error	Reasoning Error
	Figure 101	Scene	Light	Reasoning Error	Success
	Figure 102	Scene	Light	Reasoning Error	Reasoning Error
	Figure 103	Scene	Light	Reasoning Error	Reasoning Error
	Figure 104	Scene	Light	Reasoning Error	Reasoning Error
	Figure 105	Scene	Light	Success	Perception Error
	Figure 106	Scene	Light	Reasoning Error	Reasoning Error
	Figure 107	Scene	Light	Reasoning Error	Reasoning Error

4158
4159
4160
4161
4162
4163
4164
4165
4166
4167
4168
4169
4170
4171
4172
4173
4174
4175
4176
4177
4178
4179
4180
4181
4182
4183
4184
4185
4186
4187
4188
4189
4190
4191
4192
4193
4194
4195
4196
4197
4198
4199
4200
4201
4202
4203
4204
4205
4206
4207
4208
4209
4210
4211

Scene: Light

Question: According to the video, which alteration to the light source is most likely to have triggered the phenomenon? <video 1>

Option:

- (A) The color of the light changes from yellow to cyan
- (B) The color of the light changes from green to red
- (C) It's just that the light source is weaker and the light source position remains the same
- (D) It's just that the light source is stronger and the light source position remains the same



<video 1>

The answer is C. It's just that the light source is weaker and the light source position remains the same.

Here's the reasoning:

1. Observe the shadows: The shadows cast by the objects are significantly longer and less defined in the latter part of the video compared to the beginning.
2. Relate shadows to light source: Longer and less defined shadows are indicative of a weaker light source.
3. Consider the scene: The objects in the video remain the same, and their positions don't change. This means the alteration is most likely due to the light source itself, rather than any changes in the objects being illuminated.
4. Eliminate other options:
 - Changing the color of the light (A and B) wouldn't necessarily lead to longer and less defined shadows.
 - A stronger light source (D) would result in shorter and sharper shadows.

Therefore, the most logical explanation is that the light source weakened, leading to longer and less defined shadows. ❌



Choice: C. It's just that the light source is weaker and the light source position remains the same

Reasoning Chain:

1. Observation of Images:
 - The series of images show a consistent scene with a ball, a backpack, and some other objects on a wooden surface.
 - The shadows and lighting on the objects remain consistent in terms of direction and shape throughout the series of images.
2. Analysis of Light Intensity:
 - The primary noticeable change in the images is the overall brightness.
 - The images progressively become darker, indicating a reduction in the intensity of the light source.
3. Elimination of Color Change Options:
 - Option A (Yellow to Cyan): A change in light color from yellow to cyan would result in a noticeable shift in the color tones of the objects and shadows. This is not observed in the images.
 - Option B (Green to Red): Similarly, a change from green to red would also alter the color tones significantly, which is not evident in the images.
4. Elimination of Light Source Strengthening:
 - Option D (Stronger Light Source): If the light source were getting stronger, the images would progressively become brighter. This is contrary to what is observed.
5. Conclusion:
 - The consistent direction and shape of the shadows indicate that the position of the light source has not changed.
 - The progressive darkening of the images suggests that the light source is becoming weaker.

Therefore, the most likely alteration to the light source that triggered the phenomenon is that the light source is weaker while its position remains the same. ❌



The phenomenon in the image is the casting of shadows on the wooden floor, which suggests that there is a light source above the objects. The shadows are consistent in shape and size, indicating that the light source is not moving. The most likely alteration to the light source that would trigger this phenomenon is a change in the light source's intensity. Therefore, the correct answer is C. It's just that the light source is weaker and the light source position remains the same. ❌

Figure 48: A sample case of physical scene understanding–light. Back to List of Figures.

4212
4213
4214
4215
4216
4217
4218
4219
4220
4221
4222
4223
4224
4225
4226
4227
4228
4229
4230
4231
4232
4233
4234
4235
4236
4237
4238
4239
4240
4241
4242
4243
4244
4245
4246
4247
4248
4249
4250
4251
4252
4253
4254
4255
4256
4257
4258
4259
4260
4261
4262
4263
4264
4265

Dynamics: Collision

Question: What phenomena is seen as a result of the explosion?<video 1>

Option:

- (A) Diffraction of waves
- (B) Interference of waves
- (C) Refraction of waves
- (D) Reflection of waves



<video 1>

The answer is D. Reflection of waves.

Here's the reasoning:

1. What is a shockwave? A shockwave is a type of pressure wave that is created by a sudden, intense release of energy, such as an explosion.
2. How do shockwaves travel? Shockwaves travel outward from the point of origin at supersonic speeds.
3. What happens when a shockwave hits a surface? When a shockwave encounters a surface, it is reflected back.
4. What do we see in the video? In the video, we observe a visible shockwave emanating from the explosion. The shockwave appears to bend as it travels across the landscape, which is evidence of reflection.

Therefore, the phenomena seen in the video is a reflection of the shockwave. ❌



Choice: D. Reflection of waves

Explanation:

1. Observation of the Images:
 - The series of images shows an explosion occurring in an open field.
 - The explosion generates a large amount of smoke and fire, followed by shockwaves propagating through the air.
2. Analyzing the Phenomena:
 - Diffraction of Waves: This occurs when waves bend around obstacles or spread out after passing through small openings. The images do not show any evidence of waves bending around obstacles.
 - Interference of Waves: This occurs when two or more waves overlap and combine to form a new wave pattern. The images do not show any overlapping wave patterns.
 - Refraction of Waves: This occurs when waves change direction as they pass from one medium to another. The images do not show any evidence of waves changing direction due to a change in medium.
 - Reflection of Waves: This occurs when waves bounce back after hitting a surface. The images show shockwaves propagating outward from the explosion and then reflecting back after hitting the ground or other surfaces.
3. Detailed Reasoning:
 - In the images, particularly the 7th image, you can see the shockwave generated by the explosion. The shockwave is a type of pressure wave that travels through the air.
 - The shockwave hits the ground and other surfaces, causing it to reflect back. This is evident from the circular patterns and the way the shockwave appears to bounce back after hitting the ground.
 - The reflection of the shockwave is a clear indication of the reflection of waves phenomenon.

Therefore, the correct choice is D. Reflection of waves. ❌



The image shows a large explosion with a significant amount of smoke and debris being ejected into the air. The smoke is billowing upwards and outwards in all directions, creating a cloud-like effect. This visual effect is due to the diffraction of waves, which is the bending of waves around obstacles and openings. When an explosion occurs, the shock waves produced by the blast can bend and spread out as they encounter the surrounding environment, such as the ground, air, and any obstacles in their path. This bending and spreading of the shock waves result in the cloud-like appearance of the smoke and debris. Therefore, the correct answer is A. Diffraction of waves. ❌

Figure 49: A sample case of physics-based dynamics—collision. Back to List of Figures.

4266
4267
4268
4269
4270
4271
4272
4273
4274
4275
4276
4277
4278
4279
4280
4281
4282
4283
4284
4285
4286
4287
4288
4289
4290
4291
4292
4293
4294
4295
4296
4297
4298
4299
4300
4301
4302
4303
4304
4305
4306
4307
4308
4309
4310
4311
4312
4313
4314
4315
4316
4317
4318
4319

Dynamics: Throwing

Question: If we removed the green floating wall and other balls, which pit would the black ball drop into? <video 1>

Option:

- (A) The left pit
- (B) The right pit
- (C) None of the above
- (D) Both pits



<video 1>

The answer is A. The left pit.

Here is the reasoning:

1. The black ball is sitting on the second platform from the left.
2. There is a white ball to the right of the black ball.
3. The green floating wall is the only thing preventing the black ball from falling into the left pit.
4. Removing the green wall would remove the obstacle between the black ball and the left pit.
5. Therefore, the black ball would fall into the left pit.



Choice: B. The right pit

Reasoning:

1. Initial Position and Movement:
 - The black ball starts near the top of the screen, positioned above the right pit.
 - The green floating wall is currently preventing the black ball from falling directly into the right pit.
2. Removing the Green Floating Wall:
 - If the green floating wall is removed, the black ball will no longer have an obstacle in its path.
 - The black ball will fall straight down due to gravity.
3. Path of the Black Ball:
 - Without the green floating wall, the black ball will fall directly downward.
 - The black ball is positioned directly above the right pit.
4. Conclusion:
 - Since the black ball is directly above the right pit and there are no other obstacles in its path, it will fall into the right pit.

Therefore, the black ball will drop into the right pit if the green floating wall and other balls are removed.



To determine where the black ball would drop into, we need to analyze the image and the position of the pits. The black ball is located above the left pit and below the right pit. Since the pits are not visible from the front, we cannot see if there is a barrier or if the pits are empty. However, based on the position of the black ball, it is more likely to drop into the pit on the left side of the image. Therefore, the answer is A. The black ball would drop into the left pit.



Figure 50: A sample case of physics-based dynamics—throwing. Back to List of Figures.

4320
4321
4322
4323
4324
4325
4326
4327
4328
4329
4330
4331
4332
4333
4334
4335
4336
4337
4338
4339
4340
4341
4342
4343
4344
4345
4346
4347
4348
4349
4350
4351
4352
4353
4354
4355
4356
4357
4358
4359
4360
4361
4362
4363
4364
4365
4366
4367
4368
4369
4370
4371
4372
4373

Scene: Light

Question: Observing the phenomena in the video, which of the following alterations to the light source is most likely to produce such an effect?<video 1>

Option:

- (A) It's just that the light source is weaker and the light source position remains the same
- (B) It's just that the light source is stronger and the light source position remains the same
- (C) The color of the light changes from limeyellow to blue
- (D) The color of the light changes from red to pink



<video 1>

The answer is A. It's just that the light source is weaker and the light source position remains the same.

Here's the reasoning:

1. Observation: The objects in the video cast elongated shadows, indicating that the light source is positioned at a low angle. The shadows are also relatively faint and indistinct, suggesting the light source is not very strong.

2. Elimination:

* B. Stronger light source: A stronger light source would produce sharper, more defined shadows. The shadows in the video are too blurry for a strong light source.

* C & D. Color changes: While color changes can affect the perceived appearance of objects, they wouldn't directly cause the elongated and faint shadows observed in the video. ❌

3. Conclusion: The most likely explanation is that the light source is weaker. A weaker light source produces less intense light, resulting in softer, more blurred shadows. The low angle of the light source would still contribute to the elongated shadow shapes.



Choice: B. It's just that the light source is stronger and the light source position remains the same

Detailed Explanation:

1. Observation of Shadows:

- In the series of images, the shadows of the objects on the ground are clearly visible and consistent in shape and position.
- The shadows do not change in size, shape, or direction, indicating that the position of the light source remains constant.

2. Intensity of Shadows:

- The shadows appear to be well-defined and dark, suggesting that the light source is strong and casting distinct shadows.
- If the light source were weaker, the shadows would be less defined and lighter in appearance.

3. Color of Light:

- The images do not show any noticeable change in the color of the light. The ground and objects maintain a consistent color throughout the series of images.
- If the color of the light had changed (options C or D), there would be a visible shift in the color tones of the objects and the ground. ❌

4. Conclusion:

- Since the shadows are well-defined and there is no change in the color of the light, the most likely alteration is that the light source has become stronger while its position remains the same.
- Therefore, the correct choice is B. It's just that the light source is stronger and the light source position remains the same. ❌



The most likely explanation for the observed effect is that the light source is weaker and the light source position remains the same. This is because a weaker light source would result in less intense shadows, making them appear more diffuse and less defined. Additionally, if the position of the light source remains the same, the shadows would still be cast in the same direction, but they would be less pronounced due to the reduced intensity of the light. This would result in the shadows appearing more blurred and less distinct, as seen in the video. Therefore, the correct answer is A. It's just that the light source is weaker and the light source position remains the same. ❌

Figure 51: A sample case of physical scene understanding—light. Back to List of Figures.

4374
4375
4376
4377
4378
4379
4380
4381
4382
4383
4384
4385
4386
4387
4388
4389
4390
4391
4392
4393
4394
4395
4396
4397
4398
4399
4400
4401
4402
4403
4404
4405
4406
4407
4408
4409
4410
4411
4412
4413
4414
4415
4416
4417
4418
4419
4420
4421
4422
4423
4424
4425
4426
4427

Scene: Camera

Question: Which of the following camera modifications can explain the effect seen in the video? <video 1>

Option:

- (A) Move parallel to the line between the pudding and the blanket
- (B) Move parallel to the line between the cube and the blanket
- (C) The camera moves upward or downward
- (D) The camera is farther away from the objects



<video 1>

The answer is C. The camera moves upward or downward.

Here is the reasoning:

1. Observation: The objects in the video appear to be moving away from each other, with the blanket and pillow at the top, the pudding in the middle, and the cube and papaya at the bottom. This creates a perspective where objects farther away appear smaller.
2. Camera Movement: The most likely explanation for this perspective change is that the camera is moving upward or downward. As the camera moves upward, the objects below it appear to shrink and move apart, creating the illusion of them getting farther away.
3. Elimination of Other Options:
 - * A. Move parallel to the line between the pudding and the blanket: Moving parallel to this line wouldn't change the relative size of the objects.
 - * B. Move parallel to the line between the cube and the blanket: Similar to option A, this movement wouldn't cause objects to appear smaller.
 - * D. The camera is farther away from the objects: Moving the camera farther away would make all the objects appear smaller, but it wouldn't create the relative size changes seen in the video.

Therefore, the only camera modification that can explain the effect is the camera moving upward or downward. This creates the illusion of depth and perspective by changing the relative sizes of the objects.



Choice: B. Move parallel to the line between the cube and the blanket

Explanation:

1. Observation of Images:
 - The series of images shows a consistent change in the relative positions of the objects (the Rubik's cube, the egg on the plate, and the yellow object) with respect to the background (the blanket and pillows).
 - The Rubik's cube and the yellow object appear to move horizontally across the images, while the egg on the plate and the blanket remain relatively stationary.
 2. Analysis of Movement:
 - The Rubik's cube and the yellow object are moving in a direction that suggests a horizontal shift.
 - The blanket and pillows, which are in the background, do not show significant vertical movement, indicating that the camera is not moving upward or downward.
 3. Determining the Direction of Camera Movement:
 - Since the Rubik's cube and the yellow object are moving horizontally, the camera must be moving parallel to the line that connects these objects to the blanket.
 - This horizontal movement aligns with the direction between the cube and the blanket, suggesting that the camera is moving parallel to this line.
 4. Eliminating Other Options:
 - Option A (Move parallel to the line between the pudding and the blanket): This would likely cause a different pattern of movement, not the consistent horizontal shift observed.
 - Option C (The camera moves upward or downward): This would result in vertical movement of the objects relative to the background, which is not observed.
 - Option D (The camera is farther away from the objects): This would cause a change in the scale or size of the objects, not the consistent horizontal shift seen.
- Therefore, the correct choice is B. Move parallel to the line between the cube and the blanket.



The effect seen in the video, where the Rubik's Cube appears to be floating in mid-air, can be explained by the camera moving upward or downward. This is because the camera's movement creates a perspective that makes the cube appear to be floating, as if it is not supported by any surface. The other options do not provide the same visual effect. The camera moving parallel to the line between the pudding and the blanket would not create the illusion of floating, and the camera being farther away from the objects would not change the perceived position of the cube. Therefore, the correct choice is C. The camera moves upward or downward.

Figure 52: A sample case of physical scene understanding—camera. Back to List of Figures.


4428
4429
4430
4431
4432
4433
4434
4435
4436
4437
4438
4439
4440
4441
4442
4443
4444
4445
4446
4447
4448
4449
4450
4451
4452
4453
4454
4455
4456
4457
4458
4459
4460
4461
4462
4463
4464
4465
4466
4467
4468
4469
4470
4471
4472
4473
4474
4475
4476
4477
4478
4479
4480
4481

Scene: Camera

Question: In light of the effects observed in the video, which of the following camera adjustments might achieve the depicted outcome?<video 1>

Option:

(A) The camera is closer to the objects
(B) Move parallel to the line between the cereal and the skiboot
(C) Move parallel to the line between the cereal and the cymbal
(D) The camera is farther away from the objects




<video 1>

The answer is D. The camera is farther away from the objects.

Here's the step-by-step reasoning:

1. Observe the effect: The objects in the video appear smaller and further apart than they likely are in reality. This suggests a shift in perspective.
2. Consider camera positioning: A change in perspective is primarily achieved by moving the camera closer or further away from the scene.
3. Eliminate options:
 - A. The camera is closer to the objects: This would make the objects appear larger and closer together, the opposite of what we see in the video.
 - B. Move parallel to the line between the cereal and the skiboot: This movement would change the angle of view, but not necessarily the overall size or distance between objects.
 - C. Move parallel to the line between the cereal and the cymbal: Similar to option B, this would adjust the angle but not the scale of the objects.
4. Conclusion: The only remaining option, D, is consistent with the observed effect. Moving the camera further away from the objects would make them appear smaller and further apart, matching the video.


✗

 C. Move parallel to the line between the cereal and the cymbal

Detailed Explanation:

1. Observation of Movement:
 - In the series of images, the objects appear to shift positions relative to each other. Specifically, the cereal box and the cymbal seem to change their relative positions more significantly compared to the other objects.
2. Relative Position Analysis:
 - The cereal box and the cymbal are positioned on opposite sides of the frame. As the images progress, the cereal box moves from the left side of the frame towards the right, while the cymbal moves from the right side of the frame towards the left.
3. Determining Camera Movement:
 - The observed effect suggests that the camera is moving in a direction that changes the relative positions of the cereal box and the cymbal. This indicates a movement parallel to the line connecting these two objects.
4. Eliminating Other Options:
 - Option A (The camera is closer to the objects): This would result in the objects appearing larger but would not necessarily change their relative positions in the way observed.
 - Option B (Move parallel to the line between the cereal and the skiboot): This would primarily affect the relative positions of the cereal and the skiboot, but the significant changes are observed between the cereal and the cymbal.
 - Option D (The camera is farther away from the objects): This would result in the objects appearing smaller but would not necessarily change their relative positions in the way observed.
5. Conclusion:
 - The most plausible explanation for the observed changes in the relative positions of the objects is that the camera is moving parallel to the line between the cereal and the cymbal. This movement would cause the cereal box and the cymbal to appear to shift positions relative to each other, as seen in the images.

✗

 To achieve the depicted outcome, where the objects appear larger and the background appears smaller, the camera needs to be closer to the objects. This is because the perspective of the image is such that the objects are in the foreground and the background is in the distance, creating a sense of depth. By moving the camera closer, the objects will appear larger due to the decrease in distance, and the background will appear smaller due to the increase in distance. Therefore, the correct choice is:

A. The camera is closer to the objects.

This choice is based on the principles of perspective and depth of field in photography, where objects closer to the camera appear larger, and objects further away appear smaller. The other options (B, C, and D) do not align with the desired outcome of making the objects appear larger and the background smaller.

✓

Figure 53: A sample case of physical scene understanding—camera. Back to List of Figures.

4482
4483
4484
4485
4486
4487
4488
4489
4490
4491
4492
4493
4494
4495
4496
4497
4498
4499
4500
4501
4502
4503
4504
4505
4506
4507
4508
4509
4510
4511
4512
4513
4514
4515
4516
4517
4518
4519
4520
4521
4522
4523
4524
4525
4526
4527
4528
4529
4530
4531
4532
4533
4534
4535

Dynamics: Chemistry

Question: What action is displayed in the video?<video 1>

Option:

- (A) Candle being blown out deliberately
- (B) Candle causing wax to overflow
- (C) Candle burning with a double wick
- (D) Candle being used in a romantic setting



<video 1>

The answer is C. Candle burning with a double wick.

Here's the reasoning:

1. Visual Cues: The video shows a tall, cylindrical candle with a honeycomb pattern. The flame at the top suggests the candle is burning.
2. Flame Observation: The flame appears to be unusually tall and wide, indicating a larger-than-normal amount of fuel being consumed.
3. Double Wick Inference: This suggests that the candle



B. Candle causing wax to overflow

Detailed Explanation:

1. Observation of Candle Burning: The series of images shows a candle burning over time. The flame is consistent and does not show signs of being blown out deliberately (which would typically show a sudden change in the flame's behavior).
2. Wax Overflow: In the last two images, there is a noticeable overflow of wax on the left side of the candle. This indicates that the candle has been burning for a while, causing the wax to melt and overflow.
3. No Double Wick: The images do not show any indication of a double wick. The flame is singular and centered, which is typical for a single-wick candle.
4. No Romantic Setting: The background is a solid red color with no additional elements that would suggest a romantic setting (such as dim lighting, additional candles, or romantic decor).

Based on these observations, the correct choice is B. Candle causing wax to overflow.



The image shows a single candle with a flame at the top, set against a red background with repeated logos of 'THE 100% NATURAL ROLLING CANDLES' and 'THE NATURAL CANDLE FACTORY EST. 1969'. The repeated logos suggest that the candle is a product being advertised, and the presence of the flame indicates that the candle is currently burning. The action displayed in the video is not explicitly shown, but based on the context of the image, it is reasonable to infer that the candle is being used, likely for its intended purpose, which could be for lighting, ambiance, or decoration. The most likely action is that the candle is being used in a romantic setting, as candles are often associated with romance and intimate settings. Therefore, the choice is:

D. Candle being used in a romantic setting




Figure 54: A sample case of physics-based dynamics—chemistry. Back to List of Figures.

4536
4537
4538
4539
4540
4541
4542
4543
4544
4545
4546
4547
4548
4549
4550
4551
4552
4553
4554
4555
4556
4557
4558
4559
4560
4561
4562
4563
4564
4565
4566
4567
4568
4569
4570
4571
4572
4573
4574
4575
4576
4577
4578
4579
4580
4581
4582
4583
4584
4585
4586
4587
4588
4589


Dynamics: Manipulation

Question: Among the listed choices, which one outlines the proper sequence to close the open cabinet door?<image 1><image 2><image 3>


Option:
 (A) 1 - 3 - 2
 (B) 3 - 2 - 1
 (C) 1 - 2 - 3
 (D) 2 - 1 - 3



<image 1>



<image 2>




<image 3>

The answer is C. 1 - 2 - 3.

Here's the reasoning:

- * Image 1: The robotic arm is fully extended and reaches the cabinet door.
- * Image 2: The arm starts to close the cabinet door.
- * Image 3: The cabinet door is fully closed and the robotic arm retracts back to its original position.

 Choice: C. 1 - 2 - 3

Reasoning Chain:

1. Image #1:
- The cabinet door is fully open. This is the starting point where the door is in its most open position.
2. Image #2:
- The cabinet door is partially closed. This indicates that the door is in the process of being closed but has not yet reached the fully closed position.
3. Image #3:
- The cabinet door is fully closed. This is the final position where the door is completely shut.

Step-by-Step Explanation:

- Step 1: Start with the cabinet door fully open (Image #1).
- Step 2: Move to the partially closed position (Image #2).
- Step 3: Finally, close the door completely (Image #3).

Thus, the proper sequence to close the open cabinet door is 1 - 2 - 3.


 To determine the proper sequence to close the open cabinet door, let's analyze the images:

image #1 shows the cabinet door open, image #2 shows the cabinet door closed, and image #3 shows the cabinet door open again.

Based on this information, the correct sequence to close the open cabinet door would be:

1. Open the cabinet door (image #1)
2. Close the cabinet door (image #2)
3. Open the cabinet door (image #3)

So, the answer is A. 1 - 3 - 2.

Figure 55: A sample case of physics-based dynamics——manipulation. Back to List of Figures.




4590
4591
4592
4593
4594
4595
4596
4597
4598
4599
4600
4601
4602
4603
4604
4605
4606
4607
4608
4609
4610
4611
4612
4613
4614
4615
4616
4617
4618
4619
4620
4621
4622
4623
4624
4625
4626
4627
4628
4629
4630
4631
4632
4633
4634
4635
4636
4637
4638
4639
4640
4641
4642
4643

Dynamics: Manipulation

Question: Which of the provided options demonstrates the accurate steps to close the microwave?<video 1>

Option:

(A) Remove the blue floating wall and other balls
(B) Remove the green floating wall and other balls
(C) None of the above
(D) Remove both the blue and green floating walls

<image 1> <image 2> <image 3>

◆ The answer is B. 1 - 2 - 3.

The robot arm first moves towards the microwave door (image #1), then presses the door down to close it (image #2), and finally, it moves back to its original position (image #3). ❌

🌀 Choice: A. 1 - 3 - 2

Reasoning Chain:

1. Image #1:
- The robot arm is approaching the microwave door, which is open. This is the initial step where the robot is preparing to close the door.
2. Image #3:
- The robot arm is now in contact with the microwave door, starting to push it closed. This is the intermediate step where the door is being moved towards the closed position.
3. Image #2:
- The microwave door is fully closed, and the robot arm is no longer in contact with it. This is the final step where the door has been successfully closed.

Therefore, the correct sequence of steps to close the microwave is 1 - 3 - 2. ❌

🌈 The image shows a kitchen with a microwave oven and a refrigerator. The correct sequence to close the microwave would be to first ensure that the door is open, then to close the door, and finally to secure it with the latch. Therefore, the correct sequence is:

1. Open the microwave door.
2. Close the microwave door.
3. Close the latch.

The correct option is B. 1 - 2 - 3. ❌


Figure 56: A sample case of physics-based dynamics—throwing. Back to List of Figures.

4644
4645
4646
4647
4648
4649
4650
4651
4652
4653
4654
4655
4656
4657
4658
4659
4660
4661
4662
4663
4664
4665
4666
4667
4668
4669
4670
4671
4672
4673
4674
4675
4676
4677
4678
4679
4680
4681
4682
4683
4684
4685
4686
4687
4688
4689
4690
4691
4692
4693
4694
4695
4696
4697


Property: Attribute

Question: How does the flexibility of the left cloth compare to the other cloth?<video 1>

Option:
 (A) It is more flexible
 (B) It is equally flexible
 (C) It is harder to bend
 (D) It is softer



<video 1>


 A. It is more flexible

Here's the reasoning:

1. Observation: We see two cloths on the table, one brown and one plaid.
2. Cloth Movement: Both cloths are draped over the objects on the table. The brown cloth drapes in a more fluid and uneven manner.
3. Flexibility Inference: The more fluid and uneven drape of the brown cloth indicates that it can bend and conform to the shape of the objects more easily. This suggests it is more flexible.
4. Comparison: The plaid cloth, on the other hand, drapes in a more rigid and uniform manner, implying less flexibility.

Therefore, based on the way the cloths drape, we can infer that the brown cloth is more flexible than the plaid cloth.

✘


 A. It is more flexible

Step-by-step explanation:

1. Initial Observation: In the first two images, we see two cloths placed on a table with some objects underneath them. The left cloth is orange, and the right cloth is checkered.
2. Cloth Placement: In the third image, both cloths are being placed on the objects. The left cloth (orange) and the right cloth (checkered) are both pinned at the corners.
3. Cloth Behavior: As the cloths are draped over the objects, we can observe their behavior:
 - In the fourth image, the left cloth (orange) starts to show more pronounced draping and bending around the object compared to the right cloth (checkered).
 - In the fifth image, the left cloth (orange) continues to show more flexibility, conforming more closely to the shape of the object underneath it.
 - In the sixth and seventh images, the left cloth (orange) appears to be more fluid and flexible, showing more folds and curves compared to the right cloth (checkered), which maintains a more structured and less flexible appearance.
4. Final Observation: By the last image, the left cloth (orange) has clearly shown more flexibility in its ability to drape and conform to the shape of the object underneath it, while the right cloth (checkered) appears stiffer and less flexible.

Based on these observations, the left cloth (orange) is more flexible compared to the right cloth (checkered).

✘

 To determine the flexibility of the left cloth compared to the other cloth, we need to analyze the image and look for any differences in the way the cloths are positioned or how they appear to move. The left cloth is positioned on the left side of the table, while the other cloth is on the right side. We can observe that the left cloth is not as stretched out as the other cloth, which is more extended towards the right side of the table. This suggests that the left cloth is less flexible than the other cloth. Therefore, the choice is A. It is less flexible.

✘

Figure 57: A sample case of physical object property–attribute. Back to List of Figures.

4698
4699
4700
4701
4702
4703
4704
4705
4706
4707
4708
4709
4710
4711
4712
4713
4714
4715
4716
4717
4718
4719
4720
4721
4722
4723
4724
4725
4726
4727
4728
4729
4730
4731
4732
4733
4734
4735
4736
4737
4738
4739
4740
4741
4742
4743
4744
4745
4746
4747
4748
4749
4750
4751

Property: Color

Question: What color does the chameleon turn from blue in the video?<video 1>

Option:
(A) Red
(B) Grey
(C) Purple
(D) Orange



<video 1>

The answer is A. Red.

Here's the explanation:

1. The chameleon starts out a vibrant blue color.
2. The chameleon then begins to change colors.
3. It transitions to a grey color.
4. As the chameleon continues to change, it becomes a reddish-brown color.
5. It stays that color for the rest of the video.

Thus, the chameleon turns from blue to red.



A. Red

Detailed Explanation:

1. Initial Color Observation: The first image shows the chameleon in a green color.
2. Color Transition: As we move through the series of images, the chameleon's color changes from green to yellow, then to blue.
3. Blue Color Observation: The fourth and fifth images show the chameleon in a blue color.
4. Post-Blue Color Transition: After the blue color, the chameleon changes to a brownish color in the sixth image.
5. Final Color Observation: The last three images show the chameleon in a reddish color.

Therefore, the chameleon turns from blue to red in the video.



The chameleon in the video turns from blue to green. This is evident from the visual information provided in the image, where the chameleon is shown in different stages of changing its color. Initially, it is blue, and as it moves along the branch, it gradually changes to green. This color change is a common characteristic of chameleons, which they use for various purposes such as camouflage, communication, and temperature regulation. The chameleon's ability to change its color is due to specialized cells in its skin called chromatophores, which contain pigments that can expand or contract to alter the color of the chameleon's skin. The process is controlled by the chameleon's nervous system, which responds to changes in light, temperature, and other environmental factors. In this case, the chameleon is likely changing its color to blend in with its surroundings or to regulate its body temperature. Therefore, the correct answer is green.




Figure 58: A sample case of physical object property–color. Back to List of Figures.


4752
4753
4754
4755
4756
4757
4758
4759
4760
4761
4762
4763
4764
4765
4766
4767
4768
4769
4770
4771
4772
4773
4774
4775
4776
4777
4778
4779
4780
4781
4782
4783
4784
4785
4786
4787
4788
4789
4790
4791
4792
4793
4794
4795
4796
4797
4798
4799
4800
4801
4802
4803
4804
4805


Property: Mass


Question: By proceeding in the direction shown by the arrow in the picture, which of the following options are you most likely to come across?<image 1>


Option:
 (A) <image 2>
 (B) <image 3>
 (C) <image 4>
 (D) <image 5>


<image 1>


<image 2>



<image 3>


<image 4>


<image 5>


The answer is D.

- * The arrow points to the right, indicating the path the viewer should take.
- * Looking to the right, one can see that the road turns right.
- * The image shows a building on the right side of the street.
- * This building is the same building shown in image D, indicating that D is what the viewer would see by proceeding in the direction of the arrow.

 Choice: B

Reasoning:

1. Initial Image Analysis:
 - The initial image shows a road with a right turn indicated by a red arrow.
 - The road is lined with trees and has a pedestrian crossing in the foreground.
 - There is a blue gate on the left side of the road.
2. Direction of Travel:
 - The red arrow indicates a right turn from the current position.
3. Comparison with Options:
 - Option A: Shows a construction site with cranes and high-rise buildings. This does not match the environment in the initial image, which is more residential or institutional.
 - Option B: Shows a blue gate with a Singapore flag, which matches the blue gate seen on the left side of the initial image. This suggests that the area beyond the gate is likely to be encountered if you turn right.
 - Option C: Shows a continuation of the tree-lined road, similar to the initial image but does not show a right turn or a new area.
 - Option D: Shows a building with a parking area and a bus stop, which does not match the immediate surroundings of the initial image.
4. Conclusion:
 - Given the blue gate in the initial image and the blue gate in Option B, it is most likely that by turning right, you will come across the area shown in Option B.

 To determine the most likely option to come across by proceeding in the direction shown by the red arrow, we need to analyze the image and the options provided.

1. The red arrow is pointing to the right, indicating a direction to move forward.
2. The image shows a street with multiple lanes, cars, and pedestrians.
3. There are trees, a building with a sign that reads "CONGRESS," and a construction site with cranes in the background.
4. The options are A, B, and C, but the fourth option is not visible in the image.

Based on the visible information, we can eliminate option C, as it is not visible in the image.

Now, let's compare options A and B:

Option A: The image shows a street with multiple lanes, cars, and pedestrians. There is a sign that reads "CONGRESS," which suggests that the direction shown by the red arrow might lead to a place related to Congress.

Option B: The image shows a street with multiple lanes, cars, and pedestrians. There is a construction site with cranes in the background. The direction shown by the red arrow might lead to a place related to construction or a construction site.

Considering the context and the visible elements in the image, the most likely option to come across by proceeding in the direction shown by the red arrow is option A, as it leads to a place related to Congress.


Figure 59: A sample case of physical object property–mass. Back to List of Figures.

4806
4807
4808
4809
4810
4811
4812
4813
4814
4815
4816
4817
4818
4819
4820
4821
4822
4823
4824
4825
4826
4827
4828
4829
4830
4831
4832
4833
4834
4835
4836
4837
4838
4839
4840
4841
4842
4843
4844
4845
4846
4847
4848
4849
4850
4851
4852
4853
4854
4855
4856
4857
4858
4859

Property: Mass

Question: Which fruit in the picture is most likely to be the heaviest individually?<image 1>

Option:
 (A) Watermelon
 (B) Pear
 (C) Plum
 (D) Peach



<video 1>

◆ A. Watermelon

Here's the reasoning:

1. Visual Size: The watermelon is noticeably larger than all the other fruits in the picture. This suggests it has a greater volume.
2. Density: While we don't know the exact densities of the fruits, watermelons are known to be mostly water, making them relatively dense.
3. Combined: A larger volume combined with higher density leads to a greater overall mass, which translates to a heavier weight.

Therefore, it's safe to assume the watermelon is the heaviest fruit in the picture. ✓

🌀 A. Watermelon

Reasoning:

1. Visual Inspection: By looking at the image, the watermelon appears significantly larger in size compared to the other fruits.
2. Typical Weight: Generally, watermelons are known to be much heavier than pears, plums, and peaches. Even a small watermelon can weigh several pounds, whereas the other fruits typically weigh much less.
3. Density and Volume: Watermelons have a high water content and a large volume, contributing to their weight. Pears, plums, and peaches, while also containing water, are much smaller in volume and thus weigh less individually.

Therefore, based on size and typical weight characteristics, the watermelon is most likely to be the heaviest fruit individually in the picture. ✓

🌈 To determine which fruit is most likely to be the heaviest individually, we need to consider the average weight of each type of fruit.

- A. Watermelon: A typical watermelon can weigh between 20 to 30 pounds.
- B. Pear: A pear can weigh between 0.25 to 0.5 pounds.
- C. Plum: A plum can weigh between 0.1 to 0.2 pounds.
- D. Peach: A peach can weigh between 0.1 to 0.2 pounds.

Based on the average weights, the watermelon is most likely to be the heaviest fruit individually. ✓

Figure 60: A sample case of physical object property–mass. Back to List of Figures.

4860
4861
4862
4863
4864
4865
4866
4867
4868
4869
4870
4871
4872
4873
4874
4875
4876
4877
4878
4879
4880
4881
4882
4883
4884
4885
4886
4887
4888
4889
4890
4891
4892
4893
4894
4895
4896
4897
4898
4899
4900
4901
4902
4903
4904
4905
4906
4907
4908
4909
4910
4911
4912
4913

Property: Number

Question: Following the content of the <video>, How many egg yolks were put in the bowl?<video 1>

Option:

- (A) 1
- (B) 2
- (C) 3
- (D) 4



<video 1>

The answer is D. 4

Here's the reasoning:

1. Start counting: The video starts with 2 egg yolks in the bowl.
2. Adding more: The person then cracks open and adds 2 more eggs.
3. Total count: Adding the 2 new egg yolks to the initial 2 gives us a total of 4 egg yolks.



C. 3

Detailed Explanation:

1. First Image: The bowl is empty.
2. Second Image: A hand is holding an egg over the bowl.
3. Third Image: The egg is being cracked open, and one egg yolk is visible in the bowl.
4. Fourth Image: Another egg is being cracked open, and now there are two egg yolks in the bowl.
5. Fifth Image: A third egg is being cracked open, and the yolk is about to drop into the bowl.
6. Sixth Image: The third egg yolk is halfway into the bowl.
7. Seventh Image: The third egg yolk is almost completely in the bowl.
8. Eighth Image: The third egg yolk is fully in the bowl, making a total of three egg yolks.

Therefore, the total number of egg yolks put in the bowl is 3.



The image shows a clear glass bowl with a textured surface, containing a liquid that appears to be a mixture of water and egg yolks. The bowl is placed on a surface that looks like a white table or countertop. There are no visible eggs or any other objects in the bowl, and the image does not provide any information about the number of egg yolks that were put in the bowl. Therefore, it is not possible to determine the exact number of egg yolks based on the image alone. The correct answer to the question cannot be determined from the image provided.


Figure 61: A sample case of physical object property–number. Back to List of Figures.

4914
4915
4916
4917
4918
4919
4920
4921
4922
4923
4924
4925
4926
4927
4928
4929
4930
4931
4932
4933
4934
4935
4936
4937
4938
4939
4940
4941
4942
4943
4944
4945
4946
4947
4948
4949
4950
4951
4952
4953
4954
4955
4956
4957
4958
4959
4960
4961
4962
4963
4964
4965
4966
4967


Property: Number

Question: How many deer are there?<image 1>


Option:
(A) 2
(B) 4
(C) 6
(D) 8



<video 1>

 The answer is C.
There are four deer that are fully visible, and two that are partially visible. So there are 6 deer.

✗


 C. 6

Step-by-step explanation:

1. Observation: Look closely at the image to identify the number of deer present.
2. Counting: Start from one side of the image and count each deer individually.
 - On the left side, there are two deer visible.
 - Moving towards the center, there are two more deer.
 - On the right side, there are two additional deer.
3. Total: Add the number of deer counted in each section.
 - 2 (left) + 2 (center) + 2 (right) = 6 deer in total.

Therefore, the correct choice is C. 6.

✗

 To determine the number of deer in the image, we need to count each individual deer visible in the scene. Starting from the left side of the image and moving towards the right, we can see the following deer:

1. A deer with large antlers grazing on the grass.
2. A deer with smaller antlers grazing on the grass.
3. A deer with large antlers grazing on the grass.
4. A deer with smaller antlers grazing on the grass.
5. A deer with large antlers grazing on the grass.
6. A deer with smaller antlers grazing on the grass.
7. A deer with large antlers grazing on the grass.
8. A deer with smaller antlers grazing on the grass.
9. A deer with large antlers grazing on the grass.
10. A deer with smaller antlers grazing on the grass.

There are a total of 10 deer in the image. Therefore, the correct answer is:
D. 8

✓


Figure 62: A sample case of physical object property–number. Back to List of Figures.

4968
4969
4970
4971
4972
4973
4974
4975
4976
4977
4978
4979
4980
4981
4982
4983
4984
4985
4986
4987
4988
4989
4990
4991
4992
4993
4994
4995
4996
4997
4998
4999
5000
5001
5002
5003
5004
5005
5006
5007
5008
5009
5010
5011
5012
5013
5014
5015
5016
5017
5018
5019
5020
5021

Property: Attribute

Question: Can you tell me which point with option in the image points to the object that has the least brittle?<image 1>

Option:
(A) Point A
(B) Point B
(C) Point C
(D) Point D




<video 1>

The answer is B. Here's why:

1. Brittle means easily broken or shattered.
2. A is a wooden clothespin, which can break with enough force.
3. B is a camera lens, made of strong glass and metal, it's designed to withstand impacts and pressure.
4. C is a ceramic plate, which is brittle and easily broken.
5. D is a ceramic mug, also brittle and easily broken.

Therefore, the object pointed by B has the least brittle nature.

✗


 Choice: D. Point D

Reasoning Chain:

1. Understanding Brittleness: Brittleness is a material property that describes the tendency of a material to fracture or break without significant deformation when subjected to stress.
2. Analyzing Objects:
 - Point A (Clothespins): Clothespins are typically made of wood or plastic. Both materials can be somewhat brittle, especially if they are thin and subjected to bending forces.
 - Point B (Camera Lens): Camera lenses are made of glass and metal. Glass is very brittle and can shatter easily upon impact.
 - Point C (Plate): Plates are usually made of ceramic or glass, both of which are brittle materials that can break easily if dropped.
 - Point D (Mug): Mugs are often made of ceramic, which is brittle. However, if the mug is made of plastic, it would be much less brittle compared to the other materials listed.
3. Determining the Least Brittle Object:
 - Among the materials listed, plastic is generally the least brittle.
 - Since the mug (Point D) could be made of plastic, it is likely to be the least brittle object in the image.

Therefore, the object at Point D (the mug) is the least brittle among the options provided.

✗

 To determine which object is the least brittle, we need to consider the materials and typical usage of each object.

- A. A paperclip is made of metal and is designed to hold papers together. It is not typically brittle, but it can bend or break if subjected to excessive force.
- B. A camera lens is made of glass and is designed to focus light onto a sensor. Glass is a brittle material and can easily break if dropped or subjected to impact.
- C. A plate is made of ceramic or porcelain and is designed to hold food. Ceramic and porcelain are brittle materials and can break if dropped or subjected to impact.
- D. A mug is made of ceramic or porcelain and is designed to hold liquids. Ceramic and porcelain are brittle materials and can break if dropped or subjected to impact.

Based on this analysis, the object with the least brittle material is the paperclip (Option A).

✗






Figure 63: A sample case of physical object property–attribute. Back to List of Figures.


5022
5023
5024
5025
5026
5027
5028
5029
5030
5031
5032
5033
5034
5035
5036
5037
5038
5039
5040
5041
5042
5043
5044
5045
5046
5047
5048
5049
5050
5051
5052
5053
5054
5055
5056
5057
5058
5059
5060
5061
5062
5063
5064
5065
5066
5067
5068
5069
5070
5071
5072
5073
5074
5075

Relationships: Movement

Question: In the direction pointed by the arrow in the picture, which of the following options are you most likely to find?< image 1>

Option:
 (A) <image 2>
 (B) <image 3>
 (C) <image 4>
 (D) <image 5>


 The answer is B.

The arrow in the picture points towards the right side of the road. Looking at the original image, we can see that the right side of the road is a sidewalk with a few trees and a building with glass windows. This is consistent with the image in choice B.

The other choices do not match the description of the road to the right of the arrow:

- Choice A shows the road with the construction barriers and a building in the distance. It does not match the description of the right side of the road.
- Choice C shows a close-up of the construction barrier and a man walking on the sidewalk. It does not match the description of the right side of the road.
- Choice D shows a road with cars parked on the side. It does not match the description of the right side of the road.


Therefore, the most likely scene to be found in the direction pointed by the arrow is B. ✗

 Choice: A

Reasoning:

1. Initial Image Analysis:
 - The initial image shows a road with traffic barriers on the right side and a large building with a distinctive overhanging structure on the left.
 - The arrow points straight ahead along the road.
2. Option A Analysis:
 - Option A shows a continuation of the same road with the same distinctive building on the left and similar traffic barriers on the right.
 - The perspective and alignment of the road and barriers match the direction indicated by the arrow in the initial image.
3. Option B Analysis:
 - Option B shows a different part of the building, focusing on the side with windows and trees.
 - This view is perpendicular to the direction indicated by the arrow in the initial image.
4. Option C Analysis:
 - Option C shows a close-up of a person walking next to a construction barrier.
 - This image does not provide a clear continuation of the road or the distinctive building seen in the initial image.
5. Option D Analysis:
 - Option D shows a different street with buildings on both sides and parked cars.
 - The environment and road layout do not match the scene in the initial image.

Based on the analysis, Option A is the most likely to be found in the direction pointed by the arrow in the initial image. ✗

 To make a choice, let's analyze the image step by step:

1. The image shows a city street with multiple lanes of traffic, including cars and a truck.
2. There are trees lining the street, and buildings in the background.
3. A person with a backpack is walking on the sidewalk, and there are construction cranes visible in the distance.
4. The sky is clear, and the weather appears to be sunny.
5. There are no visible signs or markers indicating a specific direction or destination.

Based on the image, it is not possible to determine a specific location or destination. Therefore, the most likely option is:

D. Cannot determine a specific location or destination from the image. ✗


Figure 64: A sample case of physical object relationships–movement. Back to List of Figures.

5076
5077
5078
5079
5080
5081
5082
5083
5084
5085
5086
5087
5088
5089
5090
5091
5092
5093
5094
5095
5096
5097
5098
5099
5100
5101
5102
5103
5104
5105
5106
5107
5108
5109
5110
5111
5112
5113
5114
5115
5116
5117
5118
5119
5120
5121
5122
5123
5124
5125
5126
5127
5128
5129

Relationships: Movement

Question: Compared to the metal object, what is likely the relative speed of the machine's rotation?< video 1>

Option:
 (A) The machine rotates slower than the object
 (B) The machine rotates at the same speed as the object
 (C) The machine rotates faster than the object
 (D) The machine does not rotate at all




<video 1>

The answer is C. The machine rotates faster than the object.

Here's the reasoning:

1. Observation: The metal object is being heated by friction.
2. Friction: Friction is generated when two surfaces rub against each other.
3. Speed and Friction: The faster the relative speed between two surfaces, the more friction is generated.
4. Appearance: The heat being generated is enough to melt a portion of the metal. This suggests a significant amount of friction.
5. Conclusion: Since the metal object is being heated by friction, and the friction is significant, the machine must be rotating faster than the metal object to generate this amount of friction.

✘


 C. The machine rotates faster than the object

Detailed Explanation:

1. Observation of Images: The series of images shows a metal object being processed by a machine. The metal object appears to be rotating, and there is a noticeable change in the appearance of the object over time, particularly in the central area where it becomes red-hot due to friction or heat.
2. Heat Generation: The central area of the metal object becomes red-hot, indicating that there is significant friction or heat being generated. This is a common result of high-speed rotation and contact with another surface.
3. Relative Motion: For the metal object to heat up in this manner, the machine must be rotating at a higher speed than the object itself. This differential in speed causes friction, which in turn generates heat.
4. Visual Cues: The images show the metal object becoming progressively hotter and more deformed in the central area. This suggests that the machine is applying a significant amount of energy to the object, which is consistent with the machine rotating faster than the object.
5. Conclusion: Based on the visual evidence of heat generation and the deformation of the metal object, it is reasonable to conclude that the machine is rotating faster than the object to create the necessary friction and heat.

Therefore, the correct choice is C. The machine rotates faster than the object.

✘

 To determine the relative speed of the machine's rotation compared to the metal object, we need to analyze the motion of both in the image. The metal object appears to be stationary or moving very slowly, as there is no motion blur or indication of rapid movement. The machine, on the other hand, shows a clear motion blur, suggesting it is rotating at a higher speed. This is because motion blur is typically caused by a rapid movement, which in this case is the rotation of the machine. Therefore, the machine's rotation is likely faster than the metal object's movement. The correct choice is C. The machine rotates faster than the object.

✘

Figure 65: A sample case of physical object relationships–movement. Back to List of Figures.

5130
5131
5132
5133
5134
5135
5136
5137
5138
5139
5140
5141
5142
5143
5144
5145
5146
5147
5148
5149
5150
5151
5152
5153
5154
5155
5156
5157
5158
5159
5160
5161
5162
5163
5164
5165
5166
5167
5168
5169
5170
5171
5172
5173
5174
5175
5176
5177
5178
5179
5180
5181
5182
5183

Relationships: Depth

Question: In terms of depth relative to the camera, where is the bridge primarily located? <video 1>

Option:

- (A) Closer to the camera than the car
- (B) Equidistant from the car and the camera
- (C) Farther from the camera than the car
- (D) Cannot be determined



<video 1>

The answer is C. Farther from the camera than the car.

Here's the reasoning:

1. Identify the key elements: We see a car on the bridge and the bridge itself, with the camera positioned on the bridge surface.
2. Focus on perspective: The car appears closer to the camera because it is in the foreground. The bridge structure extends beyond the car and towards the horizon.
3. Apply the concept of perspective: In perspective, objects farther away appear smaller and less detailed. The bridge appears much larger in scale than the car, suggesting it is farther away from the camera.
4. Conclude: Based on the visual cues of size and distance within the frame, we can conclude that the bridge is farther from the camera than the car.



C. Farther from the camera than the car

Detailed Explanation:

1. Observation of Images: The series of images shows a bridge with a car on it. The car appears to be in the middle of the bridge, and the bridge structure extends both in front of and behind the car.
2. Relative Positioning: In the images, the car is positioned on the bridge, and the bridge extends further into the background beyond the car. This indicates that the bridge continues past the car, making the bridge structure farther from the camera than the car.
3. Depth Perception: The bridge's towers and cables are visible in the background, indicating that the bridge extends into the distance. The car is closer to the camera than these structures.
4. Conclusion: Since the bridge extends beyond the car and the car is positioned on the bridge, the bridge is primarily located farther from the camera than the car.

Therefore, the correct choice is C. Farther from the camera than the car.



To determine the depth of the bridge relative to the camera, we need to analyze the image and the perspective from which it is taken. The bridge appears to be in the foreground, as it is in sharp focus and there is a clear view of the cables and the road surface. The car, on the other hand, is in the background, as it is out of focus and appears smaller due to the perspective. The bridge is also closer to the camera because the cables and the road surface are in clear view, while the car is not. Therefore, the bridge is primarily located closer to the camera than the car.

Choice: A. Closer to the camera than the car




Figure 66: A sample case of physical object relationships–depth. Back to List of Figures.

5184
5185
5186
5187
5188
5189
5190
5191
5192
5193
5194
5195
5196
5197
5198
5199
5200
5201
5202
5203
5204
5205
5206
5207
5208
5209
5210
5211
5212
5213
5214
5215
5216
5217
5218
5219
5220
5221
5222
5223
5224
5225
5226
5227
5228
5229
5230
5231
5232
5233
5234
5235
5236
5237

Relationships: Depth

Question: Identify the closest point to the camera. < image 1 >

Option:
 (A) Point A is closest
 (B) Point B is closest
 (C) Point C is closest
 (D) Point D is closest




< image 1 >

The answer is D. Here's why:

1. Perspective: We can use the concept of perspective to determine distance. Objects further away appear smaller in a photograph.
2. Object Size: The circles are the same size, allowing us to directly compare their apparent size in the image.
3. Comparison: Circle D appears larger than the other circles, indicating that it is closer to the camera.


Therefore, Point D is the closest to the camera. ✓

 D. Point D is closest

Reasoning:

1. Foreground and Background Analysis:
 - Point D is located on the road, which is in the immediate foreground of the image.
 - Points A, B, and C are situated further back in the field, which is in the background.
2. Perspective and Depth:
 - The road in the foreground appears larger and more detailed, indicating it is closer to the camera.
 - The field and the fence posts in the background appear smaller and less detailed, indicating they are further away.
3. Relative Positioning:
 - Point D is positioned at the bottom of the image, which typically represents the closest point to the viewer in a two-dimensional perspective.
 - Points A, B, and C are higher up in the image, indicating they are further away from the camera.

Based on these observations, Point D is the closest to the camera. ✓

 To solve this task, we need to analyze the image and determine which point is closest to the camera based on the perspective and the size of the points relative to each other.

1. Point A is located at the top of the image.
2. Point B is located to the left of the image.
3. Point C is located to the right of the image.
4. Point D is located at the bottom of the image.

From the perspective of the camera, the points that are closer to the camera will appear larger and more detailed, while the points that are further away will appear smaller and less detailed.

In the image, Point D appears to be the largest and most detailed, while Points A, B, and C appear smaller and less detailed. Therefore, Point D is the closest point to the camera.

The answer is D. Point D is closest to the camera. ✓

Figure 67: A sample case of physical object relationships—depth. Back to List of Figures.


5238
5239
5240
5241
5242
5243
5244
5245
5246
5247
5248
5249
5250
5251
5252
5253
5254
5255
5256
5257
5258
5259
5260
5261
5262
5263
5264
5265
5266
5267
5268
5269
5270
5271
5272
5273
5274
5275
5276
5277
5278
5279
5280
5281
5282
5283
5284
5285
5286
5287
5288
5289
5290
5291

Relationships: Distance

Question: Which object appears closest to the camera in the video?<video 1>

Option:

(A) The metal plate
(B) The string
(C) The yellow ball
(D) The person's hand



< video 1 >

◆ The answer is C.The yellow ball.

Here is the reasoning chain:

1. The yellow ball is the only object that is directly attached to the string and swings in the video.
2. The string is attached to a fixed point above the metal plate.
3. Therefore, the yellow ball is closest to the camera at all times in the video because it is swinging in front of the plate and the person's hand.
4. While the person's hand is closer to the camera at the start, the yellow ball moves to the very front in the second half of the video.

Therefore, the yellow ball appears closest to the camera in the video. ❌

🌀 C. The yellow ball

Step-by-step explanation:

1. Observation of Images: By examining the series of images, we can see the relative positions of the objects in each frame.
2. Depth Perception: Depth perception in images can be inferred by noting which objects overlap others and which objects appear larger or smaller due to perspective.
3. Relative Positioning:
 - The metal plate (A) is a large, flat object that serves as a background for the other objects.
 - The string (B) is thin and appears to be in the middle of the scene, attached to the top and holding the yellow ball.
 - The yellow ball (C) is held by the string and appears to be in front of the metal plate.
 - The person's hand (D) is interacting with the yellow ball and is positioned behind it in most frames.
4. Overlapping Objects:
 - The yellow ball overlaps the metal plate and the string, indicating it is in front of them.
 - The person's hand is behind the yellow ball in most frames, indicating the ball is closer to the camera.
5. Conclusion: Based on the overlapping and relative positioning, the yellow ball (C) appears closest to the camera in the video. ❌

🌈 To determine which object appears closest to the camera in the video, we need to analyze the image and identify the object that is most in focus and has the smallest depth of field. The metal plate (A) is in the foreground and is in sharp focus, indicating it is the closest object to the camera. The string (B) is also in focus but slightly behind the metal plate. The yellow ball (C) is in focus but further away than the metal plate. The person's hand (D) is in focus but even further away than the yellow ball. Therefore, the metal plate appears closest to the camera. ✅

Figure 68: A sample case of physical object relationships–distance. Back to List of Figures.

5292
5293
5294
5295
5296
5297
5298
5299
5300
5301
5302
5303
5304
5305
5306
5307
5308
5309
5310
5311
5312
5313
5314
5315
5316
5317
5318
5319
5320
5321
5322
5323
5324
5325
5326
5327
5328
5329
5330
5331
5332
5333
5334
5335
5336
5337
5338
5339
5340
5341
5342
5343
5344
5345

Relationships: Distance

Question: What is the expected consequence of doubling the size of the sail? <video 1>

Option:

- (A) The cart will move backward more quickly
- (B) The cart will move forward rapidly
- (C) The sail will turn more prominently
- (D) No significant change



< video 1 >

The answer is B. The cart will move forward rapidly.

Here's the reasoning:

- * Newton's Third Law: For every action, there is an equal and opposite reaction.
- * The Action: The fan pushes air backward.
- * The Reaction: The air pushes the fan forward.
- * The Sail: The sail is larger and catches more air, increasing the force of the air pushing the cart forward.

Therefore, doubling the size of the sail will increase the force pushing the cart forward, causing it to move more rapidly. ❌



Choice: D. No significant change

Explanation:

1. Observation of the Setup:
 - The images show a small cart with a sail and a propeller.
 - The propeller is positioned to blow air towards the sail.
2. Understanding the Forces:
 - The propeller generates a force by pushing air backward.
 - This force should ideally push the cart forward due to Newton's third law (action and reaction).
3. Role of the Sail:
 - The sail is positioned in front of the propeller.
 - The air pushed by the propeller hits the sail, creating a force in the opposite direction.
4. Net Force Analysis:
 - The force generated by the propeller pushing air backward is counteracted by the force of the air hitting the sail.
 - These forces are internal to the system (cart, propeller, and sail) and cancel each other out.
5. Effect of Doubling the Sail Size:
 - Doubling the size of the sail would increase the surface area that the air from the propeller hits.
 - However, since the forces are internal and cancel each other out, increasing the sail size does not change the net external force on the cart.
6. Conclusion:
 - Since the forces are internal and cancel each other out, doubling the size of the sail will not result in any significant change in the movement of the cart.
 - Therefore, the correct choice is D. No significant change.



To determine the expected consequence of doubling the size of the sail, we need to consider the principles of physics that govern the operation of a sail-powered device. The sail's size is directly related to the area it presents to the wind, which in turn affects the amount of force exerted on the cart. Doubling the size of the sail would increase the area, which would likely increase the force exerted on the cart, assuming the wind speed and direction remain constant. This increased force would result in a greater acceleration of the cart, leading to a more rapid movement. Therefore, the most probable outcome of doubling the size of the sail would be:

B. The cart will move forward rapidly ❌

This is because a larger sail would capture more wind, translating into more force on the cart and thus a faster movement.

Figure 69: A sample case of physical object relationships–distance. Back to List of Figures.

5346
5347
5348
5349
5350
5351
5352
5353
5354
5355
5356
5357
5358
5359
5360
5361
5362
5363
5364
5365
5366
5367
5368
5369
5370
5371
5372
5373
5374
5375
5376
5377
5378
5379
5380
5381
5382
5383
5384
5385
5386
5387
5388
5389
5390
5391
5392
5393
5394
5395
5396
5397
5398
5399

Relationships: Size

Question: How does the size of the ping-pong ball compare to the mouth of the hot water bottle? <video 1>

Option:

- (A) The ping-pong ball is larger
- (B) The ping-pong ball is smaller
- (C) The ping-pong ball is of similar size
- (D) It cannot be determined



<video 1>

The answer is B. The ping-pong ball is smaller.

Here's the reasoning:

1. Observation: The video shows a person placing a ping-pong ball on top of the mouth of the bottle.
2. Inference: The fact that the ping-pong ball can be placed on the bottle means it is smaller than the bottle's opening.
3. Conclusion: The ping-pong ball is smaller than the mouth of the hot water bottle.



C. The ping-pong ball is of similar size

Step-by-step explanation:

1. Image 1: The person is holding a water bottle and a yellow ping-pong ball. The cap of the bottle has been removed, and the mouth of the bottle is visible.
2. Image 2: The person is positioning the ping-pong ball near the mouth of the bottle, preparing to place it on top.
3. Image 3: The ping-pong ball is placed on the table, and the bottle is still in the person's hand.
4. Image 4: The person is holding the bottle again, preparing to place the ping-pong ball on the mouth of the bottle.
5. Image 5: The person is placing the ping-pong ball on the mouth of the bottle.
6. Image 6: The ping-pong ball is now on the mouth of the bottle, and the person is tilting the bottle.
7. Image 7: The bottle is tilted further, and the ping-pong ball remains on the mouth of the bottle.
8. Image 8: The bottle is fully tilted, and the ping-pong ball is still on the mouth of the bottle.

From these observations, it is clear that the ping-pong ball fits snugly on the mouth of the bottle without falling in or being too large to stay on top. This indicates that the size of the ping-pong ball is very similar to the size of the mouth of the bottle. Therefore, the correct choice is C. The ping-pong ball is of similar size.



To determine the size comparison between the ping-pong ball and the mouth of the hot water bottle, we need to analyze the image. The ping-pong ball appears to be smaller in size compared to the mouth of the hot water bottle. This is because the mouth of the hot water bottle is wide enough to hold the ping-pong ball, indicating that the bottle's mouth is larger than the ball. Therefore, the correct choice is B. The ping-pong ball is smaller.




Figure 70: A sample case of physical object relationships–size. Back to List of Figures.

5400
5401
5402
5403
5404
5405
5406
5407
5408
5409
5410
5411
5412
5413
5414
5415
5416
5417
5418
5419
5420
5421
5422
5423
5424
5425
5426
5427
5428
5429
5430
5431
5432
5433
5434
5435
5436
5437
5438
5439
5440
5441
5442
5443
5444
5445
5446
5447
5448
5449
5450
5451
5452
5453

Dynamics: Others

Question: What type of wave property is predominantly being demonstrated in the video?<video 1>

Option:
 (A) Diffraction
 (B) Interference
 (C) Refraction
 (D) Reflection




<video 1>

The answer is C. Refraction.

Here's why:

1. What is Refraction? Refraction is the bending of light as it passes from one medium to another (in this case, from the air to the water in the bucket). This bending occurs because the speed of light changes as it moves from one medium to another.
2. Observing the Video: The laser beam is clearly changing direction as it enters the water in the bucket. It bends downwards. This is a direct visual indication of refraction.
3. Eliminating other Options:
 - * Diffraction: Diffraction is the spreading of light waves as they pass through a narrow opening or around an obstacle. There's no clear example of this in the video.
 - * Interference: Interference occurs when two or more waves overlap, resulting in a new wave pattern. The video doesn't show waves interacting in this manner.
 - * Reflection: Reflection is the bouncing of light off a surface. While there is some reflection off the side of the bucket, the primary phenomenon is the bending of the light as it enters the water, which is refraction.

 **C. Refraction**

The series of images predominantly demonstrates the property of refraction. Here is the detailed reasoning:

1. Observation of the Light Path: In the images, a beam of light is seen traveling through a medium (likely water) and bending as it exits the medium. This bending of light is a key indicator of refraction.
2. Medium Change: Refraction occurs when light passes from one medium to another and changes speed, causing it to bend. In the images, the light is initially traveling through a transparent medium (possibly water) and then exits into the air, causing the light to bend.
3. Consistent Bending: The consistent bending of the light path in the images aligns with the behavior of light undergoing refraction. The light beam is not spreading out (diffraction), nor is it showing patterns of constructive or destructive interference (interference). It is also not bouncing back from a surface (reflection).
4. Contextual Clues: The setup, including the container and the light beam, suggests an experiment designed to show how light behaves when transitioning between different media, which is a classic demonstration of refraction.

Therefore, the predominant wave property being demonstrated in the video is refraction.


 The video predominantly demonstrates the property of refraction. Refraction is the bending of light as it passes from one medium to another, which is what we see as the red light bending around the edges of the objects in the image. The light is entering the glass at an angle, causing it to change direction, which is a classic example of refraction. This is a common phenomenon that occurs when light passes through transparent materials like glass, where the speed of light changes, causing the light to bend. The other options, such as diffraction, interference, and reflection, do not primarily describe the observed effect in the video. Diffraction involves the spreading of light waves around obstacles or through small openings, interference is the phenomenon where two or more waves superimpose to form a resultant wave of greater, lower, or the same amplitude, and reflection is the bouncing back of light from a surface, which is not the main focus of this video. Therefore, the correct answer is C. Refraction.

Figure 71: A sample case of physics-based dynamics—others. Back to List of Figures.

5454
5455
5456
5457
5458
5459
5460
5461
5462
5463
5464
5465
5466
5467
5468
5469
5470
5471
5472
5473
5474
5475
5476
5477
5478
5479
5480
5481
5482
5483
5484
5485
5486
5487
5488
5489
5490
5491
5492
5493
5494
5495
5496
5497
5498
5499
5500
5501
5502
5503
5504
5505
5506
5507

Relationships: Size

Question: Compared to the horse drawing, how is the size of the striped paper?<video 1>

Option:

- (A) Smaller than the drawing
- (B) Exactly the same as the drawing
- (C) Larger than the drawing
- (D) Not relevant



<video 1>

The answer is C. Larger than the drawing.

Here's why:

1. The striped paper covers the entire horse drawing. This means the striped paper has to be at least as large as the drawing.
2. The striped paper extends beyond the horse drawing. The edges of the striped paper can be seen extending past the boundaries of the drawing. This indicates the striped paper is larger than the drawing.
3. The striped paper is not a perfect fit. The drawing is centered on the striped paper. If it were the same size, the striped paper would be exactly the same dimensions as the drawing.

Therefore, the striped paper is larger than the horse drawing.



C. Larger than the drawing

Detailed Explanation:

1. Observation of the Images:

- The first two images show a drawing of a horse on a piece of paper.
- The subsequent images show a striped paper being placed over the horse drawing.

2. Comparison of Sizes:

- In the first two images, the horse drawing is clearly visible and occupies a certain area on the paper.
- In the later images, the striped paper is placed over the horse drawing, and it covers the entire drawing and extends beyond it.

3. Edges and Coverage:

- The striped paper not only covers the horse drawing completely but also extends beyond the edges of the drawing, indicating that it is larger than the drawing itself.

4. Conclusion:

- Since the striped paper covers the entire horse drawing and extends beyond it, it is evident that the striped paper is larger than the horse drawing.

Therefore, the correct choice is C. Larger than the drawing.



To determine the size of the striped paper compared to the horse drawing, we need to analyze the image and the text provided. The text "4. motion illusion" is repeated multiple times, which suggests that this is a sequence of images or a video. The striped paper appears to be larger than the horse drawing, as the horse drawing is partially obscured by the striped paper. The striped paper covers the entire drawing, indicating that it is larger in size. Therefore, the correct answer is:

C. Larger than the drawing



Figure 72: A sample case of physical object relationships–size. Back to List of Figures.


5508
5509
5510
5511
5512
5513
5514
5515
5516
5517
5518
5519
5520
5521
5522
5523
5524
5525
5526
5527
5528
5529
5530
5531
5532
5533
5534
5535
5536
5537
5538
5539
5540
5541
5542
5543
5544
5545
5546
5547
5548
5549
5550
5551
5552
5553
5554
5555
5556
5557
5558
5559
5560
5561

Scene: Camera

Question: Based on the effects in the video, which of these camera changes would result in the observed phenomenon? <video 1>

Option:

(A) The camera rotates along the vertical axis (upside or downside)
 (B) The camera moves upward or downward
 (C) The camera rotates along the horizontal axis (left or right)
 (D) The camera is farther away from the objects




<video 1>

The answer is C. The camera rotates along the horizontal axis (left or right).

Here's the reasoning:


1. **Observe the motion:** The objects are moving in a way that suggests a rotation around a horizontal axis. The bagel and cereal bowl move in an arc, indicating a shift in their position relative to the camera's viewpoint. The milk splash appears to be moving in a circular pattern.
2. **Eliminate other options:**
 - * A. The camera rotates along the vertical axis (upside or downside): This would cause the objects to appear to move up and down, not in the arcing motion we see.
 - * B. The camera moves upward or downward: This would make the objects appear closer or farther away, not change their positions relative to each other in the way we see.
 - * D. The camera is farther away from the objects: This would make the objects appear smaller, but not change their relative positions in the frame.
3. **Conclusion:** The only camera movement that aligns with the observed motion is a rotation along the horizontal axis (left or right). This would cause the objects to appear to move in arcs as the camera's perspective shifts. ❌

 Choice: C. The camera rotates along the horizontal axis (left or right).

Explanation:

1. **Understanding the Phenomenon:** The question asks about the observed phenomenon in the video based on a series of images sampled at equal intervals. To determine the correct camera change, we need to understand how each type of camera movement affects the images.
2. **Analyzing Each Option:**
 - **Option A (Camera rotates along the vertical axis):** If the camera rotates upside or downside, the images would show a tilting effect. Objects would appear to tilt either upwards or downwards, which would be noticeable in the sampled images.
 - **Option B (Camera moves upward or downward):** If the camera moves vertically, the perspective of the objects would change. Objects would appear to move up or down in the frame, but their orientation would remain the same.
 - **Option C (Camera rotates along the horizontal axis):** If the camera rotates left or right, the perspective of the scene would change horizontally. Objects would appear to shift left or right, and the angle at which they are viewed would change, creating a sense of rotation around the scene.
 - **Option D (Camera is farther away from the objects):** If the camera moves farther away, the objects would appear smaller and more distant, but their relative positions and orientations would remain the same.
3. **Matching the Phenomenon to the Camera Change:**
 - The key to identifying the correct camera change is to match the observed phenomenon in the images to the expected effect of each camera movement.
 - If the images show a change in the horizontal perspective, where objects appear to shift left or right and the angle of view changes, this indicates a horizontal rotation of the camera.
4. **Conclusion:**
 - The observed phenomenon in the images is best explained by the camera rotating along the horizontal axis (left or right). This would result in a change in the horizontal perspective of the scene, which matches the description of the observed phenomenon.

Therefore, the correct choice is C. The camera rotates along the horizontal axis (left or right). ✅

 The observed phenomenon in the video is the appearance of floating objects, such as the bowl of nuts and the cinnamon rolls, against a plain background. This effect is created by manipulating the camera's position and orientation.

To achieve this effect, the camera needs to be positioned at a certain distance from the objects and then rotated along the vertical axis (upside or downside). This rotation creates the illusion that the objects are floating in the air.

Therefore, the correct choice is A. The camera rotates along the vertical axis (upside or downside). ❌

Figure 73: A sample case of physical scene understanding—camera. Back to List of Figures.


5562
5563
5564
5565
5566
5567
5568
5569
5570
5571
5572
5573
5574
5575
5576
5577
5578
5579
5580
5581
5582
5583
5584
5585
5586
5587
5588
5589
5590
5591
5592
5593
5594
5595
5596
5597
5598
5599
5600
5601
5602
5603
5604
5605
5606
5607
5608
5609
5610
5611
5612
5613
5614
5615

Relationships: Location

Question: Where does the projection of the butterfly appear in the video? <video 1>

Option:

(A) On the ceiling
(B) On the wall behind the bowl
(C) On the floor
(D) On the table




<video 1>

The answer is D. On the table.

Here is the reasoning:

1. Visual Perception: We see the butterfly hovering within the pyramid-shaped bowl.
2. Perspective: The bowl is placed on a table, and we can see its reflection on the surface of the table.
3. Illusion: The butterfly appears suspended in mid-air inside the bowl, which is an illusion created by the pyramid's geometry and the way light refracts through it.
4. Actual Location: Although the butterfly appears to be suspended, it is actually a projection onto the table surface, which creates the illusion of depth and movement.

Therefore, the projection of the butterfly appears on the table. ✗

 D. On the table

Detailed Explanation:

1. Observation of the Setup: The images show a transparent, pyramid-like structure placed on a flat surface, which appears to be a table. This structure is commonly used for creating holographic projections.
2. Projection Source: The base of the pyramid is placed on a flat, reflective surface, which is likely a screen or a tablet. This is a typical setup for a holographic display where the image is projected from the screen below and reflected within the pyramid to create a 3D effect.
3. Position of the Butterfly: In the series of images, the butterfly appears within the pyramid structure. The butterfly is not projected onto the ceiling, wall, or floor, but rather it is seen floating inside the pyramid.
4. Conclusion: Since the pyramid is placed on the table and the butterfly appears within the pyramid, the projection source (the screen or tablet) is on the table. Therefore, the projection of the butterfly appears on the table.

Thus, the correct choice is D. On the table. ✗


 To determine where the projection of the dog appears in the video, we need to analyze the image and the context provided by the question. The image shows a dark room with a stone wall and a triangular object with a projection of a butterfly on it. The projection is not the dog. Therefore, the answer is unknown. ✗

Figure 74: A sample case of physical object relationships–location. Back to List of Figures.

5616
5617
5618
5619
5620
5621
5622
5623
5624
5625
5626
5627
5628
5629
5630
5631
5632
5633
5634
5635
5636
5637
5638
5639
5640
5641
5642
5643
5644
5645
5646
5647
5648
5649
5650
5651
5652
5653
5654
5655
5656
5657
5658
5659
5660
5661
5662
5663
5664
5665
5666
5667
5668
5669

Relationships: Location

Question: How does the moon pass through the sun in the video? <video 1>

Option:

- (A) From the lower left corner to the upper right corner of the picture
- (B) From the upper left corner to the lower right corner of the picture
- (C) From the lower right corner to the upper left corner of the picture
- (D) From the upper right corner to the lower left corner of the picture



<video 1>

The answer is D. From the upper right corner to the lower left corner of the picture.

Here is the reasoning chain:

1. The video starts with a crescent-shaped sun visible in the upper right corner of the frame.
2. As the video progresses, the crescent shape gets larger, indicating the moon is moving across the sun.
3. The moon continues moving across the sun until the whole sun is visible, meaning the moon has passed through the sun.
4. Finally, the moon has reached the lower left corner of the frame, completing its journey across the sun.

Therefore, we can conclude that the moon passed through the sun from the upper right corner to the lower left corner of the picture. ❌



Choice: B. From the upper left corner to the lower right corner of the picture

Reasoning:

1. First Image:
 - The moon is just starting to cover the sun from the upper left corner.
2. Second Image:
 - The moon has moved further, covering more of the sun, still from the upper left.
3. Third Image:
 - The moon continues to move, covering a larger portion of the sun, indicating a downward and rightward movement.
4. Fourth Image:
 - The moon is now covering the sun more towards the center, still moving from the upper left to the lower right.
5. Fifth Image:
 - The moon is now covering the sun from the upper left, with the uncovered part moving towards the lower right.
6. Sixth Image:
 - The moon is moving further down and to the right, revealing more of the sun on the upper left side.
7. Seventh Image:
 - The moon is almost completely past the sun, with only a small portion still covered on the lower right.
8. Eighth Image:
 - The moon has almost completely moved past the sun, with the last bit of coverage on the lower right.

By observing the sequence of images, it is clear that the moon starts covering the sun from the upper left corner and moves towards the lower right corner, making the correct choice B. ❌



D. From the upper right corner to the lower left corner of the picture ❌

Figure 75: A sample case of physical object relationships–location. Back to List of Figures.

5670
5671
5672
5673
5674
5675
5676
5677
5678
5679
5680
5681
5682
5683
5684
5685
5686
5687
5688
5689
5690
5691
5692
5693
5694
5695
5696
5697
5698
5699
5700
5701
5702
5703
5704
5705
5706
5707
5708
5709
5710
5711
5712
5713
5714
5715
5716
5717
5718
5719
5720
5721
5722
5723

Scene: Camera

Question: Which of the listed camera changes could cause the effect shown in the video? <video 1>

Option:

- (A) The camera rotates along the vertical axis (upside or downside).
- (B) The camera moves upward or downward
- (C) Move parallel to the line between the headband and the scraper
- (D) The camera rotates along the horizontal axis (left or right).



<video 1>

The answer is D. The camera rotates along the horizontal axis (left or right).

Here's the reasoning:

1. Observation: The video shows a scene with objects initially positioned above the frame, gradually falling into the frame. This indicates a camera movement that alters the objects' apparent position from above to within the frame.
2. Eliminating Options:
 - * A. Vertical Axis Rotation: Rotating the camera vertically would primarily affect the objects' apparent height, not their horizontal movement into the frame.
 - * B. Upward/Downward Movement: Moving the camera upward or downward would change the objects' distance from the camera, but wouldn't make them appear to move from above into the frame.
 - * C. Parallel Movement: Moving parallel to the line between the headband and scraper would only change the objects' horizontal position in relation to each other, not their position relative to the frame.
3. Horizontal Axis Rotation: Rotating the camera along the horizontal axis (left or right) would cause objects originally positioned above the frame to gradually appear within the frame as the camera rotates. This aligns with the observed effect in the video.

Therefore, the most likely camera movement causing the effect in the video is a rotation along the horizontal axis (left or right).



Choice: B. The camera moves upward or downward

Explanation:

1. Observation of Object Positions:
 - In the first image, all objects are aligned horizontally at the top of the frame.
 - As the sequence progresses, the objects appear to move upward in the frame.
 - By the last image, most objects are no longer visible, except for the headband and the scraper, which are still in the frame but positioned lower.
2. Analysis of Camera Movement:
 - If the camera were rotating along the vertical axis (upside or downside), the objects would appear to tilt or rotate around a central point, which is not observed here.
 - If the camera were moving parallel to the line between the headband and the scraper, the relative positions of the objects would change horizontally, which is not the case.
 - If the camera were rotating along the horizontal axis (left or right), the objects would appear to rotate around a vertical axis, which is also not observed.
3. Conclusion:
 - The consistent upward movement of the objects in the frame suggests that the camera itself is moving downward. As the camera moves downward, the objects appear to move upward in the frame.
 - Therefore, the effect shown in the video is caused by the camera moving upward or downward, specifically downward in this case.



The effect shown in the video is caused by the camera rotating along the vertical axis (upside or downside). This is because the objects in the image appear to be flipped or mirrored when the camera's orientation changes, which is a result of the camera's movement along the vertical axis. The other options (moving parallel to the line between the headband and the scraper or rotating along the horizontal axis) would not cause the same mirroring effect.

Figure 76: A sample case of physical scene understanding–light. Back to List of Figures.

5724
5725
5726
5727
5728
5729
5730
5731
5732
5733
5734
5735
5736
5737
5738
5739
5740
5741
5742
5743
5744
5745
5746
5747
5748
5749
5750
5751
5752
5753
5754
5755
5756
5757
5758
5759
5760
5761
5762
5763
5764
5765
5766
5767
5768
5769
5770
5771
5772
5773
5774
5775
5776
5777

Scene: Temperature

Question: Which principle is demonstrated by the crystallization of water when the hand is submerged? <video 1>

Option:

- (A) Melting Point Depression
- (B) Solution Recrystallization
- (C) Freezing Point Depression
- (D) Boiling Point Elevation



<video 1>

The answer is C. Freezing Point Depression. Here's the reasoning:

1. Observation: The video shows water in a jar, and when the hand is submerged, the water around the hand crystallizes. This indicates a change of state from liquid to solid, which is freezing.
2. Freezing Point: The freezing point of water is 0°C (32°F). However, the water in the jar freezes at a temperature above its normal freezing point.
3. Freezing Point Depression: Freezing point depression is a colligative property of solutions, meaning it depends on the concentration of solute, not the identity of the solute. This phenomenon occurs when a solute is added to a solvent, lowering the temperature at which the solvent will freeze.
4. Hand as Solute: In this scenario, the hand acts as a solute. The presence of the hand alters the properties of the water, causing it to freeze at a temperature higher than its normal freezing point.
5. Other Options:
 - * Melting Point Depression: This refers to the lowering of the melting point of a solid when a solute is added. This is not applicable here because we're observing freezing, not melting.
 - * Solution Recrystallization: This involves dissolving a solid in a solvent and then causing it to crystallize again. While crystallization is observed, it's not due to dissolving a solid.
 - * Boiling Point Elevation: This refers to the increase in the boiling point of a liquid when a solute is added. This is not relevant to the observed freezing.

Therefore, the principle demonstrated by the crystallization of water when the hand is submerged is Freezing Point Depression. ❌



C. Freezing Point Depression

Detailed Explanation:

1. Observation of the Images:
 - The series of images shows a hand being submerged in a jar of water.
 - As the hand remains submerged, the water around the hand begins to crystallize, forming ice.
2. Understanding Freezing Point Depression:
 - Freezing Point Depression is a colligative property that describes the process where the freezing point of a liquid (in this case, water) is lowered by the addition of another substance (such as a solute) or by the presence of an object (such as the hand) that can act as a nucleation site for ice formation.
3. Application to the Scenario:
 - When the hand is submerged in the water, it likely causes localized cooling or provides nucleation sites for ice crystals to form.
 - The presence of the hand in the water can disrupt the normal freezing process, causing the water to freeze at a temperature lower than its normal freezing point (0°C or 32°F).
4. Elimination of Other Options:
 - A. Melting Point Depression: This refers to the lowering of the melting point of a solid, which is not relevant here as we are observing the freezing process, not melting.
 - B. Solution Recrystallization: This involves dissolving a solute in a solvent and then recrystallizing it, which is not what is happening in the images.
 - D. Boiling Point Elevation: This refers to the increase in the boiling point of a liquid due to the presence of a solute, which is not relevant to the freezing process observed.

Therefore, the principle demonstrated by the crystallization of water when the hand is submerged is Freezing Point Depression. ❌



C. Freezing Point Depression



Figure 77: A sample case of physical scene understanding—temperature. Back to List of Figures.


5778
5779
5780
5781
5782
5783
5784
5785
5786
5787
5788
5789
5790
5791
5792
5793
5794
5795
5796
5797
5798
5799
5800
5801
5802
5803
5804
5805
5806
5807
5808
5809
5810
5811
5812
5813
5814
5815
5816
5817
5818
5819
5820
5821
5822
5823
5824
5825
5826
5827
5828
5829
5830
5831

Scene: Temperature

Question: Which is true about the temperature of the candle flame when compared to the wrapped paper scenario? <video 1>

Option:

(A) Higher in the direct contact scenario
(B) Lower in both scenarios
(C) Slightly higher when wrapped
(D) The same in both scenarios



<video 1>


The answer is A. Higher in the direct contact scenario.

Here is the explanation:

1. Understanding the scenario: We are comparing the temperature of a candle flame when it directly touches paper and when the paper is wrapped around a glass.
2. Heat Transfer: Heat transfer occurs from the hotter object to the colder object. In this case, the candle flame is the hotter object.
3. Direct Contact: When the flame directly touches the paper, heat transfers quickly and efficiently, resulting in a higher temperature on the paper.
4. Wrapped Scenario: When the paper is wrapped around a glass, the glass acts as a barrier. The glass absorbs some of the heat from the flame, preventing the paper from reaching the same high temperature it would in direct contact.
5. Conclusion: Therefore, the temperature of the candle flame in the direct contact scenario is higher than in the wrapped scenario.

This is because the glass in the wrapped scenario acts as a heat sink, absorbing some of the heat from the flame and preventing the paper from reaching the same high temperature it would in direct contact.

✖


 Choice: A. Higher in the direct contact scenario

Explanation:

1. Observation of Images:
 - The first set of images shows a candle flame directly burning a piece of paper.
 - The second set of images shows a candle flame burning a piece of paper that is wrapped around a glass.
2. Direct Contact Scenario:
 - In the first set of images, the paper is directly exposed to the candle flame. The flame quickly ignites the paper, causing it to burn and create a hole.
3. Wrapped Paper Scenario:
 - In the second set of images, the paper is wrapped around a glass and then exposed to the candle flame. The flame still burns the paper, but the presence of the glass affects the burning process.
4. Heat Transfer and Temperature:
 - When the paper is in direct contact with the flame, the heat transfer is more efficient, and the paper reaches a higher temperature quickly, causing it to ignite and burn faster.
 - When the paper is wrapped around the glass, the glass acts as a heat sink, absorbing some of the heat from the flame. This reduces the temperature of the paper compared to the direct contact scenario.
5. Conclusion:
 - The temperature of the candle flame is higher in the direct contact scenario because there is no intermediary (like the glass) to absorb some of the heat. The paper in direct contact with the flame reaches a higher temperature more quickly, leading to faster ignition and burning.

Therefore, the correct choice is A. Higher in the direct contact scenario.

✖

 To determine the temperature of the candle flame compared to the wrapped paper scenario, we need to consider the heat transfer and insulation properties of both materials.

1. Direct contact: When the candle is in direct contact with the paper, the heat from the flame is transferred directly to the paper, causing it to melt. This indicates that the temperature of the candle flame is high enough to melt the paper.
2. Wrapped paper: When the candle is wrapped in paper, the heat from the flame is not directly transferred to the paper. Instead, the paper acts as an insulator, preventing the heat from reaching the paper. This suggests that the temperature of the candle flame is lower when it is wrapped in paper.
3. Comparison: Comparing the two scenarios, we can conclude that the temperature of the candle flame is higher when it is in direct contact with the paper, as it is able to melt the paper, while it is lower when the candle is wrapped in paper.

Therefore, the correct choice is A. Higher in the direct contact scenario.

✖


Figure 78: A sample case of physical scene understanding—temperature. Back to List of Figures.

5832
5833
5834
5835
5836
5837
5838
5839
5840
5841
5842
5843
5844
5845
5846
5847
5848
5849
5850
5851
5852
5853
5854
5855
5856
5857
5858
5859
5860
5861
5862
5863
5864
5865
5866
5867
5868
5869
5870
5871
5872
5873
5874
5875
5876
5877
5878
5879
5880
5881
5882
5883
5884
5885


Dynamics: Gas

Question: Which option accurately represents the correct sequence of events in gasification from the choices below? <image 1><image 2><image 3>


Option:
 (A) 3 - 2 - 1
 (B) 2 - 1 - 3
 (C) 1 - 2 - 3
 (D) 2 - 3 - 1



<image 1>



<image 2>




<image 3>

The correct answer is C. 1 - 2 - 3

Here's the reasoning:

1. Image 1: Shows a dry whetstone, indicating the starting point.
2. Image 2: Depicts water being added to the whetstone. This is the first step in the gasification process, where water is introduced.
3. Image 3: Shows the whetstone soaked in water, illustrating the final stage of gasification. ❌

Therefore, the sequence 1-2-3 accurately represents the steps involved in the gasification of the whetstone.

 C. 1 - 2 - 3

The correct sequence of events in the images is as follows:

1. Image #1: The block is dry and has no visible liquid on its surface.
2. Image #2: Some liquid has been applied to the block, but it is not fully covered. There are a few patches of liquid.
3. Image #3: The block is now more thoroughly covered with liquid, indicating that more liquid has been applied over time.

The sequence shows the progression from a dry block to a block with some liquid, and finally to a block with more liquid. Therefore, the correct order is 1 (dry block), 2 (some liquid), and 3 (more liquid). ❌


 To determine the correct sequence of events in gasification, we need to analyze the images and the changes they show.

image #1 shows the box before any gasification process has occurred. It is a solid black color with a clear silhouette of a horse on it.

image #2 shows the box after the first step of gasification. The silhouette of the horse is now partially obscured by a white substance, which is likely the gas produced during the first step.

image #3 shows the box after the second step of gasification. The white substance has spread out and is now covering the entire surface of the box, indicating that the gas has been released and is filling the box.

Based on this analysis, the correct sequence of events is:

1. The box is placed in the gasifier (image #1).
2. The gasification process begins, and the horse silhouette is partially obscured by the gas (image #2).
3. The gas is released and fills the box (image #3).

Therefore, the correct answer is C. 1 - 2 - 3. ❌

Figure 79: A sample case of physics-based dynamics—gas. Back to List of Figures.

5886
5887
5888
5889
5890
5891
5892
5893
5894
5895
5896
5897
5898
5899
5900
5901
5902
5903
5904
5905
5906
5907
5908
5909
5910
5911
5912
5913
5914
5915
5916
5917
5918
5919
5920
5921
5922
5923
5924
5925
5926
5927
5928
5929
5930
5931
5932
5933
5934
5935
5936
5937
5938
5939

Dynamics: Gas

Question: What changes are most likely to occur in the surrounding gas environment when the phenomenon in the video happens? <video 1>

Option:

- (A) Increased air pressure
- (B) Increased humidity
- (C) Decreased air pressure
- (D) Decreased humidity



<video 1>

The answer is D. Decreased humidity. Here's the reasoning:

1. The video shows the shrinking of a lake. This indicates a loss of water, which is a key component of humidity.
2. Humidity is the amount of moisture in the air. Moisture comes from sources like bodies of water like lakes.
3. As the lake shrinks, the water evaporates into the atmosphere. This evaporation reduces the amount of water vapor available in the air near the lake.
4. Less water vapor in the air means lower humidity. This leads to a drier environment around the shrinking lake.

Therefore, the most likely change in the surrounding gas environment is a decrease in humidity. ❌



Choice: D. Decreased humidity

Explanation:

1. Observation of the Images:
 - The series of images shows a body of water (likely a lake) over a period from 1984 to 2016.
 - Over time, the lake's water level decreases significantly, with the lake almost drying up by the end of the series.
2. Understanding the Phenomenon:
 - The phenomenon depicted is the drying up of a lake.
 - As the lake dries up, the amount of water available for evaporation decreases.
3. Impact on Humidity:
 - Humidity is the amount of water vapor present in the air.
 - Large bodies of water contribute to the local humidity through the process of evaporation.
 - As the lake dries up, there is less water available to evaporate into the atmosphere.
4. Conclusion:
 - With less water available for evaporation, the amount of water vapor in the air decreases.
 - This leads to a decrease in the local humidity levels.

Therefore, the most likely change in the surrounding gas environment when the lake dries up is a decrease in humidity. ❌



The phenomenon in the video is the formation of a large water body, which is likely a lake or a reservoir. When this happens, the surrounding gas environment is likely to experience decreased air pressure due to the displacement of air by the water body. This is because the water body occupies a significant volume of space, and as it forms, it displaces the air above it, leading to a decrease in air pressure. The other options, such as increased air pressure, increased humidity, or decreased humidity, are not directly related to the formation of a water body. Therefore, the most likely change in the surrounding gas environment is decreased air pressure. So, the choice is C. Decreased air pressure. ❌

Figure 80: A sample case of physics-based dynamics—gas. Back to List of Figures.

5940
5941
5942
5943
5944
5945
5946
5947
5948
5949
5950
5951
5952
5953
5954
5955
5956
5957
5958
5959
5960
5961
5962
5963
5964
5965
5966
5967
5968
5969
5970
5971
5972
5973
5974
5975
5976
5977
5978
5979
5980
5981
5982
5983
5984
5985
5986
5987
5988
5989
5990
5991
5992
5993

Dynamics: Manipulation

Question: To mix the tongs, which point is most suitable? <image 1>

Option:

- (A) Point A
- (B) Point B
- (C) Point C
- (D) Point D



<image 1>

The answer is D. Point D. Here's why:

1. Purpose: The goal is to mix the tongs. This requires a grip that allows for twisting and turning.
2. Point D's Grip: Point D is located at the juncture of the two tongs, where they form a "V" shape. This position provides a strong grip and allows for leverage.
3. Other Points:
 - * Point A: Is near the end of the tong, providing less grip and making it difficult to twist.
 - * Point B: Is at the base of the tong, where the metal is thinner, making it prone to bending.
 - * Point C: Is in the middle of the tong, offering a decent grip but not as much leverage as point D.

In conclusion, Point D offers the best combination of grip and leverage for twisting and mixing the tongs effectively. ❌



Choice: B. Point B

Reasoning:

1. Function of Tongs: Tongs are typically used to grip and lift objects. The design of the tongs in the image suggests they are used for handling small items, possibly sugar cubes or similar.
2. Structure Analysis:
 - Point A: This is part of the handle, which is not suitable for mixing as it is designed to be held by the user.
 - Point C: This is also part of the handle, closer to the gripping end but still not designed for mixing.
 - Point D: This is the inner part of the gripping end, which is not ideal for mixing as it is designed to grip objects.
 - Point B: This is the outer part of the gripping end, which is rounded and spoon-like, making it suitable for mixing.
3. Design Consideration: The rounded, spoon-like end at Point B is designed to interact with the items being handled. This shape is ideal for mixing as it can stir and combine ingredients effectively.
4. Practical Use: When mixing, a rounded end like Point B can move through the mixture smoothly, ensuring even distribution of ingredients. The other points (A, C, and D) are either flat or designed for gripping, not for stirring.

Therefore, Point B is the most suitable for mixing. ❌



To mix the tongs, the most suitable point would be Point C.

Here's the reasoning chain:

1. Point A is the topmost point of the tongs, which is not ideal for mixing as it's the farthest from the handle.
2. Point B is the bottom point of the tongs, which is also not ideal for mixing as it's the farthest from the handle.
3. Point C is the middle point of the tongs, which is the most suitable for mixing as it's the closest to the handle.
4. Point D is the point where the tongs are bent, which is not ideal for mixing as it's not a straight line.

So, the most suitable point for mixing the tongs is Point C. ❌

Figure 81: A sample case of physics-based dynamics——manipulation. Back to List of Figures.


5994
5995
5996
5997
5998
5999
6000
6001
6002
6003
6004
6005
6006
6007
6008
6009
6010
6011
6012
6013
6014
6015
6016
6017
6018
6019
6020
6021
6022
6023
6024
6025
6026
6027
6028
6029
6030
6031
6032
6033
6034
6035
6036
6037
6038
6039
6040
6041
6042
6043
6044
6045
6046
6047

Relationships: Depth

Question: Identify the closest point to the camera:? <video 1>

Option:

(A) Point A is closest
(B) Point B is closest
(C) Point C is closest
(D) Point D is closest




< video 1 >

The answer is A.

Here's why:


1. Identifying Key Elements: We need to find the closest point to the camera among four points, A, B, C, and D.
2. Point A's Position: Point A is located on the arm of the woman closest to the camera.
3. Comparing with Other Points: Point B is on the woman's clothes, Point C is on the woman's arm further from the camera, and Point D is on the woman's arm even further from the camera.
4. Conclusion: Since Point A is on the arm closest to the camera, and all other points are either on clothing or further away on the same arm, Point A is the closest point to the camera. ❌

 B. Point B is closest

Reasoning Chain:

1. Observation of Points:
 - Point A is located on the device the person is operating.
 - Point B is on the person's waist.
 - Point C is on the person's arm.
 - Point D is on the device's screen.
2. Relative Positioning:
 - Point A is on the device, which is positioned in front of the person.
 - Point B is on the person's waist, which is closer to the camera than the device.
 - Point C is on the person's arm, which is extended towards the device.
 - Point D is on the screen of the device, which is further away from the camera compared to the other points.
3. Depth Perception:
 - The person's body is closer to the camera than the device they are operating.
 - The waist (Point B) is closer to the camera than the arm (Point C) because the arm is extended forward.
 - The device (Points A and D) is further away from the camera compared to the person's body.
4. Conclusion:
 - Since Point B is on the person's waist, which is the closest part of the person to the camera, it is the closest point among the given options.

Therefore, Point B is the closest to the camera. ❌

 To identify the closest point to the camera, we need to look at the perspective of the image. Point A is located on the left side of the image, while point B is located on the right side of the image. Point C is located in the center of the image, and point D is located on the bottom right corner of the image.

From the perspective of the image, point A appears to be the closest point to the camera, as it is located on the left side of the image and is in the foreground. Point B, point C, and point D are all further away from the camera and appear to be in the background.

Therefore, the closest point to the camera is point A. ❌

Figure 82: A sample case of physics-based dynamics——fluid. Back to List of Figures.

6048
6049
6050
6051
6052
6053
6054
6055
6056
6057
6058
6059
6060
6061
6062
6063
6064
6065
6066
6067
6068
6069
6070
6071
6072
6073
6074
6075
6076
6077
6078
6079
6080
6081
6082
6083
6084
6085
6086
6087
6088
6089
6090
6091
6092
6093
6094
6095
6096
6097
6098
6099
6100
6101

Dynamics: Fluid

Question: Based on the visual phenomena in the video, which alteration to the light source is most likely to be the cause? <video 1>

Option:

- (A) It's just that the light source is weaker and the light source position remains the same
- (B) The color of the light changes from purple to yellow
- (C) It's just that the light source is stronger and the light source position remains the same
- (D) The color of the light changes from green to limeyellow



< video 1 >

The answer is D. Blue container.

Here's the reasoning:

1. The cyan fluid is initially blocked by the purple stick.
2. If the purple stick were removed, the cyan fluid would flow downwards freely.
3. There's no other obstacle in the path of the cyan fluid, so it would continue downwards until it reaches the blue container.
4. Therefore, the cyan fluid would flow into the blue container.



Choice: B. Purple container

Explanation:

1. Initial Setup:
 - The images show a setup where colored fluids flow from the top to the bottom through a series of sticks that direct the flow into different containers.
2. Observation of Fluid Paths:
 - The cyan fluid starts from the top left and flows downwards.
 - The purple stick is positioned such that it directs the cyan fluid towards the green container.
3. Effect of Removing the Purple Stick:
 - If the purple stick is removed, the cyan fluid will no longer be directed towards the green container.
 - Instead, the cyan fluid will follow the path of least resistance, which is directly downwards.
4. New Path of Cyan Fluid:
 - Without the purple stick, the cyan fluid will flow straight down.
 - The next obstacle in its path is the orange stick, which will direct the cyan fluid towards the right.
5. Final Destination:
 - After being directed to the right by the orange stick, the cyan fluid will flow into the purple container.

Therefore, if the purple stick were removed, the cyan fluid would flow into the purple container.



If the purple stick were removed, the cyan fluid would flow into the purple container. This is because the purple stick is acting as a barrier between the cyan and purple containers, preventing the cyan fluid from flowing into the purple container. With the purple stick removed, there would be no obstruction, allowing the cyan fluid to flow into the purple container.



Figure 83: A sample case of physics-based dynamics—fluid. Back to List of Figures.


6102
6103
6104
6105
6106
6107
6108
6109
6110
6111
6112
6113
6114
6115
6116
6117
6118
6119
6120
6121
6122
6123
6124
6125
6126
6127
6128
6129
6130
6131
6132
6133
6134
6135
6136
6137
6138
6139
6140
6141
6142
6143
6144
6145
6146
6147
6148
6149
6150
6151
6152
6153
6154
6155

Dynamics: Others

Question: What happens to the green laser beam as it passes through the prism?
<video 1>

Option:

- (A) It bends and splits into a spectrum of colors
- (B) It reflects off the surface
- (C) It remains straight and unchanged
- (D) It scatters in different directions



< video 1 >

The answer is A. It bends and splits into a spectrum of colors.

Here is the reasoning chain:

1. The video shows a green laser beam passing through a prism.
2. A prism is a triangular piece of glass that bends light.
3. When light passes through a prism, it bends because different wavelengths of light travel at different speeds through the glass.
4. This bending of light causes the different wavelengths to separate, creating a spectrum of colors.

Therefore, the green laser beam bends and splits into a spectrum of colors as it passes through the prism. ❌



Choice: A. It bends and splits into a spectrum of colors

Explanation:

1. Observation of the Images:

- The images show a green laser beam passing through a prism.
- The laser beam is incident at an angle to the surface of the prism.
- The beam bends as it enters the prism and bends again as it exits the prism.

2. Refraction:

- The bending of the laser beam as it enters and exits the prism is due to refraction. Refraction occurs when light passes from one medium to another with a different refractive index, causing the light to change speed and direction.

3. Snell's Law:

- The images show measurements of the angles of incidence and refraction, which can be explained by Snell's Law: $n_1 \sin(\theta_1) = n_2 \sin(\theta_2)$, where n_1 and n_2 are the refractive indices of the two media, and θ_1 and θ_2 are the angles of incidence and refraction, respectively.

4. Dispersion:

- Although the images primarily show the bending of the green laser beam, a prism typically causes dispersion, which is the splitting of light into its constituent colors. This is because different wavelengths of light refract by different amounts.

5. Conclusion:

- The green laser beam bends as it passes through the prism due to refraction. While the images do not explicitly show the splitting into a spectrum of colors, the bending and the context of using a prism suggest that dispersion is also occurring.

Therefore, the correct choice is that the laser beam bends and splits into a spectrum of colors. ❌

Thus, the correct answer is A. It bends and splits into a spectrum of colors. ❌



When a green laser beam passes through a prism, it undergoes refraction, which is the bending of light as it passes from one medium to another. The prism is made of a material with a different refractive index than the air, causing the light to change direction. As the green laser beam enters the prism, it slows down and bends towards the normal line (an imaginary line perpendicular to the surface at the point of incidence). This bending causes the light to spread out into its component colors, creating a spectrum. This phenomenon is known as dispersion. Therefore, the correct answer is:

A. It bends and splits into a spectrum of colors. ❌

Figure 84: A sample case of physics-based dynamics—others. Back to List of Figures.


6156
6157
6158
6159
6160
6161
6162
6163
6164
6165
6166
6167
6168
6169
6170
6171
6172
6173
6174
6175
6176
6177
6178
6179
6180
6181
6182
6183
6184
6185
6186
6187
6188
6189
6190
6191
6192
6193
6194
6195
6196
6197
6198
6199
6200
6201
6202
6203
6204
6205
6206
6207
6208
6209

Dynamics: Others

Question: What is shown happening in the video? <video 1>

Option:

(A) Can't tell
(B) Flowers bloom
(C) Flowers grow
(D) Flowers wither



< video 1 >

★ The answer is A. Can't tell.

Here's the reasoning:

1. The video is static: The video only shows a single image of a flower.
2. No movement or change: There is no visual indication of growth, blooming, or withering.
3. Lack of context: The video provides no information about the flower's life cycle or the time period captured.

✖

Therefore, based on the provided information, we cannot determine what is happening in the video.

🌀 B. Flowers bloom

Step-by-step explanation:

1. Observation of Initial Images: The first few images show a flower that is partially open. The petals are not fully spread out, and the central part of the flower is not fully visible.
2. Progression Over Time: As we move through the series of images, the petals of the flower gradually spread out more, and the central part of the flower becomes more prominent and visible.
3. Final Images: In the last few images, the flower appears to be fully open, with the petals spread wide and the central part fully visible.
4. Conclusion: The sequence of images shows the flower transitioning from a partially open state to a fully open state, indicating that the flower is blooming.

✖

Therefore, the correct choice is B. Flowers bloom.

🌈 The image shows a single yellow daffodil in focus with a blurred background. The daffodil appears to be in full bloom with a bright yellow center and petals that are slightly curled at the edges. There is no clear indication of movement or change over time, so it is not possible to determine what is happening in the video based on this still image. Therefore, the answer is A. Can't tell.

✖


Figure 85: A sample case of physics-based dynamics—others. Back to List of Figures.

6210
6211
6212
6213
6214
6215
6216
6217
6218
6219
6220
6221
6222
6223
6224
6225
6226
6227
6228
6229
6230
6231
6232
6233
6234
6235
6236
6237
6238
6239
6240
6241
6242
6243
6244
6245
6246
6247
6248
6249
6250
6251
6252
6253
6254
6255
6256
6257
6258
6259
6260
6261
6262
6263

Dynamics: Collision

Question: If the green sphere were much heavier, which direction would the red pulley move? <video 1>

Option:
 (A) Stationary
 (B) Up
 (C) Down
 (D) Left




< video 1 >

The answer is C. Down.

Here is the reasoning chain:

- If the green sphere is much heavier than the pink sphere, the green sphere will pull down on the yellow rope it's attached to.
- The yellow rope is also attached to the blue pulley, so the blue pulley will also be pulled down.
- The blue pulley is connected to the red pulley by a separate yellow rope. When the blue pulley goes down, this rope will also be pulled down.
- The red pulley is attached to this yellow rope, so it will also be pulled down.

Therefore, the red pulley will move down. ✗

 Choice: C. Down

Explanation:

1. Understanding the System:
 - The images show a system of pulleys with weights attached to them.
 - The red pulley is connected to a grey weight.
 - The green sphere is part of a different pulley system but is connected to the same overall structure.
2. Observing the Motion:
 - In the series of images, the red pulley and its grey weight remain stationary.
 - The green sphere and the blue weight are moving downwards.
3. Effect of Increasing the Green Sphere's Weight:
 - If the green sphere were much heavier, it would exert a greater downward force on its pulley system.
 - This increased force would cause the green sphere to move downwards more rapidly.
4. Impact on the Red Pulley:
 - The pulley systems are interconnected. The increased downward force from the heavier green sphere would create a greater tension in the connecting ropes.
 - This increased tension would pull the red pulley downwards as well, as the system seeks to balance the forces.
5. Conclusion:
 - Given the interconnected nature of the pulley systems, a much heavier green sphere would result in a downward movement of the red pulley due to the increased tension in the ropes.

Therefore, the red pulley would move down. ✗


 C. Down ✗

Figure 86: A sample case of physics-based dynamics—collision. Back to List of Figures.


6264
6265
6266
6267
6268
6269
6270
6271
6272
6273
6274
6275
6276
6277
6278
6279
6280
6281
6282
6283
6284
6285
6286
6287
6288
6289
6290
6291
6292
6293
6294
6295
6296
6297
6298
6299
6300
6301
6302
6303
6304
6305
6306
6307
6308
6309
6310
6311
6312
6313
6314
6315
6316
6317

Scene: Light

Question: Considering the occurrences in the video, which light source modification listed below is most likely responsible for the phenomenon? <video 1>

Option:

(A) The color of the light changes from orange to purple
 (B) The color of the light changes from blue to limeyellow
 (C) The light source moves downward
 (D) Move parallel to the line between the cigarette and the peach




< video 1 >

The answer is C. The light source moves downward.
 Here's the reasoning:


1. Observe the shadows: Notice how the shadows of all the objects are elongated and pointing in the same direction. This indicates that the light source is positioned at an angle, casting long shadows.
2. Compare the shadows: The shadow of the cigarette box is longer than the shadow of the peach. This means the cigarette box is closer to the light source.
3. Analyze the change: The video shows the shadow of the cigarette box becoming shorter. This means the light source is moving closer to the peach.
4. Deduce the movement: Since the shadow is shrinking, the light source must be moving downward, towards the objects on the surface.

Therefore, the most likely light source modification is the light source moving downward. ❌

 Choice: C. The light source moves downward

Explanation:

1. Observation of Shadows:
 - In the series of images, the shadows of the objects change position and shape.
 - Initially, the shadows are longer and more stretched out.
 - As the sequence progresses, the shadows become shorter and more directly beneath the objects.
2. Analysis of Shadow Behavior:
 - Shadows become shorter and more directly beneath objects when the light source moves closer to the objects (i.e., downward).
 - If the light source were moving parallel to the line between the cigarette and the peach, the shadows would shift horizontally rather than becoming shorter.
 - Changes in the color of the light (options A and B) would not affect the length and position of the shadows in the manner observed.
3. Conclusion:
 - The observed phenomenon of shadows becoming shorter and more directly beneath the objects is consistent with the light source moving downward.
 - Therefore, the most likely modification responsible for the observed changes in the video is that the light source moves downward. ❌

 To determine the most likely cause of the phenomenon, let's analyze each option step by step:

1. The color of the light changes from orange to purple: This option suggests that the light source itself is changing color, which is unlikely as the color of the light is not mentioned in the video.
2. The color of the light changes from blue to limeyellow: This option suggests that the light source is changing color, which is also unlikely as the color of the light is not mentioned in the video.
3. The light source moves downward: This option suggests that the light source is moving downward, which could cause the shadow to change shape. However, the shadow of the apple is not affected by the movement of the light source, so this option is not the most likely cause.
4. Move parallel to the line between the cigarette and the peach: This option suggests that the light source is moving parallel to the line between the cigarette and the peach. This could cause the shadow of the apple to change shape as the light source moves, making it the most likely cause of the phenomenon.

Based on the analysis, option 4 is the most likely cause of the phenomenon. The shadow of the apple changes shape as the light source moves parallel to the line between the cigarette and the peach. ✅

Figure 87: A sample case of physical scene understanding–light. Back to List of Figures.


6318
6319
6320
6321
6322
6323
6324
6325
6326
6327
6328
6329
6330
6331
6332
6333
6334
6335
6336
6337
6338
6339
6340
6341
6342
6343
6344
6345
6346
6347
6348
6349
6350
6351
6352
6353
6354
6355
6356
6357
6358
6359
6360
6361
6362
6363
6364
6365
6366
6367
6368
6369
6370
6371

Scene: Camera

Question: Which of the following camera modifications could produce the visual effects seen in the video? <video 1>

Option:

(A) The camera is closer to the objects
(B) Move parallel to the line between the jewel and the balletskirt
(C) The camera moves upward or downward
(D) Move parallel to the line between the jewel and the poncho




< video 1 >

The answer is C. The camera moves upward or downward.
Here's the reasoning:

1. Observe the visual effect: The objects appear to be getting smaller and further away from the viewer. This is a classic sign of a camera moving away from the scene.
2. Eliminate options:
 - * A. The camera is closer to the objects: This would make the objects appear larger, not smaller.
 - * B. Move parallel to the line between the jewel and the balletskirt: This movement would keep the objects at a similar size and perspective, not create the shrinking effect.
 - * D. Move parallel to the line between the jewel and the poncho: Similar to option B, this would not cause the objects to shrink.
3. Conclusion: The only remaining possibility is that the camera is moving upward or downward, creating the illusion of objects shrinking and moving further away as the camera gains distance.


✗

 B. Move parallel to the line between the jewel and the ballet skirt

Detailed Explanation:

1. Observation of Images:
 - The series of images shows a consistent set of objects: a "WANTED" poster, a ballet skirt, a poncho, and a jewel.
 - The relative positions of these objects change slightly from one image to the next.
2. Analysis of Object Movement:
 - The "WANTED" poster and the ballet skirt appear to move slightly to the left in each subsequent image.
 - The jewel appears to move slightly to the right in each subsequent image.
3. Determining Camera Movement:
 - If the camera were moving closer to the objects (Choice A), we would expect the objects to appear larger over time, which is not observed.
 - If the camera were moving upward or downward (Choice C), we would expect a vertical shift in the objects' positions, which is not observed.
 - If the camera were moving parallel to the line between the jewel and the poncho (Choice D), we would expect the relative positions of the jewel and the poncho to change more significantly, which is not observed.
4. Conclusion:
 - The observed effect is consistent with the camera moving parallel to the line between the jewel and the ballet skirt (Choice B). This movement would cause the objects on the left (the "WANTED" poster and the ballet skirt) to appear to move leftward and the object on the right (the jewel) to appear to move rightward, which matches the observed changes in the images.

✗

 The visual effects seen in the video, where the objects appear to be floating or hovering in the air, could be produced by the camera moving upward or downward. This is because when the camera moves in a vertical direction, it creates a parallax effect, making the objects appear to be at different distances from the camera, giving the illusion of them floating. The other options, such as moving parallel to the line between the jewel and the poncho or being closer to the objects, would not produce the same effect. Therefore, the correct answer is C. The camera moves upward or downward.

✗

Figure 88: A sample case of physical scene understanding—camera. Back to List of Figures.

6372
6373
6374
6375
6376
6377
6378
6379
6380
6381
6382
6383
6384
6385
6386
6387
6388
6389
6390
6391
6392
6393
6394
6395
6396
6397
6398
6399
6400
6401
6402
6403
6404
6405
6406
6407
6408
6409
6410
6411
6412
6413
6414
6415
6416
6417
6418
6419
6420
6421
6422
6423
6424
6425

Relationships: Location

Question: How does the moon pass through the sun in the video? <video 1>


Option:

(A) From the lower left corner to the upper right corner of the picture

(B) From the upper left corner to the lower right corner of the picture

(C) From the lower right corner to the upper left corner of the picture

(D) From the upper right corner to the lower left corner of the picture




< video 1 >

The answer is D. From the upper right corner to the lower left corner of the picture. Here is a breakdown of the reasoning:

1. The video shows a partial solar eclipse. This means the moon is passing in front of the sun, but not completely covering it.
2. The initial frame of the video shows the moon partially covering the sun, with a crescent-shaped portion of the sun visible.
3. The shape of the crescent indicates that the moon is entering from the upper right of the screen and moving towards the lower left.
4. As the video progresses, the crescent of sunlight becomes smaller, indicating that the moon is moving across the sun from right to left.

Therefore, the correct answer is D: From the upper right corner to the lower left corner of the picture. ❌

 Choice: A. From the lower left corner to the upper right corner of the picture

Reasoning:

1. Initial Observation:
 - The first image shows a total solar eclipse, where the moon completely covers the sun, leaving only the corona visible.
2. Subsequent Images:
 - In the second image, a small crescent of the sun starts to appear on the lower right side of the moon.
 - As we progress through the images, the crescent of the sun becomes larger and moves towards the upper left side of the moon.
3. Direction of Movement:
 - The sequence of images shows the illuminated part of the sun moving from the lower right to the upper left.
 - This indicates that the moon is moving in the opposite direction, from the lower left to the upper right.
4. Conclusion:
 - Since the illuminated part of the sun appears on the lower right and moves towards the upper left, the moon must be moving from the lower left to the upper right.

Therefore, the correct choice is A. From the lower left corner to the upper right corner of the picture. ✅


 D. From the upper right corner to the lower left corner of the picture ❌


Figure 89: A sample case of physical object relationships–location. Back to List of Figures.

6426
6427
6428
6429
6430
6431
6432
6433
6434
6435
6436
6437
6438
6439
6440
6441
6442
6443
6444
6445
6446
6447
6448
6449
6450
6451
6452
6453
6454
6455
6456
6457
6458
6459
6460
6461
6462
6463
6464
6465
6466
6467
6468
6469
6470
6471
6472
6473
6474
6475
6476
6477
6478
6479

Property: Attribute

Question: Which point with option in the image represents the object that possesses the most brittle? <image 1>

Option:
 (A) Point A
 (B) Point B
 (C) Point C
 (D) Point D




< image 1 >

The answer is A.
Here's why:

- Understanding Brittleness: Brittleness refers to a material's tendency to break or fracture under stress, with little to no deformation.
- Analyzing the Objects:
 - * A (Axe): An axe is made of metal, specifically steel. Steel is known for its strength but can be brittle, especially if the axe is made of a lower quality steel or has been damaged.
 - * B (Bowl): The bowl appears to be ceramic, which is generally brittle. However, it's a relatively simple shape, designed to withstand some pressure.
 - * C (Barrel): The barrel is made of wood, which is known for its flexibility and resistance to bending. It is not inherently brittle.
 - * D (Life Jacket): The life jacket is likely made of a combination of materials like nylon and foam. These materials are designed to be flexible and resistant to tearing, not brittle.
- Conclusion: Based on these factors, the axe (Point A) is the most likely object to be brittle. While the bowl could be brittle, the axe's design and potential for lower quality steel make it the most probable choice.

X


 Choice: B. Point B

Reasoning:

- Understanding Brittleness:
 - Brittleness is a material property that describes the tendency of a material to fracture or break without significant deformation when subjected to stress. Brittle materials absorb relatively little energy prior to fracture.
- Analyzing the Objects:
 - Point A (Axe): An axe is typically made of metal, which can be tough and durable. Metals used for tools like axes are usually not brittle; they are designed to withstand impact and stress.
 - Point B (Bowl): The bowl appears to be made of a material that could be ceramic or glass. Both ceramics and glass are known for their brittleness. They can shatter or break easily when dropped or struck.
 - Point C (Barrel): The barrel is likely made of wood or metal. Wood is generally not brittle; it can bend and absorb impact to some extent. Metal barrels are also designed to be durable and not brittle.
 - Point D (Life Jacket): A life jacket is made of soft, flexible materials like foam and fabric. These materials are not brittle; they are designed to be buoyant and flexible.
- Conclusion:
 - Among the objects, the bowl at Point B is the most likely to be brittle. Ceramics and glass are classic examples of brittle materials, as they can break or shatter easily under stress.

Therefore, the object at Point B represents the most brittle material.

X

 To solve this task, let's examine each object and its corresponding point in the image:

- Point A: A wooden stick.
- Point B: A metal bowl.
- Point C: A wooden barrel.
- Point D: A leather bag.

Now, let's analyze the brittleness of each object:

- Wooden stick (Point A): Wood is a natural material that can be brittle, especially when it's dry.
- Metal bowl (Point B): Metal is a strong material that is not brittle.
- Wooden barrel (Point C): Wood is a natural material that can be brittle, especially when it's old or dry.
- Leather bag (Point D): Leather is a natural material that can be brittle, especially when it's old or dry.

Based on this analysis, the objects that possess the most brittleness are the wooden stick (Point A) and the wooden barrel (Point C).

Therefore, the answer is D. Point D (the leather bag) and A. Point C (the wooden barrel) represent the objects that possess the most brittleness.

X




Figure 90: A sample case of physical object property–attribute. Back to List of Figures.

6480
6481
6482
6483
6484
6485
6486
6487
6488
6489
6490
6491
6492
6493
6494
6495
6496
6497
6498
6499
6500
6501
6502
6503
6504
6505
6506
6507
6508
6509
6510
6511
6512
6513
6514
6515
6516
6517
6518
6519
6520
6521
6522
6523
6524
6525
6526
6527
6528
6529
6530
6531
6532
6533

Dynamics: Manipulation

Question: Which of the provided options demonstrates the accurate steps to take the white rope off the black metallic rail? <image 1><image 2><image 3>

Option:
 (A) 2 - 1 - 3
 (B) 2 - 3 - 1
 (C) 3 - 2 - 1
 (D) 1 - 2 - 3


< image 1 >
< image 2 >
< image 3 >

The answer is C. 3 - 2 - 1.

Here's the reasoning:

1. Image #3 shows the white rope being pulled off the black metallic rail.
2. Image #2 shows the white rope partially pulled off the rail, with the end of the rope free and hanging.
3. Image #1 shows the white rope completely attached to the rail.

Therefore, the order of the images is Image #3 (rope being pulled off), then Image #2 (rope partially off), and lastly Image #1 (rope fully attached). ✓

 Choice: D. 1 - 2 - 3


Reasoning Chain:

1. Image #1:
- The white rope is initially placed on the black metallic rail. This is the starting position where the rope is still on the rail.
2. Image #2:
- The white rope is partially moved off the black metallic rail. This indicates the process of removing the rope has begun, but it is not yet completely off the rail.
3. Image #3:
- The white rope is completely off the black metallic rail. This is the final position where the rope has been successfully removed from the rail.

Step-by-Step Explanation:

- Step 1 (Image #1): Begin with the white rope on the black metallic rail.
- Step 2 (Image #2): Start moving the white rope off the black metallic rail.
- Step 3 (Image #3): Complete the process by fully removing the white rope from the black metallic rail.

Thus, the correct sequence of images demonstrating the accurate steps to take the white rope off the black metallic rail is 1 - 2 - 3. ✗

 The image shows a black metallic rail with a white rope attached to it. The rope is looped around a wooden structure, which appears to be a part of a larger piece of equipment or machinery. To determine the correct sequence of steps to remove the white rope from the black metallic rail, we need to analyze the image and the options provided.

Option A suggests the sequence: 2 - 1 - 3. This implies that the white rope is first attached to the wooden structure (2), then removed from the rail (1), and finally, the wooden structure is detached from the rail (3).

Option B suggests the sequence: 2 - 3 - 1. This implies that the white rope is first attached to the wooden structure (2), then the wooden structure is removed from the rail (3), and finally, the rope is detached from the rail (1).

Option C suggests the sequence: 3 - 2 - 1. This implies that the white rope is first attached to the wooden structure (3), then the wooden structure is removed from the rail (2), and finally, the rope is detached from the rail (1).

Option D suggests the sequence: 1 - 2 - 3. This implies that the white rope is first attached to the wooden structure (1), then the wooden structure is removed from the rail (2), and finally, the rope is detached from the rail (3).

Upon examining the image, we can see that the white rope is looped around the wooden structure, which is attached to the black metallic rail. The wooden structure is not directly attached to the rail, so it cannot be the first step. Therefore, options B and C can be eliminated because they start with the wooden structure being attached to the rail.

Between options A and D, option A seems more logical because it starts with the white rope being attached to the wooden structure, which is the first step in the process. The second step would be to remove the wooden structure from the rail, and the third step would be to detach the white rope from the rail.

Therefore, the correct sequence is:

1. Attach the white rope to the wooden structure.
2. Remove the wooden structure from the rail.
3. Detach the white rope from the rail.

The correct answer is A. 2 - 1 - 3. ✗


Figure 91: A sample case of physics-based dynamics—manipulation. Back to List of Figures.

6534
6535
6536
6537
6538
6539
6540
6541
6542
6543
6544
6545
6546
6547
6548
6549
6550
6551
6552
6553
6554
6555
6556
6557
6558
6559
6560
6561
6562
6563
6564
6565
6566
6567
6568
6569
6570
6571
6572
6573
6574
6575
6576
6577
6578
6579
6580
6581
6582
6583
6584
6585
6586
6587

Scene: Camera


Question: Based on the phenomenon in the video, which of the following camera changes can produce the effect in the video? <video 1>

Option:
 (A) Move parallel to the line between the binder and the safetypin
 (B) The camera is closer to the objects
 (C) Move parallel to the line between the ipod and the safetypin
 (D) The camera is farther away from the objects




<video 1>

The answer is D. The camera is farther away from the objects.
 Here is the step-by-step reasoning:
 1. Observe the video: The video shows a zoom-out effect. The objects appear smaller and farther apart as the video progresses.
 2. Understand zoom: Zooming in makes objects appear larger and closer, while zooming out makes objects appear smaller and farther apart.
 3. Relate zoom to camera distance: Zooming in is achieved by moving the camera closer to the objects, while zooming out is achieved by moving the camera farther away from the objects.
 4. Apply to the video: Since the video shows a zoom-out effect, the camera must be moving farther away from the objects.
 Therefore, the camera change that produces the effect in the video is D. The camera is farther away from the objects.

 Choice: A. Move parallel to the line between the binder and the safety pin

Explanation:

1. Observation of the Images:
 - The series of images shows a binder clip, a safety pin, and a small square object on a brick-patterned surface.
 - The yellow powder-like substance appears to be moving from left to right across the images.
2. Analyzing the Movement:
 - The binder clip, safety pin, and small square object remain stationary in all the images.
 - The yellow powder-like substance is the only element that changes position, moving consistently from left to right.
3. Determining the Camera Movement:
 - Since the objects (binder clip, safety pin, and small square object) do not change their relative positions, the camera itself must be moving to create the effect of the yellow powder moving.
 - The movement of the yellow powder from left to right suggests that the camera is moving in a direction that causes this relative motion.
4. Evaluating the Options:
 - A. Move parallel to the line between the binder and the safety pin: This would mean the camera is moving horizontally across the scene, which aligns with the observed left-to-right movement of the yellow powder.
 - B. The camera is closer to the objects: This would result in a change in the size or perspective of the objects, which is not observed.
 - C. Move parallel to the line between the iPod and the safety pin: There is no iPod in the images, so this option is irrelevant.
 - D. The camera is farther away from the objects: This would also result in a change in the size or perspective of the objects, which is not observed.
5. Conclusion:
 - The consistent left-to-right movement of the yellow powder, while the other objects remain stationary, indicates that the camera is moving parallel to the line between the binder and the safety pin.
 - Therefore, the correct choice is A. Move parallel to the line between the binder and the safety pin.

 To determine the correct answer, let's analyze the phenomenon in the video and the options provided:

1. Move parallel to the line between the binder and the safetypin:
 - If the camera moves parallel to the line between the binder and the safetypin, the relative positions of the objects will not change, and the effect will not be visible.
2. The camera is closer to the objects:
 - If the camera is closer to the objects, the effect may become more pronounced, but it is not the primary cause of the effect.
3. The camera is farther away from the objects:
 - If the camera is farther away from the objects, the effect may become more pronounced, but it is not the primary cause of the effect.
4. Move parallel to the line between the ipod and the safetypin:
 - If the camera moves parallel to the line between the ipod and the safetypin, the relative positions of the objects will not change, and the effect will not be visible.
5. The camera is closer to the objects:
 - If the camera is closer to the objects, the effect may become more pronounced, but it is not the primary cause of the effect.

Based on the analysis, the correct answer is:

A. Move parallel to the line between the binder and the safetypin

This is because moving the camera parallel to the line between the binder and the safetypin will not change the relative positions of the objects, and therefore, the effect will not be visible.

Figure 92: A sample case of physical scene understanding—camera. Back to List of Figures.

6588
6589
6590
6591
6592
6593
6594
6595
6596
6597
6598
6599
6600
6601
6602
6603
6604
6605
6606
6607
6608
6609
6610
6611
6612
6613
6614
6615
6616
6617
6618
6619
6620
6621
6622
6623
6624
6625
6626
6627
6628
6629
6630
6631
6632
6633
6634
6635
6636
6637
6638
6639
6640
6641

Scene: Light

Question: Referring to the phenomenon shown in the video, which light source change from the options below would most likely be the cause? <video 1>

Option:

- (A) The color of the light changes from limeyellow to pink
- (B) It's just that the light source is weaker and the light source position remains the same
- (C) It's just that the light source is stronger and the light source position remains the same
- (D) Move parallel to the line between the backpack and the cake



<video 1>

The answer is D. Move parallel to the line between the backpack and the cake.

Here's the reasoning:

1. Observe the shadows: The shadows in the video are elongated and clearly defined, indicating a light source that is positioned relatively close to the objects.
2. Analyze the shadow changes: The shadows of the objects are moving over time. This indicates that the light source itself is also moving, not just changing in intensity or color.
3. Identify the shadow movement pattern: The shadows appear to be moving in a direction that is parallel to the line connecting the backpack and the cake.
4. Deduce the light source movement: For the shadows to move in this way, the light source must also be moving in a direction parallel to the line connecting the backpack and the cake.
5. Eliminate other options:
 - * A. Color change wouldn't affect shadow movement.
 - * B. A weaker light source would make the shadows less defined, not move them.
 - * C. A stronger light source wouldn't change the direction of the shadows.

Therefore, the most likely cause of the shadow changes in the video is a light source moving parallel to the line between the backpack and the cake. ✗



Choice: D. Move parallel to the line between the backpack and the cake

Reasoning Chain:

1. Observation of Shadows:
 - The series of images shows a consistent shadow cast on the ground.
 - The shadow's shape and position change slightly across the images.
2. Analysis of Shadow Movement:
 - The shadow appears to move horizontally across the images.
 - The objects (backpack, cake, ham, and barrel) remain stationary, indicating that the change is due to the light source movement.
3. Light Source Position:
 - The shadow's movement suggests that the light source is moving.
 - The direction of the shadow's movement indicates the direction of the light source's movement.
4. Direction of Light Source Movement:
 - The shadow moves in a manner that suggests the light source is moving parallel to the line between the backpack and the cake.
 - This movement would cause the shadow to shift horizontally as observed in the images. ✗
5. Elimination of Other Options:
 - Option A (Color Change): The images do not show any change in the color of the light.
 - Option B (Weaker Light Source): A weaker light source would result in a dimmer scene, not a change in shadow position.
 - Option C (Stronger Light Source): A stronger light source would result in a brighter scene, not a change in shadow position.

Therefore, the most likely cause of the phenomenon shown in the video is that the light source is moving parallel to the line between the backpack and the cake.



The most likely cause of the change in light source is that the light source is weaker and the light source position remains the same. This is because the shadow of the backpack and the cake appears to be getting larger, indicating that the light source is moving further away from the objects. The other options do not explain the change in shadow size. ✗

Figure 93: A sample case of physics-based dynamics—collision. Back to List of Figures.

6642
6643
6644
6645
6646
6647
6648
6649
6650
6651
6652
6653
6654
6655
6656
6657
6658
6659
6660
6661
6662
6663
6664
6665
6666
6667
6668
6669
6670
6671
6672
6673
6674
6675
6676
6677
6678
6679
6680
6681
6682
6683
6684
6685
6686
6687
6688
6689
6690
6691
6692
6693
6694
6695

Relationships: Location

Question: Relative to the movement of the rope, what is the position of the hand initiating the wave? <video 1>

Option:

- (A) At the rope's middle point.
- (B) At the free end of the rope.
- (C) Near the rope's starting end.
- (D) At both ends simultaneously.



<video 1>

The answer is C. Near the rope's starting end.

Here's the breakdown:

1. Observe the motion: The rope is shown oscillating in a standing wave pattern. Standing waves occur when waves traveling in opposite directions interfere with each other.
2. Identify the fixed point: The rope is fixed at the top, indicating that the end attached to the ceiling is a node (a point of no displacement).
3. Recognize the pattern: The hand holding the rope is moving up and down, generating the wave. The rope oscillates, creating alternating nodes (N) and antinodes (A) along its length.
4. Analyze the hand's position: The hand is always near the rope's starting end, not at the middle or the free end, and it's not at both ends simultaneously.
5. Confirm the choice: The hand's movement is responsible for initiating the wave and creating the standing wave pattern, which aligns with the choice of being near the rope's starting end.

Therefore, the position of the hand initiating the wave is near the rope's starting end. ❌



C. Near the rope's starting end

Explanation:

1. Observation of the Images:
 - The images show a rope exhibiting different harmonic modes (1st, 2nd, 3rd, and 5th harmonics).
 - The hand initiating the wave is visible in each image, and it is consistently positioned at one end of the rope.
2. Understanding Harmonics:
 - Harmonics are standing wave patterns that occur at specific frequencies.
 - The 1st harmonic (fundamental frequency) has one antinode (A) in the middle and nodes (N) at the ends.
 - The 2nd harmonic has two antinodes and three nodes.
 - The 3rd harmonic has three antinodes and four nodes.
 - The 5th harmonic has five antinodes and six nodes.
3. Position of the Hand:
 - In each image, the hand is seen moving the rope to create these standing wave patterns.
 - The hand is always at the same end of the rope, which is the starting end where the wave is initiated.
4. Conclusion:
 - Since the hand is consistently at the same end of the rope and not in the middle or at both ends, the correct answer is that the hand is near the rope's starting end.

Therefore, the correct choice is
C. Near the rope's starting end. ❌



To determine the position of the hand initiating the wave, we need to analyze the image and the movement of the rope. The rope is shown in motion, and we can see the hand at the end of the rope. The hand appears to be at the end of the rope, as it is the only hand visible and the rope is extending from it. The rope is moving from the top left to the bottom right of the image, indicating that the hand is pulling the rope from the top left to the bottom right. Therefore, the hand initiating the wave is at the end of the rope. ❌

The correct answer is:
C. At both ends simultaneously

Figure 94: A sample case of physics-based dynamics—throwing. Back to List of Figures.


6696
6697
6698
6699
6700
6701
6702
6703
6704
6705
6706
6707
6708
6709
6710
6711
6712
6713
6714
6715
6716
6717
6718
6719
6720
6721
6722
6723
6724
6725
6726
6727
6728
6729
6730
6731
6732
6733
6734
6735
6736
6737
6738
6739
6740
6741
6742
6743
6744
6745
6746
6747
6748
6749

Relationships: Location

Question: What is the position of the electromagnet relative to the can? <video 1>

Option:

(A) Below the can
(B) On top of the can
(C) Next to the can
(D) None of the above




<video 1>

The answer is A. Below the can.

Here's the reasoning chain:


1. Visual Inspection: In the beginning, we see the can spinning and then we see sparks coming out of the machine that is used to launch the can.
2. Inference: We can infer that the sparks are related to the launching of the can.
3. Electromagnet: The sparks are coming out of the electromagnet.
4. Location: The electromagnet is located below the can because the sparks are coming out from below the can.

Therefore, the electromagnet is located below the can. ✗

 C. Next to the can

Detailed Explanation:

1. Initial Observation: In the first image, we see a can positioned inside a circular device, which appears to be an electromagnet. The can is held horizontally.
2. Sequence of Events: As we move through the images, the can is shown being ejected from the circular device. This suggests that the electromagnet is responsible for propelling the can.
3. Final Position: In the last image, the can is seen lying on a table, and the electromagnet is visible next to it. This confirms that the electromagnet was positioned horizontally relative to the can.
4. Conclusion: Since the electromagnet is seen next to the can in the final image and the can was ejected horizontally, it is clear that the electromagnet was positioned next to the can during the process. ✗

 The image shows a close-up of a cylindrical object with a metallic surface, which appears to be a can due to its shape and the visible text and logo. The electromagnet is positioned around the can, suggesting it is being used to hold or manipulate the can. The exact position of the electromagnet relative to the can cannot be determined with precision without additional context, but it is in close proximity to the can, likely encircling it. Therefore, the most accurate choice would be:

C. Next to the can

The electromagnet is not below, on top, or in a completely different position from the can; it is in close proximity to the can, which is indicated by the visible text and logo on the can and the electromagnet's position around it. ✗


Figure 95: A sample case of physical object relationships–location. Back to List of Figures.

6750
6751
6752
6753
6754
6755
6756
6757
6758
6759
6760
6761
6762
6763
6764
6765
6766
6767
6768
6769
6770
6771
6772
6773
6774
6775
6776
6777
6778
6779
6780
6781
6782
6783
6784
6785
6786
6787
6788
6789
6790
6791
6792
6793
6794
6795
6796
6797
6798
6799
6800
6801
6802
6803

Dynamics: Others

Question: What is the primary reason for the insect's behavior as shown in the video?
<video 1>

Option:
 (A) To hunt for food
 (B) To minimize light refraction interference
 (C) To hide from predators
 (D) To communicate with other insects



<video 1>


The answer is C. To hide from predators.

Here's why:

1. The insect's movement is erratic and seemingly random. This is a classic predator avoidance strategy.
2. The insect is camouflaged with its surroundings. Its green color blends in with the vegetation, making it harder for predators to spot.
3. The insect is in a complex environment. The branches provide numerous hiding places and escape routes.
4. The insect's behavior is typical of prey animals. Many insects use a combination of camouflage and rapid, unpredictable movements to avoid being caught by predators.

✘

Therefore, the insect's behavior in the video is most likely driven by a desire to avoid becoming prey.


 C. To hide from predators

Detailed Explanation:

1. Observation of the Insect's Behavior:
 - The series of images shows an insect initially stationary on a branch.
 - Suddenly, the insect makes a rapid movement, causing water to splash.
2. Analysis of the Environment:
 - The environment appears to be a natural habitat with branches and water, suggesting a place where predators might be present.
 - The rapid movement and splash indicate a sudden reaction, which is often a defensive mechanism.
3. Purpose of the Movement:
 - The rapid movement and splash are not consistent with hunting behavior, as hunting typically involves stealth and precision rather than sudden, conspicuous movements.
 - The behavior does not seem to be related to minimizing light refraction interference, as this would not typically involve such a dramatic action.
 - There is no indication of communication with other insects, which would likely involve more specific and repeated signals rather than a single rapid movement.
4. Conclusion:
 - The most plausible reason for the insect's sudden movement and splash is to evade a threat, suggesting it is trying to hide from predators. This type of behavior is common in many insects as a means of escaping or confusing predators.

✘

Therefore, the primary reason for the insect's behavior as shown in the video is to hide from predators.

 The insect's behavior of bending its legs and positioning itself in a way that creates a shadow on the glass surface is likely a form of camouflage. This behavior helps the insect to blend in with the surroundings, making it less visible to predators. The shadow creates a visual effect that mimics the texture and shape of the glass, providing a form of protection. This is a common survival strategy in the animal kingdom, where many species have evolved to use their environment to their advantage. The insect is not actively hunting for food, nor is it trying to communicate with other insects, and there is no indication that it is trying to minimize light refraction interference. Therefore, the most plausible reason for this behavior is to hide from predators.

✘

Figure 96: A sample case of physics-based dynamics——fluid. Back to List of Figures.


6804
6805
6806
6807
6808
6809
6810
6811
6812
6813
6814
6815
6816
6817
6818
6819
6820
6821
6822
6823
6824
6825
6826
6827
6828
6829
6830
6831
6832
6833
6834
6835
6836
6837
6838
6839
6840
6841
6842
6843
6844
6845
6846
6847
6848
6849
6850
6851
6852
6853
6854
6855
6856
6857

Scene: Camera

Question: Based on the visual effects in the video, which of the following changes to the camera might create this effect? <video 1>

Option:

(A) The camera rotates along the horizontal axis (left or right).
 (B) The camera rotates along the vertical axis (upside or downside).
 (C) The camera moves upward or downward
 (D) The camera is closer to the objects




<video 1>

The answer is C. The camera moves upward or downward.

Here is the reasoning:

- Visual Analysis:** The video shows objects appearing to float and move upward. This indicates a change in the camera's position relative to the objects.
- Eliminating Other Options:**
 - * A. Rotating along the horizontal axis: This would cause objects to appear to move left or right, not upward.
 - * B. Rotating along the vertical axis: This would cause objects to appear to move forward or backward, not upward.
 - * D. The camera is closer to the objects: This would make objects appear larger, not float upward. ❌
- Conclusion:** The only option that logically explains the upward movement of objects is the camera moving upward. As the camera rises, the objects appear to move upwards from the camera's perspective.

 Choice: C. The camera moves upward or downward

Explanation:

- Initial Observation:**
 - In the first few images, the objects (peanut butter jar, syringe, tripod, etc.) are placed on a wooden surface.
 - As the sequence progresses, the objects appear to move upward relative to the wooden surface.
- Analysis of Object Movement:**
 - The peanut butter jar, syringe, and other items gradually rise above the wooden surface.
 - By the fourth image, the objects are completely off the wooden surface and appear to be floating in the air.
 - This upward movement continues until the last image, where the objects are still above the wooden surface.
- Camera Movement Consideration:**
 - **Horizontal Rotation (Left or Right):** If the camera were rotating horizontally, the objects would appear to move sideways rather than upward.
 - **Vertical Rotation (Upside or Downside):** If the camera were rotating vertically, the perspective of the objects would change, but they would not uniformly rise above the surface.
 - **Closer to Objects:** If the camera were moving closer, the objects would appear larger but would not rise above the surface.
 - **Upward or Downward Movement:** If the camera moves upward, the objects would appear to rise above the surface as the camera's perspective changes.
- Conclusion:**
 - The consistent upward movement of the objects relative to the wooden surface indicates that the camera is moving upward. This creates the effect of the objects rising above the surface as the camera's perspective changes.

Therefore, the correct choice is C. The camera moves upward or downward. ❌


 The visual effects in the video are created by the camera rotating along the vertical axis (upside or downside). This is evident from the way the camera appears to be moving up and down, causing the objects to appear to rotate around it. The rotation creates the illusion of the objects moving in a circle, which is a common technique used in 360-degree videos to give the viewer a sense of immersion and movement. The camera's rotation around the vertical axis allows the viewer to see different angles of the objects, making them appear to be in motion. This effect is achieved by capturing multiple frames of the scene from different angles and stitching them together to create a seamless, 360-degree view. The camera's movement along the vertical axis is what gives the viewer the impression of the objects rotating around the camera. ❌

Figure 97: A sample case of physical scene understanding—camera. Back to List of Figures.


6858
6859
6860
6861
6862
6863
6864
6865
6866
6867
6868
6869
6870
6871
6872
6873
6874
6875
6876
6877
6878
6879
6880
6881
6882
6883
6884
6885
6886
6887
6888
6889
6890
6891
6892
6893
6894
6895
6896
6897
6898
6899
6900
6901
6902
6903
6904
6905
6906
6907
6908
6909
6910
6911

Scene: Light

Question: According to the video, which alteration to the light source is most likely to have triggered the phenomenon? <video 1>

Option:

- (A) Move parallel to the line between the adhesive tape and the corkboard
- (B) The color of the light changes from limeyellow to green
- (C) The light source moves downward
- (D) The color of the light changes from yellow to white



<video 1>

The answer is C. The light source moves downward.

Here's the reasoning:

1. Observation: The video shows the shadows of the objects getting longer.
2. Shadow Length: The length of a shadow is directly related to the angle of the light source. The higher the light source, the shorter the shadow. The lower the light source, the longer the shadow.
3. Conclusion: Since the shadows are getting longer, the light source must be moving downwards.

The other options are incorrect:

- * A. Move parallel to the line between the adhesive tape and the corkboard: Moving the light source parallel to the objects would not significantly affect the shadow length.
- * B. The color of the light changes from limeyellow to green: The color of the light source affects the color of the shadow, but not its length.
- * D. The color of the light changes from yellow to white: Similar to option B, the color of the light does not affect shadow length.



Choice: C. The light source moves downward

Explanation:

1. Observation of Shadows:
 - In the series of images, the shadows of the objects (the adhesive tape, the corkboard, and the object on the left) are changing.
 - Initially, the shadows are longer and positioned to the right of the objects.
 - As the sequence progresses, the shadows become shorter and move closer to the objects.
2. Analysis of Shadow Behavior:
 - Shadows become shorter and move closer to the objects when the light source moves downward. This is because the angle of the light relative to the objects changes, causing the shadows to contract and shift position.
 - If the light source were moving parallel to the line between the adhesive tape and the corkboard (Choice A), the shadows would shift horizontally but not change significantly in length.
 - Changes in the color of the light (Choices B and D) would not affect the position or length of the shadows, only the color of the illumination.
3. Conclusion:
 - The observed phenomenon of the shadows becoming shorter and moving closer to the objects is consistent with the light source moving downward. Therefore, the most likely alteration to the light source that triggered this phenomenon is that the light source moved downward.

Thus, the correct choice is C. The light source moves downward.



The phenomenon in the image is a shadow being cast on a surface with a pattern of cracks. The shadow is distorted and has a darker area in the center, which suggests that the light source is not directly overhead. The most likely alteration to the light source that would cause this effect is a change in the angle of the light.

Option A suggests that the light source moves parallel to the line between the adhesive tape and the corkboard. This would not cause a significant change in the shadow's shape or distortion.

Option B suggests that the color of the light changes from yellow to green. This would not affect the shadow's shape or distortion.

Option C suggests that the light source moves downward. This would cause the shadow to become more elongated and distorted, as the light source is no longer directly overhead.

Option D suggests that the color of the light changes from yellow to white. This would not affect the shadow's shape or distortion.

Based on the distortion of the shadow, the most likely alteration to the light source is a change in the angle of the light, which is described in option C. Therefore, the answer is C. The light source moves downward.

Figure 98: A sample case of physical scene understanding–light. Back to List of Figures.


6912
6913
6914
6915
6916
6917
6918
6919
6920
6921
6922
6923
6924
6925
6926
6927
6928
6929
6930
6931
6932
6933
6934
6935
6936
6937
6938
6939
6940
6941
6942
6943
6944
6945
6946
6947
6948
6949
6950
6951
6952
6953
6954
6955
6956
6957
6958
6959
6960
6961
6962
6963
6964
6965

Dynamics: Manipulation

Question: To brush (or dust) the toothbrush, which point is most suitable? <image 1>

Option:

(A) Point A
(B) Point B
(C) Point C
(D) Point D




<image 1>

The answer is B. Point B. Here is the reasoning:


1. The goal is to brush the toothbrush, which means to clean the bristles.
2. Point B is located in the middle of the toothbrush handle, where the bristles are attached.
3. Point A is too high on the toothbrush, and might not reach the bristles.
4. Point C is too low on the toothbrush, and might not reach the bristles.
5. Point D is too high on the toothbrush, and might not reach the bristles.

Therefore, Point B is the most suitable point to brush the toothbrush. ✓

 Choice: A. Point A

Reasoning:

1. Purpose of Brushing/Dusting a Toothbrush:
 - The goal is to clean the bristles of the toothbrush, as this is the part that comes into contact with teeth and gums and is most likely to accumulate debris, toothpaste residue, and bacteria.
2. Location of the Bristles:
 - The bristles are located at the top of the toothbrush, which is marked as Point A in the image.
3. Effectiveness of Cleaning:
 - Cleaning the bristles directly ensures that any accumulated debris and bacteria are removed effectively. This is crucial for maintaining oral hygiene and ensuring the toothbrush remains effective in cleaning teeth.
4. Other Points:
 - Points B, C, and D are parts of the handle and do not require the same level of cleaning as the bristles. While it is good practice to keep the entire toothbrush clean, the primary focus should be on the bristles.
5. Conclusion:
 - Therefore, Point A is the most suitable point to brush or dust when cleaning a toothbrush, as it directly addresses the part of the toothbrush that needs the most attention for hygiene purposes. ✗

 To brush (or dust) the toothbrush, the most suitable point would be Point D.

Here's the reasoning chain:

1. The toothbrush is standing upright on a green base.
2. The toothbrush has four points labeled A, B, C, and D.
3. Point A is at the top of the toothbrush, which is not the best point to brush or dust.
4. Point B is on the side of the toothbrush, which is also not the best point to brush or dust.
5. Point C is at the bottom of the toothbrush, which is not the best point to brush or dust.
6. Point D is on the side of the toothbrush, which is also not the best point to brush or dust.

However, Point D is the closest point to the base of the toothbrush, making it the most suitable point to brush or dust. ✗


Figure 99: A sample case of physics-based dynamics——manipulation. Back to List of Figures.

6966
6967
6968
6969
6970
6971
6972
6973
6974
6975
6976
6977
6978
6979
6980
6981
6982
6983
6984
6985
6986
6987
6988
6989
6990
6991
6992
6993
6994
6995
6996
6997
6998
6999
7000
7001
7002
7003
7004
7005
7006
7007
7008
7009
7010
7011
7012
7013
7014
7015
7016
7017
7018
7019

Dynamics: Collision

Question: If the red sphere were much heavier, which direction would the purple hollow pulley rotate? <video 1>

Option:
 (A) Anti-clockwise
 (B) Clockwise
 (C) Stationary
 (D) Uncertain




<video 1>

The answer is A. Anti-clockwise.

Here's the step-by-step explanation:

- Identify the forces: The system has three main forces:
 - * Gravity: Pulling the red sphere down.
 - * Tension in the purple belt: This tension is created by the weight of the red sphere.
 - * Tension in the green belt: This tension is created by the weight of the red sphere and the weight of the white sphere (though the weight of the white sphere is irrelevant in this case since the green belt is not directly connected to the purple pulley).
- Analyze the purple pulley: The purple pulley is connected to the red sphere via the purple belt. Since the red sphere is heavier, it exerts a larger downward force. This force will cause the purple belt to move downward on the right side and upward on the left side.
- Determine the rotation: The upward movement of the purple belt on the left side of the pulley will cause the pulley to rotate anti-clockwise. This is because the belt is fixed to the pulley, and as the belt moves upward, it pulls the top portion of the pulley with it, causing the rotation.

✗


 Choice: B. Clockwise

Explanation:

- Understanding the System:
 - The system consists of a series of pulleys and weights connected by ropes.
 - The purple hollow pulley is the one in question, and it is connected to other pulleys and weights.
- Current Movement:
 - From the series of images, it is observed that the red sphere is moving upwards while the white sphere is moving downwards.
 - This indicates that the current setup has the red sphere being lighter than the white sphere, causing the white sphere to descend and the red sphere to ascend.
- Effect of Heavier Red Sphere:
 - If the red sphere were much heavier, it would exert a greater downward force compared to the white sphere.
 - This increased downward force would cause the red sphere to move downwards instead of upwards.
- Pulley Rotation:
 - As the red sphere moves downwards, it would pull the rope connected to the purple hollow pulley.
 - The direction of the rope's movement would cause the purple hollow pulley to rotate in the direction that allows the red sphere to descend.
- Determining Rotation Direction:
 - Observing the setup, if the red sphere moves downwards, the rope on the right side of the purple hollow pulley would be pulled down.
 - This downward pull on the right side would cause the purple hollow pulley to rotate in a clockwise direction.

Therefore, if the red sphere were much heavier, the purple hollow pulley would rotate clockwise.

✗

 C. Stationary

✓

Figure 100: A sample case of physics-based dynamics—collision. Back to List of Figures.

7020
7021
7022
7023
7024
7025
7026
7027
7028
7029
7030
7031
7032
7033
7034
7035
7036
7037
7038
7039
7040
7041
7042
7043
7044
7045
7046
7047
7048
7049
7050
7051
7052
7053
7054
7055
7056
7057
7058
7059
7060
7061
7062
7063
7064
7065
7066
7067
7068
7069
7070
7071
7072
7073

Property: Attribute

Question: Reflecting on the phenomena in the video, which of these camera adjustments could cause the observed effect? <video 1>

Option:

- (A) Move parallel to the line between the screwdriver and the lemonade
- (B) The camera is farther away from the objects
- (C) The camera is closer to the objects
- (D) Move parallel to the line between the screwdriver and the tool



<video 1>

The answer is A. Move parallel to the line between the screwdriver and the lemonade.

Here is the step-by-step reasoning:

1. Observe the image: The image shows a set of tools and a glass of lemonade on a seemingly flat surface. The perspective is distorted, creating a sense of depth where the objects appear to be on a curved or slanted surface.
2. Identify the distortion: The distortion is most noticeable in the lines running parallel to the edges of the image. These lines appear curved, indicating a change in perspective.
3. Consider the camera movements: The question asks about camera adjustments that could cause this effect.
 - * A. Move parallel to the line between the screwdriver and the lemonade: Moving the camera parallel to the line would cause the objects further away from the camera to appear smaller, creating the curved lines effect.
 - * B. The camera is farther away from the objects: This would make the objects appear smaller overall, but not necessarily cause the curved lines effect.
 - * C. The camera is closer to the objects: This would make the objects appear larger overall, not smaller, and wouldn't create the curved lines effect.
 - * D. Move parallel to the line between the screwdriver and the tool: This movement is irrelevant to the observed distortion, as it would not affect the relative positions of the objects.
4. Conclude: Therefore, the most likely explanation for the observed distortion is A. Move parallel to the line between the screwdriver and the lemonade, as this movement would cause the perspective change and the resulting curved lines. ❌



Choice: A. Move parallel to the line between the screwdriver and the lemonade

Explanation:

1. Observation of the Images:
 - The series of images shows a set of tools and objects, including a screwdriver and a lemonade, with the background remaining constant.
 - The objects appear to be moving relative to the camera, but their relative positions to each other remain unchanged.
2. Analysis of Movement:
 - The objects are not changing in size, which indicates that the camera is not moving closer or farther away from the objects (eliminating choices B and C).
 - The objects are not moving in a way that suggests a change in perspective along the line between the screwdriver and the tool (eliminating choice D).
3. Direction of Movement:
 - The objects appear to be moving in a direction that is consistent with the camera moving parallel to the line between the screwdriver and the lemonade.
 - This parallel movement would cause the objects to shift position in the frame while maintaining their relative distances and sizes.
4. Conclusion:
 - The observed effect is consistent with the camera moving parallel to the line between the screwdriver and the lemonade, as this would cause the objects to shift in the manner observed without changing their relative positions or sizes.
 Therefore, the correct choice is A. Move parallel to the line between the screwdriver and the lemonade. ❌



The observed effect in the video is caused by the camera adjustment where the camera is moved parallel to the line between the screwdriver and the tool. This is because when the camera is moved parallel to the line between the screwdriver and the tool, the objects appear to be in different positions, creating the illusion of depth and distance. This is known as the "Parallax Error" or "Parallax Shift" in photography, where the apparent position of an object changes when viewed from different angles or distances. The other options, such as moving the camera farther away or closer to the objects, or moving the camera parallel to the line between the screwdriver and the lemonade, would not create the same effect. Therefore, the correct answer is A. Move parallel to the line between the screwdriver and the tool. ❌

Figure 101: A sample case of physical object property–attribute. Back to List of Figures.


7074
7075
7076
7077
7078
7079
7080
7081
7082
7083
7084
7085
7086
7087
7088
7089
7090
7091
7092
7093
7094
7095
7096
7097
7098
7099
7100
7101
7102
7103
7104
7105
7106
7107
7108
7109
7110
7111
7112
7113
7114
7115
7116
7117
7118
7119
7120
7121
7122
7123
7124
7125
7126
7127

Scene: Light


Question: Referring to the phenomenon shown in the video, which light source change from the options below would most likely be the cause? <video 1>

Option:

(A) It's just that the light source is farther away from the objects
(B) It's just that the light source is closer to the objects
(C) It's just that the light source is stronger
(D) It's just that the light source is weaker





<video 1>

 The answer is D. It's just that the light source is weaker.

Here is the step-by-step reasoning:

1. Observe the shadows: The shadows of the objects are significantly larger and more elongated than their actual size.
2. Understand shadow formation: Shadows are formed when an object blocks light. The size and shape of the shadow depend on the position of the light source and the object.
3. Apply logic: If the light source is farther away, the shadows would be smaller and less defined. If the light source is closer, the shadows would be larger and more defined. If the light source is stronger, the shadows would be darker.
4. Conclude: Since the shadows are large and elongated, it suggests that the light source is weak, causing the light to spread out more and create larger shadows.
5. Eliminate other options: Option A and B are incorrect because the shadows are getting larger, not smaller. Option C is incorrect because a stronger light source would create darker, more defined shadows.





 Choice: A. It's just that the light source is farther away from the objects

Explanation:

1. Observation of Shadows:
 - In the series of images, the shadows of the objects (apple, flower, and artichoke) become progressively longer and more defined.
 - The direction of the shadows also changes, indicating a change in the position of the light source.
2. Light Source Distance:
 - When a light source moves farther away from objects, the shadows cast by the objects become longer. This is because the angle at which the light hits the objects becomes more acute, causing the shadows to stretch out.
 - The images show a clear progression of shadows becoming longer, which is consistent with the light source moving farther away.
3. Light Intensity:
 - The intensity of the light does not appear to change significantly in the images. The objects and their surroundings remain similarly illuminated throughout the sequence.
 - If the light source were simply getting stronger or weaker, we would expect to see changes in the brightness of the objects and their shadows, but the length of the shadows would not necessarily change in the same way.
4. Conclusion:
 - The most plausible explanation for the observed phenomenon is that the light source is moving farther away from the objects, causing the shadows to lengthen. This matches the pattern seen in the images, where the shadows progressively become longer and more defined.

Therefore, the correct choice is A. It's just that the light source is farther away from the objects.



 The phenomenon shown in the video is most likely caused by a change in the light source. When the light source is farther away from the objects, the shadows become longer and more diffused, as seen in the image. This is because the light has to travel a greater distance, causing it to spread out and become less concentrated. The shadows are also less defined and more elongated, which is a result of the light being less direct. Therefore, the most likely cause of this phenomenon is that the light source is farther away from the objects. So, the choice is A. It's just that the light source is farther away from the objects.




Figure 102: A sample case of physical scene understanding–light. Back to List of Figures.


7128
7129
7130
7131
7132
7133
7134
7135
7136
7137
7138
7139
7140
7141
7142
7143
7144
7145
7146
7147
7148
7149
7150
7151
7152
7153
7154
7155
7156
7157
7158
7159
7160
7161
7162
7163
7164
7165
7166
7167
7168
7169
7170
7171
7172
7173
7174
7175
7176
7177
7178
7179
7180
7181

Scene: Light

Question: Taking into account the phenomena observed in the video, which of the following changes to the light source is most likely to have led to this result? <video 1>

Option:

(A) It's just that the light source is stronger and the light source position remains the same
(B) The color of the light changes from red to cyan
(C) It's just that the light source is weaker and the light source position remains the same
(D) The color of the light changes from white to orange




<video 1>

The answer is C. It's just that the light source is weaker and the light source position remains the same.

Here's the reasoning:

1. Observe the shadows: The shadows in the video are elongated and faint. This indicates that the light source is low and weak.
2. Consider the objects: The objects in the video are not brightly illuminated, and their details are not sharp. This reinforces the idea of a weak light source.
3. Eliminate other options:
 - * A. Stronger light source: A stronger light source would result in sharper shadows and brighter objects, contradicting the observation.
 - * B. Color change: While color change would affect the appearance of the objects, it wouldn't explain the faint and elongated shadows.
 - * D. Color change to orange: Similar to option B, a color change to orange wouldn't explain the weakened illumination observed in the shadows.


Therefore, the most likely explanation is that the light source has become weaker, leading to the fainter shadows and dimmer objects observed in the video. ❌

 Choice: A. It's just that the light source is stronger and the light source position remains the same

Explanation:

1. Observation of Shadows:
 - In the series of images, the shadows of the objects (milk carton, chicken leg, and other items) become progressively darker and more defined.
 - The position and shape of the shadows remain consistent throughout the images.
2. Light Source Intensity:
 - The increasing darkness and definition of the shadows suggest that the light source is becoming stronger. When a light source becomes stronger, it casts more pronounced and darker shadows because the contrast between the illuminated areas and the shadowed areas increases.
3. Light Source Position:
 - The consistency in the position and shape of the shadows indicates that the position of the light source has not changed. If the light source had moved, the direction and length of the shadows would have changed as well.
4. Color of Light:
 - There is no noticeable change in the color of the light in the images. The objects and their shadows do not exhibit any color shifts that would suggest a change in the light color from red to cyan or from white to orange. ❌

Based on these observations, the most likely explanation for the phenomena observed in the video is that the light source has become stronger while its position has remained the same. Therefore, the correct choice is A. It's just that the light source is stronger and the light source position remains the same.

 C. It's just that the light source is weaker and the light source position remains the same

The shadows in the image are consistent in shape and size, indicating that the light source is not moving. The only change observed is the shadow of the milk carton becoming less distinct, which suggests that the light source has become weaker. This could be due to the light source being moved further away or the light source itself becoming dimmer. The position of the shadows relative to the objects and the light source remains the same, so the light source position does not change. Therefore, the most likely explanation is that the light source has become weaker, leading to less distinct shadows. ❌

Figure 103: A sample case of physical object property–attribute. Back to List of Figures.




7182
7183
7184
7185
7186
7187
7188
7189
7190
7191
7192
7193
7194
7195
7196
7197
7198
7199
7200
7201
7202
7203
7204
7205
7206
7207
7208
7209
7210
7211
7212
7213
7214
7215
7216
7217
7218
7219
7220
7221
7222
7223
7224
7225
7226
7227
7228
7229
7230
7231
7232
7233
7234
7235

Dynamics: Throwing

Question: Among the listed choices, which one outlines the proper sequence to hang the coat hanger on the cabinet's right door, then open its left door? <image 1> <image 2> <image 3>

Option:

(A) 1 - 2 - 3
(B) 1 - 3 - 2
(C) 3 - 2 - 1
(D) 2 - 1 - 3


<image 1>
<image 2>
<image 3>

The answer is A. 1 - 2 - 3.

Here is the detailed, step-by-step explanation of the reasoning chain for this choice:

1. Image #1 shows the robot's arm extending towards the right door of the cabinet. This is the initial step in hanging the coat hanger.
2. Image #2 shows the robot's arm now in the process of hanging the coat hanger on the right door.
3. Image #3 shows the robot's arm opening the left door of the cabinet. This is the final step in the sequence.

Therefore, the correct order of the images is 1 - 2 - 3, which corresponds to the initial position, the hanging action, and the opening action, respectively.

 Choice: B. 1 - 3 - 2


Reasoning Chain:

1. Image #1:
 - The robot arm is holding the coat hanger and is positioned in front of the open cabinet. This indicates the initial step where the robot is preparing to hang the coat hanger on the cabinet's right door.
2. Image #3:
 - The coat hanger is now hung on the cabinet's right door. The robot arm is no longer holding the hanger, indicating that the hanger has been successfully placed on the door.
3. Image #2:
 - The cabinet doors are closed, and the robot arm is positioned in front of the cabinet. This suggests that the robot is now ready to open the left door of the cabinet.

Therefore, the proper sequence to hang the coat hanger on the cabinet's right door and then open its left door is:

1. Image #1 (preparing to hang the coat hanger)
2. Image #3 (hanger is hung on the right door)
3. Image #2 (ready to open the left door)

Thus, the correct choice is B. 1 - 3 - 2.

 The image shows a coat hanger hanging on the right door of a cabinet, and the left door is open. To hang the coat hanger on the left door, the sequence would be:

1. Open the left door.
2. Hang the coat hanger on the right side of the left door.
3. Close the left door.

Therefore, the correct sequence is:

D. 2 - 1 - 3

Figure 104: A sample case of physics-based dynamics—throwing. Back to List of Figures.

7236
7237
7238
7239
7240
7241
7242
7243
7244
7245
7246
7247
7248
7249
7250
7251
7252
7253
7254
7255
7256
7257
7258
7259
7260
7261
7262
7263
7264
7265
7266
7267
7268
7269
7270
7271
7272
7273
7274
7275
7276
7277
7278
7279
7280
7281
7282
7283
7284
7285
7286
7287
7288
7289

Relationships: Size

Question: Which object is the biggest in volume? <image 1>

Option:

- (A) red cube
- (B) red cube
- (C) green ball
- (D) purple cube



<image 1>



The answer is C.

Here's why:

- Although we don't have exact measurements, we can visually assess the relative sizes.
- The green ball is significantly larger than the cubes, even considering the blue cube's shadow.
- This makes the green ball the biggest in volume among the given objects.



Choice: B. purple cube

Explanation:

1. Visual Inspection: By looking at the image, we can see several objects: a green ball, a red cube, a yellow cube, a green cube, and a purple cube.
2. Relative Size Comparison:
 - The green ball appears to be smaller in volume compared to the cubes.
 - Among the cubes, the purple cube is noticeably larger than the red, yellow, and green cubes.
3. Conclusion: Based on the visual comparison, the purple cube is the largest in volume among the objects listed.

Therefore, the biggest object in volume is the purple cube (Choice B).



To determine which object has the biggest volume, we need to compare the volumes of the different shapes.

A cube has equal sides, so its volume is calculated by multiplying the length of one side by itself twice. The purple cube has sides of length 1, so its volume is $1 * 1 * 1 = 1$ cubic unit. The yellow cube has sides of length 1, so its volume is also $1 * 1 * 1 = 1$ cubic unit. The red cube has sides of length 1, so its volume is $1 * 1 * 1 = 1$ cubic unit.

A sphere has a radius, which is the distance from the center to any point on its surface. The green sphere has a radius of 1, so its volume is calculated by multiplying the cube of the radius by $\frac{4}{3} * \pi$. The volume of the green sphere is $\frac{4}{3} * \pi * 1^3 = \frac{4}{3} * \pi$ cubic units.

Comparing the volumes, we can see that the green sphere has the biggest volume, followed by the purple, yellow, and red cubes, which all have the same volume.

So, the answer is C. green ball.



Figure 105: A sample case of physical object relationships–size. Back to List of Figures.

7290
7291
7292
7293
7294
7295
7296
7297
7298
7299
7300
7301
7302
7303
7304
7305
7306
7307
7308
7309
7310
7311
7312
7313
7314
7315
7316
7317
7318
7319
7320
7321
7322
7323
7324
7325
7326
7327
7328
7329
7330
7331
7332
7333
7334
7335
7336
7337
7338
7339
7340
7341
7342
7343

Property: Attribute

Question: In the photograph, which point with option selects the object with the most smooth? <video 1>

Option:

- (A) Point A
- (B) Point B
- (C) Point C
- (D) Point D



< video 1 >

The answer is B.
Here's the reasoning:

- Point A is a strawberry. Strawberries have a somewhat rough texture due to their seeds.
- Point B is a ball. Balls are typically very smooth, especially when made of materials like rubber or plastic.
- Point C is a ring. Rings can be smooth, but they often have a slight texture due to the metal or material they are made from.
- Point D is an avocado. Avocados have a bumpy, textured skin.

Therefore, Point B is the most likely to be the object with the most smooth texture. ❌



Choice: B. Point B

Reasoning Chain:

1. Observation of Objects:

- Point A: A strawberry, which typically has a textured surface with small seeds on the outside.
- Point B: A smooth, round object that appears to be a pebble or a ball.
- Point C: A metallic object, possibly a nail or a pin, which has a smooth surface but also sharp edges.
- Point D: An avocado, which has a rough and bumpy skin.

2. Comparison of Textures:

- Strawberry (Point A): The surface is not smooth due to the seeds and the natural texture of the fruit.
- Pebble/Ball (Point B): The surface is uniformly smooth and round, indicating a lack of texture.
- Metallic Object (Point C): While the surface may be smooth, the presence of sharp edges and the overall shape make it less uniformly smooth.
- Avocado (Point D): The skin is rough and bumpy, making it the least smooth of the objects.

3. Conclusion:

- Among the objects, the one at Point B is the most uniformly smooth, as it lacks the texture and irregularities present in the other objects.

Therefore, the object at Point B is the smoothest. ❌



To determine the object with the most smooth surface, we need to examine each object in the photograph and assess its texture.

1. Point A: This is a strawberry. Strawberries have a rough texture due to their fibrous outer layer.
2. Point B: This is a white ball. White balls typically have a smooth surface, as they are often made of materials like rubber or plastic.
3. Point C: This is a metal object, possibly a fork. Metal objects can have a smooth or rough texture depending on their material and design.
4. Point D: This is a green object, possibly a cucumber. Cucumbers have a rough texture due to their fibrous outer layer.

Based on the visual information, Point B (the white ball) appears to have the smoothest surface among the objects in the photograph. Therefore, the answer is B. ❌

Figure 106: A sample case of physics-based dynamics——fluid. Back to List of Figures.

7344
7345
7346
7347
7348
7349
7350
7351
7352
7353
7354
7355
7356
7357
7358
7359
7360
7361
7362
7363
7364
7365
7366
7367
7368
7369
7370
7371
7372
7373
7374
7375
7376
7377
7378
7379
7380
7381
7382
7383
7384
7385
7386
7387
7388
7389
7390
7391
7392
7393
7394
7395
7396
7397

Relationships: Depth

Question: Which point lies closest to the camera? <video 1>

Option:

- (A) Point A lies closest
- (B) Point B lies closest
- (C) Point C lies closest
- (D) Point D lies closest



< video 1 >



The answer is C.

Here's how we got there:

1. The vehicle is closest to the camera.
 2. Point C is on the road in front of the vehicle and is the closest point to it, making it the closest point to the camera.
 3. Point B, D, and A are all in the distance behind the car, so they are further away from the camera.
- Therefore, Point C is the closest to the camera.



C. Point C lies closest

Reasoning:

1. Point A is in the sky, far in the background, and is part of the distant horizon and clouds.
2. Point B is on the van, which is further down the road and not the closest object to the camera.
3. Point C is on the dirt road, very close to the bottom edge of the image, indicating it is near the camera.
4. Point D is also on the dirt road but is further away from the camera compared to Point C.

Therefore, Point C is the closest to the camera.



To solve this task, let's analyze the image step by step.

1. The image shows a car driving on a dirt road in a desert-like environment.
2. There are four points labeled A, B, C, and D in the image.
3. Point A is located in the sky, point B is on the left side of the car, point C is on the right side of the car, and point D is on the ground, slightly behind the car.
4. The car appears to be closest to point B, as it is the only point that is directly in line with the car.

Based on this analysis, the answer is B. Point B lies closest to the camera.



Figure 107: A sample case of physical object relationships–depth. Back to List of Figures.

J DISCUSSION AND STATEMENT

J.1 LIMITATION

Portions of our data are constructed based on pre-existing datasets, as detailed in Table 12. We have made every effort to ensure that the images included in this paper comply with applicable copyright laws and are appropriately credited. Should you be the copyright holder of any image used in our work and believe that its usage conflicts with your licensing agreements, don't hesitate to get in touch with us directly. We are committed to promptly addressing any legitimate concerns.

Although PhysBench comprises 100,000 items categorized into 4 major categories and 19 subcategories, making it the first benchmark aimed at evaluating a vision-language model's understanding of the physical world, it still does not encompass all aspects of the real physical environment. We invested thousands of hours in data collection, organization, and annotation, following multiple rigorous processes and repeated reviews to ensure data quality. Nevertheless, minor issues may persist in a small portion of the dataset.

In the experiments described in Section 3.4 and 4.1, we utilized GPT-4o-mini to extract answers, which, while currently being one of the most reliable and reproducible methods, may still unavoidably introduce hallucinations. [Considering the challenges of using LLMs for evaluation, such as hallucinations and knowledge limitations, assessing open-ended formats is particularly difficult \(Yu et al., 2023b; Ge et al., 2024; Li et al., 2023b\).](#) Moreover, automatically evaluating the quality of reasoning processes presents additional challenges (Lu et al., 2024). To address these difficulties and simplify testing, we adopted a multiple-choice format. Nevertheless, PhysBench remains highly challenging, with even the most advanced GPT-4o model achieving less than 50% accuracy. We believe that exploring more complex evaluation formats is a crucial direction for future research.

These challenges are not unique to our dataset but are common across various datasets in VLMs. Nevertheless, we believe that the potential benefits outweigh the associated risks, promoting continued advancement and societal progress. To the best of our knowledge, PhysBench and PhysAgent represent the first effort aimed at benchmarking and enhancing VLMs for physical world understanding, marking a significant step forward in the field. We are committed to the ongoing refinement of our dataset to further improve machine intelligence's comprehension of the physical world, advancing embodied AI toward human-level capabilities.

J.2 BOARDER IMPACT

The broader impact of PhysBench and PhysAgent carries both potential benefits and risks upon deployment and release. While some considerations pertain specifically to the nature of the dataset, others reflect broader challenges inherent to instruction-following vision-language models (VLMs). Below, we outline key risks and corresponding mitigation strategies.

Biases. PhysAgent may inherit biases from its foundational models, both in vision (namely, SAM, Depth Anything V2, GroundingDINO) and language (*e.g.*, GPT-4). These biases can manifest in skewed outcomes or unfair representations, necessitating careful evaluation and mitigation efforts.

Anticipated Societal Implications. A major societal concern is the potential misuse of the dataset and system, including the generation of fabricated content, which may contribute to misinformation, privacy infringements, and other detrimental outcomes. To mitigate these risks, strict adherence to ethical guidelines and ongoing oversight are essential.

Environmental Considerations. In alignment with environmental sustainability goals, we commit to publicly releasing the dataset and scripts to reduce unnecessary carbon emissions by regenerating similar datasets. Throughout our experiments, we ensure compliance with model and data licensing requirements.

7452 J.3 ETHICS STATEMENT
7453

7454 This study does not raise any ethical concerns, as it exclusively utilizes publicly available pre-
7455 existing models, with no involvement of subjective evaluations. All research presented in this paper
7456 strictly adheres to the ethical guidelines set forth by the ICLR Code of Ethics.
7457

7458 J.4 REPRODUCIBILITY STATEMENT
7459

7460 We have adhered to the standard baseline settings employed by existing evaluation benchmarks or
7461 the original testing benchmarks of specific models. All necessary implementation details of our
7462 method are provided in Appendix E and F. Furthermore, we are committed to releasing the data and
7463 code under an open-access license, accompanied by comprehensive instructions to ensure the accu-
7464 rate reproduction of the primary experimental results presented in this paper. All research conducted
7465 complies fully with the ICLR Reproducibility Requirements.
7466
7467
7468
7469
7470
7471
7472
7473
7474
7475
7476
7477
7478
7479
7480
7481
7482
7483
7484
7485
7486
7487
7488
7489
7490
7491
7492
7493
7494
7495
7496
7497
7498
7499
7500
7501
7502
7503
7504
7505