# CURES: FROM GRADIENT ANALYSIS TO EFFICIENT CURRICULUM LEARNING FOR REASONING LLMS

**Anonymous authors** 

000

001

002003004

010 011

012

013

014

015

016

017

018

019

021

023

024

025

026

027

028

031

033

034

035

037

038

039 040

041

042

043

044

046

047

048

051

052

Paper under double-blind review

#### **ABSTRACT**

Curriculum learning plays a crucial role in enhancing the training efficiency of large language models (LLMs) on reasoning tasks. However, existing methods often fail to adequately account for variations in prompt difficulty or rely on simplistic filtering mechanisms to select prompt datasets within a narrow criterion range, resulting in significant computational waste. In this work, we approach the problem from the perspective of reinforcement learning gradient optimization, offering a systematic and theoretical investigation into how to improve the training efficiency of LLMs. We identify two key factors influencing training efficiency: the selection of training prompts and the allocation of rollout quantities across different prompts. Our theoretical analysis reveals that the sampling distribution of prompts dictates the convergence rate of gradient descent, while the allocation of the rollout quantity influences the consistency and stability of overall gradient updates. Based on these insights, we propose CurES, an efficient training method that accelerates convergence and employs Bayesian posterior estimation to minimize computational overhead. Experiments demonstrate that our CurES outperforms Group Relative Policy Optimization (GRPO) by +3.3 points and +4.82 points with 1.5B and 7B models, respectively, and exceeds the best prior sample efficient methods by +2.12 points on average across eight math reasoning benchmarks. Our CurES also improves convergence speed compare to baselines such as GRPO.

#### 1 Introduction

Although Reinforcement Learning with Verifiable Reward (RLVR) (Guo et al., 2025; Lambert et al., 2024; Guo et al., 2025; Team et al., 2025) has emerged as a powerful paradigm for reasoning tasks of Large Language Models (LLMs), prevailing approaches often rely on uniform sampling strategies that treat all training instances identically (Zeng et al., 2025; Xie et al., 2025). This paradigm fails to account for the inherent heterogeneity in prompt difficulty and the varying training utility that different prompts offer. Consequently, computational resources are inefficiently allocated, being wasted either on trivial prompts that yield diminishing returns or on excessively challenging examples where the model shows negligible progress.

Recent works have investigated progressive training curricula that partition the process into several hand-crafted stages of increasing difficulty (Luo et al., 2025; Song et al., 2025). However, such partitioning is overly coarse and struggles to align with the evolving capabilities of reasoning models during training. Other approaches apply online data filtering by generating and then pruning samples (Yu et al., 2025; Bae et al., 2025; Lin et al., 2025). Yet, this paradigm does little to conserve computational resources and instead leads to suboptimal sample efficiency. Additional studies have begun exploring dynamic computation reallocation across prompts with minimal overhead (Yao et al., 2025; Zhang et al., 2025; Shi et al., 2025). Nevertheless, these techniques address only isolated facets of training acceleration, without fully accounting for the problem's inherent dynamism.

In this work, we first analyze the efficiency of training optimization for reasoning models from the perspective of gradients, elucidating its close relationship with the sampling probability distribution of prompts and the allocation of rollout quantities across these prompts. Our analysis reveals that the prompt sampling distribution directly influences the speed of gradient descent, while the allocation of rollout quantities affects the consistency and stability of overall gradient updates. Leveraging these insights, we propose CurES, a practical training method. CurES first estimates prompt diffi-

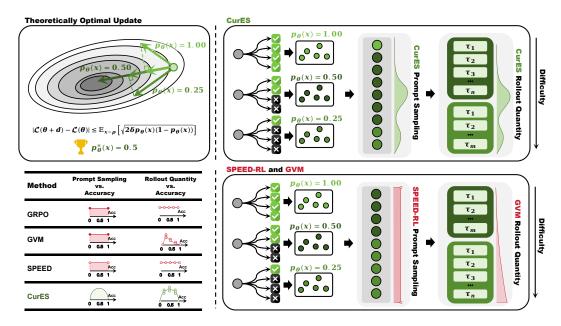


Figure 1: Illustration of our theoretical and practical contributions. The first part presents our theoretical analysis, which establishes the relationship between the gradient efficiency and models' question-answering accuracy, denoted as  $p_{\theta}(x)$ . Building upon these insights, we develop CurES, a practical method that initially estimates  $p_{\theta}(x)$  using a small rollout quantity, then reallocates prompt sampling probabilities and rollout quantities based on the estimated accuracy. In contrast to the unified framwork provided by our CurES, existing sample efficient methods fail to optimize from both prompt sampling and rollout quantity aspects. Speed-RL (Zhang et al., 2025) improves the prompt sampling procedure by eliminate the prompts with estimated accuracy of 0 or 1, and GVM (Yao et al., 2025) propose to assign more rollout quantities to harder prompts.

culty via models' question-answering accuracy, then reallocates prompt sampling probabilities and rollout quantities accordingly. During training, the confidence in these accuracy estimates is progressively refined through posterior estimation based on previously sampled data, thereby improving the robustness of the allocation process. Figure 1 illustrates the overall approach, and our contributions are summarized below:

- We provide a theoretical analysis from the gradient perspective, elucidating the intrinsic relationship between training optimization efficiency and prompt sampling distribution, as well as the allocation of rollout quantities across prompts.
- Guided by the theoretical analysis, we propose a practical training method that integrates Bayesian posterior estimation, achieving enhanced efficiency and stability in reasoning model training with minimal computational overhead.
- Experimental results show that our approach achieves state-of-the-art performance across
  diverse mathematical reasoning datasets and model scales, accelerating convergence by up
  to 5.5 times compared to uniform sampling baselines like GRPO.

# 2 RELATED WORKS

Reinforcement Learning with Verifiable Reward (RLVR). RLVR has emerged as a powerful framework for enhancing the reasoning capabilities of large language models (LLMs) by using deterministic, rule-based verification functions to generate binary reward signals (Lambert et al., 2024; Guo et al., 2025; Team et al., 2025). Unlike preference-based methods that rely on costly human feedback (Christiano et al., 2017; Ouyang et al., 2022), RLVR leverages answer matching, particularly in mathematical reasoning tasks, to guide model optimization (Zeng et al., 2025; Xie et al., 2025). While algorithms like PPO (Schulman et al., 2017) are widely used, they often incur high computational costs. Recent advancements, such as GRPO (Shao et al., 2024) and REINFORCE++ (Hu, 2025), aim to improve resource efficiency and accelerate training (Yu et al., 2025; Lin et al.,

2025). Industry models like DeepSeek-R1 (Guo et al., 2025) and OpenAI of (OpenAI et al., 2024) further highlight RLVR's potential for developing robust reasoning patterns.

Curriculum Learning and Data Selection in RLVR. Effective data selection is critical for optimizing RLVR training, yet designing curricula that align with the dynamic capabilities of LLMs remains challenging. Progressive training curricula, such as those proposed in (Luo et al., 2025; Song et al., 2025), partition training into hand-crafted stages of increasing difficulty. However, these static approaches often fail to adapt to the evolving proficiency of models during training. Online data filtering methods, such as those in (Yu et al., 2025; Bae et al., 2025; Lin et al., 2025), generate and prune samples to focus on high-impact data but introduce significant computational overhead, leading to suboptimal sample efficiency. Recent efforts have explored dynamic computation reallocation to prioritize prompts with higher training utility (Yao et al., 2025; Zhang et al., 2025; Shi et al., 2025). However, these methods address only specific aspects of training acceleration and do not fully account for the interplay between prompt sampling distributions and rollout quantity allocation. In contrast, our work proposes CurES, a method that dynamically adjusts sampling probabilities and rollout quantities based on Bayesian posterior estimation of prompt difficulty, achieving improved sample efficiency with minimal computational overhead.

#### 3 Preliminaries

Reinforcement Learning with Verifiable Reward (RLVR) represents a specialized reinforcement learning paradigm tailored for reasoning tasks, where reward signals can be deterministically verified through programmatic means. This approach is particularly well-suited for domains such as mathematical reasoning, code generation, and logical deduction, where correctness criteria are objectively defined (Lambert et al., 2024; Guo et al., 2025; Team et al., 2025). Formally, given a policy model  $\pi_{\theta}$  and a prompt distribution  $\rho$ , the RLVR objective aims to maximize the expected reward while constraining policy updates within a trust region:

$$\mathcal{L}(\theta) = -\mathbb{E}_{x \sim \rho, y \sim \pi_{\theta}(\cdot|x)} [A_{\theta_{\text{old}}}(x, y)], \quad \text{subject to } \mathbb{E}_{x \sim \mathcal{D}} [D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) || \pi_{\theta}(\cdot|x))] \leq \delta. \tag{1}$$

Here,  $A_{\theta_{\mathrm{old}}}(x,y) = r(x,y) - \mathbb{E}_{y \sim \pi_{\theta_{\mathrm{old}}}}[r(x,y)]$  denotes the advantage function,  $\theta_{\mathrm{old}}$  represents the policy parameters from the previous iteration, and  $\delta$  defines the trust region boundary that prevents excessive policy divergence.

A key characteristic of RLVR is its reward formulation. Unlike preference-based RLHF that relies on subjective human judgments, RLVR employs a verifiable reward function defined as:

$$r(x,y) = \begin{cases} 1, & \text{if } y \text{ is the correct answer for } x \\ 0, & \text{otherwise} \end{cases}$$
 (2)

The straightforward reward function design partially mitigates the issue of reward hacking.

#### 4 METHODOLOGY

In this section, we introduce CurES, a novel method designed to enhance the training efficiency of Reasoning LLMs. We begin by establishing a theoretical connection between gradient optimization efficiency and two key factors: the sampling distribution of prompts and the allocation of rollout quantities across these prompts. Based on this analysis, CurES first leverages the estimation of the model's question-answering accuracy to assess prompt difficulty, which is then used to guide an optimal sampling strategy and rollout quantity allocation. By leveraging Bayesian posterior estimation, we progressively refine the confidence in these accuracy estimates using historical sampling data, ensuring robust and adaptive resource allocation with minimal computational overhead.

# 4.1 PROMPT DIFFICULTY CAPS OPTIMIZATION POTENTIAL

To facilitate subsequent derivations, we define the question difficulty as the model's accuracy in answering the question. Given a policy model  $\pi_{\theta}$  and a binary reward function r(x,y) in Eq. (2), the expression for the model's question-answering accuracy  $p_{\theta}$  is given by:

$$p_{\theta}(x) = \mathbb{E}_{y \sim \pi_{\theta}}[r(x, y)]. \tag{3}$$

To investigate how prompt difficulty influences model gradient updates, we first consider the following optimization problem for a given prompt x:

$$\min \mathcal{L}(x; \theta) = \min -\mathbb{E}_{y \sim \pi_{\theta}(\cdot|x)} [A_{\theta_{\text{old}}}(x, y)], \quad \text{s.t. } D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) \| \pi_{\theta}(\cdot|x)) \le \delta. \tag{4}$$

Here, we separately analyze the impact of different prompts on the loss function and theoretically examine how varying prompt difficulty levels affect model training efficiency.

We employ the Lagrange multiplier method to solve the above problem. First, we set  $\theta = \theta_{\rm old} + d$  and reformulate the problem as follows:

$$d^* = \underset{\cdot}{\operatorname{argmin}} \ \mathcal{L}(x; \theta_{\text{old}} + d) + \lambda (D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) || \pi_{\theta_{\text{old}} + d}(\cdot|x)) - \delta). \tag{5}$$

By performing first-order Taylor expansion on the loss function  $\mathcal{L}(x;\theta)$  and second-order Taylor expansion on the KL divergence term  $D_{\mathrm{KL}}(\pi_{\theta_{\mathrm{old}}}(\cdot|x)||\pi_{\theta}(\cdot|x))$ , followed by simplification, we derive the following equation:

$$d^* = \underset{d}{\operatorname{argmin}} \ \mathcal{L}(x; \theta_{\text{old}}) + \nabla_{\theta} \mathcal{L}(x; \theta)^{\mathsf{T}} \Big|_{\theta = \theta_{\text{old}}} d + \frac{\lambda}{2} d^{\mathsf{T}} F(x; \theta_{\text{old}}) d - \lambda \delta, \tag{6}$$

where  $F(x;\theta)$  is the Fisher Information Matrix, a metric quantifying the information that observed data provides about parameter estimates in probabilistic models. In reinforcement learning, it primarily serves to construct more reasonable parameter update directions, thereby improving the efficiency and stability of policy optimization. Here,  $F(x;\theta)$  is represented as

$$F(x;\theta) = \mathbb{E}_{y \sim \pi_{\theta}} \left[ \nabla_{\theta} \log \pi_{\theta}(y|x) \nabla_{\theta} \log \pi_{\theta}(y|x)^{\mathsf{T}} \right]. \tag{7}$$

Through mathematical derivation to address the problem of Eq. (6), we obtain the following results:

$$d^* = -\frac{1}{\lambda} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \Big|_{\theta = \theta_{\text{old}}}, \tag{8}$$

$$\lambda = \sqrt{\frac{\nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \big|_{\theta = \theta_{\text{old}}}}{2\delta}}.$$
 (9)

With Eq. (8) and Eq. (9), we derive the expression for the update of the loss function:

$$|\mathcal{L}(x;\theta_{\text{old}}+d) - \mathcal{L}(x;\theta_{\text{old}})| = \sqrt{2\delta\nabla_{\theta}\mathcal{L}(x;\theta)^{\mathsf{T}}\Big|_{\theta=\theta_{\text{old}}}F^{-1}(x;\theta_{\text{old}})\nabla_{\theta}\mathcal{L}(x;\theta)\Big|_{\theta=\theta_{\text{old}}}}.$$
 (10)

According to the definition, the binary reward function r(x,y) serves as an unbiased estimator of the model's question-answering accuracy  $p_{\theta}(x)$ , i.e.,  $p_{\theta}(x) = \mathbb{E}_{y \sim \pi_{\theta}}[r(x,y)]$ . Through the application of the Cramér-Rao inequality, we derive the following fundamental result:

$$|\mathcal{L}(x;\theta_{\text{old}}+d) - \mathcal{L}(x;\theta_{\text{old}})| \le \sqrt{2\delta p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}.$$
(11)

Therefore, for the loss function  $\mathcal{L}(\theta)$ , its optimization potential exhibits the following relationship with prompt difficulty:

$$|\mathcal{L}(\theta_{\text{old}} + d) - \mathcal{L}(\theta_{\text{old}})| \le \mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta p_{\theta_{\text{old}}}(x) \left(1 - p_{\theta_{\text{old}}}(x)\right)} \right]. \tag{12}$$

This demonstrates that the convergence rate of the model's loss function is intrinsically related to the difficulty of the prompt dataset, which is quantified by the model's answering accuracy. To accelerate training, the sampling distribution  $\rho$  should assign varied probabilities to prompts based on difficulty while maintaining a balance with exploration. Thus, we seek the optimal sampling distribution  $\rho$  under the entropy maximization constraint. Concretely, we address the following problem:

$$\max \mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta p_{\theta_{\text{old}}}(x) \left( 1 - p_{\theta_{\text{old}}}(x) \right)} + \alpha \mathcal{H}(\rho) \right], \quad \text{s.t. } \sum_{i=1}^{N} \rho(x_i) = 1.$$
 (13)

Solving the aforementioned problem, we obtain the optimal sampling distribution as follows:

$$\rho^*(x) = \frac{\exp\left(\sqrt{p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}/\tau\right)}{\sum_{x'} \exp\left(\sqrt{p_{\theta_{\text{old}}}(x')\left(1 - p_{\theta_{\text{old}}}(x')\right)}/\tau\right)},\tag{14}$$

where  $\tau = \frac{\alpha}{\sqrt{2\delta}}$  is a hyperparameter. For the theoretical proof please refer to Appendix A.1.

#### 4.2 CLOSING THE GAP WITH THEORETICAL BOUND

In the previous section, we derived an upper bound on the gradient update for a given prompt. However, due to the high computational cost of the natural gradient method, it is often avoided in practice, and the theoretical result is instead used to guide prompt sampling. During actual gradient updates, we aim to closely approximate the theoretical efficiency limit within a trust region bounded by a KL divergence constraint of  $\delta$ . Specifically, after sampling a batch of m prompts, we seek to optimize operations to approach the bound. Within the curriculum learning framework, we consider optimizing the allocation of rollout quantities across prompts under a fixed total rollout budget of N to minimize the following loss function:

$$\min \mathbb{E}\left[\left(\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta_{\text{old}}) - \left(-\mathbb{E}_{x \sim \rho}\left[\sqrt{2\delta p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}\right]\right)\right)^{2}\right], \quad \text{s.t. } \sum_{i=1}^{m} n_{i} = N.$$
 (15)

Here,  $\hat{\theta}$  denotes the updated model parameters obtained from  $\theta_{\text{old}}$  after applying the practical gradient update, i.e.:

$$\hat{\theta} = \theta_{\text{old}} - \eta \nabla_{\theta} \hat{\mathcal{L}}(\theta) \big|_{\theta = \theta_{\text{old}}}, \quad \hat{\mathcal{L}}(\theta) = -\sum_{i=1}^{m} \frac{1}{n_i} \sum_{y_i \in \mathcal{D}_i} \left[ \frac{\pi_{\theta}(y_j | x_i)}{\pi_{\theta_{\text{old}}}(y_j | x_i)} A_{\theta_{\text{old}}} \right].$$
 (16)

Where  $\eta$  is the learning rate and  $n_i$  denotes the number of sampled rollouts for question  $x_i$ . We assume that  $\eta$  is chosen such that the policy update remains within a KL divergence constraint of  $\delta$ .

For convenience, we denote  $g = \nabla_{\theta} \mathcal{L}(\theta) \big|_{\theta = \theta_{\text{old}}}$ ,  $\hat{g} = \nabla_{\theta} \hat{\mathcal{L}}(\theta) \big|_{\theta = \theta_{\text{old}}}$ . By simplifying the loss function, we can show that the optimization problem reduces to the following:

$$\min g^{\top} \mathbb{V}(\hat{g})g, \quad \text{s.t. } \sum_{i=1}^{m} n_i = N.$$
 (17)

The theoretical gradient direction g is typically unknown, and we seek to control the uncertainty of the estimator in all possible directions. Therefore, we instead minimize the total variance  $\text{Tr}(\mathbb{V}(\hat{g}))$ , which corresponds to uniformly reducing the variance in all directions. This approach is a widely adopted technique for variance estimation(Bottou et al., 2018; Papini et al., 2018; Wang et al., 2013). In other words, we consider the following optimization problem:

$$\min \operatorname{Tr}(\mathbb{V}(\hat{g})), \quad \text{s.t. } \sum_{i=1}^{m} n_i = N.$$
 (18)

By expanding the variance of the aforementioned gradient, we isolate the rollout quantities  $n_i$  to facilitate analysis:

$$\min \frac{1}{m^2} \sum_{i=1}^m \frac{\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}\left(h\left(y, x_i; \theta_{\text{old}}\right)\right)\right)}{n_i}, \quad \text{s.t. } \sum_{i=1}^m n_i = N.$$
(19)

where  $h(x, y; \theta) = \frac{\nabla_{\theta} \pi_{\theta}(y_j | x_i)}{\pi_{\theta_{\text{old}}}(y_j | x_i)} A_{\theta_{\text{old}}}(x_i, y_j)$ . By applying the Lagrange multiplier method to solve the above problem, we obtain the optimal solution as follows:

$$n_{i} = \frac{\sigma_{i}}{\sum_{j} \sigma_{j}} N, \quad \sigma_{i} = \sqrt{\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}\left(h\left(y, x_{i}; \theta_{\text{old}}\right)\right)\right)}. \tag{20}$$

The remaining challenge is computing  $\sigma_i$ . By expanding the variance and noting that the advantage function can be evaluated based on whether the rollout y is correct, i.e.,  $A_{\theta_{\text{old}}}(x,y) = \mathbb{I}(y \text{ is correct for } x) - p_{\theta_{\text{old}}}(x)$ , we derive the following symmetric computational form:

$$\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}\left(h\left(y, x_{i}; \theta_{\text{old}}\right)\right)\right)$$

$$=p_{\theta_{\text{old}}}(x_{i})\left(1 - p_{\theta_{\text{old}}}(x_{i})\right)^{2} \underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\left\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right|_{\theta=\theta_{\text{old}}}\right\|^{2}\right]$$

$$+\left(p_{\theta_{\text{old}}}(x_{i})\right)^{2}\left(1 - p_{\theta_{\text{old}}}(x_{i})\right)_{y \sim \pi_{\theta_{\text{old}}}, r=0}^{\mathbb{E}}\left[\left\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right|_{\theta=\theta_{\text{old}}}\right\|^{2}\right]$$

$$-p_{\theta_{\text{old}}}(x_{i})^{2}\left(1 - p_{\theta_{\text{old}}}(x_{i})\right)^{2}\left\|\underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right] - \underset{y \sim \pi_{\theta_{\text{old}}}, r=0}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right]\right\|^{2}.$$

$$(21)$$

The optimized formula decomposes the variance estimation problem into two categories based on answer correctness, integrating it with the prompt difficulty estimation from Section 4.1. By leveraging algebraic operations on prompt difficulty and policy gradients, it reuses difficulty estimates from sampling and transforms variance estimation into a more tractable form. The theoretical proof is provided in Appendix A.2.

#### 4.3 PROMPT DIFFICULTY ASSESSMENT AND ALGORITHMIC IMPLEMENTATION

Estimating prompt difficulty is crucial for both sampling questions and allocating rollout quantities. However, difficulty changes dynamically during policy training, making accurate estimation challenging. A straightforward approach is to add a pre-evaluation step before each sampling, but this increases computational overhead and fails to leverage new samples for posterior estimation to improve confidence. To address this, we propose a Bayesian inference framework that decomposes rollout into a multi-stage mini-batch process. This refines the posterior estimation of the dataset, dynamically adjusting the sampling distribution based on updated difficulty assessments.

Specifically, as the model  $\pi_{\theta_{\text{old}}}$  rollouts on a prompt  $x_i$  multiple times, the number of correct answers follows a binomial distribution with success probability  $p_{\theta_{\text{old}}}(x_i)$ . We can assume that  $p_{\theta_{\text{old}}}(x_i)$  follows a Beta distribution, the conjugate prior of the binomial distribution, which is a widely adopted technique in Bayesian inference (Kruschke, 2010; Qu et al., 2025):

$$p_{\theta_{\text{old}}}(x_i) \sim \text{Beta}(\alpha_0(x_i), \beta_0(x_i)),$$
 (22)

where  $\alpha_0(x_i)$  and  $\beta_0(x_i)$  can be interpreted as the counts of correct and incorrect answers during sampling, which can be initialized using a small batch of sampled data for cold-start estimation.

Since the Beta distribution is conjugate to the binomial likelihood, the posterior distribution remains Beta-distributed after observing new samples. Let  $\alpha_{t-1}(x_i)$  and  $\beta_{t-1}(x_i)$  denote the cumulative counts of correct and incorrect answers for prompt  $x_i$  up to step t-1. If, at step t, a mini-batch generates  $n_i$  answer with s correct, the posterior distribution for  $p_{\theta_{\text{old}}}(x_i)$  after t steps is:

$$\alpha_t(x_i) = \alpha_{t-1}(x_i) + s, \quad \beta_t(x_i) = \beta_{t-1}(x_i) + n_i - s,$$
 (23)

$$p_{\theta_{\text{old}}}(x_i) \sim \text{Beta}(\alpha_t(x_i), \beta_t(x_i)).$$
 (24)

To reduce randomness, we use the mean of the Beta distribution to estimate prompt difficulty in our experiments.

This estimation approach enables modeling and estimating the difficulty of each prompt with minimal overhead. However, as the model's performance evolves during training, the estimation process is susceptible to distribution shift, which becomes more pronounced with increasing training steps. To mitigate this issue, we adopt a straightforward solution inspired by GVM (Yao et al., 2025). Specifically, we divide the dataset into T non-overlapped subsets and perform iterative training on these subsets. We train the model for a fixed training steps of M in every iteration. The estimations of prompt difficulty and gradient variance are reset when a new iteration begins. This method effectively alleviates distribution shift without introducing significant computational overhead. Moreover, the iterative process enables the model to adaptively adjust its sampling allocation based on its own evolving capabilities throughout training. For further details, please refer to Algorithm 1.

#### 5 EXPERIMENTS

In this section, we present comprehensive experimental results and analysis of our CurES with other baselines. Our experiments focus on the following research questions:

- **RQ1:** Does CurES outperform all baseline methods across various benchmarks?
- **RQ2:** How does CurES adapt its sampling strategy to achieve optimal learning efficiency?
- **RQ3:** Does CurES enhance sampling efficiency compared to other baseline methods?

**Training Details.** We employ VERL (Sheng et al., 2025) as our training framework and initialize our policy using Qwen2.5-Math models (1.5B and 7B parameters). For the training dataset, we utilize Numina-Math (Li et al., 2024), partitioning it into 15 subsets following GVM (Yao et al., 2025). We

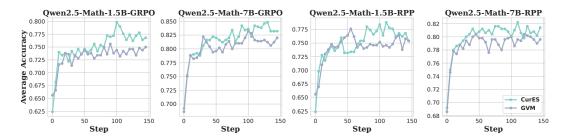


Figure 2: Comparison of learning curves between CurES and GVM across different backbone models and advantage estimators. CurES consistently outperforms GVM under the same number of training steps, demonstrating more efficient utilization of samples.

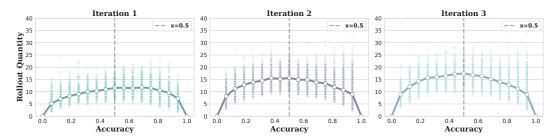


Figure 3: Distribution of rollout quantities with respect to accept rate in CurES at different training iterations. CurES concentrates rollouts on effective prompts whose accuracy are close to 0.5.

conduct iterative training across these subsets, resulting in 15 training iterations. At the beginning of each iteration, we perform 4 rollouts per prompt to establish an initial difficulty distribution and an assignment of rollout quantities under a total sample budget of  $8\times1024$ . During training, we sample prompts according to the difficulty distribution with replacement and conduct rollouts according to the assigned rollout quantities. To make a fair comparison with GVM, we train 10 steps in each iteration. We employ GRPO (Shao et al., 2024) and REINFORCE++ (RPP) (Hu et al., 2025) as advantage estimators for all methods. The learning rate is set to a constant  $1\times10^{-6}$ .

**Evaluation Benchmarks.** To evaluate the complex reasoning capabilities, we choose a broad set of challenging reasoning benchmarks, including MATH500 (Hendrycks et al., 2021), AIME 2024 and 2025 (Li et al., 2024), AMC 2023 (Li et al., 2024), GSM8K (Cobbe et al., 2021), Gaokao-EN 2023 (Zhang et al., 2023), Mineva (Lewkowycz et al., 2022) and OlympiadBench (He et al., 2024). These benchmarks comprehensively evaluate mathematical reasoning capabilities. Since AIME 2024, 2025 and AMC 2023 are highly challenging competition benchmarks, which are of limited sizes of test samples, we present the results averaged over 16 runs.

**Baselines.** To demonstrate the reasoning ability of our CurES, we compare it with many strong baseline methods: GRPO (Shao et al., 2024), RPP (Hu et al., 2025), Speed-RL (Zhang et al., 2025) and GVM (Yao et al., 2025). Specifically, GRPO and RPP are commonly used in training mathematical problem solving models. Speed-RL is an adaptive online RL curriculum that selectively chooses samples of intermediate difficulty to maximize learning efficiency (i.e., samples whose accuracy is not 0 or 1). GVM is a prompt-specific dynamic sample allocation strategy designed to minimize stochastic gradient variance under a computational budget constraint.

#### 5.1 OVERALL PERFORMANCE (RQ1)

We present the learning curve of Qwen2.5-Math-1.5B and 7B models trained with different methods and advantage estimators in Figure 2. Across all configurations, CurES exhibits higher progressive and final accuracy compared to GVM. This advantage originates from two key differences: (i) CurES adaptively allocates prompt sampling probabilities based on estimated success rates, which our theoretical analysis confirms enhances training efficiency; (ii) while GVM monotonically decreases rollout allocation as accept rates rise, CurES allocates more rollout budget to prompts with accuracy near 0.5 in Figure 3, resulting in more consistent training gradients and improved training stability.

Table 1: Quantitative results of different methods across various datasets. The best and second best results are in **bold** and underlined.

Method	Pass@1					Average@16			Avg.
	MATH500	GSM8K	GAO23	MINERVA	OLYM	AIME24	AIME25	AMC23	1115.
Qwen2.5-Math-1.5B	40.20	43.90	25.19	11.40	21.04	1.67	1.67	14.84	20.00
+GRPO	73.80	86.43	48.83	27.94	35.41	8.54	6.67	45.47	41.64
+RPP	64.80	82.94	42.08	21.32	29.19	4.17	3.33	39.06	35.86
+Speed-RL-GRPO	68.80	85.67	47.14	27.40	35.56	12.08	6.88	47.19	41.34
+Speed-RL-RPP	65.80	85.67	48.31	27.94	36.30	12.58	10.08	47.34	41.75
+GVM-GRPO	74.80	84.23	48.83	27.21	35.56	10.21	11.25	50.47	42.82
+GVM-RPP	<u>75.40</u>	84.00	<u>49.61</u>	24.63	35.56	11.46	6.04	50.94	42.21
+CurES-GRPO	77.20	<u>85.97</u>	51.43	31.62	37.33	13.33	10.42	52.19	44.94
+CurES-RPP	<u>75.40</u>	85.82	51.43	<u>28.31</u>	<u>37.04</u>	12.71	11.46	<u>50.94</u>	<u>44.14</u>
Qwen2.5-Math-7B	60.20	72.40	44.68	22.79	30.81	7.92	1.88	27.19	33.48
+GRPO	80.00	91.43	51.43	31.99	38.37	20.00	10.00	57.50	47.59
+RPP	81.20	91.89	<u>55.58</u>	39.71	40.00	18.54	11.67	62.81	50.18
+Speed-RL-GRPO	82.80	88.70	<u>55.58</u>	29.41	42.37	20.21	11.46	60.16	48.84
+Speed-RL-RPP	78.60	91.81	53.77	37.13	<u>42.96</u>	17.29	12.08	62.81	49.56
+GVM-GRPO	81.60	91.28	54.03	32.72	42.67	23.54	<u>15.00</u>	64.31	<u>50.64</u>
+GVM-RPP	81.60	90.07	55.32	29.04	40.30	17.50	8.33	53.44	46.95
+CurES-GRPO	84.80	92.27	56.62	<u>37.87</u>	43.56	24.58	15.21	64.38	52.41
+CurES-RPP	<u>81.80</u>	<u>91.89</u>	54.55	33.09	40.59	23.33	12.92	58.75	49.62

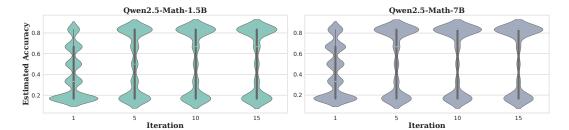


Figure 4: The evolution of the estimated accuracy distributions for the Qwen2.5-Math-1.5B (left) and 7B (right) models across 15 iterations. Each violin shows the distribution of accuracy across samples: the width reflects density, the central line marks the median.

To demonstrate the effectiveness of our CurES, we compare it with representative baselines that are trained for the same number of steps. The main results are demonstrated in Table 1. The results clearly demonstrate that CurES consistently outperforms GVM and other baselines with both GRPO and RPP as advantage estimators. Across both model scales, CurES establishes state-of-theart results on several datasets and consistently matches or surpasses the strongest baselines across all settings, confirming the superior generalization ability of our CurES.

#### 5.2 Sampling Behavior (RQ2)

Figure 4 illustrates the evolution of the difficulty distribution for both the Qwen2.5-Math-1.5B and 7B models throughout the training process. At iteration 1, the estimated accuracy are broadly distributed. Subsequently, as the training procedure continues, the distribution of estimated accuracy shifts and becomes more concentrated around higher values. This shift demonstrates that the models are effectively learning and mastering the samples presented to them. Meanwhile, another view of how the CurES method dynamically adjusts the rollout quantities assignment during training is presented in Figure 3. The trend lines of all iterations reveals a "bell-shaped" distribution centered around an accuracy of 0.5, which is expected since these samples are of high efficiency.

A notable phenomenon during training is that as the model becomes stronger, the number of samples with an accuracy near 0.5 gradually decreases, and the "bell-shaped" distribution becomes sharper and narrower. This indicates that CurES dynamically increases the assigned rollout quantities for prompts with accuracy around 0.5, effectively compensating for their diminishing presence in the dataset and ensuring they remain a substantial portion of each training batch. By coupling difficulty-

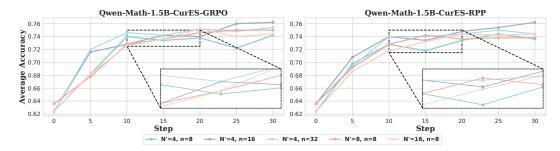


Figure 5: Performance convergence of CurES on MATH500 with different sampling configurations.

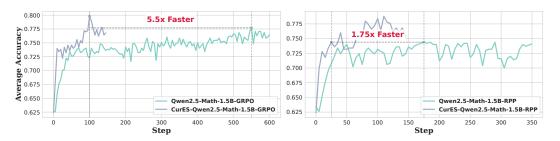


Figure 6: Efficiency comparison of CurES against baselines on MATH500. The gray dashed lines mark the number of steps CurES and each baseline required to reach the baselines' highest average accuracy within the total training duration.

based prompt sampling with the adaptive sample sizing, CurES sustains an abundance of informative prompts and thereby maximizes performance gains per step.

#### 5.3 EFFICIENCY ANALYSIS (RQ3)

To analyze the effect of different combinations of pre-sampling scale (N) and training-phase sample budgets coefficient (n), indicating a training-phase sample budget of  $n \times m$  on the convergence of model performance under, we conduct a series of experiments, as shown in Figure 5. A larger N leads to a more accurate initial accuracy estimation, while a larger n provides a greater computation budget. The results show that increasing either N or n does not yield a proportional performance benefit relative to the increased computational cost. This finding confirms that the core mechanism of CurES efficiently guides the model toward high-yield learning samples without the need for extensive computational overhead, demonstrating its high sample efficiency.

We also provide a direct comparison of CurES against GRPO and RPP, in Figure 6. The plots show the learning curve of each method over training steps. CurES-GRPO achieves the same peak performance as the GRPO in just  $5.5 \times$  fewer steps. Similarly, CurES-RPP reaches its peak performance 1.75x faster than the RPP baseline. The remarkable sample efficiency is a direct consequence of CurES's ability to consistently provide the model with optimally challenging samples.

#### 6 Conclusion

In this paper, we propose CurES, a theoretically grounded curriculum learning algorithm for RLVR. By linking gradient efficiency to accuracy, our approach adaptively prioritizes training prompts of optimal difficulty and dynamically allocates rollout budgets. Beyond the theoretical analysis, our algorithmic design leverages a Bayesian framework to track prompt difficulty in a lightweight yet adaptive manner. Specifically, we model the success rate of each prompt instance with a Beta distribution, which naturally incorporates prior information and posterior updates as new rollouts are observed. Combined with the derived sampling distribution and variance-based rollout quantity allocation, this Bayesian mechanism ensures that both question selection and sample budgeting adapt dynamically to the evolving policy, thereby maximizing training efficiency in practice. Experiments on a wide range of mathematical reasoning benchmarks show that CurES consistently outperforms strong baselines in both accuracy and convergence speed, demonstrating superior sample efficiency.

#### REPRODUCIBILITY STATEMENT

The experimental setup is outlined in Section 5. Comprehensive details regarding the benchmarks, data generation process, baseline models, and all hyperparameters are provided to facilitate the reproducibility of our results. We also release the code and data, which are available at: https://anonymous.4open.science/r/CurES-2652.

### REFERENCES

- Sanghwan Bae, Jiwoo Hong, Min Young Lee, Hanbyul Kim, JeongYeon Nam, and Donghyun Kwak. Online difficulty filtering for reasoning oriented reinforcement learning. *arXiv* preprint *arXiv*:2504.03380, 2025.
- Léon Bottou, Frank E Curtis, and Jorge Nocedal. Optimization methods for large-scale machine learning. *SIAM review*, 60(2):223–311, 2018.
- Paul F Christiano, Jan Leike, Tom Brown, Miljan Martic, Shane Legg, and Dario Amodei. Deep reinforcement learning from human preferences. *Advances in neural information processing systems*, 30, 2017.
- Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, et al. Training verifiers to solve math word problems. *CoRR*, abs/2110.14168, 2021. URL https://arxiv.org/abs/2110.14168.
- Daya Guo, Dejian Yang, Haowei Zhang, Junxiao Song, Ruoyu Zhang, Runxin Xu, Qihao Zhu, Shirong Ma, Peiyi Wang, Xiao Bi, et al. Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning. *arXiv preprint arXiv:2501.12948*, 2025.
- Chaoqun He, Renjie Luo, Yuzhuo Bai, Shengding Hu, Zhen Leng Thai, Junhao Shen, Jinyi Hu, Xu Han, Yujie Huang, Yuxiang Zhang, et al. Olympiadbench: A challenging benchmark for promoting agi with olympiad-level bilingual multimodal scientific problems. *arXiv preprint arXiv:2402.14008*, 2024.
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv* preprint arXiv:2103.03874, 2021.
- Jian Hu. Reinforce++: A simple and efficient approach for aligning large language models. *arXiv* preprint arXiv:2501.03262, 2025.
- Jian Hu, Jason Klein Liu, Haotian Xu, and Wei Shen. Reinforce++: An efficient rlhf algorithm with robustness to both prompt and reward models, 2025. URL https://arxiv.org/abs/2501.03262.
- John K Kruschke. Bayesian data analysis. *Wiley Interdisciplinary Reviews: Cognitive Science*, 1(5): 658–676, 2010.
- Nathan Lambert, Jacob Morrison, Valentina Pyatkin, Shengyi Huang, Hamish Ivison, Faeze Brahman, Lester James V Miranda, Alisa Liu, Nouha Dziri, Shane Lyu, et al. T\" ulu 3: Pushing frontiers in open language model post-training. arXiv preprint arXiv:2411.15124, 2024.
- Aitor Lewkowycz, Anders Andreassen, David Dohan, Ethan Dyer, Henryk Michalewski, Vinay Ramasesh, Ambrose Slone, Cem Anil, Imanol Schlag, Theo Gutman-Solo, et al. Solving quantitative reasoning problems with language models. *Advances in Neural Information Processing Systems*, 35:3843–3857, 2022.
- Jia Li, Edward Beeching, Lewis Tunstall, Ben Lipkin, Roman Soletskyi, Shengyi Huang, Kashif Rasul, Longhui Yu, Albert Q Jiang, Ziju Shen, et al. Numinamath: The largest public dataset in ai4maths with 860k pairs of competition math problems and solutions. *Hugging Face repository*, 13:9, 2024.
- Zhihang Lin, Mingbao Lin, Yuan Xie, and Rongrong Ji. Cppo: Accelerating the training of group relative policy optimization-based reasoning models. *arXiv preprint arXiv:2503.22342*, 2025.

541

542

543

544

546

547

548

549

550

551

552

553

554

558

559

561

562

563

565

566

567

568

569

570

571

572

573

574

575

576

577

578

579

580

581

582

583 584

585

586

588

590

592

Michael Luo, Sijun Tan, Justin Wong, Xiaoxiang Shi, William Y Tang, Manan Roongta, Colin Cai, Jeffrey Luo, Tianjun Zhang, Li Erran Li, et al. Deepscaler: Surpassing o1-preview with a 1.5 b model by scaling rl. *Notion Blog*, 2025.

OpenAI, :, Aaron Jaech, Adam Kalai, Adam Lerer, Adam Richardson, Ahmed El-Kishky, Aiden Low, Alec Helyar, Aleksander Madry, Alex Beutel, Alex Carney, Alex Iftimie, Alex Karpenko, Alex Tachard Passos, Alexander Neitz, Alexander Prokofiev, Alexander Wei, Allison Tam, Ally Bennett, Ananya Kumar, Andre Saraiva, Andrea Vallone, Andrew Duberstein, Andrew Kondrich, Andrey Mishchenko, Andy Applebaum, Angela Jiang, Ashvin Nair, Barret Zoph, Behrooz Ghorbani, Ben Rossen, Benjamin Sokolowsky, Boaz Barak, Bob McGrew, Borys Minaiev, Botao Hao, Bowen Baker, Brandon Houghton, Brandon McKinzie, Brydon Eastman, Camillo Lugaresi, Cary Bassin, Cary Hudson, Chak Ming Li, Charles de Bourcy, Chelsea Voss, Chen Shen, Chong Zhang, Chris Koch, Chris Orsinger, Christopher Hesse, Claudia Fischer, Clive Chan, Dan Roberts, Daniel Kappler, Daniel Levy, Daniel Selsam, David Dohan, David Farhi, David Mely, David Robinson, Dimitris Tsipras, Doug Li, Dragos Oprica, Eben Freeman, Eddie Zhang, Edmund Wong, Elizabeth Proehl, Enoch Cheung, Eric Mitchell, Eric Wallace, Erik Ritter, Evan Mays, Fan Wang, Felipe Petroski Such, Filippo Raso, Florencia Leoni, Foivos Tsimpourlas, Francis Song, Fred von Lohmann, Freddie Sulit, Geoff Salmon, Giambattista Parascandolo, Gildas Chabot, Grace Zhao, Greg Brockman, Guillaume Leclerc, Hadi Salman, Haiming Bao, Hao Sheng, Hart Andrin, Hessam Bagherinezhad, Hongyu Ren, Hunter Lightman, Hyung Won Chung, Ian Kivlichan, Ian O'Connell, Ian Osband, Ignasi Clavera Gilaberte, Ilge Akkaya, Ilya Kostrikov, Ilya Sutskever, Irina Kofman, Jakub Pachocki, James Lennon, Jason Wei, Jean Harb, Jerry Twore, Jiacheng Feng, Jiahui Yu, Jiayi Weng, Jie Tang, Jieqi Yu, Joaquin Quiñonero Candela, Joe Palermo, Joel Parish, Johannes Heidecke, John Hallman, John Rizzo, Jonathan Gordon, Jonathan Uesato, Jonathan Ward, Joost Huizinga, Julie Wang, Kai Chen, Kai Xiao, Karan Singhal, Karina Nguyen, Karl Cobbe, Katy Shi, Kayla Wood, Kendra Rimbach, Keren Gu-Lemberg, Kevin Liu, Kevin Lu, Kevin Stone, Kevin Yu, Lama Ahmad, Lauren Yang, Leo Liu, Leon Maksin, Leyton Ho, Liam Fedus, Lilian Weng, Linden Li, Lindsay McCallum, Lindsey Held, Lorenz Kuhn, Lukas Kondraciuk, Lukasz Kaiser, Luke Metz, Madelaine Boyd, Maja Trebacz, Manas Joglekar, Mark Chen, Marko Tintor, Mason Meyer, Matt Jones, Matt Kaufer, Max Schwarzer, Meghan Shah, Mehmet Yatbaz, Melody Y. Guan, Mengyuan Xu, Mengyuan Yan, Mia Glaese, Mianna Chen, Michael Lampe, Michael Malek, Michele Wang, Michelle Fradin, Mike McClay, Mikhail Pavlov, Miles Wang, Mingxuan Wang, Mira Murati, Mo Bavarian, Mostafa Rohaninejad, Nat McAleese, Neil Chowdhury, Neil Chowdhury, Nick Ryder, Nikolas Tezak, Noam Brown, Ofir Nachum, Oleg Boiko, Oleg Murk, Olivia Watkins, Patrick Chao, Paul Ashbourne, Pavel Izmailov, Peter Zhokhov, Rachel Dias, Rahul Arora, Randall Lin, Rapha Gontijo Lopes, Raz Gaon, Reah Miyara, Reimar Leike, Renny Hwang, Rhythm Garg, Robin Brown, Roshan James, Rui Shu, Ryan Cheu, Ryan Greene, Saachi Jain, Sam Altman, Sam Toizer, Sam Toyer, Samuel Miserendino, Sandhini Agarwal, Santiago Hernandez, Sasha Baker, Scott McKinney, Scottie Yan, Shengjia Zhao, Shengli Hu, Shibani Santurkar, Shraman Ray Chaudhuri, Shuyuan Zhang, Siyuan Fu, Spencer Papay, Steph Lin, Suchir Balaji, Suvansh Sanjeev, Szymon Sidor, Tal Broda, Aidan Clark, Tao Wang, Taylor Gordon, Ted Sanders, Tejal Patwardhan, Thibault Sottiaux, Thomas Degry, Thomas Dimson, Tianhao Zheng, Timur Garipov, Tom Stasi, Trapit Bansal, Trevor Creech, Troy Peterson, Tyna Eloundou, Valerie Qi, Vineet Kosaraju, Vinnie Monaco, Vitchyr Pong, Vlad Fomenko, Weiyi Zheng, Wenda Zhou, Wes McCabe, Wojciech Zaremba, Yann Dubois, Yinghai Lu, Yining Chen, Young Cha, Yu Bai, Yuchen He, Yuchen Zhang, Yunyun Wang, Zheng Shao, and Zhuohan Li. Openai o1 system card, 2024. URL https://arxiv.org/abs/2412.16720.

Long Ouyang, Jeffrey Wu, Xu Jiang, Diogo Almeida, Carroll Wainwright, Pamela Mishkin, Chong Zhang, Sandhini Agarwal, Katarina Slama, Alex Ray, et al. Training language models to follow instructions with human feedback. *Advances in Neural Information Processing Systems*, 35: 27730–27744, 2022.

Matteo Papini, Damiano Binaghi, Giuseppe Canonaco, Matteo Pirotta, and Marcello Restelli. Stochastic variance-reduced policy gradient. In *International conference on machine learning*, pp. 4026–4035. PMLR, 2018.

Yun Qu, Qi Wang, Yixiu Mao, Vincent Tao Hu, Björn Ommer, and Xiangyang Ji. Can prompt difficulty be online predicted for accelerating rl finetuning of reasoning models? arXiv preprint arXiv:2507.04632, 2025.

- John Schulman, Filip Wolski, Prafulla Dhariwal, Alec Radford, and Oleg Klimov. Proximal policy optimization algorithms. *arXiv preprint arXiv:1707.06347*, 2017.
  - Zhihong Shao, Peiyi Wang, Qihao Zhu, Runxin Xu, Junxiao Song, Xiao Bi, Haowei Zhang, Mingchuan Zhang, YK Li, Y Wu, et al. Deepseekmath: Pushing the limits of mathematical reasoning in open language models. *arXiv preprint arXiv:2402.03300*, 2024.
  - Guangming Sheng, Chi Zhang, Zilingfeng Ye, Xibin Wu, Wang Zhang, Ru Zhang, Yanghua Peng, Haibin Lin, and Chuan Wu. Hybridflow: A flexible and efficient RLHF framework. In *Proceedings of the Twentieth European Conference on Computer Systems, EuroSys* 2025, Rotterdam, The Netherlands, 30 March 2025 3 April 2025, pp. 1279–1297. ACM, 2025.
  - Taiwei Shi, Yiyang Wu, Linxin Song, Tianyi Zhou, and Jieyu Zhao. Efficient reinforcement finetuning via adaptive curriculum learning. *arXiv preprint arXiv:2504.05520*, 2025.
  - Mingyang Song, Mao Zheng, Zheng Li, Wenjie Yang, Xuan Luo, Yue Pan, and Feng Zhang. Fastcurl: Curriculum reinforcement learning with stage-wise context scaling for efficient training r1-like reasoning models. *arXiv preprint arXiv:2503.17287*, 2025.
  - Kimi Team, Angang Du, Bofei Gao, Bowei Xing, Changjiu Jiang, Cheng Chen, Cheng Li, Chenjun Xiao, Chenzhuang Du, Chonghua Liao, et al. Kimi k1. 5: Scaling reinforcement learning with llms. *arXiv preprint arXiv:2501.12599*, 2025.
  - Chong Wang, Xi Chen, Alexander J Smola, and Eric P Xing. Variance reduction for stochastic gradient optimization. *Advances in neural information processing systems*, 26, 2013.
  - Tian Xie, Zitian Gao, Qingnan Ren, Haoming Luo, Yuqian Hong, Bryan Dai, Joey Zhou, Kai Qiu, Zhirong Wu, and Chong Luo. Logic-rl: Unleashing llm reasoning with rule-based reinforcement learning. *arXiv preprint arXiv:2502.14768*, 2025.
  - Jiarui Yao, Yifan Hao, Hanning Zhang, Hanze Dong, Wei Xiong, Nan Jiang, and Tong Zhang. Optimizing chain-of-thought reasoners via gradient variance minimization in rejection sampling and RL. *CoRR*, abs/2505.02391, 2025. doi: 10.48550/ARXIV.2505.02391. URL https://doi.org/10.48550/arXiv.2505.02391.
  - Qiying Yu, Zheng Zhang, Ruofei Zhu, Yufeng Yuan, Xiaochen Zuo, Yu Yue, Tiantian Fan, Gaohong Liu, Lingjun Liu, Xin Liu, et al. Dapo: An open-source llm reinforcement learning system at scale. *arXiv preprint arXiv:2503.14476*, 2025.
  - Weihao Zeng, Yuzhen Huang, Qian Liu, Wei Liu, Keqing He, Zejun Ma, and Junxian He. Simplerlzoo: Investigating and taming zero reinforcement learning for open base models in the wild. *arXiv* preprint arXiv:2503.18892, 2025.
  - Ruiqi Zhang, Daman Arora, Song Mei, and Andrea Zanette. SPEED-RL: faster training of reasoning models via online curriculum learning. *CoRR*, abs/2506.09016, 2025. doi: 10.48550/ARXIV. 2506.09016. URL https://doi.org/10.48550/arXiv.2506.09016.
  - Xiaotian Zhang, Chunyang Li, Yi Zong, Zhengyu Ying, Liang He, and Xipeng Qiu. Evaluating the performance of large language models on GAOKAO benchmark. *CoRR*, abs/2305.12474, 2023. doi: 10.48550/ARXIV.2305.12474. URL https://doi.org/10.48550/arXiv.2305.12474.

#### A MATHEMATICAL DERIVATIONS

 **Lemma 1 (Cramér-Rao Inequality)** Let  $\{p_{\theta}(x), \theta \in \Theta\}$  be a Cramér-Rao regular family with parameter space  $\Theta \subset \mathbb{R}^k$ , where the Fisher information matrix  $I(\theta)$  is non-singular. Let  $g(\theta) = (g_1(\theta), \cdots, g_s(\theta))^{\top}$  for  $s \leq k$ , and assume the partial derivatives  $\partial g_i(\theta)/\partial \theta_j$  exist for all  $i = 1, \cdots, s$  and  $j = 1, \cdots, k$ . Suppose T(X) is an unbiased estimator of  $g(\theta)$  with finite second moment. Denote  $G(\theta) = \nabla_{\theta} g(\theta)$ , then we have

$$\mathbb{V}_{\theta}(T(X)) \ge G(\theta)I^{-1}(\theta)G^{\top}(\theta). \tag{25}$$

#### A.1 PROMPT DIFFICULTY CAPS OPTIMIZATION POTENTIAL

Given an individual sample x, we first consider the optimization problem as follows:

$$\min \mathcal{L}(x; \theta) = \min -\mathbb{E}_{y \sim \pi_{\theta}(\cdot|x)} [A_{\theta_{\text{old}}}(x, y)],$$
s.t.  $D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) || \pi_{\theta}(\cdot|x)) \le \delta$  (26)

We define  $\theta=\theta_{\rm old}+d$  and rewrite this constrained optimization problem via the Lagrange multiplier method:

$$d^* = \operatorname*{argmin}_{d} \mathcal{L}(x; \theta_{\text{old}} + d) + \lambda (D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) || \pi_{\theta_{\text{old}} + d}(\cdot|x)) - \delta). \tag{27}$$

Using the Taylor expansion formula, we have:

$$d^* = \underset{d}{\operatorname{argmin}} \mathcal{L}(x; \theta_{\text{old}} + d) + \lambda (D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) \| \pi_{\theta_{\text{old}} + d}(\cdot|x)) - \delta)$$

$$= \underset{d}{\operatorname{argmin}} \mathcal{L}(x; \theta_{\text{old}}) - \lambda \delta$$

$$+ \left( \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} d + \lambda \nabla_{\theta} D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) \| \pi_{\theta}(\cdot|x)) d + \frac{\lambda}{2} d^{\top} \nabla_{\theta}^{2} D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x) \| \pi_{\theta}(\cdot|x)) d \right) \Big|_{\theta = \theta_{\text{old}}}.$$
(28)

We first compute the first-order and second-order derivatives of the KL divergence term:

$$\begin{aligned}
&\nabla_{\theta} D_{\mathrm{KL}}(\pi_{\theta_{\mathrm{old}}}(\cdot|x)||\pi_{\theta}(\cdot|x))\big|_{\theta=\theta_{\mathrm{old}}} \\
&=\nabla_{\theta} \mathbb{E}_{y \sim \pi_{\theta_{\mathrm{old}}}} \left[\log \pi_{\theta_{\mathrm{old}}}(y|x)\right]\big|_{\theta=\theta_{\mathrm{old}}} - \nabla_{\theta} \mathbb{E}_{y \sim \pi_{\theta_{\mathrm{old}}}} \left[\log \pi_{\theta}(y|x)\right]\big|_{\theta=\theta_{\mathrm{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\mathrm{old}}}} \left[\nabla_{\theta} \log \pi_{\theta}(y|x)\right]\big|_{\theta=\theta_{\mathrm{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\mathrm{old}}}} \left[\frac{\nabla_{\theta} \pi_{\theta}(y|x)}{\pi_{\theta}(y|x)}\right]\big|_{\theta=\theta_{\mathrm{old}}} \\
&= \sum_{y} \nabla_{\theta} \pi_{\theta}(y|x)\big|_{\theta=\theta_{\mathrm{old}}} \\
&= \nabla_{\theta} \sum_{y} \pi_{\theta}(y|x)\big|_{\theta=\theta_{\mathrm{old}}} \\
&= 0.
\end{aligned} \tag{29}$$

$$\begin{aligned}
\nabla_{\theta}^{2} D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x)) \| \pi_{\theta}(\cdot|x)) \|_{\theta=\theta_{\text{old}}} \\
&= -\nabla_{\theta}^{2} \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \log \pi_{\theta}(y|x) \right] |_{\theta=\theta_{\text{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \nabla_{\theta}^{2} \log \pi_{\theta}(y|x) \right] |_{\theta=\theta_{\text{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \nabla_{\theta} \left( \frac{\nabla_{\theta} \pi_{\theta}(y|x)}{\pi_{\theta}(y|x)} \right) \right] |_{\theta=\theta_{\text{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \frac{(\nabla_{\theta}^{2} \pi_{\theta}(y|x)) \pi_{\theta}(y|x) - \nabla_{\theta} \pi_{\theta}(y|x)) \nabla_{\theta}^{\top} \pi_{\theta}(y|x)}{\pi_{\theta}^{2}(y|x)} \right] |_{\theta=\theta_{\text{old}}} \\
&= -\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \frac{(\nabla_{\theta}^{2} \pi_{\theta}(y|x)) |_{\theta=\theta_{\text{old}}}}{\pi_{\theta_{\text{old}}}(y|x)} \right] + \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \left( \frac{\nabla_{\theta} \pi_{\theta}(y|x)}{\pi_{\theta}(y|x)} \right) \left( \frac{\nabla_{\theta} \pi_{\theta}(y|x)}{\pi_{\theta}(y|x)} \right)^{\top} \right] |_{\theta=\theta_{\text{old}}} \\
&= \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \nabla_{\theta} \log \pi_{\theta}(y|x) \nabla_{\theta} \log \pi_{\theta}(y|x)^{\top} \right] |_{\theta=\theta_{\text{old}}} \\
&= \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ \nabla_{\theta} \log \pi_{\theta}(y|x) \nabla_{\theta} \log \pi_{\theta}(y|x)^{\top} \right] |_{\theta=\theta_{\text{old}}} \\
&= F(x; \theta_{\text{old}}).
\end{aligned}$$

where  $F(x;\theta) = \mathbb{E}_{y \sim \pi_{\theta}} \left[ \nabla_{\theta} \log \pi_{\theta}(y|x) \nabla_{\theta} \log \pi_{\theta}(y|x)^{\top} \right]$  is termed the Fisher information matrix. Therefore,

$$d^* = \operatorname*{argmin}_{d} \mathcal{L}(x; \theta_{\text{old}}) + \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \Big|_{\theta = \theta_{\text{old}}} d + \frac{\lambda}{2} d^{\top} F(x; \theta_{\text{old}}) d - \lambda \delta. \tag{31}$$

To find the minimum, we take the derivative of the right-hand side and set it to zero:

$$\nabla_{\theta} \mathcal{L}(x;\theta) \Big|_{\theta = \theta_{\text{old}}} + \lambda F(x;\theta_{\text{old}}) d = 0.$$
(32)

So we have

$$d = -\frac{1}{\lambda} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \Big|_{\theta = \theta_{\text{old}}}.$$
 (33)

We now derive the critical point of the constraint condition:

$$\frac{1}{2}d^{\top}F(x;\theta_{\text{old}})d \approx D_{\text{KL}}(\pi_{\theta_{\text{old}}}(\cdot|x)||\pi_{\theta_{\text{old}}+d}(\cdot|x)) = \delta.$$
(34)

By simplifying, we obtain

$$\frac{1}{2} \left( \frac{1}{\lambda^2} \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \Big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \Big|_{\theta = \theta_{\text{old}}} \right) = \delta.$$
 (35)

Therefore, we have obtained the critical value of  $\lambda$ :

$$\lambda = \sqrt{\frac{\nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \big|_{\theta = \theta_{\text{old}}}}{2\delta}}.$$
(36)

In this case, the change of the loss function is computed as

$$\mathcal{L}(x; \theta_{\text{old}} + d) - \mathcal{L}(x; \theta_{\text{old}}) = \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \big|_{\theta = \theta_{\text{old}}} d$$

$$= -\frac{1}{\lambda} \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \big|_{\theta = \theta_{\text{old}}}$$

$$= -\sqrt{2\delta \nabla_{\theta} \mathcal{L}(x; \theta)^{\top} \big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \big|_{\theta = \theta_{\text{old}}}}$$
(37)

Furthermore,

$$\nabla_{\theta} \mathcal{L}(x;\theta)|_{\theta=\theta_{\text{old}}} = \nabla_{\theta} - \mathbb{E}_{y \sim \pi_{\theta}(\cdot|x)} \left[ A_{\theta_{\text{old}}}(x,y) \right] \Big|_{\theta=\theta_{\text{old}}}$$

$$= -\sum_{y} \left[ \nabla_{\theta} \pi_{\theta}(y|x) \left( r(x,y) - \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}} \left[ r(x,y) \right] \right) \right] \Big|_{\theta=\theta_{\text{old}}}$$

$$= -\sum_{y} \left[ \nabla_{\theta} \pi_{\theta}(y|x) \left( r(x,y) \right) \right] \Big|_{\theta=\theta_{\text{old}}}$$

$$= -\nabla_{\theta} \mathbb{E}_{y \sim \pi_{\theta}} \left[ r(x,y) \right] \Big|_{\theta=\theta_{\text{old}}}$$

$$= -\nabla_{\theta} p_{\theta}(x) \Big|_{\theta=\theta_{\text{old}}},$$
(38)

where  $p_{\theta}(x)$  is the model's question-answering accuracy.

Consider that r(x, y) is an unbiased estimator of  $p_{\theta}(x)$ , according to the Cramér-Rao inequality, we obtain:

$$|\left(\mathcal{L}(\theta_{\text{old}} + d) - \mathcal{L}(\theta_{\text{old}})\right)| = |\mathbb{E}_{x \sim \rho} \left[\mathcal{L}(x; \theta_{\text{old}} + d) - \mathcal{L}(x; \theta_{\text{old}})\right]|$$

$$\leq \mathbb{E}_{x \sim \rho} \left[\left|\left(\mathcal{L}(x; \theta_{\text{old}} + d) - \mathcal{L}(x; \theta_{\text{old}})\right)\right|\right]$$

$$= \mathbb{E}_{x \sim \rho} \left[\sqrt{2\delta \nabla_{\theta} \mathcal{L}(x; \theta)^{\top}}\Big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta)\Big|_{\theta = \theta_{\text{old}}}\right]$$

$$\leq \mathbb{E}_{x \sim \rho} \left[\sqrt{2\delta V_{\theta_{\text{old}}}(r(x, y))}\right]$$

$$= \mathbb{E}_{x \sim \rho} \left[\sqrt{2\delta p_{\theta_{\text{old}}}(x) \left(1 - p_{\theta_{\text{old}}}(x)\right)}\right]$$
(39)

This indicates that the optimization potential of the loss function is inherently related to the difficulty of the prompt itself. To balance the trade-off between exploration and exploitation, we derive the optimal sampling distribution by solving the following objective function under the maximum entropy constraint with the hyperparameter  $\alpha$ :

$$\max \mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta p_{\theta_{\text{old}}}(x) \left( 1 - p_{\theta_{\text{old}}}(x) \right)} + \alpha \mathcal{H}(\rho) \right],$$

$$\text{s.t. } \sum_{i=1}^{N} \rho(x_i) = 1, \quad \rho(x_i) \ge 0$$

$$(40)$$

To find the optimal distribution  $\rho$ , we employ the method of Lagrange multipliers. The objective function becomes:

$$\max \mathcal{J} = \max \sum_{j=1}^{N} \rho(x_j) \sqrt{2\delta p_{\theta_{\text{old}}}(x_j) (1 - p_{\theta_{\text{old}}}(x_j))} - \alpha \sum_{j=1}^{N} \rho(x_j) \log \rho(x_j) + \mu \left(1 - \sum_{j=1}^{N} \rho(x_j)\right),$$
(41)

where  $\mu$  is the Lagrange multiplier associated with the normalization constraint.

Taking the partial derivative of  $\mathcal{J}$  with respect to  $\rho(x_i)$ :

$$\frac{\partial \mathcal{J}}{\partial \rho(x_j)} = \sqrt{2\delta p_{\theta_{\text{old}}}(x_j) \left(1 - p_{\theta_{\text{old}}}(x_j)\right)} - \alpha(\log \rho(x_j) + 1) - \mu. \tag{42}$$

Then set the derivative to zero:

$$\sqrt{2\delta p_{\theta_{\text{old}}}(x_j)\left(1 - p_{\theta_{\text{old}}}(x_j)\right)} - \alpha(\log \rho(x_j) + 1) - \mu = 0. \tag{43}$$

Solving for  $\log \rho(x_j)$ :

$$\log \rho(x_j) = \frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x_j) \left(1 - p_{\theta_{\text{old}}}(x_j)\right)}}{\alpha} - 1 - \frac{\mu}{\alpha}.$$
 (44)

So we have:

$$\rho(x_j) = \exp\left(\frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x_j)(1 - p_{\theta_{\text{old}}}(x_j))}}{\alpha} - 1 - \frac{\mu}{\alpha}\right). \tag{45}$$

Let  $c = \exp\left(-1 - \frac{\lambda}{\alpha}\right)$ , then Eq. (45) becomes

$$\rho(x_j) = c \exp\left(\frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x_j) \left(1 - p_{\theta_{\text{old}}}(x_j)\right)}}{\alpha}\right). \tag{46}$$

Using the constraint  $\sum_{j=1}^{N} \rho(x_j) = 1$ , we can obtain

$$c = \frac{1}{\sum_{j=1}^{N} \exp\left(\frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x_j)(1 - p_{\theta_{\text{old}}}(x_j))}}{\alpha}\right)}.$$
(47)

So the optimal distribution is

$$\rho^{*}(x) = \frac{\exp\left(\frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x)(1-p_{\theta_{\text{old}}}(x))}}{\alpha}\right)}{\sum_{x'} \exp\left(\frac{\sqrt{2\delta p_{\theta_{\text{old}}}(x')(1-p_{\theta_{\text{old}}}(x'))}}{\alpha}\right)}.$$
(48)

With the substitution  $\tau = \frac{\alpha}{\sqrt{2\delta}}$ , the distribution finally becomes:

$$\rho^*(x) = \frac{\exp\left(\sqrt{p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}/\tau\right)}{\sum_{x'} \exp\left(\sqrt{p_{\theta_{\text{old}}}(x')\left(1 - p_{\theta_{\text{old}}}(x')\right)}/\tau\right)}.$$
(49)

#### A.2 CLOSING THE GAP WITH THEORETICAL BOUND

In the previous proof, we established a lower bound for single-step gradient descent within a  $\delta$ -local trust region constrained by KL divergence, i.e.,

$$\mathcal{L}(\theta_{\text{old}} + d) - \mathcal{L}(\theta_{\text{old}}) = \mathbb{E}_{x \sim \rho} \left[ \mathcal{L}(x; \theta_{\text{old}} + d) - \mathcal{L}(x; \theta_{\text{old}}) \right]$$

$$= \mathbb{E}_{x \sim \rho} \left[ -\sqrt{2\delta \nabla_{\theta} \mathcal{L}(x; \theta)^{\top}} \Big|_{\theta = \theta_{\text{old}}} F^{-1}(x; \theta_{\text{old}}) \nabla_{\theta} \mathcal{L}(x; \theta) \Big|_{\theta = \theta_{\text{old}}} \right]$$

$$\geq -\mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta \nabla_{\theta_{\text{old}}}(r(x, y))} \right]$$

$$= -\mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta p_{\theta_{\text{old}}}(x) (1 - p_{\theta_{\text{old}}}(x))} \right]$$
(50)

However, due to the high computational cost of the natural gradient method, it is often avoided in practice, and the theoretical result is instead used to guide prompt sampling. During actual gradient updates, we aim to closely approximate the theoretical efficiency limit within a trust region bounded by a KL divergence constraint of  $\delta$ . Specifically, after sampling a batch of m prompts, we seek to optimize operations to approach the bound. Within the curriculum learning framework, we consider optimizing the allocation of rollouts across prompts under a fixed total rollout budget of N to minimize the following loss function:

$$\min \mathbb{E}\left[\left(\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta_{\text{old}}) - \left(-\mathbb{E}_{x \sim \rho}\left[\sqrt{2\delta p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}\right]\right)\right)^{2}\right], \quad \text{s.t. } \sum_{i=1}^{m} n_{i} = N.$$
 (51)

Here,  $\hat{\theta}$  denotes the updated model parameters obtained from  $\theta_{\text{old}}$  after applying the practical gradient update, i.e.:

$$\hat{\theta} = \theta_{\text{old}} - \eta \nabla_{\theta} \hat{\mathcal{L}}(\theta) \big|_{\theta = \theta_{\text{old}}}, \quad \hat{\mathcal{L}}(\theta) = -\sum_{i=1}^{m} \frac{1}{n_i} \sum_{y_i \in \mathcal{D}_i} \left[ \frac{\pi_{\theta}(y_j | x_i)}{\pi_{\theta_{\text{old}}}(y_j | x_i)} A_{\theta_{\text{old}}} \right]. \tag{52}$$

Where  $\eta$  is the learning rate and  $n_i$  denotes the number of sampled rollouts for question  $x_i$ . We assume that  $\eta$  is chosen such that the policy update remains within a KL divergence constraint of  $\delta$ .

In fact,  $\hat{\mathcal{L}}(\theta)$  is an unbiased estimator of  $\mathcal{L}(\theta)$ , that is:

$$\mathbb{E}\left[\hat{\mathcal{L}}(\theta)\right] \\
= \mathbb{E}\left[-\frac{1}{m}\sum_{i=1}^{m}\frac{1}{n_{i}}\sum_{y_{j}\in\mathcal{D}_{i}}\left[\frac{\pi_{\theta}(y_{j}|x_{i})}{\pi_{\theta_{\text{old}}}(y_{j}|x_{i})}A_{\theta_{\text{old}}}(x_{i},y_{j})\right]\right] \\
= -\frac{1}{m}\sum_{i=1}^{m}\frac{1}{n_{i}}\sum_{y_{j}\in\mathcal{D}_{i}}\mathbb{E}_{x_{i}\sim\rho,y_{j}\sim\pi_{\theta_{\text{old}}}(\cdot|x_{i})}\left[\frac{\pi_{\theta}(y_{j}|x_{i})}{\pi_{\theta_{\text{old}}}(y_{j}|x_{i})}A_{\theta_{\text{old}}}(x_{i},y_{j})\right] \\
= -\frac{1}{m}\sum_{i=1}^{m}\mathbb{E}_{x_{i}\sim\rho,y\sim\pi_{\theta_{\text{old}}}(\cdot|x_{i})}\left[\frac{\pi_{\theta}(y|x_{i})}{\pi_{\theta_{\text{old}}}(y|x_{i})}A_{\theta_{\text{old}}}(x_{i},y)\right] \\
= \mathbb{E}_{x\sim\rho,y\sim\pi_{\theta_{\text{old}}}(\cdot|x)}\left[\frac{\pi_{\theta}(y|x)}{\pi_{\theta_{\text{old}}}(y|x)}A_{\theta_{\text{old}}}(x,y)\right] \\
= \mathbb{E}_{x\sim\rho,y\sim\pi_{\theta(\cdot|x)}}\left[A_{\theta_{\text{old}}}(x,y)\right] \\
= \mathcal{L}(\theta)$$
(53)

By applying the Taylor expansion, we obtain:

$$\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta_{\text{old}}) \approx \nabla_{\theta} \mathcal{L}(\theta) \big|_{\theta = \theta_{\text{old}}} (\hat{\theta} - \theta_{\text{old}})$$

$$= -\eta \nabla_{\theta} \mathcal{L}(\theta)^{\top} \big|_{\theta = \theta_{\text{old}}} \nabla_{\theta} \hat{\mathcal{L}}(\theta) \big|_{\theta = \theta_{\text{old}}}$$
(54)

where

$$\nabla_{\theta} \mathcal{L}(\theta) = -\mathbb{E}_{x \sim \rho, y \sim \pi_{\theta}(\cdot|x)} \left[ A_{\theta_{\text{old}}}(x, y) \nabla_{\theta} \log \pi_{\theta}(y|x) \right], \tag{55}$$

$$\nabla_{\theta} \hat{\mathcal{L}}(\theta) = -\frac{1}{m} \sum_{i=1}^{m} \frac{1}{n_i} \sum_{y_j \in \mathcal{D}_i} \left[ \frac{\nabla_{\theta} \pi_{\theta}(y_j | x_i)}{\pi_{\theta_{\text{old}}}(y_j | x_i)} A_{\theta_{\text{old}}}(x_i, y_j) \right]$$
(56)

For convenience, we adopt the following notation:

$$g = \nabla_{\theta} \mathcal{L}(\theta) \big|_{\theta = \theta_{\text{old}}}, \quad \hat{g} = \nabla_{\theta} \hat{\mathcal{L}}(\theta) \big|_{\theta = \theta_{\text{old}}}$$
 (57)

$$\Delta_{\text{theo}} = \mathbb{E}_{x \sim \rho} \left[ \sqrt{2\delta \cdot p_{\theta_{\text{old}}}(x) \left( 1 - p_{\theta_{\text{old}}}(x) \right)} \right]$$
 (58)

Therefore, the original problem can then be simplified as follows:

$$\mathbb{E}\left[\left(\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta_{\text{old}}) - \left(-\mathbb{E}_{x \sim \rho} \left[\sqrt{2\delta p_{\theta_{\text{old}}}(x) \left(1 - p_{\theta_{\text{old}}}(x)\right)}\right]\right)\right)^{2}\right]$$

$$= \mathbb{E}\left[\left(-\eta g^{\top} \hat{g} + \Delta_{\text{theo}}\right)^{2}\right]$$

$$= \eta^{2} \mathbb{E}[(g^{\top} \hat{g})^{2}] - 2\eta \Delta_{\text{theo}} \mathbb{E}[g^{\top} \hat{g}] + \Delta_{\text{theo}}^{2}$$
(59)

Because  $\hat{\mathcal{L}}(\theta)$  is an unbiased estimator of  $\mathcal{L}(\theta)$ , we have

$$\mathbb{E}\left[\nabla_{\theta}\hat{\mathcal{L}}(\theta)\right] = \nabla_{\theta}\mathbb{E}\left[\hat{\mathcal{L}}(\theta)\right] = \nabla_{\theta}\mathcal{L}(\theta) \tag{60}$$

$$\mathbb{E}\left[\hat{g}\right] = \mathbb{E}\left[\nabla_{\theta}\hat{\mathcal{L}}(\theta)\big|_{\theta = \theta_{\text{old}}}\right] = \nabla_{\theta}\mathbb{E}\left[\hat{\mathcal{L}}(\theta)\big|_{\theta = \theta_{\text{old}}}\right] = \nabla_{\theta}\mathcal{L}(\theta)\big|_{\theta = \theta_{\text{old}}} = g \tag{61}$$

Therefore, we can obtain

$$\mathbb{E}\left[g^{\top}\hat{g}\right] = g^{\top}\mathbb{E}\left[\hat{g}\right] = g^{\top}g\tag{62}$$

Now, regarding the first item:

$$\mathbb{E}[(g^{\top}\hat{g})^2] = \mathbb{E}[g^{\top}\hat{g}\hat{g}^{\top}g] = g^{\top}\mathbb{E}[\hat{g}\hat{g}^{\top}]g \tag{63}$$

$$\mathbb{E}[\hat{g}\hat{g}^{\top}] = \mathbb{V}(\hat{g}) + \mathbb{E}[\hat{g}]\mathbb{E}[\hat{g}]^{\top} = \mathbb{V}(\hat{g}) + gg^{\top}$$
(64)

Hence, the original problem is equivalent to the following formulation:

$$\mathbb{E}\left[\left(\mathcal{L}(\hat{\theta}) - \mathcal{L}(\theta_{\text{old}}) - \left(-\mathbb{E}_{x \sim \rho}\left[\sqrt{2\delta p_{\theta_{\text{old}}}(x)\left(1 - p_{\theta_{\text{old}}}(x)\right)}\right]\right)\right)^{2}\right]$$

$$= \eta^{2}\left(g^{\top}\mathbb{V}(\hat{g})g + \left(g^{\top}g\right)^{2}\right) - 2\eta\Delta_{\text{theo}}\left(g^{\top}g\right) + \Delta_{\text{theo}}^{2}$$
(65)

Since we aim to minimize the gap from the theoretical update lower bound by reallocating the rollout quantities per question under a total sampling budget of N, the simplification of the objective function reveals that this problem only affects the first term  $g^{\top}\mathbb{V}(\hat{g})g$ . Thus, the original optimization problem is equivalent to the following:

$$\min g^{\top} \mathbb{V}(\hat{g})g, \quad \text{s.t. } \sum_{i=1}^{m} n_i = N.$$
 (66)

The theoretical gradient direction g is typically unknown, and we seek to control the uncertainty of the estimator in all possible directions. Therefore, we instead minimize the total variance  $\text{Tr}(\mathbb{V}(\hat{g}))$ , which corresponds to uniformly reducing the variance in all directions. This approach is a widely adopted technique for variance estimation(Bottou et al., 2018; Papini et al., 2018; Wang et al., 2013). In other words, we consider the following optimization problem:

$$\min \operatorname{Tr}(\mathbb{V}(\hat{g})), \quad \text{s.t. } \sum_{i=1}^{m} n_i = N$$
 (67)

Since each  $y_j$  is independently draws from  $\pi_{\theta_{\text{old}}}$ , we can conclude that:

$$\mathbb{V}(\hat{g}) = \mathbb{V}\left(-\frac{1}{m}\sum_{i=1}^{m}\frac{1}{n_{i}}\sum_{y_{j}\in\mathcal{D}_{i}}\frac{\nabla_{\theta}\pi_{\theta}(y_{j}|x_{i})\big|_{\theta=\theta_{\text{old}}}}{\pi_{\theta_{\text{old}}}(y_{j}|x_{i})}A_{\theta_{\text{old}}}(x_{i},y_{j})\right)$$

$$= \frac{1}{m^{2}}\sum_{i=1}^{m}\mathbb{V}_{y_{j}\sim\pi_{\theta_{\text{old}}}}\left(\frac{1}{n_{i}}\sum_{y_{j}\in\mathcal{D}_{i}}\frac{\nabla_{\theta}\pi_{\theta}(y_{j}|x_{i})\big|_{\theta=\theta_{\text{old}}}}{\pi_{\theta_{\text{old}}}(y_{j}|x_{i})}A_{\theta_{\text{old}}}(x_{i},y_{j})\right) \tag{68}$$

Let  $h(x, y; \theta) = \frac{\nabla_{\theta} \pi_{\theta}(y_j | x_i)}{\pi_{\theta_{\text{old}}}(y_j | x_i)} A_{\theta_{\text{old}}}(x_i, y_j)$ , we have

$$\mathbb{V}(\hat{g}) = \frac{1}{m^2} \sum_{i=1}^{m} \mathbb{V}_{y_j \sim \pi_{\theta_{\text{old}}}} \left( \frac{1}{n_i} \sum_{j=1}^{n_i} h(y_j, x_i; \theta_{\text{old}}) \right)$$

$$= \frac{1}{m^2} \sum_{i=1}^{m} \frac{1}{n_i^2} \cdot n_i \left( \mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}} \left( h\left( y, x_i; \theta_{\text{old}} \right) \right) \right)$$

$$= \frac{1}{m^2} \sum_{i=1}^{m} \frac{\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}} \left( h\left( y, x_i; \theta_{\text{old}} \right) \right)}{n_i}$$
(69)

Therefore, for the total variance  $Tr(\mathbb{V}(\hat{q}))$ :

$$\operatorname{Tr}(\mathbb{V}(\hat{g})) = \frac{1}{m^2} \sum_{i=1}^{m} \frac{\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}\left(h\left(y, x_i; \theta_{\text{old}}\right)\right)\right)}{n_i}.$$
 (70)

 Then we dive into calculating the value of Tr ( $\mathbb{V}(h(y, x_i; \theta_{\text{old}}))$ ):

$$\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}(h(y, x_{i}; \theta_{\text{old}}))\right)$$

$$=\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\frac{\operatorname{Tr}\left(\nabla_{\theta}\pi_{\theta}(y|x_{i})\nabla_{\theta}\pi_{\theta}(y|x_{i})^{\top}|_{\theta=\theta_{\text{old}}}\right)}{(\pi_{\theta_{\text{old}}}(y|x_{i}))^{2}}A_{\theta_{\text{old}}}^{2}\right]$$

$$-\operatorname{Tr}\left(\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\left(\frac{\nabla_{\theta}\pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}}{\pi_{\theta_{\text{old}}}(y|x_{i})}A_{\theta_{\text{old}}}\right)\right]\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\left(\frac{\nabla_{\theta}\pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}}{\pi_{\theta_{\text{old}}}(y|x_{i})}A_{\theta_{\text{old}}}\right)\right]^{\top}\right)$$

$$=\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\operatorname{Tr}\left(\nabla_{\theta}\log \pi_{\theta}(y|x_{i})\nabla_{\theta}\log \pi_{\theta}(y|x_{i})^{\top}|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right)A_{\theta_{\text{old}}}^{2}\right]$$

$$-\operatorname{Tr}\left(\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]^{\top}\right)$$

$$=\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\operatorname{Tr}\left(\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]^{\top}\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]\right]$$

$$-\operatorname{Tr}\left(\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]^{\top}\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}A_{\theta_{\text{old}}}\right]\right]$$

$$=\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\|\nabla_{\theta}\log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}\|^{2}A_{\theta_{\text{old}}}^{2}\right] - \left\|\mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}\left[\nabla_{\theta}\log \pi_{\theta}(y|x_{i})A_{\theta_{\text{old}}}\right]\right\|^{2}$$

Consider the advantage function defined as:

$$A_{\theta_{\text{old}}}(x,y) = r(x,y) - \mathbb{E}_{y \sim \pi_{\theta_{\text{old}}}}(r(x,y)). \tag{72}$$

We classify the rollouts into two categories based on whether the final answer is correct or not:

$$\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}(h\left(y, x_{i}; \theta_{\text{old}}\right))\right)$$

$$=P(r=1|x_{i}) \underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}\|^{2} \left(1-p_{\theta_{\text{old}}}(x_{i})\right)^{2}\right]$$

$$+P(r=0|x_{i}) \underset{y \sim \pi_{\theta_{\text{old}}}, r=0}{\mathbb{E}}\left[\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}\|^{2} \left(p_{\theta_{\text{old}}}(x_{i})\right)^{2}\right]$$

$$-\left\|P(r=1|x_{i}) \underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})(1-p_{\theta_{\text{old}}}(x_{i}))\right]\right]^{2}$$

$$+P(r=0|x_{i}) \underset{y \sim \pi_{\theta_{\text{old}}}, r=0}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})(-p_{\theta_{\text{old}}}(x_{i}))\right]\right|^{2}$$

$$=p_{\theta_{\text{old}}}(x_{i})\left(1-p_{\theta_{\text{old}}}(x_{i})\right)^{2} \underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}\|^{2}\right]$$

$$+\left(p_{\theta_{\text{old}}}(x_{i})\right)^{2}\left(1-p_{\theta_{\text{old}}}(x_{i})\right) \underset{y \sim \pi_{\theta_{\text{old}}}, r=0}{\mathbb{E}}\left[\|\nabla_{\theta} \log \pi_{\theta}(y|x_{i})|_{\theta=\theta_{\text{old}}}\|^{2}\right]$$

$$-p_{\theta_{\text{old}}}(x_{i})^{2}\left(1-p_{\theta_{\text{old}}}(x_{i})\right)^{2} \underset{y \sim \pi_{\theta_{\text{old}}}, r=1}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right] - \underset{y \sim \pi_{\theta_{\text{old}}}, r=0}{\mathbb{E}}\left[\nabla_{\theta} \log \pi_{\theta}(y|x_{i})\right]$$

$$=\sigma_{i}^{2}$$

$$(73)$$

Therefore, we need to solve the following problem:

min 
$$\frac{1}{m^2} \sum_{i=1}^{m} \frac{\sigma_i^2}{n_i}$$
, s.t.  $\sum_{i=1}^{m} n_i = N$ . (74)

We also employ the Lagrange multiplier method to solve this problem:

$$\min \mathcal{J} = \min \frac{1}{m^2} \sum_{i=1}^{m} \frac{\sigma_i^2}{n_i} + \mu(\sum_{i=1}^{m} n_i - N), \tag{75}$$

where  $\mu$  is the Lagrange multiplier.

By differentiating both sides with respect to  $n_i$  and setting the derivative to 0, we obtain:

$$\frac{\partial \mathcal{J}}{\partial n_i} = -\frac{\sigma_i^2}{m^2 n_i^2} + \mu = 0 \implies n_i^2 = \frac{\sigma_i^2}{m^2 \mu}.$$
 (76)

That is

1026

1027

1028

1029 1030

1031

1032

1033 1034

1035

1036

1037

1039

1040

1041 1042 1043

1044 1045

1046 1047

1048 1049

1050

1051

1075

1077

1078

1079

$$n_i = \frac{\sigma_i}{m\sqrt{\mu}}. (77)$$

According to the constraint:

$$\sum_{i=1}^{m} n_i = \sum_{i=1}^{m} \frac{\sigma_i}{m\sqrt{\mu}} = N \implies \sqrt{\mu} = \frac{\sum_{i=1}^{m} \sigma_i}{Nm}.$$
 (78)

We get

$$n_{i} = \frac{\sigma_{i}}{\sum_{j} \sigma_{j}} N, \quad \sigma_{i} = \sqrt{\operatorname{Tr}\left(\mathbb{V}_{y \sim \pi_{\theta_{\text{old}}}}\left(h\left(y, x_{i}; \theta_{\text{old}}\right)\right)\right)}. \tag{79}$$

Thus, we derive the rollout quantity allocation strategy for different prompts.

#### B ALGORITHMIC IMPLEMENTATION

The pseudocode for the algorithm is presented as follows:

# Algorithm 1: From Gradient Analysis to Efficient Curriculum Learning for Reasoning LLMs (CurES)

```
1: Input: initial policy model \pi_{\theta}; reward function r(x, y); prompt dataset \mathcal{D} = \{x_i\}_{i=1}^N; number
1052
               of iterations T; prompt batch size m; learning rate \eta; entropy parameter \tau; pre-rollout size N';
1053
               number of steps per iteration M; rollout budget coefficient n.
1054
           2: for each t \in 1, \ldots, T do
1055
                  for each x_i \in \mathcal{D}_t do
1056
                      Sample k = N' rollouts \{y_{i,1}, \dots, y_{i,k}\} \sim \pi_{\theta_{\text{old}}}(\cdot | x_i).
           4:
1057
                     Compute rewards r(x_i, y_{i,j}).
           5:
           6:
                     Initialize counts and difficulty estimations p(x_i) according to Eq. (22).
           7:
                     Initialize sampling probabilities \rho^* according to Eq. (14).
           8:
                     Compute gradient contribution according to Eq. (21).
           9:
                      Obtain rollout quantities n_i for all x_i \in \mathcal{D}_t according to Eq. (20).
1061
          10:
                      for step = 1, \dots, M do
                         Update the old policy model \pi_{\theta_{\text{old}}} \leftarrow \pi_{\theta}.
          11:
1063
                         Sample a batch of prompts \mathcal{B} = \{x_i\}_{i=1}^m with replacement according to \rho^*.
          12:
1064
          13:
                        for each x_i \in \mathcal{B} do
                            Sample k = n_i rollouts \{y_{i,1}, \dots, y_{i,k}\} \sim \pi_{\theta_{\text{old}}}(\cdot | x_i).
          14:
          15:
                            Compute rewards r(x_i, y_{i,j}).
1067
                            Update counts and difficulty estimations p(x_i) according to Eq. (23).
          16:
1068
          17:
1069
          18:
                         Update sampling probabilities \rho^* according to Eq. (14).
1070
          19:
                         Update policy \pi_{\theta} by applying RL training.
          20:
                     end for
1071
          21:
                  end for
1072
          22: end for
1073
          23: Return \pi_{\theta}
1074
```

#### B.1 EXTENDED EXPERIMENTAL RESULTS

We further analyze the evolution of average gradient norms across different model scales and optimization algorithms (Figure 7). Overall, the CurES variants consistently exhibit stronger gradient

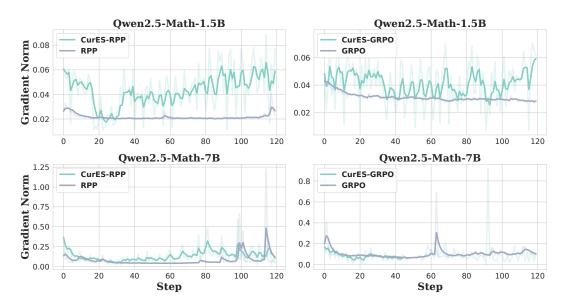


Figure 7: Comparison of Average Gradient Norms. This figure compares the average gradient norms among CurES-GRPO, CurES-RPP, GRPO, and RPP. The CurES variants consistently exhibit higher gradient norms in three out of the four algorithm-and-model-scale combinations, suggesting that the CurES effectively selects more informative prompts, thereby accelerating the training process.

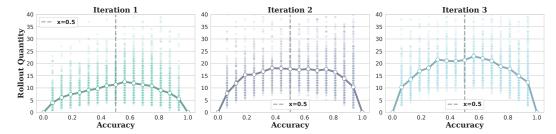


Figure 8: Distribution of rollout quantities with respect to accept rate in CurES base on Qwen2.5-Math-7B at different training iterations. CurES concentrates rollouts on effective prompts whose accuracy are close to 0.5.

signals compared to their corresponding baselines. On Qwen2.5-Math-1.5B, both CurES-RPP and CurES-GRPO maintain substantially higher gradient norms throughout training. On Qwen2.5-Math-7B, CurES-RPP continues to yield larger gradients, while CurES-GRPO performs comparably to GRPO. Higher gradient norms indicate that the model receives more informative learning signals, suggesting that CurES effectively prioritizes prompts that accelerate parameter updates. Notably, for the larger 7B model, the optimizer tends to dampen gradient magnitudes more significantly, which partially reduces the advantage of CurES; nevertheless, the overall trend demonstrates its robustness and consistent benefit across scales.

Figure 8 illustrates the distribution of rollout allocations across prompts with different accuracy levels over successive training iterations. We observe that CurES adaptively concentrates rollouts on prompts whose accuracy lies near 0.5, rather than uniformly sampling across the entire spectrum. This behavior aligns with the intuition that prompts with intermediate difficulty provide the most informative learning signal—being neither trivially solved nor consistently incorrect. As training progresses, the distribution becomes increasingly peaked around this region, indicating that CurES dynamically refines its sampling strategy to focus computational effort on prompts that are most beneficial for improving policy performance.

We further present the performance convergence of CurES with different sampling configurations on Qwen2.5-Math-7B, as shown in Figure 9. We observe that CurES achieves stable improvements across all settings, with only minor differences in convergence speed and final accuracy among varying rollout counts and prompt subsets. Notably, configurations with a moderate number of rollouts

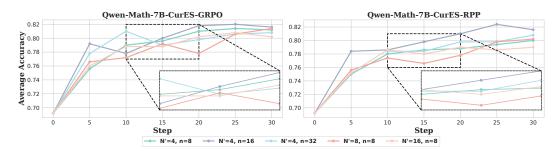


Figure 9: Performance convergence of Qwen2.5-Math-CurES-7B on MATH500 with different sampling configurations.

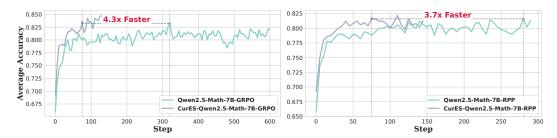


Figure 10: Efficiency comparison of CurES against baselines on MATH500 with Qwen2.5-Math-7B. The gray dashed lines mark the number of steps CurES and each baseline required to reach the baselines' highest average accuracy within the total training duration.

(e.g., N'=4, n=16) strike a favorable balance, reaching higher accuracy with fewer steps compared to more extreme settings such as very large or very small rollout numbers. This demonstrates that CurES is robust to sampling configurations and can effectively leverage diverse rollout budgets without significant degradation in performance.

We also compare the training efficiency of CurES against the baselines on MATH500 for 7B models. As shown in Figure 10, the results highlight substantial acceleration: CurES reaches the highest accuracy achieved by the baselines 4.3× faster under GRPO and 3.7× faster under RPP. Importantly, CurES not only converges more rapidly but also exceeding the baselines throughout training. These findings confirm that the adaptive prompt selection mechanism of CurES significantly improves sample efficiency, enabling faster convergence and better final model quality.

#### Case Study 1

**Problem** Janet goes to the mall and spends \$3.50 on ice cream, \$7.50 each for movie tickets for herself and her younger sister, and \$8.50 on a bracelet. If her parents gave her \$40, how many dollars does she have left?

Answer: 13

**GVM Output** First, let's calculate the total amount of money Janet spent. She spent \$3.50 on ice cream, \$7.50 on a movie ticket for herself, \$7.50 on a movie ticket for her younger sister, and \$8.50 on a bracelet. So the total amount spent is: [3.50 + 7.50 + 7.50 + 8.50] Next, we need to find out how much money she has left after spending this amount. Her parents gave her \$40, so the remaining amount is: [40 - (3.50 + 7.50 + 8.50)] Let's calculate this step by step using Python.

"'python

# Amount spent on ice cream

ice-cream = 3.50

# Amount spent on movie tickets for herself and her younger sister

movie-tickets = 7.50 + 7.50

# Amount spent on bracelet

bracelet = 8.50

1188 # Total amount spent 1189 total-spent = ice-cream + movie-tickets + bracelet 1190 # Amount given by parents 1191 amount-given = 40.001192 # Amount left 1193 amount-left = amount-given - total-spent 1194 print(amount-left) 1195 1196 "'output 1197 14.0 1198 After calculating, we find that Janet has | 14 | dollars left. 1199 CurES Output Let's break down the problem step by step and then use Python to verify our calculations. 1201 1. First, we need to calculate the total amount Janet spent: 1202 \$3.50 on ice cream 1203 • \$7.50 each for movie tickets for herself and her younger sister (so \$7.50 + \$7.50 = 1205 \$15.00) • \$8.50 on a bracelet 1207 So, the total amount spent is \$3.50 + \$15.00 + \$8.50 = \$27.00. 1208 2. Janet's parents gave her \$40. To find out how much money she has left, we subtract the total 1209 amount spent from the \$40 her parents gave her: [40 - 27 = 13]1210 The calculations confirm that Janet has 13 dollars left. 1211 1212 Case Study 2 1213 1214 **Problem** The Sun's effective temperature,  $T_e$ , is 5800 Kelvin, and its radius is 7  $\times$ 1215  $10^{10} \mathrm{cm} (7 \times 10^8 m)$ . Compute the luminosity (power output) of the Sun in erg/s. Treat the 1216 Sun as a blackbody radiator, and give your answer to one significant figure. 1217 Answer:  $4 \times 10^{33}$ 1218 **GVM Output** The luminosity L of a blackbody can be calculated using the Stefan-Boltzmann 1219 law:  $L = 4\pi R^2 \sigma T_s^4$ where: 1222 • R is the radius, 1223 •  $T_e$  is the effective temperature, 1224 •  $\sigma$  is the Stefan-Boltzmann constant, approximately  $5.67 \times 10^{-8} \text{W} \cdot \text{m}^{-2} \cdot \text{K}^{-4}$ . 1225 1226 First, convert the radius from cm to meters: 1227  $R = 7 \times 10^{10} \text{cm} = 7 \times 10^8 \text{m}$ 1228 1229 The effective temperature is given as: 1230  $T_e = 5800 \text{K}$ 1231 1232 Now plug the values into the formula: 1233  $L = 4\pi (7 \times 10^8)^2 (5.67 \times 10^{-8})(5800)^4$ 1234 Calculate  $\mathbb{R}^2$ :  $R^2 = (7 \times 10^8)^2 = 49 \times 10^{16} = 4.9 \times 10^{17} \text{m}^2$ 1236 1237 Calculate  $T_e^4$ :  $T_e^4 = (5800)^4 = 1.1316496 \times 10^{14} \text{K}^4$ 1238 1239 Substitute the intermediate results back into the luminosity equation: 1240

 $L = 4\pi (4.9 \times 10^{17})(5.67 \times 10^{-8})(1.1316496 \times 10^{14})$ 

1241

1242 Combine the constants and the powers of 10: 1243  $L = 4\pi(4.9 \times 5.67 \times 1.1316496 \times 10^{17-8+14}) = 4\pi(4.9 \times 5.67 \times 1.1316496 \times 10^{23})$ 1244 1245 Calculate the product of the constants: 1246 1247  $4.9 \times 5.67 \times 1.1316496 \approx 31.03$ 1248 So, 1249  $L \approx 4\pi(31.03 \times 10^{23}) = 4\pi(3.103 \times 10^{24})$ 1250 Now compute the numerical value: 1251  $L \approx 4 \times 3.14159 \times 3.103 \times 10^{24} \approx 39.4784 \times 3.103 \times 10^{24} \approx 122.5 \times 10^{24}$ 1252 1253  $L\approx 1.225\times 10^{26}\mathrm{W}$ 1254 Rounded to one significant figure: 1255  $L \approx 1 \times 10^{26} \text{W}$ 1256 Since  $1W = 1J/s = 10^7 \text{erg/s}$ : 1257 1258  $L \approx 1 \times 10^{26} \times 10^7 \text{erg/s} = 1 \times 10^{33} \text{erg/s}$ 1259 The luminosity in erg/s is: 1260  $1 \times 10^{33}$ 1261 1262 **CurES Output** The luminosity L of a blackbody is given by the Stefan-Boltzmann law: 1263  $L = 4\pi R^2 \sigma T_e^4$ 1264 1265 where: 1266 • R is the radius of the Sun, 1267 •  $T_e$  is the effective temperature of the Sun, 1268 •  $\sigma$  is the Stefan-Boltzmann constant,  $\sigma \approx 5.67 \times 10^{-8} \text{W} \cdot \text{m}^{-2} \cdot \text{K}^{-4}$ . 1269 Convert the solar radius from centimeters to meters: 1270 1271  $R = 7 \times 10^{10} \text{cm} = 7 \times 10^8 \text{m}$ 1272 The effective temperature is: 1273  $T_e = 5800 \text{K}$ 1274 1275  $L = 4\pi (7 \times 10^8)^2 \times (5.67 \times 10^{-8}) \times (5800)^4$ 1276 Calculate  $R^2$ : 1277  $R^2 = (7 \times 10^8)^2 = 49 \times 10^{16} = 4.9 \times 10^{17} \text{m}^2$ 1278 1279 Calculate  $T_e^4$ :  $T_e^4 = (5800)^4 = 1.1316496 \times 10^{14} \text{K}^4$ 1280 1281 Substitute the intermediate results: 1282  $L = 4\pi \times (4.9 \times 10^{17}) \times (5.67 \times 10^{-8}) \times (1.1316496 \times 10^{14})$ 1283 1284 Combine the constants and the powers of 10: 1285  $L = 4\pi \times (4.9 \times 5.67 \times 1.1316496) \times 10^{17-8+14} = 4\pi \times (31.37336) \times 10^{23} \mathrm{W}$ 1286  $L \approx 4 \times 3.14159 \times 31.37336 \times 10^{23} \approx 394.444 \times 10^{23} \text{W} \approx 3.94444 \times 10^{25} \text{W}$ 1287 1288 Rounded to one significant figure: 1289  $L \approx 4 \times 10^{26} \text{W}$ 1290 Since  $1W = 1J/s = 10^7 \text{erg/s}$ : 1291  $L = 4 \times 10^{26} \times 10^7 \text{erg/s} = 4 \times 10^{33} \text{erg/s}$ 1292 1293 The luminosity of the Sun is: 1294  $4 \times 10^{33}$  erg/s

1295

# C USE OF LLMS

We use LLMs only to refine the language and grammar in our paper. We do not use them for generating research ideas or for finding related work. We provide our complete original text to OpenAI's GPT-40 with instructions to make it more professional, coherent, and native-sounding for a research paper. We then carefully review all suggestions to guarantee that no factual content is altered and that all changes remain true to our original writing.