

# MODEL-FREE OFFLINE REINFORCEMENT LEARNING WITH ENHANCED ROBUSTNESS

**Anonymous authors**

Paper under double-blind review

## ABSTRACT

Offline reinforcement learning (RL) has gained considerable attention for its ability to learn policies from pre-collected data without real-time interaction, which makes it particularly useful for high-risk applications. However, due to its reliance on offline datasets, existing works inevitably introduce assumptions to ensure effective learning, which, however, often lead to a trade-off between robustness to model mismatch and scalability to large environments. In this paper, we enhance both aspects with a novel double-pessimism principle, which conservatively estimates performance and accounts for both limited data and potential model mismatches, two major reasons for the previous trade-off. We then propose a universal, model-free algorithm to learn an optimal policy that is robust to potential environment mismatches, which enhances robustness in a scalable manner. Furthermore, we provide a sample complexity analysis of our algorithm when the mismatch is modeled by the  $l_\alpha$ -norm, which also theoretically demonstrates the efficiency of our method. Extensive experiments further demonstrate that our approach significantly improves robustness in a more scalable manner than existing methods.

## 1 INTRODUCTION

Traditional reinforcement learning (RL) (Sutton & Barto, 2018) optimizes an agent’s performance through iterative trial-and-error interactions with the environment, and has shown significant success in many areas such as video games (Wei et al., 2022; Liu et al., 2022a). However, such an online learning scheme can be costly or unsafe in real-world applications. For instance, in domains including autonomous driving (Kiran et al., 2021), stock market trading (Kabbani & Duman, 2022), and healthcare (Yu et al., 2021), poor decisions can have significant consequences, making extensive explorations impractical. To address them, *offline RL* has been developed (Lange et al., 2012; Levine et al., 2020), enabling agents to learn from pre-collected datasets, offering a more reliable framework.

Since offline RL relies heavily on pre-collected datasets, the quality of these datasets largely determines performance. It is hence unclear whether satisfactory performance can be achieved for complex problems with a relatively limited dataset. In this context, two key challenges in improving offline RL performance have been studied. The first is **scalability**—the ability to handle large-scale problems. Without real-time interaction, learning an effective policy for large-scale problems from a limited dataset, which may not fully cover the entire state-action space, can be challenging. Recent research has focused on improving scalability by adapting model-free algorithms (Shi et al., 2022; Yan et al., 2022; Laroche et al., 2019; Fujimoto et al., 2019; Ghasemipour et al., 2021; Kumar et al., 2019; Wu et al., 2019; Siegel et al., 2020) and leveraging function approximation techniques (Ross & Bagnell, 2012; Liu et al., 2020; Xie et al., 2021a; Yin et al., 2021a; Xie & Jiang, 2021; Jiang & Huang, 2020). However, due to the complexity of large environments, many of these approaches assume that the dataset sufficiently represents the full deployment environment, typically presuming that the deployment environment is identical to the one from which the data was collected.

However, this assumption can be too restrictive. Static datasets only capture the environment at the time of data collection, but real-world applications frequently face environmental uncertainty due to perturbations or non-stationarity. This mismatch between the data collection and deployment environments, commonly known as the *sim-to-real gap* (Zhao et al., 2020), can cause significant performance degradation during deployment. Therefore, it is crucial to enhance the **robustness** of offline RL to ensure that the learned policies can perform reliably in the presence of such uncertainties.

A promising solution is to adapt robust RL frameworks (Iyengar, 2005; Nilim & El Ghaoui, 2004) to the offline setting, as explored recently in (Shi & Chi, 2022; Blanchet et al., 2023). However, these methods often come at the cost of scalability. Due to their inherent structure, robust RL methods typically rely on dynamic planning, which requires knowledge of the full transition dynamics, and are predominantly model-based. This necessitates learning and storing a complete transition model, which is resource-intensive (Zhang et al., 2021a) and limits scalability for large-scale problems.

Recognizing the limitations of current methods and the challenges posed by large-scale problems and model uncertainty, a trade-off between robustness and scalability becomes apparent. Enhancing one typically comes at the expense of the other. This naturally leads to the following question:

*Can we develop a unified framework that enhances both scalability and robustness in offline RL?*

In this paper, we address this question by presenting a model-free algorithm to learn an optimal policy that is both robust to model uncertainty and scalable to large-scale problems. Our method introduces a principle of double pessimism to simultaneously address two key sources of uncertainty: (1) the uncertainty arising from inaccurate estimations due to the underexplored datasets, and (2) model mismatch between the data collection and deployment environments. We then propose a streamlined conceptual framework, design a model-free algorithm, and provide the first theoretical guarantee of convergence and robustness of our approach. Our contributions can be summarized as follows.

- **Double-Pessimism Principle for Offline RL with Model Mismatch.** We begin by framing the challenge of enhancing robustness in offline RL within an offline robust RL framework, where an uncertainty set captures potential environmental mismatches. To solve offline robust RL in a scalable manner, we propose the double-pessimism principle that does not require transition kernel estimations. This principle maintains a conservative estimate of robust performance, obtained directly from data collection without requiring model estimation. We then introduce the first model-free pessimistic robust Q-learning algorithm. Our algorithm optimizes performance under model mismatch using an offline dataset, while offering greater memory efficiency and more scalability than previous methods.
- **First and Near-Optimal Model-Free Algorithm for Offline Robust RL.** We provide a rigorous sample complexity analysis for our model-free double-pessimistic robust Q-learning algorithm under the widely used  $l_\alpha$ -norm uncertainty set. Our analysis shows that, given a dataset satisfying the partial coverage condition (to be introduced later), our algorithm can identify an optimal robust policy with near-optimal sample complexity, comparable to that of model-based offline robust RL and model-free offline non-robust RL. This represents the first sample complexity analysis for model-free robust offline RL, demonstrating its applicability to large-scale problems that require high data efficiency.
- **Numerical Experimental Verification of Enhanced Robustness.** We conduct extensive numerical experiments to demonstrate the improvements in robustness achieved by our algorithms in both simulated environments (Archibald et al., 1995) and real physics-based Classic Control problems (Brockman et al., 2016). In each case, our algorithm consistently outperforms existing methods in handling model uncertainty, showcasing its enhanced ability to maintain stable performance across a wide range of environmental perturbations. Moreover, our approach demonstrates superior scalability stemming directly from our model-free algorithm design, as shown by its effectiveness in solving more complex Classic Control problems with robustness guarantees, which have proven difficult or unsolvable for previous model-based robust methods.

## 2 PRELIMINARIES

### 2.1 FINITE-HORIZON MARKOV DECISION PROCESS (MDP)

A finite-horizon MDP is represented by  $\mathcal{M} = (\mathcal{S}, \mathcal{A}, H, P \triangleq \{P_h\}_{h=1}^H, r \triangleq \{r_h\}_{h=1}^H)$ , where  $\mathcal{S}$  and  $\mathcal{A}$  are the finite state and action spaces of size  $S$  and  $A$ , respectively, and  $H$  is the horizon length. The probability transition kernel  $P_h : \mathcal{S} \times \mathcal{A} \rightarrow \Delta(\mathcal{S})$  and the reward function  $r_h : \mathcal{S} \times \mathcal{A} \rightarrow [0, 1]$  are defined at each step  $h$  ( $1 \leq h \leq H$ ). At each step  $h$ , the agent starts in state  $s_h$ , takes action  $a_h$ , transitions to the next state  $s_{h+1}$  according to the transition kernel  $P_{h, s_h, a_h}$ , and receives a reward  $r_h(s_h, a_h)$ . This process terminates after  $H$  steps when the agent reaches state  $s_{H+1}$ .

A policy  $\pi = \{\pi_h\}_{h=1}^H$  defines the strategy for selecting actions in different states, where  $\pi_h : \mathcal{S} \rightarrow \Delta(\mathcal{A})$  specifies the probability distribution over actions at step  $h$ . The performance of an agent following a policy  $\pi$  is measured by the value function  $V^{\pi,P} = \{V_h^{\pi,P}\}_{h=1}^H$ , where

$$V_h^{\pi,P}(s) \triangleq \mathbb{E}_{\pi,P} \left[ \sum_{t=h}^H r_t(s_t, a_t) \mid s_h = s \right]. \quad (1)$$

The expectation is taken over the trajectory  $\{s_h, a_h, r_h\}_{h=1}^H$  generated by executing the policy  $\pi$  and transitioning according to the transition kernel  $P$ :  $a_h \sim \pi_h(s_h)$  and  $s_{h+1} \sim P_{h,s_h,a_h}$ .

## 2.2 INFINITE-HORIZON MDP

An infinite-horizon MDP is defined as  $\mathcal{M} = (\mathcal{S}, \mathcal{A}, P, r, \gamma)$ , where both the transition kernel  $P$  and the reward function  $r$  are stationary and do not change over time. The discount factor  $\gamma < 1$  ensures the finiteness of the accumulated reward over an infinite horizon.

Due to its stationary nature, it suffices to consider only stationary policies  $\pi : \mathcal{S} \rightarrow \Delta(\mathcal{A})$ , which specify the action-selection probabilities over the action space. The value function  $V^{\pi,P}$  of a policy  $\pi$  with transition kernel  $P$  is defined as

$$V^{\pi,P}(s) \triangleq \mathbb{E}_{\pi,P} \left[ \sum_{t=1}^{\infty} \gamma^t r_t(s_t, a_t) \mid s_0 = s \right]. \quad (2)$$

## 2.3 ROBUST MDP

A finite-horizon robust MDP (RMDP) is specified by  $(\mathcal{S}, \mathcal{A}, H, \mathcal{P} = \{\mathcal{P}_h\}, r)$ , and an infinite-horizon RMDP is denoted by  $(\mathcal{S}, \mathcal{A}, \mathcal{P}, r, \gamma)$ , where  $\mathcal{P}$  is a set containing some transition kernels, named the uncertainty set. At each step, the environment transitions to the next state following an arbitrary kernel belonging to the uncertainty set, instead of a fixed one as in non-robust MDPs. In this paper, we consider the  $(s, a)$ -rectangular uncertainty set (Wiesemann et al., 2013), where  $\mathcal{P}$  is independently defined for each state-action pair, with  $\otimes$  denoting the Cartesian product:

$$\mathcal{P}_h = \bigotimes_{(s,a) \in \mathcal{S} \times \mathcal{A}} \mathcal{P}_{h,s,a} \text{ (finite-horizon)}, \quad \mathcal{P} = \bigotimes_{(s,a) \in \mathcal{S} \times \mathcal{A}} \mathcal{P}_{s,a} \text{ (infinite-horizon)}. \quad (3)$$

The performance of a policy in an RMDP is evaluated based on its worst-case value function over all the instances in the uncertainty set. Specifically, the finite-horizon robust value functions  $V^\pi = \{V_h^\pi\}_{h=1}^H$  and the infinite-horizon robust value functions  $V^\pi$  are defined as

$$V_h^\pi(s) \triangleq \inf_{P \in \mathcal{P}} V_h^{\pi,P}(s) \text{ (finite-horizon)}, \quad V^\pi(s) \triangleq \inf_{P \in \mathcal{P}} V^{\pi,P}(s) \text{ (infinite-horizon)}$$

where the infimum is taken over the uncertainty set of transition kernels. For a given initial state distribution  $\rho \in \Delta(\mathcal{S})$ , we write the expected robust performance as

$$V_1^\pi(\rho) \triangleq \mathbb{E}_{s_1 \sim \rho} [V_1^\pi(s_1)] \text{ (finite-horizon)}, \quad V^\pi(\rho) \triangleq \mathbb{E}_{s \sim \rho} [V^\pi(s)] \text{ (infinite-horizon)}. \quad (4)$$

The goal of an RMDP is to learn a policy that optimizes the worst-case performance, or equivalently, the robust value functions. Such a policy is referred to as an optimal robust policy:

$$\pi^* = \{\pi_h^*\} \triangleq \arg \max_{\pi} V_1^\pi(\rho), \text{ (finite-horizon)}, \quad (5)$$

$$\pi^* \triangleq \arg \max_{\pi} V^\pi(\rho), \text{ (infinite-horizon)}. \quad (6)$$

## 3 FORMULATION: ENHANCING ROBUSTNESS AND SCALABILITY

In this section, we develop our formulation, where we utilize RMDPs to formulate the offline RL problem against model mismatch.

In the offline setting, the dataset is collected under a fixed environment  $P$  (referred to as the nominal kernel) by executing some behavior policy  $\mu$ . However, due to factors such as non-stationarity,

unexpected perturbations, or adversarial attacks, the deployment environment may differ from  $P$ . To account for this model deviation and improve robustness, we construct an uncertainty set by perturbing the nominal kernel and aim to learn the optimal robust policy. Specifically, following (Xu & Mannor, 2010; Xu et al., 2010; Derman et al., 2021; Kumar et al., 2023), we define the uncertainty set (of  $(s, a)$ -pair) for modeling environmental perturbations as:

$$\mathcal{P}_{h,s,a} = \{P_{h,s,a} + q \in \Delta(\mathcal{S}) : q \in \mathcal{Q}_{h,s,a}\} \quad (\text{finite-horizon}), \quad (7)$$

$$\mathcal{P}_{s,a} = \{P_{s,a} + q \in \Delta(\mathcal{S}) : q \in \mathcal{Q}_{s,a}\} \quad (\text{infinite-horizon}), \quad (8)$$

for some set  $\mathcal{Q}_{h,s,a}, \mathcal{Q}_{s,a}$  containing the possible model perturbations, and aim to learn the optimal robust policy for the corresponding RMDPs. This will not only provide an optimized lower bound on performance when the deployment environment lies within the uncertainty set, but also improves the robustness to model uncertainty Pinto et al. (2017).

### 3.1 FINITE-HORIZON

In the finite-horizon setting, the dataset  $\mathcal{D}$  consists of  $K$  episodes each of length  $H$ . These episodes are independently generated based on a certain behavior policy  $\mu$  and the nominal kernel  $P$ :

$$\mathcal{D} = \{(s_1^k, a_1^k, r_1^k, \dots, s_H^k, a_H^k, r_H^k, s_{H+1}^k)_{k=1, \dots, K}\}, \quad (9)$$

where  $a_i^k \sim \mu(\cdot | s_i^k)$ ,  $s_{i+1}^k \sim P_{i, s_i^k, a_i^k}$ , and the initial state  $s_1^k \sim \rho$ .

Since the dataset is collected by a fixed policy under a single nominal environment, there exists a distribution shift between the data distribution, and the distribution induced by the optimal policy and the worst-case kernel. To guarantee that a provable efficient algorithm can be designed based on the dataset, we adopt a popular assumption on the distributional mismatch between the dataset distribution and the occupancy measure induced by the optimal policy  $\pi^*$ , as in (Shi & Chi, 2022).

**Assumption 1** (Robust single-policy concentrability). *The behavior policy  $\mu$  satisfies that*

$$C^* \triangleq \max_{(s,a,P',h) \in \mathcal{S} \times \mathcal{A} \times \mathcal{P} \times [H]} \frac{d_{P',h}^{\pi^*}(s,a)}{d_{P,h}^\mu(s,a)} < +\infty, \quad (10)$$

where  $d_{P,h}^\pi$  is the occupancy distribution induced by policy  $\pi$  and transition kernel  $P$  at step  $h$ .

In Assumption 1, we only require that the dataset covers the state-action pairs that are visited by the optimal policy, known as the partial coverage condition (Rashidinejad et al., 2021).

Our goal is then to learn an  $\epsilon$ -optimal policy  $\hat{\pi}$  for the RMDP with the uncertainty set defined as in equation 3 and equation 7, such that

$$V_1^{\pi^*}(\rho) - V_1^{\hat{\pi}}(\rho) \leq \epsilon. \quad (11)$$

### 3.2 INFINITE-HORIZON

In the infinite-horizon setting, the offline dataset contains a single trajectory of length  $T$  obtained by executing a behavior policy  $\mu$  under the nominal kernel  $P$ :

$$\mathcal{D} = \{s_1, a_1, r_1, s_2, \dots, s_T\}, \quad (12)$$

where  $s_1 \sim \rho$ ,  $a_i \sim \mu(\cdot | s_i)$  and  $s_{i+1} \sim P_{s_i, a_i}$ . For the infinite horizon setting, we adopt the following two assumptions on the behavior policy.

We first adopt the partial coverage assumption in (Blanchet et al., 2023; Wang et al., 2024b).

**Assumption 2.** *The behavior policy  $\mu$  satisfies*

$$C^* \triangleq \max_{(s,a,P') \in \mathcal{S} \times \mathcal{A} \times \mathcal{P}} \frac{d_{P'}^{\pi^*}(s,a)}{d_P^\mu(s,a)} < +\infty, \quad (13)$$

where  $d_P^\pi$  denotes the occupancy distribution induced by policy  $\pi$  and transition kernel  $P$ .

We make an additional assumption on the behavior policy as follows.

**Assumption 3.** *The behavior policy  $\mu$  is stationary, and the induced Markov chain under the nominal kernel is uniformly ergodic.*

**Remark 1.** *This assumption is commonly adopted in prior works (Wang et al., 2020; Yan et al., 2022; Li et al., 2020; Wang & Zou, 2020), as it ensures that the dataset includes all state-action pairs covered by the **behavior policy**, provided the dataset size exceeds a certain threshold. This assumption is required since the dataset consists of a single Markovian trajectory. When the dataset contains i.i.d. samples from the occupancy distribution  $d_p^\mu$ , as in (Wang et al., 2024b; Li et al., 2022), such an assumption can be removed.*

Our goal is then to find an  $\epsilon$ -optimal policy  $\hat{\pi}$  through  $\mathcal{D}$  for the RMDP with the uncertainty set defined in equation 3 and equation 8, such that

$$V^{\pi^*}(\rho) - V^{\hat{\pi}}(\rho) \leq \epsilon. \quad (14)$$

## 4 DOUBLE-PESSIMISM PRINCIPLE

In this section, we introduce our model-free algorithm for learning an optimal robust policy from an offline dataset. As we mentioned, two major challenges in offline RL are the two sources of uncertainty: one arising from the limited and under-explored dataset, and the other from the mismatch between the data collection and target environments. We aim to develop a unified double-pessimism principle to address both of them.

As suggested by previous studies on offline RL, e.g., (Rashidinejad et al., 2021; Li et al., 2022; Shi et al., 2022; Yan et al., 2022; Wang et al., 2024b), the uncertainty arising from the dataset can be addressed using a single-pessimism principle. This involves introducing a penalty term  $b_n$ , which depends on the visitation frequency of each state-action pair, to penalize less frequently visited pairs. By doing so, we obtain a conservative estimate of the value function under the nominal transition kernel.

However, addressing the uncertainty arising from model mismatch is particularly challenging, especially with a model-free approach. Most previous robust RL studies require that the estimation of the worst-case transition,  $\sigma_{\mathcal{P}}(V) \triangleq \min_{p \in \mathcal{P}} pV$ , be unbiased. This can be satisfied when the agent can freely generate data as needed (e.g., (Wang et al., 2023d; Liu et al., 2022b; Wang et al., 2023c;b)), yet is impractical in offline settings. To address this issue, we argue that another pessimism principle can be adopted, and that learning a policy robust to model mismatch does not require an unbiased estimator. Instead, as long as the estimator from the algorithm provides a lower bound on the robust value function, it is sufficient to account for the uncertainty due to model mismatch and still learn a robust policy. We therefore propose a model-free estimator that lower bounds  $\sigma(V)$  to produce a conservative estimation as follows.

**Definition 1.** *For the uncertainty set  $\mathcal{P}_{s,a}$ , a function  $\kappa$  is referred to as a model-mismatch penalty function if for any non-negative vector  $V$  and a sample  $s' \sim P_{s,a}$  from the nominal kernel,*

$$\mathbb{E}[V(s') - \kappa_{s,a}(V)] \leq \sigma_{\mathcal{P}_{s,a}}(V). \quad (15)$$

Such a penalty function ensures that at each step, the updated estimate represents a lower bound on the true worst-case scenario, resulting in a conservative estimation. A universal design of the penalty function  $\kappa$  is provided in Appendix C.

We then combine the two pessimism principles together, to develop our double-pessimism algorithm based on the Q-learning algorithm. For each sample  $(s, a, s')$ , we update the  $Q$  table by

$$Q(s, a) \leftarrow (1 - \eta)Q(s, a) + \eta \left( r(s, a) + \gamma V(s') - \underbrace{\gamma \kappa_{s,a}(V)}_{\text{Pessimism principle of model mismatch}} - \underbrace{b_n(V)}_{\text{Pessimism principle of limited dataset}} \right). \quad (16)$$

As we will show later, such an update rule incorporating the double-pessimism principle ensures that our estimation is conservative, and can effectively tackle the uncertainty in offline robust RL. More

importantly, such an update rule does not require any information on the transition model, and hence can be adapted in a model-free manner and is more suitable for large-scale problems.

Based on this, we develop our model-free offline algorithms for both finite and infinite horizon cases. In the following sections, we present these algorithms and develop their sample complexity analysis.

## 5 DOUBLE-PESSIMISM Q-LEARNING FOR FINITE-HORIZON MDPs

Adopting the double-pessimism principle, we propose our algorithm for finite-horizon MDPs.

---

**Algorithm 1** Double-Pessimism Q-Learning for finite-horizon RMDPs.

---

**Input:**  $\mathcal{D}$ , target success probability  $1 - \delta$ , uncertainty set radius  $R$ , penalty function  $\kappa$   
**Initialize:**  $Q_h(s, a) = 0$ ,  $N_h(s, a) = 0$ ,  $V_h(s) = 0$ ,  $\forall s, a, h$   
**for**  $k = 1, \dots, K$  **do**  
  Sample a trajectory  $\{s_h, a_h, r_h\}_{h=1}^H$  from  $\mathcal{D}_\mu$   
  **for**  $h = 1, \dots, H$  **do**  
     $N_h(s_h, a_h) \leftarrow N_h(s_h, a_h) + 1$ ;  $n \leftarrow N_h(s_h, a_h)$ ;  $\eta_n \leftarrow \frac{H+1}{H+n}$   
     $b_n \leftarrow c_b \sqrt{\frac{H^3 \log^2(SAKH/\delta)}{n}}$   
     $Q_h(s_h, a_h) \leftarrow (1 - \eta_n)Q_h(s_h, a_h) + \eta_n \left\{ r_h(s_h, a_h) + V_{h+1}(s_{h+1}) - \kappa_{h, s_h, a_h}(V_{h+1}) - b_n \right\}$   
     $V_h(s_h) \leftarrow \max \left\{ V_h(s_h), \max_a Q_h(s_h, a) \right\}$   
  **end for**  
   $\hat{\pi}_h^k(s) \leftarrow \arg \max_a Q_h(s, a)$ ,  $\forall s, h$   
**end for**  
 $\hat{\pi}_h(s) \leftarrow \hat{\pi}_h^K(s)$ ,  $\forall s, h$   
**Output:**  $\hat{\pi} = \{\hat{\pi}_h\}$

---

In our algorithm, the term  $\kappa$  is for conservative estimation of the worst-case performance within the uncertainty set, while the term  $b$  addresses the pessimism of the limited dataset. We track the visitation count of each state-action pair and construct the penalty term  $b$  based on these counts. As the dataset visits a pair more frequently, the associated uncertainty decreases and  $b$  decreases.

**Remark 2.** Our algorithm design is universal and works for any uncertainty set models, as long as we have a penalty function  $\kappa$  satisfying equation 15, which is provided in Appendix C. However, since  $\kappa$  for different models requires individual studies, we mainly derive our theoretical analysis for the  $l_\alpha$ -norm models (Kumar et al., 2023; Derman et al., 2021):  $\mathcal{P}_{h, s, a} = \{P_{h, s, a} + q : q \in \mathcal{Q}\}$ , with

$$\mathcal{Q} = \left\{ q \in \mathbb{R}^S : \sum_i q(i) = 0, \|q\|_\alpha \leq R_{h, s, a} \right\},$$

where  $R_{s, a}$  is small enough so that  $P_{h, s, a} + q \in \Delta(\mathcal{S})$ ,  $\forall q \in \mathcal{Q}$ .

We again emphasize that our double-pessimism principle and algorithm design can be extended further to other uncertainty set models. We provide a [detailed discussion on the universal construction of  \$\kappa\$  and its implementation complexity in Appendix C](#).

Next, we develop our theoretical results for  $l_\alpha$ -norm sets. We first show that equation 15 is satisfied by our design, and the algorithm results in a conservative estimation of the robust value function.

**Lemma 1.** For the  $l_\alpha$ -norm uncertainty set, set the penalty function  $\kappa$  as

$$\kappa_{h, s, a}(V) \triangleq R_{h, s, a} \min_{w \in \mathbb{R}} \|we - V\|_\beta, \quad (18)$$

where  $\beta = \frac{1}{1-\frac{1}{\alpha}}$  is the Hölder conjugate of  $\alpha$ , and  $e = (1, 1, \dots, 1) \in \mathbb{R}^S$ . Then, equation 15 is satisfied. Moreover, it holds that for all  $(k, h, s) \in [K] \times [H] \times \mathcal{S}$ ,

$$V_h(s) \leq V_h^{\hat{\pi}_h^k}(s) \leq V_h^*(s). \quad (19)$$

The lemma provides a concrete construction of the penalty function for the  $l_\alpha$ -norm model. More importantly, our model-free estimator and algorithm result in pessimistic estimations of robust value functions, tackling both uncertainty sources. In our next result, we show that our double-pessimism principle is effective in learning the optimal robust policy from the mismatched offline dataset.

**Theorem 2.** *For the  $l_\alpha$ -norm uncertainty set, and any  $\delta \in (0, 1)$ , suppose that the behavior policy  $\mu$  satisfies Assumption 1. When  $T \triangleq HK > \tilde{O}(SC^*)$ , the policy  $\hat{\pi}$  returned by Algorithm 1 satisfies*

$$V_1^*(\rho) - V_1^{\hat{\pi}}(\rho) \leq \tilde{O} \left( \sqrt{\frac{H^6 SC^*}{T}} \right) \quad (20)$$

with probability at least  $1 - \delta$ . Here,  $f(T) = \tilde{O}(g(T))$  means that  $|f(T)| \leq C \cdot g(T) \cdot (\log g(T))^k$  for some constants  $C > 0$  and  $k \geq 0$ , when  $T$  is sufficiently large.

**Remark 3.** *Our algorithm is the first model-free algorithm for offline RL under model mismatch with sub-optimality gap analysis. The sub-optimality gap we obtain in the previous result further implies that we can learn an  $\epsilon$ -optimal policy as long as the size of the offline dataset  $T$  exceeds*

$$\underbrace{\tilde{O} \left( \frac{H^6 SC^*}{\epsilon^2} \right)}_{\epsilon\text{-dependent}} + \underbrace{\tilde{O}(SC^*)}_{\text{burn-in cost}}. \quad (21)$$

Note that in the sample complexity, the second term, referred to as the burn-in cost, is a universal constant that does not depend on  $\epsilon$ , while the first term asymptotically depends on  $\epsilon$ . When  $\epsilon$  becomes smaller, the first term dominates the overall complexity, resulting in an asymptotic complexity of  $\tilde{O} \left( \frac{H^6 SC^*}{\epsilon^2} \right)$ . A more detailed discussion of the complexity will be provided in Section 7.

## 6 DOUBLE-PESSIMISM Q-LEARNING FOR INFINITE-HORIZON MDPs

In this section, we present our algorithm design and analysis for offline RL with infinite-horizon MDPs. Due to space limitation and similarities in algorithm design, the algorithm is deferred to Algorithm 3 in Appendix E.1. The algorithm follows a similar design as the finite-horizon one, where the two terms  $\kappa$  and  $b$  represent conservative penalties for the double-pessimism principle. Again, our algorithm design is universal, but we develop the sample complexity results only for  $l_\alpha$ -norm models.

**Theorem 3.** *Consider the  $l_\alpha$ -norm uncertainty set and any  $\delta \in (0, 1)$ . Suppose that the behavior policy  $\mu$  satisfies Assumption 2 and Assumption 3. Then, the policy  $\hat{\pi}$  returned by Algorithm 3 satisfies*

$$V^*(\rho) - V^{\hat{\pi}}(\rho) \leq \tilde{O} \left( \sqrt{\frac{C^* S}{T(1-\gamma)^5}} + \frac{C^* S}{T(1-\gamma)^2} + \frac{C^*}{T(1-\gamma)^3} \right) \quad (22)$$

with probability at least  $1 - \delta$ .

**Remark 4.** *An  $\epsilon$ -optimal robust policy can be learned as long as the size of the offline dataset exceeds*

$$\tilde{O} \left( \frac{SC^*}{(1-\gamma)^5 \epsilon^2} \right). \quad (23)$$

This sample complexity matches the results of model-free offline non-robust RL Yan et al. (2022) without variance reduction techniques, which implies the near-optimality of our method. Compared to model-based offline robust RL Shi & Chi (2022); Blanchet et al. (2023), our result matches theirs in terms of  $C^*$ ,  $S$ ,  $\epsilon$ , but exhibits a higher order dependence on  $(1 - \gamma)$ . We argue that, in general, model-free algorithms tend to have lower memory requirements but incur higher sample complexity compared to model-based approaches. A more detailed discussion will be provided in Section 7.

## 7 RELATED WORK

### 7.1 COMPARISON WITH PRIOR ARTS

In this section, we compare our work to the most closely related studies for tabular offline robust RL (Shi & Chi, 2022; Blanchet et al., 2023). The results are summarized in Table 1, where we only

Reference	Memory complexity	Sample complexity	Computational complexity
<a href="#">Our Work</a>	$\mathcal{O}(SA)$	$\tilde{\mathcal{O}}\left(\frac{SC^*}{\epsilon^2(1-\gamma)^5}\right)$	Polynomial
(Blanchet et al., 2023)	$\mathcal{O}(S^2A)$	$\tilde{\mathcal{O}}\left(\frac{S^2C^*}{\epsilon^2(1-\gamma)^4}\right)$	NP Hard
(Shi & Chi, 2022)	$\mathcal{O}(S^2A)$	$\tilde{\mathcal{O}}\left(\frac{SC^*}{\epsilon^2 P_{\min}(1-\gamma)^4}\right)$	Polynomial

Table 1: Comparison with offline robust RL works. (Shi &amp; Chi, 2022) is for the KL-divergence set.

include the infinite horizon ones. Compared to previous studies, our method offers improved memory and computational complexity, while maintaining comparable sample complexity.

First, both related works are model-based, which involves estimating and storing the transition model  $\{\hat{P}_{s,a} : (s, a) \in \mathcal{S} \times \mathcal{A}\} \in \mathbb{R}^{S^2A}$ . This approach thus requires an additional memory of size  $\mathcal{O}(S^2A)$  to store the model, along with  $\mathcal{O}(SA)$  space for the number of visited state-action pairs from the dataset. As a result, it becomes inefficient for large-scale problems or environments with complicated transition dynamics. In contrast, our model-free algorithm only requires  $\mathcal{O}(SA)$ -sized space for the number of visits. Such a reduced memory complexity enables our model-free algorithms to handle large-scale problems, scaling effectively to large-scale or even continuous problems.

In terms of computational complexity, the most related work (Blanchet et al., 2023) requires to solve a non-rectangular RMDP, which is generally NP-hard (Wiesemann et al., 2013). In contrast, our algorithm can be effectively implemented in polynomial time, which is much more practical. Compared to (Shi & Chi, 2022), our algorithm still enjoys lower computational complexity, since the update rule of the model-based approach requires computing the inner product  $\hat{P}_{s,a}V$ , whereas our model-free approach eliminates this computation and only requires a single vector entry  $V(s')$ . [See Appendix C for a more detailed discussion.](#)

In terms of sample complexity, both of our sample complexity results match the ones for offline non-robust Q-learning without variance reduction, illustrating our data efficiency and near-optimality. Our result improves the dependence on  $S$  compared to (Blanchet et al., 2023) under the  $l_\infty$ -norm uncertainty set, showing the enhanced scalability to large-scale problems. On the other hand, it is the general observation that model-based methods tend to demonstrate better sample complexity in terms of  $(1 - \gamma)$  than model-free methods, especially when additional techniques like variance reduction are not employed. Such findings have been widely noted in various settings, for instance, when comparing robust RL with generative models ((Wang et al., 2024a) vs. (Shi et al., 2023)) and non-robust offline RL ((Yan et al., 2022) vs. (Li et al., 2022)).

On a side note, we note that our result for the finite-horizon setting exhibits a higher-order dependence on  $H$  (where we set  $H = \frac{1}{1-\gamma}$  as the effective horizon in infinite setting). This is due to the non-stationary environment inherent in the finite-horizon setting, which is also consistent with findings from previous studies, such as (Shi & Chi, 2022).

To summarize, our approach addresses existing gaps in offline RL by enhancing robustness to model mismatch, reducing memory requirements, and providing adaptability to large-scale problems, establishing a state-of-the-art method in the field.

## 7.2 OTHER RELATED WORKS

**Offline RL without model mismatch.** A significant body of offline RL works assumes identical collection and deployment environments. Based on that, many early works further rely on the global coverage assumption, where the behavior policy covers all state-action pairs (Scherrer, 2014; Chen & Jiang, 2019; Munos, 2005; Yin et al., 2021b; Yin & Wang, 2021a; Jiang, 2019; Wang et al., 2019; Liao et al., 2020; Liu et al., 2019; Zhang et al., 2020; Uehara et al., 2020; Duan et al., 2020; Xie & Jiang, 2020; Levine et al., 2020; Antos et al., 2007; Farahmand et al., 2010). This assumption is often too restrictive and unrealistic, as it requires complete coverage of state-action pairs in historical data (Gulcehre et al., 2020; Agarwal et al., 2020a; Fu et al., 2020). A more practical partial coverage setting is later proposed, allowing to learn from a less explored dataset. Under partial coverage, the optimal policy can still be learned by incorporating the pessimism principle to handle dataset uncertainty (Jin et al., 2021; Uehara & Sun, 2021; Xie et al., 2021a;b; Rashidinejad et al., 2021;



Zanette et al., 2021; Yin & Wang, 2021b; Shi et al., 2022; Li et al., 2022; Zhan et al., 2022; Wang et al., 2024b; Kumar et al., 2020). Differently, we consider potential model mismatches.

**Robust RL.** Robust RL (Iyengar, 2005; Nilim & El Ghaoui, 2004; Xu & Mannor, 2010) aims to tackle the challenge of model mismatch in RL, by optimizing the worst-case performance over an uncertainty set. Existing work focuses mainly on the online setting (Wang & Zou, 2021; 2022; Wang et al., 2023a; Badrinath & Kalathil, 2021; Dong et al., 2022; Lu et al., 2024; Liu & Xu, 2024a) or with a generative model (Yang et al., 2021; Xu et al., 2023; Panaganti & Kalathil, 2022; Shi et al., 2023; Wang et al., 2024a). Offline robust RL, except for the two mentioned above, either relies on strong assumptions, such as global coverage or absorbing states (Panaganti et al., 2022; Yang et al., 2021), or employs fitted type algorithm designs (Yang et al., 2022; Panaganti et al., 2022; Liu et al., 2023). More importantly, most of them are model-based, while we develop the first model-free algorithm for offline robust RL. Another line of research aims to improve robustness and scalability through function approximation (Liu & Xu, 2024b; Wang et al., 2024a; Ma et al., 2022), yet we focus on the tabular setting to develop a more fundamental understanding of offline RL. Another line of robust RL aims to optimize the performance under the environment from a corrupted dataset collected under the same environment Yang et al. (2023); Zhang et al. (2021b; 2022), which is different from our setting.

## 8 EXPERIMENTS

We use numerical experiments to demonstrate the advantages of our framework in terms of robustness. We consider two sets of environments: simulated MDPs with controllable transition dynamics and Classic Control environments. [More experiments are further provided in Appendix B.](#)

### 8.1 SIMULATION MDPs

We first evaluate the performance of our algorithm on the Garnet problem (Archibald et al., 1995), a randomly generated MDP  $\mathcal{G}(a, b, c)$  with  $a$  states,  $b$  actions, and  $c$  branches (see Appendix A for a more detailed description). Both the nominal kernels and reward functions are generated randomly. The uncertainty set is constructed using the  $l_\infty$ -norm, with the radius  $R_{s,a} \in [0.1, 0.5]$ .

We first generate a dataset of size  $N$  from the nominal kernel and apply our double-pessimism algorithm, with the single-pessimism baseline (Yan et al., 2022), to learn policies. We then compute the robust value functions of the learned policies and plot the difference between these values and the optimal robust value functions, referred to as the optimality gap, in Figure 1. The results are averaged over 10 times, with the maximum and minimum gaps as an envelope around the average value. The results show that our double-pessimism algorithm converges to the true optimal robust value as the dataset size increases, maintaining a lower optimality gap, while the single-pessimism approach results in a larger gap. These findings demonstrate that our double-pessimism principle significantly enhances robustness while remaining model-free and scalable.

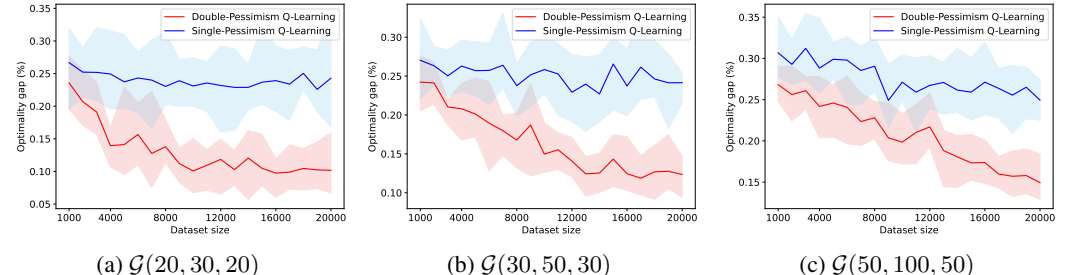


Figure 1: Optimality gaps under different Garnet problems.

### 8.2 CLASSIC CONTROL PROBLEMS

To further demonstrate the improvements in both scalability and robustness offered by our approach, we consider more complex Classic Control tasks from OpenAI Gym (Brockman et al., 2016),

specifically CartPole and MountainCar. The dynamics of these environments are indirectly controlled by their parameters, e.g., the length of the pole in CartPole, the gravity and the force in MountainCar, and it is of interest to improve the robustness against their uncertainty. Since these model mismatches are hard to model, model-based approaches become ineffective, yet our model-free method remains applicable and effective in such scenarios.

For each dataset generated under the nominal environment with the default parameters, we implemented our algorithm alongside the baseline (Yan et al., 2022) to learn policies. To evaluate the robustness of the learned policies, we test their performance in modified environments with parameter perturbations (Pinto et al., 2017; Wang & Zou, 2021), where we randomly perturbed these parameters within the range of  $[-\tau, \tau]$  for 800 trials and evaluated the policies in these perturbed environments. We present the average performance across these 800 trials in Fig. 2. As the results show, our double-pessimism algorithm maintains a higher average performance under environment perturbations, demonstrating superior robustness, which aligns with our theoretical findings. This illustrates the enhanced robustness achieved by our approach. Moreover, given the large-scale and complex dynamics of these environments which are difficult for model-based approaches, our model-free algorithm effectively addresses these challenges, further demonstrating the scalability of our method.

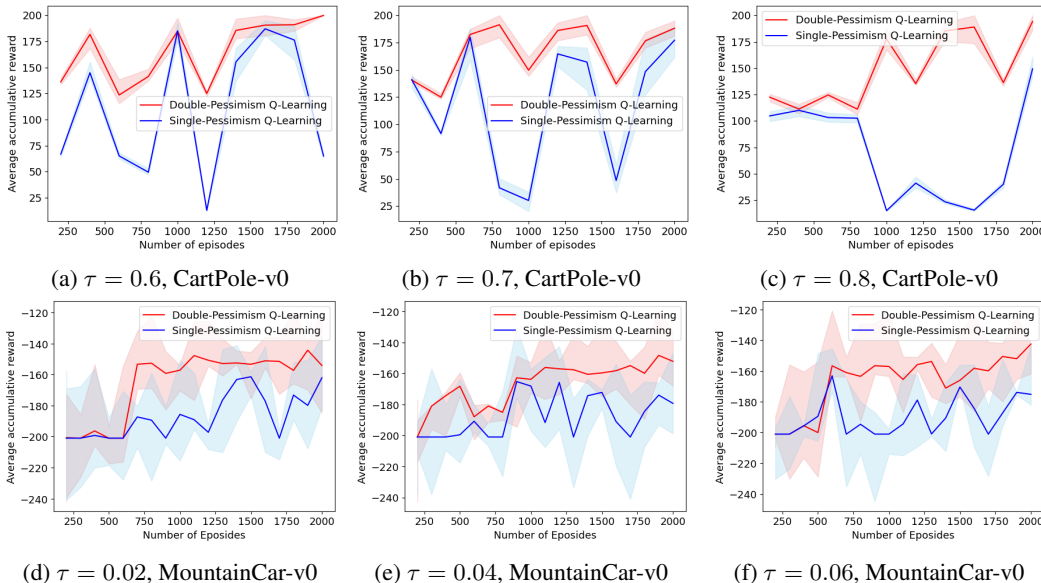


Figure 2: Reward profiles with different parameter perturbations.

## 9 CONCLUSION

We explored offline RL with a focus on improving scalability and robustness simultaneously. We framed the problem as offline robust RL and developed a model-free algorithm to optimize the worst-case performance within an uncertainty set accounting for the possible model mismatch. To address two key challenges—uncertainty from the under explored dataset and model mismatch between data collection and deployment environments—we introduced a double-pessimism principle that conservatively estimates the agent’s performance in a model-free manner. Building on this, we designed a universal model-free algorithm that eliminates the need for model estimation, adapts to various uncertainty sets, and scales to large problems. We further analyzed its performance for the widely studied  $l_\alpha$ -norm uncertainty set, showing near-optimal data efficiency of our approach. Our approach significantly improves the robustness, scalability, and efficiency of offline RL compared to existing methods, pushing the boundaries of offline RL research.

## REFERENCES

- 540  
541  
542 Alekh Agarwal, Sham Kakade, and Lin F Yang. Model-based reinforcement learning with a generative  
543 model is minimax optimal. In *Conference on Learning Theory*, pp. 67–83. PMLR, 2020a.
- 544 Rishabh Agarwal, Dale Schuurmans, and Mohammad Norouzi. An optimistic perspective on offline  
545 reinforcement learning. In *International Conference on Machine Learning*, pp. 104–114. PMLR,  
546 2020b.
- 547 Andras Antos, Rémi Munos, and Csaba Szepesvari. Fitted Q-iteration in continuous action-space  
548 mdps. In *Neural Information Processing Systems*, 2007.
- 549  
550 TW Archibald, KIM McKinnon, and LC Thomas. On the generation of Markov decision processes.  
551 *Journal of the Operational Research Society*, 46(3):354–361, 1995.
- 552 Kishan Panaganti Badrinath and Dileep Kalathil. Robust reinforcement learning using least squares  
553 policy iteration with provable performance guarantees. In *Proc. International Conference on*  
554 *Machine Learning (ICML)*, pp. 511–520. PMLR, 2021.
- 555  
556 Dimitri P Bertsekas. Nonlinear programming. *Journal of the Operational Research Society*, 48(3):  
557 334–334, 1997.
- 558 Jose Blanchet, Miao Lu, Tong Zhang, and Han Zhong. Double pessimism is provably efficient  
559 for distributionally robust offline reinforcement learning: Generic algorithm and robust partial  
560 coverage. *arXiv preprint arXiv:2305.09659*, 2023.
- 561  
562 Greg Brockman, Vicki Cheung, Ludwig Pettersson, Jonas Schneider, John Schulman, Jie Tang, and  
563 Wojciech Zaremba. OpenAI Gym. *arXiv preprint arXiv:1606.01540*, 2016.
- 564 Jinglin Chen and Nan Jiang. Information-theoretic considerations in batch reinforcement learning. In  
565 *International Conference on Machine Learning*, pp. 1042–1051. PMLR, 2019.
- 566  
567 Esther Derman, Matthieu Geist, and Shie Mannor. Twice regularized MDPs and the equivalence  
568 between robustness and regularization. In *Proc. Advances in Neural Information Processing*  
569 *Systems (NeurIPS)*, 2021.
- 570 Jing Dong, Jingwei Li, Baoxiang Wang, and Jingzhao Zhang. Online policy optimization for robust  
571 mdp. *arXiv preprint arXiv:2209.13841*, 2022.
- 572  
573 Yaqi Duan, Zeyu Jia, and Mengdi Wang. Minimax-optimal off-policy evaluation with linear function  
574 approximation. In *Proc. International Conference on Machine Learning (ICML)*, pp. 2701–2709.  
575 PMLR, 2020.
- 576 Amir Massoud Farahmand, Rémi Munos, and Csaba Szepesvári. Error propagation for approximate  
577 policy and value iteration. In *Advances in Neural Information Processing Systems*, 2010.
- 578  
579 David A Freedman. On tail probabilities for martingales. *the Annals of Probability*, pp. 100–118,  
580 1975.
- 581 Justin Fu, Aviral Kumar, Ofir Nachum, George Tucker, and Sergey Levine. D4RL: Datasets for deep  
582 data-driven reinforcement learning. *arXiv preprint arXiv:2004.07219*, 2020.
- 583  
584 Scott Fujimoto, David Meger, and Doina Precup. Off-policy deep reinforcement learning without  
585 exploration. In *International Conference on Machine Learning*, pp. 2052–2062. PMLR, 2019.
- 586 Seyed Kamyar Seyed Ghasemipour, Dale Schuurmans, and Shixiang Shane Gu. Emaq: Expected-max  
587 q-learning operator for simple yet effective offline and online rl. In *International Conference on*  
588 *Machine Learning*, pp. 3682–3691. PMLR, 2021.
- 589 Caglar Gulcehre, Ziyu Wang, Alexander Novikov, Tom Le Paine, Sergio Gómez Colmenarejo, Konrad  
590 Zolna, Rishabh Agarwal, Josh Merel, Daniel Mankowitz, Cosmin Paduraru, et al. RL unplugged:  
591 Benchmarks for offline reinforcement learning. *arXiv preprint arXiv:2006.13888*, 2020.
- 592  
593 Garud N Iyengar. Robust dynamic programming. *Mathematics of Operations Research*, 30(2):  
257–280, 2005.

- 594 Nan Jiang. On value functions and the agent-environment boundary. *arXiv preprint arXiv:1905.13341*,  
595 2019.
- 596
- 597 Nan Jiang and Jiawei Huang. Minimax value interval for off-policy evaluation and policy optimization.  
598 *Advances in Neural Information Processing Systems*, 33:2747–2758, 2020.
- 599
- 600 Chi Jin, Zeyuan Allen-Zhu, Sebastien Bubeck, and Michael I Jordan. Is Q-learning provably efficient?  
601 In *Proceedings of the 32nd International Conference on Neural Information Processing Systems*,  
602 pp. 4868–4878, 2018.
- 603 Ying Jin, Zhuoran Yang, and Zhaoran Wang. Is pessimism provably efficient for offline RL? In  
604 *International Conference on Machine Learning*, pp. 5084–5096, 2021.
- 605
- 606 Taylan Kabbani and Ekrem Duman. Deep reinforcement learning approach for trading automation in  
607 the stock market. *IEEE Access*, 10:93564–93574, 2022.
- 608
- 609 B Ravi Kiran, Ibrahim Sobh, Victor Talpaert, Patrick Mannion, Ahmad A Al Sallab, Senthil Yogamani,  
610 and Patrick Pérez. Deep reinforcement learning for autonomous driving: A survey. *IEEE*  
611 *Transactions on Intelligent Transportation Systems*, 23(6):4909–4926, 2021.
- 612
- 613 Ilya Kostrikov, Ashvin Nair, and Sergey Levine. Offline reinforcement learning with implicit  
614 q-learning. *arXiv preprint arXiv:2110.06169*, 2021.
- 615
- 616 Aviral Kumar, Justin Fu, George Tucker, and Sergey Levine. Stabilizing off-policy Q-learning via  
617 bootstrapping error reduction. *arXiv preprint arXiv:1906.00949*, 2019.
- 618
- 619 Aviral Kumar, Aurick Zhou, George Tucker, and Sergey Levine. Conservative Q-learning for offline  
620 reinforcement learning. *arXiv preprint arXiv:2006.04779*, 2020.
- 621
- 622 Navdeep Kumar, Kfir Levy, Kaixin Wang, and Shie Mannor. An efficient solution to s-rectangular  
623 robust markov decision processes. *arXiv preprint arXiv:2301.13642*, 2023.
- 624
- 625 Sascha Lange, Thomas Gabel, and Martin Riedmiller. Batch reinforcement learning. In *Reinforcement*  
626 *learning*, pp. 45–73. Springer, 2012.
- 627
- 628 Romain Laroche, Paul Trichelair, and Remi Tachet Des Combes. Safe policy improvement with  
629 baseline bootstrapping. In *International Conference on Machine Learning*, pp. 3652–3661. PMLR,  
630 2019.
- 631
- 632 Sergey Levine, Aviral Kumar, George Tucker, and Justin Fu. Offline reinforcement learning: Tutorial,  
633 review, and perspectives on open problems. *arXiv preprint arXiv:2005.01643*, 2020.
- 634
- 635 Gen Li, Yuting Wei, Yuejie Chi, Yuantao Gu, and Yuxin Chen. Breaking the sample size barrier  
636 in model-based reinforcement learning with a generative model. In *Proc. Advances in Neural*  
637 *Information Processing Systems (NeurIPS)*, volume 33, 2020.
- 638
- 639 Gen Li, Laixi Shi, Yuxin Chen, Yuantao Gu, and Yuejie Chi. Breaking the sample complexity barrier  
640 to regret-optimal model-free reinforcement learning. *Advances in Neural Information Processing*  
641 *Systems*, 34, 2021.
- 642
- 643 Gen Li, Laixi Shi, Yuxin Chen, Yuejie Chi, and Yuting Wei. Settling the sample complexity of  
644 model-based offline reinforcement learning. *in preparation*, 2022.
- 645
- 646 Peng Liao, Zhengling Qi, and Susan Murphy. Batch policy learning in average reward Markov  
647 decision processes. *arXiv preprint arXiv:2007.11771*, 2020.
- 648
- 649 Boyi Liu, Qi Cai, Zhuoran Yang, and Zhaoran Wang. Neural trust region/proximal policy optimization  
650 attains globally optimal policy. In *Proc. Advances in Neural Information Processing Systems*  
651 *(NeurIPS)*, 2019.
- 652
- 653 Ruo-Ze Liu, Zhen-Jia Pang, Zhou-Yu Meng, Wenhai Wang, Yang Yu, and Tong Lu. On efficient  
654 reinforcement learning for full-length game of starcraft ii. *Journal of Artificial Intelligence*  
655 *Research*, 75:213–260, 2022a.

- 648 Xiao-Yin Liu, Xiao-Hu Zhou, Guo-Tao Li, Hao Li, Mei-Jiang Gui, Tian-Yu Xiang, De-Xing Huang,  
649 and Zeng-Guang Hou. Micro: Model-based offline reinforcement learning with a conservative  
650 bellman operator. *arXiv preprint arXiv:2312.03991*, 2023.
- 651 Yao Liu, Adith Swaminathan, Alekh Agarwal, and Emma Brunskill. Provably good batch reinforce-  
652 ment learning without great exploration. *arXiv preprint arXiv:2007.08202*, 2020.
- 653  
654 Zhishuai Liu and Pan Xu. Distributionally robust off-dynamics reinforcement learning: Provable  
655 efficiency with linear function approximation. *arXiv preprint arXiv:2402.15399*, 2024a.
- 656  
657 Zhishuai Liu and Pan Xu. Minimax optimal and computationally efficient algorithms for distribution-  
658 ally robust offline reinforcement learning. *arXiv preprint arXiv:2403.09621*, 2024b.
- 659 Zijian Liu, Qinxun Bai, Jose Blanchet, Perry Dong, Wei Xu, Zhengqing Zhou, and Zhengyuan  
660 Zhou. Distributionally robust Q-learning. In *International Conference on Machine Learning*, pp.  
661 13623–13643. PMLR, 2022b.
- 662  
663 Miao Lu, Han Zhong, Tong Zhang, and Jose Blanchet. Distributionally robust reinforcement learning  
664 with interactive data collection: Fundamental hardness and near-optimal algorithm. *arXiv preprint*  
665 *arXiv:2404.03578*, 2024.
- 666 Xiaoteng Ma, Zhipeng Liang, Jose Blanchet, Mingwen Liu, Li Xia, Jiheng Zhang, Qianchuan Zhao,  
667 and Zhengyuan Zhou. Distributionally robust offline reinforcement learning with linear function  
668 approximation. *arXiv preprint arXiv:2209.06620*, 2022.
- 669  
670 Rémi Munos. Error bounds for approximate value iteration. In *Proceedings of the National Conference*  
671 *on Artificial Intelligence*, volume 20, pp. 1006. Menlo Park, CA; Cambridge, MA; London; AAAI  
672 Press; MIT Press; 1999, 2005.
- 673  
674 Arnab Nilim and Laurent El Ghaoui. Robustness in Markov decision problems with uncertain  
675 transition matrices. In *Proc. Advances in Neural Information Processing Systems (NIPS)*, pp.  
676 839–846, 2004.
- 677  
678 Kishan Panaganti and Dileep Kalathil. Sample complexity of robust reinforcement learning with  
679 a generative model. In *International Conference on Artificial Intelligence and Statistics*, pp.  
680 9582–9602. PMLR, 2022.
- 681  
682 Kishan Panaganti, Zaiyan Xu, Dileep Kalathil, and Mohammad Ghavamzadeh. Robust reinforcement  
683 learning using offline data. *arXiv preprint arXiv:2208.05129*, 2022.
- 684  
685 Lerrel Pinto, James Davidson, Rahul Sukthankar, and Abhinav Gupta. Robust adversarial reinforce-  
686 ment learning. In *Proc. International Conference on Machine Learning (ICML)*, pp. 2817–2826.  
687 PMLR, 2017.
- 688  
689 Paria Rashidinejad, Banghua Zhu, Cong Ma, Jiantao Jiao, and Stuart Russell. Bridging offline rein-  
690 forcement learning and imitation learning: A tale of pessimism. *Advances in Neural Information*  
691 *Processing Systems*, 34:11702–11716, 2021.
- 692  
693 Stephane Ross and J Andrew Bagnell. Agnostic system identification for model-based reinforcement  
694 learning. *arXiv preprint arXiv:1203.1007*, 2012.
- 695  
696 Bruno Scherrer. Approximate policy iteration schemes: A comparison. In *Proc. International*  
697 *Conference on Machine Learning (ICML)*, pp. 1314–1322, 2014.
- 698  
699 Laixi Shi and Yuejie Chi. Distributionally robust model-based offline reinforcement learning with  
700 near-optimal sample complexity. *arXiv preprint arXiv:2208.05767*, 2022.
- 701  
702 Laixi Shi, Gen Li, Yuting Wei, Yuxin Chen, and Yuejie Chi. Pessimistic Q-learning for offline  
703 reinforcement learning: Towards optimal sample complexity. *International Conference on Machine*  
704 *Learning*, pp. 19967–20025, 2022.
- 705  
706 Laixi Shi, Gen Li, Yuting Wei, Yuxin Chen, Matthieu Geist, and Yuejie Chi. The curious price  
707 of distributional robustness in reinforcement learning with a generative model. *arXiv preprint*  
708 *arXiv:2305.16589*, 2023.

- 702 Noah Y Siegel, Jost Tobias Springenberg, Felix Berkenkamp, Abbas Abdolmaleki, Michael Neunert,  
703 Thomas Lampe, Roland Hafner, and Martin Riedmiller. Keep doing what worked: Behavioral  
704 modelling priors for offline reinforcement learning. *arXiv preprint arXiv:2002.08396*, 2020.  
705
- 706 Richard S Sutton and Andrew G Barto. *Reinforcement learning: An introduction*. MIT press, 2018.  
707
- 708 Masatoshi Uehara and Wen Sun. Pessimistic model-based offline reinforcement learning under partial  
709 coverage. *arXiv preprint arXiv:2107.06226*, 2021.
- 710 Masatoshi Uehara, Jiawei Huang, and Nan Jiang. Minimax weight and Q-function learning for off-  
711 policy evaluation. In *Proc. International Conference on Machine Learning (ICML)*, pp. 9659–9668.  
712 PMLR, 2020.
- 713 He Wang, Laixi Shi, and Yuejie Chi. Sample complexity of offline distributionally robust linear  
714 markov decision processes. *arXiv preprint arXiv:2403.12946*, 2024a.  
715
- 716 Lingxiao Wang, Qi Cai, Zhuoran Yang, and Zhaoran Wang. Neural policy gradient methods: Global  
717 optimality and rates of convergence. In *International Conference on Learning Representations*,  
718 2019.
- 719 Qiu hao Wang, Chin Pang Ho, and Marek Petrik. Policy gradient in robust mdps with global  
720 convergence guarantee, 2023a.  
721
- 722 Shengbo Wang, Nian Si, Jose Blanchet, and Zhengyuan Zhou. A finite sample complexity bound  
723 for distributionally robust q-learning. In *International Conference on Artificial Intelligence and*  
724 *Statistics*, pp. 3370–3398. PMLR, 2023b.
- 725 Shengbo Wang, Nian Si, Jose Blanchet, and Zhengyuan Zhou. Sample complexity of variance-reduced  
726 distributionally robust q-learning. *arXiv preprint arXiv:2305.18420*, 2023c.  
727
- 728 Yuanhao Wang, Kefan Dong, Xiaoyu Chen, and Liwei Wang. Q-learning with UCB exploration is  
729 sample efficient for infinite-horizon MDP. In *International Conference on Learning Representa-*  
730 *tions*, 2020.
- 731 Yue Wang and Shaofeng Zou. Finite-sample analysis of Greedy-GQ with linear function approxi-  
732 mation under Markovian noise. In *Proc. International Conference on Uncertainty in Artificial*  
733 *Intelligence (UAI)*, pp. 11–20. PMLR, 2020.
- 734 Yue Wang and Shaofeng Zou. Online robust reinforcement learning with model uncertainty. In *Proc.*  
735 *Advances in Neural Information Processing Systems (NeurIPS)*, volume 34, pp. 7193–7206, 2021.  
736
- 737 Yue Wang and Shaofeng Zou. Policy gradient method for robust reinforcement learning. In *Proc.*  
738 *International Conference on Machine Learning (ICML)*, volume 162, pp. 23484–23526. PMLR,  
739 2022.
- 740 Yue Wang, Alvaro Velasquez, George K Atia, Ashley Prater-Bennette, and Shaofeng Zou. Model-free  
741 robust average-reward reinforcement learning. In *International Conference on Machine Learning*,  
742 pp. 36431–36469. PMLR, 2023d.  
743
- 744 Yue Wang, Jinjun Xiong, and Shaofeng Zou. Achieving the asymptotically minimax optimal sample  
745 complexity of offline reinforcement learning: A DRO-based approach. *Transactions on Machine*  
746 *Learning Research*, 2024b. ISSN 2835-8856. URL <https://openreview.net/forum?id=Y7FbGcjOuD>.  
747
- 748 Hua Wei, Jingxiao Chen, Xiyang Ji, Hongyang Qin, Minwen Deng, Siqin Li, Liang Wang, Weinan  
749 Zhang, Yong Yu, Liu Linc, et al. Honor of kings arena: an environment for generalization in  
750 competitive reinforcement learning. *Advances in Neural Information Processing Systems*, 35:  
751 11881–11892, 2022.
- 752 Wolfram Wiesemann, Daniel Kuhn, and Berç Rustem. Robust Markov decision processes. *Mathe-*  
753 *matics of Operations Research*, 38(1):153–183, 2013.  
754
- 755 Yifan Wu, George Tucker, and Ofir Nachum. Behavior regularized offline reinforcement learning.  
*arXiv preprint arXiv:1911.11361*, 2019.

- 756 Tengyang Xie and Nan Jiang. Batch value-function approximation with only realizability. *arXiv*  
757 *preprint arXiv:2008.04990*, 2020.  
758
- 759 Tengyang Xie and Nan Jiang. Batch value-function approximation with only realizability. In  
760 *International Conference on Machine Learning*, pp. 11404–11413. PMLR, 2021.  
761
- 762 Tengyang Xie, Ching-An Cheng, Nan Jiang, Paul Mineiro, and Alekh Agarwal. Bellman-consistent  
763 pessimism for offline reinforcement learning. *arXiv preprint arXiv:2106.06926*, 2021a.  
764
- 765 Tengyang Xie, Nan Jiang, Huan Wang, Caiming Xiong, and Yu Bai. Policy finetuning: Bridg-  
766 ing sample-efficient offline and online reinforcement learning. *Advances in neural information*  
767 *processing systems*, 34:27395–27407, 2021b.
- 768 Huan Xu and Shie Mannor. Distributionally robust Markov decision processes. In *Proc. Advances in*  
769 *Neural Information Processing Systems (NIPS)*, pp. 2505–2513, 2010.  
770
- 771 Huan Xu, Constantine Caramanis, and Sujay Sanghavi. Robust pca via outlier pursuit. In *Advances*  
772 *in Neural Information Processing Systems*, pp. 2496–2504, 2010.  
773
- 774 Zaiyan Xu, Kishan Panaganti, and Dileep Kalathil. Improved sample complexity bounds for distribu-  
775 tionally robust reinforcement learning. In *International Conference on Artificial Intelligence and*  
776 *Statistics*, pp. 9728–9754. PMLR, 2023.
- 777 Yuling Yan, Gen Li, Yuxin Chen, and Jianqing Fan. The efficacy of pessimism in asynchronous  
778 Q-learning. *arXiv preprint arXiv:2203.07368*, 2022.
- 779 Rui Yang, Chenjia Bai, Xiaoteng Ma, Zhaoran Wang, Chongjie Zhang, and Lei Han. Rorl: Robust  
780 offline reinforcement learning via conservative smoothing. *Advances in neural information*  
781 *processing systems*, 35:23851–23866, 2022.  
782
- 783 Rui Yang, Han Zhong, Jiawei Xu, Amy Zhang, Chongjie Zhang, Lei Han, and Tong Zhang.  
784 Towards robust offline reinforcement learning under diverse data corruption. *arXiv preprint*  
785 *arXiv:2310.12955*, 2023.
- 786
- 787 Wenhao Yang, Liangyu Zhang, and Zhihua Zhang. Towards theoretical understandings of robust  
788 Markov decision processes: Sample complexity and asymptotics. *arXiv preprint arXiv:2105.03863*,  
789 2021.
- 790 Ming Yin and Yu-Xiang Wang. Optimal uniform ope and model-based offline reinforcement learning  
791 in time-homogeneous, reward-free and task-agnostic settings. *arXiv preprint arXiv:2105.06029*,  
792 2021a.  
793
- 794 Ming Yin and Yu-Xiang Wang. Towards instance-optimal offline reinforcement learning with  
795 pessimism. *Advances in neural information processing systems*, 34, 2021b.
- 796
- 797 Ming Yin, Yu Bai, and Yu-Xiang Wang. Near-optimal provable uniform convergence in offline policy  
798 evaluation for reinforcement learning. In *International Conference on Artificial Intelligence and*  
799 *Statistics*, pp. 1567–1575. PMLR, 2021a.
- 800
- 801 Ming Yin, Yu Bai, and Yu-Xiang Wang. Near-optimal offline reinforcement learning via double  
802 variance reduction. *arXiv preprint arXiv:2102.01748*, 2021b.
- 803
- 804 Chao Yu, Jiming Liu, Shamim Nemati, and Guosheng Yin. Reinforcement learning in healthcare: A  
805 survey. *ACM Computing Surveys (CSUR)*, 55(1):1–36, 2021.
- 806
- 807
- 808 Wenhao Zhan, Baihe Huang, Audrey Huang, Nan Jiang, and Jason D Lee. Offline reinforcement  
809 learning with realizability and single-policy concentrability. *arXiv preprint arXiv:2202.04634*,  
2022.

810 Baohe Zhang, Raghu Rajan, Luis Pineda, Nathan Lambert, André Biedenkapp, Kurtland Chua, Frank  
811 Hutter, and Roberto Calandra. On the importance of hyperparameter optimization for model-based  
812 reinforcement learning. In *International Conference on Artificial Intelligence and Statistics*, pp.  
813 4015–4023. PMLR, 2021a.

814 Junyu Zhang, Alec Koppel, Amrit Singh Bedi, Csaba Szepesvari, and Mengdi Wang. Variational  
815 policy gradient method for reinforcement learning with general utilities. In *Proc. Advances in  
816 Neural Information Processing Systems (NeurIPS)*, volume 33, pp. 4572–4583, 2020.

817 Xuezhou Zhang, Yiding Chen, Xiaojin Zhu, and Wen Sun. Robust policy gradient against strong data  
818 corruption. In *International Conference on Machine Learning*, pp. 12391–12401. PMLR, 2021b.

819 Xuezhou Zhang, Yiding Chen, Xiaojin Zhu, and Wen Sun. Corruption-robust offline reinforcement  
820 learning. In *International Conference on Artificial Intelligence and Statistics*, pp. 5757–5773.  
821 PMLR, 2022.

822 Wenshuai Zhao, Jorge Peña Queraltá, and Tomi Westerlund. Sim-to-real transfer in deep reinforce-  
823 ment learning for robotics: a survey. In *2020 IEEE symposium series on computational intelligence  
824 (SSCI)*, pp. 737–744. IEEE, 2020.

825 Zhengqing Zhou, Qinxun Bai, Zhengyuan Zhou, Linhai Qiu, Jose Blanchet, and Peter Glynn. Finite-  
826 sample regret bound for distributionally robust offline tabular reinforcement learning. In *Proc.  
827 International Conference on Artificial Intelligence and Statistics (AISTATS)*, pp. 3331–3339. PMLR,  
828 2021.

829  
830  
831  
832  
833  
834  
835  
836  
837  
838  
839  
840  
841  
842  
843  
844  
845  
846  
847  
848  
849  
850  
851  
852  
853  
854  
855  
856  
857  
858  
859  
860  
861  
862  
863



## A EXPERIMENTAL SETUP OF SECTION 8

### A.1 GARNET PROBLEMS

For simulated MDP environments, we implement Algorithm 3 on Garnet problems  $\mathcal{G}(20, 30, 20)$ ,  $\mathcal{G}(30, 50, 30)$  and  $\mathcal{G}(50, 100, 50)$ . Here, the branch number denotes the number of states that can be achieved after taking an action. The uncertainty radius  $R_{s,a}$  is randomly drawn from a uniform distribution ranging from 0.1 to 0.5 for all state-action pairs. The true robust expected values for the Garnet problems, over a certain state distribution, can be obtained via the model-based robust value iteration method. For each problem, we first generate a stochastic behavior policy with partial coverage over state-action pairs. To obtain a near-optimal stochastic behavior policy, we compute the Q-values for the nominal kernel, and adopt a softmax transformation to assign probabilities for all state-action pairs. The randomness (i.e., optimality) of the behavior policy is controlled via temperature parameter  $t_b = 1$ . State-action pairs with probabilities  $P_{s,a} \leq 0.03$  (for  $\mathcal{G}(20, 30, 20)$ ),  $P_{s,a} \leq 0.02$  (for  $\mathcal{G}(30, 50, 30)$ ) and  $P_{s,a} \leq 0.01$  (for  $\mathcal{G}(50, 100, 50)$ ) are then excluded to achieve partial coverage. Finally, non-zero elements are re-normalized to maintain a valid probability distribution. By deploying the behavior policy on the nominal kernel, 10 datasets are generated at each dataset size from  $T = 1000$  to  $T = 20000$ . We compared the double-pessimism method with the single-pessimism method in (Yan et al., 2022). We set  $\gamma = 0.95$ ,  $C_b = 1 \times 10^{-4}$  and  $\delta = 0.02$ .

### A.2 CLASSIC CONTROL PROBLEMS

Note in the Classic Control problems, the underlying uncertain environments may not be modeled using our perturbation-based uncertainty set in equation 8, but we can still implement our algorithms to enhance the robustness. We generate the dataset according to a random behavior policy, and implement Algorithm 3 with the radius  $R = \tau$ . In our experiments, we set  $\gamma = 0.95$ ,  $C_b = 1 \times 10^{-4}$  and  $\delta = 0.02$ . After a policy is learned, we test its performance under a perturbed environment with the parameter randomly generated from  $[-\tau, \tau]$  for 800 times, and plot the average performance among them.

## B ADDITIONAL EXPERIMENT RESULTS

### B.1 COMPARISONS IN TABULAR ENVIRONMENTS

In this section, we include additional experiment results under three simulated environments. Specifically, we consider the Frozen-Lake and Taxi environments from OpenAI Gym (Brockman et al., 2016), and the American Option problem (Panaganti et al., 2022; Shi & Chi, 2022; Zhou et al., 2021). The transition dynamics of these environments can be directly controlled, and we construct  $l_\infty$ -norm uncertainty sets centered at their nominal kernels. Similarly, we trained our double-pessimism Q-learning together with the single-pessimism baseline, and plotted the optimality gap between the learned and optimal robust value functions. As the results in Figure 3 show, our double-pessimism Q-learning effectively obtains the optimal robust policy, whereas the single-pessimism Q-learning only achieves sub-optimal performance. The results hence indicate that our additional pessimism effectively enhances robustness against model uncertainty, verifying our theoretical results.

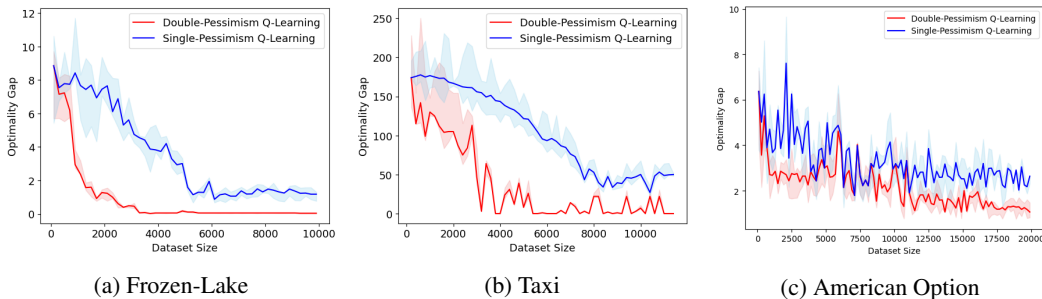


Figure 3: Optimality gaps under different Gym environments.

## B.2 SCALABLE ALGORITHM WITH FUNCTION APPROXIMATION: DOUBLE-PESSIMISM CQL

In this section, we extend the evaluation of our double-pessimism framework to large-scale problems using function approximation techniques. The algorithms presented earlier (Algorithm 1, Algorithm 3), while model-free, are designed for tabular settings and require memory space of  $\mathcal{O}(SA)$  for the  $Q$ -table, making them less efficient for large-scale applications. To improve scalability, replacing the  $Q$ -table with low-dimensional function approximations (e.g., neural networks) to reduce memory costs is a widely adopted approach. On the other hand, existing offline RL algorithms like Conservative Q-learning (CQL, Kumar et al. (2020)) and Implicit Q-learning (IQL, Kostrikov et al. (2021)), along with others (Ross & Bagnell, 2012; Laroche et al., 2019; Fujimoto et al., 2019; Kumar et al., 2019; Agarwal et al., 2020b; Liu et al., 2020; Jin et al., 2021; Xie et al., 2021a; Yin et al., 2021a; Rashidinejad et al., 2021; Xie & Jiang, 2021; Jiang & Huang, 2020), have focused solely on offline RL **without model mismatch**, resulting in degraded performance when model mismatch is present.

Aiming to enhance both robustness and scalability, we design and evaluate a double-pessimism CQL algorithm, demonstrating that our framework is not limited to tabular settings but can also be integrated with function approximation or deep RL techniques, significantly improving robustness against model mismatch. Specifically, in CQL, the approximated  $Q$ -function is obtained by

$$\widehat{Q}_{\text{CQL}}^{\pi} := \arg \min_Q \left\{ \underbrace{\alpha \cdot \left( \mathbb{E}_{s \sim \mathcal{D}, a \sim \mu(a|s)} [Q(s, a)] - \mathbb{E}_{s \sim \mathcal{D}, a \sim \widehat{\pi}_{\beta}(a|s)} [Q(s, a)] \right)}_{\text{Pessimism for dataset}} \right. \quad (24)$$

$$\left. + \underbrace{\frac{1}{2} \mathbb{E}_{s, a, s' \sim \mathcal{D}} \left[ \left( Q - \widehat{\mathcal{B}}^{\pi} Q \right)^2 \right]}_{\text{Non-robust Bellman error}} \right\}. \quad (25)$$

Here, the first term is introduced to adopt the pessimism principle for the limited dataset (without model mismatch), and the second term is the standard Bellman error to approximate the  $Q$  functions. To further introduce another pessimism for the model mismatch, we modify the loss term to:

$$\widehat{Q}_{\text{CQL, double}}^{\pi} := \arg \min_Q \left\{ \underbrace{\alpha \cdot \left( \mathbb{E}_{s \sim \mathcal{D}, a \sim \mu(a|s)} [Q(s, a)] - \mathbb{E}_{s \sim \mathcal{D}, a \sim \widehat{\pi}_{\beta}(a|s)} [Q(s, a)] \right)}_{\text{Pessimism for dataset}} \right. \quad (26)$$

$$\left. + \underbrace{\frac{1}{2} \mathbb{E}_{s, a, s' \sim \mathcal{D}} \left[ \left( Q - \widehat{\mathcal{B}}^{\pi} Q - \gamma \kappa(Q) \right)^2 \right]}_{\text{Robust Bellman error, Pessimism for mismatch}} \right\}, \quad (27)$$

where we introduce a model mismatch penalty term to the second error term to take model mismatch into consideration. Specifically,  $\widehat{\mathcal{B}}^{\pi} Q - \gamma \kappa(Q)$  is the estimation of the robust Bellman operator. Based on this construction, we can similarly design a double-pessimism CQL algorithm, from which enhanced robustness is expected.

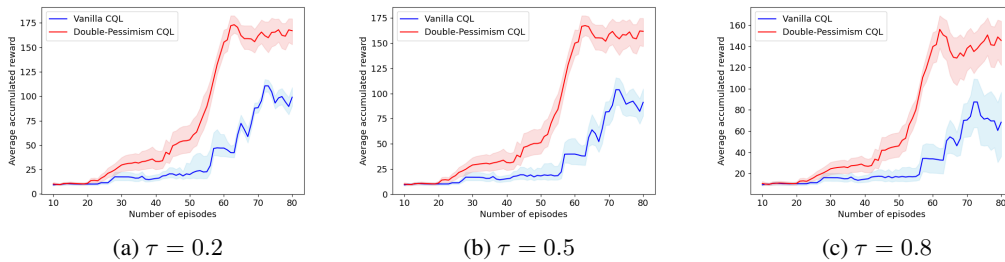


Figure 4: Double-Pessimism CQL vs. Vanilla CQL under CartPole.

To validate the effectiveness of our double-pessimism principle, we compare our double-pessimism CQL with the vanilla single-pessimism CQL under two environments: CartPole from OpenAI Gym and Halfcheetah-medium-v2 from D4RL benchmark Fu et al. (2020). Both policies are trained in

972  
973  
974  
975  
976  
977  
978  
979  
980  
981  
982  
983  
984  
985  
986  
987  
988  
989  
990  
991  
992  
993  
994  
995  
996  
997  
998  
999  
1000  
1001  
1002  
1003  
1004  
1005  
1006  
1007  
1008  
1009  
1010  
1011  
1012  
1013  
1014  
1015  
1016  
1017  
1018  
1019  
1020  
1021  
1022  
1023  
1024  
1025

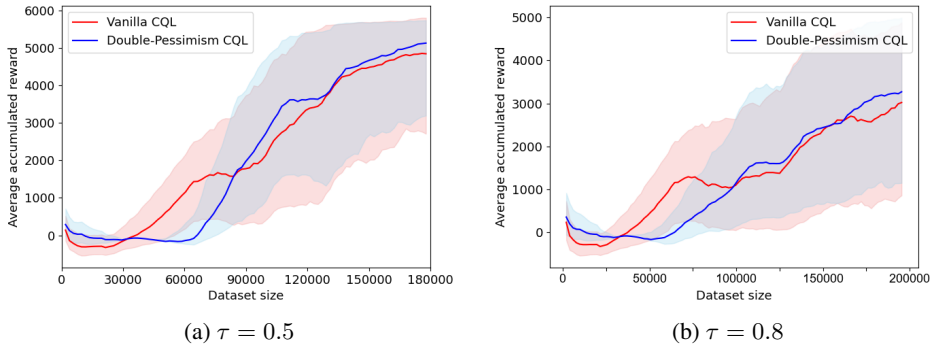


Figure 5: Double-Pessimism CQL vs. Vanilla CQL under Halfcheetah-medium-v2.

nominal environments and evaluated in randomly perturbed environments (perturbation radius  $\tau$ ) over 800 trials. The results, shown in Figure 4 and Figure 5, display the average performance as solid curves, with envelopes representing standard deviations.

As the results indicate, our double-pessimism CQL consistently outperforms the vanilla CQL in perturbed environments, demonstrating enhanced robustness. This experiment confirms the universal applicability of our double-pessimism framework in improving robustness, regardless of the specific algorithm used. It also highlights the scalability of our approach, which can be integrated with advanced deep offline RL algorithms for large-scale problems using function approximation.

### B.3 ABLATION EXPERIMENTS

Our double-pessimism principle addresses two key challenges: the first component tackles the limited dataset coverage in offline RL to handle out-of-distribution issues, while the second addresses model mismatch between the data generation and deployment environments.

In this section, we conduct ablation experiments to evaluate the effectiveness of this principle. Specifically, we compare four algorithms in an offline setting: vanilla Q-learning (with zero pessimism), robust Q-learning (with model-mismatch pessimism only), offline non-robust Q-learning (with dataset pessimism only), and our proposed offline robust Q-learning (with double pessimism). The experiments are conducted on two Garnet problems, where we evaluate the robust value functions of the learned policies with respect to an uncertainty set defined by the  $l_\infty$ -norm.

The results are shown in Figure 6. The solid curve represents the average value across 10 independent runs, while the shaded area indicates the maximum and minimum values observed.

Our double-pessimism approach outperforms all four algorithms, including those with a single source of pessimism, demonstrating the effectiveness of our framework. Furthermore, the single-pessimism methods achieve better performance than the vanilla algorithm with no pessimism, highlighting the benefits of incorporating pessimism in offline robust RL. However, both are ultimately outperformed by our double-pessimism method, underscoring the importance of addressing both sources of uncertainty through the double-pessimism principle.

## C FURTHER DISCUSSION OF $\kappa$

### C.1 A UNIVERSAL CONSTRUCTION OF $\kappa$

In this section, we discuss the design of the penalty function  $\kappa$  for universal uncertainty set models defined by some distribution divergence/distance functions  $F(\cdot||\cdot)$ :

$$\mathcal{P} = \{P + q \in \Delta(\mathcal{S}) : F(P + q||P) \leq R\}. \tag{28}$$

Note that this uncertainty set includes perturbed environments within a region centered around the nominal kernel, effectively modeling environmental uncertainty in practical applications. This is

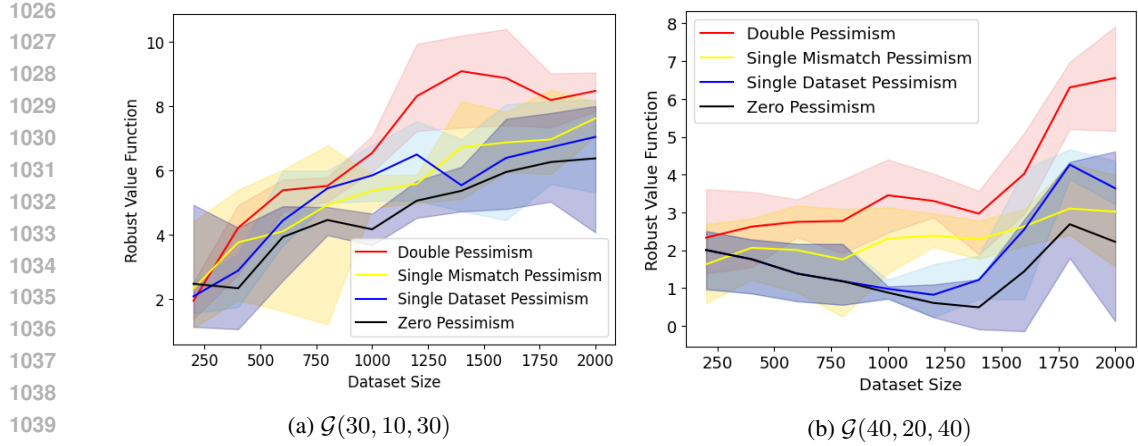


Figure 6: Robust value functions in Garnet problems.

because, in practice, perturbed environments should not deviate significantly from the nominal kernel and should therefore fall within a defined region.

We first present the following theorem for a universal construction of the penalty function  $\kappa$ .

**Theorem 4.** Let  $\kappa(V)$  be the optimal value of the following constrained problem:

$$\max_q - \sum q_i V_i, \quad \text{s.t.} \quad \sum_i q_i = 0, \quad F(P + q || P) \leq R. \quad (29)$$

Then,  $\kappa(V)$  satisfies equation 15, i.e.,

$$PV - \kappa(V) \leq \sigma_{\mathcal{P}}(V). \quad (30)$$

*Proof.* Note that the problem in equation 29 is equivalent to the problem

$$\max_{q \in \mathcal{Q}} -qV, \quad \text{where } \mathcal{Q} = \{q \in \mathbb{R}^S, \sum_i q_i = 0, F(P + q || P) \leq R\}. \quad (31)$$

The proof is then straightforward by noting that  $\mathcal{P} \subset \mathcal{Q}$ , hence

$$PV - \kappa(V) \leq \min_{p \in \mathcal{P}} pV = \sigma_{\mathcal{P}}(V). \quad (32)$$

□

Such a result provides a universal construction of the penalty function  $\kappa$ , for the perturbed-based uncertainty set as in equation 28. Note that  $\kappa(V)$  depends on  $P$ , which is unknown in practice, but any unbiased estimation of it is sufficient. To illustrate this and show the generality of our design, we develop a case study for the  $\chi^2$ -divergence uncertainty set in the following section.

## C.2 CASE STUDY: $l_\alpha$ -NORM UNCERTAINTY SET

In this section, we provide a more detailed discussion on the  $l_\alpha$ -norm uncertainty set we focus on.

Adapting the construction to the  $l_\alpha$ -norm model, we obtain the constructions illustrated in Lemma 1: for any  $\alpha$ , set

$$\kappa(V) \triangleq R \min_{w \in \mathbb{R}} \|we - V\|_\beta, \quad (33)$$

with  $\beta = \frac{1}{1-\alpha}$ . For popular choices of  $\alpha$ , the optimization problem in equation 33 has a closed-form solution, specified in Table 2 (Kumar et al., 2023).

Note that for the three choices of  $\alpha = 1, 2, \infty$ , the resulting penalty terms incur a computational complexity of  $\mathcal{O}(S)$ . When combined with our algorithm, this leads to an overall implementation complexity of  $\mathcal{O}(SA)$  per step. In contrast, the model-based methods proposed in (Shi & Chi, 2022; Blanchet et al., 2023) have a computational cost of  $\mathcal{O}(S^2A)$  per step (Kumar et al., 2023), highlighting the superior efficiency and scalability of our approach.

1080  
1081  
1082  
1083  
1084  
1085  
1086  
1087  
1088  
1089  
1090  
1091  
1092  
1093  
1094  
1095  
1096  
1097  
1098  
1099  
1100  
1101  
1102  
1103  
1104  
1105  
1106  
1107  
1108  
1109  
1110  
1111  
1112  
1113  
1114  
1115  
1116  
1117  
1118  
1119  
1120  
1121  
1122  
1123  
1124  
1125  
1126  
1127  
1128  
1129  
1130  
1131  
1132  
1133

$\alpha$	$\kappa(v)$
$\infty$	$\frac{\max_s v(s) - \min_s v(s)}{2}$
2	$\sqrt{\sum_s \left( v(s) - \frac{\sum_s v(s)}{S} \right)^2}$
1	$\sum_{i=1}^{\lfloor (S+1)/2 \rfloor} v(s_i) - \sum_{i=\lfloor (S+1)/2 \rfloor}^S v(s_i)$

Table 2: Penalty term for  $l_\alpha$ -norm uncertainty set

### C.3 CASE STUDY: $\chi^2$ UNCERTAINTY SET

We adapt the construction we obtained to the widely used  $\chi^2$ -divergence as a case study. The design of  $\kappa$  for other uncertainty sets can be obtained in a similar way.

Specifically, the uncertainty defined for the  $(s, a)$ -pair is

$$\mathcal{P}_{s,a} = \{P_{s,a} + q \in \Delta(\mathcal{S}) : D_{\chi^2}(P_{s,a} + q || P_{s,a}) \leq R_{s,a}\}, \quad (34)$$

where  $D_{\chi^2}(p||q) = \sum_i \frac{(p_i - q_i)^2}{q_i}$  is the  $\chi^2$ -divergence. We aim to design a model-free function  $\kappa$  that serves as the penalty term to address the uncertainty from the model mismatch.

We first establish the following lemma.

**Lemma 5.** *The constrained problem*

$$\min_q \sum_i q_i V_i, \text{ s.t. } \sum_i q_i = 0, D_{\chi^2}(q + P_{s,a} || P_{s,a}) \leq R_{s,a} \quad (35)$$

has the solution

$$-\sqrt{R_{s,a} \text{Var}_{P_{s,a}}(V)}. \quad (36)$$

*Proof.* To simplify the notation, we omit the subscript  $s, a$  from  $P_{s,a}$  and  $R_{s,a}$ . We note that if any entry  $P_i = 0$ , then any feasible  $q_i = 0$ , otherwise the  $\chi^2$ -divergence will be infinite. Thus, we can simply ignore the  $i$ -th entry in this case and only consider the remaining ones. Hence, we assume  $P_i > 0, \forall i$  without loss of generality.

Note that the condition  $D_{\chi^2}(q + P || P) \leq R$  is equivalent to

$$\sum_i \frac{q_i^2}{P_i} \leq R, \quad (37)$$

hence the Lagrangian function  $L$  of the constrained problem is

$$L = \sum_i q_i V_i + \lambda \sum_i q_i + \mu \left( \sum_i \frac{q_i^2}{P_i} - R \right). \quad (38)$$

From the KKT conditions (Bertsekas, 1997), the solution  $q^*$  and the Lagrangian multiplier  $\lambda^*, \mu^*$  must satisfy

$$V_i + \lambda^* + \mu^* \frac{2q_i^*}{P_i} = 0, \forall i. \quad (39)$$

Thus,

$$q_i^* V_i = -\lambda^* q_i^* - 2\mu^* \frac{(q_i^*)^2}{P_i}, \forall i, \quad (40)$$

and hence,

$$\sum_i q_i^* V_i = -2\mu^* \sum_i \frac{(q_i^*)^2}{P_i} = -2\mu^* R, \quad (41)$$

1134 where we use the constraint  $\sum_i q_i^* = 0$  and  $\sum_i \frac{(q_i^*)^2}{P_i} = R$ .

1135 Again, from equation 39, we have that

$$1136 \quad 4(\mu^*)^2 \left( \frac{q_i^*}{P_i} \right)^2 = (V_i + \lambda^*)^2, \quad (42)$$

1137 and hence,

$$1138 \quad \left( \frac{q_i^*}{P_i} \right)^2 = \frac{(V_i + \lambda^*)^2}{4(\mu^*)^2}. \quad (43)$$

1139 Taking the sum over  $i$  implies that

$$1140 \quad \sum_i \frac{(q_i^*)^2}{P_i} = R = \sum P_i \frac{(V_i + \lambda^*)^2}{4(\mu^*)^2}, \quad (44)$$

1141 and hence,

$$1142 \quad 2\mu^* R = \sqrt{R \sum_i P_i (V_i + \lambda^*)^2}. \quad (45)$$

1143 On the other hand, note that equation 39 further implies that

$$1144 \quad 0 = \sum_i P_i V_i + \lambda^* \sum_i P_i, \quad (46)$$

1145 and hence,

$$1146 \quad \lambda^* = - \sum_i P_i V_i. \quad (47)$$

1147 Plugging in equation 45 implies that

$$1148 \quad 2\mu^* R = \sqrt{R \text{Var}_P(V)}. \quad (48)$$

1149 Hence, from equation 41, the optimal solution of the constrained problem is then  $-\sqrt{R \text{Var}_P(V)}$ , which completes the proof.  $\square$

1150 With the optimal solution to equation 35, we can then design the penalty function  $\kappa$  for the  $\chi^2$  uncertainty set defined as in equation 34. Firstly, we note that equation 35 is a relaxation of the support function over equation 34, therefore the optimal solution to equation 35 is not greater than  $\sigma_{\mathcal{P}}(V)$ , and therefore is a pessimistic penalty of the model mismatch. We thus design the penalty function as

$$1151 \quad \kappa(V) = \sum_i P_i V_i - \sqrt{R \text{Var}_P(V)}. \quad (49)$$

1152 We note that in the model-free setting, it is straightforward to obtain an unbiased estimation of  $\kappa$ , which however requires more than 1 sample. Specifically, for  $n$  i.i.d. samples  $(s, a, s'_i), i = 1, \dots, n$ , the model-free penalty function is defined as

$$1153 \quad \kappa(V) = \bar{V} - \sqrt{R} \sqrt{\frac{\sum_{i=1}^n (V(s'_i) - \bar{V})^2}{n-1}}, \quad (50)$$

1154 where  $\bar{V} = \frac{\sum_i V(s'_i)}{n}$ . Such a penalty function satisfies the condition equation 15 of the pessimism principle, and hence we can extend our model-free algorithms to the  $\chi^2$ -divergence model. We present the algorithm for the infinite horizon in Algorithm 2. Different from Algorithm 3, for the  $\chi^2$ -divergence model, we require 2 samples at each step to estimate  $\kappa$ . However, the estimation does not required any information on  $P_{s,a}$  and hence Algorithm 3 is still model-free.

1155 We further validate the effectiveness of our algorithm in optimizing performance under model mismatch in an offline setting through numerical experiments. Specifically, we implemented our algorithm alongside the baseline single-pessimism Q-learning algorithm (Yan et al., 2022) on Garnet

**Algorithm 2** Double-Pessimism Q-Learning for infinite-horizon RMDPs with  $\chi^2$ -divergence uncertainty set.

---

**Input:**  $\mathcal{D}$ , target success probability  $1 - \delta$ ,  $\Gamma = \left\lceil \frac{4}{1-\gamma} \log \frac{ST}{\delta} \right\rceil$   
**Initialize:**  $Q_0(s, a) = 0$ ,  $V_0(s) = 0$ ,  $n_0(s, a) = 0$ ,  $\forall s, a$   
**for**  $t = 1, \dots, T$  **do**  
  Sample 2 samples  $(s_{t-1}, a_{t-1}, s_t^1), (s_{t-1}, a_{t-1}, s_t^2)$  from  $\mathcal{D}$   
   $n_t(s_{t-1}, a_{t-1}) \leftarrow n_{t-1}(s_{t-1}, a_{t-1}) + 2$ ;  $n_t(s, a) \leftarrow n_{t-1}(s, a)$ ,  $\forall (s, a) \neq (s_{t-1}, a_{t-1})$   
   $n \leftarrow n_t(s, a)$ ;  $\eta_n \leftarrow (\Gamma + 1)/(\Gamma + n)$   
   $b_n \leftarrow c_b \sqrt{\frac{\Gamma \log(ST/\delta)}{n(1-\gamma)^2}}$   
   $M \leftarrow \frac{V_{t-1}(s_t^1) + V_{t-1}(s_t^2)}{2}$   
   $\kappa \leftarrow -\sqrt{R_{s_t, a_t} ((V_{t-1}(s_t^1) - M)^2 + (V_{t-1}(s_t^2) - M)^2)}$   
   $Q_t(s_{t-1}, a_{t-1}) = (1 - \eta_n) Q_{t-1}(s_{t-1}, a_{t-1}) + \eta_n \left\{ r(s_{t-1}, a_{t-1}) + \gamma M - \gamma \kappa - b_n \right\}$   
   $Q_t(s, a) = Q_{t-1}(s, a)$  for all  $(s, a) \neq (s_{t-1}, a_{t-1})$   
   $V_t(s_{t-1}) = \max \left\{ \max_{a \in \mathcal{A}} Q_t(s_{t-1}, a), V_{t-1}(s_{t-1}) \right\}$ ,  
   $V_t(s) = V_{t-1}(s)$  for all  $s \neq s_{t-1}$ .  
**end for**  
 $\hat{\pi}(s) = \arg \max_{a \in \mathcal{A}} Q_T(s, a)$ ,  $\forall s$   
**Output:**  $\hat{\pi}$

---

problems with varying parameters, and three simulation environments: Frozen-Lake, Taxi, and American Option. Using datasets of different sizes, we computed the robust value function of the learned policy via dynamic programming (Iyengar, 2005), and plotted the results in Figure 7 and Figure 8. Each curve represents the average over 10 independent runs, with the shaded region indicating the maximum and minimum values. As demonstrated in the results, our double-pessimism Q-learning significantly outperforms the single-pessimism approach, showcasing the robustness of our algorithm to model mismatch and confirming the efficacy of our double-pessimism design.

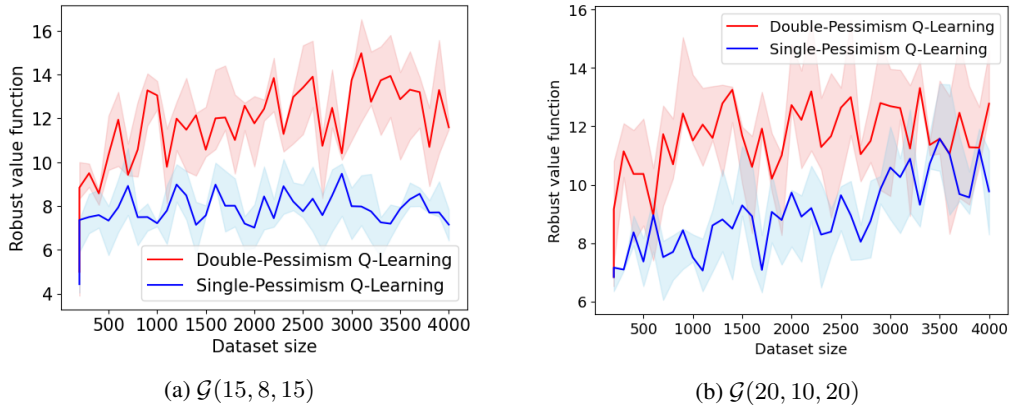


Figure 7: Robust value functions of two Granet problems over  $\chi^2$ -divergence uncertainty set. Solid lines represent the mean values over 10 independent runs. Shaded areas represent the maximum and minimum values.

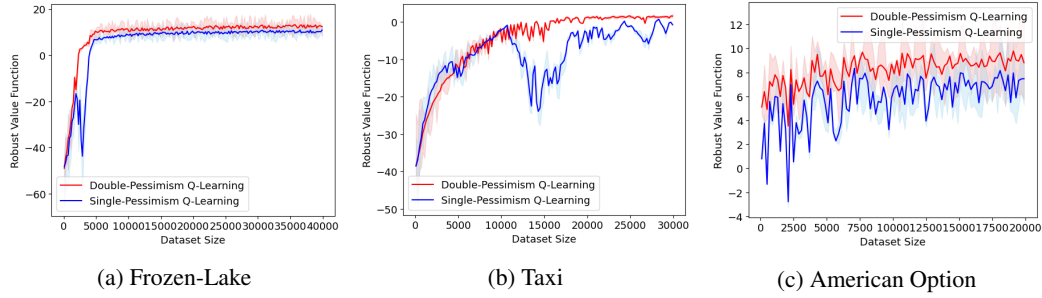


Figure 8: Robust value functions of three simulation environments over the  $\chi^2$ -divergence uncertainty set. Solid lines represent the mean values over 10 independent runs. Shaded areas represent the maximum and minimum values.

## D ANALYSIS OF THE FINITE HORIZON SETTING

### D.1 NOTATION

Recall the learning rate defined by

$$\eta_n = \frac{H+1}{H+n} \quad (51)$$

for the  $n$ -th visit of a given state-action pair at a given time step  $h$ . We further adopt two sequences of related quantities for any integers  $N \geq 0$  and  $n \geq 1$  from (Shi et al., 2022):

$$\eta_0^N \triangleq \begin{cases} \prod_{i=1}^N (1 - \eta_i) = 0, & \text{if } N > 0, \\ 1, & \text{if } N = 0, \end{cases} \quad (52)$$

$$\eta_n^N \triangleq \begin{cases} \eta_n \prod_{i=n+1}^N (1 - \eta_i), & \text{if } N > n, \\ \eta_n, & \text{if } N = n, \\ 0, & \text{if } N < n \end{cases} \quad (53)$$

It has been shown in (Shi et al., 2022; Yan et al., 2022) that

$$\sum_{n=0}^N \eta_n^N = 1. \quad (54)$$

We also introduce the following notation:

- $N_h^k(s, a)$ , or simply  $N_h^k$ : The number of episodes that have visited the state-action pair  $(s, a)$  at step  $h$  before the start of the  $k$ -th episode.
- $k_h^n(s, a)$ , or simply  $k_h^n$ : The index of the episode in which the state-action pair  $(s, a)$  is visited at step  $h$  for the  $n$ -th time. We adopt the convention that  $k^0 = 0$ .
- $P_h^k \in \{0, 1\}^{1 \times S}$ : A row vector corresponding to the empirical transition at step  $h$  of the  $k$ -th episode, defined as

$$P_h^k(s) = \mathbf{1}(s = s_{h+1}^k) \quad \text{for all } s \in \mathcal{S}. \quad (55)$$

- $\pi^k = \{\pi_h^k\}_{h=1}^H$  with  $\pi_h^k(s) \triangleq \arg \max_a Q_h^k(s, a)$  for all  $(h, s) \in [H] \times \mathcal{S}$ : The deterministic greedy policy at the beginning of the  $k$ -th episode.
- $\hat{\pi}$ : The final output of the algorithm, corresponding to  $\pi^{K+1}$  as defined above. For simplicity in our analysis, we treat  $\hat{\pi}$  as  $\pi^K$ , which does not affect the result.

### D.2 LEMMAS FOR THEOREM 2

In this section, we present the lemmas that are utilized in the proof of Theorem 2.

The first lemma demonstrates how our choice of the penalty term  $\kappa$  can address the uncertainty arising from model mismatch.



**Lemma 6.** (Theorem 1 in (Kumar et al., 2023)) Let  $\mathcal{P}_{s,a}$  be the uncertainty set defined using the  $l_\alpha$ -norm. For any vector  $V$ , the following relationship holds:

$$\sigma_{\mathcal{P}_{s,a}}(V) = P_{s,a}V - \kappa_{s,a}(V), \quad (56)$$

where  $\kappa$  is defined as in equation 18.

The following lemma provides properties concerning the learning rates and is adapted from (Jin et al., 2018; Li et al., 2021).

**Lemma 7** (Lemma 1 in (Li et al., 2021)). For any integer  $N > 0$ , the following properties hold:

$$\frac{1}{N^a} \leq \sum_{n=1}^N \frac{\eta_n^N}{n^a} \leq \frac{2}{N^a} \quad \text{for all } \frac{1}{2} \leq a \leq 1, \quad (57a)$$

$$\max_{1 \leq n \leq N} \eta_n^N \leq \frac{2H}{N}, \quad \sum_{n=1}^N (\eta_n^N)^2 \leq \frac{2H}{N}, \quad \sum_{n=N}^{\infty} \eta_n^N \leq 1 + \frac{1}{H}. \quad (57b)$$

The following lemmas concern the concentration properties of the sample generation.

The first lemma below is adapted from Xie et al. (2021b, Lemma A.1).

**Lemma 8.** (Lemma 8 in (Shi et al., 2022)) Suppose  $N \sim \text{Binomial}(n, p)$ , where  $n \geq 1$  and  $p \in [0, 1]$ . For any  $\delta \in (0, 1)$ , we have

$$\frac{p}{N \vee 1} \leq \frac{8 \log(\frac{1}{\delta})}{n}, \quad (58)$$

and

$$N \geq \frac{np}{8 \log(\frac{1}{\delta})} \quad \text{if } np \geq 8 \log\left(\frac{1}{\delta}\right), \quad (59a)$$

$$N \leq \begin{cases} e^2 np & \text{if } np \geq \log\left(\frac{1}{\delta}\right), \\ 2e^2 \log\left(\frac{1}{\delta}\right) & \text{if } np \leq 2 \log\left(\frac{1}{\delta}\right). \end{cases} \quad (59b)$$

with probability at least  $1 - 4\delta$ .

The following lemma is a standard concentration inequality result.

**Theorem 9** (Freedman's inequality (Freedman, 1975)). Consider a filtration  $\mathcal{F}_0 \subset \mathcal{F}_1 \subset \mathcal{F}_2 \subset \dots$ , and let  $\mathbb{E}_k$  stand for the expectation conditioned on  $\mathcal{F}_k$ . Suppose that  $Y_n = \sum_{k=1}^n X_k \in \mathbb{R}$ , where  $\{X_k\}$  is a real-valued scalar sequence obeying

$$|X_k| \leq R \quad \text{and} \quad \mathbb{E}_{k-1}[X_k] = 0 \quad \text{for all } k \geq 1$$

for some quantity  $R < \infty$ . We also define

$$W_n := \sum_{k=1}^n \mathbb{E}_{k-1}[X_k^2].$$

In addition, suppose that  $W_n \leq \sigma^2$  holds deterministically for some given quantity  $\sigma^2 < \infty$ . Then, for any positive integer  $m \geq 1$ , with probability at least  $1 - \delta$  one has

$$|Y_n| \leq \sqrt{8 \max\left\{W_n, \frac{\sigma^2}{2m}\right\} \log \frac{2m}{\delta}} + \frac{4}{3} R \log \frac{2m}{\delta}. \quad (60)$$

The Freedman's inequality further implies several important results related to our problem.

**Lemma 10.** Let  $\{W_h^i \in \mathbb{R}^S \mid 1 \leq i \leq K, 1 \leq h \leq H + 1\}$  be a collection of vectors satisfying the following properties:

- $W_h^i$  is fully determined by the samples collected up to the end of the  $(h - 1)$ -th step of the  $i$ -th episode;

$$\bullet \|W_h^i\|_\infty \leq C_w.$$

For any positive integer  $N \geq H$ , consider the following sequence:

$$X_i(s, a, h, N) \triangleq \eta_{N_h^i(s,a)}^N (P_h^i W_{h+1}^i - R_{s,a} \kappa(W_{h+1}^i) - \sigma_{h,s,a}(W_{h+1}^i)) \mathbf{I}\{(s_h^i, a_h^i) = (s, a)\}. \quad (61)$$

With probability at least  $1 - \delta$ ,

$$\left| \sum_{i=1}^k X_i(s, a, h, N) \right| \lesssim \sqrt{\frac{H}{N}} C_w^2 \log^2 \frac{SAT}{\delta} \quad (62)$$

holds simultaneously for all  $(k, h, s, a, N) \in [K] \times [H] \times \mathcal{S} \times \mathcal{A} \times [K]$ .

*Proof.* Let  $u_h^i(s, a, N) = \eta_{N_h^i(s,a)}^N$ . From equation 57b in Lemma 7, we have

$$|u_h^i(s, a, N)| \leq \frac{2H}{N} \triangleq C_u.$$

Given that  $\text{Var}_{h,s,a}(W_{h+1}^{k_n(s,a)}) \leq C_w^2$ , we can apply Lemma 7 from (Li et al., 2021) to obtain, with probability at least  $1 - \delta$ ,

$$\begin{aligned} & \left| \sum_{i=1}^k X_i(s, a, h, N) \right| \\ & \lesssim \sqrt{C_u \log^2 \frac{SAT}{\delta}} \sqrt{\sum_{n=1}^{N_h^k(s,a)} \eta_n^N C_w^2} + \left( C_u C_w + \sqrt{\frac{C_u}{N}} C_w \right) \log^2 \frac{SAT}{\delta} \\ & \lesssim \sqrt{\frac{H}{N} \log^2 \frac{SAT}{\delta}} \cdot C_w + \frac{H C_w}{N} \log^2 \frac{SAT}{\delta} \\ & \lesssim \sqrt{\frac{H C_w^2}{N} \log^2 \frac{SAT}{\delta}}, \end{aligned}$$

where the final line uses equation 57b from Lemma 7 again.  $\square$

**Lemma 11.** Let  $\{W_h^k(s, a) \in \mathbb{R}^S \mid (s, a) \in \mathcal{S} \times \mathcal{A}, 1 \leq k \leq K, 1 \leq h \leq H + 1\}$  be a collection of vectors satisfying the following properties:

- $W_h^k(s, a)$  is fully determined by the given state-action pair  $(s, a)$  and the samples collected up to the end of the  $(k - 1)$ -th episode;
- $\|W_h^k(s, a)\|_\infty \leq C_w$ .

For any positive  $C_d \geq 0$ , consider the following sequences:

$$X_{h,k} \triangleq C_d \left[ \frac{d_{P,h}^{\pi_*}(s_h^k, a_h^k)}{d_{P,h}^\mu(s_h^k, a_h^k)} W_{h+1}^k(s_h^k, a_h^k) - \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi_*}(s, a) W_{h+1}^k(s, a) \right], \quad (63)$$

$$\bar{X}_{h,k} \triangleq C_d \left[ \frac{d_{P,h}^{\pi_*}(s_h^k, a_h^k)}{d_{P,h}^\mu(s_h^k, a_h^k)} W_{h+1}^k(s_h^k, a_h^k) - \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi_*}(s, a) W_{h+1}^k(s, a) \right]. \quad (64)$$

Consider any  $\delta \in (0, 1)$ . Then with probability at least  $1 - \delta$ ,

$$\left| \sum_{k=1}^K X_{h,k} \right| \leq \sqrt{\sum_{k=1}^K 8C_d^2 C^* \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi_*}(s, a) [P_{h,s,a} W_{h+1}^k(s, a)]^2 \log \frac{2H}{\delta}} + 2C_d C^* C_w \log \frac{2H}{\delta}, \quad (65)$$

$$\left| \sum_{k=1}^K \bar{X}_{h,k} \right| \leq \sqrt{\sum_{k=1}^K 8C_d^2 C^* \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s,a) P_{h,s,a} [W_{h+1}^k(s,a)]^2 \log \frac{2H}{\delta}} + 2C_d C^* C_w \log \frac{2H}{\delta}, \quad (66)$$

hold simultaneously for all  $h \in [H]$ .

*Proof.* The proof similarly follows from (Shi et al., 2022).  $\square$

We then prove Lemma 1 showing the effectiveness of our double pessimism principle, i.e., that our estimation is a conservative estimation of the robust value function.

**Lemma 12.** Consider any  $\delta \in (0, 1)$ , and suppose that  $c_b > 0$  is some sufficiently large constant. Then, with probability at least  $1 - \delta$ ,

$$\left| \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( \sigma_{h,s,a}(V_{h+1}^{k^n(s,a)}) - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)} + R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) \right) \right| \leq \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n \quad (67)$$

holds simultaneously for all  $(k, h, s, a) \in [K] \times [H] \times \mathcal{S} \times \mathcal{A}$ , and

$$V_h^k(s) \leq V_h^{\pi^k}(s) \leq V_h^*(s) \quad (68)$$

holds simultaneously for all  $(k, h, s) \in [K] \times [H] \times \mathcal{S}$ .

*Proof. Proof of inequality equation 67.* We show it by invoking Lemma 10. Let

$$W_{h+1}^i := V_{h+1}^i,$$

which satisfies

$$\|W_{h+1}^i\|_\infty \leq H =: C_w.$$

Note that it holds that

$$\begin{aligned} & \sigma_{h,s,a}(V_{h+1}^{k^n(s,a)}) - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)} + R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) \\ &= P_{h,s,a} V_{h+1}^{k^n(s,a)} - R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)} + R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) \\ &= P_{h,s,a} V_{h+1}^{k^n(s,a)} - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)}, \end{aligned} \quad (69)$$

where the first equation is from Lemma 6. Hence applying Lemma 10 implies that with probability at least  $1 - \delta$ ,

$$\begin{aligned} & \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( \sigma_{h,s,a}(V_{h+1}^{k^n(s,a)}) - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)} + R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) \right) \\ &= \left| \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( P_{h,s,a} - P_h^{k^n(s,a)} \right) V_{h+1}^{k^n(s,a)} \right| \\ &= \left| \sum_{i=1}^k X_i(s, a, h, N_h^k(s, a)) \right| \\ &\leq c_b \sqrt{\frac{H^3 \iota^2}{N_h^k(s, a)}} \end{aligned} \quad (70)$$

holds simultaneously for all  $(s, a, k, h) \in \mathcal{S} \times \mathcal{A} \times [K] \times [H]$ , provided that the constant  $c_b > 0$  is large enough and that  $N = N_h^k(s, a) > 0$ . When  $N_h^k(s, a) = 0$ , we have the trivial bound

$$\left| \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( P_{h,s,a} - P_h^{k^n(s,a)} \right) V_{h+1}^{k^n(s,a)} \right| = 0. \quad (71)$$

1458 Additionally, from the definition  $b_n = c_b \sqrt{\frac{H^3 \ell^2}{n}}$ , we observe that

$$1459 \quad \begin{cases} \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n \in \left[ c_b \sqrt{\frac{H^3 \ell^2}{N_h^k(s,a)}}, 2c_b \sqrt{\frac{H^3 \ell^2}{N_h^k(s,a)}} \right], & \text{if } N_h^k(s,a) > 0 \\ \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n = 0, & \text{if } N_h^k(s,a) = 0 \end{cases} \quad (72)$$

1462 holds simultaneously for all  $s, a, h, k \in \mathcal{S} \times \mathcal{A} \times [H] \times [K]$ , which follows directly from the property  
1463 equation 57a in Lemma 7.

1464 Combining the above, equation 70 and equation 72 hence imply that

$$1465 \quad \left| \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( \sigma_{h,s,a}(V_{h+1}^{k^n(s,a)}) - P_h^{k^n(s,a)} V_{h+1}^{k^n(s,a)} + R_{s,a} \kappa(V_{h+1}^{k^n(s,a)}) \right) \right|$$

$$1466 \quad \leq \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n.$$

1467 **Proof of inequality equation 68.** Note that the second inequality of equation 68 is straightforward as

$$1468 \quad V_h^\pi(s) \leq V^*(s)$$

1469 holds for any policy  $\pi$ . As a consequence, it suffices to establish the first inequality of equation 68:

$$1470 \quad V_h^k(s) \leq V_h^{\pi^k}(s) \quad \text{for all } (s, h, k) \in \mathcal{S} \times [H] \times [K]. \quad (73)$$

1471 Define

$$1472 \quad k_o(h, k, s) := \max \left\{ l : l < k \text{ and } V_h^l(s) = \max_a Q_h^l(s, a) \right\} \quad (74)$$

1473 for any  $(h, k, s) \in [H] \times [K] \times \mathcal{S}$ , which denotes the index of the latest episode — before the end  
1474 of the  $(k-1)$ -th episode — in which  $V_h(s)$  has been updated. We abbreviate  $k_o(h, k, s)$  as  $k_o(h)$   
1475 whenever it is clear from the context.

1476 We utilize an induction approach to show that. Assume that

$$1477 \quad V_\Gamma^{k'}(s) \leq V_\Gamma^{\pi^{k'}}(s) \quad \text{for all } (k', \Gamma, s) \in [k-1] \times [H+1] \times \mathcal{S}, \quad (75a)$$

$$1478 \quad V_\Gamma^k(s) \leq V_\Gamma^{\pi^k}(s) \quad \text{for all } \Gamma \geq h+1 \text{ and } s \in \mathcal{S}. \quad (75b)$$

1479 We need to verify

$$1480 \quad V_h^k(s) \leq V_h^{\pi^k}(s) \quad \text{for all } s \in \mathcal{S}. \quad (76)$$

1481 *Step 1: base case.*

1482 Let us begin with the base case when  $h+1 = H+1$  for all episodes  $k \in [K]$ . Recognizing the fact  
1483 that  $V_{H+1}^\pi = V_{H+1}^k = 0$  for any  $\pi$  and any  $k \in [K]$ , we directly arrive at

$$1484 \quad V_{H+1}^k(s) \leq V_{H+1}^{\pi^k}(s) \quad \text{for all } (k, s) \in [K] \times \mathcal{S}. \quad (77)$$

1485 *Step 2: induction.* To justify equation 76 under the induction hypothesis equation 75, we decompose  
1486 the difference term to obtain

$$1487 \quad \begin{aligned} V_h^{\pi^k}(s) - V_h^k(s) &= V_h^{\pi^k}(s) - \max \left\{ \max_a Q_h^k(s, a), V_h^{k-1}(s) \right\} \\ &= Q_h^{\pi^k}(s, \pi_h^k(s)) - \max \left\{ \max_a Q_h^k(s, a), V_h^{k_o(h)}(s) \right\}, \end{aligned} \quad (78)$$

1488 where the last line holds since  $V_h(s)$  has not been updated during episodes  $k_o(h), k_o(h)+1, \dots, k-1$   
1489 (in view of the definition of  $k_o(h)$  in equation 74). We shall prove that the right-hand side of  
1490 equation 78 is non-negative by discussing the following two cases separately.

1491 **Case 1.** Consider the case where  $V_h^k(s) = \max_a Q_h^k(s, a)$ . Note that

$$1492 \quad \pi_h^k(s) = \arg \max_a Q_h^k(s, a), \quad \text{when } V_h^k(s) = \max_a Q_h^k(s, a) \quad (79)$$

holds for all  $(k, h) \in [K] \times [H]$ , Thus

$$\begin{aligned} V_h^{\pi^k}(s) - V_h^k(s) &= Q_h^{\pi^k}(s, \pi_h^k(s)) - \max_a Q_h^k(s, a) \\ &= Q_h^{\pi^k}(s, \pi_h^k(s)) - Q_h^k(s, \pi_h^k(s)). \end{aligned} \quad (80)$$

To continue, we turn to controlling a more general term  $Q_h^{\pi^k}(s, a) - Q_h^k(s, a)$  for all  $(s, a) \in \mathcal{S} \times \mathcal{A}$ . Invoking the fact  $\eta_0^{N_h^k} + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} = 1$  (see equation 52 and equation 54) leads to

$$Q_h^{\pi^k}(s, a) = \eta_0^{N_h^k} Q_h^{\pi^k}(s, a) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} Q_h^{\pi^k}(s, a).$$

This relation combined with equation 102 allows us to express the difference between  $Q_h^{\pi^k}$  and  $Q_h^k$  as follows

$$\begin{aligned} &Q_h^{\pi^k}(s, a) - Q_h^k(s, a) \\ &= \eta_0^{N_h^k} \left( Q_h^{\pi^k}(s, a) - Q_h^1(s, a) \right) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left[ Q_h^{\pi^k}(s, a) - r_h(s, a) - V_{h+1}^{k^n}(s_{h+1}^{k^n}) + R_{s,a} \kappa(V_{h+1}^{k^n}) + b_n \right] \\ &\stackrel{(a)}{=} \eta_0^{N_h^k} \left( Q_h^{\pi^k}(s, a) - Q_h^1(s, a) \right) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left[ P_{h,s,a} V_{h+1}^{\pi^k} - R_{s,a} \kappa(V_{h+1}^{\pi^k}) - V_{h+1}^{k^n}(s_{h+1}^{k^n}) + R_{s,a} \kappa(V_{h+1}^{k^n}) + b_n \right] \\ &\stackrel{(b)}{\geq} \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left[ P_{h,s,a} V_{h+1}^{\pi^k} - R_{s,a} \kappa(V_{h+1}^{\pi^k}) - V_{h+1}^{k^n}(s_{h+1}^{k^n}) + R_{s,a} \kappa(V_{h+1}^{k^n}) + b_n \right] \\ &\stackrel{(c)}{=} \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left[ \sigma_{h,s,a}(V_{h+1}^{\pi^k}) - \sigma_{h,s,a}(V_{h+1}^{k^n}) + \sigma_{h,s,a}(V_{h+1}^{k^n}) - V_{h+1}^{k^n}(s_{h+1}^{k^n}) + R_{s,a} \kappa(V_{h+1}^{k^n}) + b_n \right] \\ &\stackrel{(d)}{\geq} \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left[ \left( P_{h,s,a} - P_h^{k^n} \right) V_{h+1}^{k^n} + b_n \right]. \end{aligned} \quad (81)$$

Here, (a) invokes the robust Bellman equation  $Q_h^{\pi^k}(s, a) = r_h(s, a) + \sigma_{h,s,a}(V_{h+1}^{\pi^k})$ ; (b) holds since  $Q_h^{\pi^k}(s, a) \geq 0 = Q_h^1(s, a)$ ; (c) is from Lemma 6; and (d) comes from the fact

$$V_{h+1}^{\pi^k} \geq V_{h+1}^k \geq V_{h+1}^{k^n},$$

owing to the induction hypothesis in equation 75 as well as the monotonicity of  $V_{h+1}$  in Lemma 12. Consequently, it follows from equation 81 that

$$\begin{aligned} &Q_h^{\pi^k}(s, a) - Q_h^k(s, a) \\ &\geq \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( P_{h,s,a} - P_h^{k^n(s,a)} \right) V_{h+1}^{k^n(s,a)} + \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n \\ &\geq \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n - \left| \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} \left( P_{h,s,a} - P_h^{k^n(s,a)} \right) V_{h+1}^{k^n(s,a)} \right| \\ &\geq 0 \end{aligned} \quad (82)$$

for all state-action pair  $(s, a)$ , where the last inequality holds due to the bound in equation 67 in Lemma 12. Plugging the above result into equation 80 directly establishes that

$$V_h^{\pi^k}(s) - V_h^k(s) = Q_h^{\pi^k}(s, \pi_h^k(s)) - Q_h^k(s, \pi_h^k(s)) \geq 0. \quad (83)$$

**Case 2.** When  $V_h^k(s) = V_h^{k_o(h)}(s)$ , it indicates that

$$V_h^{k_o(h)}(s) = \max_a Q_h^{k_o(h)}(s, a), \quad \pi_h^{k_o(h)}(s) = \arg \max_a Q_h^{k_o(h)}(s, a), \quad (84)$$

which follows from the definition of  $k_o(h)$  in equation 74 and the corresponding fact in equation 79. We also make note of the fact that

$$\pi_h^k(s) = \pi_h^{k_o(h)}(s), \quad (85)$$

which holds since  $V_h(s)$  (and hence  $\pi_h(s)$ ) has not been updated during episodes  $k_o(h), k_o(h) + 1, \dots, k - 1$  (in view of the definition equation 74). Combining the above two results, we can show that

$$\begin{aligned} V_h^{\pi^k}(s) - V_h^k(s) &= Q_h^{\pi^k}(s, \pi_h^k(s)) - V_h^{k_o(h)}(s) = Q_h^{\pi^k}(s, \pi_h^k(s)) - \max_a Q_h^{k_o(h)}(s, a) \\ &= Q_h^{\pi^k}(s, \pi_h^{k_o(h)}(s)) - Q_h^{k_o(h)}(s, \pi_h^{k_o(h)}(s)) \\ &\geq 0, \end{aligned} \quad (86)$$

where the final line can be verified using exactly the same argument as in the previous case to show equation 81 and then equation 83. Here, we omit the proof of this step for brevity.

To conclude, substituting the relations equation 83 and equation 86 in the above two cases back into equation 78, we arrive at

$$V_h^{\pi^k}(s) - V_h^k(s) \geq 0$$

as desired in equation 76. This immediately completes the induction argument.  $\square$

**Lemma 13.** *With probability at least  $1 - \delta$ , it holds that*

$$\begin{aligned} &\sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s,a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k_n(s,a)})) \\ &\leq \left(1 + \frac{1}{H}\right) \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h+1}^{\pi^*}(s) (V_{h+1}^*(s) - V_{h+1}^k(s)) + 24\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12HC^* \log \frac{2H}{\delta}. \end{aligned} \quad (87)$$

*Proof.* It is sufficient to show that

$$\begin{aligned} A_h &\triangleq \sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s,a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k_n(s,a)})) \\ &\leq \underbrace{\sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s,a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k_n(s,a)}))}_{=: A_{h,k}} \\ &\leq \underbrace{\sum_{k=1}^K \left(1 + \frac{1}{H}\right) \sum_{s \in \mathcal{S}} d_{P,h+1}^{\pi^*}(s) (V_{h+1}^*(s) - V_{h+1}^k(s))}_{=: B_{h,k}} + 24\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12HC^* \log \frac{2H}{\delta}. \end{aligned} \quad (88)$$

Define two auxiliary sequences  $\{Y_{h,k}\}_{k=1}^K$  and  $\{Z_{h,k}\}_{k=1}^K$  which are the empirical estimates of  $A_{h,k}$  and  $B_{h,k}$ , respectively. For any time step  $h$  in episode  $k$ ,  $Y_{h,k}$  and  $Z_{h,k}$  are defined as follows

$$\begin{aligned} Y_{h,k} &:= \frac{d_{P,h}^{\pi^*}(s_h^k, a_h^k)}{d_{P,h}^\mu(s_h^k, a_h^k)} \sum_{n=1}^{N_h^k(s_h^k, a_h^k)} \eta_n^{N_h^k(s_h^k, a_h^k)} (\sigma_{h,s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h,s_h^k, a_h^k}(V_{h+1}^{k_n(s_h^k, a_h^k)})), \\ Z_{h,k} &:= \left(1 + \frac{1}{H}\right) \frac{d_{P,h}^{\pi^*}(s_h^k, a_h^k)}{d_{P,h}^\mu(s_h^k, a_h^k)} (\sigma_{h,s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h,s_h^k, a_h^k}(V_{h+1}^k)). \end{aligned}$$

Note that

$$\sum_{k=1}^K Y_{h,k} = \sum_{k=1}^K \frac{d_{P,h}^{\pi^*}(s_h^k, a_h^k)}{d_{P,h}^\mu(s_h^k, a_h^k)} \sum_{n=1}^{N_h^k(s_h^k, a_h^k)} \eta_n^{N_h^k(s_h^k, a_h^k)} (\sigma_{h,s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h,s_h^k, a_h^k}(V_{h+1}^{k_n(s_h^k, a_h^k)}))$$

$$\stackrel{(i)}{=} \sum_{l=1}^K \frac{d_{P,h}^{\pi^*}(s_h^l, a_h^l)}{d_{P,h}^{\mu}(s_h^l, a_h^l)} \left\{ \sum_{N=N_h^l(s_h^l, a_h^l)}^{N_h^K(s_h^l, a_h^l)} \eta_{N_h^l(s_h^l, a_h^l)}^N \right\} \left( \sigma_{h, s_h^l, a_h^l}(V_{h+1}^*) - \sigma_{h, s_h^l, a_h^l}(V_{h+1}^l) \right) \quad (89)$$

$$\leq \left( 1 + \frac{1}{H} \right) \sum_{k=1}^K \frac{d_{P,h}^{\pi^*}(s_h^k, a_h^k)}{d_{P,h}^{\mu}(s_h^k, a_h^k)} \left( \sigma_{h, s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h, s_h^k, a_h^k}(V_{h+1}^k) \right) = \sum_{k=1}^K Z_{h,k}. \quad (90)$$

Here, (a) holds by replacing  $k^n(s_h^k, a_h^k)$  with  $l$  and gathering all terms that involve  $V_{h+1}^* - V_{h+1}^l$ ; in the last line, we have invoked the property  $\sum_{N=n}^{N_h^K(s, a)} \eta_n^N \leq \sum_{N=n}^{\infty} \eta_n^N = 1 + 1/H$  (see equation 57b) together with the fact  $V_{h+1}^* - V_{h+1}^l \geq 0$  (see Lemma 12), and have further replaced  $l$  with  $k$ .

With the above relation in hand, in order to verify equation 89, we further decompose  $A_h$  into several terms

$$\begin{aligned} A_h &= \sum_{k=1}^K A_{h,k} = \sum_{k=1}^K Y_{h,k} + \sum_{k=1}^K (A_{h,k} - Y_{h,k}) \stackrel{(a)}{\leq} \sum_{k=1}^K Z_{h,k} + \sum_{k=1}^K (A_{h,k} - Y_{h,k}) \\ &= \sum_{k=1}^K B_{h,k} + \sum_{k=1}^K (Z_{h,k} - B_{h,k}) + \sum_{k=1}^K (A_{h,k} - Y_{h,k}) \end{aligned} \quad (91)$$

where (a) follows from equation 90.

As a result, it remains to control  $\sum_{k=1}^K (Z_{h,k} - B_{h,k})$  and  $\sum_{k=1}^K (A_{h,k} - Y_{h,k})$  separately in the following.

*Step 1: controlling  $\sum_{k=1}^K (A_{h,k} - Y_{h,k})$ .* We shall first control this term by means of Lemma 11. Specifically, consider

$$W_{h+1}^k(s, a) := \sum_{n=1}^{N_h^k(s, a)} \eta_n^{N_h^k(s, a)} \left( \sigma_{h, s, a}(V_{h+1}^*) - \sigma_{h, s, a}(V_{h+1}^{k^n(s, a)}) \right), \quad C_d := 1 \quad (92)$$

which satisfies

$$\|W_{h+1}^k(s, a)\|_{\infty} \leq \sum_{n=1}^{N_h^k(s, a)} \eta_n^{N_h^k(s, a)} \left( \|V_{h+1}^*\|_{\infty} + \|V_{h+1}^{k^n(s, a)}\|_{\infty} \right) \leq 2H =: C_w. \quad (93)$$

Here, we use the fact that  $\eta_0^{N_h^k} + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} = 1$  (see equation 52 and equation 54). Then, applying Lemma 11 with equation 92, we have with probability at least  $1 - \delta$ , the following inequality holds true

$$\begin{aligned} \left| \sum_{k=1}^K (A_{h,k} - Y_{h,k}) \right| &= \left| \sum_{k=1}^K X_{h,k} \right| \\ &\leq \sqrt{\sum_{k=1}^K 8C_d^2 C^* \sum_{(s, a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) [W_{h+1}^k(s, a)]^2 \log \frac{2H}{\delta}} + 2C_d C^* C_w \log \frac{2H}{\delta} \\ &\leq 16 \sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 4HC^* \log \frac{2H}{\delta}, \end{aligned} \quad (94)$$

where the last inequality is from  $|W_{h+1}^k(s, a)| \leq \|V_{h+1}^* - V_{h+1}^{k^n(s, a)}\|_{\infty} \leq H$ .

*Step 2: controlling  $\sum_{k=1}^K (Z_{h,k} - B_{h,k})$ .* Similarly, we shall control  $\sum_{k=1}^K (Z_{h,k} - B_{h,k})$  by invoking Lemma 11.

Recall that

$$Z_{h,k} - B_{h,k} = \left( 1 + \frac{1}{H} \right) \frac{d_{P,h}^{\pi^*}(s_h^k, a_h^k)}{d_{P,h}^{\mu}(s_h^k, a_h^k)} \left( \sigma_{h, s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h, s_h^k, a_h^k}(V_{h+1}^k) \right)$$

$$- \left(1 + \frac{1}{H}\right) \sum_{s \in \mathcal{S}} d_{P, h+1}^{\pi^*}(s) (V_{h+1}^*(s) - V_{h+1}^k(s)), \quad (95)$$

and let us consider

$$W_{h+1}^k(s, a) := \sigma_{h, s_h^k, a_h^k}(V_{h+1}^*) - \sigma_{h, s_h^k, a_h^k}(V_{h+1}^k), \quad C_d := \left(1 + \frac{1}{H}\right) \leq 2 \quad (96)$$

which satisfies

$$\|W_{h+1}^k(s, a)\|_\infty \leq \|V_{h+1}^*\|_\infty + \|V_{h+1}^k\|_\infty \leq 2H =: C_w. \quad (97)$$

Similarly, in view of Lemma 11, we can show that with probability at least  $1 - \delta$ ,

$$\begin{aligned} \left| \sum_{k=1}^K (B_{h,k} - Z_{h,k}) \right| &= \left| \sum_{k=1}^K X_{h,k} \right| \\ &\leq 16\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 8HC^* \log \frac{2H}{\delta}. \end{aligned} \quad (98)$$

*Step 3: putting all this together.* Substitution results in equation 94 and equation 98 back into equation 91 completes the proof of equation 89 as follows

$$\begin{aligned} A_h &\leq \sum_{k=1}^K B_{h,k} + \left| \sum_{k=1}^K (Z_{h,k} - B_{h,k}) \right| + \left| \sum_{k=1}^K (A_{h,k} - Y_{h,k}) \right| \\ &\leq \sum_{k=1}^K B_{h,k} + 24\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12HC^* \log \frac{2H}{\delta}. \end{aligned}$$

This hence completes the proof.  $\square$

**Lemma 14.** Denote the term  $\sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) \eta_0^{N_h^k(s,a)} H + 2 \sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n$  by  $I_h$ . Consider any  $\delta \in (0, 1)$ . With probability at least  $1 - \delta$ , we have

$$\begin{aligned} &\sum_{h=1}^H \left(1 + \frac{1}{H}\right)^{h-1} \left( I_h + 24\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12HC^* \log \frac{2H}{\delta} \right) \\ &\lesssim H^2 SC^* \iota + \sqrt{H^5 SC^* K \iota^3}, \end{aligned} \quad (99)$$

where we recall that  $\iota := \log\left(\frac{SAT}{\delta}\right)$ .

*Proof.* The proof can be obtained by directly following the proof in (Shi et al., 2022), and is hence omitted here.  $\square$

### D.3 PROOF OF THEOREM 2

We then proceed to the proof.

**Theorem 15.** (Restatement of Theorem 2) Consider any  $\delta \in (0, 1)$ . Suppose that the behavior policy  $\mu$  satisfies Assumption 1. There exists some universal constant  $c_a$ , such that if we set  $\iota := \log\left(\frac{SAT}{\delta}\right)$  and set  $T > SC^* \iota$ , then the policy  $\hat{\pi}$  returned by Algorithm 1 satisfies

$$V_1^*(\rho) - V_1^{\hat{\pi}}(\rho) \leq c_a \sqrt{\frac{H^6 SC^* \iota^3}{T}} \quad (100)$$

with probability at least  $1 - \delta$ .



1728 *Proof.* For any state-action pair  $(s, a)$ , according to the update rule specified in Algorithm 1, we have

$$1729 \quad Q_h^k(s, a) = Q_h^{k_{N_h^k}+1}(s, a) \\ 1730 \quad = (1 - \eta_{N_h^k}) Q_h^{k_{N_h^k}}(s, a) + \eta_{N_h^k} \left\{ r_h(s, a) + V_{h+1}^{k_{N_h^k}}(s_{h+1}^{k_{N_h^k}}) - R_{s,a} \kappa(V_{h+1}^{k_{N_h^k}}) - b_{N_h^k} \right\}, \quad (101)$$

1734 where the first identity holds because  $k_{N_h^k}$  denotes the most recent episode before  $k$  that visits  $(s, a)$  at  
1735 step  $h$ , and the learning rate is defined as in equation 51. Note that  $k > k_{N_h^k}$  always holds. Applying  
1736 the above relation recursively and using the notation defined in equation 52, we obtain

$$1737 \quad Q_h^k(s, a) = \eta_0^{N_h^k} Q_h^1(s, a) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} \left( r_h(s, a) + V_{h+1}^{k_n}(s_{h+1}^{k_n}) - R_{s,a} \kappa(V_{h+1}^{k_n}) - b_n \right). \quad (102)$$

1741 Applying Lemma 12, the optimality gap term equation 100 can be decomposed as follows

$$1742 \quad V_1^*(\rho) - V_1^{\widehat{\pi}}(\rho) \\ 1743 \quad = \mathbb{E}_{s_1 \sim \rho} [V_1^*(s_1)] - \mathbb{E}_{s_1 \sim \rho} [V_1^K(s_1)] \\ 1744 \quad \stackrel{(a)}{\leq} \mathbb{E}_{s_1 \sim \rho} [V_1^*(s_1)] - \mathbb{E}_{s_1 \sim \rho} [V_1^K(s_1)] \\ 1745 \quad \stackrel{(b)}{\leq} \frac{1}{K} \sum_{k=1}^K \left( \mathbb{E}_{s_1 \sim \rho} [V_1^*(s_1)] - \mathbb{E}_{s_1 \sim \rho} [V_1^k(s_1)] \right) \\ 1746 \quad = \frac{1}{K} \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_1^{\pi^*}(s) (V_1^*(s) - V_1^k(s)), \quad (103)$$

1755 where (a) follows from Lemma 12 (i.e.,  $V_1^{\pi^*}(s) \geq V_1^K(s)$  for all  $s \in \mathcal{S}$ ), (b) results from the  
1756 monotonicity property in Lemma 12, and the final equality holds because  $d_1^{\pi^*}(s) = \rho(s)$ .

1758 We then bound the right-hand side of equation 103. Since  $\pi^*$  is a deterministic policy,  $d_{P,h}^{\pi^*}(s) =$   
1759  $d_{P,h}^{\pi^*}(s, \pi^*(s))$ . And from the fact that  $V_h^k(s) \geq \max_a Q_h^k(s, a) \geq Q_h^k(s, \pi_h^*(s))$  and  $V_h^*(s) =$   
1760  $Q_h^*(s, \pi_h^*(s))$ , we have that

$$1761 \quad \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s) (V_h^*(s) - V_h^k(s)) \\ 1762 \quad = \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s, \pi_h^*(s)) (V_h^*(s) - V_h^k(s)) \\ 1763 \quad \leq \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s, \pi_h^*(s)) (Q_h^*(s, \pi_h^*(s)) - Q_h^k(s, \pi_h^*(s))) \\ 1764 \quad = \sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) (Q_h^*(s, a) - Q_h^k(s, a)), \quad (104)$$

1774 for any  $h \in [H]$ , where the last identity holds because

$$1775 \quad d_{P,h}^{\pi^*}(s, a) = 0 \quad \text{for any } a \neq \pi_h^*(s). \quad (105)$$

1777 To further bound the term  $Q_h^*(s, a) - Q_h^k(s, a)$  in equation 104, we first adapt equation 54 and have that

$$1780 \quad Q_h^*(s, a) = \sum_{n=0}^{N_h^k} \eta_n^{N_h^k} Q_h^*(s, a) \\ 1781$$

$$\begin{aligned}
&= \eta_0^{N_h^k} Q_h^*(s, a) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} Q_h^*(s, a) \\
&= \eta_0^{N_h^k} Q_h^*(s, a) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} (r_h(s, a) + \sigma_{h,s,a}(V_{h+1}^*)), \tag{106}
\end{aligned}$$

where the second line follows from the robust Bellman’s optimality equation. Combining equation 102 and equation 106 implies that

$$\begin{aligned}
&Q_h^*(s, a) - Q_h^k(s, a) \\
&= \eta_0^{N_h^k} (Q_h^*(s, a) - Q_h^1(s, a)) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} (\sigma_{h,s,a}(V_{h+1}^*) - V_{h+1}^{k^n}(s_{h+1}^{k^n}) + R_{s,a} \kappa(V_{h+1}^{k^n}) + b_n) \\
&\stackrel{(a)}{=} \eta_0^{N_h^k} (Q_h^*(s, a) - Q_h^1(s, a)) + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} b_n + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k^n})) \\
&\quad + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} (P_{h,s,a} - P_h^{k^n}) V_{h+1}^{k^n} \tag{107}
\end{aligned}$$

$$\leq \eta_0^{N_h^k} H + 2 \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} b_n + \sum_{n=1}^{N_h^k} \eta_n^{N_h^k} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k^n})), \tag{108}$$

where (a) is from Lemma 6 and the definition of  $P_h^{k^n} V_{h+1}^{k^n} = V_{h+1}^{k^n}(s_{h+1}^{k^n})$ , and the last inequality follows from the fact  $Q_h^*(s, a) - Q_h^1(s, a) = Q_h^*(s, a) - 0 \leq H$  and equation 67 in Lemma 12. Plug equation 108 in equation 104, we have that

$$\begin{aligned}
&\sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s) (V_h^*(s) - V_h^k(s)) \\
&\leq \underbrace{\sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) \eta_0^{N_h^k(s,a)} H + 2 \sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} b_n}_{=: I_h} \\
&\quad + \sum_{k=1}^K \sum_{(s,a) \in \mathcal{S} \times \mathcal{A}} d_{P,h}^{\pi^*}(s, a) \sum_{n=1}^{N_h^k(s,a)} \eta_n^{N_h^k(s,a)} (\sigma_{h,s,a}(V_{h+1}^*) - \sigma_{h,s,a}(V_{h+1}^{k^n})). \tag{109}
\end{aligned}$$

We then bound the last term on the right-hand side of equation 109. By applying Lemma 13, it implies that

$$\begin{aligned}
&\sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s) (V_h^*(s) - V_h^k(s)) \\
&\leq \left(1 + \frac{1}{\Gamma}\right) \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h+1}^{\pi^*}(s) (V_{h+1}^*(s) - V_{h+1}^k(s)) \\
&\quad + I_h + 24 \sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12 H C^* \log \frac{2H}{\delta}. \tag{110}
\end{aligned}$$

Recursively applying equation 110 over the time steps  $h = H, H - 1, \dots, 1$  with the terminal condition  $V_{H+1}^k = V_{H+1}^* = 0$  further implies that

$$\sum_{k=1}^K \sum_{s \in \mathcal{S}} d_1^{\pi^*}(s) (V_1^*(s) - V_1^k(s))$$

$$\begin{aligned}
&\leq \max_{h \in [H]} \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s) (V_h^*(s) - V_h^k(s)) \\
&\leq \sum_{h=1}^H \left(1 + \frac{1}{\Gamma}\right)^{h-1} \left( I_h + 24\sqrt{H^2 C^* K \log \frac{2H}{\delta}} + 12HC^* \log \frac{2H}{\delta} \right). \quad (111)
\end{aligned}$$

Finally, to bound the right-hand side of equation 111, we combine Lemma 14 and equation 103, which yields

$$\begin{aligned}
&V_1^*(\rho) - V_1^{\hat{\pi}}(\rho) \\
&\leq \frac{1}{K} \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_1^{\pi^*}(s) (V_1^*(s) - V_1^k(s)) \\
&\leq \frac{1}{K} \max_{h \in [H]} \sum_{k=1}^K \sum_{s \in \mathcal{S}} d_{P,h}^{\pi^*}(s) (V_h^*(s) - V_h^k(s)) \\
&\leq \frac{c_a}{2} \sqrt{\frac{H^5 SC^* \iota^3}{K}} + \frac{c_a}{2} \frac{H^2 SC^* \iota}{K} = \frac{c_a}{2} \sqrt{\frac{H^6 SC^* \iota^3}{T}} + \frac{c_a}{2} \frac{H^3 SC^* \iota}{T} \\
&\leq c_a \sqrt{\frac{H^6 SC^* \iota^3}{T}} \quad (112)
\end{aligned}$$

for some sufficiently large constant  $c_a > 0$ , where the last inequality is valid as long as  $T > SC^* \iota$ .

This hence completes the proof of Theorem 2.  $\square$

## E ANALYSIS OF THE INFINITE HORIZON SETTING

### E.1 ALGORITHM FOR INFINITE HORIZON

---

**Algorithm 3** Double-Pessimism Q-Learning for infinite-horizon RMDPs.

---

**Input:**  $\mathcal{D}$ , target success probability  $1 - \delta$ , uncertainty set radius  $R$ ,  $\Gamma = \left\lceil \frac{4}{1-\gamma} \log \frac{ST}{\delta} \right\rceil$ , penalty function  $\kappa$

**Initialize:**  $Q_0(s, a) = 0, V_0(s) = 0, n_0(s, a) = 0, \forall s, a$

**for**  $t = 1, \dots, T$  **do**

Sample a sample  $(s_{t-1}, a_{t-1}, s_t)$  from  $\mathcal{D}$

$n_t(s_{t-1}, a_{t-1}) \leftarrow n_{t-1}(s_{t-1}, a_{t-1}) + 1; n_t(s, a) \leftarrow n_{t-1}(s, a), \forall (s, a) \neq (s_{t-1}, a_{t-1})$

$n \leftarrow n_t(s, a); \eta_n \leftarrow (\Gamma + 1)/(\Gamma + n)$

$b_n \leftarrow c_b \sqrt{\frac{\Gamma \log(SAT/\delta)}{n(1-\gamma)^2}}$

$Q_t(s_{t-1}, a_{t-1}) = (1 - \eta_n) Q_{t-1}(s_{t-1}, a_{t-1}) + \eta_n \left\{ r(s_{t-1}, a_{t-1}) + \gamma V_{t-1}(s_t) - \gamma \kappa_{s_{t-1}, a_{t-1}}(V_{t-1}) - b_n \right\}$

$Q_t(s, a) = Q_{t-1}(s, a)$  for all  $(s, a) \neq (s_{t-1}, a_{t-1})$

$V_t(s_{t-1}) = \max \left\{ \max_{a \in \mathcal{A}} Q_t(s_{t-1}, a), V_{t-1}(s_{t-1}) \right\},$

$V_t(s) = V_{t-1}(s)$  for all  $s \neq s_{t-1}$ .

**end for**

$\hat{\pi}(s) = \arg \max_{a \in \mathcal{A}} Q_T(s, a), \forall s$

**Output:**  $\hat{\pi}$

---

In this section, we present the analysis of the infinite horizon robust MDPs.

## 1890 E.2 NOTATION

1891  
1892 The notation used in the proof for the infinite horizon setting is largely similar to that used in the  
1893 finite horizon case. For any state  $s \in \mathcal{S}$  and action  $a \in \mathcal{A}$ , we define:

$$1894 P_{s,a} = P(\cdot | s, a) \in \mathbb{R}^{1 \times S}$$

1895  
1896 to be the  $(s, a)$ -th row of a probability transition matrix  $P \in \mathbb{R}^{SA \times S}$ .

1897 For any  $t \geq 0$ , we define  $P_t \in \mathbb{R}^{SA \times S}$  to be an empirical probability transition matrix, given by:

$$1900 P_t(s' | s, a) = \begin{cases} 1, & \text{if } (s, a, s') = (s_{t-1}, a_{t-1}, s_t) \\ 0, & \text{otherwise} \end{cases} \quad (113)$$

1901 for all  $s, s' \in \mathcal{S}$  and  $a \in \mathcal{A}$ .

1902 For any deterministic policy  $\pi$ , we introduce two probability transition kernels:  $P_\pi : \mathcal{S} \rightarrow \Delta(\mathcal{S})$  and  
1903  $P^\pi : \mathcal{S} \times \mathcal{A} \rightarrow \Delta(\mathcal{S} \times \mathcal{A})$ , defined as follows:

$$1904 P_\pi(s' | s) = P(s' | s, \pi(s)), \quad (114a)$$

$$1905 P^\pi(s', a' | s, a) = \begin{cases} P(s' | s, a), & \text{if } a' = \pi(s') \\ 0, & \text{otherwise} \end{cases} \quad (114b)$$

1906 for any  $(s, a), (s', a') \in \mathcal{S} \times \mathcal{A}$ .

1907 Additionally, we define  $\rho^{\pi^*}$  to be a distribution over  $\mathcal{S} \times \mathcal{A}$  such that:

$$1908 \rho^{\pi^*}(s, a) = \begin{cases} \rho(s), & \text{if } a = \pi^*(s) \\ 0, & \text{otherwise} \end{cases} \quad (115)$$

1909 For any sequence  $\{a_i\}_{i=n_1}^{n_2}$  and two integers  $m_1$  and  $m_2$ , we define:

$$1910 \sum_{i=m_1}^{m_2} a_i = \begin{cases} \sum_{i=\max\{n_1, m_1\}}^{\min\{n_2, m_2\}} a_i, & \text{if } \max\{n_1, m_1\} \leq \min\{n_2, m_2\} \\ 0, & \text{otherwise} \end{cases}$$

## 1911 E.3 LEMMAS FOR THEOREM 3

1912  
1913 **Lemma 16.** (Lemma 4.1 in (Jin et al., 2018), Lemma 1 in (Li et al., 2021)) Recall the learning rates  
1914 are

$$1915 \eta_0^t := \prod_{j=1}^t (1 - \eta_j) \quad \text{and} \quad \eta_i^t := \begin{cases} \eta_i \prod_{j=i+1}^t (1 - \eta_j), & \text{if } t > i, \\ \eta_i, & \text{if } t = i, \\ 0, & \text{if } t < i, \end{cases} \quad (116)$$

1916 where  $\eta_j = (\Gamma + 1)/(\Gamma + j)$ . Then

1917 1. For any integer  $t \geq 1$ ,  $\sum_{i=1}^t \eta_i^t = 1$  and  $\eta_0^t = 0$ .

1918 2. For any integer  $t \geq 1$  and any  $1/2 \leq a \leq 1$ ,

$$1919 \frac{1}{t^a} \leq \sum_{i=1}^t \frac{1}{i^a} \eta_i^t \leq \frac{2}{t^a}.$$

1920 3. For any integer  $t \geq 1$ ,

$$1921 \max_{i \in [t]} \eta_i^t \leq \frac{2\Gamma}{t} \quad \text{and} \quad \sum_{i=1}^t (\eta_i^t)^2 \leq \frac{2\Gamma}{t}.$$

1944 4. For any integer  $i \geq 1$ ,

$$1945 \sum_{t=i}^{\infty} \eta_i^t = 1 + \frac{1}{\Gamma}.$$

1946 We then present the following lemma to establish an upper bound on  $Q^* - Q_t$ , and simultaneously  
1947 justify that the value function estimate  $V_t$  is always a pessimistic view of  $V^{\pi^*}$  (and hence  $V^*$ ).  
1948

1949 **Lemma 17.** *With probability exceeding  $1 - \delta$ , for all  $s \in \mathcal{S}$  and  $t \in [T]$ , it holds that*

$$1950 Q^*(s, \pi^*(s)) - Q_t(s, \pi^*(s)) \leq \gamma \sum_{i=1}^n \eta_i^n (\sigma_{s, \pi^*(s)}(V^*) - \sigma_{s, \pi^*(s)}(V_{k_i})) + \beta_n(s, \pi^*(s)), \quad (117)$$

1951 where  $n = n_t(s, \pi^*(s))$  and we define

$$1952 \beta_n(s, \pi^*(s)) \equiv \beta_n := 3c_b \sqrt{\frac{\Gamma t}{n(1-\gamma)^2}};$$

1953 in addition, we also have

$$1954 V_t(s) \leq V^{\pi^*}(s) \leq V^*(s), \quad \forall s \in \mathcal{S}. \quad (118)$$

1955 *Proof. Proof of equation 117.* Consider any given pair  $(s, a) \in \mathcal{S} \times \mathcal{A}$  and denote  $n = n_t(s, a)$ , the  
1956 total number of times that  $(s, a)$  has been visited prior to time  $t$ . Set  $k_0 = -1$ , and let

$$1957 k_i := \min \left\{ 0 \leq k < T : k > k_{i-1}, (s_k, a_k) = (s, a) \right\}, T \} \quad (119)$$

1958 for each  $1 \leq i \leq T$ . Clearly, each  $k_i$  is a stopping time. In view of the update rule, we have

$$1959 Q_t(s, a) = \sum_{i=1}^n \eta_i^n \left\{ r(s, a) + \gamma V_{k_i}(s_{k_i+1}) - \gamma \kappa(V_{k_i}) - b_i(s, a) \right\},$$

1960 which together with the robust Bellman optimality equation gives

$$\begin{aligned} 1961 & (Q^* - Q_t)(s, a) \\ 1962 &= r(s, a) + \gamma \sigma_{s, a}(V^*) - \sum_{i=1}^n \eta_i^n \left\{ r(s, a) + \gamma V_{k_i}(s_{k_i+1}) - \gamma \kappa(V_{k_i}) - b_i(s, a) \right\} \\ 1963 &= \gamma \sigma_{s, a}(V^*) - \sum_{i=1}^n \eta_i^n \left\{ \gamma V_{k_i}(s_{k_i+1}) - \gamma \kappa(V_{k_i}) - b_i(s, a) \right\} \\ 1964 &= \sum_{i=1}^n \eta_i^n \gamma (\sigma_{s, a}(V^*) - \sigma_{s, a}(V_{k_i})) + \sum_{i=1}^n \eta_i^n \gamma \left( (P - P_{k_i}) V_{k_i} \right)(s, a) + \sum_{i=1}^n \eta_i^n b_i(s, a), \quad (120) \end{aligned}$$

1965 where the last two lines are valid since  $\sum_{i=1}^n \eta_i^n = 1$  (cf. Lemma 16) and Lemma 6.

1966 Henceforth, we only focus on the case where  $a = \pi^*(s)$ . Define  $\mathcal{F}_i$  to be the  $\sigma$ -field generated by  
1967  $\{(s_i, a_i)\}_{i=0}^{k_i}$ . It is straightforward to check that for any  $1 \leq \tau \leq T$ ,

$$1968 \left\{ \mathbf{1}_{k_i < T} \left( (P - P_{k_i}) V_{k_i} \right)(s, \pi^*(s)) \right\}_{i=1}^{\tau}$$

1969 is a martingale difference sequence with respect to  $\{\mathcal{F}_i\}_{i \geq 0}$ . Then, we can invoke the Azuma-  
1970 Hoeffding inequality together with the basic bound  $\|V_{k_i}\|_{\infty} \leq \frac{1}{1-\gamma}$  to show that for any fixed  $s \in \mathcal{S}$   
1971 and  $\tau \in [T]$ ,

$$\begin{aligned} 1972 \left| \sum_{i=1}^{\tau} \mathbf{1}_{k_i < T} \eta_i^{\tau} \left( (P - P_{k_i}) V_{k_i} \right)(s, \pi^*(s)) \right| &\lesssim \frac{1}{1-\gamma} \sqrt{\sum_{i=1}^{\tau} (\eta_i^{\tau})^2 \log \frac{ST}{\delta}} \\ 1973 &\lesssim \sqrt{\frac{\Gamma}{\tau(1-\gamma)^2} \log \frac{ST}{\delta}} \end{aligned}$$

holds with probability exceeding  $1 - \delta/(ST)$ . Here, the last line utilizes Lemma 16. Taking the union bound over  $\tau \leq T$  allows us to replace  $\tau$  with  $n = n_t(s, a)$  in the above inequality, namely, for any fixed  $s \in \mathcal{S}$  and  $a \in \mathcal{A}$ , with probability exceeding  $1 - \delta/S$  we have

$$\left| \sum_{i=1}^n \eta_i^n \gamma \left( (P - P_{k_i}) V_{k_i} \right) (s, \pi^*(s)) \right| \lesssim \sqrt{\frac{\Gamma t}{n(1-\gamma)^2}} \quad (121)$$

holds for all  $n = n_t(s, \pi^*(s))$  with  $1 \leq t \leq T$ . In view of Lemma 16, for any  $s \in \mathcal{S}$  and  $a \in \mathcal{A}$  we know that

$$c_b \sqrt{\frac{\Gamma t}{n_t(s, a)(1-\gamma)^2}} \leq \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} b_i(s, a) \leq 2c_b \sqrt{\frac{\Gamma t}{n_t(s, a)(1-\gamma)^2}}. \quad (122)$$

Therefore, when  $c_b$  is sufficiently large, it follows that

$$(Q^* - Q_t)(s, \pi^*(s)) \leq \gamma \sum_{i=1}^n \eta_i^n (\sigma_{s, \pi^*(s)}(V^*) - \sigma_{s, \pi^*(s)}(V_{k_i})) + 3c_b \sqrt{\frac{\Gamma t}{n(1-\gamma)^2}}.$$

Taking the union bound over  $s \in \mathcal{S}$  and defining

$$\beta_n(s, \pi^*(s)) := 3c_b \sqrt{\frac{\Gamma t}{n(1-\gamma)^2}},$$

we can conclude that with probability exceeding  $1 - \delta$ ,

$$(Q^* - Q_t)(s, \pi^*(s)) \leq \gamma \sum_{i=1}^n \eta_i^n (\sigma_{s, \pi^*(s)}(V^*) - \sigma_{s, \pi^*(s)}(V_{k_i})) + \beta_n(s, \pi^*(s))$$

for all  $s \in \mathcal{S}$  and  $t \in [T]$ .

**Proof of equation 118.** Note that  $V^* \geq V^{\pi_t}$  holds trivially due to the optimality of  $V^*$ . We are therefore left with showing  $V^{\pi_t} \geq V_t$ . Suppose for the moment that with probability exceeding  $1 - \delta$ , for all  $s \in \mathcal{S}$ ,  $t \in [T]$  and  $j \in [t]$ , it holds that

$$(Q^{\pi_t} - Q_j)(s, \pi_t(s)) \geq \gamma (\sigma_{s, \pi_t(s)}(V^{\pi_t}) - \sigma_{s, \pi_t(s)}(V_j)) \mathbf{1}\{n_t(s, \pi_t(s)) \geq 1\}; \quad (123)$$

the proof of this claim (123) is deferred to later. As a consequence, for every  $s \in \mathcal{S}$  and  $t \in [T]$ , there exists  $j(t) \in [t]$  such that

$$\begin{aligned} (V^{\pi_t} - V_t)(s) &\stackrel{(a)}{=} Q^{\pi_t}(s, \pi_t(s)) - Q_{j(t)}(s, \pi_t(s)) \\ &\stackrel{(b)}{=} Q^{\pi_t}(s, \pi_t(s)) - Q_{j(t)}(s, \pi_{j(t)}(s)) \\ &\stackrel{(c)}{\geq} \min \left\{ \gamma (\sigma_{s, \pi_t(s)}(V^{\pi_t}) - \sigma_{s, \pi_t(s)}(V_{j(t)})), 0 \right\} \\ &\stackrel{(d)}{\geq} \min \left\{ \gamma (\sigma_{s, \pi_{j(t)}(s)}(V^{\pi_t}) - \sigma_{s, \pi_{j(t)}(s)}(V_t)), 0 \right\}. \end{aligned}$$

Here, (a) and (b) hold since the update rule asserts that there must exist some  $j(t) \leq t$  such that  $V_t(s) = V_{j(t)}(s) = Q_{j(t)}(s, \pi_{j(t)}(s))$  and  $\pi_t(s) = \pi_{j(t)}(s)$ ; (c) utilizes (123); and (d) follows from the monotonicity of  $V_t$  in  $t$  (by construction). By setting

$$s_{\min} := \arg \min_{s \in \mathcal{S}} (V^{\pi_t} - V_t)(s),$$

we can deduce that

$$\begin{aligned} (V^{\pi_t} - V_t)(s_{\min}) &\geq \min \left\{ \gamma (\sigma_{s_{\min}, \pi_{j(t)}(s_{\min})}(V^{\pi_t}) - \sigma_{s_{\min}, \pi_{j(t)}(s_{\min})}(V_t)), 0 \right\} \\ &\geq \min \left\{ \gamma \min_{s \in \mathcal{S}} (V^{\pi_t} - V_t)(s), 0 \right\} \\ &= \min \left\{ \gamma (V^{\pi_t} - V_t)(s_{\min}), 0 \right\}, \end{aligned}$$

which together with the assumption  $0 < \gamma < 1$  immediately gives

$$(V^{\pi_t} - V_t)(s_{\min}) \geq 0.$$

Given that  $(V^{\pi_t} - V_t)(s) \geq (V^{\pi_t} - V_t)(s_{\min})$  for every  $s \in \mathcal{S}$ , we conclude the proof.

**Now we show equation 123.** First of all, if  $n_t(s, \pi_t(s)) = 0$ , then for all  $j \in [t]$ ,  $Q_j(s, \pi_t(s)) = 0$  since it is never updated; therefore, (123) holds true. From now on, we shall only focus on the case when  $n_t(s, \pi_t(s)) \geq 1$ .

Consider any  $s \in \mathcal{S}$ ,  $t \in [T]$  and  $j \in [t]$ . For the moment, let us define  $\{k_i\}_{i=1}^T$  w.r.t. the state-action pair  $(s, \pi_t(s))$  in the same way as (119). We can then repeat the argument in (120) to decompose

$$\begin{aligned} & (Q^{\pi_t} - Q_j)(s, \pi_t(s)) \\ &= (r + \gamma \sigma(V^{\pi_t}))(s, \pi_t(s)) - \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \left\{ r(s, \pi_t(s)) + \gamma V_{k_i}(s_{k_i+1}) - R_s^{\pi_t(s)} \kappa(V^{\pi_t}) - b_i(s, \pi_t(s)) \right\} \\ &= \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \gamma \left\{ (\sigma_{s, \pi_t(s)}(V^{\pi_t}) - \sigma_{s, \pi_t(s)}(V_{k_i})) + ((P - P_{k_i})V_{k_i})(s, \pi_t(s)) \right\} \\ &\quad + \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} b_i(s, \pi_t(s)) \\ &\geq \left( \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \right) \gamma \min_{1 \leq i \leq n} (\sigma_{s, \pi_t(s)}(V^{\pi_t}) - \sigma_{s, \pi_t(s)}(V_{k_i})) \\ &\quad + \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \gamma ((P - P_{k_i})V_{k_i})(s, \pi_t(s)) \\ &\quad + \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} b_i(s, \pi_t(s)) \\ &\geq \gamma (\sigma_{s, \pi_t(s)}(V^{\pi_t}) - \sigma_{s, \pi_t(s)}(V_t)) \\ &\quad + \sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \gamma ((P - P_{k_i})V_{k_i})(s, \pi_t(s)) + c_b \sqrt{\frac{\Gamma l}{n_j(s, \pi_t(s)) (1 - \gamma)^2}}. \end{aligned}$$

Here, the last inequality follows from (122), as well as the facts that  $\sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} = 1$  (cf. Lemma 16) and that  $V_t$  is non-decreasing in  $t$ . It thus boils down to showing that for every  $s \in \mathcal{S}$ ,  $t \in [T]$  and  $j \in [t]$ ,

$$\sum_{i=1}^{n_j(s, \pi_t(s))} \eta_i^{n_j(s, \pi_t(s))} \gamma ((P - P_{k_i})V_{k_i})(s, \pi_t(s)) \lesssim \sqrt{\frac{\Gamma l}{n_j(s, \pi_t(s)) (1 - \gamma)^2}}. \quad (124)$$

If this were true and if  $c_b$  is sufficiently large, then we could combine the above two inequalities to conclude the proof of (123).

We then prove the inequality equation 124. Notice that for all  $(s, \pi_t(s))$  such that  $n_t(s, \pi_t(s)) \geq 1$ , it must appear at least once in the sample trajectory. Therefore it suffices to show that for all  $0 \leq l < T$  and  $t \in [T]$ , it holds that

$$\sum_{i=1}^{n_t(s_l, a_l)} \eta_i^{n_t(s_l, a_l)} \gamma ((P - P_{k_i})V_{k_i})(s_l, a_l) \lesssim \sqrt{\frac{\Gamma l}{n_t(s_l, a_l) (1 - \gamma)^2}},$$

where we abuse the notation by defining  $\{k_i\}_{i=1}^T$  for the state-action pair  $(s_l, a_l)$  in the same way as (119). Furthermore, it suffices to only check those  $(s_l, a_l)$  in the sample trajectory that were visited for the first time, i.e.,  $n_l(s_l, a_l) = 0$  and  $n_{l+1}(s_l, a_l) = 1$ . It is straightforward to check that, for any  $1 \leq \tau \leq T$ ,

$$\left\{ \mathbf{1}_{k_i < T} ((P - P_{k_i})V_{k_i})(s_l, a_l) \right\}_{i=1}^{\tau}$$

is a martingale difference sequence with respect to  $\{\mathcal{F}_i\}_{i \geq 0}$ , where  $\mathcal{F}_i$  is the  $\sigma$ -field generated by  $\{(s_i, a_i)\}_{i=0}^{k_i}$ . Then, we can invoke the Azuma-Hoeffding inequality to show that: for any such  $(s_l, a_l)$  and any  $\tau \in [T]$ , with probability exceeding  $1 - \delta/T^2$ ,

$$\left| \sum_{i=1}^{\tau} \mathbf{1}_{k_i < T} \eta_i^{\tau} \left( (P - P_{k_i}) V_{k_i} \right) (s_l, a_l) \right| \lesssim \frac{1}{1-\gamma} \sqrt{\sum_{i=1}^{\tau} (\eta_i^{\tau})^2 \log \frac{T}{\delta}} \lesssim \sqrt{\frac{\Gamma_l}{\tau (1-\gamma)^2}}.$$

Taking the union bound over  $\tau \in [T]$  allows us to replace  $\tau$  with  $n_t(s_l, a_l)$  in the above inequality, namely, this shows that for any such  $(s_l, a_l)$ , with probability exceeding  $1 - \delta/T$  we have

$$\left| \sum_{i=1}^{n_t(s_l, a_l)} \eta_i^{n_t(s_l, a_l)} \left( (P - P_{k_i}) V_{k_i} \right) (s_l, a_l) \right| \lesssim \sqrt{\frac{\Gamma_l}{n_t(s_l, a_l) (1-\gamma)^2}}$$

for all  $t \in [T]$ . Taking the union bound over all such  $(s_l, a_l)$  (which are concerned with at most  $T$  pairs), we see that with probability exceeding  $1 - \delta$ ,

$$\left| \sum_{i=1}^{n_t(s_l, a_l)} \eta_i^{n_t(s_l, a_l)} \left( (P - P_{k_i}) V_{k_i} \right) (s_l, a_l) \right| \lesssim \sqrt{\frac{\Gamma_l}{n_t(s_l, a_l) (1-\gamma)^2}}$$

is valid for any  $0 \leq j < T$  and any  $t \in [T]$ . This establishes the inequality equation 124, thus concluding the proof.  $\square$

Next, we define two disjoint sets of state-action pairs, divided based on the associated occupancy probability induced by the behavior policy:

$$\mathcal{I} := \left\{ (s, \pi^*(s)) \mid s \in \mathcal{S}, \mu_b(s, \pi^*(s)) \geq \frac{\delta}{ST} \right\}, \quad (125a)$$

$$\mathcal{I}^c := \left\{ (s, \pi^*(s)) \mid s \in \mathcal{S}, \mu_b(s, \pi^*(s)) < \frac{\delta}{ST} \right\}. \quad (125b)$$

It turns out that the state-action pairs in  $\mathcal{I}^c$  are rarely visited, as formalized by the following lemma.

**Lemma 18.** (Lemma 3 in (Yan et al., 2022)) *With probability exceeding  $1 - \delta$ , we have*

$$\mathcal{I}^c \cap \{(s_t, a_t)\}_{t=t_{\text{mix}}(\delta)}^T = \emptyset.$$

**Lemma 19.** (Lemma 5 in (Yan et al., 2022)) *We can construct an auxiliary set of random variables  $\{(s_k^i, a_k^i) : 1 \leq k \leq K - 1\}$  satisfying*

$$\{(s_k^i, a_k^i) : 1 \leq k \leq K - 1\} \stackrel{\text{i.i.d.}}{\sim} \mu_b, \quad (126a)$$

$$\mathbb{P}\left\{ (s_k^i, a_k^i) = (s_{k\tau+i}, a_{k\tau+i}) \text{ for all } 1 \leq k \leq K - 1 \right\} \geq 1 - \frac{\delta}{T}, \quad (126b)$$

and

$$(s_k^i, a_k^i) \text{ is independent of } \{(s_t, a_t) : 0 \leq t \leq (k-1)\tau + i\}. \quad (126c)$$

**Lemma 20.** (Lemma 4 in (Yan et al., 2022)) *Let  $\Gamma = \left\lceil \frac{4}{1-\gamma} \log \frac{ST}{\delta} \right\rceil$  for some  $0 < \delta < 1$ . For any vector with non-negative entries  $V \in \mathbb{R}^d$ , we have*

$$\sum_{j=0}^{\infty} \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right)^3 \right]^j \langle \rho(P_{\pi^*})^j, V \rangle \lesssim \frac{1}{1-\gamma} \langle d_{\rho^*}, V \rangle + \frac{\delta}{ST^4 (1-\gamma)} \|V\|_{\infty}. \quad (127)$$



## E.4 PROOF OF THEOREM 3

Following (Yan et al., 2022), we similarly define the following terms first:

$$\begin{aligned}
\alpha_j &:= \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right) \right]^j \sum_{t=1}^T \langle \rho(P_{\pi^*})^j, V^* - V_t \rangle, \\
\theta_j &:= \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right) \right]^j \sum_{t=1}^T \sum_{s \in \mathcal{S}} [\rho(P_{\pi^*})^j](s, \pi^*(s)) \min \left\{ \beta_{n_t(s, \pi^*(s))}(s, \pi^*(s)), \frac{1}{1-\gamma} \right\}, \\
\xi_j &:= \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right) \right]^j \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho(P_{\pi^*})^j, V^* - V_t \rangle + \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right) \right]^{j+1} \langle \rho(P_{\pi^*})^{j+1}, V^* - V_0 \rangle, \\
\psi_j &:= \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right) \right]^j \sum_{t=t_{\text{mix}}(\delta)}^T \left[ \sum_{s \in \mathcal{S}, a \in \mathcal{A}} [\rho^{\pi^*}(P^{\pi^*})^j](s, a) \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, a} (V^* - V_{k_i(s, a)}) \right. \\
&\quad \left. - \left( 1 + \frac{1}{\Gamma} \right) \frac{[\rho^{\pi^*}(P^{\pi^*})^j](s_t, a_t)}{\mu_b(s_t, a_t)} \sum_{i=1}^{n_t(s_t, a_t)} \eta_i^{n_t(s_t, a_t)} P_{s_t, a_t} (V^* - V_{k_i(s_t, a_t)}) \right], \\
\phi_j &:= \gamma^{j+1} \left( 1 + \frac{1}{\Gamma} \right)^{3j+2} \sum_{t=0}^T \mathbf{1}_{(s_t, a_t) \in \mathcal{I}} \left[ \frac{[\rho^{\pi^*}(P^{\pi^*})^j](s_t, a_t)}{\mu_b(s_t, a_t)} P_{s_t, a_t} (V^* - V_t) \right. \\
&\quad \left. - \left( 1 + \frac{1}{\Gamma} \right) \sum_{s \in \mathcal{S}, a \in \mathcal{A}} [\rho^{\pi^*}(P^{\pi^*})^j](s, a) P_{s, a} (V^* - V_t) \right],
\end{aligned}$$

where we recall the definition of  $\mathcal{I}$  in equation 125.

We then proceed to the proof.

**Theorem 21.** (Restatement of Theorem 3) Consider any  $\delta \in (0, 1)$ . Suppose that the behavior policy  $\mu$  satisfies Assumption 2. The policy  $\hat{\pi}$  returned by Algorithm 3 satisfies

$$V^*(\rho) - V^{\hat{\pi}}(\rho) \leq \tilde{\mathcal{O}} \left( \sqrt{\frac{C^* S}{T(1-\gamma)^5}} + \frac{C^* S}{T(1-\gamma)^2} + \frac{C^*}{T(1-\gamma)^3} \right). \quad (128)$$

with probability at least  $1 - \delta$ .

*Proof.* Note that

$$V^*(\rho) - V^{\hat{\pi}}(\rho) = \langle \rho, V^* - V^{\hat{\pi}} \rangle \stackrel{(a)}{\leq} \langle \rho, V^* - V_T \rangle \stackrel{(b)}{\leq} \frac{1}{T} \sum_{t=1}^T \langle \rho, V^* - V_t \rangle \stackrel{(c)}{=} \frac{1}{T} \alpha_0. \quad (129)$$

Here, (a) holds true according to Lemma 17; (b) follows from the monotonicity of  $V_t$  in  $t$  (by construction); and (c) follows simply from the definition of  $\alpha_0$ . We then turn attention to bounding  $\alpha_0$ , towards which we observe that

$$\begin{aligned}
\alpha_0 &= \sum_{t=1}^{t_{\text{mix}}(\delta)-1} \langle \rho, V^* - V_t \rangle + \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}} \rho(s) \min \left\{ Q^*(s, \pi^*(s)) - V_t(s), \frac{1}{1-\gamma} \right\} \\
&\leq \sum_{t=1}^{t_{\text{mix}}(\delta)-1} \langle \rho, V^* - V_t \rangle + \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}} \rho(s) \min \left\{ Q^*(s, \pi^*(s)) - Q_t(s, \pi^*(s)), \frac{1}{1-\gamma} \right\} \\
&\leq \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \underbrace{\gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}} \rho(s) \sum_{i=1}^{n_t(s, \pi^*(s))} \eta_i^{n_t(s, \pi^*(s))} (\sigma_{s, \pi^*(s)}(V^*) - \sigma_{s, \pi^*(s)}(V_{k_i}))}_{=:\zeta}
\end{aligned}$$

$$+ \underbrace{\sum_{t=1}^T \sum_{s \in \mathcal{S}} \rho(s) \min \left\{ \beta_{n_t(s, \pi^*(s))}(s, \pi^*(s)), \frac{1}{1-\gamma} \right\}}_{=: \frac{\theta_0}{1+R}}.$$

Here, the first identity holds since  $V^*(s) = Q^*(s, \pi^*(s))$  and  $0 \leq V^*(s) - V_t(s) \leq 1/(1-\gamma)$  for all  $s \in \mathcal{S}$ , the second line relies on the fact that  $V_t(s) \geq \max_a Q_t(s, a) \geq Q_t(s, \pi^*(s))$ , while the last line invokes Lemma 17. With probability exceeding  $1 - \delta$ , the first term  $\zeta$  can be upper bounded by

$$\begin{aligned} \zeta &\leq \gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}} \rho(s) \sum_{i=1}^{n_t(s, \pi^*(s))} \eta_i^{n_t(s, \pi^*(s))} (\sigma_{s, \pi^*(s)}(V^*) - \sigma_{s, \pi^*(s)}(V_{k_i})) \\ &= \gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \mu_b(s, a) \frac{\rho^{\pi^*}(s, a)}{\mu_b(s, a)} \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, \pi^*(s)}(V^* - V_{k_i}) \\ &\quad - \gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \mu_b(s, a) \frac{\rho^{\pi^*}(s, a)}{\mu_b(s, a)} R_{s, a} \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} (\kappa(V^*) - \kappa(V_{k_i})) \\ &\leq \gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \mu_b(s, a) \frac{\rho^{\pi^*}(s, a)}{\mu_b(s, a)} \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, \pi^*(s)}(V^* - V_{k_i}) \\ &\quad + 2\gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \mu_b(s, a) \frac{\rho^{\pi^*}(s, a)}{\mu_b(s, a)} R_{s, a} \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} (V^* - V_{k_i}), \end{aligned}$$

where we utilize the fact that  $V^* \geq V_{k_i}$  and  $\kappa$  is 1-Lipschitz. Hence we further have that

$$\begin{aligned} &\alpha_0 \\ &\leq (1+R)\gamma \sum_{t=t_{\text{mix}}(\delta)}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \mu_b(s, a) \frac{\rho^{\pi^*}(s, a)}{\mu_b(s, a)} \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, \pi^*(s)}(V^* - V_{k_i}) \\ &\quad + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \\ &\stackrel{\text{(a)}}{\leq} \gamma(1+R) \left(1 + \frac{1}{\Gamma}\right) \sum_{t=t_{\text{mix}}(\delta)}^T \mathbf{1}\{(s_t, a_t) \in \mathcal{I}\} \frac{\rho^{\pi^*}(s_t, a_t)}{\mu_b(s_t, a_t)} \sum_{i=1}^{n_t(s_t, a_t)} \eta_i^{n_t(s_t, a_t)} P_{s_t, a_t}(V^* - V_{k_i(s_t, a_t)}) + \psi_0 \\ &\quad + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \\ &\stackrel{\text{(b)}}{\asymp} \gamma \left(1 + \frac{1}{\Gamma}\right) \sum_{t=t_{\text{mix}}(\delta)}^T \mathbf{1}\{(s_t, a_t) \in \mathcal{I}\} \frac{\rho^{\pi^*}(s_t, a_t)}{\mu_b(s_t, a_t)} \left( \sum_{j=n_t(s_t, a_t)}^{n_T(s_t, a_t)} \eta_{n_t(s_t, a_t)}^j \right) P_{s_t, a_t}(V^* - V_t) + \psi_0 \\ &\quad + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \\ &\stackrel{\text{(c)}}{\leq} \gamma \left(1 + \frac{1}{\Gamma}\right)^2 \sum_{t=0}^T \mathbf{1}\{(s_t, a_t) \in \mathcal{I}\} \frac{\rho^{\pi^*}(s_t, a_t)}{\mu_b(s_t, a_t)} P_{s_t, a_t}(V^* - V_t) + \psi_0 \\ &\quad + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \\ &= \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \sum_{t=0}^T \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \rho^{\pi^*}(s, a) P_{s, a}(V^* - V_t) + \psi_0 + \phi_0 + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \end{aligned}$$

$$\begin{aligned}
&= \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \sum_{t=0}^T \langle \rho P_{\pi^*}, V^* - V_t \rangle + \psi_0 + \phi_0 + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0 \\
&\leq \alpha_1 + \psi_0 + \phi_0 + \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \langle \rho P_{\pi^*}, V^* - V_0 \rangle + (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \theta_0,
\end{aligned}$$

where we remind the reader of our notation  $\rho^{\pi^*}$  in equation 115. Here, (a) is valid (i.e.,  $\rho(s_t, a_t)/\mu_b(s, a)$  is well defined for  $t \geq t_{\text{mix}}(\delta)$ ) due to Lemma 18; (b) holds by grouping the terms in the previous line; and (c) utilizes Lemma 16 and the property that  $V^* \geq V_t$  (cf. Lemma 17). Therefore, we arrive at

$$\begin{aligned}
\alpha_0 &\leq \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \zeta + \theta_0 \\
&\leq (1+R) \sum_{t=1}^{t_{\text{mix}}(\delta)} \langle \rho, V^* - V_t \rangle + \alpha_1 + \psi_0 + \phi_0 + \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \langle \rho P_{\pi^*}, V^* - V_0 \rangle + \theta_0 \\
&= \alpha_1 + \xi_0 + \theta_0 + \psi_0 + \phi_0,
\end{aligned}$$

where we have used the definition of  $\xi_0$ . Repeat the same argument to reach

$$\alpha_j \leq \alpha_{j+1} + \xi_j + \theta_j + \psi_j + \phi_j$$

for all  $j \geq 1$ . This in turn allows us to conclude that

$$\alpha_0 \leq \underbrace{\limsup_{j \rightarrow \infty} \alpha_j}_{=: \alpha} + \underbrace{\sum_{j=0}^{\infty} \xi_j}_{=: \xi} + \underbrace{\sum_{j=0}^{\infty} \theta_j}_{=: \theta} + \underbrace{\sum_{j=0}^{\infty} \psi_j}_{=: \psi} + \underbrace{\sum_{j=0}^{\infty} \phi_j}_{=: \phi}. \quad (130)$$

We will then bound the terms  $\alpha$ ,  $\xi$ ,  $\theta$ ,  $\psi$  and  $\phi$  separately in the subsequent steps. Our proofs are similar to the ones in (Yan et al., 2022), hence we omit the repeated part.

**Bounding  $\alpha$ .** The bound is similar to (Yan et al., 2022). It is first observed that

$$\alpha = \limsup_{j \rightarrow \infty} \left[ \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \right]^j \sum_{t=1}^T \langle \rho(P_{\pi^*})^j, V^* - V_t \rangle \leq \frac{T}{1-\gamma} \limsup_{k \rightarrow \infty} \left[ \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \right]^k = 0.$$

**Bounding  $\xi$ .**

By utilizing (127), it holds that

$$\begin{aligned}
\xi &= \sum_{t=1}^{t_{\text{mix}}(\delta)} \left\{ \sum_{j=0}^{\infty} \left[ \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \right]^j \langle \rho P_{\pi^*}^j, V^* - V_t \rangle \right\} + \sum_{j=0}^{\infty} \left[ \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \right]^{j+1} \langle \rho(P_{\pi^*})^{j+1}, V^* - V_0 \rangle \\
&\lesssim \frac{1}{1-\gamma} \sum_{t=0}^{t_{\text{mix}}(\delta)} \langle d_{\rho}^*, V^* - V_t \rangle + \frac{1}{ST^4(1-\gamma)} \frac{t_{\text{mix}}(\delta) + 1}{1-\gamma} \\
&\lesssim \frac{t_{\text{mix}}}{(1-\gamma)^2} \log \frac{1}{\delta} + \frac{t_{\text{mix}}}{T^4(1-\gamma)^2} \log \frac{1}{\delta}.
\end{aligned}$$

**Bounding  $\theta$ .** Following (Yan et al., 2022), we have that Note that

$$\begin{aligned}
\theta &= \sum_{j=0}^{\infty} \left[ \gamma \left(1 + \frac{1}{\Gamma}\right)^3 \right]^j \sum_{t=1}^T \sum_{s \in \mathcal{S}} [\rho(P_{\pi^*})^j](s) \min \left\{ \beta_{n_t(s, \pi^*(s))}, \frac{1}{1-\gamma} \right\} \\
&\lesssim \frac{C^* S t_{\text{mix}} \iota}{(1-\gamma)^2} + \sqrt{\frac{C^* S T \iota^2}{(1-\gamma)^5}}.
\end{aligned}$$

2322 **Bounding  $\psi$ .** Note that

$$\begin{aligned}
2323 & \\
2324 & \psi = \sum_{j=0}^{\infty} \gamma \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right)^3 \right]^j \sum_{t=t_{\text{mix}}(\delta)}^T \left[ \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \left[ \rho^{\pi^*} (P^{\pi^*})^j \right] (s, a) \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, a} (V^* - V_{k_i(s, a)}) \right. \\
2325 & \\
2326 & \\
2327 & \quad \left. - \left( 1 + \frac{1}{\Gamma} \right) \frac{[\rho^{\pi^*} (P^{\pi^*})^j] (s_t, a_t)}{\mu_b(s_t, a_t)} \sum_{i=1}^{n_t(s_t, a_t)} \eta_i^{n_t(s_t, a_t)} P_{s_t, a_t} (V^* - V_{k_i(s_t, a_t)}) \right] \\
2328 & \\
2329 & \\
2330 & = \sum_{t=t_{\text{mix}}(\delta)}^T \left[ \sum_{s \in \mathcal{S}, a \in \mathcal{A}} \tilde{d}(s, a) \sum_{i=1}^{n_t(s, a)} \eta_i^{n_t(s, a)} P_{s, a} (V^* - V_{k_i(s, a)}) \right. \\
2331 & \\
2332 & \quad \left. - \left( 1 + \frac{1}{\Gamma} \right) \frac{\tilde{d}(s_t, a_t)}{\mu_b(s_t, a_t)} \sum_{i=1}^{n_t(s_t, a_t)} \eta_i^{n_t(s_t, a_t)} P_{s_t, a_t} (V^* - V_{k_i(s_t, a_t)}) \right]. \\
2333 & \\
2334 & \\
2335 & \\
2336 &
\end{aligned}$$

2337 Here,

$$\tilde{d}(s, a) := \sum_{j=0}^{\infty} \gamma \left[ \gamma \left( 1 + \frac{1}{\Gamma} \right)^3 \right]^j \left[ \rho^{\pi^*} (P^{\pi^*})^j \right] (s, a)$$

2338 for any  $(s, a) \in \mathcal{S} \times \mathcal{A}$ . Note that this equation exactly matches with Step 2.4 in (Yan et al., 2022),  
2339 hence the remaining proof similarly follows, and is omitted here. Specifically, we have that

$$\psi \lesssim \frac{C^* t_{\text{mix}t}}{(1-\gamma)^3} \log^2 \left( \frac{T}{\delta} \right) + \frac{C^* S t_{\text{mix}}}{(1-\gamma)^2} \log \left( \frac{T}{\delta} \right).$$

2346 **Bounding  $\phi$ .** Similar to (Yan et al., 2022), we can employ an analogous argument to show that  $\phi$  can  
2347 be bounded as

$$\phi \lesssim \frac{C^* t_{\text{mix}t}}{(1-\gamma)^3} \log^2 \left( \frac{T}{\delta} \right) + \frac{C^* S t_{\text{mix}}}{(1-\gamma)^2} \log \left( \frac{T}{\delta} \right).$$

2351 Now, plugging the bounds on  $\alpha$ ,  $\theta$ ,  $\psi$  and  $\phi$  further implies that

$$\begin{aligned}
2352 & \alpha_0 \leq \alpha + \xi + \theta + \psi + \phi \\
2353 & \\
2354 & \lesssim \sqrt{\frac{C^* S T t^2}{(1-\gamma)^5}} + \frac{C^* S t_{\text{mix}t}}{(1-\gamma)^2} + \frac{C^* t_{\text{mix}t}}{(1-\gamma)^3} \log^2 \left( \frac{T}{\delta} \right). \\
2355 & \\
2356 &
\end{aligned}$$

2357 We then invoke equation 129 to conclude that

$$V^*(\rho) - V^{\hat{\pi}}(\rho) \leq \frac{\alpha_0}{T} \lesssim \sqrt{\frac{C^* S t^2}{T(1-\gamma)^5}} + \frac{C^* S t_{\text{mix}t}}{T(1-\gamma)^2} + \frac{C^* t_{\text{mix}t}^2}{T(1-\gamma)^3}.$$

2361 This hence completes the proof. □

2362  
2363  
2364  
2365  
2366  
2367  
2368  
2369  
2370  
2371  
2372  
2373  
2374  
2375