PARETO-CONDITIONED DIFFUSION MODELS FOR OFFLINE MULTI-OBJECTIVE OPTIMIZATION

Anonymous authors

Paper under double-blind review

ABSTRACT

Multi-objective optimization (MOO) arises in many real-world applications where trade-offs between competing objectives must be carefully balanced. In the offline setting, where only a static dataset is available, the main challenge is generalizing beyond observed data. We introduce Pareto-Conditioned Diffusion (PCD), a novel framework that formulates offline MOO as a conditional sampling problem. By conditioning directly on desired trade-offs, PCD avoids the need for explicit surrogate models. To effectively explore the Pareto front, PCD employs a reweighting strategy that focuses on high-performing samples and a reference-direction mechanism to guide sampling towards novel, promising regions beyond the training data. Experiments on standard offline MOO benchmarks show that PCD achieves highly competitive performance and, importantly, demonstrates greater consistency across diverse tasks than existing offline MOO approaches.

1 Introduction

Multi-objective optimization (MOO) tackles real-world problems involving conflicting objectives (Miettinen, 1998; Deb, 2001). Such scenarios arise in domains from scientific discovery to engineering, where performance must be balanced against cost and energy. In many of these domains, evaluating candidate designs is prohibitively expensive, time-consuming, or even risky. For instance, in biological sequence design, each experiment or simulation incurs substantial cost (Angermueller et al., 2020). In such settings, online optimization methods, which rely on repeatedly querying a black-box objective function, are often impractical (Trabucco et al., 2022). This challenge has motivated the development of offline MOO, which instead relies on a pre-collected dataset of previously evaluated designs, without access to the true objective during optimization (Xue et al., 2024).

The offline setting presents unique and significant challenges. Unlike online methods, algorithms cannot query the true objective function during training and are restricted to a static dataset (Trabucco et al., 2022). This constraint introduces a fundamental tradeoff as the algorithm must remain faithful to the data to avoid unreliable predictions, yet also explore beyond the observed designs to identify superior solutions (Trabucco et al., 2022). Moreover, offline MOO requires finding a set of solutions that balances multiple objectives, rather than a single optimum (Xue et al., 2024). This leads to a particularly difficult form of generalization: algorithms must be creative enough to find solutions that improve upon the training data, while being conservative enough to stay within the reliable boundaries of the training data manifold (Trabucco et al., 2022; Xue et al., 2024).

The most dominant approach to offline MOO is model-based optimization (Kim et al., 2025), typically using a surrogate model (Trabucco et al., 2021; Yu et al., 2021; Yuan et al., 2023b; Qi et al., 2022; Chen et al., 2023; Daulton et al., 2020a;b). The surrogate is trained on the static dataset to approximate the black-box objective and then used with multi-objective evolutionary algorithms (MOEAs) (Deb, 2001; Deb et al., 2002) to search for promising solutions. More recent approaches use generative models to directly synthesize solutions (Kim et al., 2023). For instance, ParetoFlow (Yuan et al., 2025) employs flow matching-based generative models guided by a multi-objective predictor to generate samples along the Pareto front. However, these methods still rely on surrogate predictors to guide the generation process, inheriting the same potential risks of exploiting inaccuracies in the surrogate model Trabucco et al. (2021).

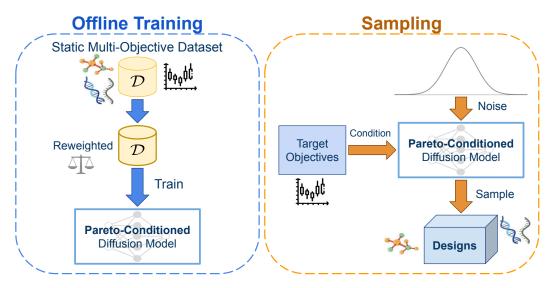


Figure 1: Overview of the PCD framework, which reframes offline MOO as a conditional sampling problem. Training: A conditional diffusion model is trained on a static dataset, using a novel reweighting strategy to emphasize high-quality solutions near the Pareto front. Sampling: At inference, the model directly generates novel designs conditioned on target objectives. This end-to-end approach sidesteps the need for the explicit surrogate models and separate optimizers required by prior methods.

Contribution. In this work, we propose *Pareto-Conditioned Diffusion (PCD)*, a novel framework that reframes offline MOO as a conditional sampling problem, enabling the generation of high-quality solutions conditioned directly on target trade-offs (see Fig. 1). Unlike prior methods (Xue et al., 2024; Yuan et al., 2025) that rely on complex, multi-stage pipelines of surrogate predictors or separate optimization algorithms, PCD offers a more direct, end-to-end framework. It unifies the generation of candidate solutions and the modeling of the Pareto front into a single conditional generative model, simplifying the overall optimization process without requiring explicit objective function approximation.

To enable this framework, we introduce two key algorithmic contributions: (1) a multi-objective reweighting strategy that biases the model to focus on high-performing regions of the data distribution, and (2) a reference-direction mechanism to generate diverse and high-quality conditioning points that enable generalization beyond the observed dataset. We provide extensive empirical validation on a wide range of standard offline MOO benchmarks. These experiments demonstrate that PCD achieves highly competitive performance and, more importantly, exhibits significantly greater consistency across a wide variety of tasks than existing offline MOO approaches. The effectiveness of our proposed reweighting and conditioning mechanisms is confirmed through rigorous ablation studies.

2 Related Work

Offline Multi-Objective Optimization. Prior work in offline MOO has primarily focused on model-based approaches (Xue et al., 2024; Kim et al., 2025). These methods train a surrogate model on a static dataset to approximate the black-box objective function. Surrogates can take the form of Deep Neural Networks (DNNs) (Trabucco et al., 2021; Yu et al., 2021; Qi et al., 2022; Yuan et al., 2023b; Chen et al., 2023), which scale well to high-dimensional search spaces, or Gaussian Processes (GPs) (Daulton et al., 2020a;b), which provide uncertainty estimates useful for exploration. Once the surrogate is trained, a separate search algorithm, most commonly MOEAs such as NSGA-II (Deb, 2001; Deb et al., 2002), is used to optimize the learned proxy to find promising solutions (Xue et al., 2024). The performance of this multi-stage pipeline, however, is fundamentally bottlenecked by the accuracy of the surrogate model (Trabucco et al., 2021).

Generative Modeling Methods. More recent approaches use generative models to directly synthesize solutions (Kim et al., 2023). The primary advantage of these methods is their ability to generate diverse designs without relying on a separate, explicit search algorithm (Kim et al., 2025). For instance, ParetoFlow (Yuan et al., 2025) and PGD-MOO (Annadani et al., 2025) employ generative models guided by a multi-objective predictor. Similarly, LaMBO (Stanton et al., 2022) integrates Bayesian optimization to steer its diffusion model, while MOGFNs (Jain et al., 2023) utilize generative flow networks often steered by scalarization functions. However, the effectiveness of these methods is still dependent on a surrogate predictor or a scalarization function to guide the generator (Yuan et al., 2025; Annadani et al., 2025).

In contrast, our method, PCD, removes this dependency on intermediate guidance mechanisms like explicit surrogate models or scalarization. PCD frames offline MOO as a conditional sampling problem, generating high-quality solutions by conditioning the diffusion model directly on target objectives. In doing so, PCD extends prior work on single-objective conditional generation, such as Model Inversion Networks (MINs) (Kumar & Levine, 2020) and Denoising Diffusion Optimization Models (DDOM) (Krishnamoorthy et al., 2023), to the more complex multi-objective setting. Our work is also distinct from reward-directed diffusion models (Yuan et al., 2023a), which focus on maximizing a single reward signal rather than balancing a set of conflicting objectives.

3 BACKGROUND

Offline Multi-Objective Optimization. Let $f: \mathcal{X} \to \mathbb{R}^m$ be a vector-valued function that maps a solution from the solution space \mathcal{X} to the m-dimensional objective space \mathbb{R}^m . A multi-objective optimization (MOO) problem can be formally defined as

$$\min_{\boldsymbol{x} \in \mathcal{X}} \boldsymbol{f}(\boldsymbol{x}) = [f_1(\boldsymbol{x}), \dots, f_m(\boldsymbol{x})], \tag{1}$$

where $x \in \mathcal{X} \subseteq \mathbb{R}^d$ is a solution vector of dimension d, and f(x) consists of m objective functions that must be minimized simultaneously (Miettinen, 1998; Deb, 2001). Since there is generally no single solution x^* that minimizes all objectives simultaneously, solutions are compared using Pareto dominance.

Definition 1 (Pareto Dominance). An objective vector f(x) is said to Pareto-dominate another vector f(x'), denoted $f(x) \prec f(x')$, if $\forall i : f_i(x) \leq f_i(x')$ with at least one strict inequality.

Definition 2 (Pareto Optimality). A solution $x^* \in \mathcal{X}$ is called Pareto-optimal if no other solution $x \in \mathcal{X}$ Pareto-dominates it. The set of all such solutions is the Pareto-optimal set (PS) and their corresponding set of objective vectors, $\{f(x^*) \mid x^* \in PS\}$, forms the Pareto front (PF).

The goal of MOO is to approximate the PF with a diverse and well-distributed set of solutions. When evaluating the objective function f is expensive, as in drug discovery or architecture search, offline MOO uses a pre-collected dataset $\mathcal{D} = \{(x_i, y_i)\}_{i=1}^N$, with $y_i = f(x_i)$, without direct access to f during training (Xue et al., 2024; Kim et al., 2025). Offline methods rely solely on this static dataset \mathcal{D} , though a limited budget Q of new queries to f may be allowed during evaluation. Solution quality is typically measured by the Hypervolume (HV) indicator, which is calculated relative to a reference point derived from the best-known solutions when the true PF is unknown (Zitzler & Thiele, 1998; Zitzler et al., 2007).

Conditional Diffusion Models. Diffusion models are a powerful class of generative models that produce high-quality and diverse samples by iteratively denoising corrupted data (Ho et al., 2020; Song et al., 2021). Building on the Elucidated Diffusion Model (EDM) formulation (Karras et al., 2022), we extend it to the conditional setting. The clean data is drawn from a joint distribution $(x, y) \sim p_{\text{data}}(x, y)$, and the conditional smoothed distribution is defined as $p(x \mid y; \sigma)$, obtained by adding Gaussian noise of standard deviation σ to x. The evolution of a noisy conditional sample $x \sim p(x \mid y; \sigma)$ as the noise level decreases is described by the ordinary differential equation (ODE):

$$dx/d\sigma = -(D_{\theta}(x; y, \sigma) - x)/\sigma.$$
(2)

The denoiser network D_{θ} is trained to minimize the expected L_2 denoising error:

$$\theta = \arg\min_{\theta} \mathbb{E}_{(\boldsymbol{x}, \boldsymbol{y}) \sim p_{\text{data}}, \sigma \sim p_{\text{train}}, \boldsymbol{n} \sim \mathcal{N}(0, \sigma^2 \mathbb{I})} \lambda(\sigma) \|D_{\theta}(\boldsymbol{x} + \boldsymbol{n}; \boldsymbol{y}, \sigma) - \boldsymbol{x}\|_2^2.$$
(3)

Here, $p_{\text{train}}(\sigma)$ specifies the noise distribution used during training and $\lambda(\sigma)$ is a weighting factor between noise levels. Sampling starts from pure noise $x_0 \sim p(x \mid y; \sigma_{\text{max}})$ and follows the ODE down to $\sigma = 0$, yielding a sample from the conditional data distribution.

To steer generation towards a desired conditioning target y, we employ classifier-free guidance (CFG) (Ho & Salimans, 2022). This modifies the ODE by combining a conditional denoiser $D_{\theta}(x; y, \sigma)$ with an unconditional denoiser $D_{\theta}(x; \sigma)$, where the unconditional denoiser is implemented using the same network by randomly dropping conditioning during training. The modified ODE is:

$$d\mathbf{x}/d\sigma = -(\gamma D_{\theta}(\mathbf{x}; \mathbf{y}, \sigma) + (1 - \gamma)D_{\theta}(\mathbf{x}; \sigma) - \mathbf{x})/\sigma, \tag{4}$$

where γ controls the guidance strength. Setting $\gamma > 1$ amplifies the influence of the conditioning target, guiding the samples to regions consistent with y.

4 Method

Building on the conditional diffusion framework, PCD reframes offline MOO as a conditional generation problem, where \boldsymbol{x} represents candidate solutions and the conditioning vector \boldsymbol{y} corresponds to the target objectives. The diffusion model learns to directly model the conditional distribution $p(\boldsymbol{x} \mid \boldsymbol{y}; \sigma)$ of solutions \boldsymbol{x} given objectives \boldsymbol{y} . In the following sections, we describe the two key components that enable this approach: (1) a reweighting strategy to emphasize high-quality designs near the Pareto front, and (2) a reference-direction mechanism to steer sampling toward preferred trade-offs and generalize beyond the observed dataset.

Training via Multi-Objective Reweighing. As stated, the goal of offline MOO is to discover new solutions that outperform those in the offline dataset \mathcal{D} . To achieve this, the model must generalize accurately near well-performing samples, while modeling of low-performing regions is less important. A natural way to do this is to place higher emphasis on high-performance points by reweighting the dataset (Kumar & Levine, 2020; Krishnamoorthy et al., 2023). Simply pruning poorly performing points, as in (Xue et al., 2024), can increase the variance of the training objective (Kumar & Levine, 2020; Krishnamoorthy et al., 2023).

A key challenge when reweighting the offline dataset is how to rank the samples. As noted earlier, there is no total ordering between f(x) and f(x'), so simple strategies, such as measuring the distance to the best point in the dataset, are not feasible. Instead, points can be ranked based on the number of points that dominate them. Specifically, one can compute the *dominance number* (Zhao et al., 2021):

$$o(x) := \sum_{x' \in \mathcal{D}} \mathbb{I}[f(x) \prec f(x'), x \neq x']$$
 (5)

where \mathbb{I} is the indicator function. Intuitively, a lower dominance number indicates that a point performs better relative to other points in the offline dataset.

To reweight the dataset, the objective space \mathbb{R}^m is first partitioned into a grid of N_B bins of equal width. Points in a bin are then weighted to emphasize bins that 1) contain more points, and 2) are well-performing on average. We implement this using the following multi-objective reweighting scheme, similar to (Kumar & Levine, 2020; Krishnamoorthy et al., 2023):

$$w_i = \frac{|B_i|}{|B_i| + K} \exp\left(\frac{-\frac{1}{|B_i|} \sum_{j=1}^{|B_i|} o(\mathbf{x}_{b_j})}{\tau}\right)$$
(6)

where $|B_i|$ is the size of the *i*-th bin, x_{b_j} is the *j*-th sample of *i*-th bin and K, τ are hyperparameters controlling smoothing over bin sizes and the temperature of the weighting distribution. The first term emphasizes bins with more points, while the second assigns higher weight to bins containing high-performance points. Therefore, Equation 6 achieves both desired properties. Appendix A.2 discusses practical implications of reweighting in more detail.

To put it all together, Equation 6 is applied to Equation 3, resulting in the reweighted denoising L_2 objective:

$$\theta = \arg\min_{\theta} \mathbb{E}_{(\boldsymbol{x}, \boldsymbol{y}) \sim p_{\text{data}}, \, \sigma \sim p_{\text{train}}, \, \boldsymbol{n} \sim \mathcal{N}(0, \sigma^2 \mathbb{I})} w(\boldsymbol{y}) \, \lambda(\sigma) \, \|D_{\theta}(\boldsymbol{x} + \boldsymbol{n}; \boldsymbol{y}, \sigma) - \boldsymbol{x}\|_{2}^{2}, \tag{7}$$

Algorithm 1 PCD Training and Sampling

216

235236237

238

239240

241

242

243

244

245

246

247

248

249

250

251

252

253

254255

256

257

258

259

260

261262263

264

265

266

267

268

269

```
217
                   Input: Dataset \mathcal{D} = \{(\boldsymbol{x}_i, \boldsymbol{y}_i)\}_{i=1}^N, hyperparameters for reweighting (N_B, K, \tau) and sampling
218
                   (Q, L, \gamma, S, \sigma_{\min}, \sigma_{\max})
219
                   Output: Candidate set X with |X| = Q
220
                   Phase 1: Training
221
              1: Initialize model parameters \theta
222
              2: Train denoiser D_{\theta} on \mathcal{D} using the reweighted objective (Eq. 7)
223
                   Phase 2: Diffusion Sampling
224
              3: Generate conditioning points \hat{Y} = \{\hat{y}_i\}_{i=1}^Q using Algorithm 2
225
              4: X \leftarrow \emptyset
226
              5: for each \hat{y} \in \hat{Y} do
                        Sample \boldsymbol{x} \sim \mathcal{N}(\boldsymbol{0}, \sigma_{\max}^2 \mathbb{I})
227
              6:
                                                                                                             > Start sampling from pure noise
                        for \sigma from \sigma_{\max} to \sigma_{\min} over S steps do
228
              7:
229
              8:
                              D_{\theta}(\boldsymbol{x}; \hat{\boldsymbol{y}}, \sigma) \leftarrow \gamma D_{\theta}(\boldsymbol{x}; \hat{\boldsymbol{y}}, \sigma) + (1 - \gamma) D_{\theta}(\boldsymbol{x}; \sigma)
                                                                                                            ▶ Apply Classifier-Free Guidance
230
              9:
                              Update x \leftarrow \text{ODE-STEP}(x, \hat{D}_{\theta}, \sigma)
                                                                                                               ▶ Perform one step of denoising
231
             10:
                        end for
                        X \leftarrow X \cup \{x\}
             11:
232
             12: end for
233
             13: return X
234
```

where w(y) is the reweighting factor from Equation 6, and $\lambda(\sigma)$ is the noise-level-dependent weighting term.

Generating diverse set of condition points. A crucial question in conditional sampling is how to select the target conditioning points, which we denote as \hat{y} . While simple tactics exist for single-objective optimization (Kumar & Levine, 2020), they are ineffective for MOO where the goal is to approximate the entire Pareto front. We therefore propose a two-stage procedure to generate a set of L conditioning points \hat{y} , designed to be both high-quality and diverse. The procedure is described below briefly, with full pseudocode and explanation in Appendix A.5.

To collect the set of representative points, we propose to use a procedure motivated by the survival method in NSGA-III (Deb & Jain, 2014). Firstly, the objective space is partitioned by generating L direction vectors \mathbf{w}_i via Riesz s-Energy method (Hardin & Saff, 2005). Secondly, the points in the offline dataset are ranked via non-dominated sorting, resulting in a list of fronts (F_1, F_2, \ldots, F_M) , where each front consists of set of points with same rank. Lastly, we iterate over the fronts to assign each point a direction vector \mathbf{w}_i . Initially, each direction vector gets assigned a point that is closest to it in perpendicular distance. Then, the rest of point's in front F_i are iterated over one-by-one, and assigned to a direction vector with least amount of points at the moment. This procedure is continued until Q (point, direction vector) pairs have been created.

After collecting the set of representative points, the points are extrapolated towards the assigned direction vector to improve their quality over the points in the offline dataset. However, in practice the number of solutions Q is often larger than the number of direction vectors L. Therefore multiple points get extrapolated towards same direction, which decreases the diversity of the condition points. To compact this, the final condition points are obtained by adding zero-mean Gaussian noise to the extrapolated points, akin to the Gaussian mutation operator used in evolutionary algorithms. This reweighted objective, paired with reference direction sampling forms the core of the proposed PCD.

Sampling with Classifier-Free Guidance. For each conditioning point \hat{y} generated by our reference-direction mechanism, we sample a corresponding solution x by applying Classifier-Free Guidance (CFG) (Ho & Salimans, 2022). As formally defined in Section 3, CFG steers the denoising process by creating a weighted combination of the model's general and target-specific predictions. This well-established technique, widely used for high-fidelity image generation (Saharia et al., 2022; Rombach et al., 2022), strongly enforces adherence to the conditioning signal. In our setting, this biases the generated sample x to be highly faithful to the target trade-off \hat{y} , yielding a final set of solutions that accurately covers the desired region of the Pareto front.

5 EXPERIMENTAL VALIDATION

We conducted extensive experiments to validate the performance of the proposed method against variety of baselines from the literature. In Section 5.1, we give an overview of the used benchmark, while Section 5.2 introduces the baselines. Section 5.3 discusses the main results, and Section 5.4 validates the performance of the proposed components via ablation studies.

5.1 OVERVIEW

Our proposed approach is evaluated using the comprehensive Offline MOO benchmark (Xue et al., 2024). We consider five diverse task categories: 1) synthetic, 2) multi-objective reinforcement learning (MORL), 3) real-world applications (RE), 4) scientific design, and 5) multi-objective neural architecture search (MONAS), each of which is described in more detail below. For benchmark tasks that involve discrete values, we convert them into continuous logits, following the standard practice in prior work (Trabucco et al., 2022; Xue et al., 2024).

Tasks. The synthetic task set consists of 11 commonly used multi-objective test functions, including DTLZ1, DTLZ7¹, OmniTest, VLMOP1-3 and ZDT1-4, ZDT6. These are all continuous-valued functions with datasets of 60,000 points each, featuring two or three objectives with varying Pareto front shapes.

The MORL task set contains two continuous high-dimensional problems, MO-Hopper and MO-Swimmer, each with two objectives, where the goal is to generate optimal parameters for a neural network control policy. The offline datasets are composed of policy parameters collected during PGMORL training Xu et al. (2020).

The Real-World Applications (RE) task set consists of engineering design problems, such as pressure vessel and rocket injector design (Tanabe & Ishibuchi, 2020). These tasks have 4-7 dimensional search spaces and 2-6 objectives. Unlike the previous task sets, several RE tasks involve mixed-integer search spaces.

The Scientific Design task set includes one molecule design problem and three discrete protein design problems. The molecule task is optimized in a 32-dimensional latent space, while the protein tasks involve generating sequences of 32 to 200 tokens to optimize two conflicting objectives.

The MONAS task set aims to optimize the accuracy, latency, and parameter count of a neural network. With up to 34 decision variables, this is the only purely categorical task set in our evaluation, posing a unique challenge for continuous generative models.

Excluded Tasks. While the original benchmark suite by (Xue et al., 2024) included combinatorial tasks, we exclude them here. Adapting diffusion models to combinatorial domains requires substantial modifications to the denoising process and decoding strategy (Sun & Yang, 2023; Sanokowski et al., 2024), which is beyond our current scope. Following prior work (Yuan et al., 2025), we focus on continuous, discrete and categorical tasks, which we believe sufficiently illustrate the strengths and limitations of our proposed method.

Setup. The quality of the generated solution set is measured using the Hypervolume (HV) indicator, following the original benchmark (Xue et al., 2024). Formally, HV measures the volume of the objective space that is weakly dominated by a solution set (Zitzler & Thiele, 1998). HV is a comprehensive metric that condenses the quality of a set into a single number while simultaneously measuring its 1) uniformity, 2) spread, and 3) convergence (Zintgraf et al., 2015), making it ideal for comparing methods. Following prior work (Trabucco et al., 2022; Xue et al., 2024), we evaluate performance on different subsets of the generated solutions. Specifically, we first generate a set of Q=256 candidate solutions. We then report the HV on the top P percentile of this set for $P \in \{100, 75, 50\}$. For P < 100, the lowest-performing (100 - P)% of solutions are removed before HV calculation. All results are reported as the mean and standard deviation over 5 random seeds unless specified otherwise. Detailed hyperparameters for our method PCD and training procedure are provided in Appendix A.3.

¹Tasks DTLZ2-DTLZ6 are excluded due to evaluation errors in the original benchmark: https://github.com/lamda-bbo/offline-moo/issues/14

5.2 Baselines.

Our proposed method is compared against a comprehensive set of baselines, primarily drawn from the Off-MOO-Bench benchmark (Xue et al., 2024). The majority of these methods are *surrogate-based*: they first train a model on the offline data to approximate the objective functions, and then use this learned proxy to guide a search algorithm. These baselines primarily differ in the type of surrogate model used, for which we consider both DNN-based and GP-based approaches.

DNN-based surrogates are categorized into three subclasses based on their architecture. End-to-end (E2E) models use a single DNN to output an m-dimensional vector representing all objectives. In contrast, Multiple Models (MM) maintain a separate regressor for each of the m objectives. As each model is trained on a single objective, this approach allows for pairing with powerful offline single-objective optimization techniques such as COMs (Trabucco et al., 2021), ICT (Yuan et al., 2023b), IOM (Qi et al., 2022), and Tri-Mentoring (TM) Chen et al. (2023). Finally, inspired by multi-task learning, Multi-Head (MH) models use a shared feature encoder with separate output heads for each objective, enabling efficient information sharing. MH models are often paired with training techniques like PCGrad (PC) (Yu et al., 2020) and GradNorm (GN) (Chen et al., 2018) to improve generalization.

For GP-based surrogates, we only consider the prominent qNEHVI algorithm (Daulton et al., 2020a). Following the findings of (Xue et al., 2024), we omit other GP models for two reasons: 1) training them on large offline datasets is computationally expensive, and 2) DNN-based models have been shown to outperform them on most offline MOO tasks. Regardless of the surrogate type (DNN or GP), the final solution set is generated using the NSGA-II search algorithm (Deb et al., 2002) with a budget of Q=256 evaluations on the true oracle.

Finally, we include *generative model baselines*. ParetoFlow (Yuan et al., 2025) is the only other generative model *specifically* developed for offline MOO that we are aware of and is our primary comparison². While LaMBO (Stanton et al., 2022) is a related diffusion-based approach, it was used to generate some of the benchmark datasets themselves. Including LaMBO as a baseline could therefore introduce bias, so it is excluded. We also include a simple but strong baseline, $\mathcal{D}(\text{best})$, which represents the performance of the non-dominated set of solutions present in the original offline dataset.

5.3 RESULTS

Table 1 summarizes our primary experimental findings, showing the average rank of each method across the five task categories based on the 100th percentile HV. The table also presents the total average rank aggregated over all tasks. For detailed per-task HV scores at the $P \in \{100, 75, 50\}$ percentiles, please see Appendix A.6, A.7, and A.8 respectively.

The results in Table 1 clearly demonstrate the effectiveness of our approach. **PCD achieves the best overall rank**, highlighting its consistent high performance across a diverse set of problems. This consistency is particularly noteworthy as these results were obtained using a single, untuned set of hyperparameters, underscoring the method's robustness. Even in the MORL and MONAS task sets, where its performance is weaker relative to other categories, PCD still outperforms the other generative baseline, ParetoFlow (Yuan et al., 2025), by a considerable margin.

The relatively weaker performance on *MORL* tasks can be attributed to the extremely high-dimensional search space. In fact, this benchmark proved challenging for all evaluated methods. Notably, and in contrast to some prior reports (Yuan et al., 2025), we found that no method could produce a solution set superior to the non-dominated points already present in the offline dataset³. This finding highlights the immense difficulty of the MORL tasks and underscores the need for further research in this area.

Similarly, the performance on MONAS is impacted by its purely categorical search space, which presents a challenge for our continuous diffusion model. While diffusion models have achieved ex-

²PGD-MOO (Annadani et al., 2025) is omitted because the preprint reports results only on a limited subset of synthetic tasks, and our attempts to reproduce the reported results using the authors' code were unsuccessful.

³We hypothesize that the difference in our results and those of prior work may be due to updated datasets released by (Xue et al., 2024).

Table 1: Average rank (\$\psi\$) of PCD and baseline methods across five task categories. Ranks are calculated based on the 100th percentile HV. **Bold** and <u>underlined</u> rows indicate the best and runner up methods respectively. PCD achieves the best overall average rank, demonstrating its strong and consistent performance.

Method	Synthetic	MORL	RE	Scientific	MONAS	Avg. rank
$\mathcal{D}(\text{best})$	5.45 ± 0.19	1.70 ± 0.27	2.60 ± 0.07	9.35±0.14	11.53 ± 0.06	7.43±0.05
MOBO	8.69 ± 0.30	14.60 ± 0.42	10.00 ± 0.33	6.75 ± 0.47	8.11 ± 0.80	8.81 ± 0.34
E2E + GN	7.33 ± 0.55	5.70 ± 2.14	7.06 ± 0.32	5.35 ± 1.38	9.33 ± 0.53	7.82 ± 0.40
E2E + PC	5.93 ± 0.25	3.50 ± 1.22	6.22 ± 0.33	4.30 ± 1.32	6.60 ± 0.40	6.01 ± 0.29
E2E	6.16 ± 0.30	9.70 ± 2.08	6.06 ± 0.30	4.20 ± 1.40	5.13 ± 0.22	5.71 ± 0.16
MH + GN	8.82 ± 0.53	8.90 ± 2.16	8.14 ± 0.94	5.05 ± 2.14	12.57 ± 0.40	9.84 ± 0.33
MH + PC	8.87 ± 0.45	10.90 ± 1.08	6.74 ± 0.68	6.15 ± 0.91	7.46 ± 0.30	7.68 ± 0.33
MH	6.18 ± 0.53	8.00 ± 1.41	6.14 ± 0.29	5.80 ± 0.89	5.88 ± 0.49	6.10 ± 0.22
MM + COMs	8.02 ± 0.47	3.60 ± 1.29	6.54 ± 0.17	$3.85 {\pm} 0.68$	7.22 ± 0.43	6.80 ± 0.13
MM + ICT	6.73 ± 0.46	9.10 ± 1.95	5.44 ± 0.32	5.05 ± 0.74	8.42 ± 0.40	7.08 ± 0.13
MM + IOM	5.16 ± 0.51	12.70 ± 0.91	5.76 ± 0.52	4.40 ± 1.15	5.77 ± 0.50	5.80 ± 0.20
MM + TM	6.55 ± 0.82	7.90 ± 2.16	5.78 ± 0.25	5.90 ± 1.29	7.87 ± 0.39	6.91 ± 0.20
MM	6.07 ± 0.50	9.50 ± 0.79	5.94 ± 0.41	6.55 ± 0.93	4.97 ± 0.46	5.80 ± 0.21
ParetoFlow	2.44 ± 0.28	8.50 ± 1.32	1.74 ± 0.17	9.05 ± 0.27	11.19 ± 0.52	6.74 ± 0.23
PCD (ours)	3.38 ± 0.20	5.50 ± 3.30	1.51 ± 0.13	4.05 ± 0.33	7.54 ± 0.50	4.80±0.30

Table 2: Average 100th percentile HV (↑) on 5 different tasks with different data processing and sampling strategies. **Bold** and <u>underlined</u> rows indicate the best and runner up methods respectively. The results validate the effectiveness of both our proposed reweighting and reference-direction mechanisms.

Variant	ZDT2	MO-Swimmer-v2	RE34	Regex	C10/MOP2
Ideal + N/A	7.59 ± 0.19	1.76 ± 0.21	9.19 ± 0.26	5.60 ± 0.35	10.46 ± 0.01
Ref. Dir. + N/A	7.89 ± 0.19	3.53 ± 0.11	10.11 ± 0.03	5.55 ± 0.25	10.47 ± 0.01
Ref. Dir. + Pruning	5.64 ± 0.13	3.63 ± 0.07	10.16 ± 0.03	4.20 ± 0.64	10.55 ± 0.08
PCD	6.25±0.06	3.69±0.11	10.17±0.04	4.80 ± 0.87	10.59±0.04

cellent results on discrete and graph-based data, doing so typically requires specialized architectural changes not employed in this work (An et al., 2024; Niu et al., 2020; Jo et al., 2022). Integrating these architectural advances into the PCD framework is a promising direction for future work.

5.4 ABLATION STUDIES

Ablations on PCD components. We conduct an ablation study to validate the two primary components of PCD introduced in Section 4: the multi-objective reweighting scheme and the reference-direction mechanism for generating conditioning points. We compare three data processing techniques: 1) no processing (N/A), 2) simple pruning of low-quality points as in (Xue et al., 2024), and 3) our proposed data reweighting. Additionally, we compare two methods for generating conditioning points: our proposed reference-direction (Ref. Dir.) mechanism, and a simpler baseline (Ideal) that randomly samples non-dominated points from the dataset and interpolates them toward the ideal objective vector, a strategy common in single-objective offline optimization. Note that the full PCD method combines our proposed reweighting with the reference-direction mechanism.

The results in Table 2 confirm the effectiveness of both of our proposed components. First, using the *reference-direction mechanism* to select conditioning points consistently improves or maintains performance compared to the simplistic "Ideal" point strategy. The benefit is especially pronounced on the MO-Swimmer task, where our approach nearly doubles the HV, highlighting the critical importance of generating high-quality and diverse conditioning points. Second, the table showcases that our proposed *reweighting strategy consistently and significantly outperforms the simple pruning* approach from (Xue et al., 2024). Interestingly, for the ZDT2 and Regex tasks, any form of data processing appears to harm model performance. We hypothesize this is due to the quality of the

underlying datasets in these specific cases; when a dataset is less skewed (i.e., most points are already high-quality), aggressive reweighting or pruning can discard valuable training signal for minimal gain. As explained further in Appendix A.1, these tasks appear to be the exception, as we observe no similar performance degradation in other benchmarks.

Effect of guidance scale. Finally, we ablate the effect of the classifier-free guidance scale, γ . As discussed in Section 3, γ balances the influence of the conditional and unconditional components of the denoiser. Since our goal is to generate solutions superior to those in the offline dataset, we hypothesized that a stronger guidance scale ($\gamma > 1$) would improve performance by forcing the model to adhere more closely to our novel conditioning points. Figure 2 plots the resulting HV-normalized by the performance of our default scale, $\gamma = 2.5$ across five different tasks.

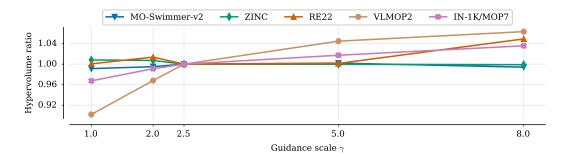


Figure 2: Effect of the guidance scale γ on the normalized HV ratio across five representative tasks. Performance saturates quickly, showing limited benefit from strong guidance.

The results in Figure 2 show that increasing the guidance scale yields surprisingly limited performance gains, with performance saturating or even slightly decreasing for $\gamma>2.5$. We attribute this effect to two factors: 1) The dataset is already reweighted to prioritize high-performing samples. This means the diffusion model is inherently biased toward generating better solutions, even with weak conditioning. 2) The conditioning points are near the data manifold. Our reference-direction mechanism generates novel targets by extrapolating from the best existing data. While these targets are new, they remain close to the learned distribution. Consequently, the unconditional component of the model is already adept at generating similar high-quality solutions, reducing the marginal benefit of stronger conditional guidance.

6 SUMMARY AND LIMITATIONS

This paper introduced Pareto-Conditioned Diffusion (PCD), a novel framework that reframes offline multi-objective optimization as a conditional sampling task. By learning to generate high-quality solutions conditioned directly on desired trade-offs, PCD elegantly sidesteps the need for explicit surrogate models or hand-crafted scalarization schemes. To make this approach effective, we introduced two key components: a multi-objective reweighting scheme to bias the model toward the Pareto front, and an NSGA-III-inspired mechanism to generate a diverse set of novel conditioning points from the offline data. Our extensive experiments demonstrated that PCD achieves competitive performance, driven by its remarkable consistency and robustness across a wide variety of benchmarks using a single set of hyperparameters.

Despite its strong performance, PCD has several limitations. As our current implementation is based on a continuous diffusion model, its performance is weaker on purely categorical search spaces (e.g., MONAS), and it is not directly applicable to combinatorial optimization problems. However, we believe this is a promising avenue for future research rather than a fundamental flaw. Given the success of the conditional sampling paradigm on continuous tasks, we are confident that integrating recent advances in discrete and combinatorial diffusion models into the PCD framework could unlock significant progress for offline optimization in these challenging discrete domains.

7 ETHICS STATEMENT

Our work, Pareto-Conditioned Diffusion (PCD), is a general-purpose optimization method intended for real-world applications in engineering and scientific design. However, we recognize its potential for misuse, as the method could be applied to harmful outcomes. We emphasize the need for oversight and safeguards to mitigate potential risks. Because PCD operates in an offline setting, it may also inherit or amplify biases from training data, underscoring the importance of careful dataset curation. Finally, during the preparation of this manuscript, large language models (LLMs) were used to assist in writing and literature discovery, but all content was reviewed and verified by the authors, who are solely responsible for the scientific claims of this work.

8 REPRODUCIBILITY STATEMENT

To ensure reproducibility, we provide supplementary materials with our submission including:

- Source Code: A complete implementation of our proposed method, Pareto-Conditioned Diffusion (PCD).
- Environment and Data: A README file with instructions to set up the environment, along with links to all benchmark datasets and baseline implementations.
- Scripts and Configurations: Scripts to reproduce the results presented in the paper, including the exact training configurations, hyperparameters and random seeds used will be released upon acceptance.

A preliminary version of our source code, sufficient to verify the core methodology, is included in the supplementary materials for the review process.

REFERENCES

- Sohyun An, Hayeon Lee, Jaehyeong Jo, Seanie Lee, and Sung Ju Hwang. DiffusionNAG: Predictor-guided Neural Architecture Generation with Diffusion Models. In *The Twelfth International Conference on Learning Representations*, 2024.
- Christof Angermueller, David Belanger, Andreea Gane, Zelda Mariet, David Dohan, Kevin Murphy, Lucy Colwell, and D. Sculley. Population-based black-box optimization for biological sequence design. In Hal Daumé III and Aarti Singh (eds.), *Proceedings of the 37th International Conference on Machine Learning (ICML)*, volume 119 of *Proceedings of Machine Learning Research*, pp. 324–334. PMLR, July 2020. doi: 10.5555/3524938.3524969. URL https://proceedings.mlr.press/v119/angermueller20a.html.
- Yashas Annadani, Syrine Belakaria, Stefano Ermon, Stefan Bauer, and Barbara E Engelhardt. Preference-guided diffusion for multi-objective offline optimization, 2025.
- Can (Sam) Chen, Christopher Beckham, Zixuan Liu, Xue (Steve) Liu, and Chris Pal. Parallel-mentoring for offline model-based optimization. In Advances in Neural Information Processing Systems, 2023.
- Zhao Chen, Vijay Badrinarayanan, Chen-Yu Lee, and Andrew Rabinovich. Gradnorm: Gradient normalization for adaptive loss balancing in deep multitask networks. In *Proceedings of the 35th International Conference on Machine Learning (ICML)*, 2018.
- Samuel Daulton, Maximilian Balandat, and Eytan Bakshy. Differentiable expected hypervolume improvement for parallel multi-objective Bayesian optimization. In *Advances in Neural Information Processing Systems 33 (NeurIPS)*, pp. 9851–9864, Virtual, 2020a.
- Samuel Daulton, Maximilian Balandat, and Eytan Bakshy. Differentiable expected hypervolume improvement for parallel multi-objective Bayesian optimization. *Advances in Neural Information Processing Systems 33 (NeurIPS)*, pp. 9851–9864, 2020b.
- K. Deb, A. Pratap, S. Agarwal, and T. Meyarivan. A fast and elitist multiobjective genetic algorithm: Nsga-ii. *IEEE Transactions on Evolutionary Computation*, 6(2):182–197, 2002.

- Kalyanmoy Deb. *Multi-Objective Optimization Using Evolutionary Algorithms*. Wiley-Interscience
 Series in Systems and Optimization. John Wiley & Sons, 2001. ISBN 0-471-87339-X, 978-0-471-87339-6.
 - Kalyanmoy Deb and Himanshu Jain. An evolutionary many-objective optimization algorithm using reference-point-based nondominated sorting approach, part i: Solving problems with box constraints. *IEEE Transactions on Evolutionary Computation*, 18(4), 2014.
 - Douglas P Hardin and Edward B Saff. Minimal riesz energy point configurations for rectifiable d-dimensional manifolds. *Advances in Mathematics*, 193(1):174–204, 2005.
 - Jonathan Ho and Tim Salimans. Classifier-free diffusion guidance, 2022. URL https://arxiv.org/abs/2207.12598.
 - Jonathan Ho, Ajay Jain, and Pieter Abbeel. Denoising Diffusion Probabilistic Models. In Hugo Larochelle, Marc'Aurelio Ranzato, Raia Hadsell, Maria-Florina Balcan, and Hsuan-Tien Lin (eds.), *Advances in Neural Information Processing Systems 33 (NeurIPS 2020)*, pp. 6840–6851, 2020.
 - Moksh Jain, Sharath Chandra Raparthy, Alex Hernández-García, Jarrid Rector-Brooks, Yoshua Bengio, Santiago Miret, and Emmanuel Bengio. Multi-objective GFlowNets. In Andreas Krause, Emma Brunskill, Kyunghyun Cho, Barbara Engelhardt, Sivan Sabato, and Jonathan Scarlett (eds.), *Proceedings of the 40th International Conference on Machine Learning*, volume 202 of *Proceedings of Machine Learning Research*, pp. 14631–14653. PMLR, 23–29 Jul 2023. URL https://proceedings.mlr.press/v202/jain23a.html.
 - Jaehyeong Jo, Seul Lee, and Sung Ju Hwang. Score-based generative modeling of graphs via the system of stochastic differential equations. In *Proceedings of the 39th International Conference on Machine Learning*, 2022.
 - Tero Karras, Miika Aittala, Timo Aila, and Samuli Laine. Elucidating the design space of diffusion-based generative models. In *Proc. NeurIPS*, 2022.
 - Tero Karras, Miika Aittala, Jaakko Lehtinen, Janne Hellsten, Timo Aila, and Samuli Laine. Analyzing and improving the training dynamics of diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 31235. IEEE, 2024. doi: 10.1109/CVPR46437.2024.031235. URL https://openaccess.thecvf.com/content/CVPR2024/papers/Karras_Analyzing_and_Improving_the_Training_Dynamics_of_Diffusion_Models_CVPR_2024_paper.pdf.
 - Minsu Kim, Federico Berto, Sungsoo Ahn, and Jinkyoo Park. Bootstrapped training of score-conditioned generator for offline design of biological sequences. In *Advances in Neural Information Processing Systems 36 (NeurIPS)*, pp. 67643–67661, New Orleans, LA, 2023.
 - Minsu Kim, Jiayao Gu, Ye Yuan, Taeyoung Yun, Zixuan Liu, Yoshua Bengio, and Can Chen. Offline model-based optimization: Comprehensive review, 2025. URL https://arxiv.org/abs/2503.17286.
 - Siddarth Krishnamoorthy, Satvik Mehul Mashkaria, and Aditya Grover. Diffusion models for black-box optimization. In *Proceedings of the 40th International Conference on Machine Learning*, 2023.
 - Aviral Kumar and Sergey Levine. Model inversion networks for model-based optimization. In *Advances in Neural Information Processing Systems*, 2020.
 - Cong Lu, Philip Ball, Yee Whye Teh, and Jack Parker-Holder. Synthetic experience replay. In A. Oh, T. Naumann, A. Globerson, K. Saenko, M. Hardt, and S. Levine (eds.), *Advances in Neural Information Processing Systems*, volume 36, pp. 46323–46344. Curran Associates, Inc., 2023. URL https://proceedings.neurips.cc/paper_files/paper/2023/file/911fc798523e7d4c2e9587129fcf88fc-Paper-Conference.pdf.
 - Kaisa Miettinen. *Nonlinear Multiobjective Optimization*, volume 12 of *International Series in Operations Research & Management Science*. Kluwer Academic Publishers, Boston, MA, 1998. ISBN 978-1-4613-7545-6. doi: 10.1007/978-1-4615-5563-6.

- Chenhao Niu, Yang Song, Jiaming Song, Shengjia Zhao, Aditya Grover, and Stefano Ermon. Permutation invariant graph generation via score-based generative modeling. In *Proceedings of the Twenty Third International Conference on Artificial Intelligence and Statistics*, 2020.
 - Han Qi, Yi Su, Aviral Kumar, and Sergey Levine. Data-driven model-based optimization via invariant representation learning. In *Advances in Neural Information Processing Systems*, 2022.
 - Ali Rahimi and Ben Recht. Random features for large-scale kernel machines. In *Advances in Neural Information Processing Systems*, volume 20, pp. 1177–1184. Curran Associates, Inc., 2007.
 - Robin Rombach, Andreas Blattmann, Dominik Lorenz, Patrick Esser, and Björn Ommer. High-resolution image synthesis with latent diffusion models. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 10684–10695, June 2022.
 - Chitwan Saharia, William Chan, Saurabh Saxena, Lala Li, Jay Whang, Emily Denton, Seyed Kamyar Seyed Ghasemipour, Raphael Gontijo-Lopes, Burcu Karagol Ayan, Tim Salimans, Jonathan Ho, David J. Fleet, and Mohammad Norouzi. Photorealistic text-to-image diffusion models with deep language understanding. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL https://openreview.net/forum?id=08Yk-n512Al.
 - Sebastian Sanokowski, Sepp Hochreiter, and Sebastian Lehner. A diffusion model framework for unsupervised neural combinatorial optimization. In *Forty-first International Conference on Machine Learning*, 2024. URL https://openreview.net/forum?id=AFfXlKFHXJ.
 - Yang Song, Jascha Sohl-Dickstein, Diederik P. Kingma, Abhishek Kumar, Stefano Ermon, and Ben Poole. Score-Based Generative Modeling through Stochastic Differential Equations. In *International Conference on Learning Representations (ICLR)*, 2021. URL https://openreview.net/forum?id=PxTIG12RRHS.
 - Samuel Stanton, Wesley J. Maddox, Nate Gruver, Phillip Maffettone, Emily Delaney, Peyton Greenside, and Andrew Gordon Wilson. Accelerating Bayesian optimization for biological sequence design with denoising autoencoders. In *Proceedings of the 39th International Conference on Machine Learning (ICML)*, pp. 20459–20478, Baltimore, MD, 2022.
 - Zhiqing Sun and Yiming Yang. DIFUSCO: Graph-based diffusion solvers for combinatorial optimization. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023. URL https://openreview.net/forum?id=JV8Ff0lgVV.
 - Ryoji Tanabe and Hisao Ishibuchi. An easy-to-use real-world multi-objective optimization problem suite. *Applied Soft Computing*, 89:106078, 2020.
 - Ilya Tolstikhin, Neil Houlsby, Alexander Kolesnikov, Lucas Beyer, Xiaohua Zhai, Thomas Unterthiner, Jessica Yung, Andreas Peter Steiner, Daniel Keysers, Jakob Uszkoreit, Mario Lucic, and Alexey Dosovitskiy. MLP-mixer: An all-MLP architecture for vision. In A. Beygelzimer, Y. Dauphin, P. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, 2021. URL https://openreview.net/forum?id=EI2KOXKdnP.
 - Brandon Trabucco, Aviral Kumar, Xinyang Geng, and Sergey Levine. Conservative objective models for effective offline model-based optimization. In *Proceedings of the 38th International Conference on Machine Learning*, 2021.
 - Brandon Trabucco, Xinyang Geng, Aviral Kumar, and Sergey Levine. Design-bench: Benchmarks for data-driven offline model-based optimization. In *Proceedings of the 39th International Conference on Machine Learning*, 2022.
 - Jie Xu, Yunsheng Tian, Pingchuan Ma, Daniela Rus, Shinjiro Sueda, and Wojciech Matusik. Prediction-Guided Multi-Objective Reinforcement Learning for Continuous Robot Control. In Proceedings of the 37th International conference on Machine learning. PMLR, 2020.
 - Ke Xue, Rongxi Tan, Xiaobin Huang, and Chao Qian. Offline multi-objective optimization. In *Proceedings of the 41st International Conference on Machine Learning*, 2024.

- Sihyun Yu, Sungsoo Ahn, Le Song, and Jinwoo Shin. RoMA: Robust model adaptation for offline model-based optimization. In *Advances in Neural Information Processing Systems 34* (*NeurIPS*), pp. 4619–4631, Virtual, 2021.
 - Tianhe Yu, Saurabh Kumar, Abhishek Gupta, Sergey Levine, Karol Hausman, and Chelsea Finn. Gradient surgery for multi-task learning. In *Advances in Neural Information Processing Systems*, 2020.
 - Hui Yuan, Kaixuan Huang, Chengzhuo Ni, Minshuo Chen, and Mengdi Wang. Reward-directed conditional diffusion: Provable distribution estimation and reward improvement. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023a. URL https://openreview.net/forum?id=58HwnnEdtF.
 - Ye Yuan, Can Chen, Zixuan Liu, Willie Neiswanger, and Xue Liu. Importance-aware co-teaching for offline model-based optimization. In *Thirty-seventh Conference on Neural Information Processing Systems*, 2023b.
 - Ye Yuan, Can Chen, Christopher Pal, and Xue Liu. ParetoFlow: Guided Flows in Multi-Objective Optimization. In *The Thirteenth International Conference on Learning Representations*}, 2025.
 - Yiyang Zhao, Linnan Wang, Kevin Yang, Tianjun Zhang, Tian Guo, and Yuandong Tian. Multiobjective Optimization by Learning Space Partition. In *International Conference on Learning Representations*, 2021.
 - Luisa M Zintgraf, Timon V Kanters, Diederik M Roijers, Frans A Oliehoek, and Philipp Beau. Quality assessment of MORL algorithms: A utility-based approach. In *Benelearn 2015: Proceedings of the 24th Annual Machine Learning Conference of Belgium and the Netherlands*, 2015.
 - Eckart Zitzler and Lothar Thiele. Multiobjective optimization using evolutionary algorithms a comparative case study. In *Parallel Problem Solving from Nature PPSN V*, 1998.
 - Eckart Zitzler, Dimo Brockhoff, and Lothar Thiele. The hypervolume indicator revisited: On the design of pareto-compliant indicators via weighted integration. In *Evolutionary Multi-Criterion Optimization*, 2007.

A APPENDIX

A.1 RELATION BETWEEN DATASET QUALITY AND REWEIGHING

As shown in our main ablation study (Section 5.4), our data reweighting scheme significantly improves performance on tasks like C10/MOP2 and MO-Hopper, yet is detrimental to performance on ZDT2. We hypothesized that this discrepancy stems from differences in the quality of the underlying offline datasets. To investigate this, we analyze the distribution of normalized dominance numbers for each task, shown in Figure 3. A narrow distribution suggests that most samples are of similar, relatively high quality. In contrast, a wide, right-skewed distribution indicates a large variance in sample quality, with a long tail of low-performing data points.

Figure 3 clearly supports our hypothesis. The C10/MOP2 and MO-Hopper tasks exhibit narrow distributions, concentrated near zero. ZDT2, however, shows a much wider, long-tailed distribution, confirming it contains a more varied set of samples. While a dataset with high variance in quality like ZDT2 may seem like an ideal candidate for reweighting, our results show the opposite can be true. When the sample quality is highly varied, our reweighting scheme assigns a tiny, near-zero weight to the vast majority of points in the long tail. This can effectively remove a significant portion of the training data, which, despite being lower-quality, may still contain valuable learning signal about the data manifold. This raises a natural follow-up question: could this issue be mitigated by tuning the reweighting hyperparameters?

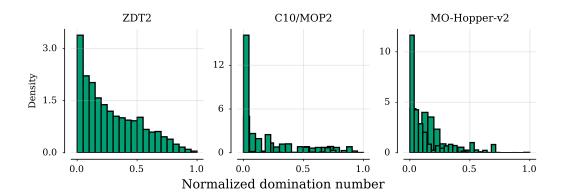


Figure 3: **Normalized dominance number distributions reveal dataset quality differences.** The narrow distributions of C10/MOP2 and MO-Hopper indicate consistently high-quality datasets, whereas the long-tailed distribution of ZDT2 signals high variance in sample quality.

A.2 REWEIGHING SENSITIVITY ANALYSIS

Based on our analysis in Section A.1, we hypothesized that the performance degradation on high-variance datasets like ZDT2 could be mitigated by adjusting the reweighting hyperparameters. Specifically, increasing the temperature parameter τ in Equation 6 should make the weighting distribution more uniform, effectively "softening" the reweighting and preserving more of the learning signal from lower-quality samples. To validate this, we perform a sensitivity analysis on τ for the same three tasks: ZDT2, C10/MOP2, and MO-Hopper.

Figure 4 plots the normalized hypervolume as a function of τ . The results are normalized by the performance of our default value, $\tau=0.05$. As predicted, the effect of τ is highly task-dependent. For ZDT2, the task with the highest sample variance, increasing the temperature yields a substantial performance improvement of up to 15%. In contrast, for the low-variance C10/MOP2 dataset, performance is almost entirely insensitive to τ . The MO-Hopper task, which has a moderate variance, shows a modest improvement.

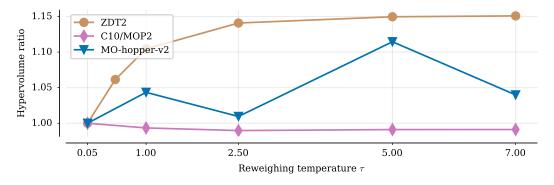


Figure 4: **Effect of the reweighting temperature** τ **on normalized performance.** For the high-variance ZDT2 dataset, increasing τ significantly improves performance. The effect is minimal on the low-variance datasets.

This outcome confirms our intuition: the higher the variance in dataset quality, the higher temperature τ is required to achieve optimal performance. This suggests that for practical applications, τ could be tuned based on an initial analysis of the dataset's quality distribution. We note that the other reweighting hyperparameter, K, which controls smoothing over bin sizes, was observed to have a negligible impact on performance in preliminary experiments, and thus was not included in this analysis.

A.3 TRAINING DETAILS

We build upon the open-source EDM implementation (Karras et al., 2022) introduced in SynthER (Lu et al., 2023), adapting it to our specific training setup and dataset. Following SynthER, our denoising network adopts the MLP architecture with skip connections from the previous layer as proposed in Tolstikhin et al. (2021), with the diffusion noise level encoded using a Random Fourier Feature (RFF) embedding (Rahimi & Recht, 2007). The network has a base width 512 and depth of 4, and is trained with batch size of 512 for up to 12k steps with early stopping.

We apply classifier-free guidance (CFG) dropout (Ho & Salimans, 2022) during training with probability 0.25 and use the same denoiser configuration for all tasks. We maintain an exponential moving average (EMA) of the model parameters (Karras et al., 2022) and use the EMA weights at sampling to improve stability (Karras et al., 2024). Sampling is performed with the stochastic SDE sampler of EDM using default hyperparameters, increasing the number of diffusion timesteps to 1024 to enhance sample quality. The default hyperparameters for all components of our PCD framework—including the denoiser network, the EDM sampler, our multi-objective reweighting scheme, and our conditioning point generation mechanism—are summarized in Table 3.

Table 3: Default hyperparameters for PCD framework including Residual MLP Denoiser for reweighted training (left) and EDM Sampling (right). If multiple values were used, **bolded** value indicates default value.

Residual MI	LP Denoiser	EDM		
Parameter	Value(s)	Parameter	Value(s)	
No. of Bins	30	No. of Diffusion Steps	1024	
K	10	$\sigma_{ m min}$	0.002	
au	0.05	$\sigma_{ m max}$	80	
No. of Layers	4	$S_{ m churn}$	80	
Width	512	$S_{ m tmin}$	0.05	
Batch Size	512	$S_{ m tmax}$	50	
RFF Dim	16	$S_{ m noise}$	1.003	
Activation	ReLU	Query Budget Q	256	
Optimizer	AdamW	No. of Reference Directions L	32	
Learning Rate	3×10^{-4}	CFG Dropout Prob.	0.25	
Learning Rate Schedule	Cosine Annealing	CFG Guidance Scale γ	{1.0, 2.0, 2.5 , 5.0, 8.0}	
Denoiser Training Steps	12,000 (early stopping)	'	(· · · / /)	

A.4 Case Study: The Effectiveness of Pareto-Conditioning

To provide a qualitative understanding of our Pareto-conditioning mechanism, we present a case study on two contrasting tasks: MO-Hopper, a challenging benchmark where our method struggles, and RE21, a task where PCD significantly outperforms all baselines. These cases correspond to the quantitative results presented in Table 11 and Table 7, respectively.

Figure 5 visualizes the relationship between the best solutions from the original dataset $\mathcal{D}(\text{best})$, our generated conditioning points \hat{y} , and the objective values of the final generated solutions y_{out} . On MO-Hopper, the model's struggle is evident. Despite being conditioned on targets \hat{y} with better performance on the first objective y_1 , the generated points y_{out} fail to achieve significant improvements, likely due to the difficulty of generalizing in the task's high-dimensional search space. In stark contrast, the conditioning mechanism is highly effective on RE21. Here, the generated points y_{out} consistently match or even Pareto-dominate their respective conditioning targets \hat{y} . This demonstrates that when the underlying data distribution is well-captured by the model, PCD can successfully generalize to superior regions of the Pareto front.

A.5 DETAILED LOOK AT CONDITION POINT GENERATION

Section 4 introduced procedure generate set of diverse condition points \hat{Y} by utilizing procedure similar to the survival selection from NSGA-III (Deb & Jain, 2014), which is displayed in Algorithm 2. We begin by generating L direction vector via Riesz Energy method (Hardin & Saff, 2005), that partition the objective space \mathbb{R}^m . Then, our goal is to select a diverse subset of well-performing points from the objective space, and assign these points to one of the direction vectors. To do so,

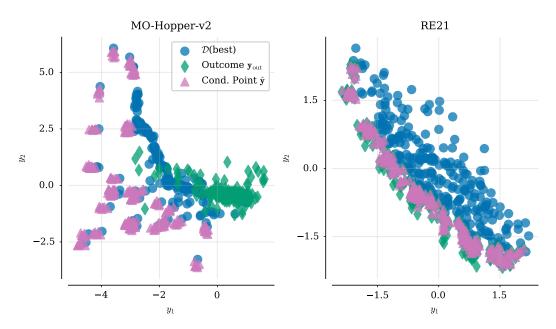


Figure 5: Qualitative analysis of Pareto-conditioning effectiveness. Left (MO-Hopper): On this high-dimensional task, the model struggles to generate solutions that improve upon the first objective. **Right** (RE21): On this lower-dimensional task, the conditioning is highly effective: the generated points (y_{out}) closely align with and even outperform their conditioning targets (\hat{y}).

an empty set S is initialized to hold the point, direction vector (y_i, w_i) pairs. Then, a set of fronts (F_1, \ldots, F_M) is obtained via non-dominated sort. The procedure continues by iterating over each front F_i . During each iteration, each direction is assigned a point with the shortest perpendicular distance to it (lines 8-13 in Alg. 2). Then, the rest of the points in F_i (which have no direction vector assigned to them), are iterated over one-by-one, and assigned a direction vector with the least amount of points at the moment (lines 14-22 in Alg. 2).

After obtaining the set of (point, direction vector) pairs S, the points are interpolated towards the corresponding direction vectors. Finally, Gaussian noise is added to the points to ensure further diversity.

The procedure described in Algorithm 2 follows very closely the survival procedure of NSGA-III with one key difference: in NSGA-III the points in the current population are assigned to the closest direction vector, and only if the there is need for more points, the points get assigned to the direction vectors with the least number of points. On the contrary, in our procedure, only L points front get automatically assigned the direction vector closest to them. The rest of the points in the current front are assigned based on the number of points each direction vector has currently. This is crucial for ensuring that the conditioning points have an adequate coverage of the objective space in cases where the offline dataset itself has a poor coverage of the objective space.

A.6 100th percentile results

Tables 4, 5, 6, 7, 8, 9, 10 and 11 showcase the per task 100th percentile hypervolume (\uparrow) across all considered tasks. In each task, the best performing model is **bolded**, while the runner up is <u>underlined</u>.

A.7 75TH PERCENTILE RESULTS

Tables 12, 13, 14, 15, 16, 17, 18 and 19 showcase the per task 75th percentile hypervolume (↑) across all considered tasks. In each task, the best performing model is **bolded**, while the runner up is underlined.

896 897

864 Algorithm 2 Generating Diverse Conditioning Points 865 **Input:** Dataset objectives $Y = \{y_i\}_{i=1}^N$, Number of reference vectors L, Query budget Q866 **Output:** Set of Q conditioning points \hat{Y} 867 1: $W \leftarrow \text{GenerateReferenceVectors}(L)$ ▷ e.g., via Riesz s-Energy method 868 2: $(F_1, \ldots, F_M) \leftarrow \text{NonDominatedSort}(\boldsymbol{Y})$ ▶ Rank data points into fronts $3: S \leftarrow \emptyset$ ▶ Initialize the set of selected (point, vector) pairs 870 4: $ho \leftarrow$ Initialize niche counts for each $w \in W$ to zero 871 5: $i \leftarrow 1$ 872 6: while |S| < Q do 873 7: $P_i \leftarrow \emptyset$ ▶ Initialize points to be considered from current front 874 ${f for}$ each reference vector ${m w} \in {m W}$ ${f do}$ 8: 875 9: Find point $y \in F_i$ with minimum perpendicular distance to w876 10: Add $(\boldsymbol{y}, \boldsymbol{w})$ to a S11: Add y to temporary set P_i 877 12: $\rho[\boldsymbol{w}] \leftarrow \rho[\boldsymbol{w}] + 1$ ▶ Update niche counts for each reference vector 878 13: end for 879 14: for $y \in F_i \setminus P_i$ do 880 Find reference vector $m{w}_{\min}$ with the minimum niche count $ho[m{w}_{\min}]$ 15: $S \leftarrow S \cup \{(\boldsymbol{y}^*, \boldsymbol{w}_{\min})\}$ Add the selected pair to our main set 16: 882 $\rho[\boldsymbol{w}_{\min}] \leftarrow \rho[\boldsymbol{w}_{\min}] + 1$ $P_t \leftarrow P_t \setminus \{\boldsymbol{y}^*\}$ 17: ▶ Increment the niche count 883 ▶ Remove the point from consideration 18: 884 if |S| = Q then 19: 885 20: break ▶ Exit if we have collected enough points end if 21: 887 22: end for 23: $i \leftarrow i + 1$ ⊳ Move to the next front 24: end while 889 25: $Y_{\text{extrapolated}} \leftarrow \text{ExtrapolatePoints}(S)$ ▶ Extrapolate each point along its vector 890 26: $\hat{\mathbf{Y}} \leftarrow \mathbf{Y}_{\text{extrapolated}} + \mathcal{N}(0, \sigma_{\text{noise}}^2 \mathbb{I})$ Add noise for diversity 891 892 27: return \hat{Y}

Table 4: Average 100th percentile hypervolume for synthetic tasks (part 1)

Method	ZDT1	ZDT2	ZDT3	ZDT4	ZDT6
	4.17	4.60		5 46	
$\mathcal{D}(best)$	<u>4.17</u>	4.68	5.15	5.46	4.61
E2E + GN	2.81 ± 0.00	3.17 ± 0.00	3.75 ± 0.00	4.87 ± 0.05	3.82 ± 0.03
E2E + PC	2.81 ± 0.00	3.17 ± 0.00	3.75 ± 0.00	4.84 ± 0.09	3.78 ± 0.08
E2E	2.81 ± 0.00	3.17 ± 0.00	3.76 ± 0.00	4.82 ± 0.02	3.83 ± 0.01
MOBO	2.38 ± 0.01	2.76 ± 0.00	3.13 ± 0.05	4.93 ± 0.09	3.76 ± 0.00
MH + GN	2.81 ± 0.00	3.17 ± 0.00	3.76 ± 0.00	4.83 ± 0.05	3.74 ± 0.04
MH + PC	2.41 ± 0.27	2.68 ± 0.01	3.68 ± 0.16	4.83 ± 0.04	3.76 ± 0.04
MH	2.81 ± 0.00	3.17 ± 0.00	3.76 ± 0.00	4.87 ± 0.02	3.83 ± 0.01
MM + COMs	2.81 ± 0.00	3.17 ± 0.00	3.75 ± 0.00	4.84 ± 0.03	3.82 ± 0.04
MM + ICT	2.81 ± 0.00	3.17 ± 0.00	3.76 ± 0.00	4.86 ± 0.04	3.83 ± 0.02
MM + IOM	2.81 ± 0.00	3.17 ± 0.00	3.73 ± 0.05	4.85 ± 0.03	3.84 ± 0.01
MM + TM	2.81 ± 0.00	3.17 ± 0.00	3.73 ± 0.05	4.80 ± 0.10	3.84 ± 0.00
MM	2.81 ± 0.00	3.17 ± 0.00	3.76 ± 0.00	4.85 ± 0.06	3.82 ± 0.00
ParetoFlow	4.15 ± 0.04	5.71 ± 0.21	5.22 ± 0.11	$4.86{\pm}0.08$	4.51 ± 0.05
PCD (ours)	4.47±0.02	6.25±0.06	5.36±0.36	5.23±0.06	4.56 ± 0.05

Table 5: Average 100th percentile hypervolume for synthetic tasks (part 2)

Method	DTLZ1	DTLZ7	OMNITEST	VLMOP1	VLMOP2	VLMOP3
$\mathcal{D}(\text{best})$	10.60	8.56	4.53	0.41	1.78	45.65
E2E + GN	10.63 ± 0.00	8.95 ± 0.00	4.55 ± 0.14	0.29 ± 0.00	2.80 ± 0.16	41.93 ± 1.13
E2E + PC	10.63 ± 0.00	8.95 ± 0.00	4.69 ± 0.06	0.29 ± 0.00	3.34 ± 0.01	42.45 ± 0.00
E2E	10.61 ± 0.01	8.95 ± 0.00	4.69 ± 0.05	0.29 ± 0.00	3.36 ± 0.00	42.45 ± 0.00
MOBO	10.40 ± 0.06	3.96 ± 0.10	4.76 ± 0.01	0.29 ± 0.00	2.08 ± 0.16	38.99 ± 0.14
MH + GN	10.63 ± 0.01	8.95 ± 0.00	4.61 ± 0.09	0.08 ± 0.03	3.15 ± 0.07	30.14 ± 6.91
MH + PC	10.63 ± 0.00	8.95 ± 0.00	4.48 ± 0.22	0.20 ± 0.04	2.98 ± 0.09	41.85 ± 0.91
MH	10.63 ± 0.00	8.95 ± 0.00	4.61 ± 0.09	0.29 ± 0.00	3.32 ± 0.01	42.45 ± 0.00
MM + COMs	10.62 ± 0.00	8.95 ± 0.00	4.54 ± 0.15	0.23 ± 0.13	1.68 ± 0.04	42.44 ± 0.02
MM + ICT	10.63 ± 0.00	8.95 ± 0.00	4.56 ± 0.08	0.29 ± 0.00	3.35 ± 0.01	42.43 ± 0.01
MM + IOM	10.63 ± 0.00	8.95 ± 0.00	4.72 ± 0.03	0.29 ± 0.00	3.32 ± 0.03	42.45 ± 0.01
MM + TM	10.63 ± 0.00	8.95 ± 0.01	4.59 ± 0.10	0.29 ± 0.00	3.35 ± 0.00	42.41 ± 0.01
MM	10.63 ± 0.00	8.95 ± 0.00	4.71 ± 0.06	0.29 ± 0.00	3.35 ± 0.01	42.45 ± 0.00
ParetoFlow	11.15 ± 0.44	10.54 ± 0.44	4.78 ± 0.00	N/A	4.22 ± 0.02	45.92 ± 0.00
PCD (ours)	13.63±0.78	11.35±0.18	4.76±0.01	0.09 ± 0.01	2.93±0.28	45.91±0.01

Table 6: Average 100th percentile hypervolume for scientific design tasks

Method	Molecule	RFP	Regex	Zinc
$\mathcal{D}(\text{best})$	2.91±0.00	7.11±0.00	3.96±0.00	4.52±0.00
E2E + GN	2.77 ± 0.07	7.88 ± 0.61	4.30 ± 0.35	4.65 ± 0.01
E2E + PC	2.91 ± 0.00	7.22 ± 0.02	4.74 ± 0.20	4.73 ± 0.04
E2E	2.91 ± 0.00	8.11 ± 0.49	3.98 ± 0.00	4.71 ± 0.07
MOBO	1.58 ± 0.02	7.21 ± 0.00	6.76 ± 0.28	4.60 ± 0.00
MH + GN	2.91 ± 0.00	8.10 ± 0.50	4.19 ± 0.20	4.62 ± 0.06
MH + PC	2.91 ± 0.00	7.41 ± 0.49	4.52 ± 0.45	4.65 ± 0.03
MH	2.91 ± 0.00	7.21 ± 0.02	3.98 ± 0.00	4.66 ± 0.00
MM + COMs	2.91 ± 0.00	7.66 ± 0.61	4.61 ± 0.30	4.72 ± 0.05
MM + ICT	2.91 ± 0.00	7.87 ± 0.61	4.30 ± 0.35	4.65 ± 0.01
MM + IOM	2.91 ± 0.00	7.66 ± 0.62	4.83 ± 0.00	4.69 ± 0.05
MM + TM	2.87 ± 0.06	7.83 ± 0.65	4.83 ± 0.00	4.64 ± 0.01
MM	2.91 ± 0.00	7.21 ± 0.03	3.87 ± 0.24	4.66 ± 0.00
ParetoFlow	2.06 ± 0.31	7.07 ± 0.09	5.11 ± 0.39	4.40 ± 0.03
PCD (ours)	4.07±0.51	7.24 ± 0.03	$4.80 {\pm} 0.87$	4.70 ± 0.04

Table 7: Average 100th percentile hypervolume for RE tasks (part 1)

Method	RE21	RE22	RE23	RE24	RE25	RE31	RE32
$\mathcal{D}(\text{best})$	4.10	4.78	4.75	4.60	4.79	10.60	10.56
E2E + GN	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.81 ± 0.17	5.06 ± 0.73	4.96 ± 0.13
E2E + PC	2.60 ± 0.00	1.91 ± 1.74	0.00 ± 0.00	1.66 ± 0.00	3.29 ± 0.71	6.54 ± 0.13	7.07 ± 0.32
E2E	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.93 ± 0.07	6.62 ± 0.00	7.14 ± 0.20
MOBO	1.98 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
MH + GN	2.58 ± 0.03	1.91 ± 1.74	0.00 ± 0.00	0.00 ± 0.00	3.19 ± 0.61	5.97 ± 0.36	4.37 ± 0.73
MH + PC	2.60 ± 0.00	1.91 ± 1.74	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	6.42 ± 0.46	5.54 ± 3.16
MH	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.41 ± 0.73	6.62 ± 0.00	7.28 ± 0.00
MM + COMs	2.59 ± 0.00	1.64 ± 1.60	0.00 ± 0.00	1.66 ± 0.00	3.98 ± 0.00	5.67 ± 1.56	7.28 ± 0.00
MM + ICT	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.98 ± 0.00	6.54 ± 0.08	7.28 ± 0.00
MM + IOM	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.93 ± 0.07	6.62 ± 0.00	7.28 ± 0.00
MM + TM	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.27 ± 0.64	6.62 ± 0.00	7.28 ± 0.00
MM	2.60 ± 0.00	3.18 ± 0.00	0.00 ± 0.00	1.66 ± 0.00	3.77 ± 0.08	6.62 ± 0.00	7.28 ± 0.00
ParetoFlow	4.09 ± 0.06	4.78 ± 0.07	4.80 ± 0.02	5.04 ± 0.06	4.96 ± 0.15	10.56 ± 0.14	11.03 ± 0.38
PCD (ours)	4.35±0.00	4.89±0.01	4.84±0.00	4.88±0.02	5.06±0.03	11.35±0.06	19.94±5.75

Table 8: Average 100th percentile hypervolume for RE tasks (part 2)

Method	RE33	RE34	RE35	RE36	RE37	RE41	RE42	RE61
$\mathcal{D}(\text{best})$	10.56	9.30	10.08	7.61	5.57	18.27	14.52	97.49
E2E + GN	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.13 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
E2E + PC	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
E2E	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MOBO	0.00 ± 0.00	4.02 ± 0.04	0.00 ± 0.00	0.00 ± 0.00	2.80 ± 0.00	13.03 ± 0.03	0.00 ± 0.00	0.00 ± 0.00
MH + GN	0.00 ± 0.00	5.89 ± 0.38	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.99 ± 0.12	0.00 ± 0.00	45.11 ± 0.00
MH + PC	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MH	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MM + COMs	0.00 ± 0.00	6.31 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	15.10 ± 0.04	0.00 ± 0.00	45.11 ± 0.00
MM + ICT	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.13 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MM + IOM	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.13 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MM + TM	0.00 ± 0.00	6.31 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
MM	0.00 ± 0.00	6.31 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.34 ± 0.00	15.12 ± 0.00	0.00 ± 0.00	45.11 ± 0.00
ParetoFlow	10.84 ± 0.24	11.69 ± 1.33	11.12 ± 0.43	8.67 ± 0.17	6.51 ± 0.58	18.20 ± 0.41	54.44 ± 22.78	112.08 ± 11.62
PCD (ours)	10.97±0.09	10.17±0.04	10.87±0.04	8.16±0.11	5.97±0.01	18.14±0.02	15.49±0.03	N/A

Table 9: Average 100th percentile hypervolume for MONAS tasks (part 1)

Method	C10/MOP1	C10/MOP2	C10/MOP3	C10/MOP4	C10/MOP5	C10/MOP6	C10/MOP7	C10/MOP8	C10/MOP9
$\mathcal{D}(\text{best})$	4.47	10.47	9.21	18.62	45.11	103.78	422.29	4.70	10.79
E2E + GN	4.48 ± 0.02	10.48 ± 0.07	10.05 ± 0.02	20.84 ± 0.20	49.03 ± 0.14	102.42 ± 4.75	445.77 ± 20.86	4.61 ± 0.08	10.72 ± 0.16
E2E + PC	4.47 ± 0.01	10.52 ± 0.07	10.18 ± 0.01	21.64 ± 0.13	49.22 ± 0.09	105.99 ± 0.49	492.21 ± 1.55	4.65 ± 0.08	10.46 ± 0.29
E2E	4.47 ± 0.00	10.55 ± 0.05	10.19 ± 0.01	21.70 ± 0.13	48.87 ± 0.05	106.17 ± 0.36	494.92 ± 1.70	4.77 ± 0.03	10.64 ± 0.15
MOBO	4.46 ± 0.01	10.51 ± 0.06	9.57 ± 0.00	20.80 ± 0.01	49.01 ± 0.02	106.54 ± 0.04	494.82 ± 0.77	4.85 ± 0.02	11.05 ± 0.05
MH + GN	4.47 ± 0.01	10.45 ± 0.01	9.53 ± 0.26	19.50 ± 1.33	48.47 ± 0.41	82.40 ± 4.76	427.04 ± 9.41	4.41 ± 0.16	10.02 ± 0.09
MH + PC	4.46 ± 0.00	10.53 ± 0.04	10.19 ± 0.02	21.67 ± 0.08	49.13 ± 0.12	106.03 ± 0.59	492.27±2.51	4.54 ± 0.06	10.68 ± 0.22
MH	4.47 ± 0.01	10.47 ± 0.03	10.17 ± 0.02	21.26 ± 0.45	49.18 ± 0.07	105.88 ± 0.64	490.43 ± 2.20	4.72 ± 0.07	11.10 ± 0.27
MM + COMs	4.49 ± 0.01	10.49 ± 0.03	9.95 ± 0.06	20.84 ± 0.33	47.86 ± 0.75	105.12 ± 0.56	484.34±3.79	4.90 ± 0.07	11.04 ± 0.13
MM + ICT	4.46 ± 0.02	10.52 ± 0.05	10.00 ± 0.07	20.85 ± 0.19	48.98 ± 0.15	106.08 ± 0.35	494.18 ± 1.96	4.62 ± 0.10	10.34 ± 0.18
MM + IOM	4.46 ± 0.01	10.42 ± 0.03	10.12 ± 0.04	21.71 ± 0.04	49.20 ± 0.07	106.28 ± 0.29	494.33 ± 0.69	4.89 ± 0.06	11.50 ± 0.05
MM + TM	4.48 ± 0.01	10.46 ± 0.09	10.14 ± 0.03	21.36 ± 0.26	49.06 ± 0.14	106.42 ± 0.17	491.82 ± 1.86	4.57 ± 0.07	10.22 ± 0.34
MM	4.46 ± 0.01	10.49 ± 0.06	10.20 ± 0.01	21.77 ± 0.09	48.96 ± 0.07	105.33 ± 0.43	494.49 ± 0.80	4.82 ± 0.05	10.99 ± 0.26
ParetoFlow	4.48 ± 0.02	10.45 ± 0.01	9.48 ± 0.15	19.50 ± 0.39	$44.25{\pm}2.48$	104.19 ± 0.70	435.03±20.16	4.65 ± 0.08	10.79 ± 0.08
PCD (ours)	4.50 ± 0.01	$10.59 {\pm} 0.04$	9.75 ± 0.06	20.43 ± 0.12	$41.88 {\pm} 0.76$	$105.82 {\pm} 0.87$	N/A	4.79 ± 0.02	10.99±0.19

Table 10: Average 100th percentile hypervolume for MONAS tasks (part 2)

Method	IN-1K/MOP1	IN-1K/MOP2	IN-1K/MOP3	IN-1K/MOP4	IN-1K/MOP5	IN-1K/MOP6	IN-1K/MOP7	IN-1K/MOP8	IN-1K/MOP9
$\mathcal{D}(\text{best})$	4.47	4.53	10.06	4.15	4.30	9.15	3.94	9.28	18.07
E2E + GN	4.63 ± 0.04	4.16 ± 0.08	9.93 ± 0.07	4.44 ± 0.05	4.46 ± 0.07	9.71 ± 0.22	4.40 ± 0.09	9.17 ± 0.10	18.84 ± 0.30
E2E + PC	4.70 ± 0.04	4.07 ± 0.10	10.21 ± 0.03	4.50 ± 0.10	4.53 ± 0.09	9.88 ± 0.14	4.34 ± 0.12	9.55 ± 0.13	19.52 ± 0.22
E2E	4.70 ± 0.05	4.05 ± 0.09	10.25 ± 0.03	4.47 ± 0.08	4.62 ± 0.02	10.03 ± 0.18	4.52 ± 0.10	9.72 ± 0.08	20.12 ± 0.13
MOBO	4.34 ± 0.03	4.27 ± 0.04	9.97 ± 0.04	4.43 ± 0.10	4.52 ± 0.05	9.84 ± 0.11	3.94 ± 0.03	9.29 ± 0.10	19.73 ± 0.09
MH + GN	4.47 ± 0.16	4.06 ± 0.10	7.43 ± 1.19	4.26 ± 0.18	4.48 ± 0.11	9.47 ± 0.43	4.31 ± 0.11	7.17 ± 1.68	14.48 ± 1.25
MH + PC	4.64 ± 0.02	4.16 ± 0.07	10.07 ± 0.10	4.40 ± 0.05	4.59 ± 0.07	9.78 ± 0.25	4.45 ± 0.02	9.40 ± 0.13	19.28 ± 0.32
MH	4.65 ± 0.03	3.81 ± 0.22	10.17 ± 0.05	4.58 ± 0.04	4.61 ± 0.02	10.07 ± 0.10	4.59 ± 0.04	9.60 ± 0.06	19.69 ± 0.18
MM + COMs	4.64 ± 0.07	4.34 ± 0.02	10.19 ± 0.01	4.29 ± 0.20	4.51 ± 0.11	9.02±0.86	4.15 ± 0.08	9.73 ± 0.03	20.17 ± 0.09
MM + ICT	4.69 ± 0.02	4.09 ± 0.18	10.06 ± 0.06	4.42 ± 0.07	4.57 ± 0.10	9.76 ± 0.18	4.40 ± 0.09	8.93±0.19	18.71 ± 0.30
MM + IOM	4.67 ± 0.02	4.09 ± 0.17	10.22 ± 0.02	4.20 ± 0.45	4.55 ± 0.12	9.56 ± 0.06	4.40 ± 0.13	9.82 ± 0.03	20.39 ± 0.06
MM + TM	4.61 ± 0.03	4.11 ± 0.12	10.07 ± 0.03	4.48 ± 0.03	4.57 ± 0.03	9.73 ± 0.15	4.40 ± 0.32	9.39 ± 0.16	19.42 ± 0.17
MM	4.69 ± 0.05	4.18 ± 0.05	10.28 ± 0.06	4.59 ± 0.09	4.64 ± 0.05	10.14 ± 0.17	4.56 ± 0.07	9.65 ± 0.08	19.99 ± 0.32
ParetoFlow	4.46 ± 0.01	4.35 ± 0.06	$9.96{\pm}0.08$	4.28 ± 0.07	$4.45{\pm}0.08$	9.43 ± 0.19	3.81 ± 0.08	$9.32{\pm}0.09$	18.95±0.52
PCD (ours)	4.63±0.05	4.43 ± 0.02	$10.20{\pm}0.03$	4.36±0.07	$4.56{\pm}0.02$	9.76 ± 0.11	4.22±0.05	$9.38{\pm}0.03$	18.83±0.31

A.8 50th percentile results

Tables 20, 21, 22, 23, 24, 25, 26 and 27 showcase the per task 50th percentile hypervolume (↑) across all considered tasks. In each task, the best performing model is **bolded**, while the runner up is <u>underlined</u>.

Table 11: Average 100th percentile hypervolume for MORL tasks

Method	MO-Hopper-v2	MO-Swimmer-v2
$\mathcal{D}(best)$	6.33	3.70
E2E + GN	5.94 ± 0.33	3.65 ± 0.02
E2E + PC	6.22 ± 0.15	3.66 ± 0.00
E2E	5.98 ± 0.34	1.68 ± 0.75
MOBO	4.75 ± 0.00	$0.86 {\pm} 0.00$
MH + GN	5.73 ± 0.26	3.49 ± 0.16
MH + PC	4.99 ± 0.34	3.42 ± 0.36
MH	5.64 ± 0.54	3.20 ± 0.98
MM + COMs	6.14 ± 0.15	3.68 ± 0.02
MM + ICT	5.67 ± 0.26	3.12 ± 1.11
MM + IOM	4.95 ± 0.44	1.95 ± 0.53
MM + TM	5.93 ± 0.30	$3.55{\pm}0.05$
MM	5.99 ± 0.19	1.61 ± 0.58
ParetoFlow	5.92 ± 0.05	3.50 ± 0.10
PCD (ours)	$5.95{\pm}0.18$	3.69 ± 0.11

Table 12: Average 75th percentile hypervolume for synthetic tasks (part 1)

Method	ZDT1	ZDT2	ZDT3	ZDT4	ZDT6
$\mathcal{D}(best)$	4.17	4.68	<u>5.15</u>	5.46	4.61
E2E + GN	2.60 ± 0.24	2.77 ± 0.00	3.17 ± 0.00	4.59 ± 0.15	3.79 ± 0.05
E2E + PC	2.81 ± 0.00	3.17 ± 0.00	3.16 ± 0.20	4.54 ± 0.17	3.78 ± 0.09
E2E	2.81 ± 0.00	3.17 ± 0.00	3.48 ± 0.13	4.43 ± 0.23	3.82 ± 0.04
MOBO	2.36 ± 0.01	2.74 ± 0.01	3.01 ± 0.05	4.60 ± 0.06	3.74 ± 0.00
MH + GN	2.78 ± 0.02	3.17 ± 0.00	3.54 ± 0.00	4.41 ± 0.15	3.73 ± 0.03
MH + PC	2.26 ± 0.09	2.68 ± 0.01	3.27 ± 0.22	4.55 ± 0.15	3.76 ± 0.04
MH	2.81 ± 0.00	3.17 ± 0.00	3.52 ± 0.03	4.55 ± 0.09	3.76 ± 0.00
MM + COMs	2.79 ± 0.02	3.17 ± 0.00	3.54 ± 0.00	4.49 ± 0.10	3.80 ± 0.05
MM + ICT	2.80 ± 0.00	3.17 ± 0.00	3.54 ± 0.00	4.48 ± 0.13	3.80 ± 0.06
MM + IOM	2.80 ± 0.00	3.17 ± 0.00	3.06 ± 0.09	4.53 ± 0.06	3.82 ± 0.04
MM + TM	2.78 ± 0.05	3.17 ± 0.00	3.54 ± 0.00	4.47 ± 0.20	3.82 ± 0.04
MM	2.81 ± 0.00	3.17 ± 0.00	3.53 ± 0.02	4.57 ± 0.18	3.76 ± 0.00
ParetoFlow	4.11 ± 0.07	5.45 ± 0.25	5.21 ± 0.12	4.77 ± 0.12	4.40 ± 0.04
PCD (ours)	4.25±0.10	5.84±0.10	4.09±0.16	4.91±0.03	4.31±0.08

Table 13: Average 75th percentile hypervolume for synthetic tasks (part 2)

Method	DTLZ1	DTLZ7	OMNITEST	VLMOP1	VLMOP2	VLMOP3
$\mathcal{D}(\text{best})$	10.60±0.00	8.56±0.00	4.53±0.00	0.41±0.00	1.78±0.00	45.65±0.00
E2E + GN	10.63 ± 0.00	8.86 ± 0.00	3.78 ± 0.16	0.16 ± 0.01	2.17 ± 0.21	39.87 ± 1.22
E2E + PC	10.61 ± 0.03	8.86 ± 0.00	4.67 ± 0.07	0.13 ± 0.04	3.34 ± 0.01	42.44 ± 0.01
E2E	10.28 ± 0.22	$8.86 {\pm} 0.00$	4.67 ± 0.08	0.14 ± 0.03	3.35 ± 0.01	42.45 ± 0.00
MOBO	10.07 ± 0.09	3.89 ± 0.14	4.61 ± 0.01	0.16 ± 0.01	1.73 ± 0.03	38.98 ± 0.14
MH + GN	10.61 ± 0.03	8.85 ± 0.01	3.44 ± 0.32	0.06 ± 0.03	2.51 ± 0.09	29.57 ± 5.85
MH + PC	10.63 ± 0.00	$8.86 {\pm} 0.00$	4.31 ± 0.24	0.16 ± 0.06	2.82 ± 0.21	$38.20{\pm}2.94$
MH	10.62 ± 0.00	8.86 ± 0.00	4.30 ± 0.50	0.20 ± 0.05	3.31 ± 0.01	42.44 ± 0.00
MM + COMs	10.30 ± 0.04	8.86 ± 0.00	4.25 ± 0.32	0.18 ± 0.12	1.65 ± 0.02	41.72 ± 1.49
MM + ICT	10.55 ± 0.07	8.86 ± 0.00	4.44 ± 0.17	0.11 ± 0.02	3.34 ± 0.01	42.39 ± 0.02
MM + IOM	10.63 ± 0.00	$8.86 {\pm} 0.00$	4.72 ± 0.03	0.29 ± 0.00	3.31 ± 0.04	42.44 ± 0.00
MM + TM	10.61 ± 0.02	8.85 ± 0.01	4.18 ± 0.53	0.14 ± 0.02	3.35 ± 0.01	42.34 ± 0.06
MM	10.61 ± 0.02	8.86 ± 0.00	4.70 ± 0.06	0.09 ± 0.01	3.34 ± 0.01	42.45 ± 0.01
ParetoFlow	10.83 ± 0.36	10.32 ± 0.43	4.78 ± 0.00	N/A	4.21 ± 0.03	45.90±0.02
PCD (ours)	13.59 ± 0.78	11.26 ± 0.15	$4.34{\pm}0.05$	0.01 ± 0.01	2.12 ± 0.04	45.81 ± 0.04

Table 14: Average 75th percentile hypervolume for scientific design tasks

Method	Molecule	RFP	Regex	Zinc
$\mathcal{D}(\text{best})$	2.91±0.00	7.11±0.00	3.96±0.00	4.52±0.00
E2E + GN	1.55 ± 0.08	7.11 ± 0.00 7.14 ± 0.03	3.90 ± 0.00 3.16 ± 0.38	4.52 ± 0.00 4.52 ± 0.05
E2E + ON E2E + PC	2.47 ± 0.08	7.14 ± 0.03 7.15 ± 0.03	4.15 ± 0.77	4.52 ± 0.05 4.54 ± 0.05
E2E	2.41 ± 0.01	7.17 ± 0.02	2.99 ± 0.00	4.57 ± 0.04
MOBO	1.18 ± 0.66	7.21 ± 0.01	5.35 ± 0.52	4.31 ± 0.05
MH + GN	2.36 ± 0.07	7.15 ± 0.03	3.33 ± 0.46	4.52 ± 0.07
MH + PC	1.73 ± 1.04	7.11 ± 0.04	4.21 ± 0.41	4.54 ± 0.05
MH	2.41 ± 0.01	7.15 ± 0.04	2.99 ± 0.00	4.56 ± 0.05
MM + COMs	2.53 ± 0.03	7.14 ± 0.04	4.52 ± 0.45	4.59 ± 0.05
MM + ICT	2.50 ± 0.07	7.18 ± 0.01	3.53 ± 0.81	4.60 ± 0.05
MM + IOM	0.00 ± 0.00	7.18 ± 0.01	4.46 ± 0.82	4.53 ± 0.03
MM + TM	1.83 ± 0.45	7.13 ± 0.05	3.73 ± 1.00	4.53 ± 0.06
MM	2.50 ± 0.07	7.16 ± 0.03	2.99 ± 0.00	4.60 ± 0.04
ParetoFlow	1.75 ± 0.25	7.04 ± 0.11	5.03 ± 0.47	4.40 ± 0.03
PCD (ours)	1.84 ± 0.09	7.19 ± 0.02	4.14±0.25	4.50±0.02

Table 15: Average 75th percentile hypervolume for RE tasks (part 1)

Method	RE21	RE22	RE23	RE24	RE25	RE31	RE32
$\mathcal{D}(\text{best})$	4.10	4.78	4.75	4.60	4.79	10.60	10.56
E2E + GN	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
E2E + PC	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	1.00 ± 2.24	2.30 ± 2.20
E2E	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	$2.49{\pm}2.58$	3.15 ± 2.05
MOBO	1.94 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
MH + GN	2.40 ± 0.32	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.30 ± 3.19	0.99 ± 1.35
MH + PC	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.41 ± 3.32	0.61 ± 1.36
MH	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	5.32 ± 0.94	3.12 ± 2.10
MM + COMs	2.56 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	1.41 ± 1.25
MM + ICT	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	5.00 ± 1.43	1.32 ± 1.81
MM + IOM	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.17 ± 2.06	1.13 ± 1.57
MM + TM	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	5.72 ± 0.12	1.13 ± 1.57
MM	2.57 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.32 ± 3.18	2.76 ± 0.91
ParetoFlow	4.05 ± 0.05	4.72 ± 0.08	4.75 ± 0.00	4.51 ± 0.04	4.81 ± 0.02	10.31 ± 0.08	11.00 ± 0.38
PCD (ours)	4.28 ± 0.01	4.74 ± 0.03	4.83 ± 0.00	4.86 ± 0.01	$4.86 {\pm} 0.01$	10.74 ± 0.13	10.67 ± 0.03

Table 16: Average 75th percentile hypervolume for RE tasks (part 2)

Method	RE33	RE34	RE35	RE36	RE37	RE41	RE42	RE61
$\mathcal{D}(\text{best})$	10.56	9.30	10.08	7.61	5.57	18.27	14.52	97.49
E2E + GN	0.00 ± 0.00	6.29 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.78 ± 0.16	0.00 ± 0.00	$45.\overline{09\pm0.01}$
E2E + PC	0.00 ± 0.00	6.28 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.84 ± 0.11	0.00 ± 0.00	45.09 ± 0.02
E2E	0.00 ± 0.00	6.27 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.81 ± 0.10	0.00 ± 0.00	45.08 ± 0.02
MOBO	0.00 ± 0.00	3.80 ± 0.10	0.00 ± 0.00	0.00 ± 0.00	2.79 ± 0.00	12.99 ± 0.06	0.00 ± 0.00	N/A
MH + GN	0.00 ± 0.00	5.36 ± 0.66	0.00 ± 0.00	0.00 ± 0.00	3.28 ± 0.04	14.23 ± 0.71	0.00 ± 0.00	45.08 ± 0.01
MH + PC	0.00 ± 0.00	6.27 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.78 ± 0.14	0.00 ± 0.00	45.08 ± 0.01
MH	0.00 ± 0.00	6.28 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.81 ± 0.11	0.00 ± 0.00	45.09 ± 0.01
MM + COMs	0.00 ± 0.00	6.29 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.01	14.84 ± 0.18	0.00 ± 0.00	45.11 ± 0.00
MM + ICT	0.00 ± 0.00	6.27 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.70 ± 0.12	0.00 ± 0.00	45.09 ± 0.02
MM + IOM	0.00 ± 0.00	6.29 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.85 ± 0.12	0.00 ± 0.00	45.09 ± 0.02
MM + TM	0.00 ± 0.00	6.28 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.78 ± 0.09	0.00 ± 0.00	45.10 ± 0.00
MM	0.00 ± 0.00	6.29 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.33 ± 0.00	14.75 ± 0.08	0.00 ± 0.00	45.08 ± 0.01
ParetoFlow	10.84 ± 0.24	10.75 ± 1.13	11.12 ± 0.43	8.01 ± 0.11	6.19 ± 0.71	17.88 ± 0.49	35.94 ± 7.81	111.35 ± 11.74
PCD (ours)	10.86±0.07	9.96±0.04	10.82±0.01	7.92 ± 0.04	5.96±0.02	18.05±0.07	15.42±0.04	N/A

Table 17: Average 75th percentile hypervolume for MONAS tasks (part 1)

Method	C10/MOP1	C10/MOP2	C10/MOP3	C10/MOP4	C10/MOP5	C10/MOP6	C10/MOP7	C10/MOP8	C10/MOP9
$\mathcal{D}(\text{best})$	4.47	10.47	9.21	18.62	45.11	103.78	422.29	4.70	10.79
E2E + GN	4.47 ± 0.02	10.45 ± 0.03	9.92 ± 0.15	20.65 ± 0.19	48.35 ± 0.48	92.88 ± 0.57	430.13 ± 1.84	4.37 ± 0.10	10.14 ± 0.14
E2E + PC	4.44 ± 0.01	10.47 ± 0.02	10.11 ± 0.01	21.29 ± 0.21	49.01 ± 0.11	104.93 ± 0.53	491.16 ± 1.25	4.50 ± 0.11	10.19 ± 0.27
E2E	4.45 ± 0.01	10.46 ± 0.02	10.12 ± 0.01	21.33 ± 0.25	48.76 ± 0.04	104.96 ± 2.03	493.24 ± 2.36	4.56 ± 0.10	10.24 ± 0.18
MOBO	4.44 ± 0.01	10.43 ± 0.02	9.41 ± 0.06	20.55 ± 0.15	48.62 ± 0.09	105.83 ± 0.05	491.45±2.98	4.74 ± 0.04	10.54 ± 0.27
MH + GN	4.45 ± 0.01	10.44 ± 0.01	9.37 ± 0.43	19.30 ± 1.25	42.59 ± 3.88	75.36 ± 4.92	394.79 ± 21.78	4.18 ± 0.17	9.59 ± 0.24
MH + PC	4.44 ± 0.01	10.46 ± 0.02	10.11 ± 0.04	21.20 ± 0.17	48.73 ± 0.19	103.54 ± 2.16	485.73 ± 2.48	4.36 ± 0.06	10.38 ± 0.22
MH	4.45 ± 0.00	10.45 ± 0.01	10.11 ± 0.02	21.02 ± 0.40	49.01 ± 0.03	105.10 ± 0.57	485.29 ± 2.33	4.49 ± 0.06	10.68 ± 0.27
MM + COMs	4.45 ± 0.02	10.45 ± 0.02	9.78 ± 0.07	20.53 ± 0.42	45.40 ± 2.11	103.29 ± 0.91	479.91 ± 3.12	4.77 ± 0.06	10.81 ± 0.07
MM + ICT	4.44 ± 0.01	10.45 ± 0.01	9.87 ± 0.08	20.59 ± 0.30	47.25 ± 1.20	105.10 ± 0.41	488.60 ± 3.26	4.45 ± 0.10	9.78±0.18
MM + IOM	4.45 ± 0.01	10.41 ± 0.02	10.05 ± 0.06	21.46 ± 0.21	48.85 ± 0.36	105.74 ± 0.57	493.09 ± 1.78	4.79 ± 0.12	11.33 ± 0.12
MM + TM	4.45 ± 0.02	10.42 ± 0.05	10.04 ± 0.11	21.02 ± 0.48	48.59 ± 0.49	105.29 ± 0.20	484.79 ± 7.15	4.46 ± 0.09	9.86 ± 0.31
MM	4.44 ± 0.02	10.45 ± 0.00	10.14 ± 0.03	21.24 ± 0.28	48.75 ± 0.02	104.46 ± 0.87	492.55 ± 1.95	4.66 ± 0.09	10.65 ± 0.40
ParetoFlow	$4.44 {\pm} 0.04$	$10.44 {\pm} 0.01$	$9.35{\pm}0.17$	19.44 ± 0.37	$41.44{\pm}2.00$	$102.22 {\pm} 1.30$	$429.75\!\pm\!24.23$	4.48 ± 0.12	$10.58 {\pm} 0.15$
PCD (ours)	4.43±0.01	10.43±0.03	9.72±0.09	20.25±0.19	40.63±0.44	104.49±1.10	N/A	4.67±0.02	10.66±0.13

Table 18: Average 75th percentile hypervolume for MONAS tasks (part 2)

Method	IN-1K/MOP1	IN-1K/MOP2	IN-1K/MOP3	IN-1K/MOP4	IN-1K/MOP5	IN-1K/MOP6	IN-1K/MOP7	IN-1K/MOP8	IN-1K/MOP9
$\mathcal{D}(\text{best})$	4.47	4.53	10.06	4.15	4.30	9.15	3.94	9.28	18.07
E2E + GN	4.52 ± 0.09	4.07 ± 0.10	9.87 ± 0.09	4.33 ± 0.08	4.29 ± 0.10	9.29 ± 0.33	4.21 ± 0.11	9.09 ± 0.16	18.78 ± 0.30
E2E + PC	4.68 ± 0.04	3.92 ± 0.17	10.19 ± 0.02	4.37 ± 0.09	4.42 ± 0.07	9.63 ± 0.16	4.20 ± 0.15	9.45 ± 0.12	19.33 ± 0.20
E2E	4.69 ± 0.06	3.79 ± 0.11	10.24 ± 0.02	4.40 ± 0.06	4.53 ± 0.03	9.77 ± 0.19	4.47 ± 0.11	9.67 ± 0.08	19.94 ± 0.14
MOBO	4.31 ± 0.03	4.21 ± 0.03	9.96 ± 0.03	4.35 ± 0.06	4.44 ± 0.05	9.53 ± 0.13	3.79 ± 0.10	9.25 ± 0.07	19.65 ± 0.11
MH + GN	4.39 ± 0.16	3.87 ± 0.22	7.06 ± 1.63	4.18 ± 0.21	4.33 ± 0.23	9.20 ± 0.43	4.16 ± 0.12	7.05 ± 1.73	14.45 ± 1.23
MH + PC	4.62 ± 0.02	4.09 ± 0.09	10.04 ± 0.12	4.36 ± 0.06	4.46 ± 0.05	9.54 ± 0.24	4.36 ± 0.08	9.22 ± 0.14	19.17 ± 0.40
MH	4.63 ± 0.02	3.66 ± 0.26	10.15 ± 0.06	4.49 ± 0.02	4.52 ± 0.04	9.90 ± 0.08	4.54 ± 0.06	9.53 ± 0.07	19.60 ± 0.23
MM + COMs	4.61 ± 0.07	4.16 ± 0.09	10.17 ± 0.01	4.16 ± 0.23	4.42 ± 0.12	8.41 ± 1.01	4.03 ± 0.10	9.70 ± 0.04	20.08 ± 0.11
MM + ICT	4.67 ± 0.03	3.91 ± 0.21	10.02 ± 0.08	4.31 ± 0.05	4.47 ± 0.09	9.51 ± 0.14	4.21 ± 0.07	8.85 ± 0.16	18.48 ± 0.23
MM + IOM	4.64 ± 0.03	3.91 ± 0.25	10.20 ± 0.03	4.06 ± 0.46	4.43 ± 0.08	9.33 ± 0.03	4.25 ± 0.09	9.79 ± 0.03	20.25 ± 0.12
MM + TM	4.57 ± 0.02	3.94 ± 0.25	10.02 ± 0.05	4.36 ± 0.03	4.50 ± 0.04	9.45 ± 0.13	4.29 ± 0.34	9.37 ± 0.16	19.32 ± 0.18
MM	4.67 ± 0.04	3.99 ± 0.21	10.27 ± 0.06	4.51 ± 0.06	4.56 ± 0.04	9.91 ± 0.23	4.50 ± 0.08	9.60 ± 0.09	19.84 ± 0.28
ParetoFlow	4.37 ± 0.07	4.34 ± 0.06	$9.88{\pm}0.10$	$4.26{\pm}0.08$	$4.41{\pm}0.05$	9.29 ± 0.27	3.63 ± 0.12	$9.26{\pm}0.09$	$18.86 {\pm} 0.52$
PCD (ours)	4.49 ± 0.01	4.24±0.05	10.18 ± 0.02	4.20±0.03	4.40±0.01	9.16±0.07	3.71±0.14	9.33±0.06	18.71±0.30

Table 19: Average 75th percentile hypervolume for MORL tasks

Method	MO-Hopper-v2	MO-Swimmer-v2
$\mathcal{D}(best)$	6.33	3.70
E2E + GN	5.57 ± 0.04	3.60 ± 0.03
E2E + PC	5.62 ± 0.01	3.65 ± 0.01
E2E	5.27 ± 0.48	0.89 ± 0.02
MOBO	4.75 ± 0.00	$0.86 {\pm} 0.00$
MH + GN	5.20 ± 0.42	1.08 ± 0.34
MH + PC	4.75 ± 0.00	1.04 ± 0.30
MH	5.07 ± 0.44	2.46 ± 1.42
MM + COMs	5.63 ± 0.02	3.64 ± 0.04
MM + ICT	4.75 ± 0.00	2.12 ± 1.32
MM + IOM	4.75 ± 0.00	1.18 ± 0.36
MM + TM	4.75 ± 0.00	1.11 ± 0.20
MM	5.58 ± 0.03	1.00 ± 0.18
ParetoFlow	5.59 ± 0.01	2.93 ± 0.29
PCD (ours)	5.07 ± 0.10	$2.82{\pm}0.05$

Table 20: Average 50th percentile hypervolume for synthetic tasks (part 1)

Method	ZDT1	ZDT2	ZDT3	ZDT4	ZDT6
$\mathcal{D}(best)$	4.17	4.68	5.15	5.46	4.61
E2E + GN	2.34 ± 0.00	2.76 ± 0.01	3.16 ± 0.00	4.49 ± 0.13	3.74 ± 0.02
E2E + PC	2.74 ± 0.00	3.17 ± 0.00	3.05 ± 0.01	4.47 ± 0.13	3.73 ± 0.05
E2E	2.74 ± 0.00	3.17 ± 0.00	3.11 ± 0.05	4.36 ± 0.23	3.76 ± 0.00
MOBO	2.35 ± 0.02	2.71 ± 0.03	2.92 ± 0.04	4.43 ± 0.03	3.74 ± 0.00
MH + GN	2.64 ± 0.17	3.17 ± 0.00	3.19 ± 0.01	4.37 ± 0.15	3.73 ± 0.03
MH + PC	2.25 ± 0.09	2.68 ± 0.01	3.14 ± 0.19	4.49 ± 0.13	3.74 ± 0.01
MH	2.74 ± 0.00	3.17 ± 0.00	3.15 ± 0.05	4.49 ± 0.10	3.76 ± 0.00
MM + COMs	2.74 ± 0.00	3.17 ± 0.00	3.07 ± 0.00	4.42 ± 0.12	3.70 ± 0.05
MM + ICT	2.74 ± 0.00	3.17 ± 0.00	3.13 ± 0.03	4.41 ± 0.11	3.74 ± 0.02
MM + IOM	2.74 ± 0.00	3.17 ± 0.00	2.97 ± 0.01	4.48 ± 0.07	3.76 ± 0.00
MM + TM	2.60 ± 0.18	3.17 ± 0.00	3.20 ± 0.01	4.44 ± 0.19	3.71 ± 0.05
MM	2.74 ± 0.00	3.17 ± 0.00	3.10 ± 0.01	4.50 ± 0.18	3.76 ± 0.00
ParetoFlow	4.10 ± 0.07	5.12 ± 0.10	5.02 ± 0.18	4.68 ± 0.13	4.33 ± 0.03
PCD (ours)	4.02 ± 0.07	5.51±0.10	3.37±0.19	4.72 ± 0.10	0.00 ± 0.00

Table 21: Average 50th percentile hypervolume for synthetic tasks (part 2)

Method	DTLZ1	DTLZ7	OMNITEST	VLMOP1	VLMOP2	VLMOP3
$\mathcal{D}(\text{best})$	10.60	8.56	4.53	0.41	1.78	45.65
E2E + GN	$10.\overline{31\pm0.05}$	8.77 ± 0.00	3.37 ± 0.14	0.00 ± 0.00	1.99 ± 0.20	$37.\overline{46\pm0.92}$
E2E + PC	10.30 ± 0.09	8.77 ± 0.00	4.24 ± 0.03	0.00 ± 0.00	3.27 ± 0.07	40.15 ± 0.18
E2E	9.86 ± 0.21	8.77 ± 0.00	4.31 ± 0.21	0.00 ± 0.00	3.33 ± 0.02	40.27 ± 0.00
MOBO	9.81 ± 0.09	3.81 ± 0.17	4.25 ± 0.04	0.00 ± 0.00	1.64 ± 0.02	38.98 ± 0.14
MH + GN	10.10 ± 0.13	8.78 ± 0.00	3.26 ± 0.21	0.04 ± 0.02	2.02 ± 0.05	29.19 ± 5.40
MH + PC	10.31 ± 0.05	8.77 ± 0.00	4.01 ± 0.21	0.09 ± 0.07	2.54 ± 0.21	35.96 ± 1.79
MH	10.21 ± 0.05	8.77 ± 0.00	4.04 ± 0.41	0.00 ± 0.00	3.15 ± 0.02	40.66 ± 0.97
MM + COMs	10.06 ± 0.08	8.78 ± 0.01	4.01 ± 0.33	0.06 ± 0.13	1.55 ± 0.03	39.03 ± 1.41
MM + ICT	10.22 ± 0.05	8.77 ± 0.00	4.12 ± 0.13	0.00 ± 0.00	3.34 ± 0.01	39.29 ± 0.30
MM + IOM	10.33 ± 0.05	8.77 ± 0.00	4.29 ± 0.03	0.19 ± 0.05	3.25 ± 0.05	40.23 ± 0.06
MM + TM	10.24 ± 0.04	8.77 ± 0.01	3.93 ± 0.46	0.00 ± 0.00	3.34 ± 0.01	38.88 ± 0.25
MM	10.17 ± 0.08	8.77 ± 0.00	4.28 ± 0.22	0.00 ± 0.00	3.32 ± 0.01	40.69 ± 0.95
ParetoFlow	10.43 ± 0.44	9.44 ± 0.48	4.78 ± 0.00	N/A	4.21 ± 0.03	45.45 ± 0.41
PCD (ours)	12.11 ± 0.51	10.61 ± 0.07	3.70 ± 0.17	0.00 ± 0.00	1.80 ± 0.03	45.68±0.03

Table 22: Average 50th percentile hypervolume for scientific design tasks

Method	Molecule	RFP	Regex	Zinc
$\mathcal{D}(best)$	2.91 ± 0.00	7.11 ± 0.00	3.96 ± 0.00	4.52±0.00
E2E + GN	1.24 ± 0.70	6.96 ± 0.13	2.99 ± 0.00	4.42 ± 0.02
E2E + PC	1.51 ± 0.92	7.03 ± 0.12	2.99 ± 0.00	4.39 ± 0.09
E2E	2.26 ± 0.07	7.10 ± 0.03	2.99 ± 0.00	4.40 ± 0.04
MOBO	0.00 ± 0.00	7.13 ± 0.00	5.05 ± 0.67	4.03 ± 0.13
MH + GN	1.23 ± 0.69	$\overline{6.97 \pm 0.05}$	3.16 ± 0.38	4.34 ± 0.09
MH + PC	0.45 ± 1.01	7.05 ± 0.01	3.76 ± 0.47	4.33 ± 0.12
MH	1.83 ± 1.02	7.00 ± 0.21	2.99 ± 0.00	4.42 ± 0.02
MM + COMs	2.31 ± 0.00	7.07 ± 0.04	3.44 ± 0.64	4.43 ± 0.02
MM + ICT	2.30 ± 0.01	7.05 ± 0.02	3.16 ± 0.38	4.34 ± 0.05
MM + IOM	0.00 ± 0.00	7.08 ± 0.05	2.99 ± 0.00	4.39 ± 0.03
MM + TM	1.19 ± 0.66	7.08 ± 0.04	3.36 ± 0.82	4.35 ± 0.07
MM	2.30 ± 0.00	7.11 ± 0.04	2.99 ± 0.00	4.45 ± 0.03
ParetoFlow	1.26 ± 0.71	6.87 ± 0.12	4.72 ± 0.54	4.15 ± 0.25
PCD (ours)	1.65±0.05	7.14±0.03	4.14±0.25	4.32±0.08

Table 23: Average 50th percentile hypervolume for RE tasks (part 1)

Method	RE21	RE22	RE23	RE24	RE25	RE31	RE32
$\mathcal{D}(\text{best})$	4.10	4.78	4.75	4.60	4.79	10.60	10.56
E2E + GN	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
E2E + PC	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.49 ± 1.11
E2E	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.49 ± 3.18	0.68 ± 1.53
MOBO	1.90 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
MH + GN	2.33 ± 0.29	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	1.16 ± 2.60	0.00 ± 0.00
MH + PC	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00
MH	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.48 ± 1.08	0.61 ± 1.36
MM + COMs	2.32 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.20 ± 0.46
MM + ICT	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.18 ± 2.33	0.63 ± 1.42
MM + IOM	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.17 ± 2.16	0.00 ± 0.00
MM + TM	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.32 ± 3.18	0.00 ± 0.00
MM	2.54 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	2.01 ± 2.81	1.37 ± 1.87
ParetoFlow	3.98 ± 0.08	4.65 ± 0.07	4.66 ± 0.00	4.43 ± 0.03	4.81 ± 0.02	10.22 ± 0.05	10.87 ± 0.39
PCD (ours)	4.22 ± 0.01	$4.49{\pm}0.08$	4.82 ± 0.00	4.85 ± 0.01	$4.84{\pm}0.00$	10.53 ± 0.02	10.64 ± 0.00

Table 24: Average 50th percentile hypervolume for RE tasks (part 2)

Method	RE33	RE34	RE35	RE36	RE37	RE41	RE42	RE61
$\mathcal{D}(\text{best})$	10.56	9.30	10.08	7.61	5.57	18.27	14.52	97.49
E2E + GN	0.00 ± 0.00	6.15 ± 0.16	0.00 ± 0.00	0.00 ± 0.00	3.32 ± 0.01	14.47 ± 0.05	0.00 ± 0.00	45.05 ± 0.04
E2E + PC	0.00 ± 0.00	6.22 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.44 ± 0.16	0.00 ± 0.00	45.06 ± 0.03
E2E	0.00 ± 0.00	6.21 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.49 ± 0.12	0.00 ± 0.00	45.07 ± 0.03
MOBO	0.00 ± 0.00	3.56 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	2.77 ± 0.00	12.89 ± 0.03	0.00 ± 0.00	N/A
MH + GN	0.00 ± 0.00	4.56 ± 0.44	0.00 ± 0.00	0.00 ± 0.00	3.11 ± 0.09	13.92 ± 0.73	0.00 ± 0.00	44.72 ± 0.35
MH + PC	0.00 ± 0.00	6.22 ± 0.01	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.52 ± 0.18	0.00 ± 0.00	45.06 ± 0.03
MH	0.00 ± 0.00	6.21 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.55 ± 0.18	0.00 ± 0.00	45.09 ± 0.01
MM + COMs	0.00 ± 0.00	6.22 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.22 ± 0.05	14.40 ± 0.15	0.00 ± 0.00	45.10 ± 0.00
MM + ICT	0.00 ± 0.00	6.20 ± 0.06	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.47 ± 0.10	0.00 ± 0.00	45.06 ± 0.03
MM + IOM	0.00 ± 0.00	6.22 ± 0.02	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.43 ± 0.09	0.00 ± 0.00	45.07 ± 0.03
MM + TM	0.00 ± 0.00	6.06 ± 0.39	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.45 ± 0.24	0.00 ± 0.00	45.09 ± 0.02
MM	0.00 ± 0.00	6.21 ± 0.00	0.00 ± 0.00	0.00 ± 0.00	3.31 ± 0.00	14.57 ± 0.04	0.00 ± 0.00	45.06 ± 0.02
ParetoFlow	10.58 ± 0.19	9.64 ± 0.79	$10.85 {\pm} 0.37$	7.41 ± 0.24	5.89 ± 0.51	17.77 ± 0.50	$20.08{\pm}4.86$	$106.15{\pm}6.82$
PCD (ours)	10.80±0.08	9.47±0.09	10.57 ± 0.03	7.71±0.03	5.83±0.02	17.98 ± 0.03	15.19±0.07	N/A

Table 25: Average 50th percentile hypervolume for MONAS tasks (part 1)

Method	C10/MOP1	C10/MOP2	C10/MOP3	C10/MOP4	C10/MOP5	C10/MOP6	C10/MOP7	C10/MOP8	C10/MOP9
$\mathcal{D}(\text{best})$	4.47	10.47	9.21	18.62	45.11	103.78	422.29	4.70	10.79
E2E + GN	4.43 ± 0.01	10.41 ± 0.09	9.75 ± 0.14	19.29 ± 0.41	47.16 ± 0.77	89.27 ± 1.06	418.89 ± 5.31	4.13 ± 0.26	9.59 ± 0.24
E2E + PC	4.41 ± 0.02	10.43 ± 0.02	10.01 ± 0.04	20.06 ± 0.24	48.40 ± 0.42	103.72 ± 0.24	486.25 ± 3.00	4.37 ± 0.07	9.87 ± 0.33
E2E	4.41 ± 0.03	10.40 ± 0.06	10.01 ± 0.07	20.47 ± 0.25	48.43 ± 0.24	103.81 ± 2.47	489.60 ± 3.03	4.43 ± 0.08	9.96 ± 0.14
MOBO	4.42 ± 0.01	10.40 ± 0.02	9.27 ± 0.01	19.01 ± 0.45	48.06 ± 0.46	105.42 ± 0.04	481.38 ± 4.92	4.62 ± 0.13	10.00 ± 0.28
MH + GN	4.40 ± 0.06	10.28 ± 0.21	8.96 ± 0.47	17.71 ± 1.21	39.43 ± 2.66	71.98 ± 5.98	365.27 ± 19.94	4.02 ± 0.18	9.24 ± 0.46
MH + PC	4.41 ± 0.03	10.30 ± 0.18	10.01 ± 0.04	20.19 ± 0.23	47.83 ± 0.48	98.46 ± 5.65	474.65 ± 5.05	4.30 ± 0.06	10.03 ± 0.32
MH	4.42 ± 0.01	10.43 ± 0.01	10.03 ± 0.03	19.98 ± 0.20	48.89 ± 0.02	102.76 ± 2.49	476.25 ± 4.32	4.39 ± 0.04	10.36 ± 0.37
MM + COMs	4.43 ± 0.01	10.44 ± 0.01	9.70 ± 0.08	19.38 ± 0.18	44.39 ± 2.16	100.15 ± 1.47	461.28 ± 7.29	4.65 ± 0.04	10.55 ± 0.11
MM + ICT	4.42 ± 0.01	10.43 ± 0.01	9.69 ± 0.08	18.63 ± 1.00	45.65 ± 1.26	104.04 ± 0.49	477.05 ± 3.01	4.35 ± 0.09	9.47 ± 0.11
MM + IOM	4.40 ± 0.05	10.28 ± 0.21	9.91 ± 0.10	20.12 ± 0.28	47.59 ± 0.78	104.61 ± 0.81	482.85 ± 4.91	4.71 ± 0.15	11.22 ± 0.13
MM + TM	4.42 ± 0.01	10.31 ± 0.13	9.92 ± 0.13	19.66 ± 0.45	47.72 ± 1.01	103.33 ± 1.04	462.91 ± 11.81	4.35 ± 0.07	9.57 ± 0.45
MM	4.38 ± 0.02	10.44 ± 0.01	10.02 ± 0.05	20.11 ± 0.33	48.58 ± 0.12	102.62 ± 0.95	485.56 ± 3.94	4.53 ± 0.14	10.33 ± 0.48
ParetoFlow	4.37 ± 0.06	10.40 ± 0.04	9.00±0.42	$18.26 {\pm} 0.78$	$\overline{39.00\pm0.60}$	100.52 ± 2.07	407.48 ± 21.71	$4.30{\pm}0.08$	10.37 ± 0.10
PCD (ours)	4.41±0.01	10.26±0.13	9.31±0.11	18.40±0.38	39.61±0.40	101.57±1.19	N/A	4.60±0.01	10.34±0.13

Table 26: Average 50th percentile hypervolume for MONAS tasks (part 2)

Method	IN-1K/MOP1	IN-1K/MOP2	IN-1K/MOP3	IN-1K/MOP4	IN-1K/MOP5	IN-1K/MOP6	IN-1K/MOP7	IN-1K/MOP8	IN-1K/MOP9
$\mathcal{D}(\text{best})$	4.47	4.53	10.06	4.15	4.30	9.15	3.94	9.28	18.07
E2E + GN	4.41 ± 0.16	3.77 ± 0.30	9.44 ± 0.53	4.10 ± 0.38	3.42 ± 0.14	8.62 ± 0.96	3.71 ± 0.34	8.59 ± 0.26	17.68 ± 0.59
E2E + PC	4.66 ± 0.04	3.84 ± 0.18	10.17 ± 0.02	4.18 ± 0.18	4.33 ± 0.06	9.36 ± 0.11	4.07 ± 0.17	9.34 ± 0.13	19.05 ± 0.34
E2E	4.66 ± 0.04	3.68 ± 0.10	10.20 ± 0.02	4.34 ± 0.06	4.48 ± 0.03	9.51 ± 0.07	4.38 ± 0.09	9.59 ± 0.11	19.50 ± 0.41
MOBO	4.30 ± 0.02	4.16 ± 0.01	9.89 ± 0.09	4.30 ± 0.08	4.38 ± 0.05	9.27 ± 0.13	3.65 ± 0.13	9.14 ± 0.14	19.36 ± 0.33
MH + GN	4.29 ± 0.25	3.80 ± 0.20	6.72 ± 1.49	4.05 ± 0.26	4.25 ± 0.23	8.95 ± 0.46	4.02 ± 0.11	6.72 ± 1.68	13.26 ± 1.41
MH + PC	4.61 ± 0.01	3.97 ± 0.16	9.94 ± 0.18	4.24 ± 0.05	4.39 ± 0.08	9.28 ± 0.20	4.24 ± 0.08	9.15 ± 0.16	18.80 ± 0.56
MH	4.61 ± 0.02	3.42 ± 0.18	10.11 ± 0.05	4.42 ± 0.02	4.46 ± 0.05	9.68 ± 0.12	4.45 ± 0.08	9.45 ± 0.07	19.39 ± 0.18
MM + COMs	4.58 ± 0.09	4.06 ± 0.14	10.13 ± 0.02	3.95 ± 0.27	4.35 ± 0.15	7.46 ± 0.89	3.91 ± 0.08	9.60 ± 0.08	19.90 ± 0.11
MM + ICT	4.64 ± 0.03	3.79 ± 0.17	9.92 ± 0.08	4.23 ± 0.06	4.38 ± 0.13	9.20 ± 0.13	4.15 ± 0.06	8.55 ± 0.33	18.03 ± 0.61
MM + IOM	4.59 ± 0.06	3.76 ± 0.35	10.17 ± 0.03	3.93 ± 0.45	4.31 ± 0.05	9.06 ± 0.11	4.18 ± 0.06	9.74 ± 0.06	20.10 ± 0.21
MM + TM	4.52 ± 0.03	3.82 ± 0.23	9.97 ± 0.07	4.29 ± 0.02	4.42 ± 0.06	9.23 ± 0.10	4.22 ± 0.35	9.16 ± 0.27	18.87 ± 0.33
MM	4.65 ± 0.03	3.85 ± 0.24	10.25 ± 0.07	4.43 ± 0.05	4.53 ± 0.05	9.70 ± 0.22	4.44 ± 0.09	9.52 ± 0.07	19.66 ± 0.30
ParetoFlow	$4.29{\pm}0.05$	4.25 ± 0.04	$9.64{\pm}0.05$	$4.10{\pm}0.18$	$4.26{\pm}0.16$	9.11 ± 0.24	3.51 ± 0.19	$8.85{\pm}0.51$	18.54 ± 0.50
PCD (ours)	4.41±0.02	4.06±0.09	10.06±0.10	4.11±0.03	4.27±0.02	8.82±0.02	3.30±0.15	8.96±0.02	17.63±0.71

Table 27: Average 50th percentile hypervolume for MORL tasks

Method	MO-Hopper-v2	MO-Swimmer-v2
$\mathcal{D}(best)$	6.33	3.70
E2E + GN	5.06 ± 0.44	1.02 ± 0.17
E2E + PC	$4.84{\pm}0.20$	3.61 ± 0.00
E2E	4.92 ± 0.39	0.87 ± 0.01
MOBO	4.75 ± 0.00	$0.86{\pm}0.00$
MH + GN	4.90 ± 0.35	0.97 ± 0.19
MH + PC	4.75 ± 0.00	0.95 ± 0.13
MH	4.91 ± 0.36	0.97 ± 0.14
MM + COMs	5.32 ± 0.34	3.50 ± 0.26
MM + ICT	4.75 ± 0.00	0.96 ± 0.10
MM + IOM	4.75 ± 0.00	1.00 ± 0.23
MM + TM	4.75 ± 0.00	0.93 ± 0.08
MM	4.75 ± 0.00	0.92 ± 0.10
ParetoFlow	5.38 ± 0.36	$2.66{\pm}0.32$
PCD (ours)	4.83±0.02	2.43±0.09