

LIVEXIV - A MULTI-MODAL LIVE BENCHMARK BASED ON ARXIV PAPERS CONTENT

Anonymous authors

Paper under double-blind review

ABSTRACT

The large-scale training of multi-modal models on data scraped from the web has shown outstanding utility in infusing these models with the required world knowledge to perform effectively on multiple downstream tasks. However, one downside of scraping data from the web can be the potential sacrifice of the benchmarks on which the abilities of these models are often evaluated. To safeguard against test data contamination and to *truly* test the abilities of these foundation models we propose LiveXiv: A scalable evolving live benchmark based on scientific ArXiv papers. LiveXiv accesses domain-specific manuscripts at any given timestamp and proposes to automatically generate visual question-answer pairs (VQA). This is done without any human-in-the-loop, using the multi-modal content in the manuscripts, like graphs, charts, and tables. Moreover, we introduce an efficient evaluation approach that estimates the performance of all models on the evolving benchmark using evaluations of only a subset of models. This significantly reduces the overall evaluation cost. We benchmark multiple open and proprietary Large Multi-modal Models (LMMs) on the first version of our benchmark, showing its challenging nature and exposing the models' true abilities, avoiding contamination. Lastly, in our commitment to high quality, we have collected and evaluated a manually verified subset. By comparing its overall results to our automatic annotations, we have found that the performance variance is indeed minimal ($< 2.5\%$). Our dataset is available online anonymously on [HuggingFace](#).

1 INTRODUCTION

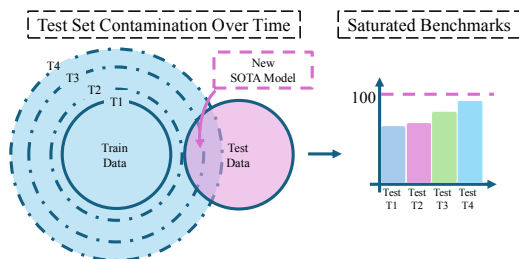


Figure 1: **Static benchmark contamination.** As training data increases, the risk for test set contamination grows and static benchmarks becomes saturated, reflecting falsely improved capabilities.

The internet, with its vast and ever-growing repository of information, serves as a rich data source for training Large Language Models (LLMs) (Brown et al., 2020; OpenAI, 2023; Chiang et al., 2023; Raffel et al., 2019; Touvron et al., 2023a;b; Dubey et al., 2024) and Large Multi-modal Models (LMMs) (OpenAI, 2023; Liu et al., 2023c; Li et al., 2024c; Zhu et al., 2023; Chen et al., 2023a; Alayrac et al., 2022; Radford et al., 2021a). This diverse and continuously updated data fits precisely the need to cover varying knowledge in scale in the training data.

Training on such data enables the models to achieve superhuman performance across a wide range of tasks on multiple common benchmarks (Fu et al., 2023; Yue et al., 2024; Li et al., 2024d; Liu et al., 2023d).

We hypothesize that a portion of LLMs' reported improvements are due to data contamination (Figure 1) and pose the following question: *To what extent does the potential for test set contamination during large-scale training affect our perception of the abilities of LMMs?*

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

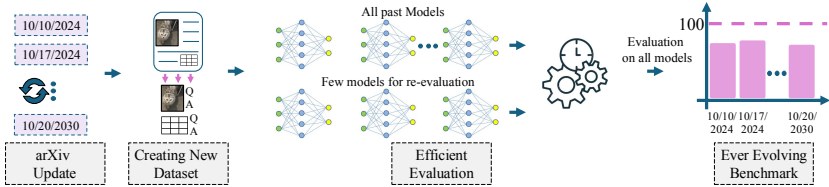


Figure 2: We propose LiveXiv, a new method for generating Live multi-modal dataset for Visual Question-Answering based on ArXiv content. Our pipeline automatically generates scalable and reliable questions along with an efficient evaluation method to reduce the computational and logistic overheads required for continually evaluating past and present models on new versions of the dataset.

One possible way to safeguard against the contamination of *static* benchmarks is to design a live benchmark that can continuously harness data from the web and turn it into an *ever-evolving* benchmark to test the abilities of these models. A live benchmark may be used in one of the following ways: (a) Expand the dataset over time and evaluate the models’ overall knowledge over all collected data, while taking into account that the data might be contaminated. (b) Use only the latest version to assess model capabilities while keeping data contamination risk minimal. While we focus on (b), we share key properties of our efficient evaluation method that is applicable to both cases.

Although, a live benchmark is a promising direction, it still comes with its fair share of challenges. A live benchmark should ideally be updated frequently, consistently, and automatically, *i.e.* it should be able to scrape the data from the web and formulate it into a benchmark for automated evaluations. Furthermore, as the benchmark is *ever-evolving*, each time a new version arrives, all the participant models need to be re-evaluated, making the update procedure prohibitively expensive both in time and compute. This requires a methodology for efficient evaluation of these models on a continuously updating benchmark. Such a methodology should ease the computational burden of evaluating all the models on each new version of the dataset and reduce the logistic overhead of maintaining inaccessible old models.

In this work, we take a step in this direction and propose LiveXiv – a novel fully automated multi-modal live benchmark that focuses on scientific domains. LiveXiv starts with scraping category-specific (*e.g.* cs.CV, eess.SY, q-bio.BM, etc.) manuscripts from ArXiv and generates visual question answers from figures, charts, and tables present in these manuscripts through a capable multi-modal model, namely, GPT-4o. As it is challenging to directly feed information-rich PDF documents to GPT-4o, as a pre-processing step, we extract relevant information from the papers by processing it with a structured document parsing pipeline (Team, 2022) to obtain pertinent information like placements of figures, charts, tables, and the text in the captions or in the tables.

This information is used to extract, *e.g.* by cropping, relevant information from the manuscripts, which is fed to GPT-4o to generate visual questions and answers. Although very capable, GPT-4o is still prone to errors, *e.g.* due to hallucinations, and may even generate questions that can be answered without visual information. Thus to mitigate these issues, we add an extensive filtering stage that automatically filters questions requiring only textual information to answer them, and reduce hallucinations through obtaining agreement about the generated questions with another capable multi-modal model, namely, Claude. After the extensive filtering, we obtain a large corpora of VQA pairs which are incorporated into our LiveXiv live benchmark.

Over time, the benchmark is expected to grow, either in the size of the dataset or the amount of models to be evaluated, which increases the required resources for evaluation. Moreover, comparing a new model to existing models at different times requires re-evaluating the existing models over the latest version of the dataset, which can cause additional overhead for continuous evaluation and comparison to prior works. To make the evaluations on LiveXiv feasible, we take inspiration from Maia Polo et al. (2024a;b) and propose a method to approximate the performance of the existing models in new versions of LiveXiv just by re-evaluation small portion of them. Figure 2 provides a conceptualized overview of our approach.

We summarize our contributions as follows: (a) We propose a scalable live benchmark without any human in the loop that automatically harnesses data from online scientific manuscripts, generates multiple VQA pairs, filters these questions to reduce errors, and formulates them in the form of a benchmark to test the evolving landscape of LMMs; (b) We introduce an efficient evaluation pipeline that requires LMMs to be tested only on a fraction of the data to infer its performance on the latest version of the benchmark, reducing the overall needed evaluations by 70%; (c) We benchmark multiple open and proprietary LMMs

on the first version of our benchmark highlighting its challenging nature and providing interesting insights about the models’ behavior when evaluated on less contaminated data.

2 RELATED WORKS

Large multi-modal Models (LMMs). LMMs have shown significant advancements in enabling billion-parameter scale LLMs to perform multi-modal tasks such as image captioning, visual reasoning, and visual question answering. Academia and industry have endeavored to develop LMMs targeting the multi-modal competence of advanced proprietary models like GPT4o (OpenAI, 2023) and Claude (cla, 2024). Instruct-BLIP performs instruction tuning on the pre-trained BLIP-2 (Li et al., 2023) covering 11 vision-language tasks. The LLaVA series models (Liu et al., 2023c;a;b; Li et al., 2024b) develop the pipeline of collection of instruction-following data and visual instruction tuning with enhanced vision capabilities. The internLM-XComposer (IXC) series (Dong et al., 2024a;b) target free-form vision-language composition and multilingual comprehension. Models from Idefics release (Laurençon et al., 2024b;a) benefit from the massive collection of instruction-following data from over 50 vision-language databases, enhancing capabilities of OCR, document understanding, and visual reasoning. In this work, we include 17 top-performing LMMs in our multi-modal live benchmark LiveXiv, covering both open-sourced and proprietary representatives.

Static evaluation benchmarks for LMMs. Most existing LMM benchmarks offer static evaluation with fixed questions and answers (Fu et al., 2023; Yue et al., 2024; Li et al., 2024d; Liu et al., 2023d; Huang et al., 2024; Lin et al., 2024; Zhang et al., 2024b). MME (Fu et al., 2023) offers evaluation of perception and cognition on 14 tasks and MMMU (Yue et al., 2024) includes 11.5K questions from college exams, quizzes and text books from six major disciplines. Although these benchmarks cover a large variety of multi-modal domain knowledge, evaluation on them is faced with two hazards: the excessive evaluation cost and test data contamination. In this work, we tackle both challenges by proposing a suite that enables efficient evaluation on a contamination-free live benchmark.

Contamination-free benchmarks. As large foundation models like LLMs and LMMs are trained on combined sources of tremendous amount of web data or repurposed version of existing open-sourced datasets, there is a high risk of overlap between training data and samples from evaluation benchmarks. Reported evidence and analysis show impact of data contamination on evaluation benchmarks for LLMs (Wei et al., 2023; Zhang et al., 2024a; Cobbe et al., 2021; Roberts et al., 2023; Jain et al., 2024) and LMMs (Chen et al., 2024), indicating the significance of contamination-free evaluation benchmarks. For LLMs, LMSys Chatbot Arena (Chiang et al., 2024) and AI2 WildVision (Lu et al., 2024) create a user-focused platform that provides contamination-free environment for proper evaluations. However, it is expensive to collect tens of thousands of human preferences on the compared language models. Furthermore, Seal Benchmark (AI, 2024) proposes private questions paired with human evaluations. Srivastava et al. (2024) update the questions in the MATH dataset (Hendrycks et al., 2021) by changing numbers in the math questions. LiveBench White et al. (2024) collects frequently updated questions from diverse information sources *e.g.* math competitions, arXiv papers and news articles and more challenging versions of existing benchmark tasks. Concurrently, LiveCodeBench (Jain et al., 2024) contributes a live benchmark on broader code-related capabilities. Note that these datasets focus on language data only.

For LMMs, Vibe-Eval (Padlewski et al., 2024) and LLaVA-Wilder (Li et al., 2024a) perform contamination check on the collected samples that reflect real-world user requests. Most related to our work, the LMMs-Eval LiveBench (Zhang et al., 2024b) collects images from sources of new websites and online forums and employs proprietary LMMs for design and revision of questions. However, the LMMs-Eval LiveBench requires human manual verification of questions which impedes the scalability. Furthermore, it contains only open-ended questions that require LMM-as-a-judge which is time-consuming, susceptible to judge biases, and difficult to scale. In comparison, our LiveXiv constructs a fully-automated data collection pipeline which generates multiple-choice questions which are challenging to the top-performing LMMs.

Efficient benchmarks. With the increasing amount of tasks and samples in current benchmarks, evaluation of the full suite is time-consuming and cost-intensive. Efforts are underway to develop efficient benchmarks that reduce computation costs without sacrificing reliability. For LLMs, Perlitz et al. (2023) proposed the first systematic study of the effects of language model benchmark designs on reliability and efficiency, and applied efficient benchmark practices on the HELM benchmark (Liang et al., 2022), leading to $\times 100$ computation reduction with minimal loss on reliability. Lifelong benchmarks (Prabhu et al., 2024) has an ever-expanding pool of test samples for the categories in CIFAR10 (Krizhevsky & Hinton, 2009) and ImageNet (Deng et al., 2009); to make this design economically feasible, it reuses past model evaluations

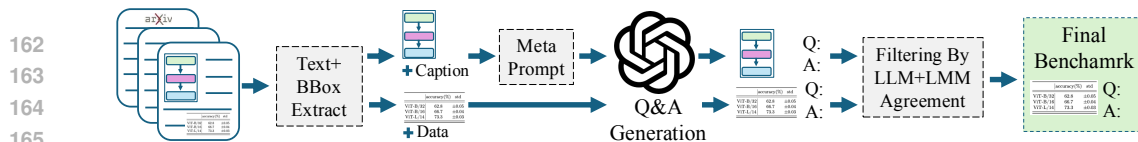


Figure 3: Our live dataset generation consists of several stages. We first extract the images and their corresponding metadata (*i.e.* captions and table contents), then we classifying the figures into categories using meta-prompting. All the extracted data is then fed to GPT4o to generate multiple questions-answer pairs per image. Since generative models are prone to errors, we apply several filtering steps, using an LLM and LMM to ensure that our dataset is truly multi-modal and reliable.

on a sample set through dynamic programming to enable efficient evaluation of new incoming models, drastically reducing the evaluation cost. Most related to our work, tinyBenchmarks (Maia Polo et al., 2024a) and PromptEval (Maia Polo et al., 2024b) propose using Item Response Theory (IRT) (Lord et al., 1968) to estimate the performance of LLMs on unseen samples, making efficient evaluation possible by only conducting a small fraction of the total number of evaluations. Inspired by the last two works, we leverage IRT to estimate the performance of older models in new batches of data. More specifically, at each version of LiveXiv, we choose a small core set of models (≤ 5) previously added to the leaderboard and re-evaluate them on the new data. Depending on their responses to the new samples, we estimate the performance of the remaining old models on the new benchmark version.

3 LIVEXIV

At a higher level, our automated LiveXiv is created by first obtaining the domain-specific scientific manuscripts from ArXiv at any given timestamp. Then, to obtain pertinent information from the manuscripts, we pass them through a structured document parsing pipeline and then generate visual question answers through a capable LMM (Section 3.1). However, the generated questions can contain errors due to hallucinations or might be too straightforward to answer. Thus, to mitigate these issues, we offer an extensive filtering stage (Section 3.2). To evaluate the benchmark, we propose an efficient evaluation framework to infer the overall performance on the benchmark using only a small subset of evaluations, making the evaluations extremely resource-efficient (Section 3.3). The data acquisition and filtering steps are schematically visualized in Figure 3.

3.1 DATA ACQUISITION AND VQA GENERATION

We start with the data acquisition phase, then pre-process the data to obtain the required metadata (*e.g.* placements of figures, captions, etc.), and then generate the first iteration of VQA from the multi-modal data (figures and tables) from the manuscripts.

Data Acquisition: At any given timestamp, we begin by acquiring only ArXiv papers which have non-exclusive license to distribute from predefined domains such as Computer Science (`cs.AI`, `cs.CV`), Electrical Engineering (`eess.SP`, `eess.SY`), and Quantitative Biology (`q-bio.BM`, `q-bio.GN`). However, these manuscripts contain a lot of information that might not be necessary for the task of VQA data generation. Thus, to extract pertinent information we require a pre-processing step.

Pre-processing: The downloaded PDFs undergo a structured document parsing pipeline using the DeepSearch toolkit (Team, 2022), which extracts a comprehensive layout of each document, including the positions of figures, tables, captions, and other elements. This structured layout forms the basis for extracting the multi-modal data required for subsequent tasks. To enrich the dataset with additional metadata not captured by the parsing pipeline, we employ a meta-prompting approach with CLIP (Radford et al., 2021b), similar to the method used by Mirza et al. (2024). Specifically, we classify the figures into three distinct categories: Block Diagram, Chart, and Qualitative visual examples which facilitates a more granular, domain-specific evaluation of LMM performance.

VQA Generation: For Visual Question Answering (VQA), we construct pairs of figures and their corresponding captions, and for generating VQA from the data present in the tables, we obtain (*e.g.* crop) images of tables accompanied by their corresponding data.

The VQA process involves two steps using GPT-4o. First, we input the figure and its caption to GPT-4o to generate a detailed description of the figure, employing a Chain-of-Thought (CoT) approach (Wei

et al., 2022). Next, the detailed description and figure are fed back into GPT-4o, with prompts adapted from ‘ConMe’ (Huang et al., 2024) to suit our scientific use case, enabling the generation of relevant VQA questions. For questions from the tables, we utilize the table’s content directly, presenting both the image of the table and its data in markdown format to GPT-4o to produce questions that require common-sense reasoning and data manipulation. The automated nature of this process ensures a robust and comprehensive evaluation framework for LMMs, tailored to scientific literature specifics. Detailed prompt templates can be found in Appendix A.5.

3.2 FILTERING PHASE

Even though GPT-4o is powerful and has been reported to outperform humans on many different benchmarks (OpenAI, 2023), still it is prone to errors and sometimes can even result in VQA pairs that are answerable without requiring the visual information. Thus, to ensure that the benchmark remains competitive and also has minimum errors, we propose an extensive automatic filtering step. At a higher level, the filtering phase consists of two main parts, each designed to mitigate a separate issue that can arise due to the automatic dataset generation.

Blind test with an LLM: To ensure that the generated VQA pairs are *truly* multi-modal, we pass them through a Large Language Model (LLM) without providing any associated images or image descriptions. This process, referred to as a *blind test*, aims to identify questions that the LLM can answer correctly even in the absence of visual context, indicating they are not truly multi-modal. To ensure robustness, this blind evaluation is repeated multiple times to eliminate any potential *lucky guesses* by the LLM. Questions that are consistently answered correctly by the LLM are filtered out, resulting in the removal of approximately 30% of the generated questions. This step ensures that the remaining questions in the dataset are inherently multi-modal and cannot be answered solely based on linguistic context. The filtered dataset thus represents a more challenging benchmark for evaluating multi-modal capabilities of vision-language models.

Agreement between disjoint models: Generative models, including LMMs, are prone to hallucination, where the model generates incorrect or not grounded information. In our case, these hallucinations can lead to erroneous VQA pairs. To address this issue, we introduce an additional filtering step. All questions that pass the initial “blind test” are reviewed along with their generated answers by a different LLM, in this case Claude-Sonnet (cla, 2024), which is provided with the image, question, and the ground truth answer which were all generated by GPT-4o. This second model is asked to either agree or disagree with the generated answer, considering the visual context.

We point out that agreement between models is a nuanced process; incorporating more models to validate answers may lead to the exclusion of difficult questions, thereby diluting the *difficulty* of the dataset. Therefore, we limit this validation step to models with comparable performance to the generation model (*i.e.* GPT-4o). Our preliminary manual evaluation on a subset of the dataset indicates that this agreement step significantly reduces the proportion of incorrect ground-truth (GT) questions, with a reduction of 38.5%, while minimally impacting the retention of high-quality question-GT pairs, with only a 6.15% removal of valid pairs. This refinement ensures that the final dataset is both challenging and accurate for the evaluation of LMMs’ multi-modal reasoning capabilities. The generated corpus of data is ready to be incorporated into LiveXiv and can be updated automatically without any human intervention.

3.3 EFFICIENT EVALUATION

Since LiveXiv is a dynamic benchmark, evaluation can be costly: ideally, whenever a new version of the benchmark is released, all models must be re-evaluated on the updated data, which can pose an engineering challenge and become computationally expensive when handling dozens of models. In this section, we describe our approach to efficient evaluation, which avoids re-evaluating all models at each step, making LiveXiv’s maintenance economically feasible. Our idea is based on Item Response Theory (IRT) (Cai et al., 2016; Van der Linden, 2018; Lord et al., 1968; Maia Polo et al., 2024b;a), a collection of statistical models traditionally used in psychometrics and educational assessment. We briefly give some background on IRT and detail how we use it for our evaluations.

3.3.1 ITEM RESPONSE THEORY (IRT)

We use the IRT model to predict the probability of a certain LMM i answering correctly on a sample (question) j . In mathematical terms, let $Y_{ij} \in \{0,1\}$ denote the correctness on sample j when responded

by LMM i :

$$Y_{ij} \sim \text{Bernoulli}(\mu(\theta_i, \beta_j)),$$

where θ_i is an LMM-specific parameter, β_j is a sample-specific parameter, and μ is a function that maps those parameters to the probability of correctness. In this work, we follow [Maia Polo et al. \(2024b\)](#) and assume the parameters live in the real line while μ induces a logistic regression model. In more detail, we assume

$$\mathbb{P}(Y_{ij} = 1; \theta_i, \beta_j) = \frac{1}{1 + \exp[-(\theta_i - \beta_j)]}. \quad (1)$$

Here, θ_i can be interpreted as the skill level of LMM i while β_j is seen as the hardness of sample j . By equation 1, if θ_i is much greater (resp. smaller) than β_j , then the probability $\mathbb{P}(Y_{ij} = 1; \theta_i, \beta_j)$ will be close to one (resp. zero). This version of the IRT model is known as the Rasch model ([Georg, 1960](#); [Chen et al., 2023b](#)), and it is widely used in fields such as recommendation systems ([Starke et al., 2017](#)), educational testing ([Clements et al., 2008](#)), and evaluation of language models ([Maia Polo et al., 2024b](#)). Moreover, it has a similar formulation to the popular Bradley-Terry model ([Bradley & Terry, 1952](#)) used in Chatbot Arena ([Chiang et al., 2024](#)), a popular and dynamic benchmark for AI-powered chatbots. We fit the Rasch model using maximum likelihood estimation as in [Chen et al. \(2023b\)](#) and [Maia Polo et al. \(2024b\)](#).

3.3.2 EFFICIENT EVALUATION WITH IRT

We can estimate old model scores on new data without reevaluating those models. Let \mathcal{I}_t and \mathcal{J}_t represent sets of non-negative integers corresponding to LMMs and samples at time $t \geq 0$. We assume that $\mathcal{I}_t \subseteq \mathcal{I}_{t+1}$ since the set of available models does not shrink over time, and $\mathcal{J}_{t_1} \cap \mathcal{J}_{t_2} = \emptyset$ for $t_1 \neq t_2$ because samples are not repeated across different time steps. Let the set of evaluated models at time t be denoted by $\hat{\mathcal{I}}_t$. For $t > 0$, we assume that $\mathcal{I}_t \setminus \mathcal{I}_{t-1}$ is a proper subset of $\hat{\mathcal{I}}_t$, meaning that all newly introduced models are evaluated on the new batch of samples along with some previously existing models. At $t=0$, we assume that $\hat{\mathcal{I}}_t = \mathcal{I}_t$, meaning all models are evaluated on all samples. Furthermore, we assume that $|\hat{\mathcal{I}}_t|$ is much smaller than $|\mathcal{I}_t|$ when $t > 0$ so computing power and evaluation time can be saved.

Our goal at time $t > 0$ is to estimate the performance of a model $i \notin \hat{\mathcal{I}}_t$ on the set of samples \mathcal{J}_t , using only the correctness scores $\mathcal{D}_t = \{Y_{ij} : (i, j) \in \Omega_t\}$, where $\Omega_t \triangleq \cup_{t' \leq t} \hat{\mathcal{I}}_{t'} \times \mathcal{J}_{t'}$. Specifically, we aim to approximate $S_{it} = \frac{1}{|\mathcal{J}_t|} \sum_{j \in \mathcal{J}_t} Y_{ij}$ by estimating its expectation

$$\mathbb{E}[S_{it}] = \frac{1}{|\mathcal{J}_t|} \sum_{j \in \mathcal{J}_t} \mathbb{P}(Y_{ij} = 1; \theta_i, \beta_j). \quad (2)$$

For a moment, let us assume that Ω_t is known. Using \mathcal{D}_t , we can estimate the skill parameters θ_i 's of all models in \mathcal{I}_t and the difficulty parameters β_j 's of all samples in $\cup_{t' \leq t} \mathcal{J}_{t'}$; we denote these estimates as $\hat{\theta}_i$'s and $\hat{\beta}_j$'s. Finally, we obtain an approximation for equation 2, $\hat{\mathbb{E}}[S_{it}]$, by substituting θ_i and β_j 's by their estimates. The estimator $\hat{\mathbb{E}}[S_{it}]$ is known as the Performance-IRT estimator ([Maia Polo et al., 2024b;a](#)).

Now, we provide a method to obtain Ω_t assuming Ω_{t-1} is given; in summary, we need to decide which models in \mathcal{I}_{t-1} are going to be in $\hat{\mathcal{I}}_t$. Our approach to choosing which models are going to be re-evaluated is inspired by the concept of optimal design of tests ([Van der Linden, 2017](#), Chapter 9) but in which we choose LMMs instead of samples. First, we set a budget m_t , representing the maximum number of models to be re-evaluated at time step t . Second, assuming that the level of difficulty of the new samples \mathcal{J}_t is not very different from the ones in \mathcal{J}_{t-1} , we choose a set of m_t representative samples in \mathcal{J}_{t-1} by ordering $\hat{\beta}_j$'s and choosing equally spaced samples, based on their quantiles, from the 5th to the 95th percentiles; this will give us questions with a variety of difficulties, excluding outliers. For example, if $m_t = 3$ we would choose questions with difficulties in the 5th, 50th, and 95th percentiles. Denote the chosen core set of samples as $\{j_0, \dots, j_{m_t-1}\}$ and, for each one of these samples j_k , we choose a model i in \mathcal{I}_{t-1} such that the following Fisher information criterion

$$F_{jk}(i) = \mathbb{P}(Y_{ijk} = 1; \hat{\theta}_i, \hat{\beta}_{j_k}) \left[1 - \mathbb{P}(Y_{ijk} = 1; \hat{\theta}_i, \hat{\beta}_{j_k}) \right]$$

is maximized. The model that maximizes F_{jk} is maximally informative about the parameter of sample j_k and, consequently, about all samples with similar difficulty levels in the new version of LiveXiv; this

will help us estimate the difficulties of new samples. We note that some models in \mathcal{I}_{t-1} might not be available at step t , *e.g.*, due to deprecation; when choosing models, we do not consider them, but note that we can still estimate their performance on the new batches of data. Moreover, the model selection procedure can also take convenience into account; for example, if two models have very similar Fisher information, we opt for the one that is cheaper to evaluate.

Our experiments demonstrate that re-evaluating just 5 models per step provides accurate model evaluation. With 50 total models, this approach can reduce computing costs by at least $\times 10$, particularly when selecting less expensive models without significantly impacting F_{jk} .

4 RESULTS & ANALYSIS

This section presents the results obtained on the first version of LiveXiv. First, we start by describing the experimental settings. Then, we present the results and finally conclude with a detailed analysis of our dataset.

4.1 EXPERIMENTAL SETTINGS

Evaluation Protocol: After the generation of the question-answer pairs from our automated pipeline explained in Section 3, we transform the benchmark to multiple-choice questions. We resort to the ‘generate’ inference employed extensively by previous works, such as Li et al. (2024d); Huang et al. (2024); Liu et al. (2023d). The model is prompted to choose the letter corresponding to the correct choice and answer with the letter directly. The output letter is then compared with the ground truth and the accuracy is measured. We report the average accuracy over all the samples evaluated in Table 1. For ease of assimilation and to obtain insights into what type of data the models flourish at, we provide the results from data generated on tables and figures separately. The data generated from figures is labeled as part of Visual Question and Answers (VQA) and the data from the tables is labeled as Table Question and Answers (TQA). Examples for the multiple-choice formulation of the question-answer pairs are added to the Appendix Section A.2.

Size of dataset: The current version of our LiveXiv consists of 7328 questions on figures, and 9000 questions on tables, both are generated from 250 papers (25 papers from 10 domains). Overall our first version of the dataset has 16328 questions in total. Thanks to the continual growth in the number of publications in our target domains and the fully automatic nature of our proposed LiveXiv pipeline for benchmark data generation, we will grow LiveXiv by adding an equal-sized large amount of new VQA & TQA data (around 7K VQA and 9K TQA) every month. Such large-scale updates might be significantly more difficult for benchmarks relying on manual data collection for live updates (Zhang et al., 2024b).

Models: We extensively evaluate our benchmark by employing a total of 17 LMMs. Specifically, we employ 5 models from the LLaVA family of models including LLaVA 1.5-7B and LLaVA 1.5-13B (Liu et al., 2023c), LLaVA-1.6-7B and LLaVA 1.6-34B (Liu et al., 2023b) and LLaVA One-Vision (Li et al., 2024b). Furthermore, we employ InstructBLIP (Dai et al., 2023), InternVL2-2B and InternVL2-8B (Chen et al., 2023c), InternLM-Xcomposer2-4KHD (Dong et al., 2024b) and InternLM-Xcomposer2.5 (Chen et al., 2023c), Mantis (Jiang et al., 2024), Phi3v (Abdin et al., 2024), Idefics2 (Laurençon et al., 2024b) and Idefics3 (Laurençon et al., 2024a), Qwen2-VL (Wang et al., 2024) and API models Claude-Sonnet (cla, 2024) and GPT4o (OpenAI, 2023) for our evaluations. These models have been chosen because of their varying characteristics and strong performance on multiple current benchmarks. All the models (except GPT-4o and Claude-Sonnet) are accessed from the huggingface API, which makes our framework modular for an extension to more models as they are being added to the hub in the future.

Additional LiveXiv versions: While in this section we mainly focus on the analysis of the first version of LiveXiv, we have already published the three more versions in the huggingface dataset hub: one of past ArXiv papers (v0) and two of more recent papers (v2 and v3). Version 2 consists of 18K samples, introduces 4 new domains from physics (namely, physics.optics, physics.bio-ph, physics.app-ph, physics.data-an), and includes two additional LMMs (Pixtral and Molmo-7B). Version 3 utilizes multiple generation and filtering models (GPT4o, Claude-Sonnet, Qwen2-VL-72B) to and increase diversity and measure the effect of potential biases. In addition, to perform a deeper analysis, we created a variant of version 1 with opposite roles (*i.e.* Claude as the QA generation model and GPT as the filter model). We found that the overall performance and ranking remains roughly the same. Lastly, version 0 is generated from papers from more than 10 years ago. Our experiments reassure our findings about the performance of our efficient evaluation, strengthening its validity even in the presence of a large time gap between the dataset versions. All the details can be found in Appendix A.3.

Table 1: VQA and TQA average accuracy across ArXiv taxonomy. (V is VQA, T-TQA)

VQA&TQA Acc.	eess.SP		q-bio.EM		q-bio.CB		cs.AI		eess.SY		cs.CV		cs.RO		q-bio.GN		cs.LG		q-bio.TO		Mean	
	V	T	V	T	V	T	V	T	V	T	V	T	V	T	V	T	V	T	V	T	V	T
# Samples	651	429	900	1624	840	697	685	1069	735	472	720	932	672	570	647	1121	844	1195	634	894	7328	9000
InstructBLIP-7B	21.2	18.1	25.2	16.6	19.5	20.2	24.5	21.8	23.4	18.9	21.3	20.7	22.6	22.8	24.9	16.9	24.1	18.5	21.1	18.2	23.6	19.1
LLaVA-1.5-7B	29.0	24.9	27.8	20.9	29.5	25.4	31.9	23.5	30.5	25.0	31.0	21.8	34.9	24.9	29.1	22.6	29.3	24.9	32.8	25.4	30.4	23.5
LLaVA-1.6-Mistral-7B	28.1	31.9	28.7	26.8	28.6	29.7	33.9	29.2	31.0	36.4	31.4	29.0	33.3	30.5	27.0	27.6	27.9	30.4	29.5	29.1	29.9	29.3
Mantis-LLama3-8B	32.3	31.2	28.6	28.0	32.7	30.0	33.7	30.0	30.2	33.5	36.9	29.1	32.6	32.5	29.2	29.9	30.8	30.0	34.9	30.3	32.1	30.0
LLaVA-1.5-13B	32.6	30.5	29.4	28.9	31.5	33.1	33.4	31.5	33.2	35.6	35.9	31.5	35.7	33.0	30.6	29.8	30.0	29.4	32.2	30.8	32.3	30.9
Idefics2-8B	35.6	37.1	38.4	35.9	35.9	43.2	40.7	39.2	40.5	42.8	38.6	35.0	39.6	40.0	30.3	38.7	36.9	37.0	38.8	38.9	37.6	38.2
IXC2-4KHD-7B	33.0	41.1	36.7	40.8	33.0	46.8	40.1	38.4	35.8	47.2	45.7	37.0	44.5	41.9	37.9	42.8	35.8	41.3	36.1	42.6	37.7	41.5
IXC2.5-7B	46.2	42.3	46.1	40.5	48.2	48.4	53.3	39.8	50.5	50.8	45.1	39.2	47.0	44.6	47.9	47.5	49.4	36.7	46.8	40.7	48.1	42.1
InternVL2-2B	48.4	42.7	48.1	44.2	50.4	53.7	53.4	48.9	50.5	58.3	46.3	44.7	54.2	51.6	48.4	52.0	48.2	49.2	50.9	52.0	49.8	49.1
LLaVA-1.6-34B	48.4	49.5	45.6	49.4	47.4	55.7	55.9	49.2	52.5	59.7	51.8	48.9	54.9	50.7	47.9	49.2	47.9	46.6	50.2	50.8	50.0	50.2
Idefics3	54.4	47.2	50.6	48.1	52.3	55.5	57.2	48.9	57.0	57.8	53.3	47.2	54.6	51.9	51.5	51.7	51.5	48.0	56.6	51.8	53.7	50.2
LLaVA-OneVision-7B	53.1	46.2	49.7	47.8	51.8	53.9	57.2	50.3	52.8	57.8	57.2	47.7	57.6	53.2	51.6	51.2	51.1	50.5	59.1	52.7	53.9	50.6
Phi3v	60.1	51.4	54.4	48.7	59.9	54.8	64.5	52.8	61.8	57.8	56.0	48.7	58.5	51.4	58.9	51.0	56.0	51.5	58.2	56.2	58.7	51.8
GPT-4o	64.1	50.7	55.9	51.8	58.8	56.2	62.9	54.3	64.4	62.3	60.1	50.8	60.3	56.1	55.2	56.3	59.0	55.1	64.4	55.0	60.3	54.5
InternVL2-8B	64.5	57.5	56.9	57.5	61.4	65.3	67.0	57.5	65.3	67.2	59.9	60.1	65.3	61.8	58.4	60.8	61.4	59.1	65.6	61.4	62.3	60.2
Qwen2-VL	68.0	60.3	62.4	59.6	71.8	67.3	67.2	59.7	69.3	70.1	63.3	62.6	64.6	64.6	64.5	61.1	63.7	59.2	71.9	65.0	66.6	62.1
Claude-Sonnet	78.9	84.0	72.3	81.2	77.4	80.3	77.7	84.5	78.4	85.6	69.9	84.0	74.1	86.5	72.9	82.9	76.4	86.4	75.9	82.3	75.4	83.5

4.2 EXPERIMENTAL RESULTS

Results on entire dataset: We evaluated 17 large multi-modal models (LMMs) across two prominent tasks, VQA and TQA. Table 1 provides a detailed summary of the performance across both tasks. One interesting observation is the Claude’s superior performance across the board. This substantial performance gap suggests that Claude’s architecture and underlying methodologies are particularly well-suited for both VQA and TQA tasks. The results align with other relatively close benchmarks, DocVQA (Mathew et al., 2021), ChartQA (Masry et al., 2022) and AI2D (Kembhavi et al., 2016), where we see a similar trend: Claude has significantly higher performance over the runner-up models such as Qwen2-VL, GPT-4o and InternVL2-8B. See Table 4 for more details. However, a notable caveat is that Claude plays an integral role in the question-filtering process, which may introduce a potential bias in favor of questions it is predisposed to solve effectively. This implies that while Claude’s overall performance remains strong, the evaluation might not fully reflect its robustness to novel or more diverse question types outside the scope of this filtering. Surprisingly, GPT4o has low performance. To understand the root cause of this observation, we experimented with various hyper-parameters such as temperature, image resolution, and diverse textual prompts. Nevertheless, these all yielded similar results.

We further observe that newer models, such as InternVL2-8B and Qwen2-VL, consistently outperform older models like LLaVA-1.6 and Idefics2, suggesting rapid advancements in LMM development over the past few months. This trend highlights the continual improvement in both architecture and training paradigms, leading to better generalization across multi-modal tasks.

Zooming into the domain-specific performance using an ArXiv-based taxonomy, we evaluate each model’s effectiveness in distinct scientific fields such as biology, electrical engineering, and mathematics. Our results show that certain models, particularly the newer architectures, exhibit a higher degree of robustness across diverse domains, highlighting that the models’ training data might already have potential contamination issues. Conversely, for VQA, models in the Intern-VL2 and the LLaVA families appear to be more sensitive to domain shifts, performing inconsistently across different scientific areas, as oppose to the more recent models like Qwen2-VL, Claude and GPT4o, see Figures 5, 6 for more details. For TQA, it’s not the case, probably since the questions test more specific skills such a retrieval and arithmetic manipulations, see Figures 7, 8. This domain-specific sensitivity emphasizes the need for further refinements in LMMs, especially when applied to specialized scientific knowledge domains. Overall, this analysis not only underscores the ongoing evolution of LMMs but also highlights areas for further investigation, especially concerning model adaptability to diverse content domains and the potential biases introduced by models.

Contamination free effect: Interestingly, focusing on new data that came after the LMMs were trained, allows LiveXiv to provide a new, contamination-free, perspective on the relative performance ranking between strong LMMs. For example, taking the official results from original publications and computing the average ranking of the evaluated LMMs over the established DocVQA (Mathew et al., 2021), ChartQA (Masry et al., 2022) and AI2D (Kembhavi et al., 2016) benchmarks, and comparing those to the average rankings provided by LiveXiv, we observe some significant ranking changes. *e.g.*, IXC2.5 and IXC2-4KHD drop over 4 points in average ranking. See Table 5 in the appendix for details.

Performance on manually filtered dataset: To further verify our proposed automated question-answer generation and filtering methodology and to obtain a measure of errors in the generated data, we manually verified a subset of 1000 samples (500 for both, VQA and TQA) and evaluated all models on this

Table 2: Performance change between LiveXiv and a manually verified subset averaged across all evaluated models. LiveXiv is robust, thanks to excessive filtering steps which keep the labeling errors low.

	LiveXiv	Verified Subset	Absolute Avg.
VQA	46.734	47.273	2.336
TQA	45.101	46.028	2.105

subset. Table 2 presents the results for VQA and TQA on the filtered subset. We see that on average the performance only fluctuates by 2.3% and 2.1% for VQA and TQA when comparing the results obtained by all the models on the entire dataset and the manually verified subset. These results hint that our automated question-answer generation pipeline and the filtering methodology is quite robust. Detailed results can be found at the Appendix, Tables 6 and 7.

Efficient evaluations of LMMs: In this section, we empirically validate the effectiveness of our proposed efficient re-evaluation method for LMMs. Dynamic benchmarks like LiveXiv present a challenge in terms of evaluation costs since each time a new version of the benchmark is released, all models should be re-evaluated on the updated data. This process, however, can become computationally prohibitive when dealing with numerous models. Our goal is to demonstrate that by re-evaluating only a small subset of models on a new version of LiveXiv, we can still reliably predict the performance of the remaining models.

For this experiment, we evaluate 17 models on the first version of LiveXiv but only re-evaluate 5 models (+2 not present in the first version) on the second version of the benchmark using the model selection methodology detailed in Section 3.3; we focus on VQA or TQA (but not both simultaneously) and consider all ArXiv domains. An IRT model is then fitted to the full observed data, and we predict the performance of the non-re-evaluated models on each ArXiv domain and the overall benchmark using empirical versions of equation 2. Figure 4 presents these results, with domain-specific outcomes on the left and full benchmark results on the right. We report both the mean absolute error (MAE) (\pm mean absolute deviation) for the test models when predicting their accuracy and Spearman’s rank correlation across all 19 LMMs on the second LiveXiv version when comparing real accuracy and predicted accuracy. These results suggest that re-evaluating just 5 models is likely to be sufficient for accurately predicting the performance of the remaining models and the ranking of all models. Moreover, our method showed to generalize well to unseen domains as the physics’ ArXiv domains were not included on LiveXiv v1. In Figure 4 the re-evaluated models are InstructBLIP-7B, LLaVA-OneVision-Qwen2-7B, Idefics2-8B, Claude-Sonnet, and Qwen2-VL for VQA and InstructBLIP-7B, InternVL2-8B, LLaVA-1.6-34B, Idefics2-8B, and Claude-Sonnet for TQA.

In Appendix A.4, we present additional experiments to further validate the effectiveness of our method. Specifically, we (i) examine different numbers of re-evaluated models, (ii) test a situation with high distribution shift using a hypothetical version of LiveXiv consisting of ArXiv papers from 2010 (v0), (iii) validate our efficient evaluations method in three different hypothetical versions of LiveXiv, and test our approach on MM-LiveBench (Zhang et al., 2024b). The second point suggests that in real-world

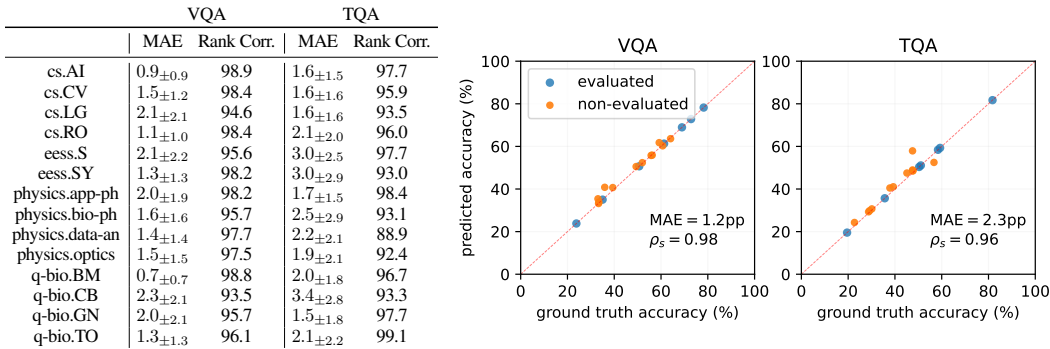


Figure 4: Performance prediction results of our efficient re-evaluation method on v2. The table on the left shows the mean absolute error (MAE) and Spearman rank correlation when comparing true and predicted accuracies across individual ArXiv domains, while the graph on the right presents the overall benchmark performance. The results demonstrate that re-evaluating only 5 out of 17 models is sufficient to accurately predict the performance of the remaining models, as well as maintain high rank correlation, validating the effectiveness of our approach.

Table 3: LiveXiv accuracy (%) on different categories of question and partitions averaged over all evaluated models.

	Data Analysis	Reasoning	Attribute	Localization	Reading	Arithmetic	Charts	Block Diagram	Qualitative
VQA	46.93	47.95	46.18	41.91	47.83	46.87	44.17	52.69	48.60
TQA	46.02	63.61	68.69	51.66	59.35	35.56	-	-	-

applications, we expect our efficient evaluation strategy to achieve lower MAE than those reported in Figure 4, given that test datasets will be larger and unaffected by data splitting.

4.3 ANALYSIS AND ABLATIONS

To analyze various aspects of LiveXiv we provide an extensive ablation study. We start by providing an analysis of the results from different models obtained w.r.t the language content partitions, then provide results for different models w.r.t the visual data partitions.

Language analysis - performance according to question type. To discover error slices of models for an analysis of mistakes they commonly make, we classify the questions present in the benchmark into one of the following categories: reasoning, data analysis, reading, localization, attribute, and arithmetic. To achieve this classification, we employ the Llama-3.1 (Meta, 2024) LLM and prompt the model with the question and the list of categories to choose for this question. The prompt is provided in the Appendix Figure 23. Table 3 summarizes the results for all the models. We see that the performance of these models on the arithmetic partition is the lowest on average as compared to other partitions highlighting room for potential improvement. We also provide the detailed results for all models on these partitions for VQA and TQA in Tables 9 and 10 of the Appendix.

Vision analysis - performance according to figure type. For a more fine-grained analysis of LMM performance on different types of visual data present in our benchmark, we first categorize the data through Meta-Prompting for CLIP, proposed by Mirza et al. (2024), in a zero-shot classification setup. Specifically, we classify the image content into three categories of figures: Block diagrams, Qualitative visual results, and Charts. We summarize the results in Table 3. Detailed results for each model’s performance can be found in Table 8 in the Appendix. The results reveal a significant variance in performance across figure types for nearly all models. In most cases, block diagrams are the most favorable category for models. However, InternLM-Xcomposer2-4KHD-7B (Dong et al., 2024b) stands out by achieving the highest accuracy on Qualitative figures. Overall, Charts emerge as the most challenging figure type on average, suggesting a lack of sufficient examples in the training data for this category. This kind of analysis can be further expanded to include more categories and discover error slices on which different models struggle so that potential targeted improvements can be designed for these models to mitigate the shortcomings.

Diversity & Difficulty The visual content of scientific papers (figures and tables) evolves over time, and we aim to ensure our questions remain diverse across dataset versions. To achieve this, we use an LLM (Llama-3.1-70B Meta (2024)) to classify questions into predefined categories, allowing us to monitor and maintain diversity. Table 18 confirms that LiveXiv maintains question diversity across versions. Additionally, we assess question difficulty by analyzing how many models answer each question correctly. Figure 9 shows that the difficulty distribution for both VQA and TQA tasks remains stable across dataset versions.

5 LIMITATIONS AND CONCLUSIONS

Limitations. LiveXiv relies on capable proprietary LMMs in order to be fully automatic, and with high quality. However, relying on proprietary LMMs is a limitation since we do not have full control over the models, they can change through time and might affect LiveXiv. Nevertheless, we commonly expect them to continuously improve leading to a positive impact on LiveXiv effectiveness.

Conclusions. We propose LiveXiv, an ever-evolving, fully automatic, multi-modal benchmark focused on scientific domains to tackle test set contamination issues and consequently allow a new (contamination-free) perspective on relative ranking of advanced LMMs. We utilize ArXiv, as the data source, carefully and extensively crafting a quality dataset to evaluate LMMs. To significantly reduce the computational and logistical overhead of maintaining the dataset throughout time and models, we propose an efficient evaluation method that can save more than 70% of the evaluated models on each dataset version. Our method can be extended to other archives such as BioRXiv to extend our dataset to new domains. For future work, we propose enhancing LMM evaluation by incorporating free-form questions to assess generative abilities and complex question types to evaluate reasoning capabilities.

6 ETHICS STATEMENT

This work introduces LiveXiv, a live multi-modal benchmark for evaluating LMMs using scientific ArXiv papers. By relying solely on publicly available ArXiv manuscripts with proper licenses, we ensure compliance with copyright and distribution policies. The automated generation of Visual Question Answering (VQA) and Table Question Answering (TQA) pairs enables scalable evaluation of LMMs without human involvement, minimizing the risk of human biases in data collection. However, we acknowledge the potential for unintentional biases within the models or dataset itself. Continuous evaluation and refinement are necessary to mitigate these biases and promote the responsible deployment of LMMs in wider applications.

REFERENCES

- Introducing the next generation of claude. <https://www.anthropic.com/news/claude-3-family>, 2024.
- Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*, 2024.
- Pravesh Agrawal, Szymon Antoniak, Emma Bou Hanna, Baptiste Bout, Devendra Chaplot, Jessica Chudnovsky, Diogo Costa, Baudouin De Monicault, Saurabh Garg, Theophile Gervet, et al. Pixtral 12b. *arXiv preprint arXiv:2410.07073*, 2024.
- Scale AI. Seal leaderboards. <https://scale.com/leaderboard>, 2024.
- Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel Lenc, Arthur Mensch, Katie Millican, Malcolm Reynolds, Roman Ring, Eliza Rutherford, Serkan Cabi, Tengda Han, Zhitao Gong, Sina Samangooei, Marianne Monteiro, Jacob Menick, Sebastian Borgeaud, Andrew Brock, Aida Nematzadeh, Sahand Sharifzadeh, Mikolaj Binkowski, Ricardo Barreira, Oriol Vinyals, Andrew Zisserman, and Karen Simonyan. Flamingo: a Visual Language Model for Few-Shot Learning. *arXiv:2204.14198*, 2022.
- Ralph Allan Bradley and Milton E Terry. Rank analysis of incomplete block designs: I. the method of paired comparisons. *Biometrika*, 39(3/4):324–345, 1952.
- Tom B. Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel M. Ziegler, Jeffrey Wu, Clemens Winter, Christopher Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language Models are Few-Shot Learners. *arXiv:2005.14165*, 2020.
- Li Cai, Kilchan Choi, Mark Hansen, and Lauren Harrell. Item response theory. *Annual Review of Statistics and Its Application*, 3:297–321, 2016.
- Jun Chen, Deyao Zhu¹ Xiaoqian Shen¹ Xiang Li, Zechun Liu² Pengchuan Zhang, Raghuraman Krishnamoorthi² Vikas Chandra² Yunyang Xiong, and Mohamed Elhoseiny. MiniGPT-v2: Large Language Model as a Unified Interface for Vision-Language Multi-task Learning. *arXiv preprint arXiv:2310.09478*, 2023a.
- Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language models? *arXiv preprint arXiv:2403.20330*, 2024.
- Yunxiao Chen, Chengcheng Li, Jing Ouyang, and Gongjun Xu. Statistical inference for noisy incomplete binary matrix. *Journal of Machine Learning Research*, 24(95):1–66, 2023b.
- Zhe Chen, Jiannan Wu, Wenhai Wang, Weijie Su, Guo Chen, Sen Xing, Muyan Zhong, Qinglong Zhang, Xizhou Zhu, Lewei Lu, Bin Li, Ping Luo, Tong Lu, Yu Qiao, and Jifeng Dai. Internvl: Scaling up vision foundation models and aligning for generic visual-linguistic tasks. *arXiv preprint arXiv:2312.14238*, 2023c.

- 594 Wei-Lin Chiang, Zhuohan Li, Zi Lin, Ying Sheng, Zhanghao Wu, Hao Zhang, Lianmin Zheng,
595 Siyuan Zhuang, Yonghao Zhuang, Joseph E. Gonzalez, Ion Stoica, and Eric P. Xing. Vicuna:
596 An Open-Source Chatbot Impressing GPT-4 with 90%* ChatGPT Quality, March 2023. URL
597 <https://lmsys.org/blog/2023-03-30-vicuna/>.
- 598
- 599 Wei-Lin Chiang, Lianmin Zheng, Ying Sheng, Anastasios Nikolas Angelopoulos, Tianle Li, Dacheng Li,
600 Hao Zhang, Banghua Zhu, Michael Jordan, Joseph E Gonzalez, et al. Chatbot arena: An open platform
601 for evaluating llms by human preference. *arXiv preprint arXiv:2403.04132*, 2024.
- 602
- 603 Douglas H Clements, Julie H Sarama, and Xiufeng H Liu. Development of a measure of early mathematics
604 achievement using the rasch model: The research-based early maths assessment. *Educational
605 Psychology*, 28(4):457–482, 2008.
- 606
- 607 Karl Cobbe, Vineet Kosaraju, Mohammad Bavarian, Mark Chen, Heewoo Jun, Lukasz Kaiser, Matthias
608 Plappert, Jerry Tworek, Jacob Hilton, Reiichiro Nakano, et al. Training verifiers to solve math word
609 problems. *arXiv preprint arXiv:2110.14168*, 2021.
- 610
- 611 Wenliang Dai, Junnan Li, Dongxu Li, Anthony Tiong, Junqi Zhao, Weisheng Wang, Boyang Li, Pascale
612 Fung, and Steven Hoi. InstructBLIP: Towards General-purpose Vision-Language Models with
613 Instruction Tuning. In *NeurIPS*, 2023.
- 614
- 615 Matt Deitke, Christopher Clark, Sangho Lee, Rohun Tripathi, Yue Yang, Jae Sung Park, Mohammadreza
616 Salehi, Niklas Muennighoff, Kyle Lo, Luca Soldaini, et al. Molmo and pixmo: Open weights and open
617 data for state-of-the-art multimodal models. *arXiv preprint arXiv:2409.17146*, 2024.
- 618
- 619 Jia Deng, Wei Dong, Richard Socher, Li-Jia Li, Kai Li, and Li Fei-Fei. ImageNet: A large-scale
620 hierarchical image database. In *Proc. CVPR*, 2009.
- 621
- 622 Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Xilin Wei, Songyang
623 Zhang, Haodong Duan, Maosong Cao, et al. Internlm-xcomposer2: Mastering free-form text-image com-
624 position and comprehension in vision-language large model. *arXiv preprint arXiv:2401.16420*, 2024a.
- 625
- 626 Xiaoyi Dong, Pan Zhang, Yuhang Zang, Yuhang Cao, Bin Wang, Linke Ouyang, Songyang Zhang,
627 Haodong Duan, Wenwei Zhang, Yining Li, et al. Internlm-xcomposer2-4khd: A pioneering large vision-
628 language model handling resolutions from 336 pixels to 4k hd. *arXiv preprint arXiv:2404.06512*, 2024b.
- 629
- 630 Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman,
631 Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint
632 arXiv:2407.21783*, 2024.
- 633
- 634 Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Jinrui Yang, Xiawu
635 Zheng, Ke Li, Xing Sun, Yunsheng Wu, and Rongrong Ji. Mme: A comprehensive evaluation
636 benchmark for multimodal large language models. *arXiv preprint arXiv:2306.13394*, 2023.
- 637
- 638 Rasch Georg. Probabilistic models for some intelligence and attainment tests. *Copenhagen: Institute
639 of Education Research*, 1960.
- 640
- 641 Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song,
642 and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset. *arXiv preprint
643 arXiv:2103.03874*, 2021.
- 644
- 645 Irene Huang, Wei Lin, M Jehanzeb Mirza, Jacob A Hansen, Sivan Doherty, Victor Ion Butoi, Roi Herzig,
646 Assaf Arbelle, Hilde Kuhene, Trevor Darrel, et al. Conme: Rethinking evaluation of compositional
647 reasoning for modern vlms. *arXiv preprint arXiv:2406.08164*, 2024.
- 648
- 649 Naman Jain, King Han, Alex Gu, Wen-Ding Li, Fanjia Yan, Tianjun Zhang, Sida Wang, Armando
650 Solar-Lezama, Koushik Sen, and Ion Stoica. Livecodebench: Holistic and contamination free evaluation
651 of large language models for code. *arXiv preprint arXiv:2403.07974*, 2024.
- 652
- 653 Dongfu Jiang, Xuan He, Huaye Zeng, Cong Wei, Max Ku, Qian Liu, and Wenhui Chen. Mantis:
654 Interleaved multi-image instruction tuning. *arXiv preprint arXiv:2405.01483*, 2024.

- 648 Aniruddha Kembhavi, Mike Salvato, Eric Kolve, Minjoon Seo, Hannaneh Hajishirzi, and Ali Farhadi. A dia-
649 gram is worth a dozen images. In *Computer Vision—ECCV 2016: 14th European Conference, Amsterdam,*
650 *The Netherlands, October 11–14, 2016, Proceedings, Part IV 14*, pp. 235–251. Springer, 2016.
- 651 Alex Krizhevsky and Geoffrey Hinton. Learning Multiple Layers of Features from Tiny Images. Technical
652 report, Department of Computer Science, University of Toronto, 2009.
- 653 Hugo Laurençon, Andrés Marafioti, Victor Sanh, and Léo Tronchon. Building and better understanding
654 vision-language models: insights and future directions. *arXiv preprint arXiv:2408.12637*, 2024a.
- 655 Hugo Laurençon, Léo Tronchon, Matthieu Cord, and Victor Sanh. What matters when building
656 vision-language models? *arXiv preprint arXiv:2405.02246*, 2024b.
- 657 Bo Li, Kaichen Zhang, Hao Zhang, Dong Guo, Renrui Zhang, Feng Li, Yuanhan Zhang, Ziwei Liu, and
658 Chunyuan Li. Llava-next: Stronger llms supercharge multimodal capabilities in the wild, 2024a.
- 659 Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei
660 Liu, and Chunyuan Li. Llava-onevision: Easy visual task transfer. *arXiv preprint arXiv:2408.03326*,
661 2024b.
- 662 Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Yanwei Li, Ziwei
663 Liu, and Chunyuan Li. LLaVA-OneVision: Easy Visual Task Transfer. *arXiv preprint*
664 *arXiv:2408.03326*, 2024c.
- 665 Bohao Li, Yuying Ge, Yixiao Ge, Guangzhi Wang, Rui Wang, Ruimao Zhang, and Ying Shan. Seed-bench:
666 Benchmarking multimodal large language models. In *Proceedings of the IEEE/CVF Conference on*
667 *Computer Vision and Pattern Recognition*, pp. 13299–13308, 2024d.
- 668 Junnan Li, Dongxu Li, Silvio Savarese, and Steven Hoi. BLIP-2: Bootstrapping Language-Image Pre-
669 training with Frozen Image Encoders and Large Language Models. *arXiv preprint arXiv:2301.12597*,
670 2023.
- 671 Percy Liang, Rishi Bommasani, Tony Lee, Dimitris Tsipras, Dilara Soylu, Michihiro Yasunaga, Yian
672 Zhang, Deepak Narayanan, Yuhuai Wu, Ananya Kumar, et al. Holistic evaluation of language models.
673 *arXiv preprint arXiv:2211.09110*, 2022.
- 674 Wei Lin, Muhammad Jehanzeb Mirza, Sivan Doveh, Rogerio Feris, Raja Giryes, Sepp Hochreiter, and
675 Leonid Karlinsky. Comparison visual instruction tuning. *arXiv preprint arXiv:2406.09240*, 2024.
- 676 Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved Baselines with Visual Instruction
677 Tuning. *arXiv:2310.03744*, 2023a.
- 678 Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. LLaVA-Next (LLaVA 1.6). *arXiv:2310.03744*,
679 2023b. URL <https://llava-vl.github.io/blog/2024-01-30-llava-next/>.
- 680 Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual Instruction Tuning. In *NeurIPS*, 2023c.
- 681 Yuan Liu, Haodong Duan, Yuanhan Zhang, Bo Li, Songyang Zhang, Wangbo Zhao, Yike Yuan, Jiaqi
682 Wang, Conghui He, Ziwei Liu, et al. Mmbench: Is your multi-modal model an all-around player?
683 *arXiv preprint arXiv:2307.06281*, 2023d.
- 684 FM Lord, MR Novick, and Allan Birnbaum. Statistical theories of mental test scores. 1968.
- 685 Yujie Lu, Dongfu Jiang, Wenhua Chen, William Yang Wang, Yejin Choi, and Bill Yuchen Lin.
686 Wildvision: Evaluating vision-language models in the wild with human preferences. *arXiv preprint*
687 *arXiv:2406.11069*, 2024.
- 688 Felipe Maia Polo, Lucas Weber, Leshem Choshen, Yuekai Sun, Gongjun Xu, and Mikhail Yurochkin.
689 tinybenchmarks: evaluating llms with fewer examples. *arXiv preprint arXiv:2402.14992*, 2024a.
- 690 Felipe Maia Polo, Ronald Xu, Lucas Weber, Mírian Silva, Onkar Bhardwaj, Leshem Choshen, Allysson
691 Flavio Melo de Oliveira, Yuekai Sun, and Mikhail Yurochkin. Efficient multi-prompt evaluation of
692 llms. *arXiv preprint arXiv:2405.17202*, 2024b.

- 702 Ahmed Masry, Do Long, Jia Qing Tan, Shafiq Joty, and Enamul Hoque. ChartQA: A bench-
703 mark for question answering about charts with visual and logical reasoning. In *Findings of the*
704 *Association for Computational Linguistics: ACL 2022*, pp. 2263–2279, Dublin, Ireland, May
705 2022. Association for Computational Linguistics. doi: 10.18653/v1/2022.findings-acl.177. URL
706 <https://aclanthology.org/2022.findings-acl.177>.
707
- 708 Minesh Mathew, Dimosthenis Karatzas, and CV Jawahar. Docvqa: A dataset for vqa on document images.
709 In *Proceedings of the IEEE/CVF winter conference on applications of computer vision*, pp. 2200–2209,
710 2021.
- 711 Meta. Introducing meta llama 3: The most capable openly available llm to date. <https://ai.meta.com/blog/meta-llama-3>, 2024.
712
- 713 M. Jehanzeb Mirza, Leonid Karlinsky, Wei Lin, Sivan Doherty, , Jakub Micorek, Mateusz Kozinski, Hilde
714 Kuhene, and Horst Possegger. Meta-Prompting for Automating Zero-shot Visual Recognition with
715 LLMs. In *Proceedings of the European Conference on Computer Vision (ECCV)*, 2024.
716
- 717 OpenAI. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
718
- 719 Piotr Padlewski, Max Bain, Matthew Henderson, Zhongkai Zhu, Nishant Relan, Hai Pham, Donovan
720 Ong, Kaloyan Aleksiev, Aitor Ormazabal, Samuel Phua, et al. Vibe-eval: A hard evaluation suite for
721 measuring progress of multimodal language models. *arXiv preprint arXiv:2405.02287*, 2024.
722
- 723 Yotam Perlitz, Elron Bandel, Ariel Gera, Ofir Arviv, Liat Ein-Dor, Eyal Shnarch, Noam Slonim, Michal
724 Shmueli-Scheuer, and Leshem Choshen. Efficient benchmarking (of language models). *arXiv preprint*
725 *arXiv:2308.11696*, 2023.
- 726 Ameya Prabhu, Vishaal Udandarao, Philip Torr, Matthias Bethge, Adel Bibi, and Samuel Albanie. Lifelong
727 benchmarks: Efficient model evaluation in an era of rapid progress. *arXiv preprint arXiv:2402.19472*,
728 2024.
729
- 730 Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish
731 Sastry, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning Transferable Visual Models from
732 Natural Language Supervision. In *Proc. ICML*, 2021a.
- 733 Alec Radford, Jong Wook Kim, Chris Hallacy, Aditya Ramesh, Gabriel Goh, Sandhini Agarwal, Girish Sas-
734 try, Amanda Askell, Pamela Mishkin, Jack Clark, et al. Learning transferable visual models from natural
735 language supervision. In *International conference on machine learning*, pp. 8748–8763. PMLR, 2021b.
736
- 737 Colin Raffel, Noam Shazeer, Adam Roberts, Katherine Lee, Sharan Narang, Michael Matena, Yanqi
738 Zhou, Wei Li, and Peter J. Liu. Exploring the Limits of Transfer Learning with a Unified Text-to-Text
739 Transformer. *arXiv:1910.10683*, 2019.
- 740 Manley Roberts, Himanshu Thakur, Christine Herlihy, Colin White, and Samuel Dooley. To the cutoff...
741 and beyond? a longitudinal perspective on llm data contamination. In *The Twelfth International*
742 *Conference on Learning Representations*, 2023.
743
- 744 Saurabh Srivastava, Anto PV, Shashank Menon, Ajay Sukumar, Alan Philipose, Stevin Prince, Sooraj
745 Thomas, et al. Functional benchmarks for robust evaluation of reasoning performance, and the reasoning
746 gap. *arXiv preprint arXiv:2402.19450*, 2024.
747
- 748 Alain Starke, Martijn Willemsen, and Chris Snijders. Effective user interface designs to increase
749 energy-efficient behavior in a rasch-based energy recommender system. In *Proceedings of the eleventh*
750 *ACM conference on recommender systems*, pp. 65–73, 2017.
- 751 Deep Search Team. Deep Search Toolkit, 6 2022. URL [https://github.com/DS4SD/](https://github.com/DS4SD/deepsearch-toolkit)
752 [deepsearch-toolkit](https://github.com/DS4SD/deepsearch-toolkit).
753
- 754 Hugo Touvron, Thibaut Lavril, Gautier Izacard, Xavier Martinet, Marie-Anne Lachaux, Timothée
755 Lacroix, Baptiste Rozière, Naman Goyal, Eric Hambro, Faisal Azhar, et al. Llama: Open and Efficient
Foundation Language Models. *arXiv:2302.13971*, 2023a.

- 756 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Nikolay
757 Bashlykov, Soumya Batra, Prajjwal Bhargava, Shrutu Bhosale, et al. Llama 2: Open Foundation and
758 Fine-Tuned Chat Models. *arXiv preprint arXiv:2307.09288*, 2023b.
- 759
760 Wim J Van der Linden. *Handbook of item response theory: Volume 3: Applications*. CRC press, 2017.
- 761
762 Wim J Van der Linden. *Handbook of item response theory: Three volume set*. CRC Press, 2018.
- 763 Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin
764 Wang, Wenbin Ge, et al. Qwen2-vl: Enhancing vision-language model’s perception of the world at
765 any resolution. *arXiv preprint arXiv:2409.12191*, 2024.
- 766 Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Fei Xia, Ed Chi, Quoc V Le, Denny Zhou,
767 et al. Chain-of-thought prompting elicits reasoning in large language models. *Advances in neural
768 information processing systems*, 35:24824–24837, 2022.
- 769
770 Tianwen Wei, Liang Zhao, Lichang Zhang, Bo Zhu, Lijie Wang, Haihua Yang, Biye Li, Cheng Cheng,
771 Weiwei Lü, Rui Hu, et al. Skywork: A more open bilingual foundation model. *arXiv preprint
772 arXiv:2310.19341*, 2023.
- 773 Colin White, Samuel Dooley, Manley Roberts, Arka Pal, Ben Feuer, Siddhartha Jain, Ravid Shwartz-Ziv,
774 Neel Jain, Khalid Saifullah, Siddartha Naidu, Chinmay Hegde, Yann LeCun, Tom Goldstein, Willie
775 Neiswanger, and Micah Goldblum. Livebench: A challenging, contamination-free llm benchmark.
776 2024. URL [arXivpreprintarXiv:2406.19314](https://arxiv.org/abs/2406.19314).
- 777
778 Xiang Yue, Yuansheng Ni, Kai Zhang, Tianyu Zheng, Ruoqi Liu, Ge Zhang, Samuel Stevens, Dongfu
779 Jiang, Weiming Ren, Yuxuan Sun, et al. Mmmu: A massive multi-discipline multimodal understanding
780 and reasoning benchmark for expert agi. In *Proceedings of the IEEE/CVF Conference on Computer
781 Vision and Pattern Recognition*, pp. 9556–9567, 2024.
- 782 Hugh Zhang, Jeff Da, Dean Lee, Vaughn Robinson, Catherine Wu, Will Song, Tiffany Zhao, Pranav Raja,
783 Dylan Slack, Qin Lyu, et al. A careful examination of large language model performance on grade
784 school arithmetic. *arXiv preprint arXiv:2405.00332*, 2024a.
- 785
786 Kaichen Zhang, Bo Li, Peiyuan Zhang, Fanyi Pu, Joshua Adrian Cahyono, Kairui Hu, Shuai Liu, Yuanhan
787 Zhang, Jingkang Yang, Chunyuan Li, et al. Lmms-eval: Reality check on the evaluation of large
788 multimodal models. *arXiv preprint arXiv:2407.12772*, 2024b.
- 789
790 Deyao Zhu, Jun Chen, Xiaoqian Shen, Xiang Li, and Mohamed Elhoseiny. MiniGPT-4: Enhancing Vision-
791 Language Understanding with Advanced Large Language Models. *arXiv preprint arXiv:2304.10592*,
792 2023.
- 793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809

A APPENDIX

A.1 ANALYSIS & ABLATIONS

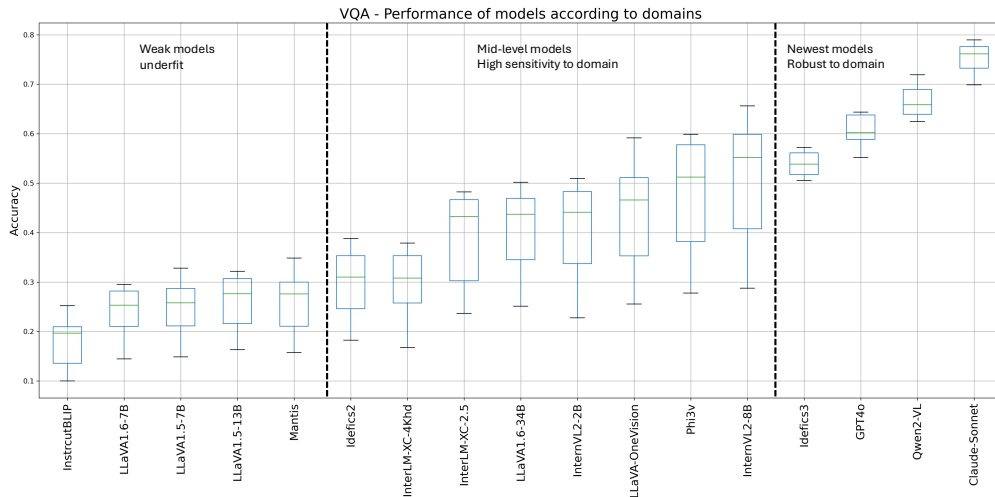


Figure 5: **Domain sensitivity according to domains.** We visualize the performance of each model across all domains. Clear trends revealed where old models or models with a small LLM are "under-fitting," and perform worse across all domains. In the middle we have the mid-level models that are sensitive to the domain, indicating their lack of generalization across domain without any additional training. Lastly the newest models (open-source and proprietary) are robust to domain shifts and present a stable performance across the domains.

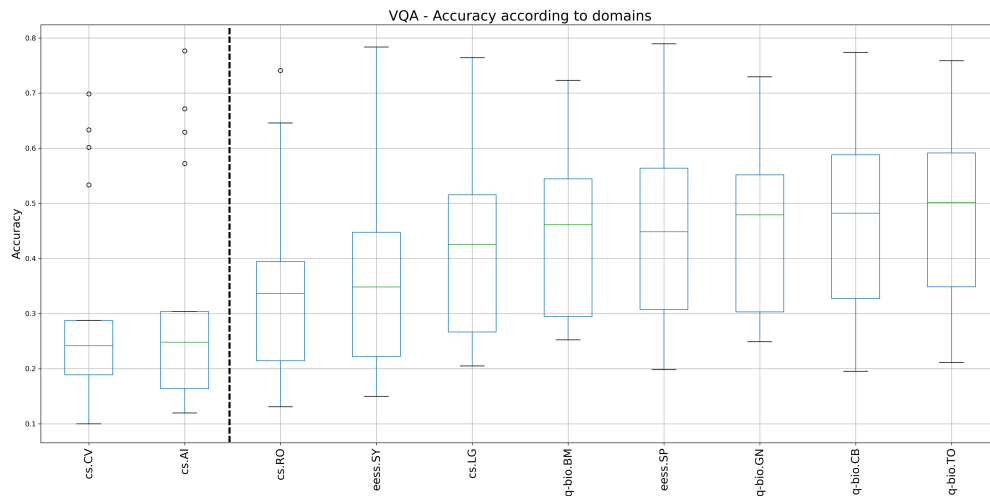


Figure 6: **LMMs performance based on domain.** To complement our analysis from Figure 5 we visualize the statistical properties of each domain. One clear trend is that across all models, the performance on cs.CV and cs.AI is the most concentrated, hinting lower variance between models.

864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917

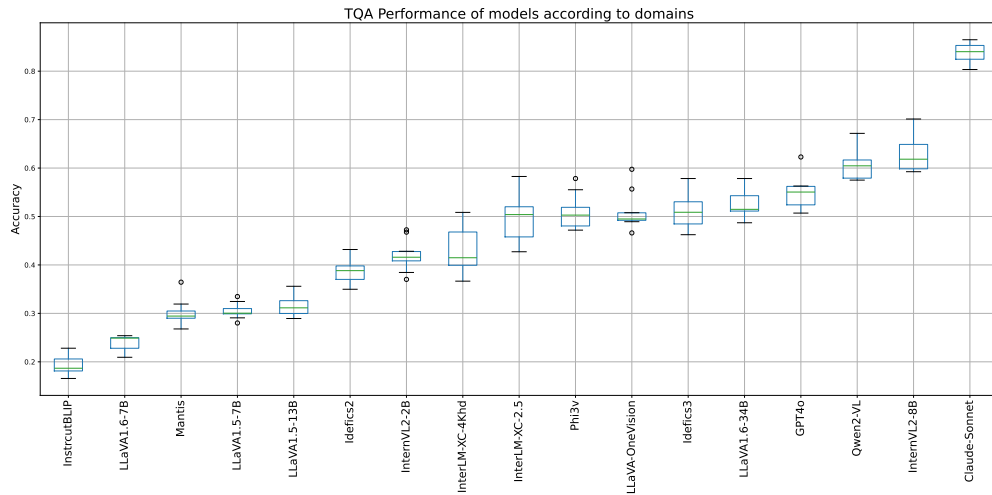


Figure 7: **Domain sensitivity according to domains.** As opposed to the high variance some models demonstrated in Figure 5, in TQA the tasks and the visual content are more limited thus shrunken the performance variance greatly.

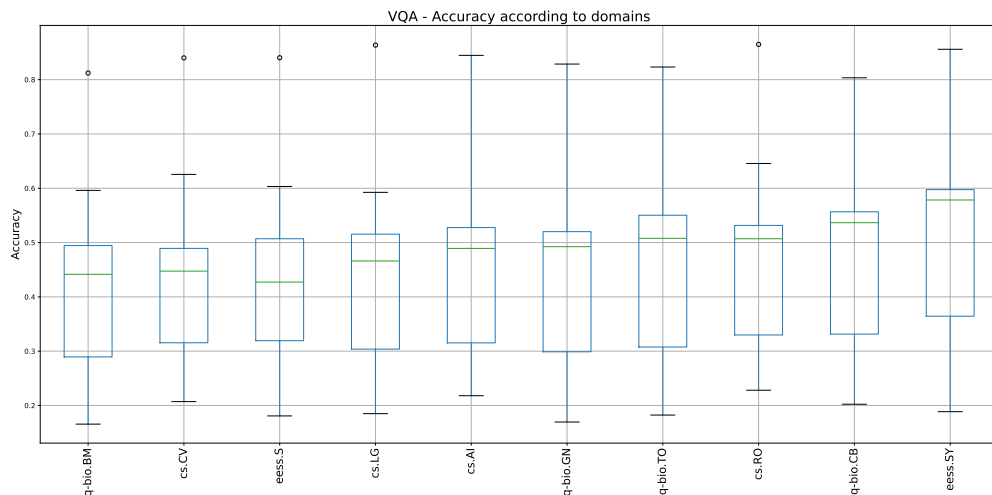


Figure 8: **LMMs performance based on domain.** The domains are very similar in their statistical properties showing high variance in performance. This is probably due to wide range of models that differ significantly in their performance.

918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971

Table 4: **Average results for relatively close benchmarks (DocVQA, ChartQA and AI2D).** We can see that Claude, GPT4o, Qwen2-VL and InternVL2 are the top models. The overall ordering is align with our benchmark.

	ChartQA	DocVQA	AI2D
InstructBLIP-7B	10.9	74	40.6
LLaVA-1.6-Mistral-7B	51.8	72.2	69
Mantis	42.9	-	60.4
LLaVA-1.5-7B	17.8	74.4	55.5
LLaVA-1.5-13B	18.2	77.5	70
Idefics2	-	74	72.3
InternVL2-2B	76.2	86.9	74.1
IXC2-4KHD-7B	81	90	81
IXC2.5-7B	82.2	90.9	81.6
LLaVA-OneVision-7B	80	83.7	81.4
Phi3v	72	84.9	77.8
Idefics3	-	87.7	76.5
LLaVA-1.6-34B	67.6	84	78.9
GPT-4o	85.7	92.8	94.2
Qwen2-VL	83	94.5	83
InternVL2-8B	83.3	91.6	83.8
Claude-Sonnet	90.8	95.2	94.7

Table 5: **Average ranking on static benchmarks (ChartQA, DocVQA and AI2D) and LiveXiv.** We can see from the ranking difference column that some models have a significant drop (negative difference) in the relative ranking in LiveXiv compared to the static datasets. The gap is highlighting a potential risk of test data contamination when using static (frozen in time) benchmark datasets.

Model	Static datasets	LiveXiv	Difference (static - livexiv)
InstructBLIP-7B	15.33	17.00	-1.67
LLaVA-1.6-Mistral-7B	13.67	16.00	-2.33
Mantis	14.50	14.50	0.00
LLaVA-1.5-7B	14.33	14.50	-0.17
LLaVA-1.5-13B	12.67	13.00	-0.33
Idefics2	13.00	12.00	1.00
InternVL2-2B	9.00	10.00	-1.00
IXC2-4KHD-7B	6.33	10.50	-4.17
IXC2.5-7B	5.00	9.50	-4.50
LLaVA-OneVision-7B	8.00	6.50	1.50
Phi3v	9.00	6.00	3.00
Idefics3	8.50	6.50	2.00
LLaVA-1.6-34B	9.33	6.50	2.83
GPT-4o	2.33	4.00	-1.67
Qwen2-VL	3.33	3.00	0.33
InternVL2-8B	3.33	2.00	1.33
Claude-Sonnet	1.00	1.00	0.00

A.1.1 PERFORMANCE CHANGE COMPARED TO MANUALLY CURATED SUBSET

Table 6: VQA Performance change between LiveXiv and a manually curated subset (500 examples).

Model	LiveXiv (%)	Manual (%)	Performance Change	LiveXiv Rank	Manual Rank	Change
InstructBLIP-7B	23.216	21.346	-1.87	17	17	0
InternLM-Xcomposer2.5-7B	47.839	50.769	2.93	10	9	1
InternVL2-8B	61.558	66.154	4.596	3	3	0
LLaVA-1.6-Mistral-7B	29.163	26.346	-2.816	16	16	0
LLaVA-OneVision-Qwen2-7B	52.864	56.154	3.29	7	6	1
LLaVA-1.5-13B	31.859	30.385	-1.475	14	13	1
LLaVA-1.5-7B	29.983	28.654	-1.329	15	14	1
LLaVA-1.6-34B	49.196	53.269	4.073	9	7	2
Mantis-LLama3-8B	32.094	28.654	-3.44	13	14	-1
Phi3v	58.141	58.654	0.513	5	5	0
InternLM-Xcomposer2-4KHD-7B	36.801	33.654	-3.147	12	12	0
Idefics2-8B	36.851	36.731	-0.12	11	11	0
InternVL2-2B	49.548	48.654	-0.894	8	10	-2
Claude-Sonnet	75.942	79.615	3.673	1	1	0
Qwen2-VL	66.248	71.346	5.098	2	2	0
GPT-4o	60.303	60.577	0.274	4	4	0
Idefics3	52.881	52.692	-0.189	6	8	-2
Average (absolute) change			2.336			

Table 7: TQA Performance change between LiveXiv and a manually curated subset (500 examples).

Model	LiveXiv (%)	Manual (%)	Performance Change	LiveXiv Rank	Manual Rank	Change
InstructBLIP-7B	19.1	18.5	-0.6	17	17	0
InternLM-Xcomposer2.5-7B	49.1	45.9	-3.2	9	9	0
InternVL2-8B	62.1	65.3	3.2	2	2	0
LLaVA-1.6-Mistral-7B	23.5	23.2	-0.3	16	16	0
LLaVA-OneVision-Qwen2-7B	50.2	51.6	1.4	7	8	-1
LLaVA-1.5-13B	30.9	31.2	0.3	13	13	0
LLaVA-1.5-7B	30.0	29.6	-0.3	14	14	0
LLaVA-1.6-34B	51.8	52.2	0.4	5	7	-2
Mantis-LLama3-8B	29.3	28.0	-1.3	15	15	0
Phi3v	50.2	54.1	4.0	7	6	1
InternLM-Xcomposer2-4KHD-7B	42.1	41.7	-0.4	10	11	-1
Idefics2-8B	38.2	42.0	3.8	12	10	-2
InternVL2-2B	41.5	39.5	-2.0	11	12	-1
Claude-Sonnet	83.5	89.2	5.6	1	1	0
Qwen2-VL	60.2	58.3	-1.9	3	3	0
GPT-4o	54.5	55.7	1.3	4	5	-1
Idefics3	50.6	56.4	5.7	6	4	2
Average (absolute) change			2.105			

A.1.2 FIGURE TYPE

We provide all the details for VQA performance according to figure type content in Table 8. We divide the performance to the following figure types: "Chart", "Block Diagram" and "Qualitative".

A.1.3 QUESTION CATEGORY

In Tables 9 and 10 we provide detailed results for VQA and TQA performance according to the category of the questions as classified by an LLM. We divide the performance to the following categories: "Data Analysis", "Attribute", "Reasoning", "Reading", "Localization" and "Arithmetic"

A.1.4 QUESTIONS' DIFFICULTY

We provide additional analyses regarding the diverse difficulties of LiveXiv's generated questions. Figure 9 demonstrates that for all LiveXiv tasks and for both the first and second versions, a wide range of difficulties is present, where most of the questions concentrate in the middle, suggesting our dataset is indeed challenging.

1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079

Table 8: Performance of LMMs over different figure types from the VQA set (the amount of samples for each figure type is in brackets).

Model	Chart (4354)	block_diagram (2110)	Qualitative (864)
InstructBLIP-7B	22.9	22.8	22.5
InternLM-Xcomposer2.5-7B	46.7	53.5	41.7
InternVL2-8B	59.1	68.4	63.8
LLaVA-1.6-Mistral-7B	27.3	33.6	33.4
LLaVA-OneVision-Qwen2-7B	48.7	62.8	57.9
LLaVA-1.5-13B	29.3	35.4	40.2
LLaVA-1.5-7B	28.1	33.1	36.0
LLaVA-1.6-34B	44.6	60.0	52.7
Mantis-LLama3-8B	29.3	36.2	36.1
Phi3v	56.1	65.5	55.2
InternLM-Xcomposer2-4KHD-7B	32.9	43.7	47.1
Idefics2-8B	34.3	43.0	41.1
InternVL2-2B	47.2	54.9	50.0
Claude-Sonnet	73.7	81.3	69.1
Qwen2-VL	63.1	73.9	66.0
GPT-4o	56.5	68.6	59.5
idefics3	51.1	59.0	54.1

Table 9: VQA Performance by Question Categories (the amount of samples for each category is in brackets).

Model	Data Analysis (2291)	Reasoning (872)	Attribute (903)	Localization (1596)	Reading (1470)	Arithmetic (154)
InstrcutBLIP	21.16	29.29	22.77	31.25	23.87	23.01
InterLM-XC-2.5	47.52	43.43	48.51	31.25	50.46	47.28
InternVL2-8B	61.74	63.64	65.35	56.25	62.54	62.41
LLaVA1.6-7B	28.91	31.31	30.69	12.50	30.00	30.43
LLaVA-OneVision	52.57	54.55	60.40	56.25	56.76	52.85
LLaVA1.5-13B	32.92	25.25	25.74	43.75	31.85	32.58
LLaVA1.5-7B	30.56	28.28	29.70	25.00	29.71	30.89
LLaVA1.6-34B	50.87	43.43	45.54	37.50	49.60	50.00
Mantis	32.50	33.33	30.69	43.75	31.97	31.80
Phi3v	58.05	63.64	59.41	43.75	58.15	59.07
InterLM-XC-4Khd	37.51	43.43	39.60	18.75	38.67	37.09
Idefics2	37.79	39.39	35.64	31.25	39.54	36.34
InternVL2-2B	50.26	46.46	44.55	43.75	51.45	48.62
Claude-Sonnet	74.78	78.79	67.33	81.25	75.49	75.64
Qwen2-VL	66.93	66.67	68.32	43.75	68.73	65.01
GPT4o	61.41	60.61	59.41	62.50	59.83	59.76
Idefics3	52.34	63.64	51.49	50.00	54.51	54.00

Table 10: TQA Performance by Question Categories (the amount of samples for each category is in brackets).

Model	Data Analysis (2582)	Reasoning (123)	Attribute (121)	Localization (23)	Reading (2127)	Arithmetic (3934)
InstructBLIP-7B	24.7	27.6	34.7	43.5	20.4	13.6
InternLM-Xcomposer2.5-7B	54.9	75.6	79.3	60.9	74.6	29.7
InternVL2-8B	58.6	73.2	78.5	65.2	79.8	54.1
LLaVA-1.6-Mistral-7B	30.4	39.0	52.1	30.4	32.0	13.0
LLaVA-OneVision-Qwen2-7B	47.5	72.4	80.2	60.9	69.1	40.3
LLaVA-1.5-13B	31.6	49.6	47.9	30.4	32.4	28.5
LLaVA-1.5-7B	30.8	39.0	42.1	43.5	31.6	27.9
LLaVA-1.6-34B	46.4	69.1	76.9	47.8	66.8	46.1
Mantis-LLama3-8B	28.7	39.0	46.3	21.7	32.4	27.3
Phi3v	52.2	76.4	77.7	60.9	72.4	35.2
InternLM-Xcomposer2-4KHD-7B	45.4	69.1	77.7	60.9	66.2	25.0
Idefics2-8B	35.0	57.7	57.9	43.5	51.1	32.4
InternVL2-2B	36.9	57.7	70.2	30.4	62.2	32.1
Claude-Sonnet	85.1	90.2	91.7	87.0	91.0	78.1
Qwen2-VL	64.6	86.2	90.1	65.2	82.0	44.0
GPT-4o	57.5	79.7	86.8	69.6	73.0	40.6
Idefics3	52.0	79.7	77.7	56.5	72.0	36.6

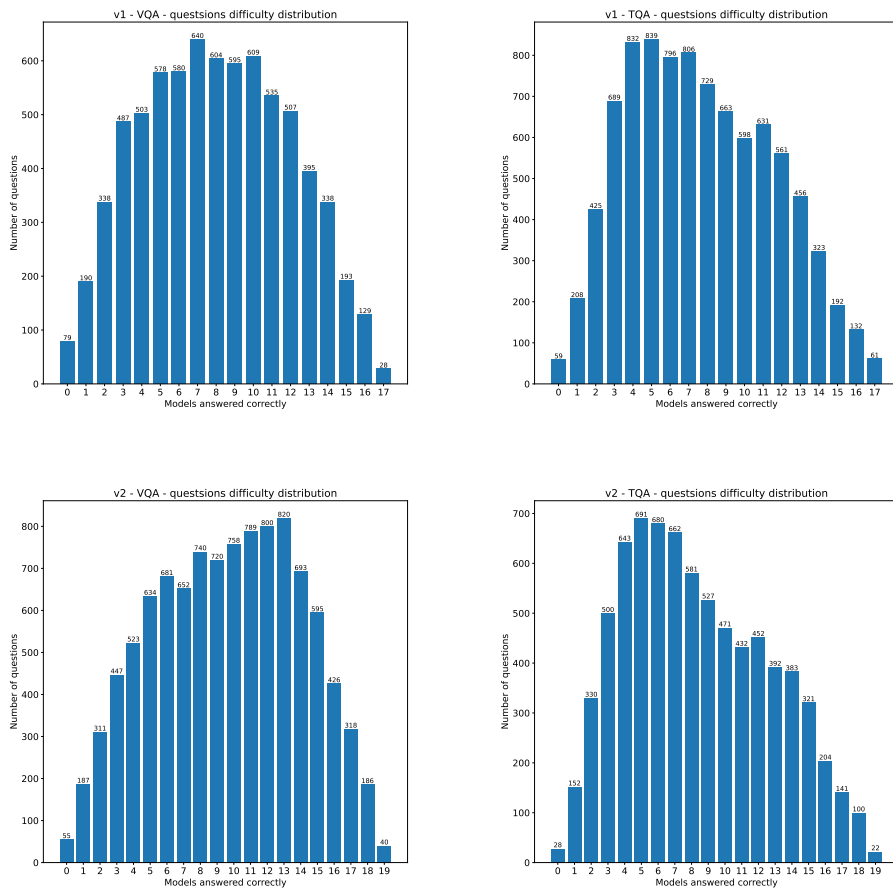


Figure 9: **LiveXiv questions' difficulty diversity.** LiveXiv is composed of questions at varying levels of difficulty. Each row shows a version of the dataset on both of its task (VQA and TQA). LiveXiv demonstrates questions in a wide range of questions' difficulties, from questions that no model was able to answer correctly up to questions that all models were able to easily answer. The center mass consternates in the middle, hinting the dataset is indeed challenging and the fact that the difficulty distribution remains the same for both the first version and second version suggests the stability of our diverse and challenging dataset.

A.2 DETAILED EXAMPLES FOR VQA AND TQA GENERATION

Here we present full and detailed examples of our flow from ArXiv papers until constructing verified multi-choice Q&A. Figure 10 shows the full example for generating questions from figures (VQA). Figure 11 shows the full examples for TQA.

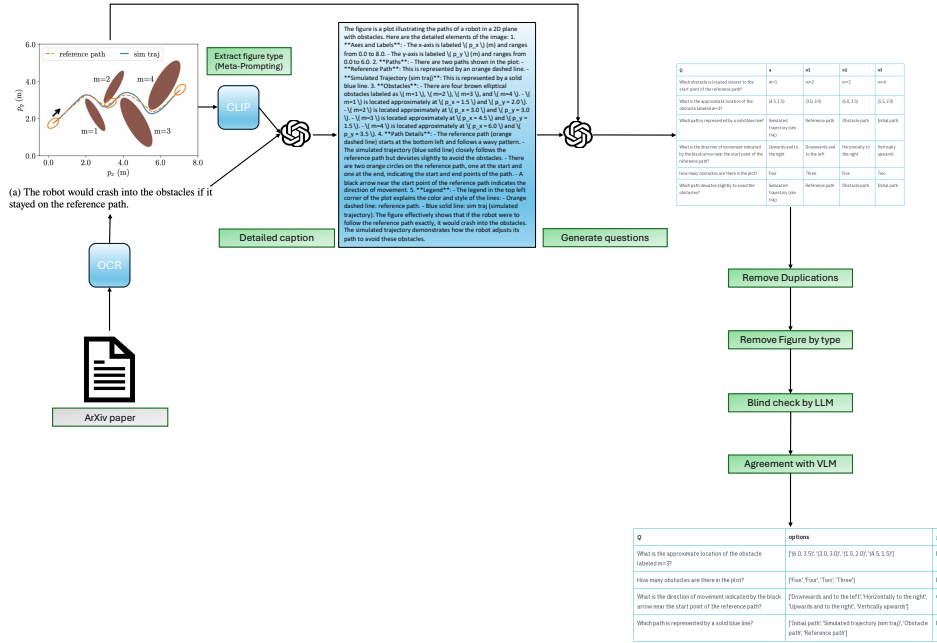


Figure 10: A detailed example for VQA questions generation.

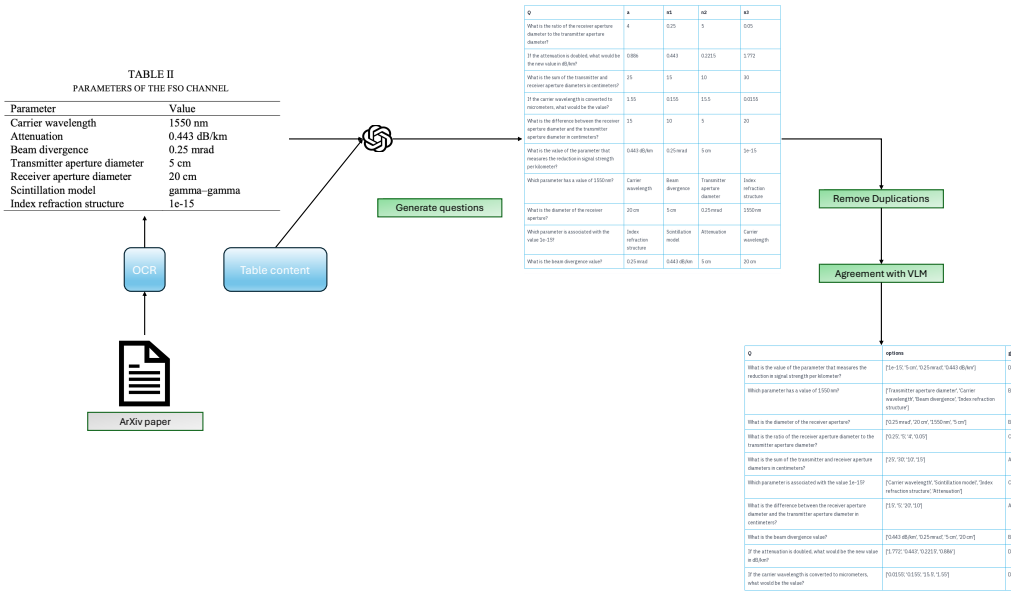


Figure 11: A detailed example for TQA question generation.

Table 11: Version 0 - VQA and TQA average accuracy across ArXiv taxonomy (the number of samples is in brackets).

VQA Accuracy	cs.AI (188)	cs.CV (200)	cs.LG (196)	cs.RO (321)	eess.SP (269)	eess.SY (286)	q-bio.BM (154)	q-bio.CB (206)	q-bio.GN (80)	q-bio.TO (167)	Mean (2067)
InstrcutBLIP	0.29	0.24	0.20	0.22	0.24	0.25	0.27	0.22	0.19	0.25	0.24
InterLM-XC-2.5	0.42	0.42	0.49	0.48	0.56	0.48	0.51	0.49	0.57	0.46	0.49
InternVL2-2B	0.61	0.66	0.64	0.65	0.69	0.68	0.58	0.55	0.59	0.57	0.62
InternVL2-8B	0.30	0.28	0.30	0.34	0.32	0.36	0.26	0.25	0.22	0.30	0.29
LLaVA1.6-7B	0.54	0.56	0.52	0.62	0.55	0.60	0.50	0.50	0.60	0.43	0.54
LLaVA-OneVision	0.32	0.36	0.33	0.38	0.35	0.35	0.31	0.27	0.32	0.22	0.32
LLaVA1.5-13B	0.29	0.35	0.31	0.35	0.33	0.33	0.33	0.28	0.29	0.25	0.31
LLaVA1.5-7B	0.44	0.50	0.63	0.52	0.52	0.53	0.46	0.40	0.44	0.48	0.49
LLaVA1.6-34B	0.30	0.39	0.33	0.36	0.29	0.36	0.33	0.32	0.32	0.31	0.33
Mantis	0.55	0.60	0.65	0.57	0.67	0.61	0.54	0.58	0.57	0.42	0.58
Phi3v	0.42	0.42	0.41	0.41	0.29	0.35	0.39	0.36	0.39	0.41	0.37
InterLM-XC-4Khd	0.39	0.44	0.42	0.41	0.43	0.45	0.38	0.34	0.32	0.40	0.40
Idefics2	0.47	0.48	0.48	0.52	0.50	0.49	0.49	0.43	0.49	0.48	0.48
Claude-Sonnet	0.77	0.74	0.81	0.77	0.89	0.79	0.72	0.74	0.55	0.78	0.75
Qwen2-VL-7B	0.62	0.66	0.71	0.72	0.77	0.70	0.69	0.59	0.66	0.61	0.67
GPT4o	0.49	0.52	0.55	0.55	0.58	0.52	0.47	0.49	0.45	0.49	0.51
Idefics3	0.52	0.63	0.54	0.58	0.54	0.54	0.55	0.47	0.55	0.51	0.54
TQA Accuracy	cs.AI (167)	cs.CV (473)	cs.LG (516)	cs.RO (247)	eess.SP (45)	eess.SY (188)	q-bio.BM (118)	q-bio.CB (108)	q-bio.GN (398)	q-bio.TO (115)	Mean (2375)
InstrcutBLIP	0.20	0.19	0.23	0.19	0.20	0.21	0.19	0.14	0.24	0.21	0.20
InterLM-XC-2.5	0.46	0.38	0.36	0.51	0.38	0.56	0.45	0.44	0.47	0.44	0.45
InternVL2-2B	0.41	0.36	0.36	0.51	0.27	0.49	0.42	0.43	0.40	0.42	0.41
InternVL2-8B	0.50	0.56	0.55	0.68	0.64	0.75	0.62	0.64	0.54	0.73	0.62
LLaVA1.6-7B	0.26	0.19	0.22	0.29	0.24	0.26	0.20	0.28	0.22	0.30	0.25
LLaVA-OneVision	0.48	0.41	0.43	0.57	0.33	0.64	0.49	0.57	0.43	0.55	0.49
LLaVA1.5-13B	0.37	0.29	0.28	0.36	0.31	0.32	0.29	0.31	0.30	0.31	0.31
LLaVA1.5-7B	0.32	0.26	0.29	0.32	0.33	0.30	0.28	0.36	0.30	0.30	0.31
LLaVA1.6-34B	0.54	0.50	0.46	0.55	0.47	0.63	0.58	0.57	0.47	0.54	0.53
Mantis	0.31	0.24	0.29	0.35	0.33	0.32	0.19	0.32	0.32	0.32	0.30
Phi3v	0.47	0.41	0.43	0.51	0.49	0.60	0.48	0.56	0.46	0.48	0.49
InterLM-XC-4Khd	0.43	0.31	0.36	0.50	0.24	0.53	0.48	0.44	0.38	0.43	0.41
Idefics2	0.36	0.30	0.34	0.38	0.33	0.43	0.34	0.41	0.34	0.30	0.35
Claude-Sonnet	0.77	0.79	0.84	0.85	0.80	0.85	0.84	0.79	0.78	0.83	0.81
Qwen2-VL-7B	0.59	0.53	0.52	0.63	0.53	0.64	0.53	0.66	0.53	0.63	0.58
GPT4o	0.46	0.41	0.40	0.55	0.47	0.57	0.49	0.50	0.45	0.48	0.48
Idefics3	0.49	0.43	0.44	0.57	0.36	0.57	0.45	0.58	0.46	0.52	0.49

A.3 ADDITIONAL LIVEXIV DATASET VERSIONS

In this section we describe in detail the additional LiveXiv versions, v0 (generated from papers from 2010), v1-opposite which is the same raw data as v1 but this time Claude is the QA generation model and GPT-4o does the filtering, and v2 and v3 which consist of multiple participating models. We start by describing each version and the performance of the evaluated models. Lastly, we summarize the diversity of our generated dataset, both in terms of visual content and in terms of the different categories of questions.

A.3.1 LIVEXIV V0

We analyzed 100 scientific papers from 2010 and developed v0, which contains 4,500 questions. Due to the dynamic nature of scientific data, v0 represents a significant distribution shift from v1. We used our efficient evaluation method to predict v1 from v0, and our high-accuracy predictions demonstrate the method’s robustness across a large temporal gap. Refer to Table 11 for performance details.

A.3.2 LIVEXIV V1-OPPOSITE

To show the impact of the the role of each model in the dataset creation, we created an opposite version of v1, where Claude is the model that generates the questions and GPT is the model that does the filtering. Table 12 demonstrates the changes in the absolute performance and in the ranking between the models. Overall, switching roles between Claude and GPT-4o has minimal impact on most models. However, GPT-4o shows slightly more variation, dropping slightly in the rankings when it takes on the role of filtering questions. This variation occurs because generating the questions provides some advantage.

Table 12: We compared LiveXiv first version with different configurations, The original configuration where GPT4o generates the questions and Claude filters and an opposite version where Claude generates the questions and GPT4o performs the filtering. We see in it that overall, the ranking remains similar and the changes are minor. Indeed, for the generating model there is some advantage as we see that GPT goes down a bit in the ranking (Claude remains first in both cases).

	VQA		TQA	
	Ranking change	Average change (%)	Ranking change	Average change (%)
InstructBLIP-7B	0	-1.78	0	9.66
IXC2.5-7B	0	-0.83	0	13.73
InternVL2-8B	0	-1.18	0	2.37
LLaVA-1.6-Mistral-7B	2	-8.64	0	10.72
LLaVA-OneVision-7B	1	-3.66	-2	13.42
LLaVA-v1.5-13B	0	-6.49	0	8.48
LLaVA-v1.5-7B	0	-8.00	-1	12.72
LLaVA-v1.6-34B	2	-5.85	0	-0.35
Mantis-LLama3-8B	2	-7.13	0	10.24
Phi3v	1	-0.49	0	13.856
IXC2-4KHD-7B	-5	-0.47	3	8.60
Idefics2-8B	1	-6.00	0	3.21
InternVL2-2B	0	-1.42	0	2.61
Claude-Sonnet	0	-3.31	0	10.11
Qwen2-VL	0	-0.31	0	2.81
GPT-4o	-4	4.74	0	13.46
Idefics3	0	-1.89	0	12.23
Average	0	-3.10	0	8.70

A.3.3 LIVEXIV v2

LiveXiv second version (v2) consists of 10.4K questions for VQA and 7.7K questions for TQA. In addition we introduced 4 new domains from physics, namely, `physics.app-ph`, `physics.optics`, `physics.bio-ph`, `physics.data-an` to a total of 14 domains. Lastly, we also added Two new models, Pixtral (Agrawal et al., 2024) and Molmo-7B (Deitke et al., 2024). Due to our high frequency updates, Quantitative Biology related domains have overlapping papers between versions. Thus, we filtered these overlapping papers out. V2 shows similar diversity to v1 (see Table 18), similar performance of the evaluated models, resulting an accurate and reliable efficient evaluation (see Figure 4) and lastly, demonstrating LiveXiv to be evolving scalable live dataset. Table 13 reports the performance summary.

A.3.4 LIVEXIV v3

To further mitigate the potential bias due to single generation and single filtering model, v3 is a combination of 3 participant models, GPT-4o, Claude-Sonnet and Qwen2-VL-72B. v3 is actually 3 subsets, where each time a different model takes a different role. Table 14 presents the results for all 3 subsets. Table 15 shows the performance per subset. Overall we can see that the model ranking remains similar to previous version. This hints that the bias of using a single model is small. We extended our manual verification process with an additional check of v3. Tables 16 and 17 present these results in detail. The manual check revealed more variations compared to the manual check on v1, which can be attributed to the participation of three models in v3. As shown in Table 15, Qwen2-VL-72B demonstrated weaker performance compared to GPT and Claude. Consequently, its role as the filtering and generation model likely introduced additional noise into the dataset. However, the average performance change for both VQA and TQA remains below 5%.

Table 13: Version 2 - VQA and TQA average accuracy across ArXiv taxonomy (the number of samples is in brackets).

VQA Accuracy	cs.AI (790)	cs.CV (1071)	cs.LG (853)	cs.RO (834)	ess.SP (889)	ess.SY (772)	physics.app-ph (944)	physics.bio-ph (868)	physics.data-an (841)	physics.optics (819)	q-bio.BM (890)	q-bio.CB (184)	q-bio.GN (321)	q-bio.TO (299)	Mean (10375)
InstructBLIP	0.25	0.24	0.23	0.27	0.28	0.22	0.22	0.25	0.22	0.22	0.20	0.25	0.22	0.17	0.24
InterLM-XC-2.5	0.51	0.49	0.43	0.49	0.54	0.52	0.46	0.52	0.49	0.51	0.47	0.42	0.54	0.51	0.49
InternVL-2-2B	0.66	0.67	0.54	0.65	0.65	0.65	0.63	0.68	0.64	0.66	0.62	0.59	0.64	0.66	0.64
InternVL-2-8B	0.34	0.39	0.34	0.36	0.33	0.32	0.30	0.34	0.32	0.31	0.34	0.29	0.30	0.34	0.33
LLaVA1.6-7B	0.55	0.60	0.47	0.59	0.54	0.59	0.57	0.59	0.55	0.59	0.55	0.47	0.58	0.56	0.56
LLaVA-OneVision	0.35	0.36	0.33	0.39	0.35	0.36	0.34	0.35	0.33	0.34	0.36	0.33	0.35	0.35	0.35
LLaVA1.5-13B	0.32	0.35	0.33	0.35	0.31	0.34	0.31	0.34	0.35	0.35	0.33	0.35	0.32	0.35	0.33
LLaVA1.5-7B	0.53	0.56	0.42	0.57	0.54	0.54	0.48	0.58	0.54	0.55	0.51	0.47	0.45	0.56	0.52
LLaVA1.6-34B	0.35	0.35	0.29	0.35	0.30	0.33	0.31	0.35	0.31	0.33	0.33	0.35	0.33	0.35	0.33
Mantis	0.59	0.64	0.51	0.63	0.64	0.60	0.60	0.66	0.60	0.62	0.60	0.49	0.58	0.62	0.60
Phi3v	0.43	0.45	0.30	0.42	0.32	0.35	0.32	0.33	0.36	0.32	0.36	0.24	0.38	0.32	0.35
InterLM-XC-4Khd	0.39	0.44	0.36	0.43	0.36	0.40	0.38	0.43	0.39	0.39	0.39	0.33	0.34	0.39	0.39
IdRefic3	0.50	0.54	0.45	0.52	0.47	0.52	0.52	0.55	0.51	0.53	0.48	0.43	0.48	0.51	0.50
Claude-Sonnet	0.81	0.78	0.75	0.76	0.83	0.80	0.78	0.80	0.76	0.80	0.77	0.69	0.76	0.78	0.78
Qwen2-VL-7B	0.68	0.71	0.61	0.68	0.72	0.66	0.70	0.75	0.69	0.73	0.67	0.58	0.69	0.71	0.68
GP4o	0.58	0.61	0.50	0.60	0.62	0.57	0.61	0.63	0.59	0.61	0.59	0.53	0.54	0.67	0.59
IdRefic3	0.57	0.60	0.50	0.55	0.58	0.58	0.52	0.59	0.53	0.54	0.55	0.52	0.60	0.58	0.56
Ptrixtral	0.73	0.71	0.66	0.73	0.78	0.70	0.76	0.77	0.73	0.73	0.70	0.67	0.72	0.77	0.73
Molmo	0.62	0.67	0.52	0.62	0.62	0.62	0.59	0.65	0.61	0.61	0.61	0.49	0.55	0.67	0.60

TQA Accuracy	cs.AI (1208)	cs.CV (901)	cs.LG (785)	cs.RO (1315)	ess.SP (164)	ess.SY (458)	physics.app-ph (998)	physics.bio-ph (482)	physics.data-an (340)	physics.optics (198)	q-bio.BM (252)	q-bio.CB (154)	q-bio.GN (141)	q-bio.TO (267)	Mean (7712)
InstructBLIP	0.20	0.22	0.21	0.19	0.19	0.19	0.15	0.13	0.18	0.18	0.18	0.21	0.20	0.18	0.19
InterLM-XC-2.5	0.41	0.43	0.45	0.49	0.42	0.50	0.46	0.56	0.52	0.43	0.45	0.38	0.46	0.41	0.46
InternVL-2-2B	0.37	0.34	0.39	0.37	0.36	0.41	0.41	0.47	0.39	0.37	0.38	0.34	0.41	0.30	0.38
InternVL-2-8B	0.56	0.55	0.59	0.64	0.63	0.65	0.65	0.69	0.65	0.66	0.61	0.51	0.57	0.67	0.60
LLaVA1.6-7B	0.23	0.21	0.22	0.23	0.21	0.24	0.22	0.21	0.26	0.25	0.24	0.15	0.24	0.21	0.22
LLaVA-OneVision	0.42	0.44	0.50	0.48	0.45	0.53	0.49	0.56	0.52	0.50	0.48	0.46	0.49	0.47	0.49
LLaVA1.5-13B	0.30	0.28	0.33	0.32	0.34	0.28	0.29	0.35	0.31	0.31	0.29	0.25	0.28	0.27	0.30
LLaVA1.5-7B	0.28	0.26	0.31	0.31	0.28	0.30	0.27	0.30	0.29	0.31	0.33	0.25	0.27	0.29	0.29
LLaVA1.6-34B	0.45	0.45	0.48	0.54	0.54	0.59	0.55	0.55	0.55	0.52	0.54	0.48	0.49	0.51	0.52
Mantis	0.28	0.28	0.29	0.32	0.33	0.28	0.28	0.33	0.34	0.28	0.22	0.27	0.24	0.24	0.29
Phi3v	0.43	0.47	0.48	0.49	0.42	0.53	0.47	0.60	0.54	0.48	0.47	0.39	0.49	0.44	0.48
InterLM-XC-4Khd	0.37	0.37	0.40	0.43	0.34	0.42	0.40	0.46	0.44	0.47	0.39	0.24	0.41	0.30	0.39
IdRefic3	0.32	0.33	0.35	0.37	0.34	0.44	0.35	0.44	0.39	0.34	0.36	0.29	0.37	0.32	0.36
Claude-Sonnet	0.79	0.82	0.81	0.87	0.81	0.81	0.83	0.85	0.78	0.80	0.83	0.77	0.81	0.84	0.82
Qwen2-VL-7B	0.51	0.54	0.56	0.59	0.60	0.63	0.57	0.73	0.59	0.53	0.56	0.51	0.61	0.52	0.58
GP4o	0.47	0.45	0.45	0.50	0.50	0.50	0.52	0.55	0.46	0.46	0.47	0.43	0.49	0.54	0.49
IdRefic3	0.43	0.43	0.48	0.47	0.47	0.47	0.47	0.58	0.47	0.48	0.47	0.39	0.47	0.49	0.49
Ptrixtral	0.57	0.56	0.58	0.59	0.57	0.63	0.60	0.66	0.66	0.57	0.58	0.54	0.61	0.57	0.59
Molmo	0.49	0.48	0.51	0.53	0.49	0.55	0.52	0.64	0.53	0.50	0.53	0.44	0.51	0.49	0.51

Table 14: Version 3 - VQA and TQA average accuracy across ArXiv taxonomy (the number of samples is in brackets).

VQA Accuracy	cs.AI (609)	cs.CV (892)	cs.LG (792)	cs.RO (798)	ess.SP (835)	ess.SY (597)	physics.app-ph (1035)	physics.bio-ph (908)	physics.data-an (425)	physics.optics (628)	q-bio.BM (803)	q-bio.CB (640)	q-bio.GN (425)	q-bio.TO (555)	Mean (9942)
InstructBLIP	0.24	0.26	0.23	0.26	0.21	0.21	0.21	0.22	0.20	0.20	0.22	0.23	0.26	0.24	0.23
InterLM-XC-2.5	0.50	0.50	0.46	0.49	0.48	0.47	0.53	0.50	0.50	0.52	0.49	0.48	0.51	0.52	0.50
InternVL-2-2B	0.65	0.66	0.60	0.71	0.67	0.65	0.69	0.64	0.62	0.68	0.62	0.64	0.61	0.69	0.65
InternVL-2-8B	0.37	0.38	0.31	0.42	0.33	0.35	0.34	0.31	0.28	0.34	0.33	0.35	0.32	0.35	0.34
LLaVA1.6-7B	0.58	0.59	0.51	0.65	0.57	0.55	0.61	0.57	0.52	0.58	0.51	0.56	0.52	0.57	0.56
LLaVA-OneVision	0.38	0.40	0.33	0.45	0.33	0.39	0.36	0.34	0.31	0.37	0.36	0.38	0.33	0.34	0.36
LLaVA1.5-13B	0.37	0.38	0.32	0.44	0.31	0.36	0.35	0.33	0.29	0.36	0.32	0.36	0.34	0.36	0.35
LLaVA1.5-7B	0.54	0.59	0.47	0.64	0.56	0.56	0.57	0.52	0.47	0.59	0.50	0.49	0.50	0.57	0.54
LLaVA1.6-34B	0.37	0.40	0.31	0.42	0.33	0.37	0.37	0.35	0.30	0.36	0.34	0.37	0.34	0.37	0.36
Mantis	0.63	0.64	0.59	0.65	0.62	0.59	0.67	0.63	0.60	0.63	0.56	0.60	0.60	0.59	0.61
Phi3v	0.38	0.42	0.34	0.46	0.33	0.33	0.38	0.32	0.31	0.37	0.31	0.31	0.37	0.38	0.36
InterLM-XC-4Khd	0.40	0.42	0.35	0.47	0.36	0.41	0.42	0.39	0.35	0.38	0.36	0.39	0.39	0.45	0.40
IdRefic3	0.54	0.55	0.47	0.58	0.49	0.51	0.55	0.50	0.49	0.50	0.48	0.53	0.49	0.50	0.51
Claude-Sonnet	0.75	0.77	0.76	0.78	0.80	0.80	0.81	0.80	0.73	0.81	0.76	0.75	0.77	0.78	0.78
Qwen2-VL-7B	0.68	0.69	0.66	0.74	0.68	0.66	0.75	0.72	0.69	0.72	0.62	0.70	0.68	0.73	0.69
GP4o	0.50	0.54	0.50	0.56	0.51	0.54	0.52	0.48	0.48	0.48	0.46	0.51	0.51	0.52	0.51
IdRefic3	0.59	0.58	0.50	0.60	0.54	0.57	0.58	0.53	0.52	0.56	0.49	0.52	0.57	0.54	0.55
Ptrixtral	0.69	0.71	0.69	0.74	0.72	0.70	0.76	0.70	0.72	0.74	0.69	0.71	0.70	0.74	0.71
Molmo	0.62	0.64	0.58	0.66	0.64	0.60	0.66	0.60	0.58	0.62	0.57	0.62	0.60	0.65	0.62

TQA Accuracy	cs.AI (802)	cs.CV (939)	cs.LG (890)	cs.RO (502)	ess.SP (386)	ess.SY (273)	physics.app-ph (270)	physics.bio-ph (199)	physics.data-an (149)	physics.optics (241)	q-bio.BM (821)	q-bio.CB (283)	q-bio.GN (650)	q-bio.TO (248)	Mean (6653)	
InstructBLIP	0.18	0.25	0.16	0.18	0.17	0.22	0.24	0.18	0.18	0.19	0.22	0.18	0.20	0.23	0.20	
InterLM-XC-2.5	0.49	0.47	0.51	0.49	0.49	0.59	0.66	0.65	0.52	0.50	0.56	0.56	0.59	0.59	0.54	
InternVL-2-2B	0.44	0.38	0.44	0.46	0.46	0.56	0.63	0.58	0.46	0.46	0.42	0.49	0.47	0.47	0.48	
InternVL-2-8B	0.67	0.60	0.60	0.65	0.67	0.77	0.77	0.79	0.72	0.75	0.62	0.75	0.66	0.67	0.69	
LLaVA1.6-7B	0.26	0.24	0.24	0.21	0.23	0.32	0.35	0.29	0.29	0.26	0.24	0.27	0.23	0.26	0.26	
LLaVA-OneVision	0.52	0.52	0.50	0.52	0.52	0.66	0.73	0.66	0.60	0.60	0.57	0.48	0.62	0.53	0.56	0.57
LLaVA1.5-13B	0.35	0.32	0.33	0.29	0.34	0.38	0.33	0.32	0.17	0.35	0.33	0.29	0.33	0.24	0.31	
LLaVA1.5-7B	0.32	0.32	0.32	0.30	0.34	0.37	0.33	0.30	0.30	0.32	0.31	0.30	0.29	0.29	0.31	
LLaVA1.6-34B	0.58	0.51	0.47	0.56	0.60	0.66	0.72	0.72	0.60	0.65	0.55	0.67	0.56	0.54	0.60	
Mantis	0.32	0.27	0.33	0.31	0.29	0.40	0.33	0.32	0.30	0.35	0.29	0.30	0.30	0.26	0.31	
Phi3v	0.52	0.51	0.53	0.51	0.55	0.62	0.74	0.68	0.59	0.61	0.53	0.63	0.58	0.51	0.58	
InterLM-XC-4Khd	0.45	0.39	0.46	0.44	0.44	0.51	0.57	0.55	0.43	0.48	0.46	0.46	0.44	0.47	0.47	
IdRefic3	0.40	0.31	0.39	0.33	0.40	0.46	0.51	0.42	0.42	0.45	0.42	0.35	0.42	0.44	0.41	
Claude-Sonnet	0.82	0.78	0.78	0.85	0.85	0.87	0.85	0.86	0.89	0.88	0.78	0.88	0.83	0.83	0.84	
Qwen2-VL-7B	0.62	0.60	0.63	0.63	0.62	0.68	0.77	0.72	0.72	0.62	0.70	0.66	0.64	0.64	0.67	
GP4o	0.45	0.44	0.45	0.44	0.51	0.59	0.62	0.56	0.54	0.53	0.48	0.60	0.54	0.51	0.52	
IdRefic3	0.55	0.49	0.57	0.47												

Table 16: VQA Manual verification. We re-verified our dataset by curating a subset of 300 questions (100 from each subset). We can see that version 3 even though composed of 3 different subset, remains accurate with a bounded performance change overall and minimal ranking changes.

	Overall	Manual	Performance change	Rank Overall	Rank Manual	Rank change
instructblip-vicuna-7b	22.90	26.75	-3.84	19	19	0
internlm-xcomposer2d5-7b	49.62	51.37	-1.75	12	12	0
InternVL2-8B	65.43	68.09	-2.66	4	5	-1
llava-v1.6-mistral-7b	34.21	40.12	-5.91	18	17	1
llava-onevision-qwen2-7b-ov	56.69	59.88	-3.19	7	9	-2
llava-v1.5-13b	36.48	43.16	-6.68	14	15	-1
llava-v1.5-7b	34.92	39.51	-4.59	17	18	-1
llava-v1.6-34b	54.59	61.40	-6.81	9	8	1
Mantis-8B-siglip-llama3	35.87	41.34	-5.47	16	16	0
phi3v	61.79	64.74	-2.95	6	7	-1
internlm-xcomposer2-4khd-7b	36.07	46.20	-10.13	15	13	2
idefics2-8b	39.64	45.59	-5.95	13	14	-1
InternVL2-2B	51.67	54.10	-2.43	10	10	0
claude	77.95	81.46	-3.51	1	1	0
qwen2vl	69.56	73.56	-3.99	3	2	1
gpt	50.82	51.67	-0.85	11	11	0
idefics3	54.94	64.74	-9.80	8	7	1
pixtral	71.49	72.64	-1.15	2	3	-1
molmo	61.93	69.91	-7.98	5	4	1
mean	50.87	55.59	4.72			

Table 17: TQA Manual verification. We re-verified our dataset by curating a subset of 300 questions (100 from each subset). We can see that version 3 even though composed of 3 different subset, remains accurate with small performance change overall and minimal ranking changes.

	Overall	Manual	Performance change	Rank Overall	Rank Manual	Rank change
instructblip-vicuna-7b	19.93	17.96	1.97	19	19	0
internlm-xcomposer2d5-7b	52.28	49.40	2.88	9	11	-2
InternVL2-2B	45.69	43.71	1.98	12	13	-1
InternVL2-8B	65.93	73.65	-7.73	2	2	0
llava-v1.6-mistral-7b	25.22	26.35	-1.13	18	18	0
llava-onevision-qwen2-7b-ov	53.99	56.29	-2.30	8	6	2
llava-v1.5-13b	32.24	31.74	0.50	15	17	-2
llava-v1.5-7b	31.50	33.23	-1.73	16	15	1
llava-v1.6-34b	56.74	62.57	-5.83	5	3	2
Mantis-8B-siglip-llama3	30.74	32.34	-1.60	17	16	1
phi3v	55.49	52.40	3.10	6	7	-1
internlm-xcomposer2-4khd-7b	45.44	40.12	5.32	13	14	-1
idefics2-8b	39.13	46.71	-7.58	14	12	2
claude	81.92	88.62	-6.70	1	1	0
qwen2vl	64.36	62.28	2.09	3	4	-1
gpt	49.23	50.30	-1.07	11	10	1
idefics3	54.41	52.10	2.32	7	8	-1
pixtral	57.45	56.36	1.09	4	5	-1
molmo	50.12	51.36	-1.25	10	9	1
mean	47.99	48.82	3.06			

A.3.5 DIVERSITY THROUGH TIME

We evaluate LiveXiv diversity through time in Table 18. It shows that each version has a steady distribution of visual content and diverse set of questions for both figures and tables.

Table 18: Questions and visual content diversity through LiveXiv versions, we can see that the diversity is persistent and LiveXiv has a rich set of visual content as well diverse questions throughout the new versions.

VQA	Data Analysis	Reasoning	Attribute	Localization	Reading	Arithmetic	Charts	Block Diagram	Qualitative
v0	768	280	256	365	320	42	1239	578	214
v1	2291	872	903	1596	1470	154	4354	2110	864
v2	3005	1471	1610	1797	1732	112	5480	2805	1442
v3	3265	1196	1459	1202	1916	321	5113	2141	1573

TQA	Data Analysis	Reasoning	Attribute	Localization	Reading	Arithmetic
v0	637	45	40	14	425	1168
v1	2582	123	121	23	2127	3934
v2	2289	228	74	23	1125	3436
v3	1808	130	97	16	1590	2572

A.4 EXPLORING MORE DETAILS ON EFFICIENT EVALUATION

A.4.1 EXTRA EFFICIENT EVALUATION RESULTS FOR LIVEXIV v2

We start showing what would happen if our method for efficient evaluation is applied when setting the number of re-evaluated models to be 3 or 8. As expected, Figures 12 and 13 show that the overall performance is positively related to the number of re-evaluated models. We found that re-evaluating 5 models offers a good trade-off between performance and complexity.

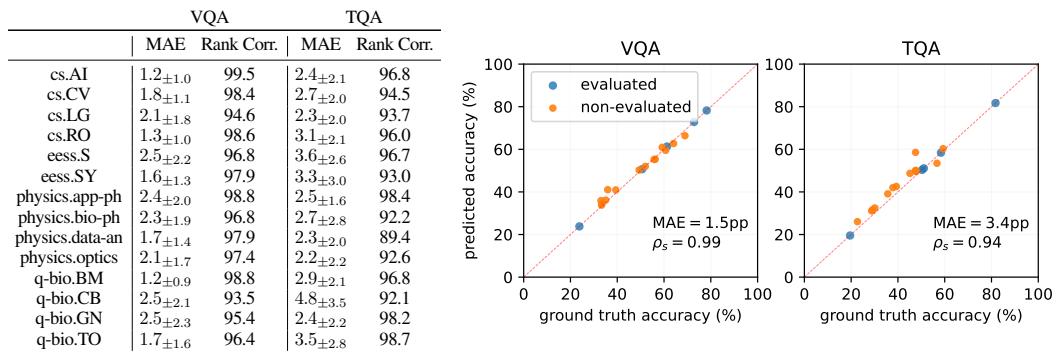


Figure 12: Performance prediction results of our efficient re-evaluation method on the v2 when re-evaluating 3 models.

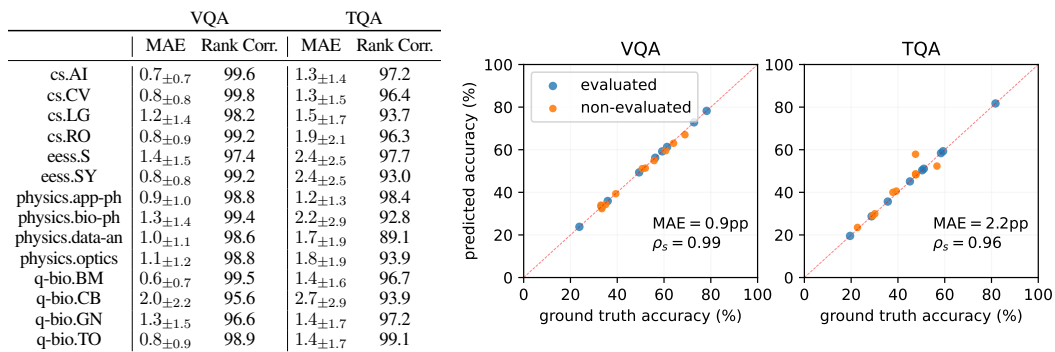


Figure 13: Performance prediction results of our efficient re-evaluation method on v2 when re-evaluating 8 models.

1458
1459
1460
1461
1462
1463
1464
1465
1466
1467

	VQA		TQA	
	MAE	Rank Corr.	MAE	Rank Corr.
cs.AI	3.1 \pm 1.6	95.8	3.7 \pm 1.9	95.4
cs.CV	2.9 \pm 2.5	95.1	3.6 \pm 2.3	95.3
cs.LG	2.5 \pm 1.5	95.8	3.3 \pm 2.0	93.6
cs.RO	3.3 \pm 2.2	96.6	3.4 \pm 1.9	93.9
eess.S	3.4 \pm 2.1	98.0	2.7 \pm 1.8	94.1
eess.SY	3.0 \pm 1.6	97.0	4.8 \pm 2.6	91.4
q-bio.BM	1.9 \pm 1.3	96.8	3.0 \pm 1.9	95.1
q-bio.CB	2.9 \pm 1.6	98.3	4.7 \pm 2.2	94.1
q-bio.GN	2.7 \pm 1.9	97.1	3.9 \pm 2.5	90.7
q-bio.TO	3.2 \pm 1.7	97.3	3.8 \pm 2.0	94.6

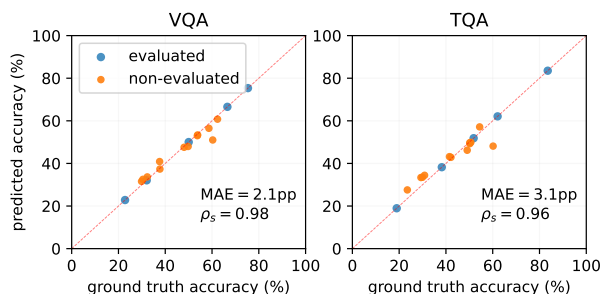
1468
1469
1470
1471

Figure 14: Performance prediction results of our efficient re-evaluation method on v1 from v0 when re-evaluating 5 models. We can see that even in a large temporal gap, our method managed to predict accurately.

1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482

	VQA		TQA	
	MAE	Rank Corr.	MAE	Rank Corr.
cs.AI	3.0 \pm 2.8	93.0	3.6 \pm 3.4	94.7
cs.CV	1.8 \pm 1.6	95.8	3.3 \pm 2.9	91.2
cs.LG	2.0 \pm 1.8	98.8	3.8 \pm 2.9	93.0
cs.RO	2.5 \pm 1.8	94.9	3.3 \pm 2.9	89.1
eess.S	2.3 \pm 2.0	96.5	4.0 \pm 3.8	95.1
eess.SY	2.5 \pm 2.3	96.1	2.2 \pm 2.2	94.2
physics.app-ph	3.0 \pm 2.3	94.4	5.0 \pm 4.1	86.9
physics.bio-ph	3.0 \pm 2.5	94.3	9.7 \pm 6.5	72.8
physics.data-an	2.7 \pm 2.3	93.3	6.1 \pm 3.6	89.2
physics.optics	2.4 \pm 2.1	94.8	3.6 \pm 3.4	94.3
q-bio.BM	4.2 \pm 3.1	92.3	3.5 \pm 2.5	94.2
q-bio.CB	2.8 \pm 2.2	94.3	5.4 \pm 4.0	96.3
q-bio.GN	2.3 \pm 2.0	95.4	2.8 \pm 2.5	95.4
q-bio.TO	3.1 \pm 2.6	95.1	3.0 \pm 3.2	89.6

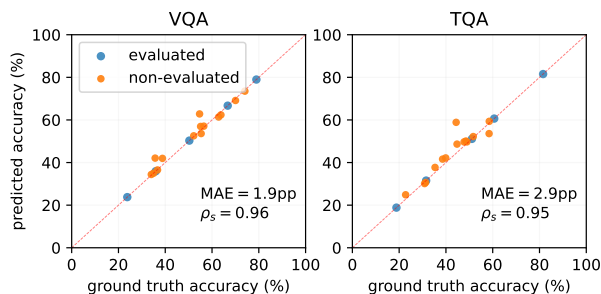
1483
1484
1485
1486

Figure 15: Performance prediction results of our efficient re-evaluation method on v3, subset 1 when re-evaluating 5 models and using our method. We can see the estimations are accurate as this subset has the same model configuration as v1 and v2, which suggests our method is robust through time.

1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497

A.4.2 LIVEXIV V0 (PAPERS FROM 2010) EFFICIENT EVALUATION RESULTS

In Figure 14 we show the performance prediction results of our efficient re-evaluation method on v1 from v0, when re-evaluating 5 models. Despite the (temporal) big distribution shift, our efficient evaluation method does still work well.

1498
1499

A.4.3 LIVEXIV V3 EFFICIENT EVALUATION RESULTS

1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511

The third version of LiveXiv (denoted as v3) introduced multiple participating models for QA generation and filtering. Subset 1 has GPT-4o as the generation model and Claude for the filtering (same as v0, v1, v2). Subset 2 has Claude as the generation model and Qwen2-VL-72B as the filtering model, and Subset 3 has Qwen2-VL-72B as the generation model and GPT-4o as the filtering model. We show that our method when $m=5$ produces robust and accurate estimations for the first two subsets (Figures 15 and 16) but less accurate estimation on the third subset (Figure 17). The degradation in performance of the estimation over the third subset, suggests that perhaps one of the preliminary assumptions of the estimation model breaks. To further check that, we calculated the overall performance for each subset and found out that the third subset has a large gap compared to the other subsets and previous versions (see Table 15). We can see that the third subset in version 3 has a much higher average performance for VQA and significantly higher for TQA. This suggests that the questions' difficulty indeed changed, probably because Qwen2-VL-72B is weaker than GPT-4o and Claude. The weaker questions it generates somewhat violates the efficient evaluation estimation model assumptions, which is that the question quality remains roughly the same. As this assumption is slightly violated we get worse estimation by the efficient evaluation on this set. Note that the above limitation will also occur once the leading models such as GPT or Claude will be replaced by significantly stronger versions. In this case, we suggest running a full evaluation in order to re-calibrate the estimation model.

1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522

	VQA		TQA	
	MAE	Rank Corr.	MAE	Rank Corr.
cs.AI	2.2 \pm 1.8	94.9	4.3 \pm 3.7	91.8
cs.CV	1.8 \pm 1.5	96.0	3.8 \pm 3.1	88.6
cs.LG	3.1 \pm 2.4	92.2	2.3 \pm 2.1	94.0
cs.RO	2.2 \pm 1.3	94.5	5.6 \pm 4.9	77.8
eess.S	2.6 \pm 2.3	94.0	5.1 \pm 5.0	94.3
eess.SY	2.2 \pm 2.1	95.4	4.2 \pm 3.0	92.8
physics.app-ph	3.3 \pm 2.8	93.5	9.8 \pm 7.3	67.3
physics.bio-ph	2.5 \pm 2.2	92.6	4.4 \pm 4.0	89.0
physics.data-an	3.2 \pm 2.4	96.0	3.2 \pm 2.6	93.7
physics.optics	3.1 \pm 3.3	91.9	5.7 \pm 6.2	80.5
q-bio.BM	4.2 \pm 3.1	91.4	2.1 \pm 2.1	94.9
q-bio.CB	2.7 \pm 2.4	94.0	2.6 \pm 2.0	95.7
q-bio.GN	2.8 \pm 2.7	92.9	3.1 \pm 3.4	97.2
q-bio.TO	2.9 \pm 2.3	96.4	3.9 \pm 3.5	89.0

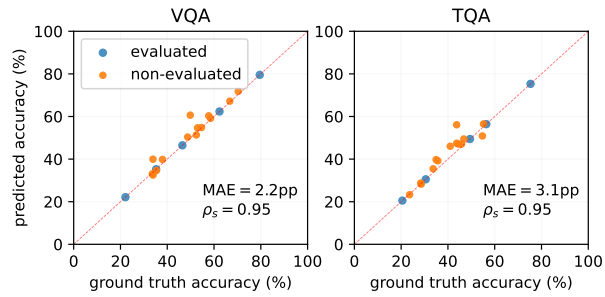
1523
1524
1525
1526
1527

Figure 16: Performance prediction results of our efficient re-evaluation method on v3, subset 2 benchmark when re-evaluating 5 models. We can see the predictions are accurate despite this time the generation model is Claude and the filtering model is Qwen2-VL-72B, this suggests that our method can be robust to different models participating in our benchmark, as long as the preliminary assumptions of the estimation models are valid.

1528
1529
1530
15311532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542

	VQA		TQA	
	MAE	Rank Corr.	MAE	Rank Corr.
cs.AI	4.1 \pm 3.4	87.2	6.1 \pm 4.7	82.3
cs.CV	3.5 \pm 3.2	90.7	6.3 \pm 3.7	91.7
cs.LG	4.0 \pm 2.9	88.8	7.2 \pm 5.2	85.7
cs.RO	6.7 \pm 4.4	81.1	4.8 \pm 3.7	88.4
eess.S	3.3 \pm 3.3	92.8	8.3 \pm 4.7	79.2
eess.SY	4.3 \pm 2.5	90.7	10.2 \pm 3.1	87.1
physics.app-ph	3.2 \pm 2.9	91.2	9.1 \pm 6.4	83.5
physics.bio-ph	3.1 \pm 3.0	90.6	6.8 \pm 4.8	89.9
physics.data-an	4.3 \pm 3.7	89.4	10.4 \pm 7.4	90.2
physics.optics	4.1 \pm 3.4	85.3	13.1 \pm 4.6	78.0
q-bio.BM	3.4 \pm 2.9	89.6	6.4 \pm 3.8	84.1
q-bio.CB	3.4 \pm 3.5	90.4	7.5 \pm 5.1	90.9
q-bio.GN	2.9 \pm 3.0	95.6	7.1 \pm 5.6	86.3
q-bio.TO	3.8 \pm 3.3	91.2	5.3 \pm 4.3	87.0

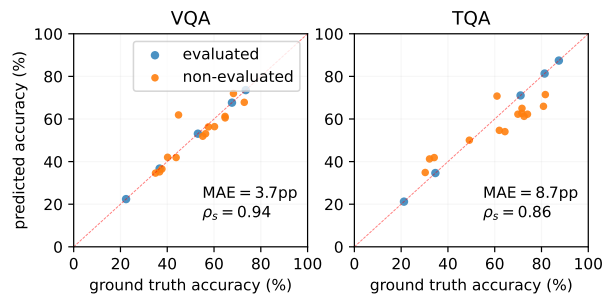
1543
1544
1545
1546
1547

Figure 17: Performance prediction results of our efficient re-evaluation method on v3, subset 3 benchmark when re-evaluating 5 models. We can see the predictions are fairly accurate despite this time the generation model is Qwen2-VL-72B and the filtering model is GPT-4o. Our method introduces some degradation in the estimations' accuracy on this subset, this is probably due to the fact the questions for TQA on v3-s3 are easier (See Table 15) compare to the other subsets, and violates one of our model assumptions.

1548
1549
1550
1551
1552
1553
1554

A.4.4 EFFICIENT EVALUATION ON MM-LIVEBENCH

1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565

In this section, we challenge our efficient evaluation method, by examining its performance over another type of multi-modal live dataset Zhang et al. (2024b). The dataset has 3 versions (May 2024, June 2024, and July 2024), and each version has roughly 250-300 samples of open-ended questions scraped from newspapers. To evaluate our method we use GPT-4o to convert the open-ended questions into closed-form of questions where the true answer is rephrased and 3 more negative answers are proposed. Then we evaluate 13 LMMs over all the dataset versions. We use the first version as a training set and we predict the performance over the new concatenated sets using our IRT-based method. Figure 18 shows that our method still performs well on a different benchmark when re-evaluating only 5 models.

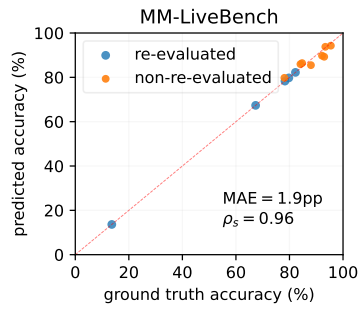


Figure 18: **Our efficient evaluation method on MM-LiveBench.** We check that our method could be successfully applied in this other context, here we convert MM-LiveBench to multiple choice questions and apply our efficient evaluation method between MM-LiveBench versions. The results for MM-LiveBench are optimistic, showing our method predict the results between its version accurately.

1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619

A.5 PROMPT TEMPLATE FOR QA GENERATIONS

```
This is a figure
  from a scientific paper with the following caption: {text_desc}.
Please describe the image in
as much details as possible. For all the details you are confident
  about include everything you see, and be as specific as possible
, such as existing numbers, describing objects, attributes ...
```

Figure 19: Prompt template for general detailed caption.

```
Compositional reasoning defines the understanding of
  attributes, relations and word order significance. A good vision
-language model should be able to accurately answer composition
reasoning questions about an image. Your task is to fool a vision
-language model by generating challenging compositional reasoning
questions about the figure. Given the image and the description
you generated: {detailed_description}, generate {n_questions}
diverse and challenging compositional reasoning questions which a
vision-language model would incorrectly answer. For each question
include the following: - A compositional reasoning question -
A correct answer - 3 hard negative options. Each negative option
should differ only subtly from the correct answer but still be
clearly incorrect given the image, and the question. The goal is
for a vision-language model to choose the negative option over the
positive option when you asked to answer the question in binary
multiple choice format. Only include questions you are confident
in your answer and make sure there is indeed only a single correct
answer and the others are false answers. Format your response
as a string in the format [{"Q":<question>, "a":<correct answer
>, "n1":<negative option 1>, "n2":<negative option 2>, ...}].
```

Figure 20: Prompt template for visual question-answering.

1674
 1675
 1676
 1677
 1678
 1679
 1680
 1681
 1682
 1683
 1684
 1685
 1686
 1687
 1688
 1689
 1690
 1691
 1692
 1693
 1694
 1695
 1696
 1697
 1698
 1699
 1700
 1701
 1702
 1703
 1704
 1705
 1706
 1707
 1708
 1709
 1710
 1711
 1712
 1713
 1714
 1715
 1716
 1717
 1718
 1719
 1720
 1721
 1722
 1723
 1724
 1725
 1726
 1727

Document and table understanding defines the understanding of values, metrics and perform arithmetic operations over numerical values and commonsense reasoning . A good language model should be able to accurately answer {commonsense_reasoning / arithmetic manipulation} questions from a given table. Your task is to fool a language model by generating challenging table {commonsense_reasoning / arithmetic manipulation} questions about the table. Given the table: {table_content} Generate {n_questions} diverse and challenging {commonsense_reasoning / arithmetic manipulation} questions on the table questions which a language model would incorrectly answer .For each question include the following: - A question - A correct answer - 3 hard negative options. Each negative option should differ only subtly from the correct answer but still be clearly incorrect given the figure, caption and the question. The goal is for a language model to choose the negative option over the positive option when you asked to answer the question in binary multiple choice format. Only include questions you are confident in your answer and make sure there is indeed only a single correct answer and the others are false answers. Format your response as a string in the format [{"Q":<question>, "a":<correct answer >, "n1":<negative option 1>, "n2":<negative option 2>, ...}].

Figure 21: Prompt template for table question-answering.

Think step by step before answering.
 For the given image and question: {question}
 write only the words yes or no if think the option {correct_answer } is indeed the correct answer out of {options} for this question?

Figure 22: Prompt template for agreement filtering.

1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781

```
You are
  an insightful assistant, for the question/options pair provided
  by the user, pick a question category from the list below:
Question category:
- attribute: the question asks about the presence or
  visibility of an attribute of an object (e.g. "What is the color
  of circles in plot (a)?" "[A. Blue, B. White, C. Green, D. Red]")
- reasoning: the question
  asks about understanding the figure (e.g "What is the object
  inside the red box?" "[A. Bottle, B. Table, C. Tree, D. Nothing]")
- localization: the question asks about
  the presence or visibility at a specific location in the image
  (e.g "On which subplot does the scatter is the most spread?"
  "[A. Top-Left, B. Bottom-Right, C. 'Middle-Left', D. 'Top-Right']")
- reading: the question asks about reading
  some text from the figure (e.g "What is name of the method
  presneted as a green line?" "[A. GPSK, B. FDAH, C. TQWA, D.Ours]")
- arithmetic: the questions asks about mathematical arithmetic
  of numbers (e.g if the maximum accuracy of SIFT would be
  doubled? what would be the value?" "[A. 2, B. 4 , C. 100, D. 50])
- data
  analysis: the question asks about understanding of a graph (e.g,
  "Which values intersect at T=2?" "[A. N1, B. N2, C. N3, D. N4]")
Respond with a JSON object
with the following format: {"Question category": "category"}
```

Figure 23: Prompt template for question categories analysis.