

SCALING LAWS FOR MULTILINGUAL LANGUAGE MODELS

Anonymous authors

Paper under double-blind review

ABSTRACT

We propose a novel scaling law for general-purpose decoder-only language models (LMs) trained on multilingual data, **tackling** the problem of balancing languages during multilingual pretraining. A primary challenge in studying multilingual scaling is the difficulty of analyzing individual language performance due to cross-lingual transfer. To address this, we shift the focus from individual languages to language families. We introduce and validate a hypothesis that the test cross-entropy loss for each language family is determined solely by its own sampling ratio, independent of other languages in the mixture. This insight simplifies the complexity of multilingual scaling and make the analysis scalable to an arbitrary number of languages. Building on this hypothesis, we derive a power-law relationship that links performance with dataset size, model size and sampling ratios. This relationship enables us to predict performance across various combinations of the above three quantities, and derive the *optimal sampling ratios* at different model scales. To demonstrate the effectiveness and accuracy of our proposed scaling law, we perform a large-scale empirical study, training more than 100 models on 23 languages spanning 5 language families. Our experiments show that the optimal sampling ratios derived from small models (85M parameters) generalize effectively to models that are several orders of magnitude larger (1.2B parameters), offering a resource-efficient approach for multilingual LM training at scale.

1 INTRODUCTION

Scaling has proven to be a powerful strategy for improving the performance of language models (LMs) across a range of tasks (Thoppilan et al., 2022; Smith et al., 2022; Achiam et al., 2023). Due to the enormous cost associated with training larger models (Rae et al., 2021; Dubey et al., 2024), *neural scaling laws* (Kaplan et al., 2020; Henighan et al., 2020; Hoffmann et al., 2022; Krajewski et al., 2024) have emerged to be an effective approach to a priori quantify and predict the gains from scaling up model size, dataset size, and computational resources. Previous works on scaling laws predominantly focus on monolingual LMs, neglecting the increasingly crucial role of *multilinguality* for LMs to cater to diverse linguistic populations and global users (Conneau & Lample, 2019; Conneau et al., 2020; Yang et al., 2024; Dubey et al., 2024). With increasing emphasis on inclusion and wider language support (Qin et al., 2024), there is a pressing need to extend these scaling laws to multilingual LMs to address unique challenges, particularly how to balance training across different languages effectively.

Although there exist some studies that examine multilingual scaling laws (Gordon et al., 2021; Ghorbani et al., 2022; Fernandes et al., 2023; Chen et al., 2024), they often focus on the specific problem of neural machine translation (NMT). These studies predominantly utilize encoder-decoder transformer architectures, which are not widely applied to generation tasks. Furthermore, they typically restrict their analysis to bilingual settings without capturing the complexities of language interactions. This omission is critical, as *cross-lingual transfer*, a key benefit in multilingual training, plays a significant role in improving performance across languages (Arivazhagan et al., 2019; Xian et al., 2022; Patra et al., 2023).

To address the aforementioned issues, in this work, we focus on building scaling laws for *general purpose decoder-only* LMs pretrained on *multilingual data*. Our contributions are grounded in a realistic and novel hypothesis that unlocks a broader understanding of multilingual scaling, making our analysis scalable to *an arbitrary number of languages*.

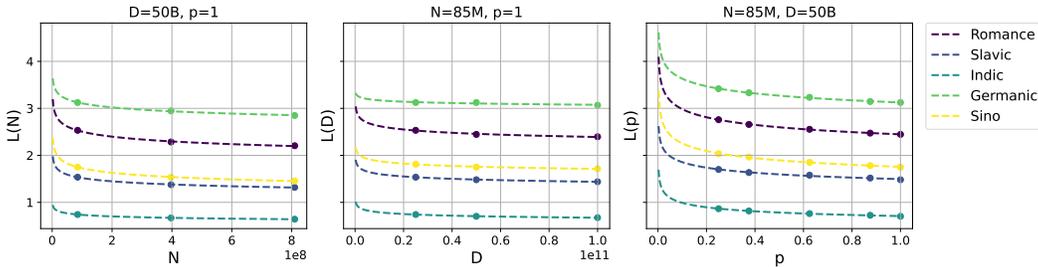


Figure 1: We propose a multilingual scaling law connecting the test cross-entropy loss (\mathcal{L}) with model size in number of parameters (N), dataset size (D) and sampling ratios for different language families (\mathbf{p}). The plots illustrate a power-law relationship by varying one quantity while fixing the other two for five language families.

To substantiate our claims, we conduct a large-scale empirical study by training more than 100 LMs covering 23 languages spanning 5 language families. Through this study, we propose a new multilingual scaling law that significantly enhances the predictive power for multilingual LM performance. This law provides a succinct power-law relationship between the test cross-entropy loss, model size, dataset size, and the sampling ratios of different language families (shown in Figure 1). The scaling law enables us to derive an accurate performance prediction across a wide range of combinations of the three quantities. More importantly, with this predictive power, we can directly derive the optimal sampling ratios for language families in the training mixture across varied model and dataset sizes by only training small models.

In summary, our key contributions are:

- Novel hypothesis for cross-lingual transfer:** One major challenge in analyzing multilingual LMs is the inability to isolate performance for each language due to cross-lingual transfer, where the performance of one language depends on other linguistically related languages trained jointly. Our key insight in tackling this problem is a hypothesis that the performance of each language family is independent of other language families in the training mixture. We empirically verify this hypothesis, which enables us to directly analyze the relationship between a language family’s performance and its sampling ratio. Specifically, we show that the test cross-entropy loss of each language family depends primarily on its own sampling ratio, independent of the sampling ratios of other language families in the training mixture. This provides an important simplification for analyzing multilingual scaling behavior.
- Multilingual scaling law:** Based on the validated hypothesis, we propose a scaling law that relates the test cross-entropy loss (\mathcal{L}_i) for each language family i to model size (N), dataset size (D) and language family sampling ratios (\mathbf{p}):

$$\mathcal{L}_i(N, D, \mathbf{p}) = \left(E_i + \frac{A_i}{N^{\alpha_i}} + \frac{B_i}{D^{\beta_i}} \right) p_i^{-\gamma_i},$$

where $E_i, A_i, B_i, \alpha_i, \beta_i, \gamma_i$ are fixed parameters for the i -th family. One key implication of the above form is that the scaling law of each language family only depends on its own sampling ratio p_i , independent of the sampling ratios of other families $p_{j \neq i}$. Additionally, we discover that the exponent γ_i , which governs how much loss reduces as the proportion of data from family i increases, remains invariant to model size N and dataset size D . This finding further strengthens the applicability of our scaling law across different compute scales.

- Derivation of the optimal sampling ratios:** Leveraging the proposed scaling law, we derive the optimal sampling ratios that minimize the total loss for the LM, thus providing an effective data mixing strategy for multilingual pretraining. We validate the optimality of these ratios by comparing them against other baseline sampling methods. We demonstrate that the optimal sampling ratios obtained from small models (85M parameters) generalize well to models that are several orders of magnitude larger (1.2B parameters). This insight implies that for resource-efficient LM training, practitioners can optimize training mixtures for large-scale models by only training smaller and more affordable models, drastically reducing computational overhead while maintaining performance consistency across model scales.

Table 1: List of 23 languages in our study with division into 5 language families.

Families	Languages
Germanic	English, German, Dutch, Danish
Romance	Spanish, French, Italian, Romanian, Catalan
Slavic	Russian, Ukrainian, Slovak, Serbian, Croatian
Indic	Hindi, Bengali, Nepali, Marathi, Tamil, Telugu, Kannada, Malayalam
Sino-Tibetan	Chinese

2 EXPERIMENTAL SETUP

Model. We train decoder-only Transformer models (Vaswani, 2017) in four sizes, ranging from 85M to 1.2B non-embedding parameters. The model sizes are determined by adjusting the number of layers, hidden sizes, and the number of attention heads. We detail the model configurations in Appendix B.

Data. We focus on the pretraining stage of multilingual language models. We use the CommonCrawl dataset (Conneau et al., 2020; Wenzek et al., 2020). Following the approach of Lai et al. (2023), we select 23 languages based on diversity and representativeness among the total 100 languages. We follow common practice (Fan et al., 2021; Costa-jussà et al., 2022) to group the languages into five language families based on linguistic similarities: Romance, Slavic, Indic, Germanic and Sino-Tibetan. The detailed languages within each family are presented in Table 1. We use the `cl100k_base` tokenizer¹ to tokenize the corpus. For each language in the training corpus, we apply a 90/10 random split, where the latter 10% is held-out for test cross-entropy loss evaluation. More details about the dataset can be found in Appendix A.

3 THE MULTILINGUAL SCALING LAW

We study the relationship between performance, model sizes, dataset sizes and sampling ratios. In Section 3.1, we begin by motivating the problem of multilingual scaling laws. In Section 3.2, we formulate and validate a hypothesis to address this problem in a tractable manner. In Section 3.3, we propose a power-law relationship between the performance and sampling ratios. In Section 3.4, we incorporate model size and dataset size into this relationship to establish a comprehensive scaling law. Finally in Section 3.5, we validate the fitting of our scaling law.

3.1 PROBLEM STATEMENT

During the pretraining stage of an LM, given n languages in the training data mixture, we explore the relationship between the total test cross-entropy loss \mathcal{L} , model size N , dataset size D (the total token count) and sampling ratios of each languages $\mathbf{p} = [p_1, \dots, p_n]$ in the training data mixture. Here, \mathbf{p} is a probability vector, i.e., $\mathbf{p} \in \Delta_n$, where Δ_n is the $(n - 1)$ -dimensional probability simplex. Specifically, we want to fit the relationship

$$\mathcal{L}(N, D, \mathbf{p}) = \sum_{i=1}^n w_i \mathcal{L}_i(N, D, \mathbf{p}), \quad (1)$$

where \mathcal{L}_i denotes the test cross-entropy loss for language i , and w_i^2 represents the *user-defined* preference for each language, indicating its importance. For instance, one can emphasize a particular language by increasing the corresponding w_i . Note that when $w_i = p_i$, this loss reflects the total empirical loss. This relationship is informative and predictive, as it directly leads to the following key capabilities:

- **Performance prediction:** The relationship allows us to predict performance of LMs trained on unseen sampling ratios. We can plug any combinations of N , D and \mathbf{p} into Eq. 1 to obtain the loss without conducting the training.

¹<https://github.com/openai/tiktoken>

²The weights should be non-negative. To get the optimal sampling ratios, only the ratios between w_i matter.

- **Optimal sampling ratios:** The framework provides a mechanism to determine the optimal sampling ratios \mathbf{p} leading to minimal total losses given N and D . This is achieved by solving the following optimization problem:

$$\mathbf{p}_w^* = \arg \min_{\mathbf{p} \in \Delta_n} \sum_{i=1}^n w_i \mathcal{L}_i(N, D, \mathbf{p}).$$

More importantly, we will demonstrate that the \mathbf{p}_w^* obtained from small models remains near optimal on significantly larger models.

3.2 HYPOTHESIS

For simplicity, we first consider a setting where model size and dataset size are fixed, and we only study the relationship between losses and sampling ratios, i.e., $\mathcal{L}_i(\mathbf{p})$. Fitting each individual $\mathcal{L}_i(\mathbf{p})$ directly is intractable as \mathbf{p} is an n -dimensional vector, and it is computationally infeasible to sample sufficiently many \mathbf{p} to effectively cover the n -dimensional space. To address this challenge, we propose and validate a realistic hypothesis to reduce this complexity.

Despite previous attempts to study the relationship between performance and sampling ratios (Fernandes et al., 2023; Chen et al., 2024), a key factor often overlooked is the impact of *cross-lingual transfer*. In particular, previous works directly assume $\mathcal{L}_i(\mathbf{p}) = \mathcal{L}_i(p_i)$, implying that the loss of each language depends solely on its own sampling ratio, regardless of the combination of other jointly trained languages. However, this assumption is equivalent to the statement that there exists no knowledge transfer across languages, which does not hold true in general. For instance, due to insufficient training data, low-resource languages (e.g., Catalan) benefit from knowledge transfer from linguistically similar high-resource languages (e.g., Spanish) (Arivazhagan et al., 2019).

To tackle the problem, we provide a more realistic hypothesis. Instead of studying the sampling ratios of each individual language, we focus on language groups with the following properties: **i) Minimal cross-group transfer:** The majority of cross-lingual transfer occurs within a group, with minimal transfer across groups. **ii) Data sufficiency:** Each group provides a substantial amount of data, reducing the need to model dynamics of low-resource languages. We find *language families* to be an intuitive and effective grouping, as they are defined based on linguistic similarities, and each language family contains multiple languages, mitigating the low-resource issues associated with individual languages.³ Then, we have the following hypothesis.

Hypothesis 1 *During the pretraining of a multilingual language model, the test cross-entropy loss of each language family only depends on its own sampling ratio, regardless of the sampling ratios of other languages jointly trained.*

Hypothesis testing. We use a controlled experiment to test our hypothesis. We train an LM on a data mixture containing three language families: Romance, Germanic and Slavic. In the training, we fix the sampling ratio of Romance to be either 0.2 or 0.5, and vary the ratios of the other two families. At the individual language level, one might expect high-resource languages like English (within the Germanic family) to transfer knowledge to related languages in the Romance family (e.g., Spanish, French). However, our hypothesis focuses on *cross-family transfer* instead of cross-lingual transfer among individual languages. In Figure 2 (left), we observe that with a fixed sampling ratio, the Romance loss does not noticeably change regardless of the combination ratios of Germanic and Slavic data. This stability indicates that the primary source of performance variation is the sampling ratio of the family itself, rather than cross-family interactions. This finding supports our hypothesis that cross-family transfer is minimal, making it feasible to model each language family’s loss as a function of its own sampling ratio. To strengthen our findings, we conduct the same experiment with three additional family combinations, detailed in Appendix C.

To further demonstrate that grouping by language families is an effective approach, we perform a similar experiment with *random groupings*. In this setup, both Group 1 and Group 2 contain languages from the Indic family. If our hypothesis about cross-family transfer holds, we would expect substantial transfer between these groups, since they share linguistic characteristics. As shown

³While language families are a natural grouping, other groupings based on criteria such as lexical overlap can also be considered, as long as they satisfy the two criteria.

216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269

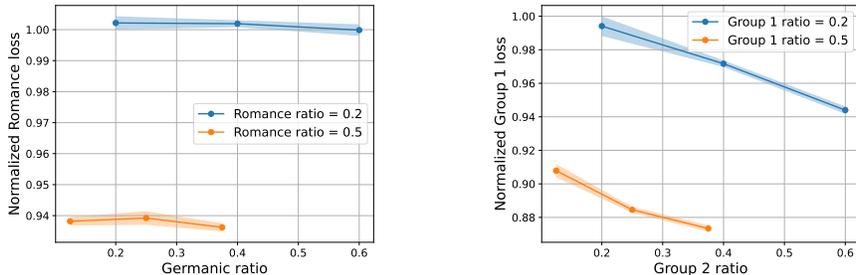


Figure 2: **Left:** The Romance loss remains stable as the Germanic sampling ratio varies, indicating minimal cross-family transfer and supporting our hypothesis that each language family’s performance is primarily influenced by its own sampling ratio. **Right:** In contrast, when both groups contain Indic languages, Group 1 loss decreases as Group 2 sampling ratio increases, demonstrating significant cross-group transfer. This underscores the importance of grouping by language families for accurate analysis. The loss values are normalized by the mean loss at $p = 0.2$ to align the plot scales. Shaded areas indicate standard deviation.

in Figure 2 (right), the performance of Group 1 improves with increasing sampling ratio of Group 2, which indicates significant cross-group transfer when languages from the same family are split into separate groups, highlighting the importance of proper family-based grouping. We include a comparison of the trajectory of losses during training in Appendix C to further validate the claims.

These experimental results validate our hypothesis, which enables a convenient simplification of Eq. 1: For each language family fam_i , we have

$$\mathcal{L}_{fam_i}(p) = \mathcal{L}_{fam_i}(p_{fam_i}),$$

where we can safely focus on the sampling ratio for each language family, rather than accounting for interactions across different families. Subsequently, for the ease of presentation, we omit the subscript “fam” and directly use \mathcal{L}_i and p_i to represent the loss and sampling ratio for the i -th language family.

3.3 FITTING THE RELATIONSHIP: $\mathcal{L}_i(p_i)$

In this section, we first study the relationship between the loss and sampling ratios given fixed model size and dataset size. The loss of a language family \mathcal{L}_i can be modeled by a power-law relationship:

$$\mathcal{L}_i(p_i) = \mathcal{L}_i^* \cdot p_i^{-\gamma_i}, \tag{2}$$

where both \mathcal{L}_i^* and γ_i are fixed parameters.

The choice of power-law formulation follows naturally from previous studies on scaling laws, which demonstrate that the loss exhibits a power-law behavior with respect to dataset size (Kaplan et al., 2020). Our proposed form extends this concept to the multilingual setting, where the sampling ratio p_i can be viewed as analogous to relative dataset size for each family. The power-law form captures the intuitive notion that increasing the sampling ratio p_i leads to diminishing returns in terms of reducing the test cross-entropy loss. In other words, as the amount of data for a language family increases, its marginal contribution to performance improvement decreases.

Interpretation of parameters. \mathcal{L}_i^* represents the test loss when a language family i constitutes the entire training dataset ($p_i = 1$). It indicates the baseline difficulty of modeling this family alone. As the model size N increases, \mathcal{L}_i^* typically decreases due to higher model capacity.

On the other hand, γ_i indicates the decay rate of loss for the i -th family given increasing proportion of the i -th family in the training data mixture. In general, a larger γ_i indicates that the language family benefits more from increasing sampling ratio and should be prioritized in the training mixture for an overall performance improvement.

Empirical validation. To empirically validate the power-law relationship, we train LMs with 397M non-embedding parameters across various data mixtures to obtain losses on 5 sampling ratios ($p_i \in \{0.25, 0.375, 0.625, 0.875, 1\}$) for each language family. An important implication of the language family independence hypothesis is that a single training run generates data points for all involved language families. For example, training a model with mixture such as ($p_{Romance} =$

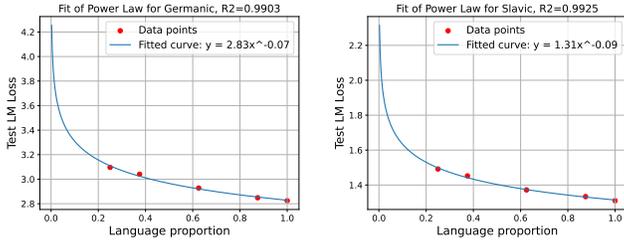


Figure 3: Fitting for Germanic and Slavic families with 50B tokens. The high R-squared values indicate an accurate fit of the power-law relationship.

Table 2: Fitted parameters for different language families for 397M model size and 50B token count.

Language	\mathcal{L}_i^*	γ_i
Romance	2.186	0.080
Slavic	1.314	0.094
Indic	0.635	0.131
Germanic	2.829	0.068
Sino-Tibetan	1.557	0.109

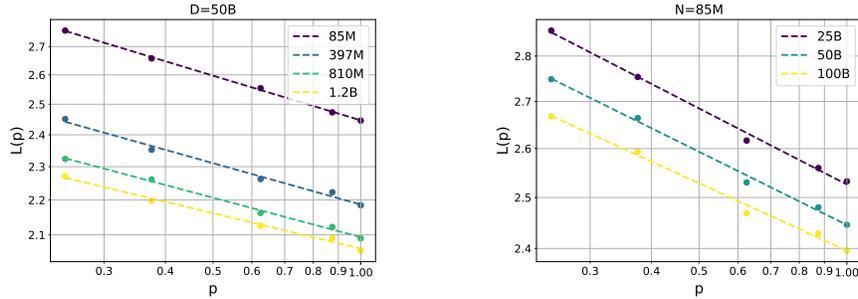


Figure 4: **Left:** For a fixed token count D , there is a linear relationship between $\log(\mathcal{L}_i)$ and $\log(p)$ for different values of model size N . **Right:** For a fixed model size N , there is a linear relationship between $\log(\mathcal{L}_i)$ and $\log(p)$ for different values of dataset size D . The parallel lines indicate that the decay rate γ_i does not depend on either N or D . Both axes are in log-scale.

0.375, $p_{Germanic} = 0.625$) provides us with 2 data points, one for each language family. By strategically using such bilingual models, we only need to train 15 runs instead of naively running 25 experiments to gather datapoints required for fitting all 5 language families across all 5 different p_i values.

Figure 3 demonstrates the results of this fitting, and the high R-squared values indicate an accurate fitting for each language family. The results for other families with different model sizes are similar in terms of R-squared, and are deferred to Appendix D.

3.4 FITTING THE JOINT RELATIONSHIP: $\mathcal{L}_i(N, D, p)$

Building on the results from the previous section, we extend the relationship by incorporating both model size N and dataset size D . We achieve this by expanding \mathcal{L}_i^* (the mono-family loss) from Section 3.3, as it depends on both N and D . Considering that γ_i could also depend on N and D , we rewrite Eq. 2 into

$$\mathcal{L}_i(N, D, p_i) = \mathcal{L}_i^*(N, D) \cdot p_i^{-\gamma_i(N, D)}. \quad (3)$$

First, we show that γ_i is independent of both N and D by examining the equation in the log scale:

$$\log(\mathcal{L}_i(N, D, p_i)) = \log(\mathcal{L}_i^*(N, D)) - \gamma_i(N, D) \log(p_i).$$

Intuitively, when varying N and D , if the slope remains constant, then γ_i is independent of them. In Figure 4, we observe that given a fixed D , $\gamma_i(N, D)$ does not change as N varies, confirming its independence from N . Similarly, the slope remains constant when N is fixed and D changes, verifying that $\gamma_i(N, D)$ is also independent of D . Thus, we can simplify Eq. 3 into

$$\mathcal{L}_i(N, D, p_i) = \mathcal{L}_i^*(N, D) \cdot p_i^{-\gamma_i}. \quad (4)$$

Next, we investigate the form of $\mathcal{L}_i^*(N, D)$, which represents the mono-family performance as a function of model size N and dataset size D . To do this, we leverage existing monolingual scaling

324 results from Hoffmann et al. (2022):

$$325 \quad \mathcal{L}(N, D) = E + \frac{A}{N^\alpha} + \frac{B}{D^\beta}, \quad (5)$$

327 where E, A, B, α, β are fixed parameters. The functional form of this law is universal and applicable
328 to any dataset, and the specific values of these parameters are dataset dependent. Thus, we directly
329 apply it to Eq. 4, and arrive at the following joint law:

$$330 \quad \mathcal{L}_i(N, D, \mathbf{p}) = \left(E_i + \frac{A_i}{N^{\alpha_i}} + \frac{B_i}{D^{\beta_i}} \right) p_i^{-\gamma_i}, \quad (6)$$

332 where $E_i, A_i, B_i, \alpha_i, \beta_i, \gamma_i$ are fixed parameters specific to each language family, all of which are
333 *independent* of N and D . The justification of this functional form can be found in Appendix E.

334 **Comparison with previous works.** The closest prior work to ours (Fernandes et al., 2023) introduce
335 a multilingual scaling law in neural machine translation (NMT). They study a *bilingual* setting,
336 translating English into Chinese or German. Their scaling law is expressed as:

$$337 \quad \mathcal{L}_i(N, p) = \beta_{p,i} N^{-a_i} + \mathcal{L}_\infty^{(i)}, \quad (7)$$

339 where $\mathcal{L}_\infty^{(i)}$ and a_i are fixed parameters, $\beta_{p,i}$ is a parameter *dependent* on the sampling ratio p , and p
340 is a *scalar* instead of a probability vector as in our setting. While this approach captures the effect
341 of model size on bilingual translation tasks, our formulation offers several key improvements and
342 broadens the scope in multiple dimensions:

- 343 • **Generalized framework:** Our scaling law applies to general-purpose language modeling
344 tasks, whereas their work is focused on a specialized NMT setting with encoder-decoder
345 architectures. The encoder-decoder architecture has limited use cases outside of NMT,
346 limiting the applicability of their findings. In contrast, our scaling law is relevant to a
347 broader spectrum of language modeling tasks, which is crucial given the prevalence of
348 decoder only language models in recent times (Achiam et al., 2023; Jiang et al., 2023; Dubey
349 et al., 2024; Yang et al., 2024; Abdin et al., 2024)
- 350 • **Multilingual scalability:** We significantly extend the scope to 23 languages across 5
351 language families, whereas Fernandes et al. (2023) focus on a bilingual setting. Our
352 proposed law extends naturally to an arbitrary number of languages by considering cross-
353 lingual transfer. In contrast, Eq. 7 does not generalize for more than 2 languages, as it lacks
354 a mechanism for incorporating multilingual interactions.
- 355 • **Incorporation of Dataset Size:** Our scaling law explicitly incorporates the effect of dataset
356 size, enabling a joint analysis of how both model size and data quantity impact performance.
357 This is not considered in Eq. 7, limiting its ability to account for the full range of factors
358 affecting multilingual model performance.
- 359 • **Simpler and more predictive form:** In Eq. 7, the parameter $\beta_{p,i}$ is dependent on the
360 sampling ratio p itself, making the equation not predictive for new sampling ratios. For
361 unseen values of p , additional heuristics or retraining would be required to determine
362 the corresponding $\beta_{p,i}$. In contrast, our proposed law decouples the dependency on p_i
363 through the power-law exponent γ_i , which remains constant across different sampling ratios.
364 This makes our model more straightforward and fully predictive without requiring extra
365 information for new values of p_i .

366 Overall, our proposed scaling law offers a more versatile and comprehensive framework for multilin-
367 gual and general language modeling.

369 3.5 FITTING THE PARAMETRIC SCALING LAW

370 Subsequently, we fit parameters in Eq. 6 to describe the multilingual scaling. To estimate the param-
371 eters, we deploy a similar strategy as Hoffmann et al. (2022) to use the Huber loss⁴ ($\delta = 0.001$) (Huber,
372 1964), as it is robust to outliers. The estimation is done by the BFGS algorithm (Nocedal, 1980). We
373 present the fitting in Figure 5, where the fitted curves highlight that our proposed power law captures
374 the relationship between loss, model size, dataset size and sampling ratios well. Furthermore, the right
375 panel shows that our scaling law accurately predicts performance. These results confirm the effective-
376 ness of our scaling law across. Fitting results for additional families can be found in Appendix D.2.

377 ⁴Huber loss is only used in optimization of parameter fitting, which is different from the cross-entropy loss \mathcal{L} .

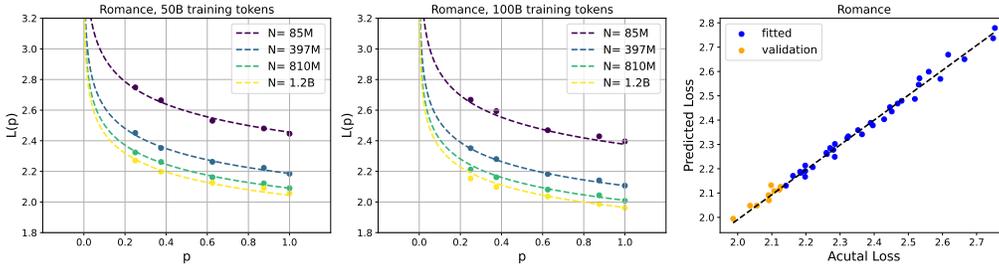


Figure 5: **Left & Middle:** Fitted law on 50B and 100B training tokens, showing that the scaling law well captures the relationship between loss, model size, dataset size and sampling ratios. **Right:** Predicted vs. actual losses with our scaling law. The fitting uses the top 80% of the loss data (blue points) and then validated on the lower 20% (orange points). The strong alignment between the predicted and actual losses demonstrates the predictive accuracy of the scaling law.

4 OPTIMAL ALLOCATION OF MULTILINGUAL SAMPLING RATIOS

With the general form of the total loss established, we proceed to compute the optimal data mixture defined by \mathbf{p} by solving the following optimization problem:

$$\underset{\mathbf{p} \in \Delta_n}{\text{minimize}} \quad \mathcal{L}(\mathbf{p}) = \sum_i w_i \mathcal{L}_i(p_i) = \sum_i w_i \mathcal{L}_i^* p_i^{-\gamma_i}, \quad (8)$$

where w_i represents the user-defined preference of language family i . This formulation allows us to find the optimal sampling ratios \mathbf{p}_w^* that minimize the total loss, taking into account the importance of each language family as specified by the preference vector \mathbf{w} .

Analytical (approximate) solution. The optimization problem can be solved analytically using the Lagrange multipliers method. Under the assumption $\gamma_i \ll 1^5$ we can obtain the approximate optimal p_i^* as (details presented in Appendix F)

$$p_i^* \approx \frac{w_i \mathcal{L}_i^* \gamma_i}{\sum_{i=1}^n w_i \mathcal{L}_i^* \gamma_i}.$$

The solution shows that the optimal sampling ratios only depend on the products $w_i \mathcal{L}_i^* \gamma_i$, meaning that the combination of the power law exponent and constant fully determines the ratios. Furthermore, if we use $w_i = 1/\mathcal{L}_i^*$, the optimal ratios do not depend on N, D . In this case, the approximate solution sheds even more insight, as the optimal ratios depend only on the relative ratio of $\gamma_i / \sum_{i=1}^n \gamma_i$.

Numerical solution. Alternatively, one can directly use off-the-shelf numerical solver such as `scipy.optimize` to solve the optimization problem. We demonstrate that both methods result in similar optimal sampling ratios in Appendix F.

4.1 EXPERIMENTAL SETUP

Preference vector \mathbf{w} . We use two common choices of the preference vector: **i) Unweighted sum:** All $w_i = 1$ indicating equal weight for all languages with no specific preference. **ii) Normalized sum:** $w_i = 1/\mathcal{L}_i(N, D, 1) = 1/\mathcal{L}_i^*(N, D)$. This is equivalent to a normalized sum of losses, where the loss of each language family is normalized by its mono-family performance. This approach compensates for differences in loss scales due to tokenizer vocabulary imbalances across languages (as seen in the varying \mathcal{L}_i^* values in Table 2). Normalizing by this loss balances the training across language families. This normalization technique is often utilized in the literature of multi-task learning, where the losses for different tasks vary in scales (Chen et al., 2018; He et al., 2024).

Baselines. We compare with three baseline weighting strategies: **i) Uniform sampling:** Each language family has equal sampling ratio, i.e., $p_i = 1/n$. **ii) Proportional to token count:** The sampling ratio is proportional to the token count of each family i.e., $p_i = D_i/D$, where D_i is the token count for the i -th family, and D is the total token count. **iii) Smoothed sampling** Conneau &

⁵Table 2 shows that $\gamma_i < 0.15$, so this is not an unreasonable assumption

Table 3: Sampling ratios and the resulting test cross-entropy loss for the 85M multilingual LM trained on 5 language families, with the total loss computed by the unweighted sum.

	p_{Ro}	p_{Sl}	p_{In}	p_{Ge}	p_{Si}	\mathcal{L}_{Ro}	\mathcal{L}_{Sl}	\mathcal{L}_{In}	\mathcal{L}_{Ge}	\mathcal{L}_{Si}	Total loss
Uniform	0.200	0.200	0.200	0.200	0.200	2.802	1.747	0.886	3.468	2.071	10.974
By tokens	0.265	0.245	0.079	0.281	0.130	2.747	1.715	0.989	3.407	2.168	11.025
$\alpha = 0.5$	0.236	0.227	0.129	0.243	0.165	2.776	1.732	0.933	3.444	2.127	11.012
Ours	0.246	0.180	0.124	0.231	0.218	2.765	1.762	0.932	3.443	2.067	10.969

Table 4: Sampling ratios and the resulting test cross-entropy loss for the 85M multilingual LM. Losses are normalized by each family’s mono-family performance $\hat{\mathcal{L}}_i = \mathcal{L}_i(N, D, \mathbf{p}) / \mathcal{L}_i^*(N, D)$.

	p_{Ro}	p_{Sl}	p_{In}	p_{Ge}	p_{Si}	$\hat{\mathcal{L}}_{Ro}$	$\hat{\mathcal{L}}_{Sl}$	$\hat{\mathcal{L}}_{In}$	$\hat{\mathcal{L}}_{Ge}$	$\hat{\mathcal{L}}_{Si}$	Total normalized loss
Uniform	0.200	0.200	0.200	0.200	0.200	1.145	1.180	1.261	1.142	1.183	5.912
By tokens	0.265	0.245	0.079	0.281	0.130	1.123	1.158	1.407	1.090	1.238	6.017
$\alpha = 0.5$	0.236	0.227	0.129	0.243	0.165	1.135	1.170	1.328	1.102	1.215	5.950
Ours	0.166	0.189	0.298	0.127	0.220	1.167	1.195	1.214	1.145	1.174	5.895

Lample (2019): A parameterized approach that balances between uniform and token count sampling. It introduces a parameter α to adjust the influence of token counts:

$$p_i = \frac{q_i^\alpha}{\sum_{j=1}^n q_j^\alpha} \text{ with } q_i = \frac{D_i}{D}.$$

Here, $\alpha = 0$ corresponds to uniform sampling, and $\alpha = 1$ corresponds to sampling by token count. Intermediate values of α upweigh smaller families and reduce bias towards larger ones. We use the common choice of $\alpha = 0.5$.

4.2 EMPIRICAL RESULTS

We demonstrate the result of using the optimal sampling ratios \mathbf{p}^* obtained by solving optimization problem 8. Here, we fix $D = 50B$, as we empirically find that this dataset size is sufficient to ensure near convergence across all model sizes. We first solve Eq. 8 with $N = 85M$, and verify its optimality by comparing the test cross-entropy loss of LMs trained on the resulting data mixture against the baseline methods. Next, leveraging the observed invariance of decay rates across model sizes (as shown in Section 3.4), we validate that the optimal sampling ratios derived from the 85M model generalize effectively to larger models, specifically to the 1.2B model.

Unweighted sum. In Table 3, we present the per-family sampling ratios, individual family losses and the total unweighted sum of loss. The multilingual LM trained on the data mixture derived from our optimal sampling ratios \mathbf{p}^* achieves the lowest total loss compared with other baselines. However, it is evident that language families with inherently higher magnitude of cross-entropy losses (such as Romance and Germanic) are prioritized simply because their larger magnitudes have a greater influence on the final total loss. In contrast, families with smaller inherent losses (Indic) receive less emphasis, as a reduction in their loss does not significantly impact the overall total loss.

This imbalance indicates that the unweighted sum may not be the most appropriate way to evaluate the multilingual performance, as it skews the evaluation toward families with higher inherent loss magnitudes. Consequently, while our method minimizes the unweighted total loss, it may undervalue improvements in low-loss families. To better balance performance across all language families, the following normalized loss approach offers a more fair evaluation method.

Normalized sum. In Table 4, we present the result for the normalized sum of losses. Unlike the unweighted sum, where the overall performance is dominated by families with higher inherent loss scales, the losses here are normalized by their mono-family performance, i.e., $\hat{\mathcal{L}}_i(N, D, p_i) = \mathcal{L}_i(N, D, p_i) / \mathcal{L}_i^*(N, D)$. This normalization ensures that each family’s loss is evaluated relative to its performance ceiling, making the comparison more equitable. Note that in this setup, we expect the sampling ratios to be larger for families with larger decay rates γ_i , since the normalized loss follows the relationship $\hat{\mathcal{L}}_i(N, D, p_i) = p_i^{-\gamma_i}$. This means that prioritizing families with higher γ_i values leads to steeper reductions in loss as sampling ratios increase, resulting in a lower total

Table 5: Sampling ratios and the resulting test cross-entropy loss for the 1.2B multilingual LM, where the total loss is computed by the unweighted sum.

	p_{Ro}	p_{Sl}	p_{In}	p_{Ge}	p_{Si}	\mathcal{L}_{Ro}	\mathcal{L}_{Sl}	\mathcal{L}_{In}	\mathcal{L}_{Ge}	\mathcal{L}_{Si}	Total loss
Uniform	0.200	0.200	0.200	0.200	0.200	2.349	1.437	0.728	3.008	1.714	9.236
By tokens	0.265	0.245	0.079	0.281	0.130	2.262	1.379	0.803	2.905	1.759	9.108
$\alpha = 0.5$	0.236	0.227	0.129	0.243	0.165	2.309	1.414	0.761	2.963	1.743	9.190
Ours (85M)	0.246	0.180	0.124	0.231	0.218	2.289	1.424	0.751	2.953	1.687	9.104
Ours (1.2B)	0.207	0.182	0.123	0.249	0.240	2.313	1.421	0.752	2.941	1.674	9.101

Table 6: Sampling ratios and the resulting test cross-entropy loss for the 1.2B multilingual LM. Losses are normalized by each family’s mono-family performance $\hat{\mathcal{L}}_i = \mathcal{L}_i(N, D, p_i) / \mathcal{L}_i^*(N, D)$.

	p_{Ro}	p_{Sl}	p_{In}	p_{Ge}	p_{Si}	$\hat{\mathcal{L}}_{Ro}$	$\hat{\mathcal{L}}_{Sl}$	$\hat{\mathcal{L}}_{In}$	$\hat{\mathcal{L}}_{Ge}$	$\hat{\mathcal{L}}_{Si}$	Total normalized loss
Uniform	0.200	0.200	0.200	0.200	0.200	1.142	1.180	1.273	1.134	1.216	5.946
By tokens	0.265	0.245	0.079	0.281	0.130	1.100	1.133	1.405	1.095	1.248	5.982
$\alpha = 0.5$	0.236	0.227	0.129	0.243	0.165	1.123	1.161	1.331	1.117	1.237	5.970
Ours	0.170	0.188	0.297	0.126	0.219	1.151	1.176	1.218	1.160	1.198	5.904

normalized loss. Indeed, the order of sampling ratios in Table 4 aligns perfectly with the order of decay rates γ_i in Table 2. This confirms the influence of decay rates on the optimal sampling distribution.

Our optimal sampling strategy, p^* achieves the lowest total normalized loss, outperforming all other baselines. Notably, in contrast to the unweighted sum, the sampling ratios for families like Indic are significantly higher, reflecting the fact that Indic requires more data to reduce its normalized loss. Similarly, the Romance and Germanic families, which previously dominate the unweighted total loss due to their large inherent losses, now receive relatively lower sampling ratios, indicating that they need less focus in the normalized setting. This comparison demonstrates that the normalized loss provides a more balanced evaluation, ensuring that language families with smaller inherent losses are not underrepresented. Additionally, the generalization of our optimal sampling ratios across different scenarios confirms the robustness and effectiveness of our approach.

Generalization of optimality. We apply the optimal sampling ratios p^* derived from the 85M model to the larger 1.2B model to assess how well they generalize. From Table 5, the sampling ratios from the 85M model continue to outperform all other baselines. Furthermore, the total loss is comparable to the one achieved by the optimal sampling ratios fitted specifically for the 1.2B model. Both sets of sampling ratio exhibit a similar pattern, with lower weights for Indic (which has the least inherent loss) and higher weights for Germanic (which has the largest inherent loss).

For the normalized sum, since $\hat{\mathcal{L}}_i$ are all 1 due to normalization, the difference only lies in the decay rate γ_i . As shown in Section 3.3, γ_i is invariant in model scales, directly leading to the same optimal sampling ratios across model sizes. From Table 6, we can see that the resulting optimal sampling ratios achieve noticeably lower total loss compared to other baselines. The results demonstrate the robustness and transferability of the optimal ratios derived from smaller models, offering a more resource-efficient strategy for large-scale multilingual LM training.

5 CONCLUSIONS

In this work, we develop a comprehensive and scalable scaling law for multilingual language models, addressing the complexities of training with multiple languages. Through large-scale experiments involving over 100 models across 23 languages from 5 language families, we demonstrate that the test cross-entropy loss for each language family follows a predictable power-law relationship with model size, dataset size and sampling ratios. Importantly, we introduce and validate a novel hypothesis that decouples the interaction between language families, allowing us to model the performance of each family independently of others in the training mixture. This insight enables us to derive the optimal sampling ratios that minimize the overall multilingual loss, providing a practical data mixing strategy. Our results show that the optimal sampling ratios, computed from small models, generalize effectively to models that are several orders of magnitude larger, significantly reducing the need for resource-intensive data mixture selection in large-scale training. This offers a scalable and cost-effective method for optimizing multilingual LM training and opens up new avenues for future research in multilingual scaling laws and data optimization strategies.

REFERENCES

- 540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
- Marah Abdin, Sam Ade Jacobs, Ammar Ahmad Awan, Jyoti Aneja, Ahmed Awadallah, Hany Awadalla, Nguyen Bach, Amit Bahree, Arash Bakhtiari, Harkirat Behl, et al. Phi-3 technical report: A highly capable language model locally on your phone. *arXiv preprint arXiv:2404.14219*, 2024.
- Josh Achiam, Steven Adler, Sandhini Agarwal, Lama Ahmad, Ilge Akkaya, Florencia Leoni Aleman, Diogo Almeida, Janko Altenschmidt, Sam Altman, Shyamal Anadkat, et al. Gpt-4 technical report. *arXiv preprint arXiv:2303.08774*, 2023.
- Naveen Arivazhagan, Ankur Bapna, Orhan Firat, Dmitry Lepikhin, Melvin Johnson, Maxim Krikun, Mia Xu Chen, Yuan Cao, George Foster, Colin Cherry, et al. Massively multilingual neural machine translation in the wild: Findings and challenges. *arXiv preprint arXiv:1907.05019*, 2019.
- Liang Chen, Shuming Ma, Dongdong Zhang, Furu Wei, and Baobao Chang. On the pareto front of multilingual neural machine translation. *Advances in Neural Information Processing Systems*, 36, 2024.
- Zhao Chen, Vijay Badrinarayanan, Chen-Yu Lee, and Andrew Rabinovich. Gradnorm: Gradient normalization for adaptive loss balancing in deep multitask networks. In *International conference on machine learning*, pp. 794–803. PMLR, 2018.
- Alexis Conneau and Guillaume Lample. Cross-lingual language model pretraining. *Advances in neural information processing systems*, 32, 2019.
- Alexis Conneau, Kartikay Khandelwal, Naman Goyal, Vishrav Chaudhary, Guillaume Wenzek, Francisco Guzmán, Edouard Grave, Myle Ott, Luke Zettlemoyer, and Veselin Stoyanov. Unsupervised cross-lingual representation learning at scale. In Dan Jurafsky, Joyce Chai, Natalie Schluter, and Joel Tetreault (eds.), *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 8440–8451, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.747. URL <https://aclanthology.org/2020.acl-main.747>.
- Marta R Costa-jussà, James Cross, Onur Çelebi, Maha Elbayad, Kenneth Heafield, Kevin Heffernan, Elahe Kalbassi, Janice Lam, Daniel Licht, Jean Maillard, et al. No language left behind: Scaling human-centered machine translation. *arXiv preprint arXiv:2207.04672*, 2022.
- Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Amy Yang, Angela Fan, et al. The llama 3 herd of models. *arXiv preprint arXiv:2407.21783*, 2024.
- Angela Fan, Shruti Bhosale, Holger Schwenk, Zhiyi Ma, Ahmed El-Kishky, Siddharth Goyal, Mandeep Baines, Onur Celebi, Guillaume Wenzek, Vishrav Chaudhary, et al. Beyond english-centric multilingual machine translation. *Journal of Machine Learning Research*, 22(107):1–48, 2021.
- Patrick Fernandes, Behrooz Ghorbani, Xavier Garcia, Markus Freitag, and Orhan Firat. Scaling laws for multilingual neural machine translation. In *International Conference on Machine Learning*, pp. 10053–10071. PMLR, 2023.
- Behrooz Ghorbani, Orhan Firat, Markus Freitag, Ankur Bapna, Maxim Krikun, Xavier Garcia, Ciprian Chelba, and Colin Cherry. Scaling laws for neural machine translation. In *International Conference on Learning Representations*, 2022. URL https://openreview.net/forum?id=hR_SMu8cxCV.
- Mitchell A Gordon, Kevin Duh, and Jared Kaplan. Data and parameter scaling laws for neural machine translation. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pp. 5915–5922, 2021.
- Yifei He, Shiji Zhou, Guojun Zhang, Hyokun Yun, Yi Xu, Belinda Zeng, Trishul Chilimbi, and Han Zhao. Robust multi-task learning with excess risks. In *Proceedings of the 41st International Conference on Machine Learning*, volume 235 of *Proceedings of Machine Learning Research*, pp. 18094–18114. PMLR, 21–27 Jul 2024. URL <https://proceedings.mlr.press/v235/he24n.html>.

- 594 Tom Henighan, Jared Kaplan, Mor Katz, Mark Chen, Christopher Hesse, Jacob Jackson, Heewoo
595 Jun, Tom B Brown, Prafulla Dhariwal, Scott Gray, et al. Scaling laws for autoregressive generative
596 modeling. *arXiv preprint arXiv:2010.14701*, 2020.
597
- 598 Jordan Hoffmann, Sebastian Borgeaud, Arthur Mensch, Elena Buchatskaya, Trevor Cai, Eliza
599 Rutherford, Diego de las Casas, Lisa Anne Hendricks, Johannes Welbl, Aidan Clark, et al.
600 Training compute-optimal large language models. *arXiv preprint arXiv:2203.15556*, 2022.
- 601 Peter J. Huber. Robust Estimation of a Location Parameter. *The Annals of Mathematical Statistics*,
602 35(1):73 – 101, 1964. doi: 10.1214/aoms/1177703732. URL [https://doi.org/10.1214/
603 aoms/1177703732](https://doi.org/10.1214/aoms/1177703732).
604
- 605 Albert Q Jiang, Alexandre Sablayrolles, Arthur Mensch, Chris Bamford, Devendra Singh Chaplot,
606 Diego de las Casas, Florian Bressand, Gianna Lengyel, Guillaume Lample, Lucile Saulnier, et al.
607 Mistral 7b. *arXiv preprint arXiv:2310.06825*, 2023.
- 608 Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child, Scott
609 Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language models.
610 *arXiv preprint arXiv:2001.08361*, 2020.
611
- 612 Jakub Krajewski, Jan Ludziejewski, Kamil Adamczewski, Maciej Pióro, Michał Krutul, Szymon
613 Antoniak, Kamil Ciebiera, Krystian Król, Tomasz Odrzygóźdź, Piotr Sankowski, et al. Scaling
614 laws for fine-grained mixture of experts. *arXiv preprint arXiv:2402.07871*, 2024.
- 615 Viet Dac Lai, Chien Van Nguyen, Nghia Trung Ngo, Thuat Nguyen, Franck Dernoncourt, Ryan A
616 Rossi, and Thien Huu Nguyen. Okapi: Instruction-tuned large language models in multiple
617 languages with reinforcement learning from human feedback. *arXiv preprint arXiv:2307.16039*,
618 2023.
619
- 620 Jorge Nocedal. Updating quasi-newton matrices with limited storage. *Mathematics of computation*,
621 35(151):773–782, 1980.
- 622 Barun Patra, Saksham Singhal, Shaohan Huang, Zewen Chi, Li Dong, Furu Wei, Vishrav Chaudhary,
623 and Xia Song. Beyond English-centric bitexts for better multilingual language representation
624 learning. In Anna Rogers, Jordan Boyd-Graber, and Naoaki Okazaki (eds.), *Proceedings of the
625 61st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*,
626 pp. 15354–15373, Toronto, Canada, July 2023. Association for Computational Linguistics. doi:
627 10.18653/v1/2023.acl-long.856. URL [https://aclanthology.org/2023.acl-long.
628 856](https://aclanthology.org/2023.acl-long.856).
- 629 Libo Qin, Qiguang Chen, Yuhang Zhou, Zhi Chen, Yinghui Li, Lizi Liao, Min Li, Wanxiang Che, and
630 Philip S Yu. Multilingual large language model: A survey of resources, taxonomy and frontiers.
631 *arXiv preprint arXiv:2404.04925*, 2024.
632
- 633 Jack W Rae, Sebastian Borgeaud, Trevor Cai, Katie Millican, Jordan Hoffmann, Francis Song, John
634 Aslanides, Sarah Henderson, Roman Ring, Susannah Young, et al. Scaling language models:
635 Methods, analysis & insights from training gopher. *arXiv preprint arXiv:2112.11446*, 2021.
- 636 J. F. Ritt. On the zeros of exponential polynomials. *Trans. Amer. Math. Soc.*, 31:680 – 686,
637 1929. doi: 10.1090/S0002-9947-1929-1501506-6. URL [https://doi.org/10.1090/
638 S0002-9947-1929-1501506-6](https://doi.org/10.1090/S0002-9947-1929-1501506-6).
639
- 640 Shaden Smith, Mostofa Patwary, Brandon Norrick, Patrick LeGresley, Samyam Rajbhandari, Jared
641 Casper, Zhun Liu, Shrimai Prabhumoye, George Zerveas, Vijay Korthikanti, et al. Using deepspeed
642 and megatron to train megatron-turing nlg 530b, a large-scale generative language model. *arXiv
643 preprint arXiv:2201.11990*, 2022.
- 644 Romal Thoppilan, Daniel De Freitas, Jamie Hall, Noam Shazeer, Apoorv Kulshreshtha, Heng-Tze
645 Cheng, Alicia Jin, Taylor Bos, Leslie Baker, Yu Du, et al. Lamda: Language models for dialog
646 applications. *arXiv preprint arXiv:2201.08239*, 2022.
647
- A Vaswani. Attention is all you need. *Advances in Neural Information Processing Systems*, 2017.

Guillaume Wenzek, Marie-Anne Lachaux, Alexis Conneau, Vishrav Chaudhary, Francisco Guzmán, Armand Joulin, and Edouard Grave. CCNet: Extracting high quality monolingual datasets from web crawl data. In Nicoletta Calzolari, Frédéric Béchet, Philippe Blache, Khalid Choukri, Christopher Cieri, Thierry Declerck, Sara Goggi, Hitoshi Isahara, Bente Maegaard, Joseph Mariani, Hélène Mazo, Asuncion Moreno, Jan Odijk, and Stelios Piperidis (eds.), *Proceedings of the Twelfth Language Resources and Evaluation Conference*, pp. 4003–4012, Marseille, France, May 2020. European Language Resources Association. ISBN 979-10-95546-34-4. URL <https://aclanthology.org/2020.lrec-1.494>.

Ruicheng Xian, Heng Ji, and Han Zhao. Cross-lingual transfer with class-weighted language-invariant representations. In *International Conference on Learning Representations, 2022*.

An Yang, Baosong Yang, Binyuan Hui, Bo Zheng, Bowen Yu, Chang Zhou, Chengpeng Li, Chengyuan Li, Dayiheng Liu, Fei Huang, Guanting Dong, Haoran Wei, Huan Lin, Jialong Tang, Jialin Wang, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Ma, Jianxin Yang, Jin Xu, Jingren Zhou, Jinze Bai, Jinzheng He, Junyang Lin, Kai Dang, Keming Lu, Keqin Chen, Kexin Yang, Mei Li, Mingfeng Xue, Na Ni, Pei Zhang, Peng Wang, Ru Peng, Rui Men, Ruize Gao, Runji Lin, Shijie Wang, Shuai Bai, Sinan Tan, Tianhang Zhu, Tianhao Li, Tianyu Liu, Wenbin Ge, Xiaodong Deng, Xiaohuan Zhou, Xingzhang Ren, Xinyu Zhang, Xipin Wei, Xuancheng Ren, Xuejing Liu, Yang Fan, Yang Yao, Yichang Zhang, Yu Wan, Yunfei Chu, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, Zhifang Guo, and Zhihao Fan. Qwen2 technical report, 2024. URL <https://arxiv.org/abs/2407.10671>.

A DATASET DETAILS

The dataset details are introduced in Table 7. For all languages except English, we directly use the data from the CommonCrawl dataset (Conneau et al., 2020; Wenzek et al., 2020). For English data, we use a high-quality in-house dataset. For the multilingual training mixture, within each language families, we use the same smoothed sampling approach (Conneau & Lample, 2019) as introduced in Section 4.1 with $\alpha = 0.5$. Due to the massive size of the English data, we cap the proportion of English within Germanic to be 0.5. This is to ensure that the Germanic family is not dominated by English. After this capping, the “effective” total token counts for the Germanic family is around 152.48B, and we use this number for the experiments in Section 4.2. Otherwise, the proportion by token baseline will assign almost all weights to the Germanic family.

B MODEL SIZES AND HYPERPARAMETERS

Table 8 describes the detailed configuration of models used in our experiments.

We conduct all our experiments on NVIDIA A100 GPUs with 80GB memory. Training a 85M model with 50B tokens require approximately 256 GPU hours. According to Kaplan et al. (2020), as long as the model reaches convergence, the learning rate does not play a critical role. Thus, we do not tune the LR. For the 85M and 397M model, we start with the LR $2e-3$. For the 810M and 1.2B model, we start with the LR $1e-3$. Then, we apply a cosine decay schedule to decay the LR to be one-tenth of the starting LR.

C ADDITIONAL EXPERIMENTS

We repeat the hypothesis validation experiments as in Section 3.2 with [three other language family configurations](#): [{Romance, Indic, Slavic}](#), [{Germanic, Romance, Slavic}](#), [{Sino-Tibetan, Germanic, Slavic}](#), where the underlined language family has a fixed sampling ratio of either 0.2 or 0.5, and the other two families have varying ratios. From Figure 6, we still see that in all three cases, the hypothesis holds well, as the loss of the fixed family does not noticeably change when varying sampling ratios of other families. The result further validates Hypothesis 1.

Furthermore, we demonstrate the trajectory of the validation loss during training in Figure 7. This further shows that when grouping by language families, the performance of a language family only

Table 7: List of 23 languages in our study with division into 5 language families.

Family	Per family token counts (B)	Language	Code	Per-language token counts (B)
Germanic	1463.34	English	en	1390.50
		German	de	52.46
		Dutch	nl	15.25
		Danish	da	5.13
Romance	137.43	Spanish	es	46.82
		French	fr	45.98
		Italian	it	28.93
		Romanian	ro	12.41
		Catalan	ca	3.29
Slavic	126.77	Russian	ru	95.29
		Ukrainian	uk	20.55
		Slovak	sk	5.57
		Serbian	sr	2.87
		Croatian	hr	2.49
Indic	40.86	Hindi	hi	12.76
		Bengali	bn	9.49
		Nepali	ne	2.20
		Marathi	mr	2.02
		Tamil	ta	5.56
		Telugu	te	2.82
		Kannada	kn	2.37
Malayalam	ml	3.65		
Sino-Tibetan	67.41	Chinese	zh	67.41

Table 8: Model configurations.

# Layers	Hidden size	# Heads	Head dim	Total parameters
12	768	6	128	85,056,768
14	1536	12	128	396,645,248
21	1792	14	128	809,732,672
24	2048	16	128	1,208,604,160

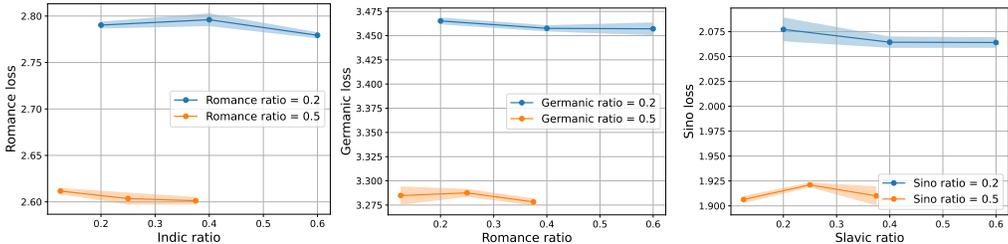


Figure 6: Further validation on three family combinations: {Romance, Indic, Slavic} (left), {Germanic, Romance, Slavic} (middle), {Sino-Tibetan, Germanic, Slavic} (right). In all three cases, the loss for the family with a fixed ratio does not vary with proportions of other jointly trained family.


depends on its own sampling ratio, regardless of the combinations of other jointly trained families. In contrast, cross-group transfer is evident when the languages within one family is split into two groups.

D FULL FITTING RESULTS

D.1 FITTING $\mathcal{L}_i(p_i)$


We present the full power law fitting for $\mathcal{L}_i(p_i)$ across all model sizes in Figures 8 to 11. For all model sizes, the fitting quality is consistent with low R-squared. For each language, the exponent is essentially invariant, further validating our claim. All fittings are performed with an off-the-shelf function fitting tool (`scipy.optimize.least_squares`).

756
757
758
759
760
761
762
763
764
765
766

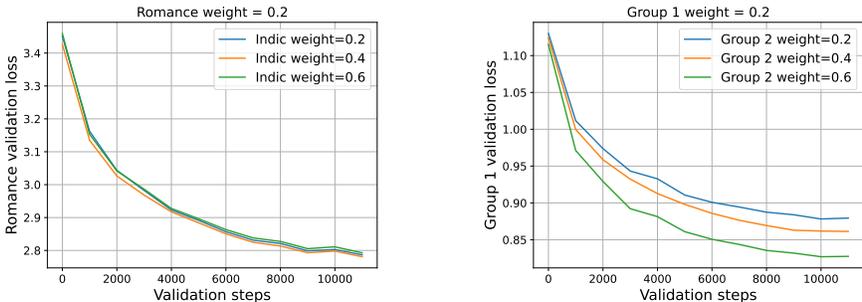

767 **Figure 7: Left:** The trajectories of the Romance validation loss are almost identical for different weight
768 combinations of other jointly trained families. **Right:** In contrast, when both groups contain Indic languages,
769 Group 1 loss is clearly higher when the Group 2 sampling ratio is lower, indicating significant cross-group
770 transfer.

771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788

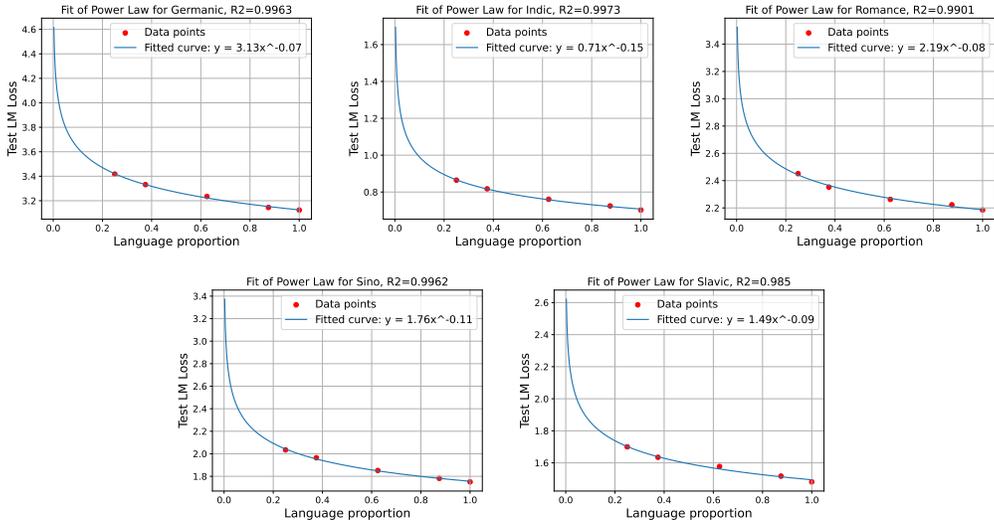

789 **Figure 8: Power law fitting for 5 language families on the 85M model.**

790
791
792 **D.2 FITTING $\mathcal{L}_i(N, D, p_i)$**

793
794
795 **Table 9: Values of the fitted coefficients for all families. The validation value on the last column \mathcal{L}_i^***
796 **is calculated using $N = 397M, D = 50B$. Also values assume N in Millions and D in Billions.**

797

Language family	E	A	B	α	β	γ	val \mathcal{L}_i^*
Romance	1.303	2.509	2.186	0.229	0.557	0.078	2.186
Slavic	0.001	1.561	1.240	0.186	0.112	0.093	1.311
Indic	0.001	0.782	0.691	0.194	0.152	0.140	0.626
Germanic	1.696	2.708	2.045	0.192	0.512	0.065	2.829
Sino-Tibetan	0.243	2.018	1.010	0.143	0.211	0.115	1.542

803
804
805
806
807
808
809

We present the full list of our fitted parameters in Table 9. The fitting is done by jointly estimating $E, A, B, \alpha, \beta, \gamma$ together. Thus, the values slightly deviate from Table 2. One can alternatively fit γ first, as it is the only parameter that requires empirical data with varying sampling ratios p . Then, for all of E, A, B, α, β , they can be fitted purely with mono-family losses.

We produce similar plots as Figure 5 for all language families in Figure 12. Overall, the scaling law captures the relationship very well.

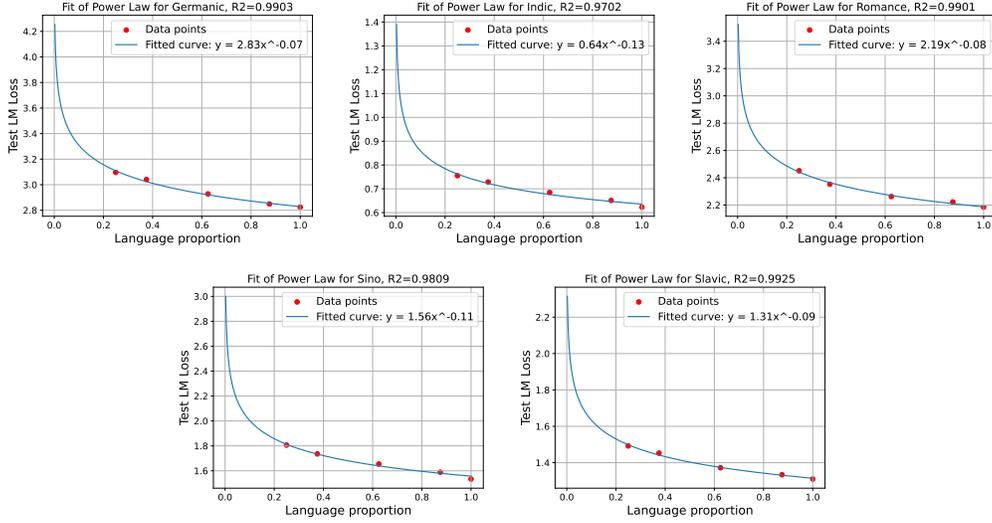


Figure 9: Power law fitting for 5 language families on the 397M model.

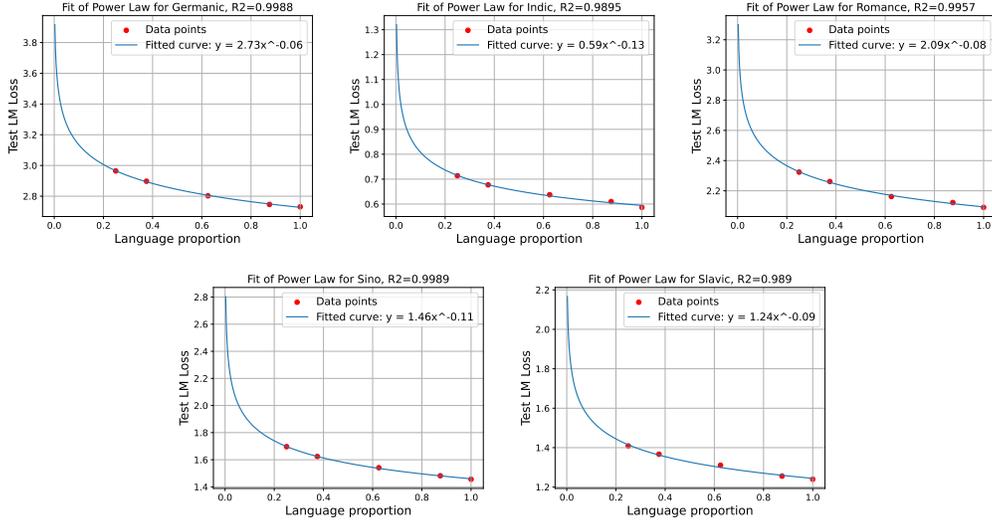


Figure 10: Power law fitting for 5 language families on the 810M model.

E JUSTIFICATION ON THE FORM OF $\mathcal{L}_i(N, D, p)$

From Section 3.4, we already know that the relationship between \mathcal{L} , N , D , p follow the form

$$\mathcal{L}_i(N, D, p_i) = \mathcal{L}_i^*(N, D) \cdot p_i^{-\gamma_i}. \quad (9)$$

For simplicity, we omit the subscript i for E_i , A_i , B_i , α_i , β_i , γ_i , \mathcal{L}_i , which are family dependent.

Recall the Chinchilla scaling law

$$\mathcal{L}(N, D) = E + \frac{A}{N^\alpha} + \frac{B}{D^\beta} \quad (10)$$

Since we know that separate scaling laws are valid for given p , in the general form, the parameters in Eq. 10 can be dependent on the sampling ratio p :

$$\mathcal{L}(N, D, p) = E(p) + \frac{A(p)}{N^{\alpha(p)}} + \frac{B(p)}{D^{\beta(p)}} \quad (11)$$

864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917

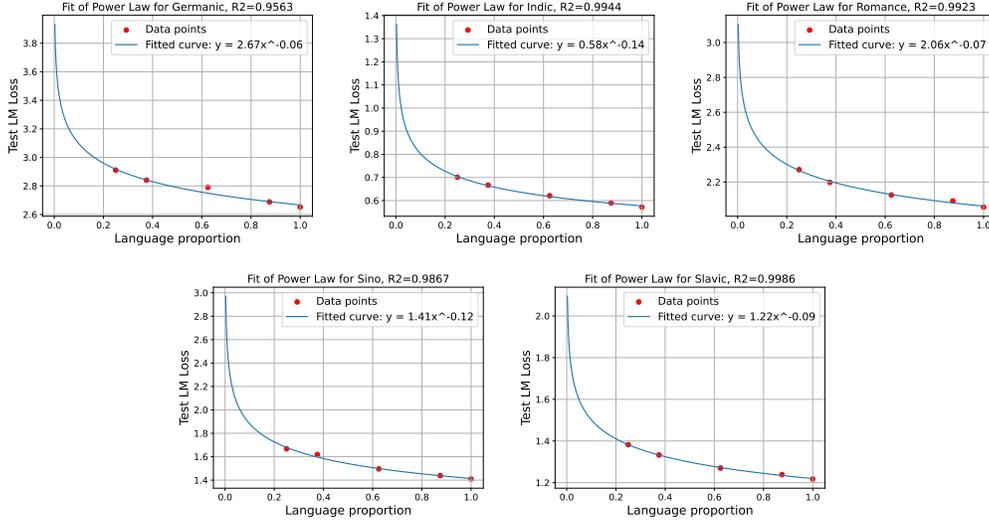


Figure 11: Power law fitting for 5 language families on the 1.2B model.

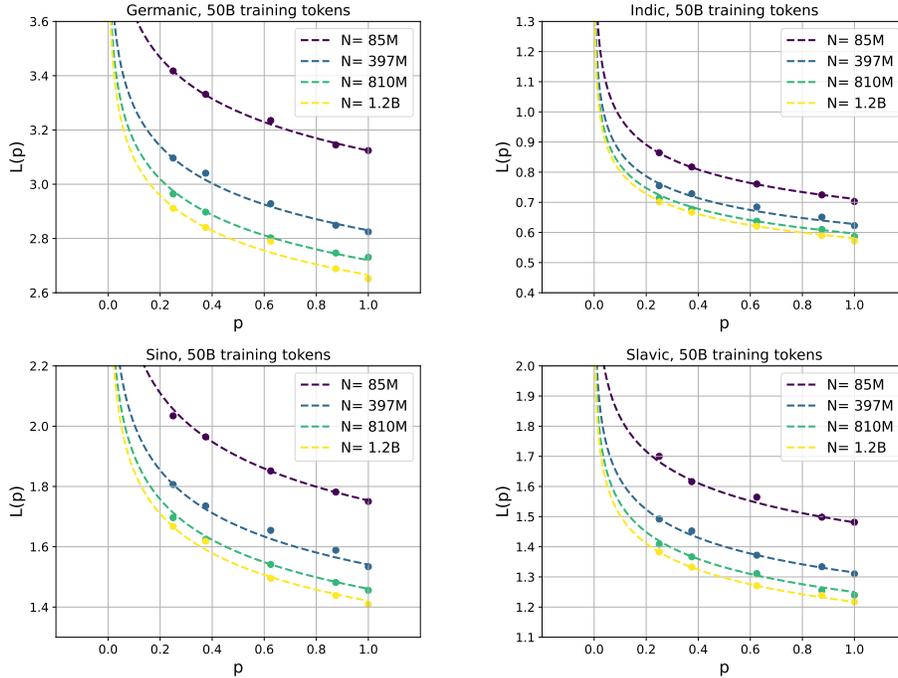


Figure 12: Joint power law fitting for 4 language families at 50B tokens across all model sizes.

Following the above observation that models with given p obey Chinchilla scaling laws given by Eq. 10, the key question that arises is how the general notion of sampling ratio p can be incorporated into the joint scaling law. Moreover, the scaling law formula from Eq. 11 for constant N and D has to be representable by Eq. 9. It is anticipated to align with the latter, consisting of distinct power laws, each with specific parameters for different N and D values. Consequently, the objective is to identify a function that fulfills these criteria

$$\mathcal{L}(N, D, p) = \mathcal{L}^*(N, D)p^{-\gamma(N, D)} = E(p) + \frac{A(p)}{N^{\alpha(p)}} + \frac{B(p)}{D^{\beta(p)}} \quad (12)$$

With this in mind, we aim to determine which of these parameters (on RHS) remain independent of p and identify the functional form of the others.

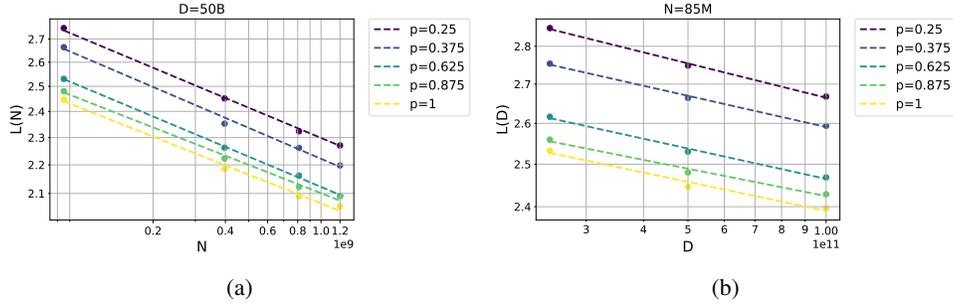


Figure 13: **(a)** For a fixed token count, there is a linear relationship between $\log \mathcal{L}$ and $\log(N)$ for different values of sampling ratio p . Both axes are in the log-scale. **(b)** For a fixed model size, there is a linear relationship between $\log \mathcal{L}$ and $\log(D)$ for different values of sampling ratio p . Both axes are in the log-scale. The lines are nearly parallel, indicating that α and β do not depend on p .

Model Size N for different Sampling Ratio p . As seen in Figure 13a, we observe the linear relationship between $\log N$ and $\log \mathcal{L}$ and since the lines are parallel for any given p , the slope α (Eq. 11) is independent of the sampling ratio p . Therefore we can assume that $\alpha(p) = \alpha$ is constant.⁶

Dataset size D for different Sampling Ratio p . As seen in Figure 13b, we observe the linear relationship between $\log D$ and $\log \mathcal{L}$ and since the lines are parallel for any given p , the slope β (Eq. 11) is independent of the sampling ratio p . Therefore we can assume that $\beta(p) = \beta$ is constant.

Infinite model size N and dataset size D . Consider the limit of Eq. 12 where $N, D \rightarrow \infty$, we get the functional form of $E(p)$:

$$E(p) = \mathcal{L}^*(\infty, \infty)p^{-\gamma} = c_E p^{-\gamma} \quad (13)$$

where $c_E := \mathcal{L}^*(\infty, \infty)$ is a constant.

Infinite dataset size D . Consider the limit of Eq. 12 where $D \rightarrow \infty$, plugging in Eq. 13, taking logs of both sides and moving sides:

$$\log A(p) + \gamma \log p = \alpha \log N + \log(c_{A'}(N) - c_E) \quad (14)$$

where $c_{A'}(N) := \mathcal{L}^*(N, \infty)$ only depends on N .

The LHS of Eq. 14 only depend on p , whereas the RHS only depends on N so they should both equal some constant, c_A (this step relies on our proof above that α, β and γ are independent of N, D and p), resulting in the functional form of $A(p)$

$$A(p) = c_A p^{-\gamma} \quad (15)$$

Infinite dataset size N . We can consider the limit of Eq. 12 where $N \rightarrow \infty$ and by a symmetric argument to above (D instead of N) we get the functional form of $B(p)$

$$B(p) = c_B p^{-\gamma} \quad (16)$$

Plugging the functional forms of $E(p), A(p)$ and $B(p)$ and reverting back to E, A, B instead of c_E, c_A, c_B and adding back the omitted subscript i , we obtain the final functional form for the joint scaling law:

$$\mathcal{L}_i(N, D, p_i) = \left(E_i + \frac{A_i}{N^{\alpha_i}} + \frac{B_i}{D^{\beta_i}} \right) p_i^{-\gamma_i}.$$

⁶Strictly speaking, for a fixed D , $\log(\mathcal{L}(N) - c_{B'}(p)) = \log A(p) - \alpha(p) \log N$ where $c_{B'}(p)$ is a constant dependant on p . However, note that $\log(\mathcal{L}(N)) - \frac{c_{B'}(p)}{\mathcal{L}(N)} \leq \log(\mathcal{L}(N) - c_{B'}(p)) \leq \log(\mathcal{L}(N))$. Hence $-\alpha(p) \log(N) + \log A(p) \leq \log(\mathcal{L}(N)) \leq -\alpha(p) \log(N) + \log A(p) + \frac{c_{B'}(p)}{\mathcal{L}(N)}$. Empirically, we found $\log(\mathcal{L}(N)) = m \log(N) + c$ to fit well, i.e for large enough N , $\frac{c_{B'}(p)}{\mathcal{L}(N)}$ behaves more or less like a constant. Because of that, we assume the functional form of $(\log(\mathcal{L}(N)) = -\alpha(p) \log(N) + c(p))$ ansatz. The fact that $\alpha(p)$ is independent of p follows from the fact that for different values of p , the slope is constant.

F OPTIMAL SAMPLING RATIOS ANALYTIC SOLUTION

We use Lagrange multipliers to find the point of minimum weighted loss, \mathbf{p}^* . We set $\Lambda(\mathbf{p}, \lambda) = \mathcal{L} + \lambda g$ and require that

$$\begin{aligned} \frac{\partial \Lambda(\mathbf{p}, \lambda)}{\partial \mathbf{p}} &= 0 \\ \frac{\partial \Lambda(\mathbf{p}, \lambda)}{\partial \lambda} &= 0 \end{aligned} \quad (17)$$

which gives a system of n equations $i = 1, \dots, n$ such that:

$$\frac{\partial}{\partial p_i} \left[\sum_i w_i \mathcal{L}_i^* p_i^{-\gamma_i} + \lambda \left(\sum_i p_i - 1 \right) \right] = 0, \quad (18)$$

Carrying out the differentiation, together with the constraint results in a system of $n + 1$ equations with $n + 1$ variables $(p_1, \dots, p_n, \lambda)$ that we can solve:

$$\begin{aligned} -w_i \mathcal{L}_i^* \gamma_i p_i^{-(1+\gamma_i)} + \lambda &= 0, \text{ for } i = 1, \dots, n \\ p_1 + \dots + p_n &= 1 \end{aligned} \quad (19)$$

Rearranging the first n equations of Eq. 19 we get:

$$p_i = (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} \lambda^{-\frac{1}{1+\gamma_i}} \quad (20)$$

and plugging it to the last equation:

$$\sum_{i=1}^n (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} \lambda^{-\frac{1}{1+\gamma_i}} - 1 = 0 \quad (21)$$

And we are done with proving the implicit solution. It is worth noting that the polynomial in Eq. 21 is called an exponential polynomial Ritt (1929), however considering the solution to those is out of the scope of this paper.

The bordered Hessian matrix in this case is:

$$\mathbf{H} = \begin{bmatrix} 0 & \frac{\partial g}{\partial p_1} & \frac{\partial g}{\partial p_2} & \dots & \frac{\partial g}{\partial p_n} \\ \frac{\partial g}{\partial p_1} & \frac{\partial^2 \Lambda}{\partial p_1^2} & \frac{\partial^2 \Lambda}{\partial p_1 \partial p_2} & \dots & \frac{\partial^2 \Lambda}{\partial p_1 \partial p_n} \\ \frac{\partial g}{\partial p_2} & \frac{\partial^2 \Lambda}{\partial p_2 \partial p_1} & \frac{\partial^2 \Lambda}{\partial p_2^2} & \dots & \frac{\partial^2 \Lambda}{\partial p_2 \partial p_n} \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ \frac{\partial g}{\partial p_n} & \frac{\partial^2 \Lambda}{\partial p_n \partial p_1} & \frac{\partial^2 \Lambda}{\partial p_n \partial p_2} & \dots & \frac{\partial^2 \Lambda}{\partial p_n^2} \end{bmatrix} = \begin{bmatrix} 0 & 1 & 1 & \dots & 1 \\ 1 & \frac{\partial^2 \Lambda}{\partial p_1^2} & 0 & \dots & 0 \\ 1 & 0 & \frac{\partial^2 \Lambda}{\partial p_2^2} & \dots & 0 \\ \vdots & \vdots & \vdots & \ddots & \vdots \\ 1 & 0 & 0 & \dots & \frac{\partial^2 \Lambda}{\partial p_n^2} \end{bmatrix} \quad (22)$$

with

$$\frac{\partial^2 \Lambda}{\partial p_i^2} = w_i \mathcal{L}_i^* \gamma_i (1 + \gamma_i) p_i^{-(2+\gamma_i)} \quad (23)$$

we have

$$|\mathbf{H}| = - \sum_{i=1, \dots, n} \frac{\partial^2 \Lambda}{\partial p_1^2} \frac{\partial^2 \Lambda}{\partial p_2^2} \dots \frac{\partial^2 \Lambda}{\partial p_{i-1}^2} \frac{\partial^2 \Lambda}{\partial p_{i+1}^2} \dots \frac{\partial^2 \Lambda}{\partial p_n^2} \quad (24)$$

Each of the terms on 23 is positive for all $p_i \in (0, 1]$ ($\mathcal{L}_i^*, \gamma_i > 0$) so the determinant of the bordered Hessian is a negative sum of positive products which is always negative meaning the solution we find on equation 19 is a always minimum as required.

Now consider the first order Taylor polynomial for $\lambda^{-\frac{1}{1+\gamma_i}}$ around $\gamma_i = 0$

1026

1027

1028

1029

1030

1031

$$\begin{aligned} \left(\frac{1}{\lambda}\right)^{\frac{1}{1+\gamma_i}} &= \frac{1}{\lambda} + \gamma_i \frac{\log \lambda}{\lambda} + \mathcal{O}(\gamma_i^2) \\ &\approx \frac{1}{\lambda} + \gamma_i \frac{\log \lambda}{\lambda} \end{aligned} \quad (25)$$

1032

Plugging this back into Eq. 21, we get

1033

1034

1035

1036

1037

1038

1039

1040

Finally, taking the first order Taylor polynomial for $\log \lambda$ around $\lambda = 1$, we have

1042

1043

1044

$$\begin{aligned} \log \lambda &= (\lambda - 1) + \mathcal{O}((\lambda - 1)^2) \\ &\approx (\lambda - 1) \end{aligned} \quad (27)$$

1045

Plugging this back into Eq. 26, we get

1046

1047

1048

1049

1050

1051

1052

1053

1054

1055

1056

$$\begin{aligned} \sum_{i=1}^N (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} + (\lambda - 1) \left(\sum_{i=1}^N \gamma_i (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} \right) &= \lambda \\ \lambda &= \frac{\sum_{i=1}^N (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} (1 - \gamma_i)}{1 + \sum_{i=1}^N \gamma_i (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}}} \\ p_i &= \left(\frac{w_i \mathcal{L}_i^* \gamma_i \left(1 + \sum_{i=1}^N \gamma_i (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} \right)}{\sum_{i=1}^N (w_i \mathcal{L}_i^* \gamma_i)^{\frac{1}{1+\gamma_i}} (1 - \gamma_i)} \right)^{\frac{1}{1+\gamma_i}} \end{aligned} \quad (28)$$

1057

For small γ_i that also agrees with the zero order approximation

1058

1059

1060

1061

1062

Table 10: Comparison of optimal sampling ratios obtained from the numerical solver and the analytical solution.

1063

1064

1065

1066

1067

1068

1069

1070

1071

1072

Here, we demonstrate that this approximate analytical solution has similar resulting optimal sampling ratios as the numerical solution. As in Table 10, the sampling ratios are indeed similar.

1073

G LIMITATIONS

1074

1075

1076

1077

1078

1079

One limitation of our work is that while the scaling law predicts the performance well in most cases, its utility may diminish when dealing with very small N , D and p values. For instance, using the formulation in Eq. 2, setting $p_i = 0$ results in an infinite loss. However, in reality, even if a training mixture contains no data for a particular family, its test cross-entropy loss is likely to be non-vacuous, as some general language information can still be transferable across families. In such cases, the resulting loss will be entirely dependent on cross-family transfer, which is challenging to quantify. For

1080 example, intuitively, if the test language family is Germanic, the Romance mono-family model might
1081 perform noticeably better than the Sino-Tibetan mono-family model, due to linguistic similarities.
1082 Consequently, there may not be a fixed value associated with $\mathcal{L}_i(p_i = 0)$ in our formulation.

1083 Similarly, for small D values, the risk of overfitting may need to be explicitly modeled, as suggested
1084 in Chen et al. (2024). Note that this issue is more pronounced when modeling individual languages,
1085 as low-resource languages suffer more from limited data. In contrast, language families are less
1086 affected due to the abundance of data within each family.

1087 On the other hand, small N values are less problematic, as scaling laws are primarily intended to
1088 predict performance for larger models. We have demonstrated that our formulation works well even
1089 for relatively small models, such as those with 85M parameters.
1090

1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133