

Anomaly Detection using Cascade Variational Autoencoder Coupled with Zero Shot Learning

Gokul Ramasamy

Arizona State University, Tempe, AZ, USA

GRAMASAM@ASU.EDU

Bhavik N. Patel

Mayo Clinic, Phoenix, AZ, USA

PATEL.BHAVIK@MAYO.EDU

Imon Banerjee

Mayo Clinic, Phoenix, AZ, USA

BANERJEE.IMON@MAYO.EDU

Abstract

Detection of anomalies before they are included in the downstream diagnosis/prognosis models is an important criterion for maintaining the medical AI imaging model performance across internal and external datasets. However, the core challenges are: (i) given the infinite variations of possible anomaly, curation of training data is in-feasible; (ii) making assumptions about the types of anomalies are often hypothetical. We propose an unsupervised anomaly detection model using a cascade variational autoencoder coupled with a zero-shot learning (ZSL) network that maps the latent vectors to semantic attribute space. We present the performance of the proposed model on two different use cases – skin images and chest radiographs and also compare against the same class of state-of-the-art generative OOD detection models.

Keywords: Anomaly detection, OOD, Zero-shot learning, medical imaging

1. Introduction

The performance of deep learning models, especially supervised learning has been shown to be on par with health-care professionals in multiple applications ([Liu et al., 2019](#); [Rajpurkar et al., 2017](#)). Despite the high performance, the safety and reliability of these models is questioned, as often the models fail to retain the same performance on the unseen external dataset. Inaccurate predictions can cause a catastrophic consequence for the patients when applied in clinical diagnosis and prognosis. One major reason for the performance drop on external dataset is that supervised learning models operate under closed-world assumption ([Fei and Liu, 2016](#)) i.e., during inference, the models can handle only samples which contains exactly similar pattern to the data that the model has been trained on. But that's not often the case after deployment in the real world. As a simple example, the model could be trained with a regular chest radiograph dataset and during the testing, it receives a chest radiograph dataset with a mix of regular and high contrast CLAHE images, and the model fails terribly.

Another important aspect of improving the diagnostic performance of supervised AI models is the need for large amounts of high quality training data. But challenge with curating high-quality medical data is that the datasets from different institutions can be heterogeneous with distribution shifts ([Cao et al., 2020](#)).

OOD data, also called *anomaly/ outlier*, usually refers to data that shows dissimilarity from the training data distribution and often AI models fail to retain performance on

the OOD data. A successful open-world deployment of an AI model with OOD detection should be sensitive to unseen classes and distribution-shifted samples and also be resilient to potential adversarial attacks (Sehwag et al., 2019). To train a OOD detector with only in-distribution (ID) data available, learning high-quality “normality” features is the fundamental step to identify the OOD samples during inference. We designed a novel OOD architecture by combining generative and zero-shot learning model and performed a comparative analysis against the state-of-the-art GAN based OOD - f-AnoGAN (Schlegl et al., 2019) and autoencoder based CVAE model (CVAD) (Guo et al., 2021).

2. Methodology

Our proposed architecture has two components - CVAE (Cascade Variational Autoencoder) and ZSL (Zero-Shot Learning) network. CVAE is similar to the generator of CVAD (Guo et al., 2021). In contrast to Vanilla VAE, a cascaded architecture provides high-quality reconstructions and better latent representations. The CVAE has two branches of VAE. The primary branch comprising of E_1 and D_1 as the encoder and decoder, while the secondary branch comprises of E_2 and D_2 as the encoder and decoder. The input to the secondary branch is the concatenated feature vector from E_{11} and D_{11} to improve the quality of the generated images. The CVAE network is trained with KL Divergence loss and Mean-

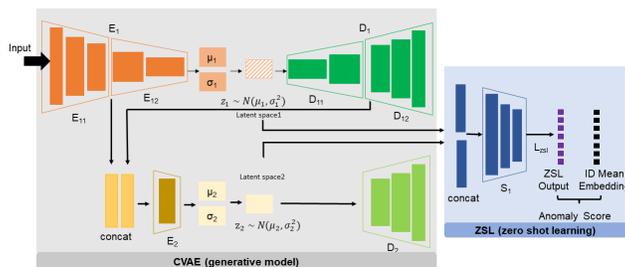


Figure 1: Proposed Architecture of OOD with CVAE and ZSL.

Squared Error (MSE) loss which is used as the reconstruction loss. The ZSL network S_1 is designed with three linear layers and a sigmoid activation at the end. The concatenated vector of the latent vectors from E_1 and E_2 of size 2560 (2048, 512) is the input to the ZSL network. The size of the output layer is determined by the number of semantic features used in the particular use-case. Ideally, the distance between the predicted attributes and the ground truth attributes would serve as the anomaly score. But here the external dataset is not as extensively labelled with the chosen semantic attributes. Hence, the semantic outputs of the trained ZSL model on the internal ID dataset is averaged to get a mean ID embedding which would serve as a representative embedding for ID data. The predicted external ID data embedding are closer to the representative embedding whereas the predicted external OOD data embedding is not. The Euclidean distance between the predicted embedding and the representative ID embedding is used to model this variation and serves as the anomaly score. The mean distance between the representative ID embedding and the internal ID data serves as a threshold to classify the external data as ID and OOD.

3. Experiments and Results

The proposed architecture is validated on two distinct medical problems and used four publicly available imaging datasets: (i) *Dermatology Images* - ISIC Dataset (internal) and Fitzpatrick17k (external); (ii) *Chest Radiographs* - CheXpert Dataset (internal) and UNIFESP Dataset (external). For our use cases, three distinct out-of-distribution categories are identified - *Type 1 (Domain Shift)* - Data samples totally unrelated to the task at hand; *Type 2 (Quality drift)* - Data samples that were acquired incorrectly; *Type 3 (Interclass OOD)* - Data samples that are unseen due to selection bias. Within the scope of this work, the internal test set is tested predominantly on type 3 (interclass OOD), while the external data is tested on a set of images comprising of all the use cases (type 1-3). The CVAE network coupled with ZSL was trained on ISIC 2020 with 21 different semantic attributes (e.g. anatomic region, skin color) and CheXpert with 23 different attributes (e.g. support device, fracture, gender). The number of training and validation images for pre-training CVAE and training the entire network are presented in Table 1.

Table 1: Training and Validation data statistics for CVAE pre-train and ZSL network train

	Dataset	Train	Validation
CVAE pre-train	ISIC 2019	11193	947
	CheXpert	9900	1100
CVAE+ZSL train	ISIC 2020	4358	600
	CheXpert	5000	1000

The performance of our proposed architecture (CVAE+ZSL) are tested against f-AnoGAN (Schlegl et al., 2017) and CVAD (Guo et al., 2021) (Table 2). The threshold was chosen as $mean + 0.5 * std$ by observing the mean and the standard deviations of the anomaly scores for AnoGAN and CVAD, and the Euclidean distance for our methodology. From our experimental results, it can be observed that the proposed CVAE+ZSL model outperformed both AnoGAN and CVAD on the external unseen data with significant *data shift*.

Table 2: Comparative analysis of AnoGAN, CVAD and CVAE+ZSL

Models	AnoGAN			CVAD			CVAD +ZSL		
	Acc \uparrow	TPR \uparrow	FPR \downarrow	Acc \uparrow	TPR \uparrow	FPR \downarrow	Acc \uparrow	TPR \uparrow	FPR \downarrow
ISIC ID + OOD (internal)	0.575 (0.561, 0.577)	0.305 (0.289, 0.307)	0.155 (0.146, 0.160)	0.70 (0.688, 0.703)	0.72 (0.702, 0.722)	0.32 (0.311, 0.331)	0.5725 (0.560, 0.577)	0.35 (0.334, 0.354)	0.205 (0.196, 0.212)
Fitzpatrick17k ID + OOD (external)	0.49 (0.488, 0.504)	1.0	1.0	0.334 (0.325, 0.338)	0.36 (0.353, 0.372)	0.691 (0.689, 0.708)	0.6511 (0.643 , 0.658)	0.555 (0.543, 0.566)	0.256 (0.246, 0.264)
CheXpert ID + OOD (internal)	0.7707 (0.768 , 0.776)	0.9172 (0.918, 0.932)	0.2433 (0.238, 0.248)	0.7076 (0.703, 0.712)	0.2966 (0.284, 0.305)	0.2522 (0.252, 0.261)	0.6778 (0.663, 0.674)	0.4896 (0.473, 0.506)	0.304 (0.298, 0.305)
UNIFESP ID + OOD (external)	0.6987 (0.681, 0.699)	1.0	0.411 (0.411, 0.431)	0.4226 (0.412, 0.426)	0.25 (0.229, 0.260)	0.512 (0.509, 0.525)	0.7112 (0.701 , 0.716)	0.5468 (0.535, 0.564)	0.2286 (0.224, 0.239)

4. Conclusion

The proposed work designed an unsupervised anomaly detection model using a cascade coupled with zero-shot learning network maps the latent vectors to semantic attributes. With the inclusion of semantic space, the proposed architecture generalizes well and has a better performance on the unseen external dataset when compared against the same class of state-of-the art models.

References

- Tianshi Cao, Chin-Wei Huang, David Yu-Tung Hui, and Joseph Paul Cohen. A benchmark of medical out of distribution detection, 2020.
- Geli Fei and Bing Liu. Breaking the closed world assumption in text classification. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pages 506–514, San Diego, California, June 2016. Association for Computational Linguistics. doi: 10.18653/v1/N16-1061. URL <https://aclanthology.org/N16-1061>.
- Xiaoyuan Guo, Judy Wawira Gichoya, Saptarshi Purkayastha, and Imon Banerjee. Cvad: A generic medical anomaly detector based on cascade vae. *arXiv preprint arXiv:2110.15811*, 2021.
- Xiaoxuan Liu, Livia Faes, Aditya U. Kale, Siegfried K. Wagner, Dun Jack Fu, Alice Bruynseels, Thushika Mahendiran, Gabriella Moraes, Mohith Shamdas, Christoph Kern, Joseph R. Ledsam, Martin K. Schmid, Konstantinos Balaskas, Eric J. Topol, Lucas M. Bachmann, Pearse A. Keane, and Alastair K. Denniston. A comparison of deep learning performance against health-care professionals in detecting diseases from medical imaging: a systematic review and meta-analysis. *The Lancet Digital Health*, 1(6):e271–e297, Oct 2019. ISSN 2589-7500. doi: 10.1016/S2589-7500(19)30123-2. URL [https://doi.org/10.1016/S2589-7500\(19\)30123-2](https://doi.org/10.1016/S2589-7500(19)30123-2).
- Pranav Rajpurkar, Jeremy Irvin, Kaylie Zhu, Brandon Yang, Hershel Mehta, Tony Duan, Daisy Ding, Aarti Bagul, Curtis Langlotz, Katie Shpanskaya, et al. Chexnet: Radiologist-level pneumonia detection on chest x-rays with deep learning. *arXiv preprint arXiv:1711.05225*, 2017.
- Thomas Schlegl, Philipp Seeböck, Sebastian M. Waldstein, Ursula Schmidt-Erfurth, and Georg Langs. Unsupervised anomaly detection with generative adversarial networks to guide marker discovery, 2017.
- Thomas Schlegl, Philipp Seeböck, Sebastian M Waldstein, Georg Langs, and Ursula Schmidt-Erfurth. f-anogan: Fast unsupervised anomaly detection with generative adversarial networks. *Medical image analysis*, 54:30–44, 2019.
- Vikash Sehwal, Arjun Nitin Bhagoji, Liwei Song, Chawin Sitawarin, Daniel Cullina, Mung Chiang, and Prateek Mittal. Analyzing the robustness of open-world machine learning. In *Proceedings of the 12th ACM Workshop on Artificial Intelligence and Security*, pages 105–116, 2019.