Thought Anchors: Which LLM Reasoning Steps Matter?

Anonymous Author(s)

Affiliation Address email

Abstract

Reasoning large language models have achieved state-of-the-art performance in many fields. However, their long-form chain-of-thought reasoning creates interpretability challenges as each generated token depends on all previous ones, making the computation harder to decompose. We argue that analyzing reasoning traces at the sentence level is a promising approach to interpreting reasoning. We present three complementary attribution methods: (1) a black-box method measuring each sentence's counterfactual importance by comparing final answers across 100 rollouts conditioned on the model generating that sentence or one with a different meaning; (2) a white-box method of aggregating attention patterns between pairs of sentences, which identified "broadcasting" sentences receiving high attention from all future sentences via "receiver" attention heads; (3) a causal attribution method measuring logical connections between sentences by suppressing attention toward one sentence and measuring the effect on future sentences' tokens. Each method provides evidence for the existence of thought anchors, reasoning steps that disproportionately influence the reasoning trajectory. These thought anchors are usually planning or backtracking sentences. We provide an open-source tool for visualizing our methods' outputs (anonymous-interface.com) and present a case study showing converging patterns across methods, which together map the model's multi-step reasoning. The consistency across methods demonstrates the potential of sentence-level analysis for a deeper understanding of reasoning models.

21 1 Introduction

2

3

5

6

8

9

10

11

12

13

14

15

16

17

18

19

20

Training large language models to reason with chain-of-thought [Reynolds and McDonell, 2021, Nye et al., 2021, Wei et al., 2023] has significantly advanced their capabilities [OpenAI, 2024]. The resulting reasoning traces have seen use in safety research [Baker et al., 2025, Shah et al., 2025], but there has been little work adapting interpretability methods to this paradigm (though see [Venhoff et al., 2025, Goodfire, 2025]). Traditional *mechanistic interpretability* [Olah et al., 2020, Olah, 2022] methods often focus on a single forward pass of the model, understanding how layer-by-layer activations lead to a generated token [Wang et al., 2022, Hanna et al., 2023]. However, this framework is too fine-grained for autoregressive reasoning models, which consume their own output tokens.

A core step in many interpretability strategies is to decompose the model into smaller parts that can be analyzed independently [Lindsey et al., 2025]. A natural decomposition for chain-of-thought is into individual sentences and how they depend on each other. Interpretations of neural network behavior operate at varying levels of abstraction [Geiger et al., 2021, 2025], and sentence-level explanations strike an intermediate abstraction depth. Compared to tokens, sentences are more coherent and often coincide with reasoning steps extracted by an LLM [Venhoff et al., 2025, Arcuschin et al., 2025]. Compared to paragraphs, sentences are less likely to conflate reasoning steps and may serve as an effective target for linking different steps.

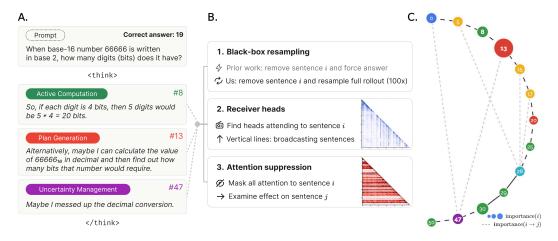


Figure 1: Summary of our three methods for principled attribution to important sentences in reasoning traces. A. An example reasoning trace with sentences labeled per our taxonomy. B. Our proposed methods are: black-box resampling, receiver heads, and attention suppression. C. A directed acyclic graph among sentences prepared by one of our techniques, made available open source.

Prior work has established that different sentences within reasoning traces perform distinct functions.

Backtracking sentences (e.g., "Wait...") cause the model to revisit earlier conclusions, which boosts 39 final-answer accuracy [Muennighoff et al., 2025]. Other research has distinguished sentences based 40 on whether they retrieve new information or execute deduction with existing information [Venhoff 41 et al., 2025]. Hence, reasoning may follow an overarching structure, where sentences can introduce 42 and pursue high-level computational goals. Yet, approaches for mapping this structure remain limited. 43 We propose three complementary methods for mapping the structure of reasoning traces that focus on what we term **thought anchors**: critical reasoning steps that guide the rest of the reasoning trace. 45 We provide evidence for this type of anchoring based on black-box evidence from resampling and 46 white-box evidence based on attention patterns. 47 First, in section 3 we present a black-box method for measuring the counterfactual impact of a 48 sentence on the model's final answer and future sentences. We repeatedly resample reasoning 49 traces from the start of each sentence. Based on resampling data, we can quantify the impact of 50 51 each sentence on the likelihood of any final answer or the likelihood of producing any subsequent sentence. Via this resampling approach, we can additionally distinguish planning sentences that 52 initiate computations leading to some answer from sentences performing computations necessary for 53 the answer but which are predetermined. 54

Second, in section 4 we present a white-box method for evaluating importance based on the sentences most attended. Our analyses reveal "receiver" heads that narrow attention toward particular past "broadcasting" sentences. Compared to base models, where attention is more diffuse, reasoning models display overall greater attentional narrowing through receiver heads, and these heads have an outsized impact on the model's final answer. We develop a systematic approach to identifying receiver heads and show how evaluating sentences on the extent to which they are broadcast by these 60 heads provides a mechanistic measure of importance.

55

56

57

58

59

61

62

63

64

65

66

67

Third and finally, in section 5 we present a method that measures the causal dependency between specific pairs of sentences in a reasoning trace. For each sentence in a trace, we intervene by masking all attention to it from subsequent tokens. We then measure the effect of suppression on subsequent token logits (KL divergence) compared to those generated during the absence of suppression. Averaging token effects by sentence, this strategy measures each sentence's direct causal effect on each subsequent sentence.

Applying these techniques, our work suggests that analyzing reasoning through sentence-level units 68 introduces new domains through which reasoning models can be understood. Our work also opens 69 the door to more precise debugging of reasoning failures, identification of sources of unreliability, 70 and the development of techniques to enhance the reliability of reasoning models.

2 Setup

73

76

77

79

81

82

83

101

2.1 Sentence taxonomy for reasoning functions

We categorized sentences with the framework by Venhoff et al. [2025], describing sentences' distinct reasoning functions. We define eight categories (see examples and frequencies in Appendix A):

- 1. **Problem Setup:** Parsing or rephrasing the problem
- 2. **Plan Generation:** Stating or deciding on a plan of action, meta-reasoning
- 78 3. **Fact Retrieval:** Recalling facts, formulas, problem details without computation
 - 4. Active Computation: Algebra, calculations, or other manipulations toward the answer
- 5. **Uncertainty Management:** Expressing confusion, re-evaluating, including backtracking
 - 6. **Result Consolidation:** Aggregating intermediate results, summarizing, or preparing
 - 7. **Self Checking:** Verifying previous steps, checking calculations, and re-confirmations
 - 8. Final Answer Emission: Explicitly stating the final answer

Each sentence in the analyzed response is assigned to one of these categories using an LLM-based

- 85 auto-labeling approach. The prompt used to label sentence categories is provided in Appendix B.
- 86 Some categories that rarely appear are omitted from the figures below. Probing classifiers achieve
- 87 high accuracy in distinguishing sentences and their corresponding categories (see Appendix C).

88 2.2 Model and dataset

Our experiments use DeepSeek R1-Distill Qwen-14B [DeepSeek, 2025] with a temperature of 0.6 and a top-p of 0.95. We used the MATH dataset [Hendrycks et al., 2021], targeting 10 challenging questions that the model correctly solves 20-80% of the time, identified by testing the model on 1,000 problems 10 times each. For each selected problem, we generated one correct and one incorrect reasoning trace, producing 20 responses. The average response is 144.2 sentences (95% CI: [116.7, 171.8]) and 4208 tokens (95% CI: [3479, 4937]). We examine only sentences before the resampling method indicates the model has converged on an answer (after convergence, the model gives the same response in >98% of resamples). In Appendix D, we provide results using other reasoning models.

3 Measuring counterfactual influence

Some sentences matter more than others, but which ones matter most depends on how we define and

measure importance. We frame sentence-level importance as a question of counterfactual influence:

how does including or excluding a sentence affect subsequent steps and the model's final output?

3.1 Forced answer importance

In earlier work, importance has often been approximated by forcing the model to give an answer before completing its full reasoning trace [Lanham et al., 2023a]. We tested this strategy. For each sentence in our examined model responses, we interrupt the model at that point and append a prompt inducing it to give a final answer ("Therefore, the final answer is boxed"). This is performed 100 times at each sentence to generate a distribution of answers linked to each sentence position. To evaluate the impact of sentence i on the final answer, we measure the KL Divergence between the distribution before sentence i has been stated and the distribution after sentence i has been stated.

The taxonomic categories reveal that *active computation* statements produce the greatest distributional shifts in this **forced answer importance** (Figure 3A). This aligns with prior findings that reasoning models update their beliefs throughout the trace, and suggests intermediate calculations alter the model's answer responses. However, *active computation* steps may not provide a comprehensive view on importance, as they may be predetermined by upstream statements.

3.2 Counterfactual importance

A natural limitation of the forced-answer approach is that a sentence S may be necessary for some final answer, but consistently produced by the LLM late in the reasoning trace. This means that forced answer accuracy will be low for all sentences that occur before S, not allowing the importance of these earlier steps to be accurately determined.

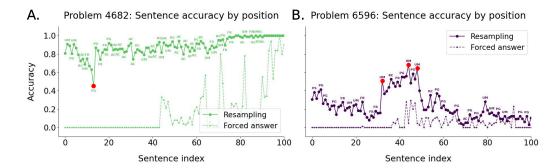


Figure 2: Accuracy over 100 rollouts at each sentence for (**A**) one correct and (**B**) one incorrect base solution. Red dots mark significant spikes or dips. Local minima and maxima sentences are annotated with category initials (e.g., $PG = plan\ generation$). The analyses below focus on the counterfactual KL-divergence between sentences, but resampling accuracy is visualized here as it is more intuitive.

Consider a rollout which consists of sentences $S_1, S_2, \ldots, S_i, \ldots, S_M$ and a final answer A. We use resampling to define a metric capturing the extent to which sentence S causes A to be incorrect. We call this metric *counterfactual importance*. We can motivate and define this metric with three steps:

- 1. **Rollout sampling.** For a given sentence S_i , we generate a distribution over final answers by generating 100 rollouts both without sentence S_i (the base condition, with rollouts of the form $S_1, S_2, \ldots, S_{i-1}, T_i, \ldots, T_N, A'_{S_i}$), and another distribution with sentence S (the intervention condition, with rollouts of the form $S_1, S_2, \ldots, S_{i-1}, S_i, \ldots, S_M, A_{S_i}$).
- 2. Naive distributional comparison. We can compute the KL Divergence between the final answer distributions in the two conditions, i.e., importance_r := $D_{\text{KL}}[p(A'_{S_i})||p(A_{S_i})]$, providing a scalar measure of how much sentence S_i changes the answer. We call this the resampling importance metric.
- 3. Semantic filtering. The problem with resampling importance is that in rollout resampling, if T_i is identical or similar to S_i then we do not get much information about whether S_i is important or not. Therefore, we write $S \not\approx T$ if two sentences S and T are dissimilar, defined as having cosine similarity less than the median value across all sentence pairs in our dataset, when fed into an embeddings model (see Appendix E for details). Therefore we can finally define the *counterfactual importance* by conditioning on $T_i \not\approx S_i$ i.e., importance := $D_{KL}[p(A'_{S_i}|T_i \not\approx S_i)||p(A_{S_i})]$.

Since we resample all steps after a given sentence S_i , we avoid the aforementioned limitation of forced-answering. We also provide empirical evidence that the principled **counterfactual importance** definition in 1-3 above is useful, by comparing it to the resampling importance in Appendix G.

Across our dataset, we find that *plan generation* and *uncertainty management* (e.g., backtracking) sentences consistently show higher counterfactual importance than other categories like *fact retrieval* or *active computation* (see Figure 3B). This supports the view that high-level organizational sentences anchor, organize, and steer the reasoning trajectory. We argue that this approach provides more informative results compared to forced answer importance and prior token- or attention-based metrics.

3.3 Sentence-to-sentence importance

In addition to estimating a sentence's effect on the final answer, we extend our framework to quantify its causal influence on each individual future sentence. This sentence-level attribution helps uncover the structure of the model's chain-of-thought: which sentences initiate subroutines, influence future claims, or act as attractors for subsequent steps. We estimate the counterfactual importance of sentence S_i on a future sentence S_i formally with:

$$\mathrm{importance}(S_i \to S^{\mathrm{Fut.}}) = \mathbb{P}(S^{\mathrm{Fut.}} \in_{\approx} \{S_i, \dots, S_M\}) - \mathbb{P}(S^{\mathrm{Fut.}} \in_{\approx} \{T_i, \dots, T_N\} | T_i \not\approx S_i) \quad (1)$$

¹All S_i and T_k as well as A in this section are random variables, since we sample with non-zero temperature.

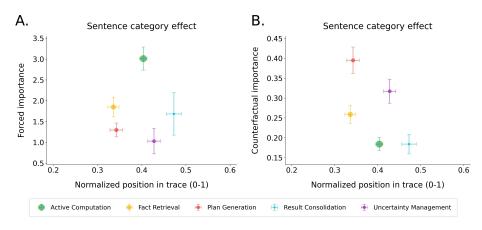


Figure 3: The mean of each sentence category for (**A**) forced-answer importance and (**B**) counterfactual importance, per the resampling method, plotted against the sentence category's mean position in the reasoning trace. Only the 5 most common sentence types are shown (see Appendix F).

Intuitively, on the right-hand side of Equation (1), the first term is the probability that a future sentence $S^{\text{Fut.}}$ will semantically occur given that S_i was present in the trace, and the second term is the corresponding probability when S_i is resampled with a non-equivalent sentence. A positive score indicates that sentence S_i increases the likelihood of producing $S^{\text{Fut.}}$ (i.e., S_i upregulates $S^{\text{Fut.}}$), while a negative score suggests that it suppresses or inhibits it.

In this context $S^{\text{Fut.}}$ semantically occurs if, when we extract the sentences and identify the best

In this context $S^{\text{Fut.}}$ semantically occurs if, when we extract the sentences and identify the best candidate match for $S^{\text{Fut.}}$ using cosine similarity between sentence embeddings, it has greater than 0.8 cosine similarity (i.e., the median value in our dataset) to that sentence. Pseudocode for estimating sentence-to-sentence importance and empirical values of this metric can be found in Appendix G.

4 Attention aggregation

We hypothesize that important sentences may receive heightened attention from downstream sentences. Although attention weights do not necessarily imply causal links (see Section 5), heightened attention is a plausible mechanism by which important sentence may exert their influence on subsequent sentences. We conjecture further that a high focus on important sentences may be driven by specific attention heads, and by tracking such heads, we may pinpoint key sentences.

We assessed the degree different heads narrow attention toward particular sentences. First, for each reasoning trace, we averaged each attention head's token-token attention weight matrix to form a sentence-sentence matrix, where each element is the mean across all pairs of tokens between two sentences. Based on each attention matrix, we computed the mean of its column below the diagonal to measure the extent each sentence receives attention from all downstream sentences; averaged only among pairs at least four sentences apart to focus on distant connections. This generates a distribution for each head (e.g., Figure 4A), and the extent each head generally narrows attention toward specific sentences can be quantified as its distribution's kurtosis (computed for each reasoning trace, then averaged across traces). Plotting each head's kurtosis reveals that some attention heads strongly narrow attention toward specific, possibly important, sentences in the reasoning trace (Figure 4B).

4.1 The identification of receiver heads

We refer to attention heads that narrow attention toward specific sentences as "receiver heads". These heads are more common in later layers (Appendix H). To formally assess the existence of receiver heads, we tested whether some attention heads consistently operate in this role. Specifically, we measured the split-half reliability of heads' kurtosis scores. We found a strong head-by-head correlation (r = .67) between kurtosis scores computed for half of the problems with kurtosis scores for the other half of problems. Thus, some attention heads consistently operate as receiver heads, albeit with some heterogeneity across responses in which heads narrow attention most.

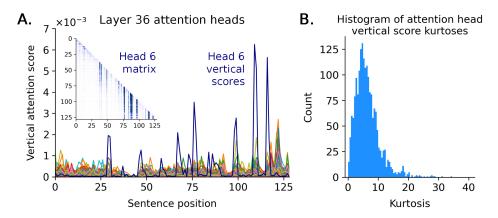


Figure 4: **A.** Lines show the vertical attention scores for each sentence by the 40 different heads in layer 36. Head 6 has been highlighted as a receiver head, and its corresponding attention weight matrix is shown for reference. Its prominent spikes cause the distribution to have a high kurtosis. **B.** Histogram of these kurtosis values across all attention heads, averaged across all reasoning traces.

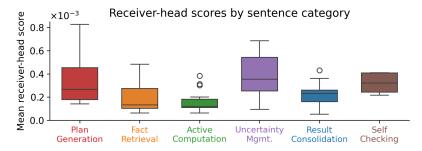


Figure 5: The boxplot shows the average top-16 receiver-head score for each sentence type. The boxes correspond to the interquartile range across different reasoning traces.

Receiver heads usually direct attention toward the same sentences. Among the 16 heads with the

highest kurtoses, we computed the sentence-by-sentence correlation between the vertical-attention scores for each pair of heads; calculated separately for each reasoning trace, then averaged. This produced an large correlation (mean r=.60). Thus, receiver heads generally attend the same sentences, albeit with some heterogeneity (this correlation among randomly selected heads is r=.45). This convergence is consistent with the existence of sentence importance, which these heads identify. Attentional narrowing toward particular sentences may be a feature specifically of reasoning models that enhances their performance. Comparing R1-Distill-Qwen-14B (reasoning) and Qwen-14B (base) suggests that the reasoning model's receiver heads will narrow attention toward singular sentences to a greater degree (appendix I). Furthermore, ablating receiver heads leads to a greater reduction in accuracy than ablating self-attention heads at random (appendix J). Altogether, these findings are consistent with receiver heads and thought-anchor sentences playing special roles in reasoning.

4.2 Links to resampling importance and sentence types

Plan generation, uncertainty management, and self checking sentences consistently receive the most attention via receiver heads (Figure 5), whereas active computation sentences receive minimal attention. Further consistent with this, sentences receiving high receiver-head attention tend to also exert a larger effect on downstream sentences per the resampling method (mean Spearman $\rho = .22$; 95% CI: [.17, .30]; detailed further in Appendix K). These findings are hence consistent with reasoning traces being structured around high-level sentences that initiate computations that may link high-level statements but may minimally impact the overall reasoning trajectory.

04 5 Attention suppression

5.1 Approach

205

220

234

A natural concern with examining attention weights is that they do not measure causality. Further, receiver heads are not necessarily suited for identifying sentences' links to individual future sentences. Hence, we next focused on causal attribution for sentence-sentence dependencies. The sentence-sentence analyses based on resampling also examined such dependencies but had limited precision for mapping logical connections, as counterfactual importance represents the total effect (direct and indirect) of one sentence on another. The present method instead aims to isolate the direct effects between sentences, which we expect to permit more precise modeling of logical connections.

We suppress all attention (all layers and heads) toward a given sentence and examine the impact on future sentences. The impact is defined as the KL divergence between a token's logits and its baseline logits without suppression. The effect on a future sentence is calculated as the average of its constituent token log-KL divergences. This technique assumes (i) token logits accurately capture a sentence's semantic content and (ii) suppressing attention does not problematically induce out-of-distribution behavior. Hence, we must validate correspondence between the attention-suppression measure and resampling measure, which, although less precise, does not hinge on these assumptions.

5.2 Correlations with the resampling-based importance matrix

The attention-suppression matrix values correlate with those of the resampling-method matrix. 221 Specifically, the two matrices were positively correlated for 19 of the 20 examined reasoning traces 222 (mean: Spearman $\rho = .20, 95\%$ CI: [.12, .27]). This association is stronger when considering only 223 cases fewer than five sentences apart in the reasoning trace, which may better track direct rather than 224 indirect effects represented by the resampling method (mean: $\rho = .34$ [.27, .40]). The magnitudes of 225 these correlations are substantial, given that measures measure partially different aspects of causality 226 and the resampling measure itself contains stochastic noise. Hence, these results give weight to the 227 validity of the resampling approach, whose precision we leverage for the forthcoming case study. 228

229 6 Case study

The three presented techniques cover different aspects of attribution within a reasoning trace. We will now illustrate the utility and the complementary nature of these techniques by applying them to the model's response for one problem: "When the base-16 number 66666₁₆ is written in base 2, how many base-2 digits (bits) does it have?" (Figure 6) (see Appendix L for the full transcript).

6.1 Resampling

The model approaches this problem by first considering that 66666_{16} contains five base-16 digits and 235 any base-16 digit can be represented with four base-2 digits. Following this logic, the CoT starts by 236 237 pursuing the answer "20 bits". However, this initial answer overlooks that 6_{16} is 110_2 (i.e., not 0110_2 due to the leading zero), so the correct answer is actually "19 bits". In sentence 13, the model pivots 238 toward this correct answer by initiating computations to convert 66666₁₆ to decimal and then binary. 239 The resampling method (section 3) reveals this initial poor trajectory and pivot upwards (shown 240 previously in Figure 2A). Specifically, from sentences 6-12, expected accuracy steadily declines, but 241 sentence 13 causes counterfactual accuracy to drastically increase. The pivotal role of 13 is missed if 242 one instead evaluates accuracy by forcing the model to give a response immediately, as some prior studies have done, which instead yields 0% accuracy for all sentences in this vicinity (Figure 2A). The importance of sentence 13 only emerges when examining the counterfactual resampling and thus 245 accounting for how a given sentence can influence sentences downstream toward the final answer. 246

6.2 Receiver heads

The trajectory toward the final correct answer can be understood as a series of computational chunks (see flowchart in Figure 6). First, the model prepares a formula for converting 66666_{16} to decimal (sentences 13-19). Next, the model computes the answer to that formula, finding that 66666_{16} is

"How many bits are in the base-16 number 6666616 when written in binary?"

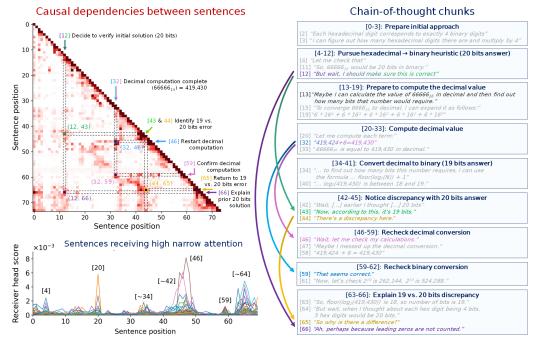


Figure 6: Case study: problem #4682 (correct). Red matrix shows the effect of suppressing one sentence (x-axis) on a future sentence (y-axis). Darker colors indicate higher values. Bottom-left line plot shows the average attention toward each sentence by all subsequent sentences via the top-32 receiver heads (32 attention heads with the highest kurtosis score). Flowchart summarizes the model's CoT with chunks defined around key sentences receiving high attention via receiver heads. Sentence 13 is emphasized as it has high counterfactual importance per the resampling method (see Figure 2A).

419,430 in decimal (sentences 20-33). The model subsequently converts that number to binary by putting forth another formula and solving it, $floor(log_2(419,430)) + 1 = 19$, to derive that the answer is "19 bits" (sentences 34-41). The model then notes a discrepancy with the earlier 20-bit solution (sentences 42-45). The model hence initiates new computations that verify that it computed the decimal value of 66666_{16} correctly (sentences 46-58) and that it computed the binary conversion accurately (sentences 59-62). Equipped with this increased certainty about 19-bit answer, the model discovers why its initial 20-bit idea was incorrect: "because leading zeros are not counted" (Sentence 66). This overall narrative is based on our analysis of attention patterns (section 4): Receiver attention heads pinpoint sentences initiating computations or stating key conclusions, thereby segmenting the reasoning trace into seemingly meaningful chunks (Figure 6).

6.3 Attention suppression

Along with being organized into computational chunks, the reasoning displays a scaffold related to sentence-sentence dependencies (Figure 6). One piece of this structure is a self-correction pattern involving an incorrect proposal, a detected discrepancy, and a final resolution. Specifically, the model initially proposes an incorrect answer of "20 bits", which it decides to recheck (sentence 12). This leads to a discrepancy with the "19 bits" answer computed via decimal conversion (sentences 43 & 44). After rechecking its arithmetic supporting the "19 bit" answer, the model returns to the discrepancy (sentence 65) and then produces an explanation for why the "20 bits" answer is incorrect (sentence 66). This can be seen as a tentative CoT circuit, where two conclusions conflict to produce a discrepancy, which in turn encourages the model to resolve the discrepancy. Within this wide-spanning scaffold, there exist further dependencies, corresponding to verifying an earlier computation. Specifically, the model finishes computing the decimal value of 66666_{16} as 419,430 (sentence 32), later decides to verify that decimal conversion (sentence 46), and finally confirms that the original value is correct (sentence 59). This can be seen as further indication of CoT circuitry.

We identified these linkages based on the attention-suppression matrix (section 5), which contains local maxima at these linkages $(12 \rightarrow 43, 43 \rightarrow 65, 12 \rightarrow 66; 32 \rightarrow 46, 32 \rightarrow 59)$. Notice that many of the sentences pinpointed by the attention-suppression technique overlap with the sentences receiving high attention from receiver heads. Adding to the receiver-head conclusions, the attention suppression technique shows how information flows between these key sentences that structure the reasoning trace.

6.4 Open source interface

281

302

303

304

305

306 307

We released an open source interface (anonymous-interface.com) for analyzing and visualizing reasoning traces. The reasoning trace can be visualized as an annotated directed acyclic graph using the importance metrics from Section 3, which may benefit interpretability and reasoning model debugging. We show our proof-of-concept interface in Figure 1C, where important sentences are represented by larger nodes and sentences that causally affect each other are connected with dashed gray lines. Hovering over a node lets users inspect sentence properties or compare alternative rollouts.

88 7 Related work

Reasoning advances in LLMs. Chain-of-thought reasoning [Wei et al., 2023, Nye et al., 2021, Reynolds and McDonell, 2021] has driven significant capabilities improvements in large language models. These increased reasoning capabilities introduce novel safety challenges, including potential unfaithfulness in the reasoning itself [Lanham et al., 2023b]. While current alignment evaluation methods often rely on examining reasoning traces [Baker et al., 2025, Shah et al., 2025], we cannot rely on the model's reasoning being faithful to the internal reasoning[Chen et al., 2025, Turpin et al., 2023, Arcuschin et al., 2025], creating a need for more mechanistic analyses.

Importance of individual steps. Many CoT sentences can be deleted or rewritten with little impact on task accuracy [Wang et al., 2023, Madaan and Yazdanbakhsh, 2022]. Prior attribution methods suggest that a subset of steps disproportionately drive the final answer: Shapley values [Gao, 2023], ROSCOE metrics [Golovneva et al., 2023], gradient-based scores [Wu et al., 2023], and resampling at fork tokens [Bigelow et al., 2024]. Complementing these, our approach provides a more principled framework for understanding how reasoning traces are constructed around key sentences.

White-box analyses of reasoning. Mechanistic studies locate specialised components that propagate information across steps: iteration or receiver heads [Cabannes et al., 2024], small sets of heads necessary for CoT performance [Zheng et al., 2024], steerable activation directions for planning and backtracking [Venhoff et al., 2025], and deduction circuits in symbolic tasks [Brinkmann et al., 2024]. Other work identifies phase shifts separating pre-training priors from contextual reasoning [Dutta et al., 2024]. These findings motivate our focus on sentence-level structure.

308 8 Discussion and Limitations

This work presents initial steps towards a principled decomposition of reasoning traces with a focus on identifying thought anchors: sentences with outsized importance on the model's final response, specific future sentences, and downstream reasoning trajectory. We have also begun unpacking the attentional mechanisms associated with these important sentences. We expect that understanding thought anchors will be critical for interpreting reasoning models and ensuring their safety.

We view this as preliminary work. Our analyses require refinement to fully grapple with how downstream sentences may be overdetermined by different trajectories in a reasoning trace or independent sufficient causes. Additionally, we do not formally examine the role of error correction. Our receiver-head analyses are confounded by a sentence's position in the reasoning trace (see Appendix M). Further, our attention-suppression work is limited because it effectively requires the model to process out-of-distribution information.

Nonetheless, we believe that we have demonstrated that our metrics are an advance on prior work, interrupting models and forcing final answers. The surprising degree of shared structure we have found across our three methods illustrates the potential value of future work in this area and points to the possibility of more powerful interpretability techniques to come.

References

- Iván Arcuschin, Jett Janiak, Robert Krzyzanowski, Senthooran Rajamanoharan, Neel Nanda, and 325 Arthur Conmy. Chain-of-thought reasoning in the wild is not always faithful, 2025. URL 326 https://arxiv.org/abs/2503.08679. 327
- Bowen Baker, Joost Huizinga, Leo Gao, Zehao Dou, Melody Y. Guan, Aleksander Madry, Wojciech 328 Zaremba, Jakub Pachocki, and David Farhi. Monitoring reasoning models for misbehavior and the 329 risks of promoting obfuscation, 2025. URL https://arxiv.org/abs/2503.11926. 330
- Eric Bigelow, Ari Holtzman, Hidenori Tanaka, and Tomer Ullman. Forking paths in neural text 331 generation, 2024. URL https://arxiv.org/abs/2412.07961. 332
- Jannik Brinkmann, Abhay Sheshadri, Victor Levoso, Paul Swoboda, and Christian Bartelt. A 333 mechanistic analysis of a transformer trained on a symbolic multi-step reasoning task. arXiv 334 preprint arXiv:2402.11917, 2024. 335
- Vivien Cabannes, Charles Arnal, Wassim Bouaziz, Xingyu Alice Yang, François Charton, and Julia 336 Kempe. Iteration head: A mechanistic study of chain-of-thought. In The Thirty-eighth Annual 337 Conference on Neural Information Processing Systems, 2024. URL https://openreview.net/ 338 forum?id=QBCxWpOt5w. 339
- Yanda Chen, Joe Benton, Ansh Radhakrishnan, Jonathan Uesato, Carson Denison, John Schulman, Arushi Somani, Peter Hase, Misha Wagner, Fabien Roger, Vlad Mikulik, Samuel R. Bowman, Jan 341 Leike, Jared Kaplan, and Ethan Perez. Reasoning models don't always say what they think, 2025. 342
- DeepSeek. Deepseek-r1: Incentivizing reasoning capability in Ilms via reinforcement learning, 2025. 343 URL https://arxiv.org/abs/2501.12948.
- Subhabrata Dutta, Joykirat Singh, Soumen Chakrabarti, and Tanmoy Chakraborty. How to think 345 step-by-step: A mechanistic understanding of chain-of-thought reasoning. arXiv preprint 346 arXiv:2402.18312, 2024. 347
- Leo Gao. Shapley value attribution in chain of thought, 2023. https://www.lesswrong.com/ 348 posts/FX5JmftqL2j6K8dn4/shapley-value-attribution-in-chain-of-thought. 349
- Atticus Geiger, Hanson Lu, Thomas Icard, and Christopher Potts. Causal abstractions of neural 350 networks, 2021. URL https://arxiv.org/abs/2106.02997. 351
- Atticus Geiger, Duligur Ibeling, Amir Zur, Maheep Chaudhary, Sonakshi Chauhan, Jing Huang, 352 Aryaman Arora, Zhengxuan Wu, Noah Goodman, Christopher Potts, and Thomas Icard. Causal 353 abstraction: A theoretical foundation for mechanistic interpretability, 2025. URL https://arxiv. 354 org/abs/2301.04709. 355
- Olga Golovneva, Moya Chen, Spencer Poff, Martin Corredor, Luke Zettlemoyer, Maryam Fazel-356 Zarandi, and Asli Celikyilmaz. Roscoe: A suite of metrics for scoring step-by-step reasoning, 358 2023. URL https://arxiv.org/abs/2212.07919.
- Under the hood of a reasoning model. https://www.goodfire.ai/blog/ 359 under-the-hood-of-a-reasoning-model, 2025. Accessed: May 15, 2025. 360
- Michael Hanna, Ollie Liu, and Alexandre Variengien. How does gpt-2 compute greater-than?: 361 Interpreting mathematical abilities in a pre-trained language model, 2023. URL https://arxiv. 362 org/abs/2305.00586. 363
- Dan Hendrycks, Collin Burns, Saurav Kadavath, Akul Arora, Steven Basart, Eric Tang, Dawn Song, 364 and Jacob Steinhardt. Measuring mathematical problem solving with the math dataset, 2021. URL 365 https://arxiv.org/abs/2103.03874. 366
- Tamera Lanham, Anna Chen, Ansh Radhakrishnan, Benoit Steiner, Carson Denison, Danny Her-367 nandez, Dustin Li, Esin Durmus, Evan Hubinger, Jackson Kernion, Kamilė Lukošiūtė, Karina 368 Nguyen, Newton Cheng, Nicholas Joseph, Nicholas Schiefer, Oliver Rausch, Robin Larson, Sam 369
- McCandlish, Sandipan Kundu, Saurav Kadavath, Shannon Yang, Thomas Henighan, Timothy 370
- Maxwell, Timothy Telleen-Lawton, Tristan Hume, Zac Hatfield-Dodds, Jared Kaplan, Jan Brauner, 371
- Samuel R. Bowman, and Ethan Perez. Measuring faithfulness in chain-of-thought reasoning, 372
- 2023a. URL https://arxiv.org/abs/2307.13702.

- Tamera Lanham, Anna Chen, Ansh Radhakrishnan, Benoit Steiner, Carson Denison, Danny Hernandez, Dustin Li, Esin Durmus, Evan Hubinger, Jackson Kernion, et al. Measuring faithfulness in chain-of-thought reasoning. *arXiv preprint arXiv:2307.13702*, 2023b.
- Jack Lindsey, Wes Gurnee, Emmanuel Ameisen, Brian Chen, Adam Pearce, Nicholas L. Turner,
 Craig Citro, David Abrahams, Shan Carter, Basil Hosmer, Jonathan Marcus, Michael Sklar, Adly
 Templeton, Trenton Bricken, Callum McDougall, Hoagy Cunningham, Thomas Henighan, Adam
 Jermyn, Andy Jones, Andrew Persic, Zhenyi Qi, T. Ben Thompson, Sam Zimmerman, Kelley
 Rivoire, Thomas Conerly, Chris Olah, and Joshua Batson. On the biology of a large language
 model. Transformer Circuits Thread, 2025. URL https://transformer-circuits.pub/
 2025/attribution-graphs/biology.html.
- Aman Madaan and Amir Yazdanbakhsh. Text and patterns: For effective chain of thought, it takes two to tango, 2022. URL https://arxiv.org/abs/2209.07686.
- Niklas Muennighoff, Zitong Yang, Weijia Shi, Xiang Lisa Li, Li Fei-Fei, Hannaneh Hajishirzi, Luke Zettlemoyer, Percy Liang, Emmanuel Candès, and Tatsunori Hashimoto. s1: Simple test-time scaling, 2025. URL https://arxiv.org/abs/2501.19393.
- Maxwell Nye, Anders Johan Andreassen, Guy Gur-Ari, Henryk Michalewski, Jacob Austin, David
 Bieber, David Dohan, Aitor Lewkowycz, Maarten Bosma, David Luan, Charles Sutton, and
 Augustus Odena. Show your work: Scratchpads for intermediate computation with language
 models, 2021.
- Chris Olah. Mechanistic interpretability, variables, and the importance of interpretable bases. https://www.transformer-circuits.pub/2022/mech-interp-essay, 2022.
- Chris Olah, Nick Cammarata, Ludwig Schubert, Gabriel Goh, Michael Petrov, and Shan Carter. Zoom in: An introduction to circuits. *Distill*, 2020. doi: 10.23915/distill.00024.001.
- OpenAI. o1: Introducing our first reasoning model. https://openai.com/o1/, 2024. Accessed: 2025-05-15.
- Nils Reimers and Iryna Gurevych. Sentence-bert: Sentence embeddings using siamese bert-networks. arXiv preprint arXiv:1908.10084, 2019.
- Laria Reynolds and Kyle McDonell. Prompt programming for large language models: Beyond the few-shot paradigm, 2021.
- Rohin Shah, Alex Irpan, Alexander Matt Turner, Anna Wang, Arthur Conmy, David Lindner, Jonah
 Brown-Cohen, Lewis Ho, Neel Nanda, Raluca Ada Popa, Rishub Jain, Rory Greig, Samuel Albanie,
 Scott Emmons, Sebastian Farquhar, Sébastien Krier, Senthooran Rajamanoharan, Sophie Bridgers,
 Tobi Ijitoye, Tom Everitt, Victoria Krakovna, Vikrant Varma, Vladimir Mikulik, Zachary Kenton,
 Dave Orr, Shane Legg, Noah Goodman, Allan Dafoe, Four Flynn, and Anca Dragan. An approach
 to technical agi safety and security, 2025. URL https://arxiv.org/abs/2504.01849.
- Miles Turpin, Julian Michael, Ethan Perez, and Samuel R. Bowman. Language models don't always say what they think: Unfaithful explanations in chain-of-thought prompting, 2023. URL https://arxiv.org/abs/2305.04388.
- Constantin Venhoff, Iván Arcuschin, Philip Torr, Arthur Conmy, and Neel Nanda. Understanding reasoning in thinking language models via steering vectors. In *Workshop on Reasoning and Planning for Large Language Models*, 2025. URL https://arxiv.org/pdf/2506.18167.
- Boshi Wang, Sewon Min, Xiang Deng, Jiaming Shen, You Wu, Luke Zettlemoyer, and Huan Sun.
 Towards understanding chain-of-thought prompting: An empirical study of what matters, 2023.
 URL https://arxiv.org/abs/2212.10001.
- Kevin Wang, Alexandre Variengien, Arthur Conmy, Buck Shlegeris, and Jacob Steinhardt. Interpretability in the wild: a circuit for indirect object identification in gpt-2 small, 2022. URL https://arxiv.org/abs/2211.00593.

- Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. Chain-of-thought prompting elicits reasoning in large language models, 2023. URL https://arxiv.org/abs/2201.11903.
- Skyler Wu, Eric Meng Shen, Charumathi Badrinath, Jiaqi Ma, and Himabindu Lakkaraju. Analyzing chain-of-thought prompting in large language models via gradient-based feature attributions, 2023. URL https://arxiv.org/abs/2307.13339.
- Zifan Zheng, Yezhaohui Wang, Yuxin Huang, Shichao Song, Mingchuan Yang, Bo Tang, Feiyu
 Xiong, and Zhiyu Li. Attention heads of large language models: A survey, 2024.

429 A Sentence taxonomy

Building on top of the framework presented by [Venhoff et al., 2025], we developed a taxonomy consisting of eight distinct sentence categories that capture reasoning functions in mathematical problem-solving. Each category represents a specific cognitive operation. The functions and examples for each category are given in Table 1. Notably, the *uncertainty management* category includes backtracking sentences.

Table 1: Sentence taxonomy with reasoning functions in problem-solving

Category	Function	Examples
Problem Setup	Parsing or rephrasing the problem (e.g., initial reading)	I need to find the area of a circle with radius 5 cm.
Plan Generation	Stating or deciding on a plan of action, meta-reasoning	I'll solve this by applying the area formula.
Fact Retrieval	Recalling facts, formulas, problem details without computation	The formula for the area of a circle is $A = \pi r^2$.
Active Computation	Algebra, calculations, or other manipulations toward the answer	Substituting $r = 5$: $A = \pi \times 5^2 = 25\pi$.
Uncertainty Management	Expressing confusion, re-evaluating, including backtracking	Wait, I made a mistake ear- lier. Let me reconsider
Result Consolidation	Aggregating intermediate results, summarizing, or preparing	So the area is 25π square cm which is approximately
Self Checking	Verifying previous steps, checking calculations, and re-confirmations	Let me verify: $\pi r^2 = \pi \times 5^2 = 25\pi$. Correct.
Final Answer Emission	Explicitly stating the final answer	Therefore, the answer is

The distribution of categories across our dataset as shown in Figure 7 reveals that *active computation* constitutes the largest proportion (32.7%), followed by *fact retrieval* (20.1%), *plan generation* (15.5%), and *uncertainty management* (14.0%). The sequential structure of reasoning is reflected in the rarity and positioning of *problem setup* (2.4%), which typically occurs at the beginning, and *final answer emission* (0.7%), which predominantly appears toward the end of the reasoning process.

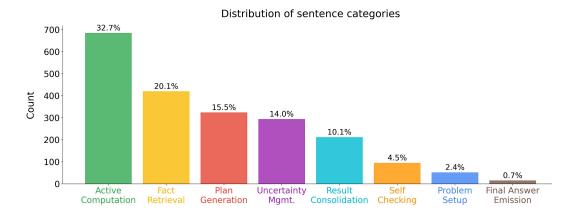


Figure 7: Counts and frequencies of taxonomic sentence categories in our dataset.

440 B Prompt information

```
We used the following prompt with OpenAI GPT-40 (April-May, 2025) to annotate each sentence:
441
442
443
   You are an expert in interpreting how LLMs solve math problems using
   multi-step reasoning. Your task is to analyze a chain-of-thought reasoning
445
    trace, broken into discrete text sentences, and label each sentence with:
446
        **function_tags**: One or more labels that describe what this sentence
447
    is *doing* functionally in the reasoning process.
448
        **depends_on**: A list of earlier sentence indices that this sentence
449
    directly depends on, e.g., uses information, results, or logic introduced
450
    in earlier sentences.
451
    This annotation will be used to build a dependency graph and perform causal
453
    analysis, so please be precise and conservative: only mark a sentence as
454
    dependent on another if its reasoning clearly uses a previous sentence's
455
    result or idea.
456
457
    Function Tags:
458
459
       problem_setup: Parsing or rephrasing the problem (initial reading or
460
    comprehension).
461
       plan_generation: Stating or deciding on a plan of action (often
462
   meta-reasoning).
463
       fact_retrieval: Recalling facts, formulas, problem details (without
464
    immediate computation).
465
       active_computation: Performing algebra, calculations, manipulations
466
    toward the answer.
467
       result_consolidation: Aggregating intermediate results, summarizing,
468
   or preparing final answer.
469
   6.
       uncertainty_management: Expressing confusion, re-evaluating, proposing
470
471
   alternative plans (includes backtracking).
   7. final_answer_emission: Explicit statement of the final boxed answer or
472
   earlier sentences that contain the final answer.
        self_checking: Verifying previous steps, checking calculations, and
   re-confirmations.
475
    9. unknown: Use only if the sentence does not fit any of the above tags
476
    or is purely stylistic or semantic.
477
478
    Dependencies:
479
480
481
    For each sentence, include a list of earlier sentence indices that the
482
    reasoning in this sentence *uses*. For example:
   - If sentence 9 performs a computation based on a plan in sentence 4 and a
483
   recalled rule in sentence 5, then depends_on: [4, 5]
484
   - If sentence 24 plugs in a final answer to verify correctness from sentence
485
   23, then depends_on:
                          [23]
486
487
   - If there's no clear dependency use an empty list: []
   - If sentence 13 performs a computation based on information in sentence 11,
   which in turn uses information from sentence 7, then depends_on: [11, 7]
490
   Important Notes:
491
  - Make sure to include all dependencies for each sentence.
493 - Include both long-range and short-range dependencies.
494 - Do NOT forget about long-range dependencies.
495 - Try to be as comprehensive as possible.
```

496 - Make sure there is a path from earlier sentences to the final answer.

```
Output Format:
497
498
   Return a dictionary with one entry per sentence, where each entry has:
499
   - the sentence index (as the key, converted to a string),
500
   - a dictionary with:
501
      - "function_tags": list of tag strings
502
      - "depends_on": list of sentence indices, converted to strings
   Here is the expected format:
505
506
   {
     "1": {
507
      "function_tags": ["problem_setup"],
508
      "depends_on": [""]
509
510
      "function_tags": ["plan_generation"],
512
      "depends_on": ["3"]
513
514
     "5": {
515
      "function_tags": ["fact_retrieval"],
516
      "depends_on": []
517
518
     "9": {
519
      "function_tags": ["active_computation"],
520
      "depends_on": ["4", "5"]
521
522
     "24": {
523
      "function_tags": ["uncertainty_management"],
524
      "depends_on": ["23"]
525
526
     "32": {
527
      "function_tags": ["final_answer_emission"],
528
      "depends_on": ["9, "30", "32"]
529
     },
530
   }
531
532
   Here is the math problem:
534
   <PROBLEM>
535
   Here is the full chain-of-thought, broken into sentences:
536
537
538
   Now label each sentence with function tags and dependencies.
539
```

60 C Sentence category probing

We trained a linear classifier to identify sentence categories based on activations. We employed a multinomial logistic regression with L2 regularization (C=1.0) on the residual stream activity from layer 47 (last layer) of R1-Distill-Qwen-14B. For evaluating accuracy, we implemented a group-5-fold cross-validation that ensured examples from the same problem response remained in either the training or testing set to prevent data leakage. We averaged the residual stream activity across tokens to create sentence-level representations, whose dimensions were then standardized. To address class imbalance in the training data, we employed balanced class weights. The model demonstrated strong discriminative power across all reasoning categories, achieving a macro-F1 score of 0.71. The confusion matrix presented in Figure 8 reveals high classification accuracies for categories such as active computation (0.74), uncertainty management (0.79), and problem setup (0.83), while showing some confusion between functionally related categories.

Sentence category classification from layer 47 activations



Predicted category

Figure 8: Confusion matrix showing the sentence category classification performance of a logistic regression probe trained on activations from layer 47 of the R1-Distill-Qwen-14B model. Values represent the proportion of examples from each true category (rows) classified as each predicted category (columns). Diagonal elements indicate correct classifications.

552 D Other reasoning model

D.1 Measuring counterfactual influence

To assess the generalizability of our counterfactual importance findings, we replicated our resampling methodology on R1-Distill-Llama-8B, applying the same experimental parameters (e.g., temperature = 0.6 and top-p = 0.95) used for R1-Distill-Qwen-14B. We collected 100 rollouts for 10 correct and 10 incorrect base solutions using the identical question set described in Section 2.

The resampling accuracy trajectories for R1-Distill-Llama-8B (Figure 9) demonstrate patterns that are similar to those observed in R1-Distill-Qwen-14B (Figure 2). Specifically, we observe similar characteristic accuracy fluctuations throughout the reasoning traces, with notable spikes and dips occurring at sentences corresponding to critical reasoning transitions.

Figure 10 shows that R1-Distill-Llama-8B exhibits similar sentence category effects whereby *plan generation* and *uncertainty management* sentences demonstrate higher counterfactual importance compared to *active computation* and *fact retrieval* sentences (see Figure 3 for R1-Distill-Owen-14B).

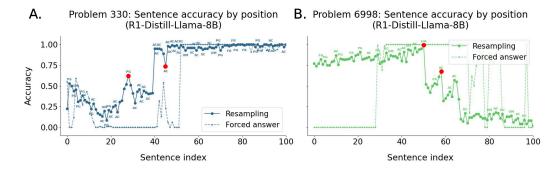


Figure 9: Accuracy over 100 rollouts at each sentence for (A) one correct and (B) one incorrect base solution for R1-Distill-Llama-8B. Red dots mark significant spikes or dips. Local minima and maxima sentences are annotated with category initials. Our analyses focus on the counterfactual KL-divergence between sentences, but resampling accuracy is visualized here as it is more intuitive.

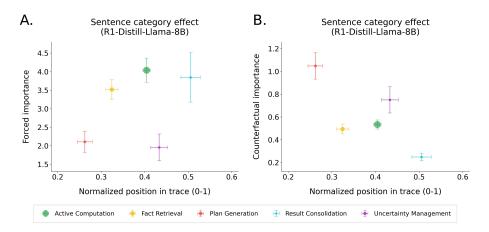


Figure 10: The mean of each sentence category for (A) forced-answer importance and (B) counterfactual importance for R1-Distill-Llama-8B, per the resampling method, plotted against the sentence category's mean position in the reasoning trace. Only the 5 most common sentence types are shown.

This cross-model validation supports our claim that reasoning traces are structured around high-level organizational sentences rather than low-level computational steps. The consistency of counterfactual importance patterns suggests that our sentence-level attribution framework captures fundamental properties of chain-of-thought reasoning that generalize beyond specific model implementations.

D.2 Attention aggregation

566

567

568

569

571

572

573

574

575

576

577

578

579

580

581

582

R1-Distill-Llama-8B displayed receiver-head patterns largely consistent with those of R1-Distill-570 Owen-14B. The histogram of attention heads' vertical-attention scores displays a right tail, indicating that some attention heads tend to particularly focus attention on a subset of sentences (Figure 12A). Interestingly, the R1-Distill-Qwen-14B receiver-heads tended to be more frequent in later layers (see below, Figure 17), which was not evident in R1-Distill-Llama-8B (Figure 11).

The R1-Distill-Qwen-14B and R1-Distill-Llama-8B receiver heads displayed consistent patterns related to sentence types, such that plan generation, uncertainty management, and self checking sentences received heightened attention; although visually, the differences to fact retrieval and active computation may be less prominent, paired t-tests (paired with respect to a given response) showed that plan generation, uncertainty management, and self checking always significantly surpassed fact retrieval and active computation (six paired t-tests: ps < .01).

No R1-Distill-Llama-8B results are provided for the attention suppression analysis, as that method was principally used for the case study, and no new case study was performed for R1-Distill-Llama-8B.

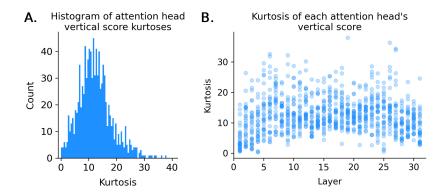


Figure 11: The plots here show the vertical-attention score patterns associated with the R1-Distill-Llama-8B data. **A.** This histogram shows the kurtosis values across all attention heads, averaged across all reasoning traces; parallels Figure 4 based on the R1-Qwen-14B data. **B.** This scatterplot shows the kurtosis of each head's vertical-attention score, organized by layer. Figure 17 is the R1-Distill-Qwen-14B version of this figure, which showed an upward trend into later layers that is not evident here.

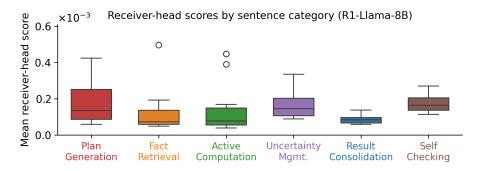


Figure 12: Based on the R1-Distill-Llama-8B data, the boxplot shows the average top-64 receiverhead score for each sentence type. The boxes correspond to the interquartile range across different reasoning traces. Figure 5 is the R1-Distill-Qwen-14B version of this figure; note that for the R1-Distill-Qwen-14B figure, the top-16 heads were used. We found that for Llama 8B, examining the top-64 heads yielded more pronounced differences, although the sentence types with the highest scores remain the same.

E Embeddings model

We used all-MiniLM-L6-v2 with a maximum sequence length of 256 tokens and a hidden dimension of 384 as our sentence embeddings model from the sentence-transformers [Reimers and Gurevych, 2019] library. We picked a cosine similarity threshold of 0.8, which is the median similarity value between all sentence removed (i.e., original sentence) and sentence resampled pairs in our dataset.

F Additional resampling results

Figure 13 presents mean counterfactual importances across all eight taxonomic categories for R1-Distill-Qwen-14B, extending the main text results (Figure 3) which showed only the five most frequent sentence types. The expanded view includes three additional categories with lower frequencies. *Problem setup* sentences occur predominantly at trace beginnings (mean normalized position ≈ 0.1) with moderate-high counterfactual importance. *Self checking* sentences tend to occur in the second-half of the traces and show lower counterfactual importance. *Final answer emission* sentences appear late in traces (mean normalized position ≈ 0.9) and show the lowest counterfactual importance. The patterns observed in the five-category analysis remain consistent when examining the full taxonomy.

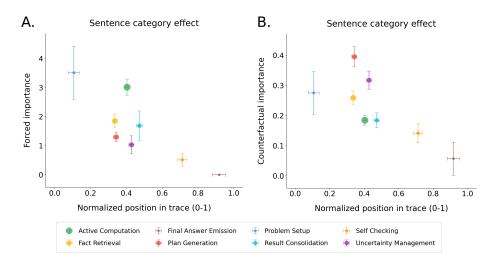


Figure 13: The mean of each sentence category for (A) forced-answer importance and (B) counterfactual importance for R1-Distill-Qwen-14B, per the resampling method, plotted against the sentence category's mean position in the reasoning trace. All sentence types are shown.

98 G Additional resampling details

G.1 Counterfactual versus resampling importance

The resampling importance metric introduced in Section 3.2 treats all resampled sentences as equally informative, but different sentence types may exhibit varying degrees of **overdetermination** during resampling. Overdetermination occurs when resampled sentences T_i are frequently similar to the original sentence S_i (i.e., $T_i \approx S_i$), indicating that the reasoning context strongly constrains what can be expressed at that position. We present empirical evidence that counterfactual importance is a more nuanced measure by accounting for semantic divergence in resampled content.

Some sentences are more overdetermined than others. Figure 14A shows that *uncertainty management* and *plan generation* sentences produce semantically different alternatives in a large proportion of resamples, while *active computation* and *problem setup* sentences show lower divergence rates.

The transition matrix in Figure 14B shows how sentence categories change under resampling. For instance, *uncertainty management* and *active computation* sentences are usually replaced by sentences of the same category, whereas *plan generation* and *fact retrieval* sentences are more often resampled into a variety of other categories.

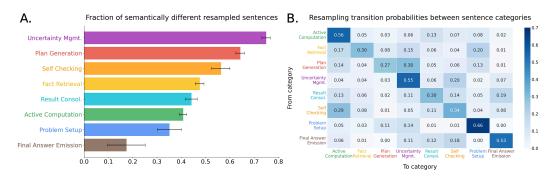


Figure 14: (A) Fraction of semantically different resampled sentences by category, showing that *uncertainty management* and *plan generation* sentences produce more divergent alternatives when resampled. (B) Transition probabilities between original and resampled sentence categories.

These resampling behaviors create systematic differences between our counterfactual and resampling importance metrics. Figure 15 demonstrates that the relationship between the two metrics varies substantially across sentences and sentence categories. The counterfactual importance metric aims to address overdetermination by explicitly filtering for semantically different resamples, providing a more targeted measure of causal influence. In contrast, the resampling metric potentially overestimates the importance of sentences that consistently produce similar content when resampled.

Counterfactual vs. resampling importance by category




Figure 15: Comparison between counterfactual and resampling importance metrics across sentence categories. Each point represents a single sentence and the dashed gray line is the y = x line.

However, the counterfactual importance metric can yield high-variance estimates when the number of semantically divergent resampled sentences is low (e.g., < 10), as the conditional probability estimates become less reliable with limited data. Alongside the limitations discussed in Section 8, this represents another constraint of our approach that future work should investigate further.

G.2 Sentence-to-sentence importance

Beyond measuring individual sentence importance, our framework quantifies causal dependencies between specific sentence pairs within reasoning traces. Figure 16 displays the sentence-to-sentence importance matrix for problem #2236 (incorrect) ("Each page number of a 488-page book is printed one time in the book. The first page is page 1 and the last page is page 488. When printing all of the page numbers, how many more 4's are printed than 8's?"), showing how individual sentences influence downstream reasoning steps. Below we list a few illustrative cases.

- 12-PG → 16-PG. The planning in sentence 12 ("1. Count the number of 4's in the units place across all page numbers") raises the probability that the model produces sentence 16 ("Starting with the 4's.") by 0.39. A plan statement triggers a subordinate planning step.
- 8-FR, 9-PG, 12-PG, 14-PG → 32-UM. The uncertainty management in sentence 32 ("However, I need to check if 440-449 is fully included.") receives sizeable positive influence from several earlier sentences: 8-FR (+0.11), 9-PG (+0.06), 12-PG (+0.12), 14-PG (+0.10). This forms the dense horizontal band at row index 32.
- 39-RC → 83-UM. The result consolidation in sentence 32 ("Now, summing up all the 4's: Units: 48 Tens: 50 Hundreds: 89. Total 4's = 48 + 50 + 89 = 187.") decreases the likelihood (i.e., inhibits) of 83-UM ("Wait, but just to be thorough, let me check the hundreds place for 4's again.") by 0.22.
- **52-AC** \neq **65-SC.** The computation in sentence 52 ("The first four blocks 80-89, 180-189, 280-289, 380-389 each contribute 10 eights in the tens place.") decreases the likelihood of 65-SC ("Let me go through each step again to make sure I didn't make a mistake.") by 0.16.
- 63-AC \rightarrow 64-UM, 65-SC, 69-SC, 75-SC, 83-UM, 86-SC. The computation in sentence 63 ("So, the difference is 187 98 = 89.") propagates forward, increasing the likelihood of 64-UM (+0.24), 65-SC (+0.17), 69-SC (+0.16), 75-SC (+0.28), 83-UM (0.23), and 86-SC (0.16). This forms the dense vertical band originating from column index 63.
- **64-UM** \rightarrow **65-SC**, **69-SC**, **75-SC**, **83-UM**, **86-SC**. The uncertainty management in sentence 64 ("Wait, that seems quite a large difference.") further amplifies the same downstream block: 65-SC (+0.32), 69-SC (+0.25), 75-SC (+0.26), 83-UM (0.25), and 86-SC (0.25).
- 83-UM → 86-SC, 90-FAE. Even very late checks matter. Sentence 83 ("Wait, but just to be thorough, let me check the hundreds place for 4's again.") increases the chance of 86-SC ("Correct. And for the tens place...") by 0.43 and of the final answer in 90-FAE by 0.41.




Figure 16: Sentence-to-sentence importance matrix for the 32 most important sentences in problem #2236 (incorrect), selected based on total outgoing and incoming importance. Each cell (i, j) shows the causal importance of sentence i on sentence j, calculated as the difference in the probability sentence j semantically occurs (> 0.8 cosine similarity) when sentence i is present versus resampled.

We provide the following pseudocode for estimating sentence-to-sentence importance:

```
Input: Sentence index i, target sentence index j (where j > i), threshold t = 0.8
655
    Output: Importance score importance(i -> j)
656
    1. Get rollouts R_keep where sentence i was kept (resampling from i+1)
658
    2. Get rollouts R_remove where sentence i was removed (resampling from i)
659
660
    3. For each rollout r in R_keep:
661
       a. Extract all sentences S_r from rollout r
662
663
       b. Find best matching sentence to target sentence j:
664
          - Compute sentence embeddings
          - Calculate cosine similarity between each s in S_r and target j
665
          - Select sentence with highest similarity if similarity >= t
666
       c. Add to matches_keep if valid match found
667
668
    4. For each rollout r in R remove:
669
       a. Extract all sentences S_r from rollout r
670
       b. Find best matching sentence to target sentence j (same process as step 3b)
671
       c. Add to matches_remove if valid match found
672
673
674
    5. Calculate match rates:
       match_rate_keep = |matches_keep| / |R_keep|
675
       match_rate_remove = |matches_remove| / |R_remove|
676
677
    6. Return importance(i -> j) = match_rate_keep - match_rate_remove
678
```

H Additional receiver head information

Receiver heads – heads receiving high kurtosis scores – are more common in late layers (Figure 17).
Examples of receiver heads are shown in Figure 18, showing how the highest kurtosis head consistently narrows attention on particular sentences, and Figure 19, showing how there exist many heads

that narrow attention on particular sentences.




Figure 17: This scatterplot shows the kurtosis of each head's vertical-attention score, organized by layer. There is an upward trend across layers and a strong uptick among some late-layer heads.

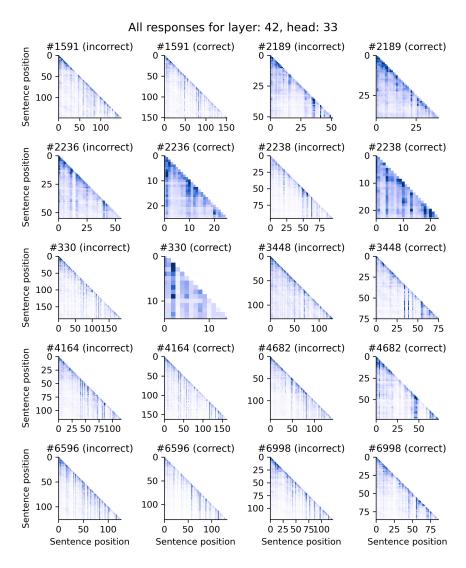


Figure 18: The attention weight matrices for the receiver head with the highest kurtosis score are shown here for all twenty responses. The coloring was defined such that the darkest navy corresponds to values surpassing 99.5th percentile value of each matrix. White is zero.

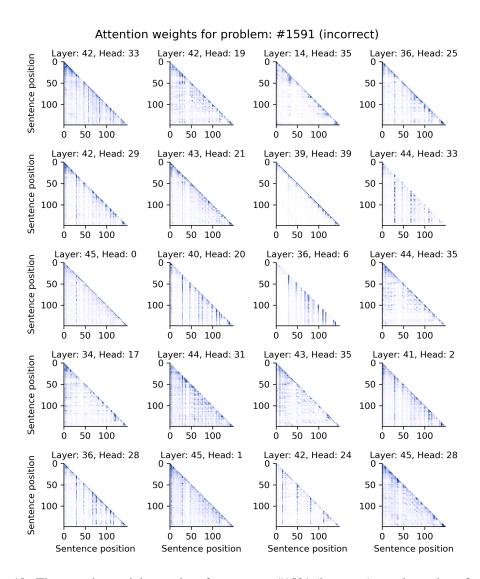


Figure 19: The attention weight matrices for response #1591 (incorrect) are shown here for the 20 attention heads yielding the highest kurtosis score across all responses. No effort was taken to "cherry-pick" responses showing prominent receiver head patterns; we are showing #1591 (incorrect) because it corresponded to the alphabetically earliest problem number among the ten problems analyzed (correct/incorrect chosen randomly). The coloring was defined such that the darkest navy corresponds to values surpassing 99.5th percentile value of each matrix. White is zero.




Figure 20: The navy and red lines on the left show the receiver-head scores assigned to sentences, averaged across the 16 heads with the highest kurtoses. The green lines on the right represent the ratio of the navy and blue lines for a given sentence rank. Sentences with high receiver head scores receive more attention in the reasoning model compared to the base model.

4 I Reasoning versus base model differences in receiver heads

Attentional narrowing toward particular sentences may be a feature specifically of reasoning models. We submitted the reasoning traces to a base model version of Qwen-14B and identified receiver heads. For both models, we sorted all sentences by their mean receiver-head score using the 16 attention heads with the highest kurtoses. The highest percentile sentences received greater attention by the reasoning model - e.g., the highest-percentile sentences receive 1.8x more attention via top-16 heads in the reasoning model compared to the base model (Figure 20). Additionally, lower percentile sentences receive less attention through the top-16 heads. This conclusion is somewhat tenuous, as no base-model difference is seen when this result is tested using R1-Distill-Llama-8B. Nonetheless, based on the Qwen-14B data, it appears the model has learned to narrow its attention toward particular sentences.

695 J Effects of ablating receiver heads

To test the causal hypothesis that the receiver heads identified in Section 4 are functionally important for reasoning, we performed an experiment ablating receiver heads and evaluating how this impact's model accuracy. This intervention is designed to measure the direct impact of removing these heads on task performance and to evaluate the possibility that they may be more important than typical heads.

J.1 Methodology

We continue to use problems from the MATH dataset. We selected 32 problems where the non-ablated model achieves 10-90% accuracy on average. For each problem, we ran R1-Distil-Qwen-14B sixteen times, while allowing the model to output up to 2¹⁶ (16,384) tokens. Responses that did not produce an answer by that point were marked as incorrect.

We compared the effect of ablating 128 attention heads (approx. 7% of all heads), 256 heads (approx. 13%), or 512 heads (approx. 27%). The ablation strategies were:

- Receiver head ablation: We ablated the top-N heads with the highest average kurtosis scores.
- 2. **Random non-receiver (control) ablation:** For each layer where *k* receiver heads were ablated, we ablated *k* heads chosen randomly from the set of heads not selected from that same layer. This ensures a matched comparison with no overlap.

Note that receiver heads are more common in late layers (see above, Figure 17). By ensuring that both conditions included an equal number of heads from each layer (rather than selecting 128, 256, or 512 heads randomly across all layers), this ensures that differences cannot be explained simply by differences in the layers selected.

In the 512-head ablation condition, a majority of attention heads in some late layers were marked as receiver heads. For these layers, the non-receiver control condition was modified to ablate the corresponding number of heads with the lowest kurtosis scores to ensure a valid comparison set. For instance, if 60% of layer 43 heads are in the top-512, then the control condition included the 60% with the lowest kurtosis score, meaning that there is 20% overlap for that layer.

2 J.2 Results and Discussion

740

741

742

746

747

748

749

751

752

753

754

755

Our experiments show that a large number of heads must be ablated to induce a significant drop in performance compared to the baseline level of accuracy (baseline = 64.1%, 95% CI: [56.0%, 72.1%]).
Regardless of whether receiver heads or non-receiver heads are targeted, ablating 128 heads produces differences in accuracy that insignificantly differ from baseline accuracy, and ablating 256 heads still produces only a small drop in accuracy (Table 2).²

Table 2: Answer accuracy on MATH problems for different self-attention-head ablation conditions. The brackets show the 95% confidence interval for each accuracy estimate.

Heads Ablated	Receiver heads	Random heads
256	48.8% [39.3%, 58.3%]	52.7% [43.0%, 62.5%]
512	27.7% [17.2%, 38.2%]	37.3% [27.5%, 47.1%]

The importance of receiver heads emerges when a large number of heads are ablated. When ablating 512 heads (over a quarter of the model's 1920 heads), targeting receiver heads caused performance to fall to 28% accuracy. Removing the same number of control heads resulted in a less severe drop to 37% accuracy. There is a significant difference between these percentages (t[31] = 2.55, p = .02), suggesting receiver heads are more critical for reasoning than other heads.

As mentioned, this analysis treats responses as incorrect if they do not produce a final answer by 16.384 tokens. If the analysis is changed to instead simply omit those responses entirely from the

As mentioned, this analysis treats responses as incorrect if they do not produce a final answer by 16,384 tokens. If the analysis is changed to instead simply omit those responses entirely from the analysis, there remains a significant difference in accuracy when ablating top-512 receiver heads (29% accuracy) versus random non-receiver heads (39% accuracy) (t[31] = 2.66, p = .02). Hence, regardless of whether non-completed responses are marked as incorrect or ignored, ablating receiver heads is found to exert a larger impact on model accuracy than ablating random non-receiver heads.

K Receiver head correlations with sentence-sentence resampling importance

A sentence's receiver-head score predicts its impact on downstream sentences per the resampling method. Specifically, our resampling approach (Section 3) produces a matrix describing each sentence's counterfactual importance on each future sentence. Based on said matrix, we can compute a sentence-level measure analogous to the receiver head score by taking the average value below the matrix diagonal; as with the receiver head score, we omit the four entries immediately below the diagonal to avoid simply capturing proximal effects and focus on farther downstream impacts; we take the absolute value of the resampling matrix to produce an estimate of how a given sentence may both upregulate or downregulate future sentences.

We correlated sentence (top-64-head) receiver scores with their resampling scores calculated here-correlated separately for each response - yielding a positive association (mean Spearman $\rho=.22$; 95% CI: [.17, .30]). Although the correlation is nominally weak/moderate, this is a consistent trend, and 18 of the 20 responses tested displayed a positive association ($\rho>0$). A sentence's receiver-score additionally correlates with its downstream effect as computed by the attention suppression measure introduced in Section 5 (mean >4 below the diagonal) (mean Spearman $\rho=.19$; 95% CI: [.10, .28]). Although attention weights alone are not a causal measure, they are computationally cheap to examine, requiring no post hoc forward pass, unlike the other two methods. Grounded in these other techniques, the receiver-head scores may hence prove useful by virtue of their limited cost.

²We are not aware of prior studies on attention head ablation for models generating long chain-of-thought reasoning, making it difficult to establish what is a typical number of heads to ablate. Potentially, a large number is necessary because the long reasoning traces (sometimes exceeding 10,000 tokens) provide extensive opportunities for error correction and compensatory computation.

Z L Case study transcript

- Below is a transcript of the model's response used for the case study (Section 6). The first 74 sentences following <think> are shown. After this point, the model converged on 100% resampling accuracy for all subsequent sentences.
- 0. (problem_setup): Okay, so I have this problem where I need to find out how many bits the base-16 number 66666₁₆ has when it's converted to base-2.
- 1. (uncertainty_management): Hmm, let's see.
- (fact_retrieval): I remember that each hexadecimal digit corresponds to exactly 4 binary
 digits, or bits.
- 3. (plan_generation): So, maybe I can just figure out how many hexadecimal digits there are and multiply by 4 to get the number of bits.
- 4. (uncertainty_management): Let me check that.
- 5. (fact_retrieval): First, the number given is 66666 in base 16.
- 6. (active_computation): Let me count the digits: 6, 6, 6, 6, 6.
- 77. (result_consolidation): That's five digits in total.
- 8. (active_computation): So, if each digit is 4 bits, then 5 digits would be 5×4=20 bits.
- 9. (uncertainty_management): Wait, is that always the case?
- 10. (fact_retrieval): I think so because each hex digit maps directly to 4 bits without any overlap or sharing.
- 11. (result_consolidation): So, 66666₁₆ would be 20 bits in binary.
- 12. (uncertainty_management): But wait, I should make sure that this is correct by actually converting the number or at least checking if there's any leading zero that might affect the bit count.
- 13. (plan_generation): Alternatively, maybe I can calculate the value of 66666₁₆ in decimal and then find out how many bits that number would require.
- 782 14. (plan_generation): Let's try that approach to cross-verify.
- 783 15. (fact_retrieval): So, to convert 66666₁₆ to decimal, I can expand it as follows:
- 16. (fact_retrieval): Each digit represents a power of 16.
- 17. (fact_retrieval): Starting from the right, the digits are 16° , 16° , 16
- 786 18. (fact_retrieval): So, the number is:
- 19. (active_computation): $6 \times 16^4 + 6 \times 16^3 + 6 \times 16^2 + 6 \times 16^1 + 6 \times 16^0$
- 788 20. (plan_generation): Let me compute each term:
- 789 21. (fact_retrieval): First, 16^4 is $16 \times 16 \times 16 \times 16$.
- 790 22. (active_computation): 16^2 is 256, so 16^3 is 256×16=4096, and 16^4 is 4096×16=65536.
- 791 23. (active_computation): So, 6×65536=393216
- 792 24. (active_computation): Next, 16^3 is 4096, so $6 \times 4096 = 24576$
- 793 25. (active_computation): Then, 16^2 is 256, so $6 \times 256 = 1536$
- 794 26. (active_computation): 16^1 is 16, so $6 \times 16 = 96$
- 795 27. (active_computation): And 16^0 is 1, so $6 \times 1 = 6$
- 796 28. (result_consolidation): Now, adding all these up:
- 797 29. (active_computation): 393216+24576=417,792
- 798 30. (active_computation): 417,792+1536=419,328
- 799 31. (active_computation): 419,328+96=419,424
- 32. (active_computation): 419,424+6=419,430
- 33. (result_consolidation): So, 66666_{16} is equal to 419,430 in decimal.

- 34. (fact_retrieval): Now, to find out how many bits this number requires, I can use the formula for the number of bits needed to represent a number N in binary, which is $floor(log_2(N)) + 1$.
- 35. (plan_generation): So, let's compute $log_2(419, 430)$.
- 36. (uncertainty_management): Hmm, I don't have a calculator here, but I can estimate it.
- 37. (fact_retrieval): I know that $2^{18} = 262,144$
- 38. (fact_retrieval): $2^{19} = 524,288$
- 39. (result_consolidation): So, 419,430 is between 2^{18} and 2^{19} .
- 40. (result_consolidation): Therefore, $log_2(419, 430)$ is between 18 and 19.
- 41. (active_computation): The floor of that would be 18, so the number of bits is 18+1=19 bits.
- 42. (uncertainty_management): Wait, but earlier I thought it would be 20 bits because it's 5 hex digits each being 4 bits.
- 43. (result_consolidation): Now, according to this, it's 19 bits.
- 44. (uncertainty_management): There's a discrepancy here.
- 45. (uncertainty_management): I must have made a mistake somewhere.
- 46. (self_checking): Wait, let me check my calculations again.
- 47. (uncertainty_management): Maybe I messed up the decimal conversion.
- 48. (fact_retrieval): Wait, 66666 in hex.
- 49. (plan_generation): Let me convert it step by step again.
- 50. (active_computation): 6×16^4 : $6 \times 65536 = 393216$
- 51. (active_computation): 6×16^3 : $6 \times 4096 = 24576$
- 52. (active_computation): 6×16²: 6×256=1536
- 53. (active_computation): 6×16^1 : $6 \times 16 = 96$
- 54. (active_computation): 6×16^0 : $6 \times 1=6$
- 55. (active_computation): Adding them up: 393216+24576=417,792
- 56. (active_computation): 417,792+1536=419,328
- 57. (active_computation): 419,328+96=419,424
- 58. (active_computation): 419,424+6=419,430.
- 59. (result_consolidation): That seems correct.
- 60. (result_consolidation): So, 419,430 in decimal.
- 61. (fact_retrieval): Now, let's check 2^{18} is 262,144, 2^{19} is 524,288.
- 62. (result_consolidation): So, 419,430 is less than 524,288, so $log_2(419,430)$ is less than 19.
- 63. (active_computation): So, $floor(log_2(419, 430))$ is 18, so number of bits is 19.
- 64. (uncertainty_management): But wait, when I thought about each hex digit being 4 bits, 5 hex digits would be 20 bits.
- 65. (uncertainty_management): So, why is there a difference?
- 66. (plan_generation): Ah, perhaps because leading zeros are not counted.
- 67. (fact_retrieval): So, when converting from hex to binary, each digit is 4 bits, but if the leading hex digits are such that when converted to binary, they don't add any leading zeros beyond the 4 bits per digit.
- 68. (uncertainty_management): Wait, but 66666 in hex is 5 digits, so 5×4=20 bits.
- 69. (result_consolidation): But according to the decimal conversion, it's 19 bits.
- 70. (result_consolidation): That suggests that when converted to binary, it's 19 bits, not 20.

71. (uncertainty_management): So, which is correct?

849

850 851

852

853

859

861

862

863

- 72. (plan_generation): Wait, perhaps when converting 66666₁₆ to binary, it's exactly 20 bits, but the leading bits are zeros, so when counting the number of bits, we don't count leading zeros
 - 73. (fact_retrieval): Wait, but in the problem, it's just asking how many bits it has when written in base 2.

Sentence 13 ("Alternatively, maybe I can calculate the value of 66666₁₆ in decimal and then find out how many bits that number would require.") was found to have the highest counterfactual importance among any sentence in the response (see Figure 2A). Five alternative possible sentences resampled at the sentence 13 position, marked by whether they eventually led to a correct or incorrect answer, are as follows:

- 1. (\times) Let me think. The first digit is 6, which in binary is 0110.
- 2. (\checkmark) Let me try converting the number to decimal first...
 - 3. (\times) Let me try converting the first few digits to binary to see how it goes.
 - 4. (\times) Let me think about the conversion process.
 - 5. (\checkmark) Let me try converting the number step by step.

864 M Sentence position effects on receiver-head scores

A sentence's position within the reasoning trace will tend to influence its measured receiver score.

As a reasoning trace progresses, the number of possible broadcasted sentences will necessarily 867 increase. For instance, by sentence 20, there might be only two broadcasted sentences (each receiving 868 50% of attention from sentences 21-29), whereas by sentence 100, there could be ten broadcasted sentences (each receiving 10% of attention from sentences 101-109). As the sum of an attention 869 weight row will sum to 1 (at the token level), later sentences will distribute their attention across a 870 larger number of past sentences. This dilution of attention creates downward pressure on the receiver-871 head scores of later sentences. This is the case even though a receiver head score extends through all 872 subsequent low-competition or high-competition periods. For example, broadcasting sentence 20 will face limited competition from receiving sentence 21-29 attention and high competition for sentences 101-109, whereas broadcasting sentence 100 will exclusively face high competition, pushing its score downward as broadcasting-sentence position increases. 876

There also exists a proximity effect on receiver-head scores that operates in the opposite direction of 877 the above effect. Although broadcasted sentences are attended by all subsequent sentences to some 878 degree, this will be more so the case for more recently subsequent sentences (e.g., receiving more 879 attention from a sentence 10 sentences downstream than one 20 sentences downstream). For sentences 880 late in the reasoning trace, the average distance to future sentences will be shorter. For example, if a 881 reasoning trace contains 120 sentences, then sentence 100 will be at most 19 sentences apart from 882 any given future sentence, whereas sentence 20 will be at most 99 sentences apart. To a degree, the 883 analyses in the report account for proximity effects by ignoring the 4 sentences immediately proximal 884 to a given sentence when calculating vertical-attention scores. However, this will not fully address 885 proximity effects. 886

We see no reason why the downward pressure of sentence position on receiver-head scores (attention dilution) will be equal in magnitude to the upward pressure of sentence position (proximity effects).

For the preparation of the present report, we conducted exploratory analyses evaluating whether the above confounding factors invalidate any presented finding, and we did not find evidence that this is the case. Thus, rather than pursuing some technique to account for the above pressures (e.g., linearly weighing attention weight matrices based on their position), we opted to only account for these factors in a minimal fashion by ignoring the attention among sentences just 4 sentences apart.