

COMBINING PRETRAINED SPEECH AND TEXT ENCODERS FOR SPOKEN LANGUAGE PROCESSING

Anonymous authors

Paper under double-blind review

ABSTRACT

Spoken Language Processing tasks that extract information from speech signal, have the advantage of using both speech and text modalities. In this paper, we propose to combine pretrained speech and text encoders via cross-attention, and we show the application of the proposed architecture in multiple spoken language processing systems. Our results indicate that it's more efficient to re-purpose previously trained independent modality encoders and learn only cross-attention from scratch. This resultant architecture captures both acoustic and lexical information, and performs text tagging while attending to speech encoder for improved results. We use compact pretrained speech and text encoder which are resource efficient and can be trained on a single consumer GPU card.

1 INTRODUCTION

Speech interfaces have seen wide adoption through virtual assistants such as Siri and Alexa which have rapidly become a part of our everyday lives. To facilitate these applications, high quality automatic systems which infer meaningful information from speech input are essential. This inference is primarily done in two forms, firstly, speech processing (asr, speaker identification, speaker diarization) and secondly, spoken language understanding (text normalization, intent, sentiment). Speech processing applications generally depend on acoustic information derived by functionals or use of pretrained acoustic encoders, however, a typical SLU, the Automatic Speech Recognition (ASR) system is used to convert speech into transcription hypotheses followed by a natural language understanding (NLU) component which acts on those hypotheses to extract an actionable semantic representation. However, in spoken language, organization of acoustic-prosodic cues within an utterance and in-between utterances can resolve semantic, lexical and syntactic ambiguities Nagel et al. (1996); Snedeker & Trueswell (2003); Frazier et al. (2006).

Several methods have been proposed to exploit acoustic-prosodic cues along with text for spoken language inference. **CITE** show that feeding n-best to text classifiers instead of 1-best can boost performance for utterance-level text inference Chuang & Wu (2004); Singla et al. (2018). Some other works show that a speech encoder and text encoder can be concatenated for utterance-level multi-modal SLU **CITE**. Alternatively features for speech segments aligned with word embeddings are fed to text based classifier for multi-modal SLU. Recently X combine speech and text encoder using cross-attention between transformer layers of randomly initialized encoder. However, their work is limited to utterance-level SLU (in form of emotion annotations).

In recent work, these encoders are first pretrained on auxiliary tasks either taking speech or text as input. They are then repurposed to further fine-tune using annotations on either modality. We propose to pretrain speech and text encoders before fine-tuning them jointly used supervised data. We show applying one-way cross attention between a text and speech encoder can perform continuous multi-modal tagging of text stream provided by an ASR. As a result, every token in the text accounts for speech variability surrounding it without the need for an explicit alignment. We also show that combining pretrained encoders using two-way cross attention between encoders from multiple modalities shows state of the results for utterance-level emotion and intent prediction.

In this context, pretrained self-supervised encoders, which directly take the continuous input in the form of raw speech, have shown promising results when fine-tuned for transcription tasks. These encoders have also been successfully fine-tuned end-to-end for a variety of SLU tasks Tzirakis et al. (2017); Chen et al. (2018); Ghannay et al. (2018); Yadav et al. (2020). We start training

from a pretrained Wav2vec2 model Baevski et al. (2020) for converting raw speech segments into fixed-dimensional temporal embeddings. In addition, we use a pretrained text encoder to convert text into token embeddings. We then apply a multi-headed attention between these embeddings in both directions, similar to encoder-decoder attention Bahdanau et al. (2015). or text-based tagging only one-way cross-attention is applied where text encoder attends to speech encoder for continuous multi-modal tagging.

The contributions of our paper is as follows:

- We illustrate that off-the-shelf pretrained encoders when combined using cross-attention shows state-of-the-art performance (2-6% over text-only models on utterance-level intent and emotion identification.)
- We attend a speech encoder using one-way cross-attention for continuous multi-modal text tagging.
- We show that results for two text tagging tasks (punctuation insertion in ASR hypothesis and speaker diarization based on ASR hypothesis) improve by 2-4% over text-only model.

2 RELATED WORK

We review methods for learning text and speech-based self-supervised encoders. We then highlight a recent growing trend using pretrained speech encoders for high-quality SLU systems. Lastly, we briefly discuss the benefits of our proposed method in relation to previously proposed multi-modal SLU approaches.

2.1 PRE-TRAINED SPEECH AND TEXT ENCODERS

Recently, it has become common practice to first pretrain text encoders using large amounts of unlabeled text before fine-tuning them for a target task Peters et al. (2017; 2018); Devlin et al. (2018). A popular method of learning text-based, self-supervised encoders is to train a language model to predict the next word in a sequence Mikolov et al. (2010); Radford & Narasimhan (2018). BERT Devlin et al. (2018) introduced a Masked Language Model (MLM) objective, where tokens are randomly masked or perturbed and the model must learn to reconstruct those portions, yielding bidirectional representations. This type of "self-supervision" has also been adopted to encode speech signals Oord et al. (2018); Pascual et al. (2019); Chung et al. (2019); Baevski et al. (2019). These encoders generally use training targets that are derived from the input signal. For example, the model may be tasked to recover the original input signal given a version transformed through augmentation techniques, recover masked inputs from the future or randomly in the sequence, or separate true inputs from synthetic samples. However, unlike text-based encoders, speech encoders generally need some amount of fine-tuning on a transcription task before being useful for SLU Chorowski et al. (2015); Chan et al. (2016); Baevski et al. (2020).

2.2 SLU DIRECTLY FROM SPEECH

With the emergence of end-to-end ASR Chorowski et al. (2015); Chan et al. (2016) and the successful pretraining of speech encoders, methods for SLU directly from the speech signal have recently shown comparable performance to the conventional approach of cascading ASR and text-based components in tasks such as named entity recognition (NER), translation, dialogue act prediction (DAP) Vila et al. (2018); Dang et al. (2020), as well as inference tasks like emotion, intent or behavior understanding Fayek et al. (2015); Price et al. (2020); Singla et al. (2020).

2.3 MULTI-MODAL SLU

The speech features for multi-modal systems are generally provided either at the level of words or utterances based on the underlying SLU task. Combining speech and text features has led to improved results for multiple tasks including: spoken text parsing, emotion extraction and also for automatic understanding of psychological disorders and human behavior Yu et al. (2013); Kim & Shin (2019); Fraser et al. (2013).

The focus of this paper is to show benefits of cross-attention mechanism to perform fusion of continuous speech and text input stream for multi-modal token-level or utterance-level fine-tuning. An exploration of various self-supervised speech encoders Arora et al. (2021); Hsu et al. (2021); Liu et al. (2021) was beyond the initial scope. Unlike previous multi-modal approaches Kim et al. (2021); You et al. (2021) it only needs aligned corpora for fine-tuning, not for pre-training. Tsai et al. (2019) uses cross-attention between transformer layers of speech and text encoders for emotion extraction instead we use cross-attention on top of pre-trained off-the-shelf encoders. Also this paper is first in performing efficient fusion for token-level multi-modal fusion. We also plan to publicly release our models and setup.

In the past, similar token-level tagging approach has been proposed to spoken text parsing. They perform feature fusion of text and speech features, where speech features are simple functionals representing a word. sequence network for chunk-level multi-modal fusion methods Tran et al. (2017). Additionally, this is the first work, which performs multimodal token-level tagging to improve over speech only and text only approaches for diarization and rich transcription. Our proposed system can transparently perform multi-modal token-level tagging of speech and text without any supervised alignments. It learns to attend token from other modalities stream while performing tagging.

3 CROSS-STITCHED MULTI-MODAL ENCODER

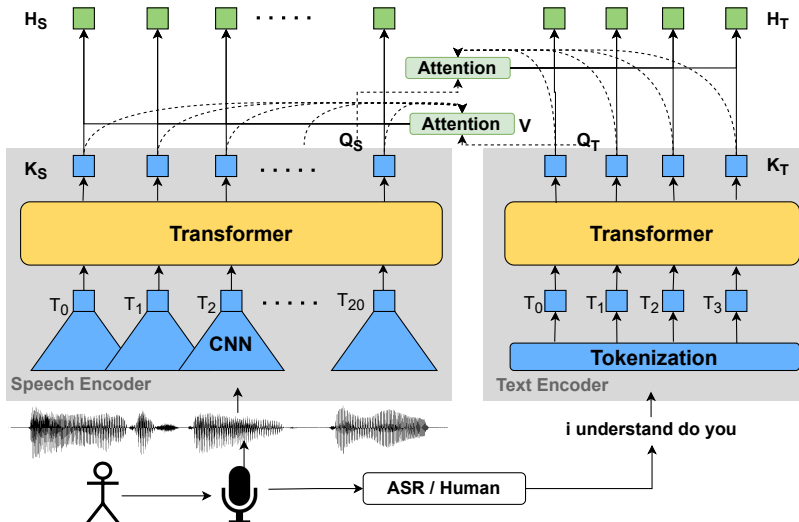


Figure 1: Cross-stitched encoding: Separately pretrained speech and text encoders are combined using a two-way multi-head cross-attention. Output of the attention-level gives token-level speech and text input which has attended to relevant information to decode a token by a supervised fine-tuning task.

Cross-stitch¹ is a tiled, raster-like pattern X used repeatedly to form a picture. It has become a common trend to cross-stitch encoders for multi-modal inference **CITE**. We propose to combine pretrained speech encoder embeddings with pretrained text encoder embeddings by applying cross-attention on the top of the encoders, instead of in-between transformer layers as done by **CITE**. Moreover, **CITE** don't perform any pre-training thus, need a lot more data for pre-training. We apply two-way multi-headed cross-modal attention between pretrained speech and text encoders. This allows each encoder to attend to the other modality's encoder in every time-step. Figure 1 gives an overview of the architecture. Our pretrained speech encoder is first trained with Wav2vec2, then fine-tuned using transcribed data for an ASR task with a CTC loss. The text input is encoded using a pretrained MLM.

The speech and text encoders output K_S and K_T respectively. Keys K_i are either text or speech tokens, and query Q_j is output from the other modality. Following the typical Transformer decoder

¹<https://en.wikipedia.org/wiki/Cross-stitch>

approach, we first apply self-attention to the target query. Keys and queries are then connected using cross-attention similar to encoder-decoder multi-headed attention Vaswani et al. (2017). Queries and keys of dimension $[d_q, d_k]$, and values of dimension d_v become inputs to the attention function. We compute the dot products of the query Q_i with all keys K_j and divide each by $\sqrt{d_k}$, where d_{k_j} is dimensionality of keys we are attending. We then apply a softmax function to obtain the weights on the values.

$$Attention(Q_i, K_j, V_j) = softmax\left(\frac{Q_i * K_{Sj}}{\sqrt{d_{k_j}}}\right) * V_j$$

We then perform the attention operation h times using different V values where queries, keys and values are low-order projections using W , creating different representations at different positions in the other modality. We employ $h = 8$ parallel attention heads. Multihead cross-attention is formally defined as follows:

$$MultiHead(Q_i, K_j, V_j) = [head_1, \dots, head_h] * W_j \tag{1}$$

where

$$head_n = Attn.(Q_n * W_Q^n, K_n * W_K^n, V_n * W_V^n) \tag{2}$$

where $W_i^n \in R^{d_{model} \times d_j}$ are parameter matrices. All heads $[1 : h]$ are concatenated to represent each multi-headed token-level cross-attention output for both speech and text input. An additional weight matrix W_j then filters the information from these cross-stitched representations. We use the resultant multi-modal temporal outputs H_S and H_T for various token-level tagging and utterance classification tasks. While performing text tagging, our system only uses H_T and attends to speech encoder via cross-attention. Thus enabling near real-time continuous multimodal SLU. All of our models and experiments are built with an open source library for model exploration and development targeting NLP.

3.1 SPEECH ENCODER

For the speech encoder (SE), we use a Wav2vec2 model with 12 Transformer blocks with 12 attention heads and a 768 dimensional hidden unit size, similar to the base model in Baevski et al. (2020). Our convolutional feature encoder is adapted for speech data sampled at 8kHz. The model was pretrained on approximately 9450 hours of anonymized speech data from a collection of conversational AI applications where users interact with an intelligent virtual agent (IVA) for customer care over the phone. The model was subsequently fine-tuned with a CTC loss on 900 hours of transcribed data².

Our initial testing showed that the lower layers of the architecture contributed most of the information relevant to downstream applications in the multi-modal setting. We found that removing the final 4 Transformer layers from the fine-tuned speech encoder resulted in very little change in performance, but significantly sped up training and inference, while reducing the overall memory footprint. Subsequently, we dropped the final 4 layers of the speech encoder for all experiments.

3.2 TEXT ENCODER

For the text-based encoder (TE), we pretrained an 8-layer Transformer, with 8 attention heads using an MLM loss on a corpus of online data including all of English Wikipedia, around 700 million conversations from Reddit AI-Rfou et al. (2016); Henderson et al. (2019), 3.3 million online forums, and 8.2 million online reviews for restaurants and hotels. The majority of the dataset contains full conversations between multiple users, and the turns are demarcated with a special end-of-utterance token. Following Shaw et al. (2018), we use relative positional representations which are not

²We saw consistent results with publicly available checkpoints.

conditioned on the global position of the token but instead use a local relative offset embedding at every layer as part of the self-attention computation. Previous literature has shown that placing the layer norm at the front of each sub-layer in the Transformer simplifies training and can improve performance Nguyen & Salazar (2019); Xiong et al. (2020); Wang et al. (2019), so we also follow this approach in our model.

We empirically observed in initial testing that the last 4 layers of the text encoder could be dropped in the downstream multi-modal application without significant performance degradation. As a result, we truncate our text encoder to only the lower 4 of the original 8 layers.

3.3 TRAINING DETAILS

Our fine-tuning system is compact and lightweight and we are able to train with a single GPU – even on a consumer card. For most experiments, we use a single NVIDIA GTX 1080ti GPU.

We use Adam with a fixed batch size of 2 with a fixed learning rate of $1.0e - 5$, for all experiments except for IVA intent detection, where we trained with a batch size of 16 on a single A100 GPU³. For all experiments, we keep the speech encoder frozen for the first 2000 steps of training. We calculate the cross-entropy loss of a final projection to the number of labels. For tagging, this translates to token-level (*word-level* in our experiments) loss. We use early stopping on a validation set for all experiments.

4 TOKEN-LEVEL FINE-TUNING

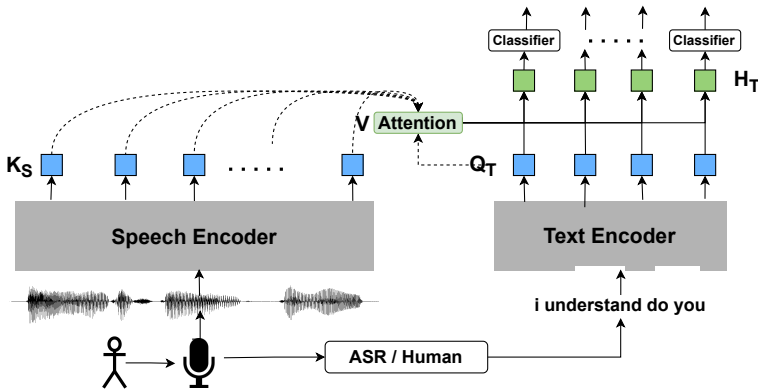


Figure 2: Word-level tagging using cross-attention mechanism. For each word-level prediction in text it takes cross-attn over the corresponding speech segment, thus, doing a soft alignment

Our proposed cross-stitched network can be used for multi-modal token-level fine-tuning for both text and speech based classification tasks. In this paper, we focus on doing token-level classification of text tokens where it attends to temporal speech embeddings using multi-headed attention. Figure 2 portrays the multi-modal token-level tagging of text.

Rich transcription makes ASR results more readable and valuable for human users. We propose two rich transcription tasks as post-processing on ASR output: 1) Punctuation insertion & capitalization and 2) Speaker diarization in role-based conversations.

4.1 PUNCTUATION INSERTION & CAPITALIZATION

We gather data readily available data from Tatoeba⁴, which provides sentences with punctuation and first-letter capitalization. It also includes speech for each sentence read by one or more speakers. In total we gather approximately 165K English sentences along with speech representing each sentence.

³We used a larger batch size due to the large size of the dataset, to compare against internal benchmarks, and because a grid search yielded significantly better results for that dataset.

⁴<https://tatoeba.org/en/>

We train our multi-modal system to insert punctuation, specifically, comma (Cm), period (Pr) & question-mark (Qus) and also perform first-letter capitalization (Cp) of words. We use 141K, 12K and 13K samples for training, validation and testing respectively. We hypothesize speech has information which can help with punctuation insertion and word capitalization. In this work, our results are limited to the Tatoeba corpus. Training data is created by adding word-level tags for punctuation insertion and capitalization where input is the normalized text (see sample below).

Input	thank	you	i	understand	do	you
Word tags	Cp:0	0:Pr	Cp:0	0:Pr	Cp:0	0:Qus
Output	Thank	you.	I	understand.	Do	you?

Our system predicts 8 different tags (shown in Table 1) for each word input. Table 1 shows word-level F1-scores for this task and illustrates the improvement in scores using the multi-modal approach (XSE) over text-only approach.

4.2 SPEAKER DIARIZATION FOR ROLE-BASED CONVERSATIONS

Speaker diarization includes predicting speaker change and clustering segments to identify speakers. One widely adopted approach for unsupervised speaker diarization first segments the input speech into fixed-length frames using a fixed step size. These frame embeddings are then clustered for a session by performing hierarchical clustering using a pre-defined similarity measure. Supervised approaches are also used to learn speaker boundaries or perform end-to-end speaker diarization based on these speech frame embeddings.

We cast speaker diarization as a token-level speaker tagging task. For this paper, we limit our study to conversations where speakers can have only two roles. We gather call-center conversation in the food domain between an agent and a customer. We gather human transcriptions, and annotations marking speaker boundaries and speaker roles for each segment. In all, we use 56 hours of speech for training, 10 hours for validation and 10 hours for testing purposes. Our evaluation set of 198 conversations contains 3.6K total speaker turns and 19K words which are tagged by our model to produce a diarized output. We hypothesize that because of assigned speaker roles there is a bias between speakers in terms of language use. Below is a sample encoding for two-person role-based conversations.

Here Agent ($A0 - A2$) words are coded as 1 and client ($C0 - C4$) words as 0. We train the system to predict 0's and 1's in a continuous stream of words from ASR.

Speaker diarization performance is generally measured using Diarization Error Rate (DER), computed as a sum of false alarms (FA): silence being recognized as speech, missed detections (MD): speech being recognized as silence, and Speaker Error Rate (SER), the % of incorrect speaker tags. In our speech-based results (upper part of Table 2⁵), we report error rates using a typical state-of-the-art speaker diarization approach. We first identify speech and non-speech regions using a Time Delay

⁵We ignore FA errors (at least 6%) as they only account for silence regions in speech.

Word-level tag		% F1	
		Text	XSE
<i>Punctuation</i>	<i>Capitalization</i>		
Comma (,)	Yes	83	87
	No	86	88
Period (.)	Yes	97	98
	No	100	100
Qus (?)	Yes	90	94
	No	99	99
None	Yes	100	100
None	No	100	100
Macro-average		93	95

Table 1: Results for Punctuation insertion and capitalization task comparing text-only vs proposed multimodal approach (XSE) on Toteba corpus.

Mini-batch	A0	A1	A2	C0	C1	C2	C3	C4	A0	A1
	C0	C1	C2	A0	A1	A2	A3	C0	C1	C2
Word tags	1	1	1	0	0	0	0	0	1	1
	0	0	0	1	1	1	1	0	0	0

Approach	% Token error	
	SER+MD	SER
<i>Speech time-series clustering</i>		
VAD + Generic PLDA + AHC	17.1	14.4
VAD + Generic PLDA + Spectral	10.7	7.7
VAD + In-Domain PLDA + Spectral	7.4	4.5
In-Domain PLDA + Spectral*	5.4	2.9
<i>Token-level role tagging</i>		
Text (TE) - Scratch		16.1
Text (TE) - Pretrained		8.1
XSE - Scratch		14.5
XSE - Pretrained		7.6

Table 2: Token error rates for speaker diarization in 2-person call-center conversations. * is the result with speech vs non-speech segmentations provided by humans.

Neural Network (TDNN) classifier Bai et al. (2019). Each window of 1.5s length with an overlap of 0.5s is converted into 128-dimensional X-vector Snyder et al. (2018) by passing through an embedding network trained to classify the speakers of switchboard corpus Godfrey et al. (1992). We then measure similarity between x-vectors using Probabilistic Linear Discriminant Analysis (PLDA) Ioffe (2006); Prince & Elder (2007). We found using additional unsupervised in-domain corpora (460 hours) translates to improved diarization performance. After measuring the similarity score between all pairs of x-vectors using PLDA, they are clustered until we arrive at two clusters, one for each speaker in the recording. In our work, we found spectral clustering yields better performance than using standard Agglomerative Hierarchical Clustering (AHC) Lin et al. (2019).

The last two rows of Table 2 shows results for our text-based speaker diarization approach using the cross-stitched encoder which improves over text based role tagging. For token-level word tagging based diarization, we treat word-level error as token error. Our cross-stitched multi-modal approach (XSE) shows improvements over text only baseline. Our text based diarization system shows similar performance when compared to a fully automated speech based unsupervised state-of-the-art approach without any in-domain unsupervised data. Best results are achieved for speech-based approach when human provided speech segment information is used instead of automatic voice activity detection (VAD) system.

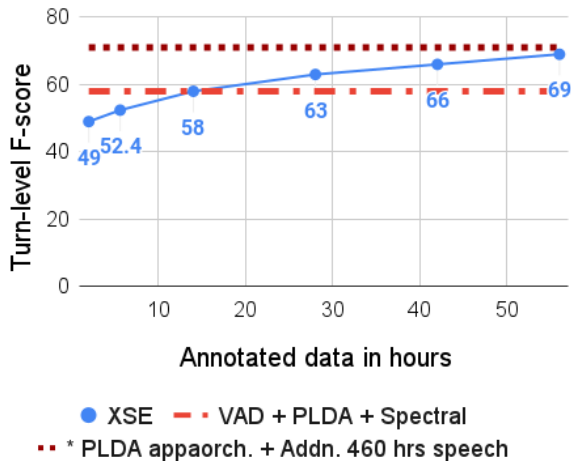


Figure 3: Comparison of multi-modal speaker diarization approach vs typical speech based diarization approach.

Speech-based diarization performs global clustering of speech time frames versus token-level tagging of words which only uses local context. Therefore, we are unable to compare these approaches directly

at the token level. We propose a turn-level evaluation metric for two-person dialogues as high quality transcriptions also implies accurately the whole turn correct. We define Recall (R) as a ratio of number of correct turns to actual turns and Precision (P) is defined as the ratio of number of correct turns to detected turns. F-score is defined as $2PR/(P + R)$ irrespective of length of the segment. Figure 3 shows variation of annotated data (speaker role and boundary information) along with turn-level diarization performance. Figure 3 shows results for multi-modal system using different sizes of annotated corpora. Our proposed approach performs similar to speech-based unsupervised PLDA approach with 14 hrs of annotated corpora. Text-only model shows 65% turn-level F-score compared to 69% for *XSE*.

Below is a sample output for our cross-stitched embedding (XSE) which takes normalized text and speech as input. It shows combined output of punctuation insertion & capitalization system and also diarization output by performing token-level role tagging.

<p>Input may i start with your phone number um five one four three eight three remo crescent road nine yes um let's see five one nine four two one uh i don't phone myself so i don't know my damn phone number um five three nine five three nine four one two nine five three nine four one two nine okay so is it pick up or delivery it's a delivery</p> <hr/> <p>Output A: May I start with your phone number? C: Um five one nine. A: Yes. C: Um let's see five one nine four two one. Uh I don't phone myself so I don't know my damn phone number. Um five three nine five three nine. A: Four one two nine five three nine four one two nine. Okay, so is it pick up or delivery? C: It's a delivery.</p>

5 UTTERANCE-LEVEL FINE-TUNING

For spoken utterance classification we compare two fusion methods. First we adopt shallow fusion similar to Siriwardhana et al. (2020) by first pooling each individual encoder's output (Q_S) for speech and (Q_T) for text. The speech and text pooled output is then concatenated along the embedding dimension. For audio, we use max pooling, and for text, following BERT, we use the special start token ([CLS]). Some datasets contain samples with only text. For these samples, we sum along embedding dimension instead of concatenation to enable smooth training. *SE-TE* refers to shallow fusion and *XSE* refers to the cross-stitched encoder model in Table 5. The unimodal systems using pooling from either Q_S or Q_T .

We train three variants of cross-stitched encoders:

- XSE-P: Pretraining is done as described in section 3 before supervised fine-tuning.
- XSE-S: No pretraining is done. Speech and text encoder directly optimized from scratch on supervised data.
- XSE-T: No pretraining and **CITE** proposed idea to put cross-attention between speech and text transformer blocks.

5.1 EMOTION IDENTIFICATION

Creating a scalable general purpose solution for emotion extraction comes with the challenge of limited data annotations. *Emotion* which captures behavioral information about a speaker has been primarily studied in the form of continuous or discrete perceived sentiment (negative, positive, neutral)

Zadeh et al. (2018); Chen et al. (2020), 7 discrete emotions (anger, disgust, fear, joy, sadness, surprise) Li et al. (2017); Busso et al. (2008) or more granular annotations of behavioral emotion Demszky et al. (2020).

Accuracy (%)								
Dataset	Maj.	Speech (SE)		Text (TE)	SE-TE	XSE-P	XSE-S	XSE-T
		no-CTC	with CTC					
MOSEI	40.7	40.9	46.8	46.8	51.7	53.4		50.7
SwitchBoard	48.5	50.2	68.1	69.2	73.3	73.6		72.0
IVA	57	61.2	76.7	79.5	80.2	80.5		80.0

Table 3: Results on emotion identification comparing our text-only approach against proposed multi-modal approaches.

In this paper, we study emotion as discrete annotations for spoken utterances which have both speech and text available.

Youtube Monologues: We report results for widely used CMU-MOSEI Zadeh et al. (2018) dataset which contains 23,453 annotated video segments from 1,000 distinct speakers and 250 topics, in total approximately 65 hours of speech along with transcriptions. Final sentiment annotated corpora contains 20k sentences annotated by 3 annotators marking discrete sentiment ranging from -3 to 3 . We follow the same data setup first as used by Tsai et al. (2019).

Two-sided telephony conversations: The Switchboard corpus (Godfrey et al., 1992) is a well studied speech corpus composed of 2400 two-sided telephony conversations from 543 speakers around the US. We mix both channels to make mono-channel audio. We use utterance segmented annotations provided by LDC. We only use samples where all three annotators agree on a sentiment label between $\{positive, negative, neutral\}$, discarding 15% of total samples. We use 44k segments for training, 2.5K samples each for development and test purposes.

Intelligent Virtual Assistant: We also use spoken utterances marked with discrete 7-way sentiment annotated data from an Intelligent Virtual Assistant (IVA) system in the customer care domain. We collect 10K unstructured spoken customer utterances from human-machine dialogue. These utterances/sentences are then coded for sentiment by 3 human annotators, with an agreement of about 75%. We use 8K for training, 1K for development and 1K for testing purposes. We mix data from all annotators for train and test.

Neutral (0) is the dominating label in all datasets, which is also the majority class performance shown in Table 3. Our fusion approaches shallow fusion ($SE - TE$) and cross-stitched fusion (XSE) both outperform text only baselines. XSE performs better than $SE - TE$ for both the MOSEI and IVA dataset. Our shallow fusion system $SE - TE$ is similar to Siriwardhana et al. (2020) as both concatenate the pooled encoder outputs before classification, however, we use a conversationally-trained, compact MLM instead of the original BERT encoder. On MOSEI dataset Tsai et al. (2019) report 50.4% vs 53.4% accuracy for our system on 7-way sentiment prediction.

5.2 INTENT DETECTION

Intent detection – attempting to understand a user’s goal in a task-oriented dialogue – is a typical problem in SLU. It has primarily been treated as an unstructured prediction problem, applied either independently, or jointly with a separate task to collect specific named entities specific to a conversation (also referred to as slot-filling). For text modality, following Pressel et al. (2022) we input text encoder a list of the top transcription hypotheses from the ASR system (referred to as N-best lists). We found this yields better results for text-only system which uses only 1-best provided by an ASR.

We also perform an ablation study to see impact of using additional speech information for few-shot SLU in the form of understanding emotions and intent prediction. We randomly sample N shots for each intent type for training, and use the same development and test datasets. We perform 5 independent runs for both text-based and multimodal $SE - TE$ setup and report avg. performance in Table 4.

Dataset	Speech (SE)	Text (TE)	SE-TE	XSE-P	XSE-S
IVA	82.34	83.07	84.01	84.23	
IVA-5shot	28.1	22.4	33.9	38.1	
IVA-10shot	45.1	50.1	50.7	50.4	
FSC	99.58	99.34	99.53	99.63	
FSC-5shot		83.4	86.8		
FSC-10shot		92.3	95.6		

Table 4: Intent detection on IVA and FSC dataset with different modalities **ADD: SOTA NUMBERS**

Intelligent Virtual Assistant We use a large dataset collected from a real-world virtual assistant applications in the customer care domain. It contains approximately 1.1 million anonymized utterances for training. Due to the size of the training set and the cost associated with obtaining human transcription of the spoken utterances and intent labels, N-best hypotheses for the spoken text are taken from a production ASR system consisting of a hybrid DNN-HMM acoustic model and an N-gram language model. Word accuracy of this ASR system is estimated to be in the mid to upper 80% range for this data. The intent labels for training come from two sources. The labels are either generated automatically by an existing production SLU system when the confidence of the system is very high, or the utterances are sent to a human agent in-the-loop to be manually labeled when the confidence of the automated label is low. The test set consists of approximately 11K utterances that are manually labeled and verified. A development set of approximately 38K noisily annotated utterances is used for early stopping. The dataset has 2 sets of labels indicating intent and entity predictions and, for classification, we use a multi-headed classifier to predict both. The joint accuracy is used to indicate overall performance. For the text modality, the N-best hypotheses are concatenated using a special end of utterance demarcation token (the same end-of-utterance token seen in text pre-training) and passed into the text encoder. While the complete 120 different intent types, for few-shot experiments (5shot, 10shot) we only use 30 most frequent intent types in the training set.

Fluent Speech Commands: We use the publicly available Fluent Speech Commands (FSC) dataset Lugosch et al. (2019) to train and evaluate our model and compare with models tested on the same dataset. The FSC corpus is the largest freely available spoken language understanding dataset that has intent labels using a wide range of subjects to record the utterances. In total, there are 248 different distinct phrases in the FSC dataset and 5 distinct domains. The data are split into 23,132 training samples from 77 speakers, 3,118 validation samples from 10 speakers and 3,793 test samples from 10 speakers. Using human transcriptions our text encoder alone can achieve 100% accuracy. However automatically generated transcripts using ASR are generally noisy. We use the two most likely transcripts generated using an end-to-end ASR model trained with NeMo toolkit⁶. We then use these transcriptions as input to our text encoder.

For the FSC dataset, we observe that, while simple concatenation of the embeddings does not outperform the audio-only encoder, our cross-attention method does better despite a much lower accuracy for the text-only modality (Table 4).

6 CONCLUSION

Our results show that cross-stitching speech and text encoders using multi-headed attention produces strong results on a diverse set of datasets. Our proposed method supports continuous multi-modal tagging for speech and text input streams. We believe our results can be improved further by including task specific data into unsupervised pretraining of speech and text encoders and exploiting context in dialogue for utterance classification. We plan to explore these directions and evaluate our approach on additional tasks in the future.

We believe our system can be made more robust for near real-time streaming by training with longer sequence lengths and/or by exploiting the context. We plan to extend our approach to more tasks including inverse text normalization, named entity recognition and sentiment tree parsing.

⁶https://catalog.ngc.nvidia.com/orgs/nvidia/collections/nemo_asr

AUTHOR CONTRIBUTIONS

If you'd like to, you may include a section for author contributions as is done in many journals. This is optional and at the discretion of the authors.

ACKNOWLEDGMENTS

Use unnumbered third level headings for the acknowledgments. All acknowledgments, including those to funding agencies, go at the end of the paper.

REFERENCES

- Rami Al-Rfou, Marc Pickett, Javier Snaider, Yun-Hsuan Sung, Brian Strope, and Ray Kurzweil. Conversational contextual cues: The case of personalization and history for response ranking. *ArXiv*, abs/1606.00372, 2016.
- Siddhant Arora, Siddharth Dalmia, Pavel Denisov, Xuankai Chang, Yushi Ueda, Yifan Peng, Yuekai Zhang, Sujay Kumar, Karthik Ganesan, Brian Yan, et al. Espnet-slu: Advancing spoken language understanding through espnet. *arXiv preprint arXiv:2111.14706*, 2021.
- Alexei Baevski, Steffen Schneider, and Michael Auli. vq-wav2vec: Self-supervised learning of discrete speech representations. *arXiv preprint arXiv:1910.05453*, 2019.
- Alexei Baevski, Henry Zhou, Abdelrahman Mohamed, and Michael Auli. wav2vec 2.0: A framework for self-supervised learning of speech representations. *arXiv preprint arXiv:2006.11477*, 2020.
- Dzmitry Bahdanau, Kyunghyun Cho, and Yoshua Bengio. Neural machine translation by jointly learning to align and translate. *CoRR*, abs/1409.0473, 2015.
- Ye Bai, Jiangyan Yi, Jianhua Tao, Zhengqi Wen, and Bin Liu. Voice activity detection based on time-delay neural networks. In *2019 Asia-Pacific Signal and Information Processing Association Annual Summit and Conference (APSIPA ASC)*, pp. 1173–1178. IEEE, 2019.
- Carlos Busso, Murtaza Bulut, Chi-Chun Lee, Abe Kazemzadeh, Emily Mower, Samuel Kim, Jeanette N Chang, Sungbok Lee, and Shrikanth S Narayanan. Iemocap: Interactive emotional dyadic motion capture database. *Language resources and evaluation*, 42(4):335–359, 2008.
- William Chan, Navdeep Jaitly, Quoc Le, and Oriol Vinyals. Listen, attend and spell: A neural network for large vocabulary conversational speech recognition. In *2016 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 4960–4964. IEEE, 2016.
- Eric Chen, Zhiyun Lu, Hao Xu, Liangliang Cao, Yu Zhang, and James Fan. A large scale speech sentiment corpus. In *Proceedings of the 12th Language Resources and Evaluation Conference*, pp. 6549–6555, 2020.
- Yuan-Ping Chen, Ryan Price, and Srinivas Bangalore. Spoken language understanding without speech recognition. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 6189–6193. IEEE, 2018.
- Jan Chorowski, Dzmitry Bahdanau, Dmitriy Serdyuk, Kyunghyun Cho, and Yoshua Bengio. Attention-based models for speech recognition. *arXiv preprint arXiv:1506.07503*, 2015.
- Ze-Jing Chuang and Chung-Hsien Wu. Emotion recognition using acoustic features and textual content. In *2004 IEEE International Conference on Multimedia and Expo (ICME)(IEEE Cat. No. 04TH8763)*, volume 1, pp. 53–56. IEEE, 2004.
- Yu-An Chung, Wei-Ning Hsu, Hao Tang, and James Glass. An Unsupervised Autoregressive Model for Speech Representation Learning. In *Proc. Interspeech 2019*, pp. 146–150, 2019. doi: 10.21437/Interspeech.2019-1473.
- Viet-Trung Dang, Tianyu Zhao, Sei Ueno, Hirofumi Inaguma, and Tatsuya Kawahara. End-to-end speech-to-dialog-act recognition. *arXiv preprint arXiv:2004.11419*, 2020.

- Dorottya Demszky, Dana Movshovitz-Attias, Jeongwoo Ko, Alan Cowen, Gaurav Nemade, and Sujith Ravi. Goemotions: A dataset of fine-grained emotions. *arXiv preprint arXiv:2005.00547*, 2020.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. Bert: Pre-training of deep bidirectional transformers for language understanding. *arXiv preprint arXiv:1810.04805*, 2018.
- Haytham M Fayek, Margaret Lech, and Lawrence Cavedon. Towards real-time speech emotion recognition using deep neural networks. In *2015 9th international conference on signal processing and communication systems (ICSPCS)*, pp. 1–5. IEEE, 2015.
- Kathleen C Fraser, Frank Rudzicz, and Elizabeth Rochon. Using text and acoustic features to diagnose progressive aphasia and its subtypes. In *Interspeech*, pp. 2177–2181, 2013.
- Lyn Frazier, Katy Carlson, and Charles Clifton Jr. Prosodic phrasing is central to language comprehension. *Trends in cognitive sciences*, 10(6):244–249, 2006.
- Sahar Ghannay, Antoine Caubrière, Yannick Estève, Nathalie Camelin, Edwin Simonnet, Antoine Laurent, and Emmanuel Morin. End-to-end named entity and semantic concept extraction from speech. In *2018 IEEE Spoken Language Technology Workshop (SLT)*, pp. 692–699. IEEE, 2018.
- John J Godfrey, Edward C Holliman, and Jane McDaniel. Switchboard: Telephone speech corpus for research and development. In *Acoustics, Speech, and Signal Processing, IEEE International Conference on*, volume 1, pp. 517–520. IEEE Computer Society, 1992.
- Matthew Henderson, Paweł Budzianowski, Iñigo Casanueva, Sam Coope, Daniel Gerz, Girish Kumar, Nikola Mrksic, Georgios P. Spithourakis, Pei hao Su, Ivan Vulic, and Tsung-Hsien Wen. A repository of conversational datasets. *ArXiv*, abs/1904.06472, 2019.
- Wei-Ning Hsu, Benjamin Bolte, Yao-Hung Hubert Tsai, Kushal Lakhota, Ruslan Salakhutdinov, and Abdelrahman Mohamed. Hubert: Self-supervised speech representation learning by masked prediction of hidden units. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 29:3451–3460, 2021.
- Sergey Ioffe. Probabilistic linear discriminant analysis. In *European Conference on Computer Vision*, pp. 531–542. Springer, 2006.
- Eesung Kim and Jong Won Shin. Dnn-based emotion recognition based on bottleneck acoustic features and lexical features. In *ICASSP 2019-2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 6720–6724. IEEE, 2019.
- Minjeong Kim, Gyuwan Kim, Sang-Woo Lee, and Jung-Woo Ha. St-bert: Cross-modal language model pre-training for end-to-end spoken language understanding. In *ICASSP 2021-2021 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 7478–7482. IEEE, 2021.
- Yanran Li, Hui Su, Xiaoyu Shen, Wenjie Li, Ziqiang Cao, and Shuzi Niu. Dailydialog: A manually labelled multi-turn dialogue dataset. *arXiv preprint arXiv:1710.03957*, 2017.
- Qingjian Lin, Ruiqing Yin, Ming Li, Hervé Bredin, and Claude Barras. Lstm based similarity measurement with spectral clustering for speaker diarization. *arXiv preprint arXiv:1907.10393*, 2019.
- Andy T Liu, Shang-Wen Li, and Hung-yi Lee. Tera: Self-supervised learning of transformer encoder representation for speech. *IEEE/ACM Transactions on Audio, Speech, and Language Processing*, 29:2351–2366, 2021.
- Loren Lugosch, Mirco Ravanelli, Patrick Ignoto, Vikrant Singh Tomar, and Yoshua Bengio. Speech model pre-training for end-to-end spoken language understanding. *arXiv preprint arXiv:1904.03670*, 2019.
- Tomas Mikolov, Martin Karafiát, Lukas Burget, Jan Cernocký, and Sanjeev Khudanpur. Recurrent neural network based language model. In *Interspeech*, volume 2, pp. 1045–1048. Makuhari, 2010.

- H Nicholas Nagel, Lewis P Shapiro, Betty Tuller, and Rebecca Nawy. Prosodic influences on the resolution of temporary ambiguity during on-line sentence processing. *Journal of Psycholinguistic Research*, 25(2):319–344, 1996.
- Toan Q. Nguyen and Julian Salazar. Transformers without tears: Improving the normalization of self-attention. *ArXiv*, abs/1910.05895, 2019.
- Aaron van den Oord, Yazhe Li, and Oriol Vinyals. Representation learning with contrastive predictive coding. *arXiv preprint arXiv:1807.03748*, 2018.
- Santiago Pascual, Mirco Ravanelli, Joan Serra, Antonio Bonafonte, and Yoshua Bengio. Learning problem-agnostic speech representations from multiple self-supervised tasks. *arXiv preprint arXiv:1904.03416*, 2019.
- Matthew E. Peters, Waleed Ammar, Chandra Bhagavatula, and Russell Power. Semi-supervised sequence tagging with bidirectional language models. In *ACL*, 2017.
- Matthew E. Peters, Mark Neumann, Mohit Iyyer, Matt Gardner, Christopher Clark, Kenton Lee, and Luke Zettlemoyer. Deep contextualized word representations. In *NAACL*, 2018.
- Daniel Pressel, Wenshuo Liu, Michael Johnston, and Minhua Chen. Lightweight transformers for conversational ai. In *Proceedings of the 2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies: Industry Track*, pp. 221–229, 2022.
- Ryan Price, Mahnoosh Mehrabani, and Srinivas Bangalore. Improved end-to-end spoken utterance classification with a self-attention acoustic classifier. In *ICASSP 2020-2020 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 8504–8508. IEEE, 2020.
- Simon JD Prince and James H Elder. Probabilistic linear discriminant analysis for inferences about identity. In *2007 IEEE 11th International Conference on Computer Vision*, pp. 1–8. IEEE, 2007.
- Alec Radford and Karthik Narasimhan. Improving language understanding by generative pre-training. In *PrePrint*, 2018.
- Peter Shaw, Jakob Uszkoreit, and Ashish Vaswani. Self-attention with relative position representations. In *NAACL*, 2018.
- Karan Singla, Zhuohao Chen, Nikolaos Flemotomos, James Gibson, Dogan Can, David C Atkins, and Shrikanth S Narayanan. Using prosodic and lexical information for learning utterance-level behaviors in psychotherapy. In *Interspeech*, pp. 3413–3417, 2018.
- Karan Singla, Zhuohao Chen, David Atkins, and Shrikanth Narayanan. Towards end-2-end learning for predicting behavior codes from spoken utterances in psychotherapy conversations. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 3797–3803, 2020.
- Shamane Siriwardhana, Andrew Reis, Rivindu Weerasekera, and Suranga Nanayakkara. Jointly fine-tuning” bert-like” self supervised models to improve multimodal speech emotion recognition. *arXiv preprint arXiv:2008.06682*, 2020.
- Jesse Snedeker and John Trueswell. Using prosody to avoid ambiguity: Effects of speaker awareness and referential context. *Journal of Memory and language*, 48(1):103–130, 2003.
- David Snyder, Daniel Garcia-Romero, Gregory Sell, Daniel Povey, and Sanjeev Khudanpur. X-vectors: Robust dnn embeddings for speaker recognition. In *2018 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 5329–5333. IEEE, 2018.
- Trang Tran, Shubham Toshniwal, Mohit Bansal, Kevin Gimpel, Karen Livescu, and Mari Ostendorf. Joint modeling of text and acoustic-prosodic cues for neural parsing. *arXiv preprint arXiv:1704.07287*, 2017.

- Yao-Hung Hubert Tsai, Shaojie Bai, Paul Pu Liang, J Zico Kolter, Louis-Philippe Morency, and Ruslan Salakhutdinov. Multimodal transformer for unaligned multimodal language sequences. In *Proceedings of the conference. Association for Computational Linguistics. Meeting*, volume 2019, pp. 6558. NIH Public Access, 2019.
- Panagiotis Tzirakis, George Trigeorgis, Mihalis A Nicolaou, Björn W Schuller, and Stefanos Zafeiriou. End-to-end multimodal emotion recognition using deep neural networks. *IEEE Journal of Selected Topics in Signal Processing*, 11(8):1301–1309, 2017.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In *Advances in neural information processing systems*, pp. 5998–6008, 2017.
- Laura Cross Vila, Carlos Escolano, José AR Fonollosa, and Marta R Costa-Jussa. End-to-end speech translation with the transformer. In *IberSPEECH*, pp. 60–63, 2018.
- Qiang Wang, Bei Li, Tong Xiao, Jingbo Zhu, Changliang Li, Derek F. Wong, and Lidia S. Chao. Learning deep transformer models for machine translation. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 1810–1822, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1176. URL <https://aclanthology.org/P19-1176>.
- Ruibin Xiong, Yunchang Yang, Di He, Kai Zheng, Shuxin Zheng, Chen Xing, Huishuai Zhang, Yanyan Lan, Liwei Wang, and Tie-Yan Liu. On layer normalization in the transformer architecture. *ArXiv*, abs/2002.04745, 2020.
- Hemant Yadav, Sreyan Ghosh, Yi Yu, and Rajiv Ratn Shah. End-to-end named entity recognition from english speech. *arXiv preprint arXiv:2005.11184*, 2020.
- Chenyu You, Nuo Chen, and Yuexian Zou. Self-supervised contrastive cross-modality representation learning for spoken question answering. *arXiv preprint arXiv:2109.03381*, 2021.
- Zhou Yu, Stefen Scherer, David Devault, Jonathan Gratch, Giota Stratou, Louis-Philippe Morency, and Justine Cassell. Multimodal prediction of psychological disorders: Learning verbal and nonverbal commonalities in adjacency pairs. In *SemDial 2013 DialDam: Proceedings of the 17th Workshop on the Semantics and Pragmatics of Dialogue*, pp. 160–169, 2013.
- AmirAli Bagher Zadeh, Paul Pu Liang, Soujanya Poria, Erik Cambria, and Louis-Philippe Morency. Multimodal language analysis in the wild: Cmu-mosei dataset and interpretable dynamic fusion graph. In *Proceedings of the 56th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 2236–2246, 2018.

A APPENDIX

	Dataset	1-shot	5-shot	10-shot	15-shot
Intent	MOSEI				
	IVA				
Emotion	FSC				
	IVA		22.4	50.1	

Table 5: Few-shot experiment results