

# SESSIONINTENTBENCH: A Multi-task Inter-Session Intention-Shift Modeling Benchmark for E-commerce Customer Behavior Understanding

Anonymous ACL submission

## Abstract

Session history is a common way of recording user interacting behaviors throughout a browsing activity with multiple products. For example, if an user clicks a product webpage and then leaves, it might be because there are certain features that don't satisfy the user, which serve as an important indicator of on-the-spot user preferences. However, all prior works fail to capture and model customer intention effectively because insufficient information exploitation and only apparent information like descriptions and titles are used. There is also a lack of data and corresponding benchmark for explicitly modeling intention in E-commerce product purchase sessions. To address these issues, we introduce the concept of an *intention tree* and propose a dataset curation pipeline. Together, we construct a sibling multimodal benchmark, SESSIONINTENTBENCH, that evaluates L(V)LMs' capability on understanding inter-session intention shift with four subtasks. With 1,952,177 intention entries, 1,132,145 session intention trajectories, and 13,003,664 available tasks mined using 10,905 sessions, we provide a scalable way to exploit the existing session data for customer intention understanding. We conduct human annotations to collect ground-truth label for a subset of collected data to form an evaluation gold set. Extensive experiments on the annotated data further confirm that current L(V)LMs fail to capture and utilize the intention across the complex session setting. Further analysis shows injecting intention enhances LLMs' performances.

## 1 Introduction

Modeling and analyzing customer intention is of great importance in the E-commerce domain (Dai et al., 2006a; Jammalamadaka et al., 2009; Li et al., 2020). This enables us to give better product recommendations and provide more personalized services (Hu et al., 2008; Zhao et al., 2015; Zhu et al., 2024). Conventional ways of understanding user



Figure 1: An example of customer intention-shift in the session. At each session step, the customer interacts with a new product, may change his purchase intent, and then looks for items with desired features.

intention always rely on analyzing user profiles or purchasing records, but such information is not easily retrievable or even missing in real world applications. Therefore, we need a data source with better accessibility and applicability, such as the product purchase sessions, which concludes the user behavior throughout a series of sequential browsing activities. By analyzing the interaction history in this short period of time, we are able to infer the user intention and how it changes over time. The shifting intent behind product searches and inspections can further affect future user interactions. For example, in Figure 1, the customer exposes his intention when he switches from flashy red shoes to plain white ones. After that, browsing for shoes at a much lower price shows customers' need for cheap

and cheerful products. By modeling customer session intention and adjusting inferred results when needed, we can provide more customized services in an accurate and timely manner.

Existing work either covers session or intention, but not collectively. There has been experiment focusing on exploiting the product information within one session and using it to make direct predictions (Jin et al., 2023b), which assembles useful information based on specific product attributes like titles and prices. While some other works explicitly model the user intention behind the single purchase or co-buy behaviors (Xu et al., 2024; Ding et al., 2024). They leverage the most recent user actions for intention understanding and inference, covering only one or two products, but fall short of exploring user preference shifts over a longer horizon, such as sessions. However, Jin et al. (2023b) have shown that session information and fine-grained attribute analysis would help LLMs to give better next-product recommendations. Considering these aspects, it is essential to formulate a method to explicitly model intention over a session period.

But when modeling intention dynamically in more complex purchase contexts, such as sessions, several gaps remain. Firstly, current works only use short-term information and focus on single or co-buy purchases. This approach overlooks the potential motivational intention embedded in earlier user interactions, therefore hindering the models’ capability of making reasonable inferences. Furthermore, among various attributes, only product titles and images are used as product inference hints, which omits important dimensions of product information and results in a waste of information from the collected knowledge base. Last but not least, we lack an automated pipeline to streamline the construction of such intention data, there hasn’t been any formulation of such tasks or benchmark data to evaluate L(V)LM systems.

To combat this, we first propose SESSIONINTENTBENCH tasks, consisting of four sequential subtasks tailored to systematically evaluate L(V)LMs’ capability in understanding customer intention within session browsing records. Then, we design an automated framework to streamline the collection of detailed product metadata, customer intention, and intention shift within the session by prompting L(V)LM in a multi-step manner.

By applying our method to Amazon-M2 (Jin et al., 2023b), we first filter and collect 10,905 sessions with complete textual and visual data. We

enrich the original session with intention entries and obtain 1,132,145 possible intention pathways. After that, we further conduct human annotations to 8,980 sampled intention trajectories to form an evaluation benchmark. Then, we carry out extensive experiments over more than 20 L(V)LMs by applying different evaluation settings and prompting techniques, along with extra fine-tunings. Our findings indicate that current L(V)LMs struggle with the proposed tasks. Further analyses reveal potential underlying causes behind the observed low model accuracy and introduce intention injection as a possible way of assisting models’ understanding of session intent and improving performances. We will make our code, data, and models publicly available after acceptance.

## 2 Related Works

### 2.1 Intention Understanding

Intention is the internal mental state that affects people’s decision-making (Alford and Biswas, 2002). By analyzing the inner intention states of the users, service providers are able to present more personalized products (Dai et al., 2006b) and give back more accurate responses (Zhang et al., 2016). In E-commerce, customer intention is crucial in understanding their purchase behaviors and preferences (Shim et al., 2001). There has been ongoing research trying to decode how to model shopping intention. For example, using history information like tags (Wang et al., 2025) and co-buy behaviors (Yu et al., 2023; Xu et al., 2024). Recently, studies show that LLMs are struggling to connect the dots between intended products and user intention (Ding et al., 2024). However, figuring out the items the user wanted is even more difficult when it comes to more complex settings like session histories (Jin et al., 2023b). To bridge the gap between understanding intention and providing more precise shopping aids, we formulate SESSIONINTENTBENCH tasking L(V)LMs to infer intent by leveraging session metadata from multiple angles.

### 2.2 Purchase Session in E-commerce

Purchase session is a record of customer interaction history, which has been becoming an increasingly hot area of research (Alves Gomes et al., 2022; Jia et al., 2023; Wang et al., 2024b). Various methods are proposed trying to exploit the abundant information contained here, such as using deep reinforcement learning models (Bharadwaj et al.,

2022), leveraging graph neural networks (Jin et al., 2023a), and carrying out complex logical reasoning techniques (Liu et al., 2023b). While Jin et al. (2023b) systematically introduces session information as an important factor for understanding sequential interacting behavior, Liu et al. (2023b) points out that product attributes play a pivotal role in enhancing user intent capture. This shows that a more fine-grained framework of session intention evaluation is needed. Using the summarization and generation ability of L(V)LMs, in SESSIONINTENTBENCH, we extract and incorporate session intent metadata from multiple aspects for more comprehensive intention capturing.

### 3 Problem Definition

#### 3.1 SESSIONINTENTBENCH Task Definitions

First of all, we give definitions to the tasks in SESSIONINTENTBENCH. We propose to model the intention shift from four aspects as a comprehensive formulation, as outlined in Figure 2, to facilitate the creation of a L(V)LM shopping agent that is able to: (i) Detect the attribute that is decisive in the intention shift. (ii) Model intention trajectories with mined attributes and leverage them to give better predictions on future interactions. (iii) Compare between the most recently viewed product with previously interacted ones and use this comparison to validate the plausibility of the inferred intent. (iv) Leverage modeled intention trajectories to predict future product interaction preferences.

To this end, we propose tasks that each emphasize a different angle of analysis. Assume we have collected the customer interaction history over time steps  $t = 1, 2, \dots, T$ , i.e., the interacted products  $P_1, P_2, \dots, P_T$  and attributes that affect customer decision-making at each step  $A_1, A_2, \dots, A_T$ . Then the history information up till time step  $t$  can be summarized as  $\mathcal{H}_t = \{(P_j, A_j)\}_{j=1}^t$ . We denote inferred customer intention as  $I_1, I_2, \dots, I_T$ , and comparisons between interacted items and internal intent of the current step and previous step  $C_1, C_2, \dots, C_T$ .

**TASK 1: Intent-Based Purchasing Likelihood Estimation:** The first task asks the model to verify whether the last proposed intention is a good alignment with the new product we are going to interact with. The model will be given history information  $\mathcal{H}_{t-1}$ , the proposed intention  $I_{t-1}$ , and new product  $P_t$ . It is asked to output a likelihood estimation score  $\mathcal{S}_1(P_t, I_{t-1}) \mid \mathcal{H}_{t-1} \in \{0, 1, 2, 3\}$

for the customer to interact with  $P_t$ , where 3 means the most likely and 0 means the least probable.

**TASK 2: Purchasing Likelihood Inference via Valued Attributes Regularization:** The second task requires the model to verify whether the proposed valued attributes of the user are an essential element of the actual unseen product. The model is provided with the history information  $\mathcal{H}_{t-1}$ , the proposed valued attribute  $A_{t-1}$ , and the new unseen product  $P_t$ . The model is required to output an estimated interaction likelihood score  $\mathcal{S}_2(P_t, A_{t-1}) \mid \mathcal{H}_{t-1} \in \{0, 1, 2, 3\}$  for the user to interact with  $P_t$  under the assumption that the user values the product feature  $A_{t-1}$ , where 3 means the most likely and 0 means the least probable.

**TASK 3: Intention Justification via Comparison:** To ensure that the proposed intent is reasonable and to verify against potential hallucinations, the third task ask the model to justify whether the proposed  $C_t$  provides a reasonable justification for the user to interact with  $P_t$  after seeing  $P_{t-1}$ . Formally, the model is tasked to output a score  $\mathcal{S}_3(C_t, P_{t-1}, I_{t-1}, P_t, I_t) \mid \mathcal{H}_{t-1} \in \{0, 1, 2, 3\}$  indicating the plausibility of the generated comparison.

**TASK 4: Intention Evolution Modeling:** The final task we proposed aims to test the model’s ability to help the recommendation systems decide whether to further recommend similar products or not. Providing the model with all the historical information and inferred purchasing intent, we ask it to choose from exposing the user to (a) Similar products under the same category, (b) Products with different features but still under the same category, (c) Products under different category (exploring more to figure out user preferences). If we map the choices to numerical score  $\{1, 2, 3\}$ , then we formalize the task as questioning for  $\mathcal{S}_4(exploration, I_t) \mid \mathcal{H}_t \in \{1, 2, 3\}$ . Note that the degree of exploitation decreases and exploration increases as the score increases.

#### 3.2 Dataset

We obtain products in series of sequential interactions from Amazon-M2 dataset (Jin et al., 2023b) and product image information from Amazon Review Dataset (Hou et al., 2024). We leverage the abundant textual information (such as titles, price, color, material, etc.) mentioned in Amazon-M2 and retrieve corresponding product images from Amazon Review Dataset to curate the dataset. After filtering out products whose links are missing or

not accessible, we obtained 10,905 sessions with complete textual and visual components.

## 4 SESSIONINTENTBENCH Construction

In this section, we present our methodology of constructing the intention tree from the source data we collected and how we curated the SESSIONINTENTBENCH. An overview is presented in Figure 2. Our framework consists of four steps: (i) Extract attributes for session products to provide aids for model inference in later steps. (ii) For each time step, prompt the models to mimic customer behavior and infer multiple intentions from previous interactions. (iii) Enrich intention tree structure with more nuanced inter-session intention metadata analyses, which is taken from multiple perspectives on how and why intention shifts over time. (iv) Conduct human annotations for the constructed tree

### 4.1 Multi-modal Attribute Extraction

The first step aims to extract product attributes that can better assist LVLMS in analyzing user intention shift in later stages. To achieve this, we use GPT-4o-mini (OpenAI, 2024a) as the extraction tool and provide it with ensembled textual and visual information of session products. The LVLMS is then asked to output a general classification of the product itself, and to categorize then instantiate the extractable features of the product, for example (e.g., *color: white, size: 7.5 inches*).

### 4.2 Customer Intention Generation

To build up the intention tree based on the product purchase session, we first fill up the tree bones with predicted user intention using L(V)LMs. The intention are inferred at each time step following the session time frame. Starting with the first item in the session, we ask the model to infer a list of possible intention  $\langle I_{t1}, I_{t2}, I_{t3}, \dots \rangle|_{t=1}$  based on textual and visual information of the product user interacted, where the prompt is demonstrated below. Then, repeat the inference every step as we add the next new session product into the visible list of items to the model.

To make the intention instantiation successional, we add the intention information of the previous time step  $\{I_i\}_{i=1}^{t-1}$  (**<Prev Intent>**) to facilitate the model to do the reasoning. And at each time we do the inference, we will only use one intention chosen from the previous step intention, to ensure

Genre	Property	Train	Test
Basic Info	# Sessions (uni.)	8963	5306
	# Sampled Tasks	28736	7184
	Avg. # Products	3.4163	3.4123
	Avg. # Intention	3.4163	3.4123
Session Len	# Len = 3	18956	4752
	# Len = 4	7598	1902
	# Len = 5	2182	530
Task Num	# TASK 1	7153	1827
	# TASK 2	7171	1809
	# TASK 3	7154	1826
	# TASK 4	7258	1722

Table 1: Statistics of the sampled and annotated data for the SESSIONINTENTBENCH benchmark. *uni.* means unique sessions are included. Note that the dataset is randomly shuffled and then sampled by 13,003,664 tasks or 1,132,145 intention trajectories, not by sessions.

the coherent intention trajectory sampling. More specifically, the model is the constraint to output the five most possible user intentions, denoted as  $\{\langle \text{New Intent } i \rangle\}_{i=1}^5$ , prior to the fifth product at each iteration. This process is referred to as *branching*, as it resembles the growth of a tree, wherein each new intention branches out from the initial concept, akin to twigs dividing into finer branches. And start from the fifth product, we only infer one possible intention at a time to control the exponential growth of the tree size (by setting  $|\langle \text{New Intent} \rangle|=1$ ).

```

<TASK-PROMPT>
<INPUT:>
<Prev Intent><Prev Products><New Product>
<OUTPUT:>
<New Intent 1><Attr 1><Rationale 1><Comp 1>
<New Intent 2><Attr 2><Rationale 2><Comp 2>
...
<New Intent 5><Attr 5><Rationale 5><Comp 5>
<INPUT:>
<Prev Intent><Prev Products><New Product>
<OUTPUT:>

```

### 4.3 Inter-Sessions Intention Shift Analysis

Following this, we want to investigate the specific reasons behind each intention shift before and after the customer sees each product and how that might influence the further decision-making of the customer. The prompt we used for generation is given above. To ground the reasoning on the actual product metadata, we require the model to point out the most likely feature **<Attr>**  $A_t$  that affects the user choices. Furthermore, we ask for a more comprehensive comparison **<Comp>**  $C_t$  between the last product  $P_t$  the previous one  $P_{t-1}$ , providing logi-



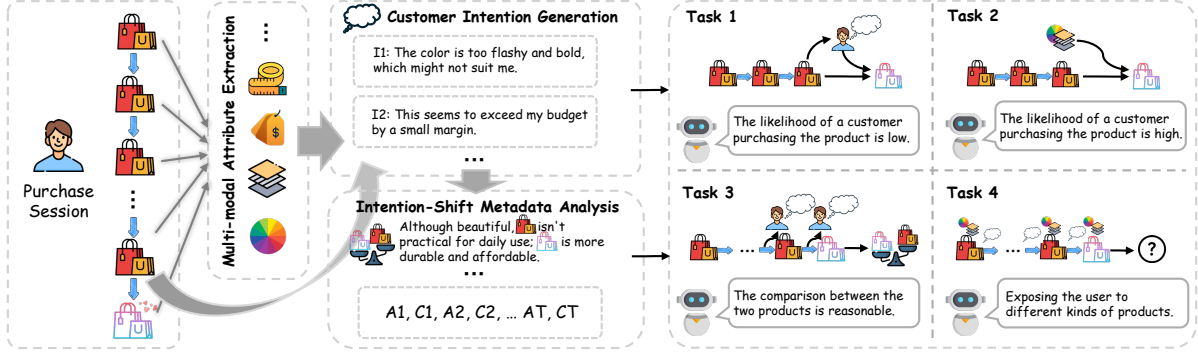


Figure 2: Overview of SESSIONINTENTBENCH and the construction pipeline. Multi-modal attribute extraction is conducted first as an aid for further step intention generation. Metadata analyses are conducted afterward to provide a more fine-grained and detailed inspection of intention shifts in the session interaction. Here,  $A_i, C_i$  stands for attributes and comparisons at  $i$ -th step. Different task is associated with different collections of metadata.

cal supports for the modeled intention pathways. In order to help models reason better, we require the model to provide rationales (**<Rationale>**) behind the generations as part of the output. We collect this analysis metadata in the format of one general categorization plus one detailed instantiation, e.g., *book type: fiction, price: \$20*.

#### 4.4 Human Annotation

We hire Amazon Mechanical Turk annotators to label a randomly sampled subset of our data to balance cost and quality. We ask the workers to annotate emphasizing the following perspectives: (1) The alignment of proposed intention  $I_t$  and session products  $P_{t+1}$ . (2) The consistency between the inferred valued attribute  $A_t$  and actual interacted products  $P_{t+1}$ . (3) The plausibility of the generated intention comparison  $C_t$ . (4) Predictions on further intention pathways based on historical information. In this way, the session intention could not only provide insights into the thinking process of customers but also meaningful references for when to explore and when to exploit product recommendation systems. To simplify the annotation process, the annotators are only asked to assign a likelihood score or plausibility score for each task in a format roughly similar to *yes, maybe yes, maybe no, no* (corresponds to  $\mathcal{S} = 3, 2, 1, 0$ ). We carried out multiple rounds of annotation worker selections with different criteria to ensure high annotation quality. More details are in Appendix B.

### 5 Evaluations and Analyses

#### 5.1 Intrinsic Evaluations

We present our detailed statistics in Table 1. By filling up the tree with intention on 10,905 sessions, we obtain more than 1,950,000 intention entries

and 1,100,000 intention trajectories. The majority of these sessions contains less than four products, though long sessions also exist with up to 18 products. To sample a subset of sessions to form the SESSIONINTENTBENCH, we first retrieve candidate sessions with lengths three to five. We then sample 2,000 sessions with 2 trajectories per session and later add another disjoint 1,445 sessions with 4 trajectories per session. That gives 9,780 trajectories in total. To grant the model with full information available, we only query the tasks at the end of each session time step, that is, using all the products available and masking the last product when querying the TASK 1, 2.

#### 5.2 Baselines and Model Selections

**Evaluation Metric** We use accuracy and Macro-F1 score as evaluation metrics. Accuracy is defined as the percentage of questions that are correctly answered. We regard scoring 0,1 in TASK 1-3 as the true positive label and scoring 0 as the one for TASK 4. To start with, we include the Random Selection and Majority Vote score of each task.

**Model Selections** Then, we test out a diverse set of L(V)LMS on SESSIONINTENTBENCH. Since all the tasks we proposed belong to classification setups, we choose accuracy and Macro-F1 score as evaluation metrics. The models we selected, as given in Table 2, can be classified into three genres: (I) **OPEN L(V)LMS WITH ZERO-SHOT**: Firstly, we select a vast collection of models from different companies or organizations. Text-to-text models includes Llama3.1, Llama3.2 (Grattafiori et al., 2024), Gemma2 (Team et al., 2024), Mistral (Jiang et al., 2023), Falcon (Almazrouei et al., 2023), and Qwen2.5 (Qwen et al., 2025). Image-text-to-text models includes LLaVA (Liu et al., 2023a), Qwen2-

Models	Intent-Based Inference		Valued Attributes Reg.		Comparison Just.		Evolution Modeling	
	Acc	Ma-F1	Acc	Ma-F1	Acc	Ma-F1	Acc	Ma-F1
<b>Random</b>	50.00	50.00	50.00	50.00	50.00	50.00	54.38	35.00
<b>Majority</b>	62.30	76.77	54.35	NaN	71.80	83.58	63.15	NaN
<b>LLM (Zero-Shot)</b>								
Meta-Llama-3.1-8B	56.87	70.98	49.36	55.10	<u>71.30</u>	<u>83.24</u>	39.26	53.01
Meta-Llama-3.2-1B	57.53	72.03	32.39	48.37	60.13	74.98	37.69	53.49
Meta-Llama-3.2-3B	54.68	63.97	52.02	43.48	33.13	49.48	51.34	36.61
Gemma-2-2B	59.33	72.89	<u>52.29</u>	52.03	46.33	61.11	37.57	53.83
Gemma-2-9B	57.03	69.37	52.18	49.44	41.68	44.19	<u>53.77</u>	34.54
Mistral-7B-v0.3	<b><u>62.17</u></b>	<u>76.52</u>	47.65	<b><u>64.08</u></b>	<u>71.30</u>	<u>83.24</u>	39.61	53.53
Ministral-8B	56.98	69.33	51.58	50.48	68.02	80.48	38.27	54.08
Mistral-Nemo-12B	53.09	63.82	51.63	35.04	56.79	69.71	47.15	45.11
Falcon-3-7B	57.31	71.74	52.24	49.17	67.36	79.41	44.36	49.68
Falcon-3-10B	54.95	66.93	51.35	48.59	65.49	78.24	43.84	45.89
Qwen-2.5-1.5B	61.36	75.50	49.47	58.87	61.88	74.39	39.90	52.59
Qwen-2.5-3B	54.19	64.42	51.96	41.87	68.62	81.01	37.63	<u>53.98</u>
Qwen-2.5-7B	58.62	71.92	51.02	56.18	70.59	82.61	40.07	51.86
<b>LVLM (Zero-Shot)</b>								
LLaVA-v1.6-mistral-7b	58.29	71.90	47.48	62.27	62.94	75.11	37.62	54.20
LLaVA-v1.6-vicuna-7b	<u>62.01</u>	<b><u>76.55</u></b>	46.93	<u>63.88</u>	<u>71.27</u>	<u>83.22</u>	37.21	<b><u>54.24</u></b>
Qwen-2-VL-2B	58.07	71.58	48.53	61.73	69.35	81.76	<u>42.50</u>	53.63
Qwen-2-VL-7B	58.73	71.48	<u>50.63</u>	56.37	70.61	82.73	37.67	53.95
Meta-Llama-3.2-11B-V	45.10	61.38	38.41	52.35	42.11	59.20	36.33	53.23
<b>L(V)LM (Fine-tuned)</b>								
Meta-Llama-3.1-8B	52.82	63.84	51.46	46.27	70.76	82.82	51.92	33.01
Meta-Llama-3.2-1B	52.22	61.86	50.47	45.89	71.08	83.09	52.85	36.26
Meta-Llama-3.2-3B	55.67	66.80	51.80	46.70	69.61	81.93	51.63	32.66
Mistral-7B-v0.3	57.47	68.56	50.64	44.64	67.69	79.88	55.69	31.69
Ministral-8B	<u>58.35</u>	<u>69.55</u>	51.24	45.01	66.54	79.10	55.57	35.11
Mistral-Nemo-12B	56.10	66.80	52.02	46.68	67.74	79.81	55.81	32.95
Qwen-2.5-7B	54.02	65.63	52.02	46.75	69.50	81.66	54.47	31.59
Falcon-3-7B	55.77	65.02	<b><u>52.85</u></b>	<u>48.46</u>	<b><u>71.41</u></b>	<b><u>83.30</u></b>	54.65	<u>36.86</u>
<b>L(V)LM (Proprietary API)</b>								
GPT4o-mini	57.44	69.34	51.95	43.81	<u>71.19</u>	<u>83.13</u>	38.39	<u>53.90</u>
GPT4o-mini (5-shots)	<u>58.83</u>	71.86	49.32	<u>53.01</u>	65.25	78.11	46.51	46.96
GPT4o-mini (COT)	57.26	69.02	51.87	43.33	68.86	81.22	42.81	49.42
GPT4o	55.05	65.33	49.75	36.27	56.30	67.51	41.64	52.39
GPT4o (5-shots)	53.10	63.58	44.20	38.61	54.94	65.01	43.44	48.41
GPT4o (COT)	53.30	61.91	<u>52.00</u>	36.08	49.50	50.87	<b><u>58.42</u></b>	13.73

Table 2: Evaluation results (%) of various (L)LMs on the annotated testing sets of SESSIONINTENTBENCH. The best performances within each method are underlined, and the best among all methods are **bold-faced**.

VL (Wang et al., 2024a), and Llama with Vision (Grattafiori et al., 2024). Models under this category are prompted using zero-shot. (II) **FINE-TUNED L(V)LMs WITH ZERO-SHOT**: Following that, we fine-tuned Llama3.1, Llama3.2, Mistral, Falcon3, Qwen2.5 on partitioned training set and evaluate them on the testing set. (III) **PROPRIETARY L(V)LM API WITH SEVERAL DIFFERENT PROMPTING TECHNIQUES**: Lastly, we test out GPT-4o and GPT-4o-mini (OpenAI et al., 2024; OpenAI, 2024a) using zero-shot prompting, 5-shots prompting and Chain-of-Thought prompting (Wei et al., 2023).

### 5.3 Main Evaluation Results

**INTENTION EVOLUTION MODELING (TASK 4) is the most challenging task.** Our experiments

show that the average accuracy of the zero-shot models on TASK 4 is 42.34%. Compared to the second hardest task (*Purchasing Likelihood Inference via Valued Attributes Regularization*), which models scored 49.63%, there is a great gap of 7.29% on TASK 4. After being fine-tuned, all open models are able to achieve a minimum accuracy of 51.92%, while the top performing one (Mistral-Nemo-12B) scores 55.81%, just above the RANDOM vote accuracy. It is worth noticing that GPT-4o with Chain-of-Thought prompting is able to achieve the highest rate of 58.42% among all models and methods. This might be because the larger model size and the trick of enabling reasoning at run time could help the model to better mimic the thinking process of a real-life customer. This result shows that more works need to be done to level up the model’s capa-

Training Data	Backbone	Intent-Based Inference		Valued Attributes Reg.		Comparison Just.		Evolution Modeling	
		Acc	Ma-F1	Acc	Ma-F1	Acc	Ma-F1	Acc	Ma-F1
Zero-shot	Llama-3.1-8B	56.87	70.98	49.36	55.10	71.30	83.24	39.26	53.01
	Llama-3.2-3B	54.68	63.97	52.02	43.48	33.13	49.48	51.34	36.61
	Mistral-7B-v0.3	<b>62.17</b>	<b>76.52</b>	47.65	64.08	71.30	83.24	39.61	53.53
	Ministral-8B	56.98	69.33	51.58	50.48	68.02	80.48	38.27	<b>54.08</b>
	Falcon-3-7B	57.31	71.74	<u>52.24</u>	49.17	67.36	79.41	44.36	49.68
	Qwen-2.5-7B	58.62	71.92	51.02	56.18	70.59	82.61	40.07	51.86
SIB	Llama-3.1-8B	52.82	63.84	51.46	46.27	70.76	82.82	51.92	33.01
	Llama-3.2-3B	55.67	66.80	51.80	46.70	69.61	81.93	51.63	32.66
	Mistral-7B-v0.3	57.47	68.56	50.64	44.64	67.69	79.88	55.69	31.69
	Ministral-8B	<u>58.35</u>	<u>69.55</u>	51.24	45.01	66.54	79.10	55.57	35.11
	Qwen-2.5-7B	54.02	65.63	52.02	46.75	69.50	81.66	54.47	31.59
	Falcon-3-7B	55.77	65.02	<u>52.85</u>	<u>48.46</u>	<b>71.41</b>	<b>83.30</b>	54.65	<u>36.86</u>
MIND + SIB	Llama-3.1-8B	60.10	68.81	55.33	48.67	70.54	82.54	57.72	39.74
	Llama-3.2-3B	59.88	67.92	55.28	50.15	64.02	75.48	58.54	40.50
	Mistral-7B-v0.3	60.04	69.96	52.90	45.87	67.69	79.56	<b>59.93</b>	37.16
	Ministral-8B	58.24	67.33	53.95	47.44	65.44	77.01	58.77	<u>40.93</u>
	Qwen-2.5-7B	59.00	67.65	53.95	48.62	63.09	74.98	57.84	39.30
	Falcon-3-7B	58.57	68.42	<b>55.94</b>	<b>50.22</b>	71.30	83.25	58.36	40.00

Table 3: Evaluation results (%) of transferring knowledge from MIND to aid SESSIONINTENTBENCH. The best performances among each method are underlined, and the best ones among all methods are **bold-faced**. We abbreviate SESSIONINTENTBENCH as SIB.

bility of capturing long-term user intention trends.

**Fine-tuning can greatly improve the poor performing models, but struggle to help the mediocre ones.** Poor performing models, which we referred to as the ones that receive a low score compared to models under the same category in some evaluation tasks, can quickly pick up relevant capabilities by being fine-tuned on the training set before testing. For example, LLAMA-3.2-3B shows poor performance on TASK 3 (*Intention Justification via Comparison*), but after being fine-tuned on SESSIONINTENTBENCH, it shows a leap of performance by 36.5% and demonstrates comparable outcome with other larger 7B or 8B models. The mediocre performing models, which we referred to as the ones that score near the highest among the models but still struggle to surpass the top accuracy records. Among the proposed tasks, the largest maximum accuracy raise from zero-shot to fine-tuned happens at TASK 4, with a lift of 2.04% in the highest score. As a result of these two factors, the variance between different models shrinks after fine-tuning.

**LVLMS struggle to make good usage of visual signals.** In comparison to LLMs, which only use textual signals as the input, LVLMS can refer to image information to facilitate their question-answering and inference reasoning. However, as shown in Table 2, the highest accuracy scores of LVLMS all lag behind compared to the highest ones of LLMs. When evaluated on TASK 4 using direct zero-shot, the best LVLMS outcome is even behind

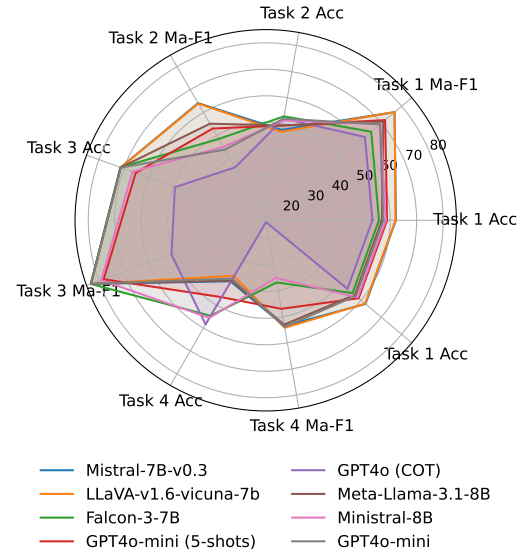


Figure 3: Radar chart of models that have the best performances in multiple tasks within each method. No single model can produce a boundary that encompasses all the data points from other models.

the best LLM by a huge gap of 11.27%. Possible issues could be the low signal-noise ratio of the images collected, and sellers usually include more comprehensive and concise features of products in text format.

**No model dominates.** The overall scoring result is quite close, especially after fine-tuning, where the variance between models shrinks. The open models that achieve the best accuracy within their category are Mistral-7B-v0.3 (zero-shot LLM), LLaVA-v1.6-vicuna-7b (zero-shot LVLMS), and Falcon-3-

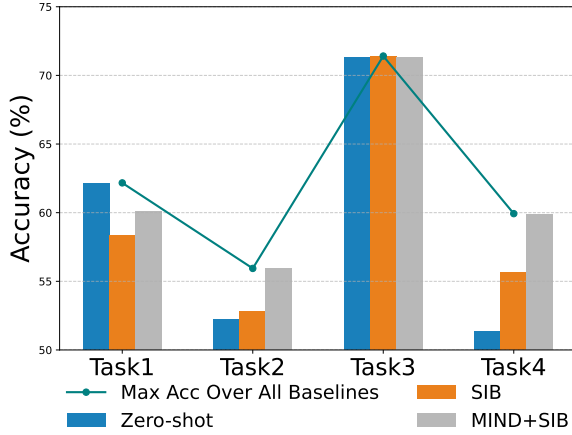


Figure 4: Comparison between best performances across different methods on different tasks. All baseline’s max accuracy line is consistent with the max accuracy line over open models of all methods (i.e., Zero-shot, fine-tuning with SESSIONINTENTBENCH (SIB), and sequential fine-tuning with MIND then SIB). Paying for proprietary API does not add extra value in this case.

7B (fine-tuned LLM). They belong to different companies or organizations, and none of them achieves the best accuracy in more than two tasks, as shown in Figure 3. It is an indicator that no specific model can dominate the session intention modeling game. Although the GPT-4o with Chain-of-Thought techniques gives the best Intention Evolution Modeling results, surpassing the best fine-tuned one (Mistral-Nemo-12B) with 2.59%, it might not be cost-effective due to expensive pricing and large token consumption required.

#### 5.4 The Impact of Intention Injection

Observing Table 2, we find L(V)LMs struggling with directly leveraging intention for next product inference (*Intent-Based Inference*) and mastering long term trend of shifting intention from session history (*Intention Evolution Modeling*). However, this can be caused by many factors, such as failing to capture diverse user characteristics and preferences. Given this, we hypothesize that fine-tuning models on intention knowledge bases beforehand might enhance their ability to adapt according to different background setups and help them generalize better. Therefore, we tried to first fine-tune models on MIND (Xu et al., 2024), an large-scale intention knowledge base grounded on co-buy behaviors.

After sequentially fine-tuning first on MIND and then on SESSIONINTENTBENCH, we find a leap in performance in the proposed tasks. By injecting intention from MIND to aid SESSION-

INTENTBENCH, we improved TASK 1 by 1.75%, TASK 2 by 3.09%, TASK 4 by 4.24% (another great improvement compared to zero-shot baseline), as demonstrated in Figure 4. This demonstrates that intention injection can be an effective technique to improve the model’s ability to identify user intention from a short yet complex series of interactions.

#### 5.5 Error Analyses

We randomly sample 200 tasks where GPT-4o with Chain-of-Thought commits an error. And we recruit experts to analyze the causes behind them manually. Our results show that:

- 47.5% errors are caused by incorrect understanding of the provided metadata. This may be because the model fails to incorporate past product information for deeper comprehension.
- 24% errors are caused by incorrect ground-truth labels. For objective factors, this might be due to internal conflict of session products and metadata from the intention tree or incorporating complicated metadata in the label instruction.
- 7% errors are due to models’ failure to capture important product features contained in the session products, which might be aligned with or different from the metadata described in the problem assumption.
- 6.5% errors are due to irrelevant reasoning or model hallucinations, where the model is often heading towards a different reasoning direction due to some misleading, unimportant features.
- 15% the errors are due to models’ inability to capture the overall intention of the customer when the provided metadata is vague or not decisive when estimating the likelihood.

### 6 Conclusions

In conclusion, we propose an automated pipeline to construct a large-scale knowledge base and further construct a sample dataset SESSIONINTENTBENCH for L(V)LMs evaluations. Extensive experiments show that current models struggle to understand and infer customers’ intentions while injecting intention from other knowledge bases can level up the performance. We hope our work can bridge the gap between intention understanding in simplified research cases like co-buy intention and more complex yet practical scenarios like session history. We hope this framework can benefit the community by providing better services with future models.



## Limitations

We implemented our intention tree construction pipeline using GPT-4o-mini as the metadata generator. As LLM space advance, more advanced models like GPT-o1 (OpenAI, 2024b), GPT-o3-mini (OpenAI, 2025) will become more accessible to researches, which would potentially better mimic customer thinking process and behavior and generate intention and metadata in higher standard. This would enables our knowledge base and dataset generation with even higher quality.

Our current intention modeling process does not incorporate additional personalized factors such as past purchases, user characteristics, and social relationships with other customers. Incorporating these variables, which can be precomputed, could enhance model reasoning during inference, thereby providing more accurate modeling of session intent for specific customers.

The modeling setting we proposed contains multiple perspectives of session intent metadata, including attributes, intention, and comparisons. However, more metadata mined from the session can possibly be added for further knowledge integrations and better utilization of available information. More work can be done to explore what other internal factors can be incorporated within the session itself.

## Ethics Statement

**Offensive Content Inspection** We leverage the generation capability of L(V)LMs to construct a knowledge base and carry out experiments. The generated intention at the dataset construction step is closely related to the session product information itself. The remaining metadata is based on the reasoning and comparison within products and related intentions. As the experiment setting, we only ask models to give out specific scores of likelihood or generate content with constraint reasoning, which is also closely related to sessions and products.

**Annotation Wage** The annotators are paid a wage in compliance with the local law, on an average of 15 USD per hour. They have all agreed to participate in annotation voluntarily.

**Licenses** Amazon-M2 dataset are released under the license of Apache 2.0. This grants our access to the dataset for free. Our code and data will be shared under the MIT license. It will allow the free distribution of assets we proposed and curated. All

associated licenses permit user access for research purposes, and we have agreed to follow all terms of use.

## References

- Bruce L Alford and Abhijit Biswas. 2002. [The effects of discount level, price consciousness and sale proneness on consumers’ price perception and behavioral intention](#). *Journal of Business Research*, 55(9):775–783.
- Ebtesam Almazrouei, Hamza Alobeidli, Abdulaziz Alshamsi, Alessandro Cappelli, Ruxandra Cojocaru, Mérouane Debbah, Étienne Goffinet, Daniel Hesslow, Julien Launay, Quentin Malartic, Daniele Mazzotta, Badreddine Noune, Baptiste Pannier, and Guilherme Penedo. 2023. [The falcon series of open language models](#). *Preprint*, arXiv:2311.16867.
- Miguel Alves Gomes, Richard Meyes, Philipp Meisen, and Tobias Meisen. 2022. [Will this online shopping session succeed? predicting customer’s purchase intention using embeddings](#). In *Proceedings of the 31st ACM International Conference on Information & Knowledge Management*, CIKM ’22, page 2873–2882, New York, NY, USA. Association for Computing Machinery.
- Diddigi Raghu Ram Bharadwaj, Lakshya Kumar, Saif Jawaid, and Sreekanth Vempati. 2022. [Fine-grained session recommendations in e-commerce using deep reinforcement learning](#). *Preprint*, arXiv:2210.15451.
- Honghua (Kathy) Dai, Lingzhi Zhao, Zaiqing Nie, Ji-Rong Wen, Lee Wang, and Ying Li. 2006a. [Detecting online commercial intention \(oci\)](#). In *Proceedings of the 15th International Conference on World Wide Web*, WWW ’06, page 829–837, New York, NY, USA. Association for Computing Machinery.
- Honghua (Kathy) Dai, Lingzhi Zhao, Zaiqing Nie, Ji-Rong Wen, Lee Wang, and Ying Li. 2006b. [Detecting online commercial intention \(oci\)](#). In *Proceedings of the 15th International Conference on World Wide Web*, WWW ’06, page 829–837, New York, NY, USA. Association for Computing Machinery.
- Wenxuan Ding, Weiqi Wang, Sze Heng Douglas Kwok, Minghao Liu, Tianqing Fang, Jiaxin Bai, Xin Liu, Changlong Yu, Zheng Li, Chen Luo, Qingyu Yin, Bing Yin, Junxian He, and Yangqiu Song. 2024. [IntentionQA: A benchmark for evaluating purchase intention comprehension abilities of language models in E-commerce](#). In *Findings of the Association for Computational Linguistics: EMNLP 2024*, pages 2247–2266, Miami, Florida, USA. Association for Computational Linguistics.
- Aaron Grattafiori, Abhimanyu Dubey, Abhinav Jauhri, Abhinav Pandey, Abhishek Kadian, Ahmad Al-Dahle, Aiesha Letman, Akhil Mathur, Alan Schelten, Alex Vaughan, Amy Yang, Angela Fan, Anirudh

664	Goyal, Anthony Hartshorn, Aobo Yang, Archi Mi-	ney Meers, Xavier Martinet, Xiaodong Wang, Xi-	728
665	tra, Archie Sravankumar, Artem Korenev, Arthur	aofang Wang, Xiaoqing Ellen Tan, Xide Xia, Xin-	729
666	Hinsvark, Arun Rao, Aston Zhang, Aurelien Ro-	feng Xie, Xuchao Jia, Xuwei Wang, Yaelle Gold-	730
667	driguez, Austen Gregerson, Ava Spataru, Baptiste	schlag, Yashesh Gaur, Yasmine Babaei, Yi Wen,	731
668	Roziere, Bethany Biron, Binh Tang, Bobbie Chern,	Yiwen Song, Yuchen Zhang, Yue Li, Yuning Mao,	732
669	Charlotte Caucheteux, Chaya Nayak, Chloe Bi,	Zacharie Delpierre Coudert, Zheng Yan, Zhengxing	733
670	Chris Marra, Chris McConnell, Christian Keller,	Chen, Zoe Papakipos, Aaditya Singh, Aayushi Sri-	734
671	Christophe Touret, Chunyang Wu, Corinne Wong,	vastava, Abha Jain, Adam Kelsey, Adam Shajnfeld,	735
672	Cristian Canton Ferrer, Cyrus Nikolaidis, Damien Al-	Adithya Gangidi, Adolfo Victoria, Ahuva Goldstand,	736
673	lonsius, Daniel Song, Danielle Pintz, Danny Livshits,	Ajay Menon, Ajay Sharma, Alex Boesenberg, Alexei	737
674	Danny Wyatt, David Esiobu, Dhruv Choudhary,	Baevski, Allie Feinstein, Amanda Kallet, Amit San-	738
675	Dhruv Mahajan, Diego Garcia-Olano, Diego Perino,	gani, Amos Teo, Anam Yunus, Andrei Lupu, An-	739
676	Dieuwke Hupkes, Egor Lakomkin, Ehab AlBadawy,	dres Alvarado, Andrew Caples, Andrew Gu, Andrew	740
677	Elina Lobanova, Emily Dinan, Eric Michael Smith,	Ho, Andrew Poulton, Andrew Ryan, Ankit Ramchan-	741
678	Filip Radenovic, Francisco Guzmán, Frank Zhang,	dani, Annie Dong, Annie Franco, Anuj Goyal, Aparajita	742
679	Gabriel Synnaeve, Gabrielle Lee, Georgia Lewis An-	Saraf, Arkabandhu Chowdhury, Ashley Gabriel,	743
680	derson, Govind Thattai, Graeme Nail, Gregoire Mi-	Ashwin Bharambe, Assaf Eisenman, Azadeh Yaz-	744
681	alon, Guan Pang, Guillem Cucurell, Hailey Nguyen,	dan, Beau James, Ben Maurer, Benjamin Leonhardi,	745
682	Hannah Korevaar, Hu Xu, Hugo Touvron, Iliyan	Bernie Huang, Beth Loyd, Beto De Paola, Bhargavi	746
683	Zarov, Imanol Arrieta Ibarra, Isabel Kloumann, Is-	Paranjape, Bing Liu, Bo Wu, Boyu Ni, Braden Han-	747
684	han Misra, Ivan Evtimov, Jack Zhang, Jade Copet,	cock, Bram Wasti, Brandon Spence, Brani Stojkovic,	748
685	Jaewon Lee, Jan Geffert, Jana Vranes, Jason Park,	Brian Gamido, Britt Montalvo, Carl Parker, Carly	749
686	Jay Mahadeokar, Jeet Shah, Jelmer van der Linde,	Burton, Catalina Mejia, Ce Liu, Changan Wang,	750
687	Jennifer Billock, Jenny Hong, Jenya Lee, Jeremy Fu,	Changkyu Kim, Chao Zhou, Chester Hu, Ching-	751
688	Jianfeng Chi, Jianyu Huang, Jiawen Liu, Jie Wang,	Hsiang Chu, Chris Cai, Chris Tindal, Christoph Fe-	752
689	Jiecao Yu, Joanna Bitton, Joe Spisak, Jongsoo Park,	ichtenhofer, Cynthia Gao, Damon Civin, Dana Beaty,	753
690	Joseph Rocca, Joshua Johnstun, Joshua Saxe, Jun-	Daniel Kreymer, Daniel Li, David Adkins, David	754
691	teng Jia, Kalyan Vasuden Alwala, Karthik Prasad,	Xu, Davide Testuggine, Delia David, Devi Parikh,	755
692	Kartikaya Upasani, Kate Plawiak, Ke Li, Kenneth	Diana Liskovich, Didem Foss, Dingkan Wang, Duc	756
693	Heafield, Kevin Stone, Khalid El-Arini, Krithika Iyer,	Le, Dustin Holland, Edward Dowling, Eissa Jamil,	757
694	Kshitiz Malik, Kuenley Chiu, Kunal Bhalla, Kushal	Elaine Montgomery, Eleonora Presani, Emily Hahn,	758
695	Lakhotia, Lauren Rantala-Yearly, Laurens van der	Emily Wood, Eric-Tuan Le, Erik Brinkman, Este-	759
696	Maaten, Lawrence Chen, Liang Tan, Liz Jenkins,	ban Arcaute, Evan Dunbar, Evan Smothers, Fei Sun,	760
697	Louis Martin, Lovish Madaan, Lubo Malo, Lukas	Felix Kreuk, Feng Tian, Filippas Kokkinos, Firat	761
698	Blecher, Lukas Landzaat, Luke de Oliveira, Madeline	Ozgenel, Francesco Caggioni, Frank Kanayet, Frank	762
699	Muzzi, Mahesh Pasupuleti, Mannat Singh, Manohar	Seide, Gabriela Medina Florez, Gabriella Schwarz,	763
700	Paluri, Marcin Kardas, Maria Tsimpoukelli, Mathew	Gada Badeer, Georgia Swee, Gil Halpern, Grant	764
701	Oldham, Mathieu Rita, Maya Pavlova, Melanie Kam-	Herman, Grigory Sizov, Guangyi, Zhang, Guna	765
702	badur, Mike Lewis, Min Si, Mitesh Kumar Singh,	Lakshminarayanan, Hakan Inan, Hamid Shojanaz-	766
703	Mona Hassan, Naman Goyal, Narjes Torabi, Niko-	eri, Han Zou, Hannah Wang, Hanwen Zha, Haroun	767
704	lay Bashlykov, Nikolay Bogoychev, Niladri Chatterji,	Habeeb, Harrison Rudolph, Helen Suk, Henry As-	768
705	Ning Zhang, Olivier Duchenne, Onur Çelebi, Patrick	pegren, Hunter Goldman, Hongyuan Zhan, Ibrahim	769
706	Alrassy, Pengchuan Zhang, Pengwei Li, Petar Vas-	Damlaj, Igor Molybog, Igor Tufanov, Ilias Leontiadis,	770
707	asic, Peter Weng, Prajjwal Bhargava, Pratik Dubal,	Irina-Elena Veliche, Itai Gat, Jake Weissman, James	771
708	Praveen Krishnan, Punit Singh Koura, Puxin Xu,	Geboski, James Kohli, Janice Lam, Japhet Asher,	772
709	Qing He, Qingxiao Dong, Ragavan Srinivasan, Raj	Jean-Baptiste Gaya, Jeff Marcus, Jeff Tang, Jen-	773
710	Ganapathy, Ramon Calderer, Ricardo Silveira Cabral,	nifer Chan, Jenny Zhen, Jeremy Reizenstein, Jeremy	774
711	Robert Stojnic, Roberta Raileanu, Rohan Maheswari,	Teboul, Jessica Zhong, Jian Jin, Jingyi Yang, Joe	775
712	Rohit Girdhar, Rohit Patel, Romain Sauvestre, Ron-	Cummings, Jon Carvill, Jon Shepard, Jonathan Mc-	776
713	nie Polidoro, Roshan Sumbaly, Ross Taylor, Ruan	Phie, Jonathan Torres, Josh Ginsburg, Junjie Wang,	777
714	Silva, Rui Hou, Rui Wang, Saghar Hosseini, Sa-	Kai Wu, Kam Hou U, Karan Saxena, Kartikay Khan-	778
715	hana Chennabasappa, Sanjay Singh, Sean Bell, Seo-	delwal, Katayoun Zand, Kathy Matosich, Kaushik	779
716	hyun Sonia Kim, Sergey Edunov, Shaoliang Nie, Shar-	Veeraraghavan, Kelly Michelena, Keqian Li, Kiran	780
717	an Narang, Sharath Rapparthi, Sheng Shen, Shengye	Jagadeesh, Kun Huang, Kunal Chawla, Kyle	781
718	Wan, Shruti Bhosale, Shun Zhang, Simon Van-	Huang, Lailin Chen, Lakshya Garg, Lavender A,	782
719	denhende, Soumya Batra, Spencer Whitman, Sten	Leandro Silva, Lee Bell, Lei Zhang, Liangpeng	783
720	Sootla, Stephane Collot, Suchin Gururangan, Syd-	Guo, Licheng Yu, Liron Moshkovich, Luca Wehrst-	784
721	ney Borodinsky, Tamar Herman, Tara Fowler, Tarek	edt, Madian Khabsa, Manav Avalani, Manish Bhatt,	785
722	Sheasha, Thomas Georgiou, Thomas Scialom, Tobias	Martynas Mankus, Matan Hasson, Matthew Lennie,	786
723	Speckbacher, Todor Mihaylov, Tong Xiao, Ujjwal	Matthias Reso, Maxim Groshev, Maxim Naumov,	787
724	Karn, Vedanuj Goswami, Vibhor Gupta, Vignesh	Maya Lathi, Meghan Keneally, Miao Liu, Michael L.	788
725	Ramanathan, Viktor Kerkez, Vincent Gonguet, Vir-	Seltzer, Michal Valko, Michelle Restrepo, Mihir Pa-	789
726	ginie Do, Vish Vogeti, Vitor Albiero, Vladan Petro-	tel, Mik Vyatskov, Mikayel Samvelyan, Mike Clark,	790
727	vic, Weiwei Chu, Wenhan Xiong, Wenyin Fu, Whit-	Mike Macey, Mike Wang, Miquel Jubert Hermoso,	791

792	Mo Metanat, Mohammad Rastegari, Munish Bansal,	Dong, Liang Zhang, Lei Cheng, and Linjian Mo.	853
793	Nandhini Santhanam, Natascha Parks, Natasha	2023. <a href="#">Smone: A session-based recommendation</a>	854
794	White, Navyata Bawa, Nayan Singhal, Nick Egebo,	<a href="#">model based on neighbor sessions with similar proba-</a>	855
795	Nicolas Usunier, Nikhil Mehta, Nikolay Pavlovich	<a href="#">bilistic intentions</a> . <i>ACM Trans. Knowl. Discov. Data</i> ,	856
796	Laptev, Ning Dong, Norman Cheng, Oleg Chernoguz,	17(8).	857
797	Olivia Hart, Omkar Salpekar, Ozlem Kalinli, Parkin		
798	Kent, Parth Parekh, Paul Saab, Pavan Balaji, Pe-	Albert Q. Jiang, Alexandre Sablayrolles, Arthur Men-	858
799	dro Rittner, Philip Bontrager, Pierre Roux, Piotr	sch, Chris Bamford, Devendra Singh Chaplot, Diego	859
800	Dollar, Polina Zvyagina, Prashant Ratanchandani,	de las Casas, Florian Bressand, Gianna Lengyel, Guil-	860
801	Pritish Yuvraj, Qian Liang, Rachad Alao, Rachel	laume Lample, Lucile Saulnier, L��lio Renard Lavaud,	861
802	Rodriguez, Rafi Ayub, Raghotham Murthy, Raghu	Marie-Anne Lachaux, Pierre Stock, Teven Le Scao,	862
803	Nayani, Rahul Mitra, Rangaprabhu Parthasarathy,	Thibaut Lavril, Thomas Wang, Timoth��e Lacroix,	863
804	Raymond Li, Rebekkah Hogan, Robin Battey, Rocky	and William El Sayed. 2023. <a href="#">Mistral 7b</a> . <i>Preprint</i> ,	864
805	Wang, Russ Howes, Ruty Rinott, Sachin Mehta,	arXiv:2310.06825.	865
806	Sachin Siby, Sai Jayesh Bondu, Samyak Datta, Sara		
807	Chugh, Sara Hunt, Sargun Dhillon, Sasha Sidorov,	Di Jin, Luzhi Wang, Yizhen Zheng, Guojie Song, Fei	866
808	Satadru Pan, Saurabh Mahajan, Saurabh Verma,	Jiang, Xiang Li, Wei Lin, and Shirui Pan. 2023a.	867
809	Seiji Yamamoto, Sharadh Ramaswamy, Shaun Lind-	<a href="#">Dual intent enhanced graph neural network for</a>	868
810	say, Shaun Lindsay, Sheng Feng, Shenghao Lin,	<a href="#">session-based new item recommendation</a> . In <i>Pro-</i>	869
811	Shengxin Cindy Zha, Shishir Patil, Shiva Shankar,	<i>ceedings of the ACM Web Conference 2023</i> , WWW	870
812	Shuqiang Zhang, Shuqiang Zhang, Sinong Wang,	'23, page 684–693, New York, NY, USA. Association	871
813	Sneha Agarwal, Soji Sajuyigbe, Soumith Chintala,	for Computing Machinery.	872
814	Stephanie Max, Stephen Chen, Steve Kehoe, Steve		
815	Satterfield, Sudarshan Govindaprasad, Sumit Gupta,	Wei Jin, Haitao Mao, Zheng Li, Haoming Jiang,	873
816	Summer Deng, Sungmin Cho, Sunny Virk, Suraj	Chen Luo, Hongzhi Wen, Haoyu Han, Hanqing Lu,	874
817	Subramanian, Sy Choudhury, Sydney Goldman, Tal	Zhengyang Wang, Ruirui Li, Zhen Li, Monica Xiao	875
818	Remez, Tamar Glaser, Tamara Best, Thilo Koehler,	Cheng, Rahul Goutam, Haiyang Zhang, Karthik Sub-	876
819	Thomas Robinson, Tianhe Li, Tianjun Zhang, Tim	bian, Suhang Wang, Yizhou Sun, Jiliang Tang, Bing	877
820	Matthews, Timothy Chou, Tzook Shaked, Varun	Yin, and Xianfeng Tang. 2023b. <a href="#">Amazon-m2: A</a>	878
821	Vontimitta, Victoria Ajayi, Victoria Montanez, Vijai	<a href="#">multilingual multi-locale shopping session dataset for</a>	879
822	Mohan, Vinay Satish Kumar, Vishal Mangla, Vlad	<a href="#">recommendation and text generation</a> . In <i>Advances in</i>	880
823	Ionescu, Vlad Poenaru, Vlad Tiberiu Mihailescu,	<i>Neural Information Processing Systems 36: Annual</i>	881
824	Vladimir Ivanov, Wei Li, Wenchen Wang, Wen-	<i>Conference on Neural Information Processing Sys-</i>	882
825	wen Jiang, Wes Bouaziz, Will Constable, Xiaocheng	<i>tems 2023, NeurIPS 2023, New Orleans, LA, USA</i> ,	883
826	Tang, Xiaojian Wu, Xiaolan Wang, Xilun Wu, Xinbo	<i>December 10 - 16, 2023</i> .	884
827	Gao, Yaniv Kleinman, Yanjun Chen, Ye Hu, Ye Jia,		
828	Ye Qi, Yenda Li, Yilin Zhang, Ying Zhang, Yossi Adi,	Lei Li, Yongfeng Zhang, and Li Chen. 2020. <a href="#">Gener-</a>	885
829	Youngjin Nam, Yu, Wang, Yu Zhao, Yuchen Hao,	<a href="#">ate neural template explanations for recommendation</a> .	886
830	Yundi Qian, Yunlu Li, Yuzi He, Zach Rait, Zachary	In <i>Proceedings of the 29th ACM International Con-</i>	887
831	DeVito, Zef Rosnbrick, Zhaoduo Wen, Zhenyu Yang,	<i>ference on Information &amp; Knowledge Management</i> ,	888
832	Zhiwei Zhao, and Zhiyu Ma. 2024. <a href="#">The llama 3 herd</a>	CIKM '20, page 755–764, New York, NY, USA. As-	889
833	<a href="#">of models</a> . <i>Preprint</i> , arXiv:2407.21783.	sociation for Computing Machinery.	890
834	Yupeng Hou, Jiacheng Li, Zhankui He, An Yan, Xiusi	Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae	891
835	Chen, and Julian McAuley. 2024. <a href="#">Bridging lan-</a>	Lee. 2023a. <a href="#">Visual instruction tuning</a> . <i>Preprint</i> ,	892
836	<a href="#">guage and items for retrieval and recommendation</a> .	arXiv:2304.08485.	893
837	<i>Preprint</i> , arXiv:2403.03952.		
838	Derek Hao Hu, Qiang Yang, and Ying Li. 2008. <a href="#">An</a>	Xin Liu, Zheng Li, Yifan Gao, Jingfeng Yang, Tianyu	894
839	<a href="#">algorithm for analyzing personalized online commer-</a>	Cao, Zhengyang Wang, Bing Yin, and Yangqiu	895
840	<a href="#">cial intention</a> . In <i>Proceedings of the 2nd Interna-</i>	Song. 2023b. <a href="#">Enhancing user intent capture in</a>	896
841	<i>tional Workshop on Data Mining and Audience In-</i>	<a href="#">session-based recommendation with attribute pat-</a>	897
842	<i>telligence for Advertising</i> , ADKDD '08, page 27–36,	<a href="#">terns</a> . <i>Preprint</i> , arXiv:2312.16199.	898
843	New York, NY, USA. Association for Computing		
844	Machinery.	OpenAI. 2024a. <a href="#">Gpt-4o mini: advancing cost-efficient</a>	899
845	Ravi Chandra Jammalamadaka, Naren Chittar, and San-	<a href="#">intelligence</a> . <i>OpenAI</i> .	900
846	jay Ghatare. 2009. <a href="#">Mining product intention rules</a>	OpenAI. 2024b. <a href="#">Introducing openai o1</a> . <i>OpenAI</i> .	901
847	<a href="#">from transaction logs of an ecommerce portal</a> . In		
848	<i>Proceedings of the 2009 International Database En-</i>	OpenAI. 2025. <a href="#">Openai o3-mini</a> . <i>OpenAI</i> .	902
849	<i>gineering &amp; Applications Symposium</i> , IDEAS '09,		
850	page 311–314, New York, NY, USA. Association for	OpenAI, Josh Achiam, Steven Adler, Sandhini Agarwal,	903
851	Computing Machinery.	Lama Ahmad, Ilge Akkaya, Florencia Leoni Ale-	904
852	Bohan Jia, Jian Cao, Shiyu Qian, Nengjun Zhu, Xin	man, Diogo Almeida, Janko Altmenschmidt, Sam Alt-	905
		man, Shyamal Anadkat, Red Avila, Igor Babuschkin,	906



907	Suchir Balaji, Valerie Balcom, Paul Baltescu, Haiming Bao, Mohammad Bavarian, Jeff Belgum, Irwan Bello, Jake Berdine, Gabriel Bernadett-Shapiro, Christopher Berner, Lenny Bogdonoff, Oleg Boiko, Madelaine Boyd, Anna-Luisa Brakman, Greg Brockman, Tim Brooks, Miles Brundage, Kevin Button, Trevor Cai, Rosie Campbell, Andrew Cann, Brittany Carey, Chelsea Carlson, Rory Carmichael, Brooke Chan, Che Chang, Fotis Chantzis, Derek Chen, Sully Chen, Ruby Chen, Jason Chen, Mark Chen, Ben Chess, Chester Cho, Casey Chu, Hyung Won Chung, Dave Cummings, Jeremiah Currier, Yunxing Dai, Cory Decareaux, Thomas Degry, Noah Deutsch, Damien Deville, Arka Dhar, David Dohan, Steve Dowling, Sheila Dunning, Adrien Ecoffet, Atty Eleti, Tyna Eloundou, David Farhi, Liam Fedus, Niko Felix, Simón Posada Fishman, Juston Forte, Isabella Fulford, Leo Gao, Elie Georges, Christian Gibson, Vik Goel, Tarun Gogineni, Gabriel Goh, Rapha GontijoLopes, Jonathan Gordon, Morgan Grafstein, Scott Gray, Ryan Greene, Joshua Gross, Shixiang Shane Gu, Yufei Guo, Chris Hallacy, Jesse Han, Jeff Harris, Yuchen He, Mike Heaton, Johannes Heidecke, Chris Hesse, Alan Hickey, Wade Hickey, Peter Hoeschele, Brandon Houghton, Kenny Hsu, Shengli Hu, Xin Hu, Joost Huizinga, Shantanu Jain, Shawn Jain, Joanne Jang, Angela Jiang, Roger Jiang, Haozhun Jin, Denny Jin, Shino Jomoto, Billie Jonn, Heewoo Jun, Tomer Kaftan, Łukasz Kaiser, Ali Kamali, Ingmar Kanitscheider, Nitish Shirish Keskar, Tabarak Khan, Logan Kilpatrick, Jong Wook Kim, Christina Kim, Yongjik Kim, Jan Hendrik Kirchner, Jamie Kiros, Matt Knight, Daniel Kokotajlo, Łukasz Kondraciuk, Andrew Kondrich, Aris Konstantinidis, Kyle Kosic, Gretchen Krueger, Vishal Kuo, Michael Lampe, Ikai Lan, Teddy Lee, Jan Leike, Jade Leung, Daniel Levy, Chak Ming Li, Rachel Lim, Molly Lin, Stephanie Lin, Mateusz Litwin, Theresa Lopez, Ryan Lowe, Patricia Lue, Anna Makanju, Kim Malfacini, Sam Manning, Todor Markov, Yaniv Markovski, Bianca Martin, Katie Mayer, Andrew Mayne, Bob McGrew, Scott Mayer McKinney, Christine McLeavey, Paul McMillan, Jake McNeil, David Medina, Aalok Mehta, Jacob Menick, Luke Metz, Andrey Mishchenko, Pamela Mishkin, Vinnie Monaco, Evan Morikawa, Daniel Mossing, Tong Mu, Mira Murati, Oleg Murk, David Mély, Ashvin Nair, Reiichiro Nakano, Rajeev Nayak, Arvind Neelakantan, Richard Ngo, Hyeonwoo Noh, Long Ouyang, Cullen O’Keefe, Jakub Pachocki, Alex Paino, Joe Palermo, Ashley Pantuliano, Giambattista Parascandolo, Joel Parish, Emy Parparita, Alex Passos, Mikhail Pavlov, Andrew Peng, Adam Peralman, Filipe de Avila Belbute Peres, Michael Petrov, Henrique Ponde de Oliveira Pinto, Michael, Pokorny, Michelle Pokrass, Vitchyr H. Pong, Tolly Powell, Alethea Power, Boris Power, Elizabeth Proehl, Raul Puri, Alec Radford, Jack Rae, Aditya Ramesh, Cameron Raymond, Francis Real, Kendra Rimbach, Carl Ross, Bob Rotsted, Henri Roussez, Nick Ryder, Mario Saltarelli, Ted Sanders, Shibani Santurkar, Girish Sastry, Heather Schmidt, David Schnurr, John Schulman, Daniel Selsam, Kyla Sheppard, Toki Sherbakov, Jessica Shieh, Sarah Shoker, Pranav	
	Shyam, Szymon Sidor, Eric Sigler, Maddie Simens, Jordan Sitkin, Katarina Slama, Ian Sohl, Benjamin Sokolowsky, Yang Song, Natalie Staudacher, Felipe Petroski Such, Natalie Summers, Ilya Sutskever, Jie Tang, Nikolas Tezak, Madeleine B. Thompson, Phil Tillet, Amin Tootoonchian, Elizabeth Tseng, Preston Tuggle, Nick Turley, Jerry Tworek, Juan Felipe Cerón Uribe, Andrea Vallone, Arun Vijayvergiya, Chelsea Voss, Carroll Wainwright, Justin Jay Wang, Alvin Wang, Ben Wang, Jonathan Ward, Jason Wei, CJ Weinmann, Akila Welihinda, Peter Welinder, Jiayi Weng, Lilian Weng, Matt Wiethoff, Dave Willner, Clemens Winter, Samuel Wolrich, Hannah Wong, Lauren Workman, Sherwin Wu, Jeff Wu, Michael Wu, Kai Xiao, Tao Xu, Sarah Yoo, Kevin Yu, Qiming Yuan, Wojciech Zaremba, Rowan Zellers, Chong Zhang, Marvin Zhang, Shengjia Zhao, Tianhao Zheng, Juntang Zhuang, William Zhuk, and Barret Zoph. 2024. <a href="#">Gpt-4 technical report</a> . <i>Preprint</i> , arXiv:2303.08774.	971 972 973 974 975 976 977 978 979 980 981 982 983 984 985 986 987 988 989 990
	Qwen, :, An Yang, Baosong Yang, Beichen Zhang, Binyuan Hui, Bo Zheng, Bowen Yu, Chengyuan Li, Dayiheng Liu, Fei Huang, Haoran Wei, Huan Lin, Jian Yang, Jianhong Tu, Jianwei Zhang, Jianxin Yang, Jiaxi Yang, Jingren Zhou, Junyang Lin, Kai Dang, Keming Lu, Keqin Bao, Kexin Yang, Le Yu, Mei Li, Mingfeng Xue, Pei Zhang, Qin Zhu, Rui Men, Runji Lin, Tianhao Li, Tianyi Tang, Tingyu Xia, Xingzhang Ren, Xuancheng Ren, Yang Fan, Yang Su, Yichang Zhang, Yu Wan, Yuqiong Liu, Zeyu Cui, Zhenru Zhang, and Zihan Qiu. 2025. <a href="#">Qwen2.5 technical report</a> . <i>Preprint</i> , arXiv:2412.15115.	991 992 993 994 995 996 997 998 999 1000 1001 1002
	Soyeon Shim, Mary Ann Eastlick, Sherry L Lotz, and Patricia Warrington. 2001. <a href="#">An online prepurchase intentions model: The role of intention to search</a> . <i>Journal of Retailing</i> , 77(3):397–416.	1003 1004 1005 1006
	Gemma Team, Morgane Riviere, Shreya Pathak, Pier Giuseppe Sessa, Cassidy Hardin, Surya Bhupatiraju, Léonard Hussenot, Thomas Mesnard, Bobak Shahriari, Alexandre Ramé, Johan Ferret, Peter Liu, Pouya Tafti, Abe Friesen, Michelle Casbon, Sabela Ramos, Ravin Kumar, Charline Le Lan, Sammy Jerome, Anton Tsitsulin, Nino Vieillard, Piotr Stanczyk, Sertan Girgin, Nikola Momchev, Matt Hoffman, Shantanu Thakoor, Jean-Bastien Grill, Behnam Neyshabur, Olivier Bachem, Alanna Walton, Aliaksei Severyn, Alicia Parrish, Aliya Ahmad, Allen Hutchison, Alvin Abdagic, Amanda Carl, Amy Shen, Andy Brock, Andy Coenen, Anthony Laforge, Antonia Paterson, Ben Bastian, Bilal Piot, Bo Wu, Brandon Royal, Charlie Chen, Chintu Kumar, Chris Perry, Chris Welty, Christopher A. Choquette-Choo, Danila Sinopalnikov, David Weinberger, Dimple Vijaykumar, Dominika Rogozińska, Dustin Herbison, Elisa Bandy, Emma Wang, Eric Noland, Erica Moreira, Evan Senter, Evgenii Eltyshiev, Francesco Visin, Gabriel Rasskin, Gary Wei, Glenn Cameron, Gus Martins, Hadi Hashemi, Hanna Klimczak-Plucińska, Harleen Batra, Harsh Dhand, Ivan Nardini, Jacinda Mein, Jack Zhou, James Svensson, Jeff Stanway, Jetha Chan, Jin Peng Zhou, Joana	1007 1008 1009 1010 1011 1012 1013 1014 1015 1016 1017 1018 1019 1020 1021 1022 1023 1024 1025 1026 1027 1028 1029 1030 1031



1032	Carrasqueira, Joana Iljazi, Jocelyn Becker, Joe Fernandez, Joost van Amersfoort, Josh Gordon, Josh Lipschultz, Josh Newlan, Ju yeong Ji, Kareem Mohamed, Kartikeya Badola, Kat Black, Katie Millican, Keelin McDonnell, Kelvin Nguyen, Kiranbir Sodhia, Kish Greene, Lars Lowe Sjoesund, Lauren Usui, Laurent Sifre, Lena Heuermann, Leticia Lago, Lilly McNealus, Livio Baldini Soares, Logan Kilpatrick, Lucas Dixon, Luciano Martins, Machel Reid, Manvinder Singh, Mark Iverson, Martin Görner, Mat Velloso, Mateo Wirth, Matt Davidow, Matt Miller, Matthew Rahtz, Matthew Watson, Meg Risdal, Mehran Kazemi, Michael Moynihan, Ming Zhang, Minsuk Kahng, Minwoo Park, Mofi Rahman, Mohit Khatwani, Natalie Dao, Nenshad Bardoliwalla, Nesh Devanathan, Neta Dumai, Nilay Chauhan, Oscar Wahltinez, Pankil Botarda, Parker Barnes, Paul Barham, Paul Michel, Pengchong Jin, Petko Georgiev, Phil Culliton, Pradeep Kuppala, Ramona Comanescu, Ramona Merhej, Reena Jana, Reza Ardeshtir Rokni, Rishabh Agarwal, Ryan Mullins, Samaneh Saadat, Sara Mc Carthy, Sarah Cogan, Sarah Perrin, Sébastien M. R. Arnold, Sebastian Krause, Shengyang Dai, Shruti Garg, Shruti Sheth, Sue Ronstrom, Susan Chan, Timothy Jordan, Ting Yu, Tom Eccles, Tom Hennigan, Tomas Kocisky, Tulsee Doshi, Vihan Jain, Vikas Yadav, Vilobh Meshram, Vishal Dharmadhikari, Warren Barkley, Wei Wei, Wenming Ye, Woohyun Han, Woosuk Kwon, Xiang Xu, Zhe Shen, Zhitao Gong, Zichuan Wei, Victor Cotruta, Phoebe Kirk, Anand Rao, Minh Giang, Ludovic Peran, Tris Warkentin, Eli Collins, Joelle Barral, Zoubin Ghahramani, Raia Hadsell, D. Sculley, Jeanine Banks, Anca Dragan, Slav Petrov, Oriol Vinyals, Jeff Dean, Demis Hassabis, Koray Kavukcuoglu, Clement Farabet, Elena Buchatskaya, Sebastian Borgeaud, Noah Fiedel, Armand Joulin, Kathleen Kenealy, Robert Dadashi, and Alek Andreev. 2024. <a href="#">Gemma 2: Improving open language models at a practical size</a> . <i>Preprint</i> , arXiv:2408.00118.	1093
1033		1094
1034		1095
1035		1096
1036		1097
1037		
1038		1098
1039		1099
1040		1100
1041		1101
1042		1102
1043		1103
1044		1104
1045		1105
1046		1106
1047		1107
1048		
1049		1108
1050		1109
1051		1110
1052		1111
1053		1112
1054		
1055		1113
1056		1114
1057		1115
1058		1116
1059		1117
1060		1118
1061		1119
1062		1120
1063		
1064		1121
1065		1122
1066		1123
1067		1124
1068		1125
1069		1126
1070		
1071		1127
1072		1128
		1129
		1130
		1131
1073	Dongjing Wang, Haojiang Yao, Dongjin Yu, Shiyu Song, He Weng, Guandong Xu, and Shuiguang Deng. 2025. <a href="#">Graph intention embedding neural network for tag-aware recommendation</a> . <i>Neural Networks</i> , 184:107062.	
1074		
1075		
1076		
1077		
1078		
1079	Peng Wang, Shuai Bai, Sinan Tan, Shijie Wang, Zhihao Fan, Jinze Bai, Keqin Chen, Xuejing Liu, Jialin Wang, Wenbin Ge, Yang Fan, Kai Dang, Mengfei Du, Xuancheng Ren, Rui Men, Dayiheng Liu, Chang Zhou, Jingren Zhou, and Junyang Lin. 2024a. <a href="#">Qwen2-vl: Enhancing vision-language model's perception of the world at any resolution</a> . <i>Preprint</i> , arXiv:2409.12191.	
1080		
1081		
1082		
1083		
1084		
1085		
1086		
1087	Yu Wang, Amin Javari, Janani Balaji, Walid Shalaby, Tyler Derr, and Xiquan Cui. 2024b. <a href="#">Knowledge graph-based session recommendation with session-adaptive propagation</a> . In <i>Companion Proceedings of the ACM Web Conference 2024</i> , WWW '24, page 264–273, New York, NY, USA. Association for Computing Machinery.	
1088		
1089		
1090		
1091		
1092		
	Jason Wei, Xuezhi Wang, Dale Schuurmans, Maarten Bosma, Brian Ichter, Fei Xia, Ed Chi, Quoc Le, and Denny Zhou. 2023. <a href="#">Chain-of-thought prompting elicits its reasoning in large language models</a> . <i>Preprint</i> , arXiv:2201.11903.	
	Baixuan Xu, Weiqi Wang, Haochen Shi, Wenxuan Ding, Huihao Jing, Tianqing Fang, Jiaxin Bai, Xin Liu, Changlong Yu, Zheng Li, Chen Luo, Qingyu Yin, Bing Yin, Long Chen, and Yangqiu Song. 2024. <a href="#">MIND: Multimodal shopping intention distillation from large vision-language models for E-commerce purchase understanding</a> . In <i>Proceedings of the 2024 Conference on Empirical Methods in Natural Language Processing</i> , pages 7800–7815, Miami, Florida, USA. Association for Computational Linguistics.	
	Changlong Yu, Weiqi Wang, Xin Liu, Jiaxin Bai, Yangqiu Song, Zheng Li, Yifan Gao, Tianyu Cao, and Bing Yin. 2023. <a href="#">Folkscope: Intention knowledge graph construction for e-commerce common-sense discovery</a> . <i>Preprint</i> , arXiv:2211.08316.	
	Chenwei Zhang, Wei Fan, Nan Du, and Philip S. Yu. 2016. <a href="#">Mining user intentions from medical queries: A neural network based heterogeneous jointly modeling approach</a> . In <i>Proceedings of the 25th International Conference on World Wide Web</i> , WWW '16, page 1373–1384, Republic and Canton of Geneva, CHE. International World Wide Web Conferences Steering Committee.	
	Qi Zhao, Yi Zhang, Daniel Friedman, and Fangfang Tan. 2015. <a href="#">E-commerce recommendation with personalized promotion</a> . In <i>Proceedings of the 9th ACM Conference on Recommender Systems</i> , RecSys '15, page 219–226, New York, NY, USA. Association for Computing Machinery.	
	Xi Zhu, Fake Lin, Ziwei Zhao, Tong Xu, Xiangyu Zhao, Zikai Yin, Xueying Li, and Enhong Chen. 2024. <a href="#">Multi-behavior recommendation with personalized directed acyclic behavior graphs</a> . <i>ACM Trans. Inf. Syst.</i> , 43(1).	

## Appendices

### A Implementation Details

#### A.1 Attribute Extraction

To extract attributes from the given session products using GPT-4o-mini, we use the following 3-shot prompt as a general template:

Your goal is to extract the attribute type and attribute values of the product.

You will be provided with the product names and their corresponding product images, and you will output for the product:

Category: general category name of the product. Keep the category name simple and within 3 words.

Attributes: attribute(s) of the product. You can infer new ones from the image. Keep the attribute simple and within 3 words each. Separate different attributes by |. Generate in the format of attribute: value

Below are three examples:

...

Input:

Product Name: Adidas Ultraboost 21 Women's Running Shoes on sale, White/Pink special, Size 8 only, best for daily runs!

Output:

Category: Clothing

Attributes: brand: Adidas | model: Ultraboost 21 | gender: Women's | type: Running Shoes | color: White/Pink | size: 8

Input:

Product Name: Lightweight and powerful Dell XPS 13 Laptop, with newly released Intel i7, 16GB RAM, enhanced 512GB SSD, Silver version

Output:

Category: Electronics

Attributes: brand: Dell | model: XPS 13 | processor: Intel i7 | RAM: 16GB | storage: 512GB | color: Silver

Input:

Product Name: baking enthusiasts' good friend - KitchenAid Artisan Series 5-Quart Stand Mixer, Empire Red

Output:

Category: Kitchen Appliance

Attributes: brand: KitchenAid | model: Artisan Series | capacity: 5-Quart | type: Stand Mixer | color: Empire Red

...

Input:

<INPUT MESSAGE>

Output:

#### A.2 Intention Tree Construction

To construct the intention tree by filling in the necessary intention entries, pivotal attributes and underlying comparison, we use the following 5-shots template:

Act as a customer who is browsing a series of products.

For each input, you are required to generate several intentions as output, and each intention should only contain the following lines of information:

New Intention: new intention you may have after interacting with the new product

Attribute: attribute(s) of the new product that caused the change in intention. You can infer new ones from the image. Generate in the format of attribute: value

Rationale: a short rationale explaining why the attribute of the new product reflects the new intention. Generate in the format of facets: reasoning

Comparison: a comparison between the new product and the previous product to justify why the new product caused the change in intention. Generate in the format of aspects: comparison

Here is one example with five intentions:

...

Input:

Previous Intention: Looking for stylish and modern footwear that complements their athletic look.

Previous Product: Nike Free Metcon 5 Women's Workout Shoes (varieties: runner, target consumers: women, size: 3.5, price: \$100).

New Product: LV Glove Loafer (varieties:

1231	loafer, target consumers: men, size:	Rationale: comfort: The cushioned	1282
1232	3.5, price: \$200, structure: cushioned	insole of the LV Glove Loafer ensures	1283
1233	insole).	comfort for long periods, making it a	1284
1234	Output:	practical choice without compromising	1285
1235	New Intention: Invest in premium quality	on style.	1286
1236	footwear for long-lasting style and	Comparison: comfort: While the Nike	1287
1237	comfort.	Free Metcon 5 is designed for athletic	1288
1238	Attribute: design: luxury material and	performance, the LV Glove Loafer offers	1289
1239	craftsmanship.	a balance of comfort and style for	1290
1240	Rationale: durability: The LV Glove	everyday wear.	1291
1241	Loafer is crafted from high-quality	New Intention: Choose a high-end brand	1292
1242	materials, offering durability and	to reflect social status.	1293
1243	style that ensures it will last longer	Attribute: brand: Louis Vuitton.	1294
1244	than ordinary shoes.	Rationale: status: Owning a product	1295
1245	Comparison: collectability: compared to	from a high-end brand like Louis Vuitton	1296
1246	the Nike Free Metcon 5, which focuses	reflects social status and prestige.	1297
1247	on performance, the LV offers a blend	Comparison: brand prestige: Compared to	1298
1248	of luxury and longevity, making it a	Nike, which is known for athletic wear,	1299
1249	worthy investment.	Louis Vuitton is a luxury brand that	1300
1250	New Intention: Own a versatile pair	signifies higher social status.	1301
1251	of shoes suitable for both casual and	...	1302
1252	formal settings.	Input:	1303
1253	Attribute: varieties: loafer.	Previous Intention: <Previous	1304
1254	Rationale: usages: The loafer style of	Intention>	1305
1255	the LV Glove Loafer makes it versatile	Previous Product: <PREVIOUS PRODUCTS>	1306
1256	enough to be worn in both casual	New Product: <THE LAST PRODUCT>	1307
1257	and formal settings, unlike the more	Output:	1308
1258	specialized athletic design of the Nike		1309
1259	Free Metcon 5.		
1260	Comparison: versatility: While the Nike	For smaller branching sizes, we just need to	1310
1261	Free Metcon 5 is primarily designed for	delete some of the examples provided. And for	1311
1262	workouts, the LV Glove Loafer's loafer	extending to more branches every step, we add	1312
1263	style offers versatility for various	additional examples as needed.	1313
1264	occasions.		
1265	New Intention: Enhance your wardrobe	<b>A.3 Intention Generator Model Selection</b>	1314
1266	with a statement piece that reflects	We first tried out free open LVLM models like	1315
1267	personal style.	Mantis and LLaVA families. However, the mod-	1316
1268	Attribute: design: unique and luxurious.	els fail to achieve the desired outcome since most	1317
1269	Rationale: aesthetics: The unique and	of them cannot output in pre-assigned formatting.	1318
1270	luxurious design of the LV Glove Loafer	This is possible because models are not able to han-	1319
1271	makes it a statement piece that can	dle the potentially long, complex product textual	1320
1272	elevate any outfit, reflecting personal	descriptions and attributes provided. For example,	1321
1273	style.	repeatedly generating a single word or outputting a	1322
1274	Comparison: uniqueness: Unlike the more	large number of special symbols like "####." After	1323
1275	common athletic design of the Nike Free	careful examination, it is not caused by prompts	1324
1276	Metcon 5, the LV Glove Loafer stands	and product information included. We switched to	1325
1277	out as a unique and stylish addition to	GPT-4o-mini later and found the generated inten-	1326
1278	the wardrobe.	tion and metadata result is in the desired format,	1327
1279	New Intention: Prioritize comfort	and it demonstrates comparable results with GPT-	1328
1280	without compromising on style.	4o. Therefore, we opt for GPT-4o-mini as the major	1329
1281	Attribute: comfort: cushioned insole.	generating force for the intention tree construction	1330
		part.	1331

## A.4 Model Evaluation

We evaluate the model on the tasks using different prompt techniques including zero-shot prompts (see Table 5), 5-shots prompts (see Table 6, 7, 8, 9) and Chain-of-Thought prompts (see Table 10). The detailed prompts we used can be found in the corresponding tables.

## B Annotation Details

### B.1 Worker Selection Protocol

We carry out strict quality control to ensure high quality human annotation result. To start with, we send qualification round invitations only to workers who satisfy the following constraints: (i) pass over 2,000 HITs, (ii) score over 90% on historical approval rate. We curate a qualification test with sampled sessions, whose gold label are provided by the authors. We first retain those with an accuracy of over 75% on the qualification test and completing over 20 questions at the same time.

Following that, we disqualify those spammers or underperforming workers. More specifically, we filter out those workers who are simply picking one side of the choices for the majority of the time. After conducting another round of testing, results shows that least 7 people picking one side of the answer 80 percent of the time, so we eliminate out those people and proceed to main round annotations.

11 workers left after the selection process out of 300 initial candidates. This gives a worker selection rate of 3.67%.

### B.2 Annotation Instructions

We give instruction to workers in layman’s terms, with both detailed question definitions and specific explanations for important information included. We tried to include more information and less distractions. The question definitions are closely aligned to what we defined earlier in Section 3. For each of the first three questions, workers are asked to annotate using a four-point 0 to 3 likelihood scale, where 0 stands for the least probable or the least plausible, and 3 means the most likely or the most plausible. For the forth question, annotation result are constraint to a three point scale, from 1 to 3. Larger the number, larger the likelihood of exploring more diverse products.

## C Evaluation Task Performances Metrics

We display our summarized task performance metrics for each of the tasks in Table 4. Statistics in both counting and percentage format are included.

	Metric	Task No.			
		TASK 1	TASK 2	TASK 3	TASK 4
Count	# TP	781	415	527	57
	# FN	354	434	775	585
	# TN	234	515	309	949
	# FP	458	445	215	131
Percentage	TP (%)	42.75%	22.94%	28.86%	3.31%
	FN (%)	19.38%	24.00%	42.44%	33.97%
	TN (%)	12.81%	28.47%	16.92%	55.11%
	FP (%)	25.07%	24.60%	11.77%	7.61%

Table 4: Task performance metrics for error analyses of GPT-4o with Chain-of-Thought answering SESSION-INTENTBENCH. Where *TP*, *FN*, *TN*, *FP* stand for true positive, false negative, true negative, and false positive answers respectively.



Survey Instructions (Click to Collapse)

## How Intentions Evolve with Changing Attributes?

Welcome to our Main Round HITs. Congratulations on passing the qualification test and thanks for participating in our HITs!

In this survey, you will be provided a session of products and asked to evaluate alterations in purchasing intentions as the product attributes changes.

**Before the questions:** You will be provided with a list of Session Products that will be used throughout the questions.

**Answer each question:** Select the option that best describes your evaluation of the model's output based on the criteria provided.

### Question Formalization

**Q1: Changing Intentions**

After reviewing the listed products (including their titles, attributes, images, etc.), and assuming you have the provided purchasing intention, we want to understand how likely you are to purchase a specific product based on this intention. Your task is to decide whether you would consider purchasing the product given your current intentions.

You'll be provided with four rating options: Yes, Maybe yes, Maybe no and No.

**Q2: Attribute that Matters**

After reviewing the listed products, and assuming you highly value a specific attribute of the listed products, we want to understand how likely you are to purchase another product based on this valued attribute. Your task is to decide whether you would consider purchasing the product given your focus on the specific characteristic.

You'll be provided with four rating options: Yes, Maybe yes, Maybe no and No.

**Q3: Comparisons**

After reviewing the listed products, and assuming you have the provided purchasing intentions, we want to understand if the comparison between the products provides a detailed and reasonable justification for your purchasing impulse. Your task is to decide whether the comparison is thorough enough to justify your change in intention.

You'll be provided with four rating options: Yes, Maybe yes, Maybe no and No.

**Q4: Changing Desire**

After reviewing the listed products, and assuming you have the provided purchasing intention, we want to understand if you still wish to explore similar products. Your task is to decide whether you want to continue exploring products within the same category or look for products in different categories.

You'll be provided with three rating options: Yes, Maybe yes, and No.

**Session Products List**

Session Products List is a list of products that you browsed (possibly consider purchasing) in a short period of time on Amazon.

The list of products will contain the following information:

- (1) **Product title:** The name of the product you viewed.
- (2) **New intention:** You should imagine yourself as a customer who has the mentioned intention/impulse when browsing the products. The word "New" means it's the intention you hypothetically have after seeing the last product in the current list.
- (3) **Attributes:** The features, functions, or characteristics of the product that you may consider when making a purchase decision. They are complementary information for the title/image to facilitate your decision process.

Each Session Products List is in one-to-one correspondence with the question following it.

### Additional Hints

- Read the Session Products List carefully: Understand the previous intention, previous product, and new product details.
- Submit your response: Once you have answered all questions, click the Submit button to complete the HIT.

Figure 5: The annotation instruction we shown to workers, with detailed question definitions in layman’s terms and specific explanations for important information (e.g., a preview of information contained in *Session Product List*).

Task	Zero-shot Prompt
TASK 1	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you are a customer who has the intention of &lt;second last intention&gt;. How likely are you to purchase &lt;last product&gt; based on the assumed intention?</p> <p>A. Yes: The product is a logical and reasonable outcome of the purchasing intention. B. Maybe yes: I may consider this, but it's not a strong impulse. C. Maybe no: The product is not directly related to my intention. D. No: I would never purchase it if I were the customer with the given intention.</p> <p>Your Answer (Answer A or B or C or D only):</p>
TASK 2	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you are a customer who highly value the feature &lt;second last intention attribute&gt; of &lt;second last product&gt;. How likely are you to purchase &lt;last product&gt;?</p> <p>A. Yes: The product logically and reasonably matches the characteristics I value. B. Maybe yes: I might consider this product, but it doesn't strongly appeal to me. C. Maybe no: The product does not directly relate to the characteristic I value. D. No: I would not purchase this product if I were focused on the given characteristic.</p> <p>Your Answer (Answer A or B or C or D only):</p>
TASK 3	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>Comparing between &lt;last two products&gt;, and assuming you have the intention of &lt;last two intention&gt;, Does this comparison &lt;last intention comparison&gt; provide an in-depth justification of your impulse?</p> <p>A. Yes: the comparison is reasonable and detailed enough to justify the change. B. Maybe yes: The comparison could be more detailed and thorough but can be ignored. C. Maybe no: The comparison is not entirely reasonable or lacks sufficient in-depth detail. D. No: The comparison does not provide any underlying reasons or insights.</p> <p>Your Answer (Answer A or B or C or D only):</p>
TASK 4	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you have the intention of &lt;previous intention&gt;, do you still want to explore similar products?</p> <p>A. Yes: I want to explore products under the same category. B. Maybe yes: I want to explore products under the same category but with different features. C. No: I want to explore products under other categories.</p> <p>Your Answer (Answer A or B or C only):</p>

Table 5: Zero-shot prompts for model evaluation. TASK 1 stands for *Intent-Based Purchasing Likelihood Estimation*, TASK 2 stands for *Purchasing Likelihood Inference via Valued Attributes Regularization*, TASK 3 stands for *Intention Justification via Comparison*, TASK 4 stands for *Intention Evolution Modeling*.

Task	5-shots Prompt
TASK 1	<p>Act as a customer who is browsing a series of products given as follows.  &lt;session product information&gt;  You hold an assumed intention, which will be provided later.  After seeing the products, you will be asked to determine the likelihood of purchasing the last product \ based on the assumed intention.  You will be given four options to choose from: Yes, Maybe yes, Maybe no, No.  Please select the most appropriate option based on the given context.  A. Yes: The product is a logical and reasonable outcome of the purchasing intention.  B. Maybe yes: I may consider this, but it's not a strong impulse.  C. Maybe no: The product is not directly related to my intention.  D. No: I would never purchase it if I were the customer with the given intention.</p> <p>Here are a few examples:  Q: After seeing Eco-friendly laundry detergent, bamboo dish brush, reusable kitchen cloths, and assuming you are a customer who have the intention of Reducing household chemical usage. How likely are you to purchase A biodegradable dish soap based on the assumed intention?  A: A. Yes</p> <p>Q: After seeing Instant Pot, KitchenAid Stand Mixer, Ninja Air Fryer, and assuming you are a customer who have the intention of Upgrading kitchen equipment for home cooking. How likely are you to purchase A set of gourmet spices based on the assumed intention?  A: C. Maybe no</p> <p>Q: After seeing Columbia hiking boots, North Face backpack, Garmin GPS watch, and assuming you are a customer who have the intention of Planning for outdoor adventures. How likely are you to purchase A formal suit for weddings based on the assumed intention?  A: D. No</p> <p>Q: After seeing "1984" by George Orwell, "To Kill a Mockingbird" by Harper Lee, \ "The Catcher in the Rye" by J.D. Salinger, and assuming you are a customer who have the intention of Finding new reading material for leisure. How likely are you to purchase "The Da Vinci Code" by Dan Brown based on the assumed intention?  A: B. Maybe yes</p> <p>Q: After seeing Rolex Submariner, Omega Seamaster, Tag Heuer Monaco, and assuming you are a customer who have the intention of Finding a timeless gift for a special occasion. How likely are you to purchase A limited edition Patek Philippe watch based on the assumed intention?  A: A. Yes</p> <p>Q: After seeing &lt;previous products&gt;, and assuming you are a customer who have the intention of &lt;second last intention&gt;. How likely are you to purchase &lt;last product&gt; based on the assumed intention?  A:</p>

Table 6: 5-shots prompts for model evaluation. TASK 1 stands for *Intent-Based Purchasing Likelihood Estimation*

Task	5-shots Prompt
TASK 2	<p>Act as a customer who is browsing a series of products given as follows.  &lt;session product information&gt;  You have a valued feature/attribute, which will be provided later.  After seeing the products, you will be asked to determine the likelihood of purchasing the last product \ based on the valued attribute.  You will be given four options to choose from: Yes, Maybe yes, Maybe no, No.  Please select the most appropriate option based on the given context.  A. Yes: The product logically and reasonably matches the characteristics I value.  B. Maybe yes: I might consider this product, but it doesn't strongly appeal to me.  C. Maybe no: The product does not directly relate to the characteristic I value.  D. No: I would not purchase this product if I were focused on the given characteristic.</p> <p>Here are a few examples:  Q: After seeing Noise-canceling headphones, wireless earbuds, Bluetooth speaker, and assuming you are a customer who highly value the feature High audio quality of Bluetooth speaker. How likely are you to purchase A premium soundbar?  A: A. Yes</p> <p>Q: After seeing adjustable standing desk, monitor with blue light filter, Ergonomic office chair, and assuming you are a customer who highly value the feature Ergonomics of Ergonomic office chair. How likely are you to purchase A desk lamp with a USB port?  A: C. Maybe no</p> <p>Q: After seeing Organic facial cleanser, natural moisturizer, chemical-free sunscreen, and assuming you are a customer who highly value the feature Natural ingredients of chemical-free sunscreen. How likely are you to purchase A synthetic fragrance?  A: D. No</p> <p>Q: After seeing DSLR camera, camera tripod, external flash, and assuming you are a customer who highly value the feature Professional photography of external flash. How likely are you to purchase A photo editing software?  A: A. Yes</p> <p>Q: After seeing High SPF sunscreen, UV-blocking sunglasses, wide-brimmed hat, and assuming you are a customer who highly value the feature Sun protection of wide-brimmed hat. How likely are you to purchase An aloe vera gel?  A: B. Maybe yes</p> <p>Q: After seeing &lt;previous products&gt;, and assuming you are a customer who highly value the feature &lt;second last intention attribute&gt; \ of &lt;second last product&gt;.  How likely are you to purchase &lt;last product&gt;?  A:</p>

Table 7: 5-shots prompts for model evaluation. TASK 2 stands for *Purchasing Likelihood Inference via Valued Attributes Regularization*.



Task	5-shots Prompt
TASK 3	<p>Act as a customer who is browsing a series of products given as follows.  &lt;session product information&gt;  You have an assumed intention, which will be provided later.  You will be asked to evaluate the provided comparison between the last two products \ based on the assumed intention.  You will be given four options to choose from: Yes, Maybe yes, Maybe no, No.  Please select the most appropriate option based on the given context.  A. Yes: the comparison is reasonable and detailed enough to justify the change.  B. Maybe yes: The comparison could be more detailed and thorough but can be ignored.  C. Maybe no: The comparison is not entirely reasonable or lacks sufficient in-depth detail.  D. No: The comparison does not provide any underlying reasons or insights.</p> <p>Here are a few examples:  Q: Comparing between a budget smartphone with a long battery life and A high-end smartphone with \ superior low-light performance,  and assuming you have the intention of Finding a device with the best camera quality,  Does this comparison The high-end smartphone boasts advanced camera technology \ provide in-depth justification of your impulse?  A: A. Yes</p> <p>Q: Comparing between A compact car and a mid-size SUV,  and assuming you have the intention of Prioritizing fuel efficiency,  Does this comparison the mid-size SUV, although spacious, consumes more fuel due to its larger engine \ and heavier body provide in-depth justification of your impulse?  A: B. Maybe yes</p> <p>Q: Comparing between A luxury wristwatch and a fitness tracker,  and assuming you have the intention of Tracking health metrics,  Does this comparison Finding a more affordable watch provide in-depth justification of your impulse?  A: D. No</p> <p>Q: Comparing between A leather office chair with plush cushioning and \ a mesh office chair with lumbar support  and assuming you have the intention of Seeking maximum comfort during long working hours,  Does this comparison The mesh office chair offers better breathability and ergonomic support \ provide in-depth justification of your impulse?  A: A. Yes</p> <p>Q: Comparing between A hardcover book and an e-reader,  and assuming you have the intention of Enhancing the reading experience,  Does this comparison The hardcover book provides a tactile, while the e-reader offers portability, \ adjustable text size provide in-depth justification of your impulse?  A: C. Maybe no</p> <p>Q: Comparing between &lt;last two products&gt;,  and assuming you have the intention of &lt;last two intention&gt;,  Does this comparison &lt;last intention comparison&gt; provide in-depth justification of your impulse?  A:</p>

Table 8: 5-shots prompts for model evaluation. TASK 3 stands for *Intention Justification via Comparison*.

Task	5-shots Prompt
TASK 4	<p>Act as a customer who is browsing a series of products given as follows.  &lt;session product information&gt;  You will be provided with a sequence of intention.  You will be asked to determine whether you still want to explore similar products \ based on the sequence of intention.  You will be given three options to choose from: Yes, Maybe yes, No.  Please select the most appropriate option based on the given context.  A. Yes: I want to explore products under the same category.  B. Maybe yes: I want to explore products under the same category but with different features.  C. No: I want to explore products under other categories.</p> <p>Here are a few examples:  Q: After seeing Stainless steel kitchen knives, non-stick frying pans, silicone spatulas, and assuming you have the intention of Upgrading kitchen tools for home cooking, do you still want to explore similar products?  A: B. Maybe yes</p> <p>Q: After seeing Fitness tracker, yoga mat, resistance bands, and assuming you have the intention of Tracking fitness progress, do you still want to explore similar products?  A: A. Yes</p> <p>Q: After seeing Stainless steel refrigerator, smart oven, induction cooktop, and assuming you have the intention of Making the kitchen more energy efficient, do you still want to explore similar products?  A: C. No</p> <p>Q: After seeing Smart thermostat, LED light bulbs, energy-efficient washing machine, and assuming you have the intention of Saving on utility bills, do you still want to explore similar products?  A: B. Maybe yes</p> <p>Q: After seeing Indoor plants, plant stands, watering can, and assuming you have the intention of Creating a greener living space, do you still want to explore similar products?  A: A. Yes</p> <p>Q: After seeing &lt;previous products&gt;, and assuming you have the intention of &lt;previous new intention&gt;, do you still want to explore similar products?  A:</p>

Table 9: 5-shots prompts for model evaluation. TASK 4 stands for *Intention Evolution Modeling*.

Task	Chain-of-Thought Prompt
TASK 1	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you are a customer who have the intention of &lt;second last intention&gt;. How likely are you to purchase &lt;last product&gt; based on the assumed intention?</p> <p>A. Yes: The product is a logical and reasonable outcome of the purchasing intention. B. Maybe yes: I may consider this, but it's not a strong impulse. C. Maybe no: The product is not directly related to my intention. D. No: I would never purchase it if I were the customer with the given intention.</p> <p>Answer with a brief rationale then make your final choice \\ by answering the option alphabet A/B/C/D only in the last line of your response. Your Answer:</p>
TASK 2	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you are a customer who highly value the feature &lt;second last intention attribute&gt; \\ of &lt;second last product&gt;. How likely are you to purchase &lt;last product&gt;?</p> <p>A. Yes: The product logically and reasonably matches the characteristic I value. B. Maybe yes: I might consider this product, but it doesn't strongly appeal to me. C. Maybe no: The product does not directly relate to the characteristic I value. D. No: I would not purchase this product if I were focused on the given characteristic.</p> <p>Answer with a brief rationale then make your final choice \\ by answering the option alphabet A/B/C/D only in the last line of your response. Your Answer:</p>
TASK 3	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>Comparing between &lt;last two products&gt;, and assuming you have the intention of &lt;last two new intention&gt;, Does this comparison &lt;last intention comparison&gt; provide in-depth justification of your impulse?</p> <p>A. Yes: the comparison is reasonable and detailed enough to justify the change. B. Maybe yes: The comparison could be more detailed and thorough but can be ignored. C. Maybe no: The comparison is not entirely reasonable or lacks sufficient in-depth detail. D. No: The comparison does not provide any underlying reasons or insights.</p> <p>Answer with a brief rationale then make your final choice \\ by answering the option alphabet A/B/C/D only in the last line of your response. Your Answer:</p>
TASK 4	<p>Act as a customer who is browsing a series of products given as follows. &lt;session product information&gt;</p> <p>After seeing &lt;previous products&gt;, and assuming you have the intention of &lt;previous new intention&gt;, do you still want to explore similar products?</p> <p>A. Yes: I want to explore products under the same category. B. Maybe yes: I want to explore products under the same category but with different features. C. No: I want to explore products under other categories.</p> <p>Answer with a brief rationale, then make your final choice \\ by answering the option alphabet A/B/C only in the last line of your response. Your Answer:</p>

Table 10: Chain-of-Thought prompts for model evaluation. TASK 1 stands for *Intent-Based Purchasing Likelihood Estimation*, TASK 2 stands for *Purchasing Likelihood Inference via Valued Attributes Regularization*, TASK 3 stands for *Intention Justification via Comparison*, TASK 4 stands for *Intention Evolution Modeling*.