

IN-CONTEXT LEARNING FOR FULL BAYESIAN INFERENCE

Anonymous authors

Paper under double-blind review

ABSTRACT

Transformers have emerged as the dominant architecture in the field of deep learning, with a broad range of applications and remarkable in-context learning (ICL) capabilities. While not yet fully understood, ICL has already proved to be an intriguing phenomenon, allowing transformers to learn in-context—without requiring further training. In this paper, we further advance the understanding of ICL by demonstrating that transformers can perform full Bayesian inference for commonly used statistical models in-context. More specifically, we introduce a general framework that builds on ideas from prior fitted networks and continuous normalizing flows and enables us to infer complex posterior distributions for models such as generalized linear models and latent factor models. Extensive experiments on real-world datasets demonstrate that our ICL approach yields posterior samples that are similar in quality to state-of-the-art MCMC or variational inference methods that do not operate in-context. The source code for this paper is available at https://anonymous.4open.science/r/ICL_For_Full_Bayesian_Inference-3F53

1 INTRODUCTION

Can we leverage in-context learning (ICL) to perform full Bayesian inference? In this paper, we investigate this question. The core principle of ICL is that a system adapts to a given task based on information provided in its context, enabling it to solve complex problems, such as question-answering or text summarization, using a fixed model and without requiring any gradient-based fine-tuning, simply by referencing the context. This way, ICL enables the generation of real-time solutions via local understanding of data without explicit re-training.

ICL has become not only a central paradigm in natural language processing, with LLMs as ubiquitous in-context learners (Brown et al., 2020; Touvron et al., 2023), but led to a paradigm shift in machine learning in general (Dong et al., 2022). In the domain of tabular data, tabular prior-data fitted networks (TabPFNs) are in-context learners that achieve state-of-the-art classification accuracy on small datasets in combination with minimal prediction time (Hollmann et al., 2022). The central idea of prior fitted networks (PFNs) is to train a transformer model that takes as input a small tabular dataset and directly outputs the class labels for test samples. The training data for such a model is purely synthetic, and sampled from a distribution referred to as the “prior” in the context of PFNs.

1.1 FULL BAYESIAN INFERENCE IN-CONTEXT

Performing full Bayesian inference can be challenging, even for relatively simple models such as generalized linear models (GLMs; Nelder & Wedderburn, 1972). We use the notion of *full Bayesian inference* for methods yielding potentially complex and high-dimensional posterior distributions—in contrast to, for instance, methods that yield only the posterior predictive, as e.g. in Müller et al. (2021). [Full Bayesian inference is thus fundamental for a wide range of applications in Bayesian statistics and probabilistic machine learning, even though it cannot always be achieved.](#) Methods of central importance for full Bayesian inference are Markov chain Monte Carlo (MCMC) and variational inference (VI).

054 While previous studies of ICL are mostly concerned with learning to simulate univariate predictions
 055 of models in-context, and only discuss synthetic scenarios (Garg et al., 2022; Ahuja et al., 2023; Bai
 056 et al., 2024), our work attempts to perform full Bayesian inference via ICL on real-world data.

057 The idea underlying the proposed approach is founded on two observations relating to full Bayesian
 058 inference and the working principle of PFNs: First, many Bayesian models have a generative for-
 059 mulation that allows the simulation of arbitrarily large amounts of training samples from the joint
 060 distribution $P^{x,z}$. We assume that samples from $P^{x,z}$ comprise a dataset $x = \{x_j\}_{j=1}^K$ containing
 061 K samples $x_j \in \mathcal{X}$ and a corresponding (latent) variable $z \in \mathcal{Z}$.¹ This joint distribution $P^{x,z}$
 062 corresponds to the “prior” in PFNs and allows the training of a large neural network that implicitly
 063 learns to perform Bayesian inference. Second, Bayesian inference is especially useful for smaller
 064 datasets x that can be processed in a single forward pass. This makes an entire dataset a viable
 065 context for Bayesian ICL.

066 To summarize, our main contributions are as follows:

- 067 1. Using the aforementioned idea, we develop, train, and examine a model that yields samples from
 068 the posterior distribution $P^{z|x}$ given data x as context without any (explicit) parameter updates
 069 or parametric assumption about the posterior.
- 070 2. To achieve this, we propose to use synthetic samples from the joint distribution $P^{x,z}$ in order
 071 to train a large transformer model that performs ICL regarding the posterior $P^{z|x}$, and provide
 072 a general framework to analyze the circumstances that enable learning $P^{z|x}$ purely through
 073 samples from $P^{x,z}$.
- 074 3. We then analyze the efficacy of our approach for GLMs and latent factor models. For these
 075 applications, we show that including the “prior” used for TabPFNs results in reliably inferring
 076 posterior distributions on real-world data.
- 077 4. In a variety of experiments, we demonstrate that this approach yields posterior samples that are
 078 very similar to those from a Hamiltonian Monte Carlo sampler. Furthermore, we find that the
 079 quality of the samples, when compared to various popular VI techniques that do not operate
 080 in-context, is preferable.

082 2 RELATED WORK

083 Beyond the perspective of prior fitted networks, the contribution of this work can be summarized
 084 from two additional viewpoints: First, from the perspective of in-context learning, we show that
 085 (large) transformer models can not only implement statistical models in terms of their predictions,
 086 but also explicitly and in a full probabilistic setting. From the simulation-based inference view-
 087 point, we demonstrate that sample-based posterior estimation (Dax et al., 2021) can be used for
 088 full Bayesian inference in complex scenarios arising in commonly used latent variable models and
 089 demonstrate the effectiveness of this approach on real-world datasets.

092 **In-context learning** ICL is a special case of meta-learning (Hospedales et al., 2021) character-
 093 ized by using a large pre-trained model in order to learn from a context dataset without explicitly
 094 updating task-specific parameters. Several recent lines of work investigate the in-context learning
 095 capabilities of transformers (Garg et al., 2022; Ahuja et al., 2023; Wang et al., 2024; Chan et al.,
 096 2022). For instance, Garg et al. (2022) show that a model similar to GPT-2 can implicitly implement
 097 various interesting function classes in-context. More specifically, the model learns to reproduce
 098 the predictions of different statistical models, in particular linear functions, as well as sparse linear
 099 functions, decision trees, and even two-layer neural networks. This approach can be extended to
 100 multiple families of functions and even mixtures of tasks (Ahuja et al., 2023). However, the results
 101 by Garg et al. (2022) and Ahuja et al. (2023) are restricted to rather small problem scales and scalar-
 102 valued predictions instead of multivariate posterior distributions. Additionally, the experiments are
 103 conducted exclusively on simulated data.

104 Furthermore, while Xie et al. (2021) explain ICL from a Bayesian perspective, several lines employ
 105 ICL as a tool for fundamentally Bayesian tasks such as Bayesian optimization (Müller et al., 2023;

106 ¹We do not assume any specific form of z . That is, there can be a single z_j associated with each data point
 107 x_j in x , but the case where a single “global” z governs the behavior of each x_j in x is equally included in this
 notation.

Ramos et al., 2023) or regression with probabilistic predictions based on natural language (Requeima et al., 2024).

Amortized Inference Amortized inference is a central paradigm in the field of variational inference (Kingma, 2013; Zhai et al., 2018; Kim et al., 2018; Margossian & Blei, 2023). The central idea here is to model the posterior distribution $P^{z|\mathbf{x}}$ of latent variables z given a dataset \mathbf{x} via $p(z|\mathbf{x}) \approx \prod_{j=1}^K q_{\theta}(z_j|h_{\phi}(\mathbf{x}_j))$. Here, in contrast to our more general assumption, each datapoint \mathbf{x}_j in \mathbf{x} has a corresponding latent variable z_j . While the parameter θ determines global aspects of the variational distribution, the function h_{ϕ} is shared for all \mathbf{x}_j and thus amortized across a dataset \mathbf{x} . For example, variational autoencoders (Kingma, 2013; Rezende et al., 2014) and neural processes (Garnelo et al., 2018a;b; Rudner et al., 2018) are important model classes based on amortized inference.

In contrast, our ICL approach amortizes its parameters on the level of datasets, such that a single functional relationship is learned for a set $\mathcal{D} \subset (\mathcal{X} \times \mathcal{Z})^N$ of datasets. From this point of view, $\mathcal{D} = \{(\mathbf{x}^{(i)}, z^{(i)})\}_{i=1}^N$ comprising N datasets $\mathbf{x}^{(i)} \in \mathcal{X}$ and the corresponding latent variables $z^{(i)} \in \mathcal{Z}$ can be seen as a “meta-dataset” for which we perform amortized inference. Furthermore, unlike amortized variational inference, we do not use the notion of an evidence lower bound (Blei et al., 2017) or even the Kullback-Leibler divergence to learn the posterior distribution, but rather utilize ideas that also appear in the context of simulation-based inference.

Simulation-based inference Analogously to latent variable models, some scientific simulations, for instance in neuroscience or astrophysics (Fan & Markram, 2019; Schmit & Pritchard, 2018), allow to draw samples from the joint distribution $P^{\mathbf{x},z}$ of data and latent variable of interest. Amortized posterior inference in this context is referred to as simulation-based inference (SBI; Cranmer et al., 2020). Several recent approaches focus on using neural networks to directly infer aspects of the likelihood $p(\mathbf{x}|z)$, the posterior $P^{z|\mathbf{x}}$ or the joint distribution $P^{\mathbf{x},z}$ in the aforementioned simulation cases. More specifically, techniques based on discrete normalizing flows (Dax et al., 2021) or flow-matching (Wildberger et al., 2024) are used to approximate the posterior $P^{z|\mathbf{x}}$, while Gloeckler et al. (2024) propose to use a transformer-based diffusion model in order to approximate the joint distribution $P^{\mathbf{x},z}$.

3 IN-CONTEXT LEARNING FOR FULL BAYESIAN INFERENCE

Bayesian inference is a tool of central importance for countless applications. However, exact posterior inference can become computationally expensive when using sampling-based methods (Hastings, 1970; Hoffman et al., 2014; Betancourt, 2017) and even impossible when relying on fully factorized VI methods, which can incur substantial approximation errors (Bishop et al., 2002; Blei, 2012; Margossian & Blei, 2023). Amortized variational inference can alleviate those issues but typically requires the development of specialized and complex modeling frameworks (Kingma, 2013; Srivastava & Sutton, 2017; Garnelo et al., 2018b; Lin et al., 2021). Another issue with variational inference arises from having to choose a variational distribution. While insufficient flexibility in this respect can lead to overly simplistic posteriors, a too flexible variational distribution might overfit the given data (Cremer et al., 2018).

We propose a simple and effective solution based on ideas from ICL, which can be seen as conducting amortized inference on a dataset level. Training a model on a potentially unlimited amount of synthetic datasets yields an in-context learner that can not only approximate a vast, almost arbitrarily large, class of distributions, but is also highly efficient when used for sampling. Furthermore, this does not incur any issues with overly or insufficiently flexible distribution assumptions as in VI.

More specifically, our central goal is to develop a method allowing to infer the posterior distribution $P^{z|\mathbf{x}}$ of latent variables $z \in \mathcal{Z}$, given observations $\mathbf{x} \in \mathcal{X}$ using ICL. From a supervised-learning perspective, we thus aim to directly learn the mapping $f_0 : \mathcal{X} \rightarrow \mathcal{M}(\mathcal{Z})$, $\mathbf{x} \mapsto P^{z|\mathbf{x}}$, where $\mathcal{M}(\mathcal{Z})$ is the space of all probability measures. Therefore, we want a model $f_{\theta}(\mathbf{x}) = Q_{\theta}^{z|\mathbf{x}}$ for the posterior to be as close as possible to the true posterior $P^{z|\mathbf{x}} = f_0(\mathbf{x})$. We measure “closeness” w.r.t. some divergence $d : \mathcal{M}(\mathcal{Z}) \times \mathcal{M}(\mathcal{Z}) \rightarrow [0, \infty)$. When considering the expected divergence over data

162 samples $\mathbf{x} \sim P^{\mathbf{x}}$, this gives rise to the following objective:

$$163 \mathcal{R}_\theta := \mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} [d(f_\theta(\mathbf{x}), f_0(\mathbf{x}))] = \mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} \left[d \left(Q_\theta^{z|\mathbf{x}}, P^{z|\mathbf{x}} \right) \right]. \quad (1)$$

165 Note that we use the notion of a divergence d loosely to refer to any measure of similarity of two
166 distributions. Although \mathcal{R}_θ itself is usually intractable, specific choices of d and the use of the joint
167 distribution $P^{\mathbf{x},z}$ make Eq. (1) accessible via

$$168 \tilde{\mathcal{R}}_\theta := \mathbb{E}_{\mathbf{x}, z \sim p(\mathbf{x}, z)} [\mathcal{L}_d(\mathbf{x}, z, \theta)], \quad (2)$$

170 where the loss function \mathcal{L}_d depends on d and the structure of $Q_\theta^{z|\mathbf{x}}$ (discussed in detail later). Per-
171 forming empirical risk minimization for $\tilde{\mathcal{R}}_\theta$ with samples from the joint distribution $P^{\mathbf{x},z}$ then
172 corresponds to learning to approximate $P^{z|\mathbf{x}}$. The model for the posterior $P^{z|\mathbf{x}}$ is thereby only
173 implicitly defined by the joint distribution $P^{\mathbf{x},z}$. While this requires the ability to sample from
174 $P^{\mathbf{x},z}$, drawing samples from the joint distribution is often a weak requirement in terms of model
175 specification that immediately follows from specifying the generative process of a model. Further-
176 more, a simple sufficient condition that follows directly from the law of total expectation implies the
177 equivalence of \mathcal{R}_θ and $\tilde{\mathcal{R}}_\theta$:

178 **Proposition 1.** Let $d(Q_\theta^{z|\mathbf{x}}, P^{z|\mathbf{x}}) = \int \gamma(Q_\theta^{z|\mathbf{x}}) dP^{z|\mathbf{x}}$ for some measurable functional $\gamma : \mathcal{M}(\mathcal{Z}) \rightarrow \mathbb{R}$. Then $\mathcal{R}_\theta = \tilde{\mathcal{R}}_\theta$ with $\mathcal{L}_d(\mathbf{x}, z, \theta) = \gamma(Q_\theta^{z|\mathbf{x}})$.

183 For instance, choosing d to be the forward Kullback-Leibler divergence $d_{KLD}(Q_\theta^{z|\mathbf{x}}, P^{z|\mathbf{x}}) = D_{KL}[p(\cdot|\mathbf{x})||q_\theta(\cdot|\mathbf{x})]$ implies that $\mathcal{L}_{d_{KLD}}(\mathbf{x}, z, \theta) = -\log q_\theta(z|\mathbf{x}) + \text{const.}$ (Müller et al., 2021).
184 In this case, minimizing $\tilde{\mathcal{R}}_\theta$ thus directly corresponds to performing maximum likelihood inference
185 on samples from $P^{\mathbf{x},z}$.

188 3.1 DEFINING THE FORM OF THE POSTERIOR

189 To learn the posterior distribution $P^{z|\mathbf{x}}$ in-context, we use the framework of flow matching (Lipman
190 et al., 2022). More specifically, we utilize continuous normalizing flows (CNFs) to specify and
191 ultimately sample from $P^{z|\mathbf{x}}$. CNFs, currently excelling in the field of image synthesis (Esser et al.,
192 2024), do not only allow to flexibly learn almost arbitrary distributions, but are also found to be more
193 sample-efficient in training than for instance diffusion objectives (Lipman et al., 2022; Wildberger
194 et al., 2024). Furthermore, unlike discrete normalizing flows (Papamakarios et al., 2021a), CNF
195 objectives do not limit the architecture of the used neural network, allowing to incorporate complex
196 conditioning on the data \mathbf{x} in addition to flexibly modeling the posterior, which is a crucial aspect
197 of our ICL framework. Refer to Appendix K for more information on CNFs.

199 3.1.1 NORMALIZING FLOWS

200 The key idea of modeling a distribution $P^{z|\mathbf{x}}$ with normalizing flows (see, e.g., Papamakarios et al.,
201 2021b), which are the basis of CNFs, is to assume that $P^{z|\mathbf{x}}$ is the result of “pushing forward” a
202 simple base distribution $P_{\mathcal{B}}$ into $P^{z|\mathbf{x}}$ using a conditional flow $\psi_\theta(\cdot|\mathbf{x})$:

$$203 P^{z|\mathbf{x}} \approx [\psi_\theta(\cdot|\mathbf{x})]_{\#} P_{\mathcal{B}}. \quad (3)$$

205 Therefore, one assumes that samples from $P^{z|\mathbf{x}}$ are generated by first drawing $\mathbf{z}_0 \sim P_{\mathcal{B}}$, and then
206 applying $\psi_\theta(\cdot|\mathbf{x})$, such that $\psi_\theta(\mathbf{z}_0|\mathbf{x}) \sim P^{z|\mathbf{x}}$. The base distribution $P_{\mathcal{B}}$ is commonly set to be a
207 standard normal distribution, i.e., $P_{\mathcal{B}} = \mathcal{N}(0, I)$. The conditional flow $\psi_\theta(\cdot|\mathbf{x})$ is the object to be
208 learned, such that our model of $P^{z|\mathbf{x}}$ is defined as $Q_\theta^{z|\mathbf{x}} := [\psi_\theta(\cdot|\mathbf{x})]_{\#} P_{\mathcal{B}}$.

210 3.1.2 CONTINUOUS NORMALIZING FLOWS

211 In flow matching (Lipman et al., 2022), which we will use to obtain an in-context learner for full
212 Bayesian inference, the normalizing flow $\psi_\theta(\cdot|\mathbf{x})$ is implicitly defined via a (conditional) vector
213 field $v_{t,\mathbf{x}}^\theta$ of an ordinary differential equation (ODE):

$$214 \frac{d}{dt} \psi_{\theta,t}(\mathbf{z}|\mathbf{x}) = v_{t,\mathbf{x}}^\theta(\psi_{\theta,t}(\mathbf{z}|\mathbf{x})), \quad \psi_{\theta,0}(\mathbf{z}|\mathbf{x}) = \mathbf{z}, \quad (4)$$

where $0 \leq t \leq 1$. The first condition $\frac{d}{dt}\psi_{\theta,t}(\mathbf{z}|\mathbf{x}) = v_{t,\mathbf{x}}^\theta(\psi_{\theta,t}(\mathbf{z}|\mathbf{x}))$ means that $v_{t,\mathbf{x}}^\theta$ describes the change in $\psi_{\theta,t}(\mathbf{z}|\mathbf{x})$ at time t , and the second condition $\psi_{\theta,0}(\mathbf{z}|\mathbf{x}) = \mathbf{z}$ implies that initially the flow is just the identity. The family of vector fields $v_{t,\mathbf{x}}^\theta$ is parameterized by a neural network whose parameters θ will be learned. In order to ultimately compute the flow $v_{1,\mathbf{x}}^\theta$, that yields $Q_\theta^{\mathbf{z}|\mathbf{x}} = [\psi_{\theta,1}(\cdot|\mathbf{x})]_\# P_\mathcal{B}$, a numerical ODE solver can be used to forward-solve the ODE, which ultimately corresponds to evaluating $\psi_{1,\mathbf{x}}$ at a datapoint $\mathbf{z}_0 \sim P_\mathcal{B}$.

Assuming Gaussian conditional probability paths with an optimal-transport mean- and variance-function (Lipman et al., 2022), one obtains the following discrepancy measure d_{CFM} between $Q_\theta^{\mathbf{z}|\mathbf{x}} := [\psi_{\theta,1}(\cdot|\mathbf{x})]_\# P_\mathcal{B}$ and $P^{\mathbf{z}|\mathbf{x}}$:

$$d_{CFM} \left(Q_\theta^{\mathbf{z}|\mathbf{x}}, P^{\mathbf{z}|\mathbf{x}} \right) := \mathbb{E} \left[\left\| v_{t,\mathbf{x}}^\theta \left((1 - (1 - \sigma_{min})t) \mathbf{z}_0 + t \mathbf{z}_1 \right) - \frac{\mathbf{z}_1 - (1 - \sigma_{min}) \mathbf{z}_0}{1 - (1 - \sigma_{min})t} \right\|_2^2 \right], \quad (5)$$

where the expectation is taken w.r.t. to three random variables:

1. a uniform time-step $t \sim \mathcal{U}([0, 1])$;
2. samples from the base distribution $\mathbf{z}_0 \sim P_\mathcal{B}$;
3. samples from the ground-truth conditional distribution $\mathbf{z}_1 \sim P^{\mathbf{z}|\mathbf{x}}$.

We refer to Wildberger et al. (2024) for mathematical results on the relationship of d_{CFM} and the (forward) Kullback-Leibler divergence. The hyperparameter σ_{min} , which is the variance at time $t = 1$ in the Gaussian conditional probability paths, appears to have negligible influence when set to a sufficiently small value (Lipman et al., 2022).²

In order to make optimizing $\mathbb{E}_{\mathbf{x} \sim p(\mathbf{x})} \left[d_{CFM} \left(Q_\theta^{\mathbf{z}|\mathbf{x}}, P^{\mathbf{z}|\mathbf{x}} \right) \right]$ tractable, and thus train our in-context learner, we make use of the sufficient condition in Proposition 1. Thus, the divergence d_{CFM} admits the re-formulation as an objective $\tilde{\mathcal{R}}_\theta$ using samples from the joint distribution $P^{\mathbf{x},\mathbf{z}}$. We can therefore optimize $\tilde{\mathcal{R}}_\theta$ using N independent and identically distributed (i.i.d.) samples $t^{(i)} \sim \mathcal{U}([0, 1])$ from the time-distribution, $\mathbf{z}_0^{(i)} \sim P_\mathcal{B}$ from the base distribution, and $(\mathbf{z}_1^{(i)}, \mathbf{x}^{(i)}) \sim P^{\mathbf{x},\mathbf{z}}$ from the joint distribution. With this, we obtain the following empirical risk used for the training of all ICL models:

$$\hat{\mathcal{R}}_\theta = \sum_{i=1}^N \left\| v_{t^{(i)},\mathbf{x}^{(i)}}^\theta \left((1 - (1 - \sigma_{min})t^{(i)}) \mathbf{z}_0^{(i)} + t^{(i)} \mathbf{z}_1^{(i)} \right) - \frac{\mathbf{z}_1^{(i)} - (1 - \sigma_{min}) \mathbf{z}_0^{(i)}}{1 - (1 - \sigma_{min})t^{(i)}} \right\|_2^2. \quad (6)$$

3.2 SAMPLING FROM THE JOINT DISTRIBUTION

In order to learn a model that can perform posterior inference according to Section 3.1, we require to sample $(\mathbf{x}, \mathbf{z}) \sim P^{\mathbf{x},\mathbf{z}}$. Given $p(\mathbf{x}, \mathbf{z}) = p(\mathbf{x}|\mathbf{z})p(\mathbf{z})$, this is always possible as long as one can draw samples from $P^\mathbf{z}$ and then from $P^{\mathbf{x}|\mathbf{z}}$. Hence, this is a relatively weak requirement allowing for a broad variety of priors and observation models. More specifically, for ICL, we generate a training dataset \mathcal{D} which comprises i.i.d. samples $\{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}_{i=1}^N$ resulting from sampling $\mathbf{z}^{(i)} \sim P^\mathbf{z}$ and then $\mathbf{x}^{(i)} \sim P^{\mathbf{x}|\mathbf{z}^{(i)}}$. We use this simple yet fundamental and very general template to generate samples from the joint $P^{\mathbf{x},\mathbf{z}}$ for GLMs, factor analysis (FA), and Gaussian mixture models (GMMs) in our later applications.

GLM example For example, assume that $\mathbf{x} := (\mathbf{u}, y)$ is partitioned into covariates \mathbf{u} and a response y related via a conditional distribution $P^{y|\mathbf{x}}$ depending on a linear predictor $\mathbf{u}^\top \boldsymbol{\beta}$. This allows to define various GLM structures. In case of a fully Bayesian GLM, one further assumes a prior $P^\boldsymbol{\beta}$ on the regression coefficients and additionally on the variance σ^2 of the responses, which takes the role of a separate dispersion parameter, as well as a link function $g : \mathbb{R} \rightarrow \mathbb{R}$. Algorithm 1 specifies how a dataset \mathcal{D} with i.i.d samples from $P^{\mathbf{x},\mathbf{z}}$ can be sampled in this case.

²In our experiments, we follow Wildberger et al. (2024) and set $\sigma_{min} := 10^{-4}$ for all experiments.

Algorithm 1: Generation of synthetic data for GLMs

```

270
271
272 1 Initialize  $\mathcal{D} \leftarrow \emptyset$ ;
273 2 for  $i = 1, \dots, N$  do
274   3   draw  $\beta_i \sim P^\beta$ ;
275   4   draw  $\sigma_i^2 \sim P^{\sigma^2}$ ;
276   5   for  $j = 1, \dots, K$  do
277     6   draw  $\mathbf{u}_{i,j} \sim P^{\mathbf{u}}$ ;
278     7   draw  $y_{i,j} \sim p(y|g^{-1}(\mathbf{u}_{i,j}^\top \beta_i), \sigma_i^2)$ ;
279   8   end
280   9   set  $\mathbf{x}^{(i)} := ((\mathbf{u}_{i,j}, y_{i,j}))_{j=1}^K$ ;
281   10  set  $\mathbf{z}^{(i)} := \beta_i$ ;
282   11   $\mathcal{D} \leftarrow \mathcal{D} \cup \{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}$ ;
283 12 end

```

Variations in the structure of the distributions P^β , P^{σ^2} , $P^{y|\mathbf{x}}$, as well as g give rise to different models. Examples include Bayesian ridge, Bayesian lasso and logistic regression (Box & Tiao, 2011; Murphy, 2023), which we all consider in our later experiments (see Appendix A.1 for details on the distributional setups and GLMs in general). Analogously, albeit with different data generating mechanisms, one can obtain samples for FA and GMMs, which we detail in Appendix A.2 and Appendix A.3.

3.3 GENERATING REALISTIC DATA

While we assume a data-generating process such as the one in Algorithm 1, this is not necessarily the data-generating process that produces the data in the model’s application as an in-context learner. Even when the generative process $P^{\mathbf{x}, \mathbf{z}}$ underlying a statistical model is sophisticated and complex in nature, model misspecification is inevitable in almost every practical application. While mismatches between the real data-generating processes and model assumptions can lead to various problems in traditional Bayesian modeling (Grünwald & van Ommen, 2017), the question of model misspecification plays a somewhat different and yet an especially central role for our ICL approach.

More specifically, the ICL model learns the relationship between $P^{\mathbf{z}|\mathbf{x}}$ and a datapoint \mathbf{x} exclusively based on synthetic samples from the marginal $P^{\mathbf{x}}$ implied by the statistical model with generative process $P^{\mathbf{x}, \mathbf{z}}$. Given a real-world dataset $\mathbf{x}^* \sim P^{\mathbf{x}^*}$, model misspecification in terms of $P^{\mathbf{x}^*}$ implies that the in-context learner needs to infer the posterior based on out-of-distribution data, where the problem is aggravated the more unrealistic $P^{\mathbf{x}}$ is.

To be able to access a reference or ground truth distribution, the data generating processes in our experiments need to match the structure of the GLM, FA and GMM approaches. While the generative processes of FA and GMMs directly prescribe how all parts of the data are generated, this can potentially cause a discrepancy between synthetically generated and real-world datasets. However, our empirical results (Section 4.1) demonstrate that the in-context learner can generalize to real-world data despite the discrepancy to the simulated datasets.

GLM example continued In the aforementioned GLM case, the distribution of the covariates $P^{\mathbf{u}}$ does not affect the structure of $P^{\mathbf{z}|\mathbf{x}}$ in the data generating process (cf. Algorithm 1). We can therefore use a flexible prior $P^{\mathbf{u}}$ such as the TabPFN-“prior” (Hollmann et al., 2022) to generate covariates \mathbf{u} and thereby effectively tackle the issue of model specification. More specifically, by generating a plethora of highly realistic samples of tabular covariates with different ranges, domains, and correlations, the in-context learner will learn the GLM structure on a broad mixture of distributions regarding the covariates \mathbf{u} .

3.4 THE ARCHITECTURE

In order to implement the idea of learning full Bayesian inference in-context, we extend ideas of diffusion transformers (Peebles & Xie, 2023), where the conditioning on the time t is implemented

via adaptive layer norm (adaLN) blocks initialized as the identity function. As we potentially require complex conditioning on the data \mathbf{x} , an additional transformer encoder is added. The input to the decoder is a vector in the form $1 - (1 - \sigma_{min})t)z_0 + tz_1$, which is treated as a sequence with length one and processed by a transformer decoder without self-attention, but the adaLN blocks. Therefore, the decoder has an equivalent interpretation as a multi-layer perceptron with skip-connections, cross-attention, and adaptive layer normalization. For the final processing in the decoder, only conditional feedforward layers with adaptive layer normalization are used, which corresponds exactly to the architecture of the decoder before, albeit without cross attention. We call this part an ‘‘MLP with Conditioning’’. Samples for the time $t \in [0, 1]$ are mapped onto a conditioning vector using several fully connected layers, which yields a richer representation of t that is well-suited as an input to the adaLN blocks. Fig. 1 depicts of the resulting architecture.

3.5 IMPLEMENTING FLOW MATCHING

During the training phase, a tuple (z_1, \mathbf{x}) is drawn from the distribution $P^{z|\mathbf{x}}$. Additionally, a time step $t \sim \mathcal{U}[0, 1]$ and a sample z_0 is drawn from the base distribution $P_{\mathcal{B}}$, which is a standard Gaussian for all our applications. Subsequently, the ground-truth conditional flow $\psi(z_0|\mathbf{x}) = 1 - (1 - \sigma_{min})t)z_0 + tz_1$ is computed, pushing forward $P_{\mathcal{B}}$ into $P^{z|\mathbf{x}}$ up to time-point t . The transformer encoder processes \mathbf{x} and the decoder takes the representation of the encoder into account in order to output $v_{t,\mathbf{x}}^\theta(\psi(z_0|\mathbf{x}))$. This output should match the vector field that describes how the ground-truth flow $\psi(z_0|\mathbf{x})$ continues at time t . The discrepancy to the ground-truth vector field is measured with the MSE-loss in Eq. (6).

In the sampling phase, we are given \mathbf{x} and the goal is to sample from $P^{z|\mathbf{x}}$. To do so, first a vector $z_0 \sim P_{\mathcal{B}}$ is drawn. The data \mathbf{x} is passed through the encoder. The decoder defines a function that maps a time-point t and a vector ν onto a vector field: $(t, \nu) \mapsto v_{t,\mathbf{x}}^\theta(\nu)$ taking \mathbf{x} into account. This function is given to an ODE-solver in order to forward-solve the corresponding ODE with boundary conditions $0 \leq t \leq 1$.

4 EXPERIMENTS

To show that the proposed methodology is not just an abstract concept, we derive exemplary use cases that demonstrate how well ICL is able to keep up with MCMC and VI approaches in practice.

For this, we will use two prominent statistical modeling classes, namely generalized linear models (GLMs) and latent factor models. For the latent factor models, we consider factor analysis (FA) and Gaussian mixture models (GMMs).

Modeling scenarios We use seven different scenarios for the GLMs, where we vary the prior distribution on the parameters, the conditional distribution of the response, and whether an intercept is included. For FA, we vary the form of the priors and dimensionalities of variables, and for the GMMs investigate different dimensionalities as well as prior configurations. We refer to Appendix A for details on the model structure and scenarios.

Datasets We evaluate the methods on 50 synthetic datasets and 17 real-world datasets from a benchmark suite proposed by Grinsztajn et al. (2022). We refer to Appendix J for more details on the preprocessing of the datasets.

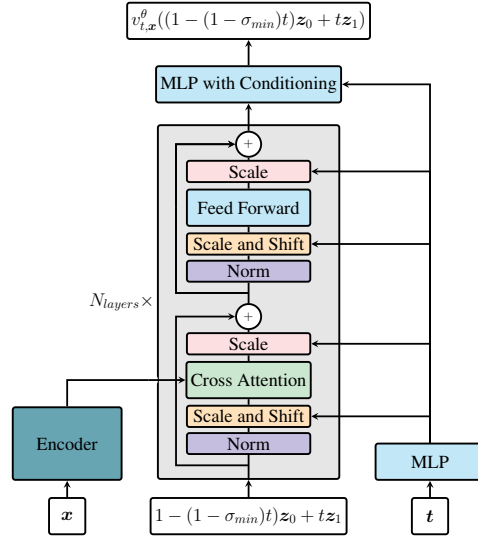


Figure 1: Architecture to perform ICL for full Bayesian inference.

Methods Apart from a comparison with a gold standard, we compare our ICL approach to a Laplace approximation (Daxberger et al., 2021) and different established VI methods based on automatic differentiation VI (Kucukelbir et al., 2017). For the variational distribution, we incorporate a normal distribution with 1) a diagonal and 2) a full covariance matrix, as well as 3) a structured normal distribution with linear dependencies between the latent variables, and 4) an approach based on inverse auto-regressive flows (IAF; Kingma et al., 2016). Appendix D contains a discussion about the hyperparameters of all considered methods.

Evaluation process For every synthetic and real-world dataset, 1000 posterior samples from each method are compared against samples from the analytical solution, if available, or from a Hamiltonian Monte Carlo (HMC) sampler with a NUTS kernel (Hoffman et al., 2014) as the gold standard. For unimodal problems, we run a single chain. For posteriors with multiple modes, we use three times the number of modes as the number of chains to capture multimodality.

Evaluation metrics Three metrics are employed to compare samples from different approximations of the posterior distribution. The first metric is a classifier 2-sample test (C2ST; Lueckmann et al., 2021; Lopez-Paz & Oquab, 2016), where the ROC-AUC score of a random forest classifier, trained to distinguish between samples from the gold standard and the method in question, is utilized. For random forest, we use default hyperparameters, as defined in Scikit-learn (Pedregosa et al., 2011) and 10-fold cross-validation. The second metric is the maximum mean discrepancy (MMD) between the two distributions (gold-standard and each tested method) with an exponential kernel (Gretton et al., 2012). The third metric is the empirical Wasserstein-2 distance (\mathcal{W}_2 ; Givens & Shortt, 1984) of the two distributions, using a quadratic solver implemented in the POT library (Flamary et al., 2021).

4.1 RESULTS

4.1.1 GENERALIZED LINEAR MODELS

Across seven different variants of GLMs, we find that ICL yields samples that have overall the highest agreement with the gold-standard (see Table 1). Specifically on the synthetic datasets, the C2ST, MMD and \mathcal{W}_2 metrics indicate that the posterior distribution can be approximated more accurately with ICL than via variational inference. Particularly in cases where the posterior has a shape deviating from a normal distribution, ICL and HMC agree more closely than VI. For instance in the case where a gamma prior, i.e. a skewed distribution, is used on the coefficients of a regression model, we find that ICL substantially outperforms VI both on synthetic and real-world data (see Table 2). On the real-world data, ICL still matches the performance of VI methods and has the best (or not significantly worse than the best) performance in terms of C2ST in four out of seven cases (see Appendix B.1).

Table 1: Results for GLMs. Average performance of VI methods and our ICL approach on 50 synthetic and 17 real-world datasets across 7 different GLM scenarios. Comparison to the analytical solution when available and HMC otherwise. The best average result is marked in **bold**.

Model	Synthetic Evaluation			Real-World Evaluation		
	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1.000	2.770	2.049	1.000	2.091	0.849
VI: DiagonalNormal	0.869	1.586	1.742	0.819	0.583	0.529
VI: MultivariateNormal	0.714	1.016	1.601	0.668	0.116	0.374
VI: Structured Normal	0.711	0.929	1.580	0.664	0.109	0.370
VI: IAF	0.784	1.648	2.349	0.732	0.516	0.680
ICL	0.657	0.183	0.556	0.648	0.090	0.387

4.1.2 FACTOR ANALYSIS

On the factor analysis tasks, ICL has notably lower dissimilarity scores compared to the gold standard than all other considered methods in the synthetic evaluation (Table 3). Notably, an average C2ST score of 0.568 is remarkably close to the theoretical lower bound of 0.5. Regarding the real world datasets, C2ST and MMD indicate that our ICL approach yields samples most similar to the reference, while the average \mathcal{W}_2 score is substantially higher. We hypothesize that this discrepancy

Table 2: Results for GLMs. Real-world Evaluation on 17 datasets: Linear regression with a gamma prior on the coefficients β , and an inverse gamma prior on the variance σ^2 of the responses (scenario 5). Comparison to HMC samples. All results within two standard errors of the best average result are marked in **bold**.

Model	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1.000 (± 0.000)	1.982 (± 0.126)	0.623 (± 0.084)
VI: DiagonalNormal	0.810 (± 0.036)	0.441 (± 0.252)	0.384 (± 0.089)
VI: MultivariateNormal	0.711 (± 0.038)	0.148 (± 0.093)	0.279 (± 0.056)
VI: Structured Normal	0.705 (± 0.032)	0.140 (± 0.081)	0.269 (± 0.045)
VI: IAF	0.777 (± 0.106)	0.684 (± 0.939)	0.625 (± 0.525)
ICL	0.610 (± 0.045)	0.046 (± 0.020)	0.242 (± 0.038)

in the metrics might be caused by numerical issues when computing the empirical \mathcal{W}_2 distance. Furthermore, the relatively high number of latent variables in comparison to the limited number of data-points can yield overly flexible assumptions on the variational posterior causing the VI methods to overfit. While the ICL approach is well suited for cases with little data, the small number of data points is likely the cause for the poor performance of the VI methods on the FA tasks.

Table 3: Results for FA: Average performance of VI methods and our ICL approach on 50 synthetic and 17 real-world datasets across 6 different FA scenarios. Comparison to HMC samples. The best average result is marked in **bold**.

Model	Synthetic Evaluation			Real-World Evaluation		
	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1.000	4.115	2.543	1.000	4.127	0.597
VI: DiagonalNormal	0.999	3.321	1.998	0.960	1.220	0.288
VI: MultivariateNormal	0.993	3.222	1.955	0.950	1.173	0.281
VI: Structured Normal	0.995	3.404	2.079	0.955	1.189	0.283
VI: IAF	0.987	3.226	1.973	0.902	0.969	0.251
ICL	0.568	0.057	0.409	0.751	0.673	0.583

4.1.3 GAUSSIAN MIXTURE MODELS

Full Bayesian inference for GMMs is arguably much more challenging than for GLMs or FA. First, the generative process of GMMs involves discrete assignments to clusters, which poses a challenge not only for NUTS, but especially for VI methods. Second, the dimensionality of the posterior samples can be relatively large since for diagonal normal distributions, each component of the mixture has a mean and a variance parameter per dimension. Finally, the considered GMMs are not identifiable leading to multi-modal posterior distributions, which are impossible to perfectly approximate with the most commonly used VI methods based on normal approximations.

Due to this inherent difficulty of the GMM scenarios, we find the overall performances of all models to be worse than in the GLM and FA cases. In particular, the C2ST metric is almost saturated for the VI approaches and has a value of around 83 percent for ICL (Table 4). The MMD and \mathcal{W}_2 metrics also indicate that ICL yields samples with higher agreement with the reference than the other approaches on synthetic data. A plot of the marginals of the posterior shows high agreement between the posterior distributions of both HMC and ICL while VI is incapable of perfectly approximating a bimodal distribution and exhibits typical mode-seeking behavior (Figure 2). Note that also the VI approach based on inverse autoregressive flows, which in theory allows flexible modeling of a wide range of posterior shapes, fails to learn the bi-modality accurately from the limited number of 50 data points in this GMM scenario. This demonstrates the strength of our ICL approach in flexibly learning distributions agnostic of the provided sample size. On the real-world evaluation, the differences are similar in nature, albeit slightly less pronounced. While C2ST and MMD are better for ICL than for VI, the \mathcal{W}_2 metric is not substantially different.

5 DISCUSSION

This paper explores in-context learning for the purpose of full Bayesian inference in latent variable models. We propose to use conditional flow matching as a generic and flexible framework to approximate posterior distributions and an architecture that utilizes a transformer encoder for potentially complex conditioning on the data. We find that our ICL approach yields, on average, a closer

Table 4: Average performance of VI methods and our ICL approach on 50 synthetic and 17 real-world datasets across 4 different GMM scenarios. Comparison to HMC samples. The best average result is marked in **bold**.

Model	Synthetic Evaluation			Real-World Evaluation		
	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1.000	3.916	8.324	1.000	3.385	12.740
VI: DiagonalNormal	0.994	2.676	7.938	0.992	2.182	11.633
VI: MultivariateNormal	0.995	2.556	7.947	0.987	2.143	11.696
VI: Structured Normal	0.994	2.595	7.929	0.988	2.129	11.521
VI: IAF	0.985	2.308	7.489	0.957	1.845	11.541
ICL	0.825	0.706	4.348	0.881	1.051	10.691

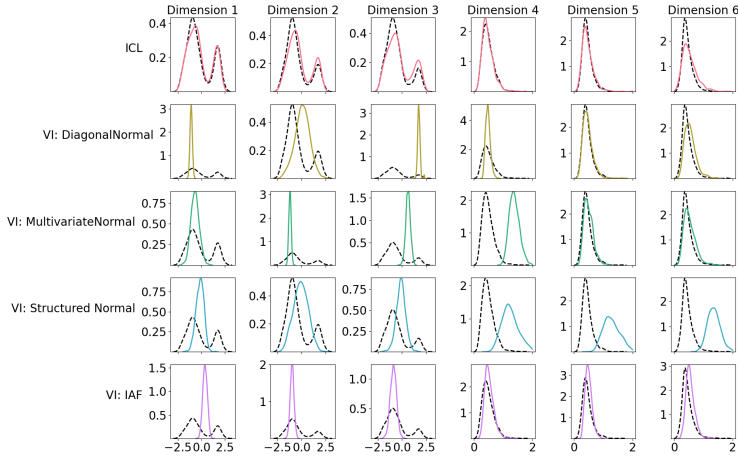


Figure 2: Density plots for the marginals of the posterior for GMM scenario 1. Comparison to HMC samples on a synthetic dataset. Only the marginals of the first three components of the mean and the variance are shown.

approximation of the posterior than several state-of-the-art variational inference methods across different datasets and model setups. This does not only hold for synthetic data, but also real-world tabular datasets, emphasizing the flexibility of ICL and its applicability for full Bayesian inference.

Limitations While our experiments indicate the effectiveness of ICL as a Bayesian inference method, it requires an extensive up-front training routine on modern GPU hardware. Despite ICL being consistently faster at inference time than the considered HMC methods, the overall computational burden to train our approach is much higher. As with many other ICL approaches, large datasets as a context can further become computationally very expensive.

Outlook and future work Despite its vast up-front computational cost, ICL has not only proven fundamentally transformative in the field of natural language processing (Brown et al., 2020; Touvron et al., 2023), but recently also appears to be very promising for tabular classification (Hollmann et al., 2022). Exploring the frontiers of ICL in terms of full Bayesian inference, starting from the feasibility results of this work, might therefore yield a path into similarly fertile territories.

Even though our experiments show that ICL works well despite being trained on data that is potentially very different from real-world data, the approach will only be as flexible as the data and model structures it was trained on. As a result, ICL might fail if the model, which implies the synthetic data generation, is severely misspecified. However, this is the same limitation as when misspecifying the hypothesis space of, e.g., a deep neural network or other machine learning approaches, effectively providing the model with the wrong inductive bias.

While flexible state-of-the-art sampling-based methods, such as HMC, are an efficient and highly effective reference in terms of inference for standard and simple statistical methods discussed in this paper, the proposed ICL approach is fundamentally more general in nature. In particular, any probabilistic model for which a generative process is conceivable can be fitted using our ICL approach—the potential for fitting models beyond the horizon of standard Bayesian methods is therefore manifold.

REFERENCES

- 540 Kabir Ahuja, Madhur Panwar, and Navin Goyal. In-context learning through the bayesian prism.
541 *arXiv preprint arXiv:2306.04891*, 2023.
- 542 Yu Bai, Fan Chen, Huan Wang, Caiming Xiong, and Song Mei. Transformers as statisticians:
543 Provable in-context learning with in-context algorithm selection. *Advances in neural information
544 processing systems*, 36, 2024.
- 545 Michael Betancourt. A conceptual introduction to hamiltonian monte carlo. *arXiv preprint
546 arXiv:1701.02434*, 2017.
- 547 Eli Bingham, Jonathan P Chen, Martin Jankowiak, Fritz Obermeyer, Neeraj Pradhan, Theofanis
548 Karaletsos, Rohit Singh, Paul Szerlip, Paul Horsfall, and Noah D Goodman. Pyro: Deep universal
549 probabilistic programming. *Journal of machine learning research*, 20(28):1–6, 2019.
- 550 Christopher Bishop, David Spiegelhalter, and John Winn. Vibes: A variational inference engine for
551 bayesian networks. *Advances in neural information processing systems*, 15, 2002.
- 552 David M Blei. Probabilistic topic models. *Communications of the ACM*, 55(4):77–84, 2012.
- 553 David M Blei, Alp Kucukelbir, and Jon D McAuliffe. Variational inference: A review for statisti-
554 cians. *Journal of the American statistical Association*, 112(518):859–877, 2017.
- 555 George EP Box and George C Tiao. *Bayesian inference in statistical analysis*. John Wiley & Sons,
556 2011.
- 557 Nicolas Brosse, Alain Durmus, and Eric Moulines. The promises and pitfalls of stochastic gradient
558 langevin dynamics. *Advances in Neural Information Processing Systems*, 31, 2018.
- 559 Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal,
560 Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, et al. Language models are
561 few-shot learners. *Advances in neural information processing systems*, 33:1877–1901, 2020.
- 562 Stephanie CY Chan, Ishita Dasgupta, Junkyung Kim, Dharshan Kumaran, Andrew K Lampinen, and
563 Felix Hill. Transformers generalize differently from information stored in context vs in weights.
564 *arXiv preprint arXiv:2210.05675*, 2022.
- 565 Ricky T. Q. Chen. torchdiffeq, 2018. URL [https://github.com/rtqichen/
566 torchdiffeq](https://github.com/rtqichen/torchdiffeq).
- 567 Tianqi Chen, Emily Fox, and Carlos Guestrin. Stochastic gradient hamiltonian monte carlo. In
568 *International conference on machine learning*, pp. 1683–1691. PMLR, 2014.
- 569 Kyle Cranmer, Johann Brehmer, and Gilles Louppe. The frontier of simulation-based inference.
570 *Proceedings of the National Academy of Sciences*, 117(48):30055–30062, 2020.
- 571 Chris Cremer, Xuechen Li, and David Duvenaud. Inference suboptimality in variational autoen-
572 coders. In *International conference on machine learning*, pp. 1078–1086. PMLR, 2018.
- 573 Quan Dao, Hao Phung, Binh Nguyen, and Anh Tran. Flow matching in latent space. *arXiv preprint
574 arXiv:2307.08698*, 2023.
- 575 Maximilian Dax, Stephen R Green, Jonathan Gair, Jakob H Macke, Alessandra Buonanno, and
576 Bernhard Schölkopf. Real-time gravitational wave science with neural posterior estimation. *Phys-
577 ical review letters*, 127(24):241103, 2021.
- 578 Erik Daxberger, Agustinus Kristiadi, Alexander Immer, Runa Eschenhagen, Matthias Bauer, and
579 Philipp Hennig. Laplace redux—effortless bayesian deep learning. *Advances in Neural Information
580 Processing Systems*, 34:20089–20103, 2021.
- 581 Qingxiu Dong, Lei Li, Damai Dai, Ce Zheng, Zhiyong Wu, Baobao Chang, Xu Sun, Jingjing Xu,
582 and Zhifang Sui. A survey on in-context learning. *arXiv preprint arXiv:2301.00234*, 2022.

- 594 John R Dormand and Peter J Prince. A family of embedded runge-kutta formulae. *Journal of*
595 *computational and applied mathematics*, 6(1):19–26, 1980.
- 596
- 597 Patrick Esser, Sumith Kulal, Andreas Blattmann, Rahim Entezari, Jonas Müller, Harry Saini, Yam
598 Levi, Dominik Lorenz, Axel Sauer, Frederic Boesel, et al. Scaling rectified flow transformers for
599 high-resolution image synthesis. In *Forty-first International Conference on Machine Learning*,
600 2024.
- 601 Ludwig Fahrmeir, Thomas Kneib, Stefan Lang, Brian Marx, Ludwig Fahrmeir, Thomas Kneib,
602 Stefan Lang, and Brian Marx. *Regression models*. Springer, 2013.
- 603
- 604 Xue Fan and Henry Markram. A brief history of simulation neuroscience. *Frontiers in neuroinfor-*
605 *matics*, 13:32, 2019.
- 606 Rémi Flamary, Nicolas Courty, Alexandre Gramfort, Mokhtar Z Alaya, Aurélie Boisbunon, Stanis-
607 las Chambon, Laetitia Chapel, Adrien Corenflos, Kilian Fatras, Nemo Fournier, et al. Pot: Python
608 optimal transport. *Journal of Machine Learning Research*, 22(78):1–8, 2021.
- 609 Shivam Garg, Dimitris Tsipras, Percy S Liang, and Gregory Valiant. What can transformers learn
610 in-context? a case study of simple function classes. *Advances in Neural Information Processing*
611 *Systems*, 35:30583–30598, 2022.
- 612
- 613 Marta Garnelo, Dan Rosenbaum, Christopher Maddison, Tiago Ramalho, David Saxton, Murray
614 Shanahan, Yee Whye Teh, Danilo Rezende, and SM Ali Eslami. Conditional neural processes. In
615 *International conference on machine learning*, pp. 1704–1713. PMLR, 2018a.
- 616 Marta Garnelo, Jonathan Schwarz, Dan Rosenbaum, Fabio Viola, Danilo J Rezende, SM Eslami,
617 and Yee Whye Teh. Neural processes. *arXiv preprint arXiv:1807.01622*, 2018b.
- 618
- 619 Clark R Givens and Rae Michael Shortt. A class of wasserstein metrics for probability distributions.
620 *Michigan Mathematical Journal*, 31(2):231–240, 1984.
- 621 Manuel Gloeckler, Michael Deistler, Christian Weilbach, Frank Wood, and Jakob H Macke. All-in-
622 one simulation-based inference. *arXiv preprint arXiv:2404.09636*, 2024.
- 623
- 624 Arthur Gretton, Karsten M Borgwardt, Malte J Rasch, Bernhard Schölkopf, and Alexander Smola.
625 A kernel two-sample test. *The Journal of Machine Learning Research*, 13(1):723–773, 2012.
- 626 Léo Grinsztajn, Edouard Oyallon, and Gaël Varoquaux. Why do tree-based models still outperform
627 deep learning on typical tabular data? *Advances in neural information processing systems*, 35:
628 507–520, 2022.
- 629 Peter Grünwald and Thijs van Ommen. Inconsistency of bayesian inference for misspecified linear
630 models, and a proposal for repairing it. *Bayesian Analysis*, 12(4):1069–1103, 2017.
- 631
- 632 WK Hastings. Monte carlo sampling methods using markov chains and their applications.
633 *Biometrika*, 57(1):97–109, 1970.
- 634 Matthew D Hoffman, Andrew Gelman, et al. The no-u-turn sampler: adaptively setting path lengths
635 in hamiltonian monte carlo. *J. Mach. Learn. Res.*, 15(1):1593–1623, 2014.
- 636
- 637 Noah Hollmann, Samuel Müller, Katharina Eggensperger, and Frank Hutter. TabPFN: A transformer
638 that solves small tabular classification problems in a second. *arXiv preprint arXiv:2207.01848*,
639 2022.
- 640 Timothy Hospedales, Antreas Antoniou, Paul Micaelli, and Amos Storkey. Meta-learning in neural
641 networks: A survey. *IEEE transactions on pattern analysis and machine intelligence*, 44(9):
642 5149–5169, 2021.
- 643 Sergey Ioffe. Batch normalization: Accelerating deep network training by reducing internal covari-
644 ate shift. *arXiv preprint arXiv:1502.03167*, 2015.
- 645
- 646 Pavel Izmailov, Sharad Vikram, Matthew D Hoffman, and Andrew Gordon Gordon Wilson. What
647 are bayesian neural network posteriors really like? In *International conference on machine learn-*
ing, pp. 4629–4640. PMLR, 2021.

- 648 Yoon Kim, Sam Wiseman, Andrew Miller, David Sontag, and Alexander Rush. Semi-amortized
649 variational autoencoders. In *International Conference on Machine Learning*, pp. 2678–2687.
650 PMLR, 2018.
- 651 Diederik P Kingma. Auto-encoding variational bayes. *arXiv preprint arXiv:1312.6114*, 2013.
- 652 Diederik P Kingma. Adam: A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*,
653 2014.
- 654 Durk P Kingma, Tim Salimans, Rafal Jozefowicz, Xi Chen, Ilya Sutskever, and Max Welling. Im-
655 proved variational inference with inverse autoregressive flow. *Advances in neural information*
656 *processing systems*, 29, 2016.
- 657 Alp Kucukelbir, Dustin Tran, Rajesh Ranganath, Andrew Gelman, and David M Blei. Automatic
658 differentiation variational inference. *Journal of machine learning research*, 18(14):1–45, 2017.
- 659 David N Lawley and Adam E Maxwell. Factor analysis as a statistical method. *Journal of the Royal*
660 *Statistical Society. Series D (The Statistician)*, 12(3):209–229, 1962.
- 661 Chunyuan Li, Changyou Chen, David Carlson, and Lawrence Carin. Preconditioned stochastic
662 gradient langevin dynamics for deep neural networks. In *Proceedings of the Thirtieth AAAI Con-*
663 *ference on Artificial Intelligence*, pp. 1788–1794, 2016.
- 664 Xixun Lin, Jia Wu, Chuan Zhou, Shirui Pan, Yanan Cao, and Bin Wang. Task-adaptive neural
665 process for user cold-start recommendation. In *Proceedings of the Web Conference 2021*, pp.
666 1306–1316, 2021.
- 667 Yaron Lipman, Ricky TQ Chen, Heli Ben-Hamu, Maximilian Nickel, and Matt Le. Flow matching
668 for generative modeling. *arXiv preprint arXiv:2210.02747*, 2022.
- 669 Hedibert Freitas Lopes and Mike West. Bayesian model assessment in factor analysis. *Statistica*
670 *Sinica*, pp. 41–67, 2004.
- 671 David Lopez-Paz and Maxime Oquab. Revisiting classifier two-sample tests. *arXiv preprint*
672 *arXiv:1610.06545*, 2016.
- 673 Ilya Loshchilov and Frank Hutter. Sgdr: Stochastic gradient descent with warm restarts. *arXiv*
674 *preprint arXiv:1608.03983*, 2016.
- 675 Jan-Matthis Lueckmann, Jan Boelts, David Greenberg, Pedro Goncalves, and Jakob Macke. Bench-
676 marking simulation-based inference. In *International conference on artificial intelligence and*
677 *statistics*, pp. 343–351. PMLR, 2021.
- 678 Oren Mangoubi and Nisheeth K Vishnoi. Nonconvex sampling with the metropolis-adjusted
679 langevin algorithm. In *Conference on learning theory*, pp. 2259–2293. PMLR, 2019.
- 680 Charles C Margossian and David M Blei. Amortized variational inference: When and why? *arXiv*
681 *preprint arXiv:2307.11018*, 2023.
- 682 Samuel Müller, Noah Hollmann, Sebastian Pineda Arango, Josif Grabocka, and Frank Hutter. Trans-
683 formers can do bayesian-inference by meta-learning on prior-data. In *Fifth Workshop on Meta-*
684 *Learning at the Conference on Neural Information Processing Systems*, 2021.
- 685 Samuel Müller, Matthias Feurer, Noah Hollmann, and Frank Hutter. Pfns4bo: In-context learning
686 for bayesian optimization. In *International Conference on Machine Learning*, pp. 25444–25470.
687 PMLR, 2023.
- 688 Kevin P Murphy. *Probabilistic machine learning: Advanced topics*. MIT press, 2023.
- 689 John Ashworth Nelder and Robert WM Wedderburn. Generalized linear models. *Journal of the*
690 *Royal Statistical Society Series A: Statistics in Society*, 135(3):370–384, 1972.
- 691 George Papamakarios, Eric Nalisnick, Danilo Jimenez Rezende, Shakir Mohamed, and Balaji Lak-
692 shminarayanan. Normalizing flows for probabilistic modeling and inference. *Journal of Machine*
693 *Learning Research*, 22(57):1–64, 2021a.

- 702 George Papamakarios, Eric Nalisnick, Danilo Jimenez Rezende, Shakir Mohamed, and Balaji Lak-
703 shminarayanan. Normalizing flows for probabilistic modeling and inference. *Journal of Machine*
704 *Learning Research*, 22(57):1–64, 2021b.
- 705
706 Fabian Pedregosa, Gaël Varoquaux, Alexandre Gramfort, Vincent Michel, Bertrand Thirion, Olivier
707 Grisel, Mathieu Blondel, Peter Prettenhofer, Ron Weiss, Vincent Dubourg, et al. Scikit-learn:
708 Machine learning in python. *the Journal of machine Learning research*, 12:2825–2830, 2011.
- 709 William Peebles and Saining Xie. Scalable diffusion models with transformers. In *Proceedings of*
710 *the IEEE/CVF International Conference on Computer Vision*, pp. 4195–4205, 2023.
- 711
712 Du Phan, Neeraj Pradhan, and Martin Jankowiak. Composable effects for flexible and accelerated
713 probabilistic programming in numpyro. *arXiv preprint arXiv:1912.11554*, 2019.
- 714 Mayk Caldas Ramos, Shane S Michtavy, Marc D Porosoff, and Andrew D White. Bayesian opti-
715 mization of catalysts with in-context learning. *arXiv preprint arXiv:2304.05341*, 2023.
- 716
717 James Requeima, John Bronskill, Dami Choi, Richard E Turner, and David Duvenaud. Llm
718 processes: Numerical predictive distributions conditioned on natural language. *arXiv preprint*
719 *arXiv:2405.12856*, 2024.
- 720 Danilo Jimenez Rezende, Shakir Mohamed, and Daan Wierstra. Stochastic backpropagation and ap-
721 proximate inference in deep generative models. In *International conference on machine learning*,
722 pp. 1278–1286. PMLR, 2014.
- 723
724 Tim GJ Rudner, Vincent Fortuin, Yee Whye Teh, and Yarín Gal. On the connection between neural
725 processes and gaussian processes with deep kernels. In *Workshop on Bayesian Deep Learning,*
726 *NeurIPS*, pp. 14, 2018.
- 727 Rudolph J Rummel. *Applied factor analysis*. Northwestern University Press, 1988.
- 728
729 Claude J Schmit and Jonathan R Pritchard. Emulation of reionization simulations for bayesian
730 inference of astrophysics parameters using neural networks. *Monthly Notices of the Royal Astro-*
731 *nomical Society*, 475(1):1213–1223, 2018.
- 732 Yang Song, Jascha Sohl-Dickstein, Diederik P Kingma, Abhishek Kumar, Stefano Ermon, and Ben
733 Poole. Score-based generative modeling through stochastic differential equations. *arXiv preprint*
734 *arXiv:2011.13456*, 2020.
- 735
736 Akash Srivastava and Charles Sutton. Autoencoding variational inference for topic models. *arXiv*
737 *preprint arXiv:1703.01488*, 2017.
- 738
739 Hugo Touvron, Louis Martin, Kevin Stone, Peter Albert, Amjad Almahairi, Yasmine Babaei, Niko-
740 lay Bashlykov, Soumya Batra, Prajjwal Bhargava, Shruti Bhosale, et al. Llama 2: Open founda-
741 tion and fine-tuned chat models. *arXiv preprint arXiv:2307.09288*, 2023.
- 742 Xinyi Wang, Wanrong Zhu, Michael Saxon, Mark Steyvers, and William Yang Wang. Large lan-
743 guage models are latent variable models: Explaining and finding good demonstrations for in-
744 context learning. *Advances in Neural Information Processing Systems*, 36, 2024.
- 745 Max Welling and Yee W Teh. Bayesian learning via stochastic gradient langevin dynamics. In
746 *Proceedings of the 28th international conference on machine learning (ICML-11)*, pp. 681–688.
747 Citeseer, 2011.
- 748
749 Jonas Wildberger, Maximilian Dax, Simon Buchholz, Stephen Green, Jakob H Macke, and Bern-
750 hard Schölkopf. Flow matching for scalable simulation-based inference. *Advances in Neural*
751 *Information Processing Systems*, 36, 2024.
- 752 Sang Michael Xie, Aditi Raghunathan, Percy Liang, and Tengyu Ma. An explanation of in-context
753 learning as implicit bayesian inference. *arXiv preprint arXiv:2111.02080*, 2021.
- 754
755 In-Kwon Yeo and Richard A Johnson. A new family of power transformations to improve normality
or symmetry. *Biometrika*, 87(4):954–959, 2000.

756 Jason Yim, Andrew Campbell, Andrew YK Foong, Michael Gastegger, José Jiménez-Luna, Sarah
757 Lewis, Victor Garcia Satorras, Bastiaan S Veeling, Regina Barzilay, Tommi Jaakkola, et al. Fast
758 protein backbone generation with se (3) flow matching. *arXiv preprint arXiv:2310.05297*, 2023.
759

760 Jason Yim, Andrew Campbell, Emile Mathieu, Andrew YK Foong, Michael Gastegger, José
761 Jiménez-Luna, Sarah Lewis, Victor Garcia Satorras, Bastiaan S Veeling, Frank Noé, et al. Im-
762 proved motif-scaffolding with se (3) flow matching. *arXiv preprint arXiv:2401.04082*, 2024.

763 Junhai Zhai, Sufang Zhang, Junfen Chen, and Qiang He. Autoencoder and its various variants.
764 In *2018 IEEE international conference on systems, man, and cybernetics (SMC)*, pp. 415–419.
765 IEEE, 2018.

766 Wenliang Zhao, Minglei Shi, Xumin Yu, Jie Zhou, and Jiwen Lu. Flowturbo: Towards real-time
767 flow-based image generation with velocity refiner. *arXiv preprint arXiv:2409.18128*, 2024.
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809

APPENDIX

A DATA-GENERATING PROCESSES

This section contains more details on the data generating processes of the latent variable models we fit via ICL.

A.1 GENERALIZED LINEAR MODELS

In this section we expand the description and explanation regarding GLMs from section 3.2. GLMs are among the most commonly used statistical models with myriads of applications (Nelder & Wedderburn, 1972; Fahrmeir et al., 2013). In the context of GLMs, we assume that the response y follows a distribution $P^{y|u}$ depending on the linear predictor $\eta := \mathbf{u}^\top \boldsymbol{\beta}$ and an additional parameter σ^2 . We denote the covariates as \mathbf{u} , the regression coefficients as $\boldsymbol{\beta}$, and use σ^2 for the variance of the response. The mean of $P^{y|u}$ depends on the linear predictor via a link function g , such that $g(\mathbb{E}[y|\mathbf{u}]) = \mathbf{u}^\top \boldsymbol{\beta}$. Ultimately, the density of distribution of the response y depending on the linear predictor and the additional parameter is denoted by $p(y|g(\mathbf{u}^\top \boldsymbol{\beta}), \sigma^2)$. To showcase the flexibility of our framework, we experiment with different priors P^β on the regression coefficients, P^{σ^2} on the parameter σ^2 , and also different parametric distributions of the response. Additionally, to include covariates \mathbf{u} that resemble practically relevant tabular data in the generative process, allowing for meaningful inference on real-world datasets, we utilize samples from the Tab-PFN “prior” for $P^{\mathbf{u}}$.

GLMs belong to the framework of latent variable models defined by data \mathbf{x} and (latent) variables \mathbf{z} , where the data comprises covariates and response $\mathbf{x} := (\mathbf{u}, y)$. The variables of interest are the coefficients $\mathbf{z} := \boldsymbol{\beta}$. This yields the following generative process for a set of synthetic samples $\mathcal{D} := \{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}_{i=1}^N$ from $P^{\mathbf{x}, \mathbf{z}}$:

Algorithm 2: Generation of synthetic data for GLMs

```

1 Initialize  $\mathcal{D} \leftarrow \emptyset$ ;
2 for  $i = 1, \dots, N$  do
3   draw  $\boldsymbol{\beta}_i \sim P^\beta$ ;
4   draw  $\sigma_i^2 \sim P^{\sigma^2}$ ;
5   for  $j = 1, \dots, K$  do
6     draw  $\mathbf{u}_{i,j} \sim P^{\mathbf{u}}$ ;
7     draw  $y_{i,j} \sim p(y|g^{-1}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i), \sigma_i^2)$ ;
8   end
9   set  $\mathbf{x}^{(i)} := ((\mathbf{u}_{i,j}, y_{i,j}))_{j=1}^K$ ;
10  set  $\mathbf{z}^{(i)} := \boldsymbol{\beta}_i$ ;
11   $\mathcal{D} \leftarrow \mathcal{D} \cup \{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}$ ;
12 end

```

We consider seven different GLM scenarios by varying the structure of the prior distributions and the conditional distribution of the response (Table 5). In particular, we consider a normal $\mathcal{N}(0, 1)$ prior, a Laplace(0, 1) and a gamma $\text{Ga}(1, 1)$ prior that factorizes over the coefficients β_j contained in $\boldsymbol{\beta} = (\beta_1, \dots, \beta_p)$. In two cases we include an intercept in the model using a normal prior $\mathcal{N}(0, 9)$ with a relatively large variance. We consider regression cases with a normally distributed response $\mathcal{N}(\mathbf{u}^\top \boldsymbol{\beta}, \sigma^2)$, a Bernoulli distributed response $\text{Bin}(1, \text{sigmoid}(\mathbf{u}^\top \boldsymbol{\beta}))$, i.e. logistic regression, and a response following a gamma distribution $\text{Ga}(\sigma^{-2} \exp(\mathbf{u}^\top \boldsymbol{\beta}), \sigma^{-2} \exp(2\mathbf{u}^\top \boldsymbol{\beta}))$. In the last case, we set $\exp(\mathbf{u}^\top \boldsymbol{\beta})$ to be the mean and σ^2 to be the conditional variance of the response. An inverse gamma prior $\text{IG}(5, 2)$ is used on the variance σ^2 for each scenario except the logistic regression. We fix the number of covariates and thus also the dimensionality of $\boldsymbol{\beta}$ at $p = 5$ and set the number of data points per dataset to $K = 50$.

Table 5: Distribution of variables for the considered GLM scenarios.

Scenario	$\beta_{i,j}$	$\beta_{i,0}$	σ_i^2	$y_{i,j} (\mathbf{u}_{i,j}, \boldsymbol{\beta}_i, \beta_{0,i}, \sigma_i^2)$
Scenario 1	$\mathcal{N}(0, 1)$	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i, \sigma_i^2)$
Scenario 2	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 9)$	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i, \sigma_i^2)$
Scenario 3	Laplace(0, 1)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i, \sigma_i^2)$
Scenario 4	Laplace(0, 1)	$\mathcal{N}(0, 9)$	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i, \sigma_i^2)$
Scenario 5	Ga(1, 1)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i, \sigma_i^2)$
Scenario 6	$\mathcal{N}(0, 1)$	-	-	Bin(1, sigmoid($\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i$))
Scenario 7	$\mathcal{N}(0, 1)$	-	IG(5, 2)	Ga($\sigma_i^{-2} \exp(\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i), \sigma_i^{-2} \exp(2\mathbf{u}_{i,j}^\top \boldsymbol{\beta}_i)$)

A.2 FACTOR ANALYSIS

The goal of factor analysis is to explain data \mathbf{x} in terms of latent, typically lower-dimensional, factors \mathbf{z} (Lawley & Maxwell, 1962; Rummel, 1988). In the Bayesian setting, one assumes a prior $P^{\mathbf{z}}$ on the latent variable \mathbf{z} , a prior $P^{\mathbf{W}}$ on the factor loading matrix \mathbf{W} and additional priors P^{Ψ} and $P^{\boldsymbol{\mu}}$ on the covariance matrix and the mean vector. The conditional distribution $P^{\mathbf{z}|\mathbf{x}}$ of the data given \mathbf{z} has mean $\mathbb{E}[\mathbf{z}|\mathbf{x}] = \mathbf{W}\mathbf{z} + \boldsymbol{\mu}$ and covariance matrix $\text{Cov}[\mathbf{z}|\mathbf{x}] = \Psi$. In the case where $P^{\mathbf{z}}$ and $P^{\mathbf{z}|\mathbf{x}}$ are Gaussian, one can set $P^{\mathbf{z}} = \mathcal{N}(\mathbf{0}, I)$ and assume a diagonal covariance matrix Ψ without losing expressiveness of the model (Murphy, 2023). We make the assumption that \mathbf{W} is lower triangular with positive entries on the diagonal in order to ensure identifiability of the model (Lopes & West, 2004). Additionally, we assume that the distributions $\boldsymbol{\mu}$, Ψ and $P^{\mathbf{W}}$ fully factorize. In order to ensure that the diagonal of \mathbf{W} is positive, we consider absolute values in the generative process. Algorithm 3 details the data generating process.

Table 6 summarizes the different configurations for FA. We assume a Gaussian prior on the mean components, and an inverse gamma prior on the elements of the diagonal covariance matrix Ψ . For the factor loading matrix \mathbf{W} , independent normal and Laplace priors are investigated. Furthermore, we use a normal prior on the latent factors $\mathbf{z}^{(i)}$ in five cases and a Laplace prior in one case. We vary the number of samples K per dataset \mathbf{x} , the dimensionality P of each data point, as well as the dimensionality z_{dim} .

Algorithm 3: Generation of synthetic data for FA

```

1 Initialize  $\mathcal{D} \leftarrow \emptyset$ ;
2 for  $i = 1, \dots, N$  do
3   draw  $\boldsymbol{\mu}_i \sim P^{\boldsymbol{\mu}}$ ;
4   draw  $\Psi_i \sim P^{\Psi}$ ;
5   draw  $\mathbf{W}_i \sim P^{\mathbf{W}}$ ;
6   draw  $\mathbf{z}^{(i)} \sim P^{\mathbf{z}}$ ;
7   for  $j = 1, \dots, K$  do
8     draw  $\mathbf{x}_{i,j} \sim \mathcal{N}(\mathbf{W}_i \mathbf{z}^{(i)} + \boldsymbol{\mu}_i, \Psi_i)$ ;
9   end
10   $\mathcal{D} \leftarrow \mathcal{D} \cup \{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}$ ;
11 end

```

Table 6: Distribution and dimensionalities of variables for the considered FA scenarios.

Scenario	K	P	$\boldsymbol{\mu}_{i,j}$	$\Psi_{i,j,j}$	$\mathbf{W}_{i,j,k}$	$z_{i,j}$	z_{dim}
Scenario 1	50	3	$\mathcal{N}(0, 1)$	IG(5, 1)	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 1)$	3
Scenario 2	50	3	$\mathcal{N}(0, 0.1)$	IG(5, 1)	Laplace(0, 10)	$\mathcal{N}(0, 1)$	3
Scenario 3	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 3)$	$\mathcal{N}(0, 1)$	3
Scenario 4	25	15	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 3)$	$\mathcal{N}(0, 1)$	5
Scenario 5	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	Laplace(0, 3)	$\mathcal{N}(0, 1)$	3
Scenario 6	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 3)$	Laplace(0, 1)	3

A.3 GAUSSIAN MIXTURE MODELS

In GMMs one assumes that the data of interest is generated by a convex combination of M (multivariate) normal distributions, such that $p(\mathbf{x}|\mathbf{z}) = \sum_{m=1}^M \phi_m p_m(\mathbf{x})$, where the probability vector $\phi = (\phi_1, \dots, \phi_M)$ comprises the mixture weights and p_m denotes the m -th mixture component. We consider p_m to take the form of a diagonal Gaussian with mean vector μ_m and covariance matrix with diagonal elements σ_m^2 . We assume a prior P^ϕ on ϕ , a prior P^{σ^2} on the variances of each component and a prior $P^{\mu|\sigma^2}$ for the means that depends on the variance of the respective component. More specifically, we assume a symmetric Dirichlet prior on ϕ such that $P^\phi = \text{Dir}(\alpha_{Dir})$ and an independent inverse gamma distribution as prior on each component σ_m^2 of σ_m^2 . The prior on each component of $\mu_{i,m} \in \mathbb{R}^L$ is then given by an independent normal distribution $P^{\mu|\sigma_{i,m,l}^2} = \mathcal{N}(0, \lambda\sigma_{i,m,l}^2)$. We use $\omega_{i,j}$ to denote the assignment of datapoint j a component. Algorithm 4 details the data generating process and Table 22 summarizes the different setups regarding the prior distributions.

Algorithm 4: Generation of synthetic data for a GMM.

```

1 Initialize  $\mathcal{D} \leftarrow \emptyset$ ;
2 for  $i = 1, \dots, N$  do
3   draw  $\phi_i \sim P^\phi$ ;
4   for  $m = 1, \dots, M$  do
5     for  $l = 1, \dots, L$  do
6       draw  $\sigma_{i,m,l}^2 \sim P^{\sigma^2}$ ;
7       draw  $\mu_{i,m,l} \sim P^{\mu|\sigma_{i,m,l}^2}$ ;
8     end
9   end
10  for  $j = 1, \dots, K$  do
11    draw  $\omega_{i,j} \sim \text{Cat}(\phi_i)$ ;
12    draw  $\mathbf{x}_{i,j} \sim \mathcal{N}(\mu_{i,\omega_{i,j}}, \sigma_{i,\omega_{i,j}}^2)$ ;
13  end
14  set  $\mathbf{z}^{(i)} := \left( (\sigma_{i,m,l}^2, \mu_{i,m,l}) \right)_{m,l=1}^{M,L}$ ;
15   $\mathcal{D} \leftarrow \mathcal{D} \cup \{(\mathbf{x}^{(i)}, \mathbf{z}^{(i)})\}$ ;
16 end

```

Table 7: Distribution and dimensionalities of variables for the considered GMM scenarios.

Scenario	K	M	L	ϕ_i	$\sigma_{i,m,l}^2$	$\mu_{i,m,l} \sigma_{i,m,l}^2$
Scenario 1	50	5	1	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2	25	3	3	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 3	50	3	5	Dir(0.5)	IG(5, 2)	$\mathcal{N}(0, 5\sigma_{i,m,l}^2)$
Scenario 4	50	3	3	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$

B DETAILED EXPERIMENTAL RESULTS

B.1 GENERALIZED LINEAR MODELS

Table 8 contains detailed results regarding the performance of the proposed ICL and the reference VI approaches. In summary, we find that on the synthetic data, our ICL method has the overall best performance, or a performance not significantly³ worse than that of the best model, with respect to the C2ST metric. More specifically, ICL significantly outperforms all other models in 5 out of seven

³We refer to a difference that is larger than two standard deviations as “significant”.


972 cases w.r.t. the C2ST and also the MMD metric. While the \mathcal{W}_2 metric exhibits a larger variance, it
 973 also indicates that on the synthetic data, ICL yields the significantly best result in those 5 cases.
 974

975 On the real-world data, the differences between ICL and VI are less pronounced, and ICL attains the
 976 best average result without any other model within two standard errors in three scenarios in terms
 977 of the C2ST metric. ICL is among those models not significantly worse than the best in four cases
 978 with respect to the C2ST metric, in six cases in terms of the MMD metric, and also in six cases in
 979 terms of \mathcal{W}_2 .

980 In scenario 1, which is a linear regression scenario with a normal prior on the coefficients β and
 981 an inverse gamma prior on the variance σ^2 , ICL and HMC show a similarly large agreement with
 982 the analytical solution. Furthermore, the VI approaches with an ordinary multivariate normal dis-
 983 tribution, a structured normal distribution as well as the approach based on inverse autoregressive
 984 flows also show a large agreement with the analytical solution, which is to be expected since sce-
 985 nario 1 is has a conjugate prior structure yielding a multivariate t-distribution for the posterior of the
 986 coefficients (Murphy, 2023).

987 Scenario 2 and scenario 4 are those where an intercept is included in the generative structure of the
 988 GLM. The notably superior performance of the ICL approach in those two cases might be explained
 989 by its ability to model distributions with substantially different variances in different dimensions
 990 better than VI. Similarly, the posterior in scenario 5 is determined by the gamma prior on the coef-
 991 ficients leading to a (slightly) skewed posterior distribution, which might explain the good relative
 992 performance of ICL. See Fig. 3 for a plot of the marginals of the posterior in this scenario on the
 993 Miami housing 2016 dataset.

994 Finally, scenarios 6 and 7 demonstrate the versatility of the ICL method in terms of posterior infer-
 995 ence for logistic regression and regression with a gamma response.

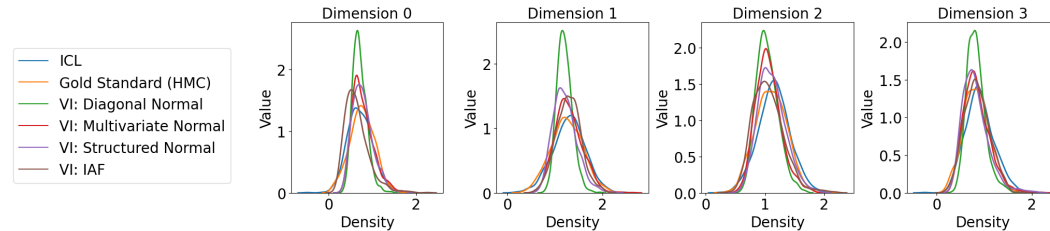

1004 Figure 3: Density plots for first three the marginals of the posterior in a GLM with a gamma prior
 1005 on the coefficients β , and an inverse gamma prior on the variance σ^2 of the responses. The data is
 1006 part of the Miami housing 2016 dataset.
 1007

1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025

Table 8: Generalized Linear Models: Evaluation on 50 synthetic and 17 real-world datasets for seven different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	Laplace Approximation	1.000 (\pm 0.000)	2.738 (\pm 0.721)	0.825 (\pm 0.279)	1.000 (\pm 0.000)	2.150 (\pm 0.323)	0.642 (\pm 0.124)
	VI: DiagonalNormal	0.904 (\pm 0.076)	1.452 (\pm 0.984)	0.669 (\pm 0.301)	0.797 (\pm 0.083)	0.612 (\pm 0.511)	0.414 (\pm 0.152)
	VI: MultivariateNormal	0.750 (\pm 0.128)	0.735 (\pm 0.733)	0.565 (\pm 0.292)	0.607 (\pm 0.070)	0.167 (\pm 0.196)	0.301 (\pm 0.123)
	VI: Structured Normal	0.753 (\pm 0.126)	0.736 (\pm 0.737)	0.570 (\pm 0.310)	0.600 (\pm 0.070)	0.169 (\pm 0.214)	0.306 (\pm 0.131)
	VI: IAF	0.777 (\pm 0.122)	0.864 (\pm 0.844)	0.725 (\pm 0.523)	0.683 (\pm 0.132)	0.440 (\pm 0.559)	0.503 (\pm 0.383)
	HMC	0.745 (\pm 0.130)	0.722 (\pm 0.732)	0.569 (\pm 0.301)	0.595 (\pm 0.075)	0.173 (\pm 0.213)	0.321 (\pm 0.140)
	ICL	0.765 (\pm 0.123)	0.767 (\pm 0.727)	0.585 (\pm 0.301)	0.614 (\pm 0.074)	0.175 (\pm 0.219)	0.310 (\pm 0.138)
Scenario 2	Laplace Approximation	1.000 (\pm 0.000)	4.853 (\pm 2.333)	5.770 (\pm 5.946)	1.000 (\pm 0.000)	2.572 (\pm 0.206)	0.809 (\pm 0.149)
	VI: DiagonalNormal	0.957 (\pm 0.091)	3.906 (\pm 2.679)	5.628 (\pm 6.092)	0.892 (\pm 0.044)	0.847 (\pm 0.389)	0.530 (\pm 0.175)
	VI: MultivariateNormal	0.910 (\pm 0.131)	3.407 (\pm 2.781)	5.584 (\pm 6.104)	0.820 (\pm 0.031)	0.243 (\pm 0.148)	0.408 (\pm 0.118)
	VI: Structured Normal	0.908 (\pm 0.119)	3.139 (\pm 2.763)	5.480 (\pm 6.164)	0.824 (\pm 0.023)	0.215 (\pm 0.110)	0.392 (\pm 0.109)
	VI: IAF	0.968 (\pm 0.063)	4.416 (\pm 2.473)	7.474 (\pm 6.235)	0.888 (\pm 0.067)	0.921 (\pm 0.860)	0.942 (\pm 0.733)
	HMC	0.839 (\pm 0.072)	0.707 (\pm 0.658)	1.111 (\pm 0.300)	0.768 (\pm 0.033)	0.143 (\pm 0.089)	0.411 (\pm 0.094)
	ICL	0.839 (\pm 0.072)	0.707 (\pm 0.658)	1.111 (\pm 0.300)	0.768 (\pm 0.033)	0.143 (\pm 0.089)	0.411 (\pm 0.094)
Scenario 3	Laplace Approximation	1.000 (\pm 0.000)	2.203 (\pm 0.997)	1.170 (\pm 0.949)	1.000 (\pm 0.000)	1.841 (\pm 0.185)	0.729 (\pm 0.175)
	VI: DiagonalNormal	0.866 (\pm 0.101)	1.069 (\pm 1.150)	0.846 (\pm 0.747)	0.797 (\pm 0.083)	0.526 (\pm 0.361)	0.480 (\pm 0.207)
	VI: MultivariateNormal	0.656 (\pm 0.131)	0.445 (\pm 1.061)	0.660 (\pm 0.737)	0.560 (\pm 0.035)	0.032 (\pm 0.028)	0.249 (\pm 0.069)
	VI: Structured Normal	0.653 (\pm 0.125)	0.421 (\pm 0.993)	0.659 (\pm 0.736)	0.552 (\pm 0.028)	0.027 (\pm 0.015)	0.239 (\pm 0.055)
	VI: IAF	0.751 (\pm 0.148)	0.939 (\pm 1.349)	0.964 (\pm 0.924)	0.673 (\pm 0.141)	0.399 (\pm 0.543)	0.563 (\pm 0.433)
	HMC	0.611 (\pm 0.070)	0.089 (\pm 0.114)	0.423 (\pm 0.348)	0.576 (\pm 0.027)	0.037 (\pm 0.026)	0.257 (\pm 0.044)
	ICL	0.611 (\pm 0.070)	0.089 (\pm 0.114)	0.423 (\pm 0.348)	0.576 (\pm 0.027)	0.037 (\pm 0.026)	0.257 (\pm 0.044)
Scenario 4	Laplace Approximation	1.000 (\pm 0.000)	3.511 (\pm 2.025)	2.166 (\pm 1.722)	1.000 (\pm 0.000)	2.011 (\pm 0.058)	0.993 (\pm 0.144)
	VI: DiagonalNormal	0.968 (\pm 0.036)	2.798 (\pm 2.255)	2.065 (\pm 1.745)	0.916 (\pm 0.040)	0.928 (\pm 0.339)	0.732 (\pm 0.181)
	VI: MultivariateNormal	0.855 (\pm 0.123)	1.648 (\pm 2.052)	1.853 (\pm 1.745)	0.771 (\pm 0.017)	0.087 (\pm 0.030)	0.539 (\pm 0.070)
	VI: Structured Normal	0.847 (\pm 0.116)	1.505 (\pm 1.978)	1.889 (\pm 1.883)	0.769 (\pm 0.012)	0.083 (\pm 0.018)	0.543 (\pm 0.070)
	VI: IAF	0.942 (\pm 0.077)	3.029 (\pm 2.210)	3.554 (\pm 2.715)	0.833 (\pm 0.069)	0.636 (\pm 0.756)	0.978 (\pm 0.600)
	HMC	0.753 (\pm 0.049)	0.171 (\pm 0.153)	0.631 (\pm 0.294)	0.762 (\pm 0.015)	0.105 (\pm 0.046)	0.597 (\pm 0.104)
	ICL	0.753 (\pm 0.049)	0.171 (\pm 0.153)	0.631 (\pm 0.294)	0.762 (\pm 0.015)	0.105 (\pm 0.046)	0.597 (\pm 0.104)
Scenario 5	Laplace Approximation	1.000 (\pm 0.000)	2.060 (\pm 0.472)	0.797 (\pm 0.577)	1.000 (\pm 0.000)	1.982 (\pm 0.126)	0.623 (\pm 0.084)
	VI: DiagonalNormal	0.866 (\pm 0.085)	0.954 (\pm 1.022)	0.651 (\pm 0.549)	0.810 (\pm 0.036)	0.441 (\pm 0.252)	0.384 (\pm 0.089)
	VI: MultivariateNormal	0.765 (\pm 0.100)	0.537 (\pm 1.019)	0.633 (\pm 1.067)	0.711 (\pm 0.038)	0.148 (\pm 0.093)	0.279 (\pm 0.056)
	VI: Structured Normal	0.758 (\pm 0.098)	0.447 (\pm 0.818)	0.572 (\pm 0.816)	0.705 (\pm 0.032)	0.140 (\pm 0.081)	0.269 (\pm 0.045)
	VI: IAF	0.814 (\pm 0.105)	0.953 (\pm 1.165)	0.881 (\pm 1.067)	0.777 (\pm 0.106)	0.684 (\pm 0.939)	0.625 (\pm 0.525)
	HMC	0.621 (\pm 0.063)	0.067 (\pm 0.080)	0.299 (\pm 0.195)	0.610 (\pm 0.045)	0.046 (\pm 0.020)	0.242 (\pm 0.038)
	ICL	0.621 (\pm 0.063)	0.067 (\pm 0.080)	0.299 (\pm 0.195)	0.610 (\pm 0.045)	0.046 (\pm 0.020)	0.242 (\pm 0.038)
Scenario 6	Laplace Approximation	1.000 (\pm 0.000)	2.026 (\pm 0.027)	1.612 (\pm 0.162)	1.000 (\pm 0.000)	1.993 (\pm 0.032)	1.299 (\pm 0.106)
	VI: DiagonalNormal	0.724 (\pm 0.060)	0.185 (\pm 0.082)	0.787 (\pm 0.078)	0.703 (\pm 0.039)	0.147 (\pm 0.063)	0.637 (\pm 0.089)
	VI: MultivariateNormal	0.534 (\pm 0.018)	0.014 (\pm 0.006)	0.581 (\pm 0.074)	0.538 (\pm 0.019)	0.016 (\pm 0.007)	0.466 (\pm 0.029)
	VI: Structured Normal	0.536 (\pm 0.016)	0.014 (\pm 0.005)	0.583 (\pm 0.071)	0.536 (\pm 0.019)	0.017 (\pm 0.009)	0.469 (\pm 0.033)
	VI: IAF	0.542 (\pm 0.026)	0.031 (\pm 0.031)	0.613 (\pm 0.092)	0.535 (\pm 0.015)	0.015 (\pm 0.006)	0.467 (\pm 0.031)
	HMC	0.532 (\pm 0.019)	0.016 (\pm 0.008)	0.590 (\pm 0.066)	0.556 (\pm 0.017)	0.035 (\pm 0.015)	0.504 (\pm 0.038)
	ICL	0.532 (\pm 0.019)	0.016 (\pm 0.008)	0.590 (\pm 0.066)	0.556 (\pm 0.017)	0.035 (\pm 0.015)	0.504 (\pm 0.038)
Scenario 7	Laplace Approximation	1.000 (\pm 0.000)	3.559 (\pm 1.933)	1.347 (\pm 1.067)	1.000 (\pm 0.000)	2.016 (\pm 0.080)	0.763 (\pm 0.174)
	VI: DiagonalNormal	0.938 (\pm 0.074)	2.536 (\pm 2.097)	1.142 (\pm 0.993)	0.936 (\pm 0.024)	1.029 (\pm 0.255)	0.579 (\pm 0.181)
	VI: MultivariateNormal	0.814 (\pm 0.181)	1.999 (\pm 2.283)	1.033 (\pm 0.969)	0.741 (\pm 0.020)	0.093 (\pm 0.025)	0.391 (\pm 0.074)
	VI: Structured Normal	0.824 (\pm 0.177)	1.891 (\pm 2.127)	1.041 (\pm 0.934)	0.734 (\pm 0.025)	0.072 (\pm 0.019)	0.385 (\pm 0.065)
	VI: IAF	0.939 (\pm 0.091)	2.707 (\pm 1.712)	1.590 (\pm 0.820)	0.864 (\pm 0.093)	0.830 (\pm 0.697)	1.064 (\pm 0.616)
	HMC	0.700 (\pm 0.116)	0.317 (\pm 0.355)	0.400 (\pm 0.286)	0.773 (\pm 0.048)	0.294 (\pm 0.457)	0.559 (\pm 0.256)
	ICL	0.700 (\pm 0.116)	0.317 (\pm 0.355)	0.400 (\pm 0.286)	0.773 (\pm 0.048)	0.294 (\pm 0.457)	0.559 (\pm 0.256)

B.2 FACTOR ANALYSIS

Table 16 contains detailed results regarding FA for 50 synthetic and 17 real-world datasets across 6 different scenarios. We find that overall the ICL method has a very high agreement with the gold standard HMC reference with scores of more than 56 percent in five scenarios on the synthetic data. In comparison, the C2ST metric is almost saturated for all considered VI methods. For MMD and \mathcal{W}_2 the ICL method is again the best.

The real-world datasets show a similar picture except for scenario 4 where C2ST and MMD indicate that VI with inverse autoregressive flows performs best. The \mathcal{W}_2 metric, however exhibits a relatively large variance in those cases and does not yield significant results regarding the best performance.

Table 9: Factor Analysis: Evaluation on 50 synthetic and 17 real-world datasets for six different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	Laplace Approximation	1.000 (\pm 0.000)	3.459 (\pm 1.553)	1.987 (\pm 1.363)	1.000 (\pm 0.000)	2.487 (\pm 0.454)	0.875 (\pm 0.036)
	VI: DiagonalNormal	1.000 (\pm 0.001)	4.695 (\pm 1.488)	2.865 (\pm 1.681)	0.979 (\pm 0.008)	1.283 (\pm 0.225)	0.625 (\pm 0.058)
	VI: MultivariateNormal	0.998 (\pm 0.003)	4.163 (\pm 1.473)	2.603 (\pm 1.959)	0.966 (\pm 0.010)	1.213 (\pm 0.260)	0.608 (\pm 0.047)
	VI: Structured Normal	0.997 (\pm 0.004)	4.655 (\pm 1.189)	2.700 (\pm 1.333)	0.979 (\pm 0.010)	1.231 (\pm 0.132)	0.611 (\pm 0.041)
	VI: IAF	0.953 (\pm 0.104)	3.992 (\pm 2.089)	2.750 (\pm 1.838)	0.849 (\pm 0.075)	0.772 (\pm 0.335)	0.503 (\pm 0.063)
	ICL	0.552 (\pm 0.028)	0.034 (\pm 0.034)	0.289 (\pm 0.083)	0.606 (\pm 0.038)	0.068 (\pm 0.069)	0.265 (\pm 0.078)
Scenario 2	Laplace Approximation	1.000 (\pm 0.000)	3.687 (\pm 1.661)	1.954 (\pm 1.129)	1.000 (\pm 0.000)	1.690 (\pm 0.182)	0.598 (\pm 0.058)
	VI: DiagonalNormal	0.998 (\pm 0.002)	3.135 (\pm 1.482)	1.629 (\pm 0.938)	0.975 (\pm 0.010)	1.156 (\pm 0.068)	0.496 (\pm 0.052)
	VI: MultivariateNormal	0.989 (\pm 0.009)	2.945 (\pm 1.019)	1.482 (\pm 0.683)	0.951 (\pm 0.025)	0.764 (\pm 0.053)	0.421 (\pm 0.052)
	VI: Structured Normal	0.984 (\pm 0.031)	3.790 (\pm 1.572)	2.106 (\pm 1.429)	0.958 (\pm 0.025)	1.001 (\pm 0.126)	0.465 (\pm 0.056)
	VI: IAF	0.966 (\pm 0.066)	3.523 (\pm 1.340)	2.153 (\pm 0.968)	0.799 (\pm 0.058)	0.462 (\pm 0.226)	0.342 (\pm 0.070)
	ICL	0.542 (\pm 0.006)	0.017 (\pm 0.006)	0.244 (\pm 0.033)	0.622 (\pm 0.032)	0.098 (\pm 0.039)	0.287 (\pm 0.046)
Scenario 3	Laplace Approximation	1.000 (\pm 0.000)	4.137 (\pm 0.932)	2.188 (\pm 1.011)	1.000 (\pm 0.000)	3.653 (\pm 0.183)	0.473 (\pm 0.026)
	VI: DiagonalNormal	0.999 (\pm 0.002)	3.339 (\pm 0.985)	1.722 (\pm 0.870)	0.951 (\pm 0.007)	1.114 (\pm 0.080)	0.245 (\pm 0.016)
	VI: MultivariateNormal	0.994 (\pm 0.007)	3.189 (\pm 0.960)	1.644 (\pm 0.859)	0.945 (\pm 0.007)	1.085 (\pm 0.082)	0.242 (\pm 0.015)
	VI: Structured Normal	0.997 (\pm 0.003)	3.159 (\pm 0.968)	1.614 (\pm 0.793)	0.942 (\pm 0.009)	1.084 (\pm 0.071)	0.242 (\pm 0.018)
	VI: IAF	0.990 (\pm 0.011)	3.145 (\pm 1.203)	1.705 (\pm 0.990)	0.928 (\pm 0.015)	1.022 (\pm 0.093)	0.235 (\pm 0.018)
	ICL	0.537 (\pm 0.023)	0.024 (\pm 0.021)	0.259 (\pm 0.088)	0.609 (\pm 0.019)	0.124 (\pm 0.037)	0.179 (\pm 0.018)
Scenario 4	Laplace Approximation	1.000 (\pm 0.000)	4.354 (\pm 0.572)	3.339 (\pm 0.932)	1.000 (\pm 0.000)	6.617 (\pm 0.259)	0.598 (\pm 0.135)
	VI: DiagonalNormal	1.000 (\pm 0.000)	3.396 (\pm 0.591)	2.420 (\pm 0.720)	0.977 (\pm 0.003)	1.499 (\pm 0.066)	0.096 (\pm 0.003)
	VI: MultivariateNormal	0.999 (\pm 0.001)	3.447 (\pm 0.567)	2.479 (\pm 0.848)	0.973 (\pm 0.008)	1.484 (\pm 0.097)	0.096 (\pm 0.005)
	VI: Structured Normal	1.000 (\pm 0.000)	3.421 (\pm 0.610)	2.481 (\pm 0.884)	0.973 (\pm 0.007)	1.474 (\pm 0.078)	0.095 (\pm 0.004)
	VI: IAF	0.999 (\pm 0.001)	3.269 (\pm 0.552)	2.307 (\pm 0.779)	0.961 (\pm 0.018)	1.337 (\pm 0.142)	0.092 (\pm 0.005)
	ICL	0.684 (\pm 0.060)	0.198 (\pm 0.141)	0.918 (\pm 0.246)	0.988 (\pm 0.003)	1.764 (\pm 0.026)	1.248 (\pm 0.008)
Scenario 5	Laplace Approximation	1.000 (\pm 0.000)	4.456 (\pm 0.785)	2.608 (\pm 0.946)	1.000 (\pm 0.000)	4.559 (\pm 0.494)	0.663 (\pm 0.127)
	VI: DiagonalNormal	0.999 (\pm 0.002)	3.520 (\pm 1.073)	2.012 (\pm 0.886)	0.944 (\pm 0.010)	1.007 (\pm 0.129)	0.261 (\pm 0.036)
	VI: MultivariateNormal	0.995 (\pm 0.007)	3.472 (\pm 1.021)	1.982 (\pm 0.814)	0.930 (\pm 0.017)	0.964 (\pm 0.111)	0.255 (\pm 0.038)
	VI: Structured Normal	0.998 (\pm 0.005)	3.369 (\pm 1.044)	1.916 (\pm 0.852)	0.934 (\pm 0.011)	0.996 (\pm 0.133)	0.259 (\pm 0.035)
	VI: IAF	0.992 (\pm 0.012)	3.166 (\pm 0.967)	1.761 (\pm 0.671)	0.910 (\pm 0.011)	0.892 (\pm 0.094)	0.247 (\pm 0.037)
	ICL	0.535 (\pm 0.016)	0.021 (\pm 0.011)	0.279 (\pm 0.060)	0.886 (\pm 0.017)	1.207 (\pm 0.101)	1.002 (\pm 0.042)
Scenario 6	Laplace Approximation	1.000 (\pm 0.000)	3.942 (\pm 0.971)	2.624 (\pm 1.682)	1.000 (\pm 0.000)	3.319 (\pm 0.196)	0.377 (\pm 0.020)
	VI: DiagonalNormal	0.998 (\pm 0.002)	3.214 (\pm 1.072)	2.209 (\pm 1.543)	0.949 (\pm 0.008)	1.196 (\pm 0.093)	0.210 (\pm 0.011)
	VI: MultivariateNormal	0.991 (\pm 0.013)	3.056 (\pm 1.237)	2.189 (\pm 1.698)	0.938 (\pm 0.009)	1.121 (\pm 0.075)	0.205 (\pm 0.012)
	VI: Structured Normal	0.997 (\pm 0.005)	3.279 (\pm 1.071)	2.276 (\pm 1.787)	0.944 (\pm 0.006)	1.161 (\pm 0.066)	0.208 (\pm 0.012)
	VI: IAF	0.989 (\pm 0.029)	3.027 (\pm 0.910)	1.936 (\pm 1.060)	0.865 (\pm 0.027)	0.822 (\pm 0.106)	0.179 (\pm 0.015)
	ICL	0.543 (\pm 0.021)	0.023 (\pm 0.015)	0.345 (\pm 0.173)	0.666 (\pm 0.020)	0.200 (\pm 0.034)	0.224 (\pm 0.014)

B.3 GAUSSIAN MIXTURE MODELS

We summarize the results of the ICL approach and the different VI methods regarding the GMM scenarios in Table 17. First, one can note that on the synthetic data, the ICL approach has a much lower C2ST score for scenario 1 and scenario 2 than the other methods. However, for scenarios 3 and 4, C2ST saturates, or at least almost saturates for all approaches. The MMD metric, however, shows that ICL not only has a high agreement with HMC in scenarios 1 and 2, but that it attains the significantly best result in scenarios 3 and 4 as well. This is supported by the \mathcal{W}_2 metric, which has the significantly lowest values for ICL in scenarios 2,3 and 4.

Analogously, on the real-world data, MMD shows that ICL is the best approach in all four scenarios without any other model coming into the two standard-deviation range. While the C2ST score is the lowest in scenario 1 and scenario 2 for ICL, it saturates for cases 3 and 4.

Table 10: Gaussian Mixture Models: Evaluation on 50 synthetic and 17 real-world datasets for six different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	Laplace Approximation	1.000 (\pm 0.000)	3.367 (\pm 1.030)	4.341 (\pm 2.018)	1.000 (\pm 0.000)	3.374 (\pm 0.941)	6.440 (\pm 1.994)
	VI: DiagonalNormal	0.988 (\pm 0.013)	1.175 (\pm 1.189)	2.961 (\pm 1.669)	0.995 (\pm 0.006)	1.919 (\pm 1.217)	5.145 (\pm 2.489)
	VI: MultivariateNormal	0.988 (\pm 0.013)	1.135 (\pm 1.149)	2.926 (\pm 1.651)	0.994 (\pm 0.007)	2.007 (\pm 1.367)	5.379 (\pm 2.845)
	VI: Structured Normal	0.987 (\pm 0.015)	1.126 (\pm 1.145)	2.944 (\pm 1.663)	0.993 (\pm 0.009)	1.943 (\pm 1.359)	5.313 (\pm 2.737)
	VI: IAF	0.989 (\pm 0.013)	1.017 (\pm 1.036)	3.104 (\pm 1.523)	0.995 (\pm 0.010)	1.888 (\pm 1.051)	5.402 (\pm 2.310)
	ICL	0.760 (\pm 0.092)	0.303 (\pm 0.548)	2.095 (\pm 1.692)	0.847 (\pm 0.082)	0.486 (\pm 0.623)	4.054 (\pm 2.782)
Scenario 2	Laplace Approximation	1.000 (\pm 0.000)	2.864 (\pm 0.607)	5.407 (\pm 2.320)	1.000 (\pm 0.000)	2.928 (\pm 0.438)	7.228 (\pm 1.323)
	VI: DiagonalNormal	0.989 (\pm 0.024)	1.425 (\pm 0.829)	4.933 (\pm 2.379)	0.998 (\pm 0.003)	1.525 (\pm 0.356)	6.091 (\pm 0.931)
	VI: MultivariateNormal	0.991 (\pm 0.021)	1.532 (\pm 0.940)	5.119 (\pm 2.521)	0.999 (\pm 0.002)	1.619 (\pm 0.269)	6.258 (\pm 0.872)
	VI: Structured Normal	0.992 (\pm 0.017)	1.487 (\pm 0.899)	5.085 (\pm 2.530)	0.999 (\pm 0.002)	1.580 (\pm 0.337)	6.241 (\pm 0.960)
	VI: IAF	0.992 (\pm 0.021)	1.319 (\pm 0.854)	5.265 (\pm 2.534)	0.998 (\pm 0.004)	1.256 (\pm 0.320)	6.201 (\pm 0.892)
	ICL	0.812 (\pm 0.061)	0.159 (\pm 0.154)	2.314 (\pm 0.926)	0.937 (\pm 0.041)	0.282 (\pm 0.131)	3.947 (\pm 1.055)
Scenario 3	Laplace Approximation	1.000 (\pm 0.000)	3.631 (\pm 1.362)	16.387 (\pm 19.604)	1.000 (\pm 0.000)	3.009 (\pm 0.768)	37.034 (\pm 7.178)
	VI: DiagonalNormal	0.996 (\pm 0.011)	2.127 (\pm 1.479)	16.864 (\pm 19.301)	0.992 (\pm 0.018)	2.429 (\pm 0.516)	35.355 (\pm 6.608)
	VI: MultivariateNormal	0.997 (\pm 0.009)	2.076 (\pm 1.388)	16.938 (\pm 19.636)	0.993 (\pm 0.016)	2.427 (\pm 0.510)	35.312 (\pm 6.655)
	VI: Structured Normal	0.995 (\pm 0.017)	2.049 (\pm 1.462)	16.723 (\pm 19.093)	0.993 (\pm 0.016)	2.301 (\pm 0.549)	34.217 (\pm 5.461)
	VI: IAF	0.994 (\pm 0.018)	1.675 (\pm 1.049)	14.311 (\pm 9.266)	0.993 (\pm 0.017)	2.148 (\pm 0.528)	34.336 (\pm 5.398)
	ICL	1.000 (\pm 0.000)	0.582 (\pm 0.280)	8.708 (\pm 4.945)	1.000 (\pm 0.000)	1.869 (\pm 0.342)	33.230 (\pm 8.095)
Scenario 4	Laplace Approximation	1.000 (\pm 0.000)	6.260 (\pm 1.427)	13.497 (\pm 29.702)	1.000 (\pm 0.000)	5.924 (\pm 1.145)	12.400 (\pm 4.313)
	VI: DiagonalNormal	1.000 (\pm 0.002)	3.958 (\pm 1.641)	12.068 (\pm 21.301)	1.000 (\pm 0.000)	3.879 (\pm 1.061)	11.080 (\pm 3.341)
	VI: MultivariateNormal	1.000 (\pm 0.002)	3.875 (\pm 1.691)	12.150 (\pm 22.198)	1.000 (\pm 0.000)	3.896 (\pm 1.057)	11.112 (\pm 3.321)
	VI: Structured Normal	1.000 (\pm 0.001)	3.661 (\pm 1.717)	12.195 (\pm 22.874)	0.996 (\pm 0.016)	3.822 (\pm 1.302)	11.368 (\pm 4.216)
	VI: IAF	1.000 (\pm 0.002)	3.536 (\pm 1.597)	12.015 (\pm 20.884)	1.000 (\pm 0.000)	3.471 (\pm 1.036)	11.421 (\pm 3.233)
	ICL	1.000 (\pm 0.000)	2.451 (\pm 0.868)	8.333 (\pm 4.202)	1.000 (\pm 0.000)	2.518 (\pm 0.694)	11.938 (\pm 2.956)

C ABLATION: USING A DIFFUSION OBJECTIVE

To validate choosing the flow matching objective with optimal transport (OT) paths resulting in the objective in equation Eq. (6), we also conduct experiments using a diffusion-objective with variance preserving paths introduced by Song et al. (2020). We choose three selected GLM, FA and GMM scenarios with the same 50 synthetic and 17 real-world datasets for each scenario as in the other benchmarks.

Table 11: GLMs: Comparison of the OT flow matching and the VP diffusion objective on 50 synthetic and 17 real-world datasets for three different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 2	Diffusion paths	0.961 (\pm 0.040)	1.525 (\pm 0.777)	3.354 (\pm 1.333)	0.961 (\pm 0.016)	1.347 (\pm 0.365)	2.025 (\pm 0.270)
	OT paths	0.839 (\pm 0.072)	0.707 (\pm 0.658)	1.111 (\pm 0.300)	0.768 (\pm 0.033)	0.143 (\pm 0.089)	0.411 (\pm 0.094)
Scenario 3	Diffusion paths	0.903 (\pm 0.111)	1.080 (\pm 0.564)	1.733 (\pm 0.408)	0.936 (\pm 0.013)	1.002 (\pm 0.203)	1.442 (\pm 0.103)
	OT paths	0.611 (\pm 0.070)	0.089 (\pm 0.114)	0.423 (\pm 0.348)	0.576 (\pm 0.027)	0.037 (\pm 0.026)	0.257 (\pm 0.044)
Scenario 5	Diffusion paths	0.691 (\pm 0.074)	0.211 (\pm 0.143)	0.708 (\pm 0.233)	0.681 (\pm 0.038)	0.182 (\pm 0.093)	0.554 (\pm 0.090)
	OT paths	0.621 (\pm 0.063)	0.067 (\pm 0.080)	0.299 (\pm 0.195)	0.610 (\pm 0.045)	0.046 (\pm 0.020)	0.242 (\pm 0.038)

In summary, the empirical results demonstrate that using the OT paths consistently outperforms the VP diffusion objective across all scenarios for both GLMs and FAs. For GLMs, OT paths achieve significantly lower C2ST values in all scenarios. In Scenario 2, OT paths reduce C2ST from 0.961

to 0.839 on synthetic data and from 0.961 to 0.768 on real-world data. Similarly, in Scenario 3, OT paths achieve substantial improvements, with C2ST dropping from 0.903 to 0.611 on synthetic data and from 0.936 to 0.576 on real-world data. This trend is complemented by consistent improvements in other metrics such as \mathcal{W}_2 , where OT paths often achieve reductions by over 50%.

Table 12: FA: Comparison of the OT flow matching and the VP diffusion objective on 50 synthetic and 17 real-world datasets for three different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold.**

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	Diffusion paths	0.622 (± 0.043)	0.207 (± 0.121)	0.692 (± 0.192)	0.595 (± 0.012)	0.089 (± 0.011)	0.475 (± 0.019)
	OT paths	0.552 (± 0.028)	0.034 (± 0.034)	0.289 (± 0.083)	0.606 (± 0.038)	0.068 (± 0.069)	0.265 (± 0.078)
Scenario 2	Diffusion paths	0.826 (± 0.036)	0.768 (± 0.238)	1.219 (± 0.276)	0.878 (± 0.028)	0.793 (± 0.154)	1.056 (± 0.084)
	OT paths	0.542 (± 0.006)	0.017 (± 0.006)	0.244 (± 0.033)	0.622 (± 0.032)	0.098 (± 0.039)	0.287 (± 0.046)
Scenario 3	Diffusion paths	0.751 (± 0.048)	0.387 (± 0.216)	0.834 (± 0.163)	0.944 (± 0.008)	1.514 (± 0.056)	1.332 (± 0.028)
	OT paths	0.537 (± 0.023)	0.024 (± 0.021)	0.259 (± 0.088)	0.609 (± 0.019)	0.124 (± 0.037)	0.179 (± 0.018)

For FA, the performance gap in C2ST remains notable. In Scenario 1, OT paths achieve the best results on synthetic data, reducing C2ST from 0.622 to 0.552, while also delivering improvements in \mathcal{W}_2 (0.289 compared to 0.692). On real-world datasets, OT paths maintain competitive results, matching or exceeding the performance of diffusion paths. The advantage is even more pronounced in Scenario 2, where OT paths consistently lead across all metrics, with a particularly striking reduction in MMD on synthetic data (0.017 compared to 0.768) and strong results for C2ST on real-world data (0.622 vs. 0.878). Similarly, in Scenario 3, OT paths achieve the lowest C2ST values, with synthetic results improving from 0.751 to 0.537 and real-world results from 0.944 to 0.609.

Table 13: GMMs: Comparison of the OT flow matching and the VP diffusion objective on 50 synthetic and 17 real-world datasets for three different scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold.**

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	Diffusion paths	0.924 (± 0.024)	0.241 (± 0.381)	2.195 (± 1.431)	0.958 (± 0.030)	0.890 (± 0.912)	5.328 (± 2.544)
	OT paths	0.760 (± 0.092)	0.303 (± 0.548)	2.095 (± 1.692)	0.847 (± 0.082)	0.486 (± 0.623)	4.054 (± 2.782)
Scenario 2	Diffusion paths	0.942 (± 0.020)	0.213 (± 0.187)	2.748 (± 0.659)	0.984 (± 0.012)	0.411 (± 0.162)	5.397 (± 1.458)
	OT paths	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)	0.937 (± 0.041)	0.282 (± 0.131)	3.947 (± 1.055)
Scenario 3	Diffusion paths	1.000 (± 0.000)	0.582 (± 0.280)	8.708 (± 4.945)	1.000 (± 0.000)	1.869 (± 0.342)	33.230 (± 8.095)
	OT paths	0.999 (± 0.001)	0.267 (± 0.154)	7.234 (± 2.974)	1.000 (± 0.000)	1.155 (± 0.258)	26.956 (± 3.114)

In the case of Gaussian Mixture Models (GMMs), the empirical results indicate that the OT paths generally outperform the VP diffusion objective across most scenarios and metrics, though the differences are not always statistically significant in pair-wise comparisons. For example, in Scenario 1, OT paths achieve notably better results for C2ST on both synthetic and real-world datasets, with reductions from 0.924 to 0.760 and from 0.958 to 0.847, respectively. Similarly, for \mathcal{W}_2 , OT paths exhibit better performance on real-world data (4.054 vs. 5.328). In Scenario 2, OT paths maintain a consistent advantage in metrics such as C2ST and \mathcal{W}_2 . For instance, synthetic data shows a C2ST improvement from 0.942 to 0.812, while real-world data improves from 0.984 to 0.937. The OT paths also achieve lower MMD on synthetic data (0.159 vs. 0.213), supporting their effectiveness in this scenario. For Scenario 3, the differences in performance between OT paths and diffusion paths are more nuanced. OT paths achieve better results for \mathcal{W}_2 on both synthetic and real-world data, reducing it from 8.708 to 7.234 and from 33.230 to 26.956, respectively.

D HYPERPARAMETERS, SOFTWARE AND COMPUTATIONAL SETUP

D.1 ICL

To ensure maximum comparability across different experiments, we fix the hyperparameters for all ICL experiments: For the architecture of the model introduced in Section 3.4, we use the following configuration: The dimensionality of encoder representations is set to 512 and is expanded to 1024 in the feed-forward blocks. We use 8 heads and 8 encoder layers with a dropout rate of 0.1. For the decoder part we also use 512 as the dimensionality of the representations and 1024 as the intermediate representation in the feed-forward layers and a dropout rate of 0.1. Furthermore, 3 simple fully connected layers with adaLN conditioning are used for final processing in the decoder. For the time conditioning, we use 3 simple fully connected layers to map the scalar-valued time t onto a 512 dimensional conditioning vector that is used for the adaLN blocks in the decoder. This yields a model of around 43.1 million parameters. We use no tokenization for either the encoder or the decoder and simple embedding layers to map the encoder- and decoder-input onto the feed-forward dimensions.

We use an Adam optimizer (Kingma, 2014) with a cosine learning rate schedule (Loshchilov & Hutter, 2016), where the maximum learning rate is $5 \cdot 10^{-4}$, the final division factor is 10^4 and 10 percent of the epochs are used for warm-up. We use a weight decay parameter of 10^{-5} and a batch size of 1024 and gradient clipping with a maximum gradient norm of one. We use in total 75 million synthetic samples for all scenarios. Of the total number, half, i.e. 37.5 million, are used for training and 10 percent for validation and the remaining 40 percent for testing. Note that we observe convergence of the loss usually much earlier than after this training duration, but fix the number of samples for consistency across experiments. A single L4 GPU is used for the GLM scenarios and a single A100 GPU for the FA and GMM cases.

To solve the ODE for the sample generation, dopri5 (Dormand & Prince, 1980) as implemented in TorchdiffEq (Chen, 2018) is used in the adjoint version. We set the relative and absolute tolerance to 10^{-7} . The σ_{min} parameter in the CNF-loss is set to 10^{-4} .




Figure 4: Learning curves for GLM scenario 1 with a Normal Prior on the coefficients β and an Inverse Gamma prior on σ_2 .




Figure 5: Learning curves for GMM scenario 1 with $M = 5$ components, $K = 50$ data-points and $L = 1$ dimensions.




Figure 6: Learning curves for GMM scenario 3 with $M = 3$ components, $K = 50$ data-points and $L = 5$ dimensions.

D.2 HMC

We use HMC with a NUTS kernel (Hoffman et al., 2014) as a reference for all experiments where no analytical solution is available. We set the number of burn-in samples to 500 and use one chain for all uni-modal problems and three times the number of potential modes in all other cases. More specifically, we use $M \times 3$ chains for all GMM scenarios. The Pyro implementation of NUTS is used for the GLM scenarios (Bingham et al., 2019) and the conceptually identical, albeit computationally faster implementation in Numpyro for the FA and GMM cases (Phan et al., 2019).

1296 D.3 VI
1297

1298 For the variational inference methods, we utilize automatic guide generation based on the ground-
 1299 truth data-generating processes (Kucukelbir et al., 2017). Pyro is used for the implementation of the
 1300 probabilistic programs, which we also use to sample the synthetic training data, for the automatic
 1301 guide generation, and for the implementation of the actual VI methods (Bingham et al., 2019).
 1302 Default hyperparameters, as well as an Adam optimizer (Kingma, 2014) with a learning rate of
 1303 10^{-2} is used for all methods except for AutoIAF where a learning rate of 10^{-3} is used. We perform
 1304 2000 full-batch gradient update steps for each method.

1305 E RUNTIMES
1306

1307
 1308 We use a single L4 GPU for generating samples based on our ICL approach and HMC in the GLM
 1309 scenarios, a single A100 for our ICL approach and HMC in the FA and GMM scenarios, and an
 1310 Intel(R) Xeon(R) CPU @ 2.20GHz CPU with two virtual cores and 40 gigabytes of RAM for the
 1311 VI methods. Across all considered GLM scenarios, pre-training takes on average 14.89 hours with
 1312 a standard error of 18.01 minutes. For the FA scenarios, on average 3.95 hours with a standard error
 1313 of 11.38 minutes is used for pretraining and for the GMM scenarios 10.63 with a standard error of
 1314 72.88 minutes.

1315 When applied in order to generate samples for a new dataset, the benchmarked VI methods have,
 1316 as expected the lowest runtime. The Laplace approximation is the fastest of all methods, while our
 1317 ICL approach has consistently a lower runtime compared to HMC. Overall, the ICL method takes
 1318 around 2 minutes on the GLM tasks, around 30 seconds in the FA scenarios and less than 2 minutes
 1319 for the inference regarding the GMM tasks.

1320 This difference is especially pronounced in the FA and GMM scenarios. Please note that the runtime
 1321 of the ICL method also fundamentally depends on the used precision for solving the underlying dif-
 1322 ferential equation where we use a relatively high relative and absolute precision of 10^{-7} . Decreasing
 1323 this value might lead to significantly faster inference time while maintaining sample quality.

1324
1325 Table 14: Runtime Metrics for all GLM, FA, and GMM Scenarios

Scenario	Method	Mean Runtime (s)
GLM	Laplace Approximation	10.48 (± 0.25)
	VI: DiagonalNormal	12.02 (± 0.26)
	VI: MultivariateNormal	13.70 (± 0.29)
	VI: Structured Normal	19.81 (± 0.98)
	VI:IAF	15.44 (± 0.30)
	HMC	120.24 (± 13.94)
	ICL	107.79 (± 17.36)
FA	Laplace Approximation	17.85 (± 0.21)
	VI: DiagonalNormal	20.94 (± 0.66)
	VI: MultivariateNormal	20.84 (± 0.28)
	VI: Structured Normal	36.17 (± 0.61)
	VI:IAF	23.75 (± 0.38)
	HMC	248.26 (± 57.88)
	ICL	31.49 (± 4.97)
GMM	Laplace Approximation	27.52 (± 0.40)
	VI: DiagonalNormal	29.74 (± 0.57)
	VI: MultivariateNormal	30.50 (± 0.41)
	VI: Structured Normal	42.44 (± 0.44)
	VI:IAF	33.39 (± 0.49)
	HMC	239.67 (± 32.71)
	ICL	93.88 (± 10.47)

1347
1348
1349

F COMPARISON TO SGLD

Besides comparing the samples from our ICL approach to samples from various VI methods, we additionally compare it against samples generated via stochastic gradient Langevin dynamics (SGLD) (Welling & Teh, 2011). We run SGLD with a learning rate of 10^{-3} for the GLM and GMM cases and a learning rate of 10^{-4} for FA and use 1000 gradient steps for warmup and partition the data into ten minibatches. We implement the preconditioning method introduced by Li et al. (2016) for more stable sampling behavior. Despite the preconditioning, SGLD consistently fails for GLMs scenario 7 because the sampler diverges causing singular covariance matrices. To facilitate running SGLD for the GMMs, which also include discrete variables, we marginalize over the discrete variables.

In summary, we find that ICL yields samples with much higher quality than SGLD compared to the gold standard HMC samples across almost all scenarios on both synthetic and real-world data. The poor sample quality with SGLD is expected given that numerous theoretical and empirical findings confirm that, while SGLD is computationally very cheap, it is substantially outperformed by, for instance, HMC, in terms of sample quality, which is especially pronounced when the posterior distributions are complex and parameters are correlated (Chen et al., 2014; Mangoubi & Vishnoi, 2019; Izmailov et al., 2021; Brosse et al., 2018).

Table 15: SGLD vs. ICL: Evaluation on 50 synthetic and 17 real-world datasets for six different GLM scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	SGLD	0.992 (± 0.015)	2.846 (± 1.411)	1.951 (± 0.917)	0.980 (± 0.013)	2.191 (± 1.183)	0.865 (± 0.438)
	ICL	0.765 (± 0.123)	0.767 (± 0.727)	0.585 (± 0.301)	0.614 (± 0.074)	0.175 (± 0.219)	0.310 (± 0.138)
Scenario 2	SGLD	0.999 (± 0.004)	5.650 (± 1.762)	8.295 (± 5.629)	0.994 (± 0.006)	2.699 (± 1.093)	1.289 (± 0.454)
	ICL	0.839 (± 0.072)	0.707 (± 0.658)	1.111 (± 0.300)	0.768 (± 0.033)	0.143 (± 0.089)	0.411 (± 0.094)
Scenario 3	SGLD	0.997 (± 0.008)	3.320 (± 1.595)	3.011 (± 1.036)	0.983 (± 0.013)	2.152 (± 1.194)	0.935 (± 0.523)
	ICL	0.611 (± 0.070)	0.089 (± 0.114)	0.423 (± 0.348)	0.576 (± 0.027)	0.037 (± 0.026)	0.257 (± 0.044)
Scenario 4	SGLD	1.000 (± 0.000)	6.626 (± 1.215)	15.674 (± 8.100)	0.994 (± 0.006)	2.927 (± 1.564)	1.606 (± 1.022)
	ICL	0.753 (± 0.049)	0.171 (± 0.153)	0.631 (± 0.294)	0.762 (± 0.015)	0.105 (± 0.046)	0.597 (± 0.104)
Scenario 5	SGLD	0.999 (± 0.003)	3.308 (± 1.728)	2.216 (± 1.247)	1.000 (± 0.000)	4.012 (± 1.413)	0.996 (± 0.406)
	ICL	0.621 (± 0.063)	0.067 (± 0.080)	0.299 (± 0.195)	0.610 (± 0.045)	0.046 (± 0.020)	0.242 (± 0.038)
Scenario 6	SGLD	0.998 (± 0.001)	2.681 (± 0.565)	2.419 (± 0.510)	0.998 (± 0.002)	2.845 (± 0.590)	1.851 (± 0.319)
	ICL	0.532 (± 0.019)	0.016 (± 0.008)	0.590 (± 0.066)	0.556 (± 0.017)	0.035 (± 0.015)	0.504 (± 0.038)

For GLMs (Table 15), ICL achieves significantly better results, with notable improvements in C2ST. In Scenario 1, synthetic C2ST drops from 0.992 to 0.765 and real-world C2ST from 0.980 to 0.614. Similarly, Scenario 3 shows substantial gains, with synthetic C2ST improving from 0.997 to 0.611 and real-world C2ST from 0.983 to 0.576. These trends extend to metrics like \mathcal{W}_2 , where ICL yields consistent reductions, such as in Scenario 2, reducing \mathcal{W}_2 from 8.295 to 1.111 on synthetic data.

Table 16: SGLD vs. ICL: Evaluation on 50 synthetic and 17 real-world datasets for six different FA scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	SGLD	0.996 (± 0.006)	2.883 (± 1.552)	1.776 (± 0.694)	0.995 (± 0.003)	2.676 (± 0.710)	1.608 (± 0.381)
	ICL	0.552 (± 0.028)	0.034 (± 0.034)	0.289 (± 0.083)	0.606 (± 0.038)	0.068 (± 0.069)	0.265 (± 0.078)
Scenario 2	SGLD	0.997 (± 0.003)	2.950 (± 0.786)	1.892 (± 0.533)	0.995 (± 0.003)	2.517 (± 0.583)	1.500 (± 0.268)
	ICL	0.542 (± 0.006)	0.017 (± 0.006)	0.244 (± 0.033)	0.622 (± 0.032)	0.098 (± 0.039)	0.287 (± 0.046)
Scenario 3	SGLD	0.998 (± 0.005)	3.662 (± 1.099)	2.086 (± 0.919)	0.956 (± 0.025)	1.580 (± 0.819)	0.311 (± 0.108)
	ICL	0.537 (± 0.023)	0.024 (± 0.021)	0.279 (± 0.088)	0.609 (± 0.019)	0.124 (± 0.037)	0.179 (± 0.018)
Scenario 4	SGLD	1.000 (± 0.000)	4.127 (± 0.635)	3.047 (± 0.972)	0.950 (± 0.021)	1.520 (± 0.512)	0.141 (± 0.031)
	ICL	0.684 (± 0.060)	0.198 (± 0.141)	0.918 (± 0.246)	0.988 (± 0.003)	1.764 (± 0.026)	1.248 (± 0.008)
Scenario 5	SGLD	0.999 (± 0.001)	3.465 (± 0.939)	1.981 (± 0.938)	0.962 (± 0.024)	1.945 (± 1.383)	0.393 (± 0.243)
	ICL	0.535 (± 0.016)	0.021 (± 0.011)	0.279 (± 0.060)	0.886 (± 0.017)	1.207 (± 0.101)	1.002 (± 0.042)
Scenario 6	SGLD	0.997 (± 0.004)	3.395 (± 1.199)	2.358 (± 1.458)	0.950 (± 0.040)	2.177 (± 1.643)	0.342 (± 0.224)
	ICL	0.543 (± 0.021)	0.023 (± 0.015)	0.345 (± 0.173)	0.666 (± 0.020)	0.200 (± 0.034)	0.224 (± 0.014)

For FA (Table 16), ICL also achieves superior performance, particularly in Scenarios 1 and 2. For example, in Scenario 1, synthetic C2ST decreases from 0.996 to 0.552, accompanied by improvements in \mathcal{W}_2 from 1.776 to 0.289. Scenario 2 sees further enhancements, with synthetic MMD dropping from 2.950 to 0.017 and real-world C2ST improving from 0.995 to 0.622.

Table 17: SGLD vs. ICL: Evaluation on 50 synthetic and 17 real-world datasets for four different GMM scenarios. All results within two standard errors of the best average result for each scenario are marked in **bold**.

Scenario	Model	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	SGLD	1.000 (± 0.001)	2.629 (± 0.868)	3.279 (± 1.330)	1.000 (± 0.000)	3.421 (± 0.877)	6.510 (± 1.763)
	ICL	0.760 (± 0.092)	0.303 (± 0.548)	2.095 (± 1.692)	0.847 (± 0.082)	0.486 (± 0.623)	4.054 (± 2.782)
Scenario 2	SGLD	1.000 (± 0.000)	3.046 (± 1.041)	6.015 (± 4.265)	1.000 (± 0.000)	2.487 (± 0.521)	6.858 (± 1.618)
	ICL	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)	0.937 (± 0.041)	0.282 (± 0.131)	3.947 (± 1.055)
Scenario 3	SGLD	1.000 (± 0.000)	4.631 (± 1.169)	23.247 (± 30.646)	1.000 (± 0.000)	2.655 (± 0.437)	26.356 (± 2.699)
	ICL	1.000 (± 0.000)	0.582 (± 0.280)	8.708 (± 4.945)	1.000 (± 0.000)	1.869 (± 0.342)	33.230 (± 8.095)
Scenario 4	SGLD	1.000 (± 0.000)	3.464 (± 1.098)	6.995 (± 5.554)	1.000 (± 0.000)	2.555 (± 0.494)	9.477 (± 3.432)
	ICL	1.000 (± 0.000)	2.451 (± 0.868)	8.333 (± 4.202)	1.000 (± 0.000)	2.518 (± 0.694)	11.938 (± 2.956)

For GMMs (Table 17), ICL demonstrates a clear advantage in most scenarios. In Scenario 1, ICL reduces synthetic C2ST from 1.000 to 0.760 and real-world \mathcal{W}_2 from 6.510 to 4.054. Scenario 2 shows synthetic C2ST improving from 1.000 to 0.812, and MMD from 3.046 to 0.159. While in scenarios 3, ICL has a significantly lower MMD score on the synthetic data, the other differences are not significant.

G ROBUSTNESS TO OUT-OF-DISTRIBUTION DATA

To investigate how our ICL approach behaves under mismatches between the distribution of synthetic training data and the data used to infer the posterior, we conduct an ablation study by changing aspects of the distribution of training and testing data.

In summary, the results in Tables 19, 21 and 23 show that our ICL approach is, in most cases, capable of robustly generalizing beyond its specific pre-training distribution when various aspects of this distribution are changed. While the performance sometimes decreases when a mismatch between training and testing data occurs, the drops in performance are almost always modest and, in many cases, almost negligible.

G.1 GLM SCENARIOS

For scenario 2, we change the variance of the prior on the covariates from a value of $\mathbb{V}(\beta_{i,j}) = 1$ to $\mathbb{V}(\beta_{i,j}) = 2$ for scenario 2.B and $\mathbb{V}(\beta_{i,j}) = 4$ for scenario 2.C. In scenarios 2.D and 2.E we change the scale parameter of the prior on the variance σ^2 of the noise—thereby changing its mean from $\mathbb{E}[\sigma^2] = 0.5$ to a value of $\mathbb{E}[\sigma^2] \approx 0.7071$ for 2.D and $\mathbb{E}[\sigma^2] = 1$ for 2.E. The variance is changed from $\mathbb{V}[\sigma^2] \approx 0.0833$ to $\mathbb{V}[\sigma^2] \approx 0.1667$ and $\mathbb{V}[\sigma^2] \approx 0.333$.

For scenarios 3.B and 3.C, the variance of the coefficients is doubled from scenario 3 to scenario 3.B and from 3.B to 3.C again, analogously to scenarios 2.B and 2.C.0

For scenario 5, the rate parameter of the gamma distribution is changed. This leads to a decrease in the variance from $\mathbb{V}(\beta_{i,j}) = 1$ to $\mathbb{V}(\beta_{i,j}) = 0.5$ for scenario 5.B and $\mathbb{V}(\beta_{i,j}) = 0.25$ for scenario 5.C. Notably, we also change the mean in the distribution of the covariates from mean from $\mathbb{E}[\beta_{i,j}] = 1$ to a value of $\mathbb{E}[\beta_{i,j}] \approx 0.7071$ for 2.D and $\mathbb{E}[\beta_{i,j}] = 0.5$ for 2.E.

Table 18 shows that our ICL approach only exhibits modest degradation in performance when the variance of the coefficients is doubled or quadruple while the mean stays the same (Scenarios 2.B, 2.C and 3.B, 3.C). Increasing the variance of the noise term by a factor of two only has a small effect while multiplying it by four causes a drop in C2ST by 9.3%. However, decreasing the variance of the gamma prior in scenario 5, combined with decreasing the mean, leads to a notable drop in performance across all metrics.

Table 18: Distribution of variables for the OOD analysis on GLM scenarios.

Scenario	$\beta_{i,j}$	$\beta_{i,0}$	σ_i^2	$y_{i,j} (\mathbf{u}_{i,j}, \beta_i, \beta_{0,i}, \sigma_i^2)$
Scenario 2	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 9)$	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 2.B	$\mathcal{N}(0, 2)$	$\mathcal{N}(0, 9)$	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 2.C	$\mathcal{N}(0, 4)$	$\mathcal{N}(0, 9)$	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 2.D	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 9)$	IG(5, $2\sqrt{2}$)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 2.E	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 9)$	IG(5, 4)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 3	Laplace(0, 1)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 3.B	Laplace(0, $\sqrt{2}$)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 3.C	Laplace(0, 2)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 5	Ga(1, 1)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 5.B	Ga(1, $\sqrt{2}$)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$
Scenario 5.C	Ga(1, 2)	-	IG(5, 2)	$\mathcal{N}(\mathbf{u}_{i,j}^\top \beta_i, \sigma_i^2)$

Table 19: OOD Performance: Evaluation on 50 synthetic datasets for 8 different GLM scenarios. All results within two standard errors of the non-OOD result for each scenario are marked in **bold**.

Scenario	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 2	0.839 (± 0.072)	0.707 (± 0.658)	1.111 (± 0.300)
Scenario 2.B	0.809 (± 0.055)	0.410 (± 0.095)	2.250 (± 0.916)
Scenario 2.C	0.857 (± 0.105)	0.634 (± 0.318)	3.067 (± 1.759)
Scenario 2	0.839 (± 0.072)	0.707 (± 0.658)	1.111 (± 0.300)
Scenario 2.D	0.840 (± 0.109)	0.916 (± 1.123)	4.007 (± 3.261)
Scenario 2.E	0.932 (± 0.120)	1.556 (± 1.127)	4.850 (± 2.261)
Scenario 3	0.611 (± 0.070)	0.089 (± 0.114)	0.423 (± 0.348)
Scenario 3.B	0.667 (± 0.080)	0.210 (± 0.117)	1.172 (± 0.258)
Scenario 3.C	0.720 (± 0.108)	0.362 (± 0.248)	1.891 (± 0.678)
Scenario 5	0.621 (± 0.063)	0.067 (± 0.080)	0.299 (± 0.195)
Scenario 5.B	0.831 (± 0.121)	0.479 (± 0.200)	1.762 (± 0.541)
Scenario 5.C	0.920 (± 0.064)	0.753 (± 0.424)	3.159 (± 1.254)

G.2 FA SCENARIOS

To construct the mismatch between training and test distribution, we vary the variance of the factor loading $W_{i,j,k}$ for scenarios 1, 2 and 3. Concretely, the variance is doubled and quadrupled.

Table 20: Distribution of variables for the OOD analysis on the FA scenarios.

Scenario	K	P	$\mu_{i,j}$	$\Psi_{i,j,j}$	$W_{i,j,k}$	$z_{i,j}$	z_{dim}
Scenario 1	50	3	$\mathcal{N}(0, 1)$	IG(5, 1)	$\mathcal{N}(0, 1)$	$\mathcal{N}(0, 1)$	3
Scenario 1.B	50	3	$\mathcal{N}(0, 1)$	IG(5, 1)	$\mathcal{N}(0, 2)$	$\mathcal{N}(0, 1)$	3
Scenario 1.C	50	3	$\mathcal{N}(0, 1)$	IG(5, 1)	$\mathcal{N}(0, 4)$	$\mathcal{N}(0, 1)$	3
Scenario 2	50	3	$\mathcal{N}(0, 0.1)$	IG(5, 1)	Laplace(0, 10)	$\mathcal{N}(0, 1)$	3
Scenario 2.B	50	3	$\mathcal{N}(0, 0.1)$	IG(5, 1)	Laplace(0, $10 \cdot \sqrt{2}$)	$\mathcal{N}(0, 1)$	3
Scenario 2.C	50	3	$\mathcal{N}(0, 0.1)$	IG(5, 1)	Laplace(0, 20)	$\mathcal{N}(0, 1)$	3
Scenario 3	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 3)$	$\mathcal{N}(0, 1)$	3
Scenario 3	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 3 \cdot \sqrt{2})$	$\mathcal{N}(0, 1)$	3
Scenario 3	25	5	$\mathcal{N}(0, 0.1)$	IG(5, 2)	$\mathcal{N}(0, 6)$	$\mathcal{N}(0, 1)$	3

For the FA cases (refer to Table 21), there is a notable drop in performance in the first scenario when OOD data is used. Please note that even in the most misspecified scenario (1.C), the performance, as measured in C2ST is still around ten percent better than the best VI method in this scenario

Table 21: OOD Performance: Evaluation on 50 synthetic datasets for 6 different FA scenarios. All results within two standard errors of the non-OOD result for each scenario are marked in **bold**.

Scenario	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	0.552 (± 0.028)	0.034 (± 0.034)	0.289 (± 0.083)
Scenario 1.B	0.826 (± 0.066)	0.656 (± 0.384)	0.929 (± 0.321)
Scenario 1.C	0.855 (± 0.060)	0.837 (± 0.494)	1.135 (± 0.461)
Scenario 2	0.542 (± 0.006)	0.017 (± 0.006)	0.244 (± 0.033)
Scenario 2.B	0.580 (± 0.069)	0.087 (± 0.191)	0.393 (± 0.291)
Scenario 2.C	0.589 (± 0.076)	0.089 (± 0.113)	0.446 (± 0.233)
Scenario 3	0.537 (± 0.023)	0.024 (± 0.021)	0.259 (± 0.088)
Scenario 3.B	0.544 (± 0.028)	0.030 (± 0.021)	0.285 (± 0.094)
Scenario 3.C	0.533 (± 0.025)	0.021 (± 0.015)	0.347 (± 0.152)

(Table 16). While the absolute difference between performance on the training distribution and the test distribution is very small for scenarios 2 and 3, the difference is still not within two standard errors of the non-OOD performance because the standard error itself is quite small. The performance on the OOD data is still better than all other VI methods (see Table 3).

G.3 GMM SCENARIOS

To generate several distinct OOD scenarios based on the generative processes of GMMs, we vary scenario 2 in various ways. Note that the structure of the distributions is the same for all GMM scenarios—focusing on this specific scenario thus makes sense when considering OOD generalization. First, in scenario 2.B, we decrease the symmetric parameter of the Dirichlet prior on the assignments from 1 to 0.5 causing larger discrepancy in the number of points per cluster. In scenario 2.C we make the opposite change.

In scenarios 2.D and 2.E we first double and then quadruple the variance of the prior on the per-component variances $\sigma_{i,m,l}$. Finally, in scenarios 2.F and 2.G, the prior on the mean is made more dispersed compared to the training data.

Table 22: Distribution for the OOD analysis of the GMM scenarios.

Scenario	K	M	L	ϕ_i	$\sigma_{i,m,l}^2$	$\mu_{i,m,l} \sigma_{i,m,l}^2$
Scenario 2	25	3	3	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2.B	25	3	3	Dir(0.5)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2.C	25	3	3	Dir(2)	IG(5, 2)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2.D	25	3	3	Dir(1)	IG(5, $2 \cdot \sqrt{2}$)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2.E	25	3	3	Dir(1)	IG(5, 4)	$\mathcal{N}(0, 3\sigma_{i,m,l}^2)$
Scenario 2.F	25	3	3	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 4\sigma_{i,m,l}^2)$
Scenario 2.G	25	3	3	Dir(1)	IG(5, 2)	$\mathcal{N}(0, 5\sigma_{i,m,l}^2)$

On the GMM scenarios (Table 23), the sample quality obtained via ICL is surprisingly stable under various changes to the data-generating process. It is relatively unsurprising that changing the Dirichlet prior, i.e., making the cluster more or less uniform in their number of samples, might lead to cases the ICL method can generalize to relatively easily, as demonstrated in scenarios 2.B and 2.C. The most pronounced drop in performance results from increasing the variance of the prior on the standard deviation of the components of the mixture model (scenario 2.E), while increasing the variance of the mean vector relative to the standard deviation of the components has a less pronounced effect.

Table 23: OOD Performance: Evaluation on 50 synthetic datasets for 6 different GMM scenarios. All results within two standard errors of the non-OOD result for each scenario are marked in **bold**.

Scenario	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 2	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)
Scenario 2.B	0.829 (± 0.050)	0.233 (± 0.161)	2.595 (± 0.998)
Scenario 2.C	0.816 (± 0.057)	0.149 (± 0.135)	2.272 (± 0.654)
Scenario 2	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)
Scenario 2.D	0.812 (± 0.076)	0.148 (± 0.091)	2.557 (± 0.837)
Scenario 2.E	0.880 (± 0.057)	0.231 (± 0.109)	3.535 (± 1.003)
Scenario 2	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)
Scenario 2.F	0.821 (± 0.076)	0.216 (± 0.214)	2.700 (± 1.044)
Scenario 2.G	0.844 (± 0.046)	0.197 (± 0.124)	2.675 (± 0.552)

H ABLATION: USING AN MLP-BASED ENCODER

To further justify choosing a transformer encoder in our ICL approach, we conduct an ablation study comparing the performance of our original ICL method with the performance obtained when the transformer encoder is replaced by an MLP with batch normalization (Ioffe, 2015) and skip-connections. To ensure a fair comparison, we use an MLP encoder with a hidden dimension of 1250 to give the overall model approximately the same number of parameters as in the transformer-based approach. Concretely, our MLP-approach has 43.3 million parameters compared to 43.1 million parameters with the transformer encoder. We choose three selected GLM, FA and GMM scenarios with 50 synthetic and 17 real-world datasets for each scenario.

In summary, we find that the transformer encoder yields consistently better results than the MLP encoder across all scenarios. While the difference is especially pronounced for the GLM scenarios, the difference becomes smaller for FA and GMMs.

Table 24: GLMs: Comparison when using an MLP-based encoder and a transformer encoder on 50 synthetic and 17 real-world datasets for three different scenarios.

Scenario	Type of Encoder	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 2	MLP	0.942 (± 0.093)	1.783 (± 1.048)	2.503 (± 0.814)	0.968 (± 0.012)	1.528 (± 0.394)	2.271 (± 0.315)
	Transformer	0.839 (± 0.072)	0.707 (± 0.658)	1.111 (± 0.300)	0.768 (± 0.033)	0.143 (± 0.089)	0.411 (± 0.094)
Scenario 3	MLP	0.957 (± 0.075)	2.236 (± 1.218)	2.681 (± 1.130)	0.972 (± 0.012)	1.658 (± 0.450)	2.076 (± 0.427)
	Transformer	0.611 (± 0.070)	0.089 (± 0.114)	0.423 (± 0.348)	0.576 (± 0.027)	0.037 (± 0.026)	0.257 (± 0.044)
Scenario 5	MLP	0.845 (± 0.115)	1.066 (± 0.859)	1.166 (± 0.996)	0.890 (± 0.055)	1.223 (± 0.791)	1.102 (± 0.383)
	Transformer	0.621 (± 0.063)	0.067 (± 0.080)	0.299 (± 0.195)	0.610 (± 0.045)	0.046 (± 0.020)	0.242 (± 0.038)

In Table 24, the transformer encoder consistently outperforms the MLP encoder across all metrics and scenarios. In Scenario 2, C2ST drops from 0.942 (MLP) to 0.839 (Transformer) on synthetic data and from 0.968 to 0.768 on real-world data. Similarly, \mathcal{W}_2 improves significantly, decreasing from 2.503 to 1.111 on synthetic data and from 2.271 to 0.411 on real-world data. In Scenario 3, transformers achieve substantial improvements, reducing C2ST from 0.957 (MLP) to 0.611 on synthetic data and from 0.972 to 0.576 on real-world data. \mathcal{W}_2 also sees notable reductions, dropping from 2.681 to 0.423 on synthetic data and from 2.076 to 0.257 on real-world data. Finally, in Scenario 5, transformers maintain their superiority, achieving reductions in C2ST from 0.845 (MLP) to 0.621 on synthetic data and from 0.890 to 0.610 on real-world data. Improvements in \mathcal{W}_2 are similarly remarkable, with reductions from 1.166 to 0.299 on synthetic data and from 1.102 to 0.242 on real-world data.

For the factor analysis cases (Table 25), the transformer encoder still has better average performances even though the differences are substantially less pronounced than for the GLMs. In Scenario 1, transformers slightly outperform MLPs, reducing C2ST from 0.579 to 0.552 on synthetic data and from 0.634 to 0.606 on real-world data. \mathcal{W}_2 also sees moderate improvements, dropping from 0.364 to 0.289 on synthetic data and from 0.331 to 0.265 on real-world data. In Scenario 2, the advantage of the transformer encoder remains consistent, with C2ST decreasing from 0.562 (MLP) to 0.542

Table 25: FA: Comparison when using an MLP-based encoder and a transformer encoder on 50 synthetic and 17 real-world datasets for three different scenarios.

Scenario	Type of Encoder	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	MLP	0.579 (± 0.015)	0.017 (± 0.006)	0.364 (± 0.029)	0.634 (± 0.014)	0.013 (± 0.004)	0.331 (± 0.010)
	Transformer	0.552 (± 0.028)	0.034 (± 0.034)	0.289 (± 0.083)	0.606 (± 0.038)	0.068 (± 0.069)	0.265 (± 0.078)
Scenario 2	MLP	0.562 (± 0.038)	0.037 (± 0.042)	0.308 (± 0.097)	0.632 (± 0.068)	0.182 (± 0.407)	0.339 (± 0.174)
	Transformer	0.542 (± 0.006)	0.017 (± 0.006)	0.244 (± 0.033)	0.622 (± 0.032)	0.098 (± 0.039)	0.287 (± 0.046)
Scenario 3	MLP	0.539 (± 0.025)	0.023 (± 0.022)	0.278 (± 0.116)	0.680 (± 0.019)	0.268 (± 0.044)	0.253 (± 0.017)
	Transformer	0.537 (± 0.023)	0.024 (± 0.021)	0.259 (± 0.088)	0.609 (± 0.019)	0.124 (± 0.037)	0.179 (± 0.018)

on synthetic data and from 0.632 to 0.622 on real-world data. \mathcal{W}_2 also improves slightly, dropping from 0.308 to 0.244 on synthetic data and from 0.339 to 0.287 on real-world data. Scenario 3 shows the smallest differences, where transformers marginally improve C2ST from 0.539 (MLP) to 0.537 on synthetic data and from 0.680 to 0.609 on real-world data. For \mathcal{W}_2 , the reductions are minor but consistent, dropping from 0.278 to 0.259 on synthetic data and from 0.253 to 0.179 on real-world data.

Table 26: GMMs: Comparison when using an MLP-based encoder and a transformer encoder on 50 synthetic and 17 real-world datasets for three different scenarios.

Scenario	Type of Encoder	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Scenario 1	MLP	0.873 (± 0.045)	0.242 (± 0.363)	2.203 (± 1.098)	0.917 (± 0.067)	0.891 (± 1.150)	4.528 (± 2.701)
	Transformer	0.760 (± 0.092)	0.303 (± 0.548)	2.095 (± 1.692)	0.847 (± 0.082)	0.486 (± 0.623)	4.054 (± 2.782)
Scenario 2	MLP	0.921 (± 0.035)	0.291 (± 0.205)	2.870 (± 0.710)	0.992 (± 0.005)	0.399 (± 0.127)	5.505 (± 1.144)
	Transformer	0.812 (± 0.061)	0.159 (± 0.154)	2.314 (± 0.926)	0.937 (± 0.041)	0.282 (± 0.131)	3.947 (± 1.055)
Scenario 3	MLP	0.999 (± 0.000)	0.438 (± 0.181)	11.502 (± 9.719)	1.000 (± 0.000)	1.001 (± 0.149)	26.282 (± 3.731)
	Transformer	0.999 (± 0.001)	0.267 (± 0.154)	7.234 (± 2.974)	1.000 (± 0.000)	1.155 (± 0.258)	26.956 (± 3.114)

For the Gaussian Mixture Models (GMMs), the results indicate a more mixed performance where the transformer still performs slightly better (Table 26): In Scenario 1, transformer encoders slightly outperform MLPs on synthetic data, with C2ST improving from 0.873 (MLP) to 0.760 and \mathcal{W}_2 decreasing slightly from 2.203 to 2.095. However, on real-world data, MLPs perform marginally better in terms of MMD, reducing it from 0.486 to 0.242, while transformers show minor improvements in \mathcal{W}_2 from 4.528 to 4.054. In Scenario 2, transformers show a more noticeable advantage. On synthetic data, C2ST improves from 0.921 (MLP) to 0.812, and \mathcal{W}_2 decreases significantly from 2.870 to 2.314. On real-world data, transformers reduce C2ST from 0.992 to 0.937 and MMD from 0.399 to 0.282, along with a considerable improvement in \mathcal{W}_2 from 5.505 to 3.947. In Scenario 3, the differences between the two encoders are relatively small but still favor the transformers on synthetic data, with \mathcal{W}_2 decreasing from 11.502 (MLP) to 7.234. For real-world data, the results are nearly identical for C2ST (1.000 for both) but show a slight increase in \mathcal{W}_2 for the transformer from 26.282 to 26.956. Overall, for the GMMs, the transformer encoders demonstrate consistent improvements across scenarios for synthetic data, particularly in Scenarios 1 and 2. However, for real-world data, the performance differences are less pronounced.

I ABLATION: DIFFERENT LEARNING RATES FOR VI

To investigate the role of the learning rate parameter for the benchmarked VI methods, we record the performance for learning-rate values of 10^{-2} , 10^{-3} and 10^{-4} across a prototypical GLM, a FA and a GMM scenario, where we use 10 synthetic and 10 real-world datasets. In summary, while we find the VI methods to often be quite robust to the choice of the learning rate, those results also confirm our choice of setting the learning rate to 10^{-2} for the Laplace approximation, variational inference with a diagonal normal distribution, a multivariate normal distribution and a structured normal distribution, and to a value of 10^{-3} for the VI approach with inverse autoregressive flows.

For the GLM-scenario, we find in terms of the C2ST metric that VI with an ordinary multivariate normal distribution and VI with a structured normal distribution and a learning rate of 10^{-2} are the best models on the synthetic data. While MMD also indicates that this learning rate yields ideal results for those models, VI with inverse autoregressive flows has good values across the different learning rates with the minimum for 10^{-3} . The \mathcal{W}_2 metric indicates a similar tendency.

Table 27: Results of VI methods with different learning rates on 10 synthetic and 10 real-world datasets: Linear regression with a normal prior on the coefficients β and an inverse gamma prior on the variance σ^2 (scenario 1). Comparison to HMC samples. All results within two standard errors of the best average result are marked in **bold**.

Model	LR	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1e-2	1.000 (\pm 0.000)	2.342 (\pm 0.390)	2.121 (\pm 0.100)	1.000 (\pm 0.000)	2.134 (\pm 0.107)	2.095 (\pm 0.062)
Laplace Approximation	1e-3	1.000 (\pm 0.000)	2.341 (\pm 0.389)	2.121 (\pm 0.100)	1.000 (\pm 0.000)	2.133 (\pm 0.108)	2.095 (\pm 0.062)
Laplace Approximation	1e-4	1.000 (\pm 0.000)	2.341 (\pm 0.389)	2.121 (\pm 0.100)	1.000 (\pm 0.000)	2.133 (\pm 0.108)	2.095 (\pm 0.062)
VI: DiagonalNormal	1e-2	0.892 (\pm 0.074)	0.921 (\pm 0.374)	1.411 (\pm 0.174)	0.889 (\pm 0.062)	0.819 (\pm 0.343)	1.339 (\pm 0.190)
VI: DiagonalNormal	1e-3	0.966 (\pm 0.024)	1.588 (\pm 0.540)	1.672 (\pm 0.203)	0.981 (\pm 0.017)	1.685 (\pm 0.331)	1.739 (\pm 0.139)
VI: DiagonalNormal	1e-4	0.971 (\pm 0.010)	1.572 (\pm 0.300)	1.666 (\pm 0.081)	0.849 (\pm 0.030)	0.575 (\pm 0.127)	1.221 (\pm 0.098)
VI: MultivariateNormal	1e-2	0.725 (\pm 0.064)	0.523 (\pm 0.242)	1.114 (\pm 0.261)	0.625 (\pm 0.051)	0.470 (\pm 0.066)	0.918 (\pm 0.119)
VI: MultivariateNormal	1e-3	0.964 (\pm 0.008)	1.455 (\pm 0.327)	1.617 (\pm 0.100)	0.853 (\pm 0.052)	0.634 (\pm 0.266)	1.238 (\pm 0.151)
VI: MultivariateNormal	1e-4	0.984 (\pm 0.005)	1.848 (\pm 0.324)	1.773 (\pm 0.079)	0.899 (\pm 0.020)	0.807 (\pm 0.094)	1.345 (\pm 0.079)
VI: Structured Normal	1e-2	0.734 (\pm 0.063)	0.541 (\pm 0.254)	1.119 (\pm 0.264)	0.670 (\pm 0.047)	0.467 (\pm 0.086)	1.060 (\pm 0.130)
VI: Structured Normal	1e-3	0.882 (\pm 0.042)	0.719 (\pm 0.315)	1.335 (\pm 0.149)	0.776 (\pm 0.045)	0.473 (\pm 0.081)	1.064 (\pm 0.131)
VI: Structured Normal	1e-4	0.890 (\pm 0.027)	0.710 (\pm 0.290)	1.347 (\pm 0.138)	0.771 (\pm 0.049)	0.468 (\pm 0.078)	1.062 (\pm 0.128)
VI: IAF	1e-2	0.840 (\pm 0.036)	0.502 (\pm 0.262)	1.272 (\pm 0.170)	0.614 (\pm 0.045)	0.455 (\pm 0.048)	0.957 (\pm 0.105)
VI: IAF	1e-3	0.797 (\pm 0.065)	0.485 (\pm 0.556)	1.169 (\pm 0.313)	0.619 (\pm 0.036)	0.469 (\pm 0.064)	0.989 (\pm 0.124)
VI: IAF	1e-4	0.803 (\pm 0.068)	0.475 (\pm 0.535)	1.162 (\pm 0.291)	0.612 (\pm 0.034)	0.457 (\pm 0.055)	0.977 (\pm 0.113)

Regarding the learning rate for the FA scenario, one can first see that no single learning rate seems to dominate substantially given the variance of the results. However, on the synthetic data for the Laplace approximation, as well as VI with a diagonal normal distribution, a multivariate normal and a structured normal distribution, the lowest average result is obtained for a learning rate of 10^{-2} , while for VI with inverse autoregressive flows the best performance is obtained when the learning rate equals 10^{-3} . The real-world results are the best for VI with a structured normal distribution and a learning rate of 10^{-2} .

For the GMM scenario, we find that VI with a diagonal, structured and ordinary normal distribution obtain the best results, namely for learning rates of 10^{-2} and 10^{-3} , taking the variance into account. Just considering the averages leads to the conclusion that 10^{-2} is the best choice here. The results on the real-world data confirm that 10^{-2} is the optimal choice for VI with a diagonal normal and ordinary multivariate normal, while VI with inverse autoregressive flows has good results across all choices regarding the learning rate.

Table 28: Results of VI methods with different learning rates on 10 synthetic and 10 real-world datasets: Factor analysis with Gaussian priors on the weights and the latents and $K = 25$ datapoints, $P = 5$ features, and dimensionality of the latents $\mathbf{z}_{dim} = 3$ (scenario 3). Comparison to HMC samples. All results within two standard errors of the best average result are marked in **bold**.

Model	LR	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1e-2	1.000 (\pm 0.000)	3.449 (\pm 0.821)	1.773 (\pm 0.539)	1.000 (\pm 0.000)	2.703 (\pm 0.312)	0.362 (\pm 0.017)
Laplace Approximation	1e-3	1.000 (\pm 0.000)	4.288 (\pm 0.853)	2.263 (\pm 0.732)	1.000 (\pm 0.000)	2.896 (\pm 0.238)	0.376 (\pm 0.022)
Laplace Approximation	1e-4	1.000 (\pm 0.000)	4.252 (\pm 0.611)	2.122 (\pm 0.430)	1.000 (\pm 0.000)	2.805 (\pm 0.181)	0.368 (\pm 0.017)
VI: DiagonalNormal	1e-2	0.998 (\pm 0.002)	2.880 (\pm 1.046)	1.457 (\pm 0.559)	0.944 (\pm 0.008)	1.022 (\pm 0.067)	0.230 (\pm 0.010)
VI: DiagonalNormal	1e-3	0.998 (\pm 0.002)	2.973 (\pm 0.834)	1.465 (\pm 0.540)	0.941 (\pm 0.006)	0.997 (\pm 0.056)	0.229 (\pm 0.010)
VI: DiagonalNormal	1e-4	1.000 (\pm 0.001)	3.416 (\pm 0.761)	1.602 (\pm 0.437)	0.943 (\pm 0.009)	0.997 (\pm 0.057)	0.229 (\pm 0.010)
VI: MultivariateNormal	1e-2	0.993 (\pm 0.007)	2.969 (\pm 1.089)	1.506 (\pm 0.659)	0.929 (\pm 0.007)	0.957 (\pm 0.048)	0.224 (\pm 0.010)
VI: MultivariateNormal	1e-3	0.996 (\pm 0.004)	3.140 (\pm 0.910)	1.570 (\pm 0.625)	0.934 (\pm 0.009)	0.971 (\pm 0.054)	0.225 (\pm 0.010)
VI: MultivariateNormal	1e-4	0.997 (\pm 0.007)	3.464 (\pm 0.791)	1.639 (\pm 0.426)	0.934 (\pm 0.005)	0.962 (\pm 0.049)	0.225 (\pm 0.010)
VI: Structured Normal	1e-2	0.998 (\pm 0.002)	3.005 (\pm 0.871)	1.481 (\pm 0.504)	0.947 (\pm 0.005)	1.003 (\pm 0.066)	0.230 (\pm 0.009)
VI: Structured Normal	1e-3	0.999 (\pm 0.001)	3.244 (\pm 0.665)	1.619 (\pm 0.559)	0.948 (\pm 0.007)	1.033 (\pm 0.078)	0.232 (\pm 0.009)
VI: Structured Normal	1e-4	0.999 (\pm 0.001)	3.119 (\pm 0.612)	1.487 (\pm 0.400)	0.943 (\pm 0.007)	0.998 (\pm 0.056)	0.229 (\pm 0.010)
VI: IAF	1e-2	0.939 (\pm 0.040)	2.836 (\pm 0.293)	1.247 (\pm 0.297)	0.944 (\pm 0.008)	1.518 (\pm 0.048)	1.332 (\pm 0.027)
VI: IAF	1e-3	0.927 (\pm 0.047)	2.758 (\pm 0.342)	1.195 (\pm 0.331)	0.949 (\pm 0.009)	1.560 (\pm 0.031)	1.392 (\pm 0.024)
VI: IAF	1e-4	0.842 (\pm 0.038)	2.862 (\pm 0.296)	1.281 (\pm 0.292)	0.943 (\pm 0.008)	1.493 (\pm 0.039)	1.302 (\pm 0.039)

Table 29: Results of VI methods with different learning rates on 10 synthetic and 10 real-world datasets: Gaussian Mixture Model with $K = 50$ datapoints, $L = 1$ features (univariate case), $M = 5$ components, $\lambda = 3$, and $\alpha_{dir} = 1$ (scenario 1). Comparison to HMC samples. All results within two standard errors of the best average result are marked in **bold**.

Model	LR	Synthetic Evaluation			Real-World Evaluation		
		C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)	C2ST (\downarrow)	MMD (\downarrow)	\mathcal{W}_2 (\downarrow)
Laplace Approximation	1e-2	1.000 (\pm 0.000)	4.380 (\pm 1.386)	4.838 (\pm 1.521)	1.000 (\pm 0.000)	4.588 (\pm 1.229)	6.813 (\pm 1.697)
Laplace Approximation	1e-3	1.000 (\pm 0.000)	3.893 (\pm 1.433)	4.010 (\pm 1.233)	1.000 (\pm 0.000)	4.699 (\pm 1.193)	6.986 (\pm 0.981)
Laplace Approximation	1e-4	1.000 (\pm 0.000)	4.463 (\pm 1.117)	4.610 (\pm 1.027)	1.000 (\pm 0.000)	4.710 (\pm 1.205)	6.995 (\pm 0.869)
VI: DiagonalNormal	1e-2	0.979 (\pm 0.138)	1.370 (\pm 1.394)	3.522 (\pm 1.634)	0.985 (\pm 0.030)	2.384 (\pm 1.318)	6.202 (\pm 1.747)
VI: DiagonalNormal	1e-3	0.990 (\pm 0.096)	1.454 (\pm 1.454)	3.650 (\pm 1.743)	0.999 (\pm 0.002)	3.026 (\pm 0.977)	6.959 (\pm 0.890)
VI: DiagonalNormal	1e-4	1.000 (\pm 0.001)	2.390 (\pm 1.177)	4.903 (\pm 1.278)	0.998 (\pm 0.007)	2.830 (\pm 1.001)	7.007 (\pm 0.987)
VI: MultivariateNormal	1e-2	0.978 (\pm 0.119)	1.351 (\pm 1.410)	3.474 (\pm 1.604)	0.987 (\pm 0.024)	2.375 (\pm 1.304)	6.189 (\pm 1.761)
VI: MultivariateNormal	1e-3	0.980 (\pm 0.089)	1.476 (\pm 1.480)	3.681 (\pm 1.734)	0.997 (\pm 0.008)	2.808 (\pm 1.014)	6.964 (\pm 0.944)
VI: MultivariateNormal	1e-4	1.000 (\pm 0.001)	2.114 (\pm 1.140)	4.532 (\pm 1.187)	0.997 (\pm 0.007)	2.799 (\pm 1.012)	6.963 (\pm 0.950)
VI: Structured Normal	1e-2	0.958 (\pm 0.129)	1.246 (\pm 1.615)	3.225 (\pm 1.701)	1.000 (\pm 0.001)	2.911 (\pm 0.753)	6.675 (\pm 1.403)
VI: Structured Normal	1e-3	0.979 (\pm 0.092)	1.593 (\pm 1.561)	3.395 (\pm 1.440)	0.998 (\pm 0.007)	2.882 (\pm 1.070)	6.968 (\pm 0.941)
VI: Structured Normal	1e-4	1.000 (\pm 0.001)	2.270 (\pm 1.133)	4.733 (\pm 1.162)	0.997 (\pm 0.009)	2.802 (\pm 1.012)	6.953 (\pm 0.948)
VI: IAF	1e-2	0.998 (\pm 0.003)	1.539 (\pm 0.691)	8.371 (\pm 0.750)	0.987 (\pm 0.022)	1.376 (\pm 0.799)	8.082 (\pm 1.352)
VI: IAF	1e-3	0.997 (\pm 0.004)	1.443 (\pm 0.564)	8.517 (\pm 0.820)	0.988 (\pm 0.020)	1.304 (\pm 0.855)	8.425 (\pm 1.281)
VI: IAF	1e-4	0.997 (\pm 0.004)	1.602 (\pm 0.628)	7.888 (\pm 0.783)	0.987 (\pm 0.020)	1.380 (\pm 0.848)	7.729 (\pm 1.322)

1782 J PREPROCESSING OF THE REAL-WORLD DATASETS

1783

1784

1785

1786

1787

1788

1789

1790

1791

1792

1793

1794

K BACKGROUND ON CONDITIONAL FLOW-MATCHING

1795

1796

1797

1798

1799

1800

1801

1802

1803

1804

1805

1806

1807

1808

1809

1810

1811

1812

1813

1814

1815

1816

1817

1818

1819

1820

1821

1822

1823

1824

1825

1826

1827

1828

1829

1830

1831

1832

1833

1834

1835

Flow matching, initially used in image synthesis leverages normalizing flows (Papamakarios et al., 2021b) to model arbitrary distributions. Continuous normalizing flows (Lipman et al., 2022) have emerged as a potent tool for modeling complex distributions. For example, recent advancements have shown its effectiveness in state-of-the-art image generation, outperforming diffusion-based methods in likelihood and sample quality on ImageNet (Lipman et al., 2022). Techniques like Flow-Turbo have accelerated class-conditional and text-to-image generation, setting new benchmarks (Zhao et al., 2024). Additionally, applying flow matching in latent spaces of pretrained autoencoders has enhanced computational efficiency and scalability for high-resolution image synthesis (Dao et al., 2023). Similarly, flow-based models have been successfully applied to protein structure prediction, improving accuracy and efficiency in modeling complex protein conformations (Yim et al., 2024; 2023).

In the area of simulation-based inference, Wildberger et al. (2024) introduce the idea of using continuous normalizing flows in order to efficiently approximate complex posterior distributions. In particular, they apply the framework to the field of gravitational-wave inference, substantially outperforming approaches based on discrete flows. Furthermore, they demonstrate good performance on the existing SBI-Benchmark (Lueckmann et al., 2021) using a simple MLP-based architecture.