Deliberation on Priors: Trustworthy Reasoning of Large Language Models on Knowledge Graphs

Abstract

Knowledge graph-based retrieval-augmented generation seeks to mitigate hallucinations in Large Language Models (LLMs) caused by insufficient or outdated knowledge. However, existing methods often fail to fully exploit the prior knowledge embedded in knowledge graphs (KGs), particularly their structural information and explicit or implicit constraints. The former can enhance the faithfulness of LLMs' reasoning, while the latter can improve the reliability of response generation. Motivated by these, we propose a trustworthy reasoning framework, termed Deliberation over Priors (DP), which sufficiently utilizes the priors contained in KGs. Specifically, DP adopts a progressive knowledge distillation strategy that integrates structural priors into LLMs through a combination of supervised fine-tuning and Kahneman-Tversky optimization, thereby improving the faithfulness of relation path generation. Furthermore, our framework employs a reasoning-introspection strategy, which guides LLMs to perform refined reasoning verification based on extracted constraint priors, ensuring the reliability of response generation. Extensive experiments on three benchmark datasets demonstrate that DP achieves new state-of-the-art performance, especially a Hit@1 improvement of 13% on the ComplexWebQuestions dataset, and generates highly trustworthy responses. We also conduct various analyses to verify its flexibility and practicality. Code is available at https://github.com/reml-group/Deliberation-on-Priors.

1 Introduction

Large Language Models (LLMs) [1–4], distinguished by their massive parameter scale and training on vast amounts of diverse, unlabeled data, have demonstrated impressive capabilities across a wide range of natural language understanding and generation tasks. They have also achieved substantial success in practical applications, such as intelligent virtual assistants and customer service systems. However, recent research [5–7] has revealed that LLMs are prone to hallucinations, producing plausible-sounding but incorrect or outdated responses, especially in real-world scenarios. This issue, often stemming from insufficient or obsolete knowledge, can lead to serious consequences and undermine the reliability of LLMs in high-stakes domains such as legal decision-making and medical diagnosis [8, 9].

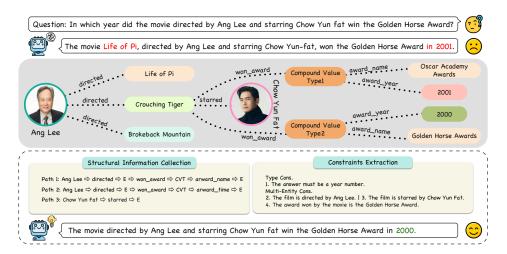


Figure 1: An illustration of LLM reasoning over knowledge graphs based on exploiting priors sufficiently. We collect weak supervision signals of the mapping from questions to relation paths by identifying the shortest traversal sequence from topic entities to answers. We predefine 5 constraints, such as type, multi-entity, and ordinal constraints, following [17] which employs them to develop the ComplexQuestions dataset but does not leverage the prior in reasoning.

To equip LLMs with up-to-date, domain-specific knowledge, an emerging line of research [10–12] has focused on knowledge graph-based retrieval-augmented generation, which aims to enhance response generation through the dynamic retrieval of relevant external knowledge. Current methods [7, 8, 13, 14] employ an end-to-end or step-by-step manner to retrieve and reason on Knowledge Graphs (KGs). The former retrieves the top K triples based on the semantic similarity between questions and knowledge facts, while the latter transforms complex questions into multiple subquestions by step-by-step retrieval. After obtaining sufficient knowledge, they utilize LLMs to generate responses directly.

However, existing approaches [7, 8, 13–16] fail to exploit the prior knowledge embedded in KGs fully, particularly (1) the structural information and (2) the explicit and implicit constraints. In particular, relation paths that connect topic entities in questions to their corresponding answers, such as the path "Ang Lee \rightarrow directed $\rightarrow \dots$ E" in Figure 1, can be leveraged not only to enhance the structural pattern awareness within KGs but also to support response generation. This, in turn, can significantly improve the faithfulness of LLM reasoning over KGs. Additionally, constraints, such as the multi-entity and type constraints, can serve a dual purpose: they can be used to filter candidate relation paths (select path 2 in Figure 1 considering the mentioned two types of constraints) and also to guide LLMs in backtracking during inference, thereby improving the reliability and robustness of reasoning processes. Motivated by these, we propose a trustworthy reasoning framework over KGs named DP (Deliberation on Priors). The framework comprises four key modules: Distillation, Planning, Instantiation, and Introspection, which guide LLMs to generate faithful and reliable responses through a two-stage process: offline and online.

In the offline stage, DP first collects weak supervision signals in the form of mappings from questions to corresponding sets of relation paths. The paths are constructed by identifying the shortest traversal sequences from topic entities to answer entities in KGs. This prior structural knowledge is then *distilled* into the LLM through a combination of fine-tuning and Kahneman-Tversky optimization [18]. The former is supervised using the weak supervision signal, while the latter is optimized by maximizing the expected utility of generation under the human utility model that Kahneman and Tversky proposed to describe how humans make decisions about uncertain monetary outcomes. This process enhances the ability of LLMs to plan and reason over the KG structure effectively.

During the online stage, the trained LLM is used to *Plan* for reasoning and generate faithful candidate relation paths. Subsequently, DP utilizes LLMs to perform relation path selections by evaluating the semantic relevance between the candidate path and the input question. Next, to obtain a complete reasoning path, the framework retrieves topic entities and relations from KGs and instantiates the selected relation path in the *Instantiation* module, such as the transformation from "{directed, won_award}"

Table 1: Constraint definitions and samples.

Category	Definition & Sample								
Type	The question specifies a required type or category for the answer. e.g. What city did Esther live in?								
Multi- Entity	The question demands the answer to satisfy the condition for multiple entities. e.g. Which team owned by Malcolm Glazer has Tim Howard playing for it?								
Explicit Time	The question clearly defines a specific time period or date to be referenced. Who was the governor of Arizona in 2009 that held his governmental position e.g. before 1998?								
Implicit Time	The question implies a temporal frame that the answer should consider. e.g. Who was the Secretary of State when Andrew Jackson was the president?								
Ordinal	The question contains the sorting rule and requires the answer in a specific order.								




Figure 2: Constraint distribution on three datasets.

to "Ang Lee directed Crouching Tiger won_award Compound Value Type 2". After obtaining the reasoning path, current frameworks [7, 8, 13–16] utilize LLMs to generate responses based on them without deliberation. In contrast, to enhance reasoning reliability, DP employs the *Introspection* module to verify whether the selected reasoning path satisfies the constraints extracted from questions, where the constraints, such as multi-entity and ordinal constraints, are predefined following [17]. Feedback is then provided to the LLM to guide subsequent decisions. If the reasoning path passes the verification, the LLM is instructed to generate a response. Otherwise, the information about which constraints are violated is fed back to the LLM to trigger relation path backtracking.

To evaluate the effectiveness of DP, we conduct extensive experiments on three benchmark Knowledge Graph Question Answering (KGQA) datasets. The experimental results on WebQuestionSP [19], ComplexWebQuestions [20], and MetaQA [21] show that, compared with baselines, our method achieves state-of-the-art performance while minimizing interaction frequency with LLMs and generates more faithful and reliable responses.

The main contributions of this work are summarized as follows:

- We introduce a trustworthy reasoning framework DP that empowers large language models
 to generate faithful and reliable responses through deliberate reasoning over the priors
 embedded in knowledge graphs.
- We propose a progressive knowledge distillation strategy, enabling LLMs to generate faithful relation paths by exploiting prior structural information.
- We propose a reasoning-introspection strategy that enhances the reliability of large language model generation by incorporating predefined constraint priors as guidance.
- We conduct extensive experiments on three public datasets to verify the effectiveness and superiority of DP. Furthermore, we demonstrate the flexibility of DP in integrating with various large language models, as well as its practicality in scenarios requiring fewer interactions with them.

2 Preliminary

KGQA Task Formulation. Given a question q, a knowledge graph \mathcal{G} , and a topic entity e_s mentioned in q, KGQA requires the intelligent system, such as LLMs, to generate responses a based on a set of knowledge triples (facts) retrieved from \mathcal{G} . It should be noted that question q may contain multiple topic entities.

Relation Path Definition. A relation path is formally defined as an ordered sequence of relations $P = \{r_1, r_2, \dots, r_l\}$, where each $r_i \in \mathcal{R}$ denotes the *i*-th relation in the path and *l* represents the path length. Here, \mathcal{R} denotes the set of all possible relations in \mathcal{G} .

Path Instantiation. Given a relation path P, an instantiation path is called a reasoning path, denoted by $\mathbb{P} = e_0 \xrightarrow{r_1} e_1 \xrightarrow{r_2} e_2 \xrightarrow{r_3} \cdots \xrightarrow{r_l} e_l$, where each $e_i \in \mathcal{E}$ denotes the i-th entity in the path and r_i corresponds to the i-th relation in the relation path P. Here, \mathcal{E} represents the set of all entities in the KG. It should be noted that a relation path P may have multiple instantiations in \mathcal{G} .

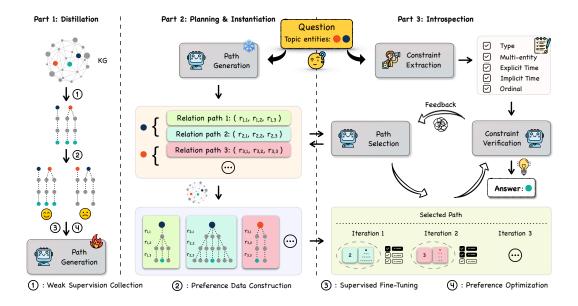


Figure 3: Trustworthy reasoning framework DP of LLMs over KGs. In *Part 1*, DP employs a progressive knowledge distillation strategy to enhance the structural pattern awareness of KGs for LLMs. In *Part 2*, the reasoning path is produced by relation path generation and instantiations. In *Part 3*, DP utilizes a reasoning-introspection strategy to verify whether the reasoning satisfies the extracted constraint.

Constraint Predefining. The constraints listed in Table 1 were initially introduced by [17] to facilitate the development of complex questions. In this paper, we leverage these constraint priors for reasoning verification. Specifically, we utilize multiple constraints like "type" and "multi-entity" extracted from questions in Figure 1 to assess whether a selected reasoning path satisfies the required conditions. To this end, we define a constraint base C and conduct a statistical analysis across three datasets, sampling 200 examples from each. Figure 2 demonstrates that most datasets encompass a range of constraint categories, with the "type" constraint being the most frequently occurring in each.

3 Methodology

Our proposed framework, DP, as illustrated in Figure 3, is composed of four key components. *Distillation*: This module employs a progressive knowledge distillation strategy to guide LLMs in capturing the structural patterns of KGs from a set of demonstrations. *Planning and Instantiation*: In this stage, DP first generates a diverse set of candidate relation paths, which are subsequently grounded into KG triples to obtain instantiated paths. *Introspection*: This component performs a deliberative selection and verification of reasoning paths by evaluating whether they meet the constraints derived from the input question. Once a satisfactory instantiated path is identified, the LLM is employed to generate responses accordingly.

3.1 Distillation

DP employs a progressive knowledge-distillation strategy to guide LLMs in exploiting the structural information and enabling faithful reasoning over KGs. This is achieved by a combination of Supervised Fine-Tuning (SFT) and Kahneman-Tversky Optimization (KTO) [18]. The former fine-tunes the LLM using collected weak supervision signals, while the latter further refines it based on automatically derived preference data.

Specifically, DP leverages weak supervision signals in the form of question-to-path mappings, which are derived from the annotations within training splits. Given a question q and a topic entity e_s identified in q, we define a function $\mathcal M$ that maps $q \in \mathcal Q$ to a set of plausible relation paths $\mathcal P$, where each $P \in \mathcal P$ is a sequence of relations such that traversing from e_s via (r_1, \ldots, r_l) leads to the answer

entity e_t in the KG $\mathcal{G} = (\mathcal{E}, \mathcal{R})$. To extract these paths, our framework first extracts a k-hop subgraph $\mathcal{G}_k(e_s)$ centered on e_s , where k is the maximum reasoning depth allowed by the dataset. Then, the Dijkstra algorithm is employed to identify all shortest relation paths from e_s to the ground-truth answer entity e_t within $\mathcal{G}_k(e_s)$. These shortest paths constitute the weak supervision set $\mathcal{P}_w(q)$ for question q, serving as structurally mapping relation exemplars. While not exhaustive, $\mathcal{P}_w(q)$ captures plausible multi-hop reasoning trajectories within the KG structure and provides guidance for the LLM to generalize to similar questions. The weak supervision of question-to-path mappings $\mathcal{P}_w(q)$ can be defined as follows:

$$\mathcal{P}_w(q) = \mathcal{M}(q, e_s, \mathcal{G}, k) = \text{ShortestPath}_{\text{Dijkstra}}(\mathcal{G}_k(e_s), e_s, e_t). \tag{1}$$

We then apply SFT to train the LLM to generate relation paths conditioned on the input question q and its corresponding topic entity e_s . This training stage encourages LLMs to align the semantic content of the question with structural relation traversals over \mathcal{G} . Let $P^* = (r_1^*, r_2^*, \dots, r_T^*)$ denote a gold relation path extracted using Equation (1) for question q. The objective of SFT is to maximize the conditional log-likelihood \mathcal{L}_{SFT} of the target path sequence P^* given the input (q, e_s) :

$$\mathcal{L}_{SFT}(\theta_s) = \sum_{t=1}^{T} \log P_{\theta_s} \left(r_t^* \mid r_{< t}^*, q, e_s \right), \tag{2}$$

where θ_s represents the parameters of the LLM and $r^*_{< t}$ denotes the prefix subsequence $(r^*_1, \dots, r^*_{t-1})$. This formulation enables the LLM to learn to autoregressively generate faithful relation paths that connect e_s to plausible answer entities within the KG.

To further enhance the reliability of relation path generation, we incorporate a preference optimization stage to explicitly encourage LLMs to prefer semantically coherent and structurally faithful relation paths. Specifically, we construct relation path data D consisting of positive paths and negative paths given question q. The negative or undesirable path is synthetically generated from the original weak supervision data $\mathcal{P}_w(q)$ through targeted perturbations for the positive path:

- Path Truncation. Removing the final hop r_T^* from a gold relation path P^* to yield an incomplete relation chain.
- Entity-Path Swapping. Swapping relation paths between different topic entities associated with the same question, resulting in semantically inconsistent paths.
- Relation Deletion. Randomly deleting the relation path of a certain topic entity, resulting in incomplete paths.

These synthetic negative paths are constructed to superficially valid relation paths while being semantically invalid due to violations of critical structural or semantic constraints. Notably, such perturbations introduce severe class imbalance in path data, where positive paths constitute only $\frac{1}{4}$ of the dataset, and negative paths account for $\frac{3}{4}$. This imbalance poses significant challenges to conventional preference optimization like direct preference optimization. Therefore, we train the LLM using KTO [18], a more robust approach that accommodates imbalanced supervision. KTO maximizes the expected utility of generation under the human utility model that Kahneman and Tversky proposed to describe how humans make decisions about uncertain monetary outcomes. This utility maximization objective is equivalent to minimizing the KTO loss \mathcal{L}_{KTO} :

$$\mathcal{L}_{\text{KTO}}(\pi_{\theta}, \pi_{\text{ref}}) = \mathbb{E}_{(x,y) \sim D} \left[\lambda_y - v(x,y) \right]. \tag{3}$$

Here, we define the key components of the KTO loss formulation. Let $x=(q,e_s)$ denote the input, and let y represent its corresponding relation path label, where $y\sim Y_{\rm p}$ and $y\sim Y_{\rm n}$ indicate a positive and negative label, respectively. $\pi_{\theta}(\cdot)$ is the current LLM's output distribution and $\pi_{\rm ref}(\cdot)$ is the reference model supervised by SFT. The parameter λ_y takes the value λ_p (for positive y) or λ_n (for negative y), controlling class-specific weighting. The value function $v(\cdot)$ models human utility perception, defined as:

$$v(x,y) = \begin{cases} \lambda_{p}\sigma\left(\beta(r_{\theta}(x,y) - z_{0})\right) & \text{if } y \sim Y_{p} \mid x, \\ \lambda_{n}\sigma\left(\beta(z_{0} - r_{\theta}(x,y))\right) & \text{if } y \sim Y_{n} \mid x. \end{cases}$$
(4)

where $\sigma(\cdot)$ denotes the logistic function, β modulates risk aversion, $r_{\theta}(x,y) = \log \frac{\pi_{\theta}(y|x)}{\pi_{\text{ref}}(y|x)}$ represents the implied reward and the reference point z_0 is obtained via the KL divergence $z_0 = \text{KL}\left(\pi_{\theta}(y'\mid x) \parallel \pi_{\text{ref}}(y'\mid x)\right)$. In brief, the progressive knowledge distillation strategy equips DP with reliable structural priors of KGs, enabling faithful online reasoning in the subsequent stages.

3.2 Planning and Instantiation

In this stage, DP utilizes the path generator, which has been trained through the aforementioned progressive knowledge-distillation strategy, to generate multiple candidate relation paths. One of these paths is then selected and instantiated by retrieving entities from the KG, beginning with the given topic entity e_s . Importantly, the selection of the relation path at this stage is guided solely by its semantic alignment with the input question, without imposing any constraints.

More formally, given a question q and its associated topic entity e_s , DP invokes the path generator to produce a set of candidate relation paths $\{P_1, P_2, \dots\}$, where each P_i denotes a traversal sequence of relations representing a multi-hop reasoning trajectory over the KG. In scenarios where a question contains multiple topic entities, the path generator independently produces candidate paths for each entity. These paths are subsequently merged into a unified pool, thereby enriching semantic diversity and increasing the probability that at least one reasoning trajectory satisfies the implicit or explicit constraints embedded in the question. For a given relation path P, the corresponding instantiated reasoning path $\mathbb P$ is obtained by traversing the KG starting from the topic entity e_s . The instantiation process is described in detail in Section 2.

3.3 Introspection

To ensure the reliability of LLM reasoning, our framework utilizes a reasoning-introspection strategy to verify whether the reasoning path satisfies the extracted constraint from questions. As introduced in Section 2, we predefine 5 constraint types, which are prior knowledge embedded in KGs and can be employed to guide LLMs. Specifically, given question q, DP first prompts LLMs to extract the contained constraint $\mathcal{C}(q)$ from the predefined constraint base $C\colon \mathcal{C}(q)=\mathcal{F}_{\text{cons}}(q,C,I_{\text{cons}})$, where I_{cons} represents the prompt and in-context exemplars. Subsequently, the LLM is prompted to determine whether the instantiated reasoning path \mathbb{P} satisfies $\mathcal{C}(q)$ given q and e_s . The verification outcome is formalized as:

$$\mathcal{J}(q, e_s, \mathbb{P}) = \begin{cases} 1, & \text{if } \mathbb{P} \models \mathcal{C}(q); \\ 0, & \text{otherwise.} \end{cases}$$
 (5)

If the constraint is satisfied, DP instructs the LLM to generate a reason and produce a final response grounded on the validated reasoning path. Conversely, if the constraint is violated, the LLM is prompted to provide explicit feedback identifying the unsatisfied condition. This feedback subsequently triggers a backtracking mechanism, wherein the framework iteratively re-executes the process of relation path selection, instantiation, and introspection. This mechanism can reduce the negative impact of false-positive reasoning paths, promoting the reliability of response generation. The iterative loop continues until either a constraint-satisfying reasoning path is found or the candidate relation path set is reduced to a singleton.

4 Experiment

We conduct various experiments on three benchmarks to verify the following aspects: (1) the superiority of DP; (2) the flexibility in integrating different LLMs; (3) the effectiveness of individual components; (4) the necessity of deliberation on prior knowledge; and (5) the practicality of DP.

4.1 Experimental Setting

Dataset and Evaluation Metric. We evaluate our approach on three public multi-hop KGQA datasets: WebQuestionSP (WebQSP) [19] and Complex WebQuestions (CWQ) [20], and MetaQA [21]. WebQSP is developed by gathering semantic parses in SPARQL from the WebQuestions dataset. CWQ features a large collection of compositional questions, requiring reasoning over up to 4-hop relation paths based on multiple web snippets. MetaQA is built upon a movie ontology derived from the WikiMovies dataset and provides question-answer pairs spanning 1-hop, 2-hop, and 3-hop queries. The KGs used in WebQSP and CWQ are a subset of Freebase. To account for computational constraints, we uniformly sample 500 questions from the test set of WebQSP and CWQ, following the setup in [22, 15]. A total of 600 instances are uniformly sampled from the MetaQA dataset, with exactly 200 samples selected for each of the 1-hop, 2-hop, and 3-hop types. Evaluation is conducted using three standard metrics: Hit, Hits@1, and F1 score, consistent with prior studies [8, 23, 24]. The

Table 2: Comparison of KGQA performance (%) across three datasets with previous state-of-theart methods. DP results are averaged over three independent evaluations. We highlight the best performance in bold and the second-best in underline. Baseline methods are categorized into three groups: Supervised Learning (SL), In-Context Learning (ICL), and Hybrid Learning (HL). LM denotes the language model used. \star denotes the performance on 3-hop questions.

m.	36.0.1	37	LM		WebQSP			CWQ			MetaQA	
Type	Method	Year	LIVI	Н	H@1	F1	Н	H@1	F1	H	H@1	F1
		2022	ChatGPT	59.3	59.3	43.5	34.7	34.7	30.2	-	-	-
Vanilla	Zero-shot	2023	GPT-4	67.4	67.4	49.5	50.8	50.8	46.1	-	-	-
		2024	LLaMA3.1-8B	55.5	55.5	34.8	28.1	28.1	22.4	-	-	-
	EmbedKGQA	2020	RoBERTa	-	66.6	-	-	-	-	-	97.0	-
	TransferNet	2021	BERT	-	71.4	-	-	48.6	-	-	99.2	-
SL	UniKGQA	2023	RoBERTa	-	77.2	72.2	-	51.2	49.0	-	99.4	-
SL	RoG	2024	LLaMA2-Chat-7B	85.7	80.8	70.8	62.6	57.8	56.2	-	89.0*	50.7*
	AMAR	2025	LLaMA2-7B/13B	84.2	-	81.2	83.1	-	78.5	-	-	-
	GNN-RAG	2025	LLaMA2-Chat-7B	90.7	82.8	73.5	68.7	62.8	60.4	-	98.6*	-
	ToG	2024	ChatGPT	76.2	-	-	58.9	-	-	-	-	-
	10G	2024	GPT-4	82.6	-	36.4	69.5	-	31.8	-	-	-
	PoG	2024	ChatGPT	82.0	-	-	63.2	-	-	-	-	-
ICL	POG		GPT-4	87.3	-	-	75.0	-	-	-	-	-
ICL	D II	2024	ChatGPT	74.3	-	-	55.6	-	-	-	-	-
	Readi	2024	GPT-4	78.7	-	-	67.0	-	-	-	-	-
	DoG	2025	ChatGPT	88.6	62.6	54.2	58.2	49.4	56.6	95.4	85.1	87.2
	DoG	2025	GPT-4	91.0	65.4	55.6	56.0	41.0	46.4	98.3	90.1	93.1
	Interactive-KBQA	2024	GPT-4	-	-	71.2	-	-	49.1	-	-	96.3
	LightPROF	2025	LLaMA3-8B	-	83.8	-	-	59.3	-	-	-	-
HL			LLaMA3.1-8B	87.9±0.2	82.8±0.4	75.7±0.8	70.8±0.3	61.1±0.4	58.5±0.9	90.2±0.1	87.4±0.2	84.1±0.5
			ChatGPT	89.7 ± 0.6	86.9 ± 0.3	79.2 ± 0.3	80.0 ± 0.6	72.6 ± 0.1	69.2 ± 0.4	96.7 ± 0.1	95.4 ± 0.3	90.8 ± 0.4
	DD (O)	2025	GPT-4	90.4 ± 0.4	86.7 ± 0.5	81.7 ± 0.6	85.6 ± 0.3	74.6 ± 0.7	71.1 ± 0.8	96.7 ± 0.2	95.4 ± 0.3	94.8 ± 0.2
	DP (Ours)	2025	GPT-40	90.7 ± 0.6	87.5 ± 0.8	81.4 ± 0.5	85.2 ± 0.4	74.6 ± 0.5	70.5 ± 0.5	96.5 ± 0.6	95.2 ± 0.4	94.4 ± 0.4
			GPT-4.1	$\overline{90.6}$ ± 0.5	$86.7{\scriptstyle\pm0.4}$	$\overline{80.1}{\scriptstyle \pm 0.8}$	87.2 ± 0.2	75.8±0.7	69.4 ± 0.9	96.8 ± 0.2	$95.5{\scriptstyle\pm0.3}$	$94.9_{\pm 0.1}$

Hit (H) metric assesses whether any of the ground-truth answers are present in the generated response. Hits@1 (H@1) measures the proportion of questions for which the top-ranked predicted answer exactly matches a correct answer. The F1 score accounts for scenarios with multiple correct answers by computing the harmonic mean of precision and recall, thereby providing a more comprehensive evaluation of answer quality.

Implementation Detail. During the *Distillation* stage, the path generator (LLaMA3.1-8B-Instruct) is fine-tuned by the weak supervision signal in the form of question-to-path mapping for 2 epochs and further optimized for 1 epoch through preference optimization with KTO [18]. We apply low-rank adaptation [25] to adapt large-scale parameters during both SFT and KTO training efficiently. In the *Planning* stage, we employ the trained path generator in a zero-shot manner to produce a set of relation paths for each topic entity in the question. In the *Introspection* stage, DP guides LLMs to perform path selection, constraint extraction, and verification under a few-shot setting. Specifically, we provide one exemplar for each possible scenario within these three procedures, which consist of 3, 5, and 2 scenarios, respectively. The detailed settings are provided in Appendix B.1 and B.2.

Baseline Selection. Inspired by the setup in [15, 8], we compare DP against previous state-of-the-art approaches, including Supervised Learning (SL), In-Context Learning (ICL), and Hybrid Learning (HL). SL-based methods train models using the answer labels provided in KGQA datasets to directly predict answers, including EmbedKGQA [26], TransferNet [27], UniKGQA [28], RoG [8], AMAR [10], and GNN-RAG [24]. ICL-based methods employ chain-of-thought reasoning to generate responses based on few-shot exemplars, including PoG [29], ToG [22], Readi [30], and DoG [15]. HL-based methods combine SL and ICL to produce responses, including Interactive-KBQA [31] and LightPROF [32].

4.2 Reasoning on Different KGs

Main Result. We compare DP with previous state-of-the-art methods, categorized into three types: SL, ICL, and HL. Based on the results presented in Table 2, we draw the following key insights. First, incorporating deliberation over prior knowledge significantly enhances the reliability of response generation. The results for DP are averaged over three independent runs. Our framework consistently achieves new state-of-the-art performance across most datasets, with low variance. In contrast, the vanilla LLMs (without DP) exhibit unstable performance and often fail to achieve competitive H@1 or F1 scores, particularly on CWQ and WebQSP, highlighting their limitations in complex reasoning tasks. Notably, DP surpasses the HL-based method LightPROF by 14.5% in H@1 on the CWQ

dataset. Second, existing methods struggle in scenarios where the correct answer must appear in the top-ranked position or where the output is expected to contain accurate answers with high precision. For instance, ToG exhibits a 46.2% gap between its H and F1 scores on the WebQSP dataset. In contrast, DP narrows this gap to approximately 10%, further underscoring its robustness and reliability. Third, we observe that some prior works have misinterpreted evaluation metrics such as H and H@1. According to the code released by [10, 22], certain results reported as H@1 are actually H, potentially leading to unfair comparisons and misleading evaluations. In this work, we rigorously report DP's performance using H, H@1, and F1 metrics, respectively. Overall, the DP framework demonstrates robust and reliable performance across diverse datasets, validating the effectiveness of incorporating prior knowledge deliberation.

Flexibility Verification. Table 2 also reports the integration experiments, which are designed to evaluate whether DP can enhance the reasoning reliability of various LLMs, including LLaMA3.1-8B, GPT-3.5, GPT-4.0, GPT-40, and GPT-4.1. The results show that DP consistently improves the reasoning performance of these LLMs across three benchmark datasets. Notably, our framework enables GPT-40 and GPT-4.1 to achieve the best performance on the WebQSP and CWQ datasets, respectively. Overall, these findings highlight the flexibility and effectiveness of DP in enhancing diverse LLMs, with lower variance observed across multiple runs, indicating that the improvements are stable and reliable.

4.3 Ablation Study

We perform comprehensive ablation studies on two benchmark datasets (WebQSP and CWQ) to systematically evaluate the contribution of each DP component. As shown in Table 3, our analysis reveals five critical observations. First, LLMs such as GPT-4.1 demonstrate significant performance degradation when deprived of knowledge augmentation. Specifically, the F1 score drops by 25.5% on WebQSP and 20.5% on CWQ, highlighting the necessity of external knowledge integration for complex question answering tasks. Second, our progressive knowledge distillation strategy effectively promotes the prior awareness of LLMs for the structural patterns of KGs. When removing KTO, we observe a 2.0% decrease in H@1 score on WebQSP and a 1.2% decrease on CWQ, confirming its role in improving pattern recognition capa-

Table 3: Ablation experiments. PT, EPS, and RD denote path truncation, entity-path swapping, and relation deletion, respectively, which are perturbations introduced in Section 3.1. "w/o CPD" indicates the constraint is automatically induced by LLMs rather than being manually predefined.

Setting	1	WebQSI		CWQ			
Setting	Н	H@1	F1	Н	H@1	F1	
DP (GPT 4.1)	90.6	86.7	80.1	87.2	75.8	69.4	
GPT 4.1	74.0	71.0	54.6	56.0	53.0	48.9	
w/o KTO	88.3	84.7	77.3	86.0	74.6	67.3	
w/o PT	88.4	84.8	77.6	86.4	75.0	68.4	
w/o EPS	90.0	85.8	79.4	86.6	73.8	68.1	
w/o RD	88.3	84.8	77.8	87.2	74.1	67.7	
w/o Introspection	86.6	82.0	75.7	85.3	70.8	65.2	
w/o CPD	87.8	83.4	76.4	86.2	74.4	68.5	
w/o feedback	88.0	83.0	76.5	85.4	73.2	67.1	

bilities. Third, among the three perturbation methods examined, relation deletion demonstrates the most substantial impact on path generation. Fourth, the reasoning-introspection strategy proves to be the most critical component for ensuring response reliability. Compared to other ablated conditions, removing introspection leads to the most pronounced performance deterioration across both datasets. Finally, both constraint predefinition and verification feedback contribute significantly to the overall reasoning process. Notably, substituting manual constraint definitions with LLM-generated summaries results in a 2.8% drop in H score on WebQSP and a 1.0% decrease on CWQ, underscoring the value of human-defined constraints in guiding accurate reasoning. These findings collectively demonstrate the complementary roles of different DP components in enhancing the faithfulness and reliability of LLM reasoning.

4.4 Impact of Priors on LLM Reasoning

To investigate the impact of prior knowledge on LLM reasoning, we conduct extensive experiments on two benchmark datasets: WebQSP and CWQ. First, Table 4 presents the results of path generation and constraint extraction on 500 and 100 uniformly sampled examples from each dataset, respectively. To improve the faithfulness of LLM reasoning, we collect all relation paths that satisfy the condition defined in Equation (1) for each question. This leads to a one-to-many question-to-relation mapping, in contrast to the one-to-one mapping adopted by RoG [8]. Our approach yields significant improvements in the F1 score of path generation, with relative gains of 29.3% on WebQSP and 43.0%

Table 4: Results of Path Generation (PG) and Constraint Extraction (CE).

Setting	Web	QSP	CWQ		
Stung	Н	F1	H	F1	
PG (1: 1)	83.0	59.3	81.2	49.8	
PG (1: n)	93.0	76.7	94.0	71.1	
CE	99.0	90.2	99.0	92.9	



Figure 4: Error distribution on two datasets.

on CWQ, demonstrating the benefits of leveraging priors. Second, we analyze the failure cases of DP with GPT-4.1 in the main experiment. As shown in Figure 4, the majority of errors stem from path generation, path selection, reasoning, and instruction-following. Among these, path generation and selection are closely tied to the utilization of priors, underscoring the importance of effectively incorporating prior knowledge. Reasoning errors, despite the correct path selection, indicate that LLMs may rely excessively on their internal knowledge during response generation. Moreover, we observe that LLMs occasionally fail to adhere to the required answer format—for instance, producing "2008" instead of "2008 World Cup." We found that incorporating instruction-following exemplars mitigates this issue and yields performance improvements, such as a 1.1% Hit@1 gain on CWQ.

4.5 Backtracking Analysis

Backtracking refers to the iterative re-execution of relation path selection, instantiation, and introspection when a constraint violation is detected. To explore the practical impact of backtracking, we measure how often it is triggered during test time. Table 5 reports the average number of backtracking steps per question across CWQ and WebQSP. We observe that GPT-4.1 triggers backtracking more frequently than GPT-3.5 (e.g., 0.21 vs. 0.07 on WebQSP), likely due to its stronger instruction-

Table 5: Average number of backtracking steps per question across datasets and models.

Method	Dataset	Backtrack	
DP	CWQ	GPT-3.5 GPT-4.1	0.10 0.42
	WebQSP	GPT-3.5 GPT-4.1	0.07 0.21

following ability, which enforces stricter constraint checking. This aligns with the performance differences presented in Table 2, suggesting that more reliable backtracking contributes to better overall reasoning quality.

4.6 Analysis for LLM Interaction

We conduct experiments on CWQ and WebQSP to evaluate the practicality and efficiency of DP. Table 6 presents a comparative analysis of the average number of LLM calls and token consumption required by different methods to answer a question across the two datasets. The results for DoG and DP are obtained using GPT-3.5, while additional results of DP with other LLMs are provided in Appendix B.5. Across both datasets, DP consistently outperforms strong baselines across all evaluation metrics. Specifically, our framework requires only 2.9 and 2.5 LLM calls on CWQ and WebQSP, respectively—highlighting its efficient utilization of prior knowledge embedded in KGs. In terms of token consumption, DP achieves the lowest

Table 6: Practicality and efficiency Comparison. Call denotes the number of LLM interactions. Input, Output, and Total represent the number of corresponding tokens. The results of DP are averaged over three independent runs.

Dataset	Method	Call	Input	Output	Total
	ToG	22.6	8,182.9	1,486.4	9,669.4
CWO	PoG	13.3	7,803.0	353.2	8,156.2
CWQ	DoG	12.7	8,298.0	384.6	8,682.6
	DP	2.9	2,928.6	186.4	3,115.0
	ToG	15.9	6,031.2	987.7	7,018.9
WebOSP	PoG	9.0	5,234.8	282.9	5,517.7
webQSF	DoG	10.4	7,332.1	277.2	7,604.3
	DP	2.5	2,552.8	146.7	2,699.5

output token count while also requiring the least input token consumption. This reflects DP's effectiveness in reducing overall token usage during the reasoning process, relying on fewer instructions and exemplars. These findings underscore the superiority of DP compared to existing baselines.

5 Conclusion and Limitation

This paper presents a trustworthy reasoning framework, DP, which empowers Large Language Models (LLMs) to generate faithful and reliable responses by deliberately reasoning over the priors embedded in knowledge graphs. In the offline stage, DP enables LLMs to generate faithful relational paths through a progressive knowledge distillation strategy. In the online stage, it enhances response reliability via a reasoning-introspection strategy. These strategies effectively explore and leverage structural patterns and constraint priors within knowledge graphs, respectively. Extensive experiments conducted on three benchmark datasets demonstrate that DP achieves new state-of-the-art performance, highlighting its effectiveness, flexibility, and practical applicability. Moreover, the results emphasize the importance of prior exploitation, particularly path generation and constraint extraction, in supporting trustworthy reasoning over knowledge graphs. While this work advances trustworthy LLM reasoning by incorporating knowledge priors, it still relies on human intervention to define constraints when applied to vertical domains. In future work, we plan to investigate automatic methods for extracting and summarizing constraint types, aiming to further reduce manual effort and enhance scalability.

Acknowledgments and Disclosure of Funding

This work was supported in part by the National Key Research and Development Program of China (2022YFC3303600), the National Natural Science Foundation of China (62306229, 62137002, U22B2019, 62477037, 62293553), the Natural Science Basic Research Program of Shaanxi (2023-JC-YB-593), the Key Research and Development Program of Shaanxi (2024GX-ZDCYL-02-12), the Youth Innovation Team of Shaanxi Universities "Multi-modal Data Mining and Fusion", the Shaanxi Undergraduate and Higher Education Teaching Reform Research Program (23BY195), the Youth Talent Support Program of Shaanxi Science and Technology Association (20240113), and the China Postdoctoral Science Foundation (2024M752585, 2025T180425).

References

- [1] D. Guo, D. Yang, H. Zhang, J. Song, R. Zhang, R. Xu, Q. Zhu, S. Ma, P. Wang, X. Bi *et al.*, "Deepseek-r1: Incentivizing reasoning capability in llms via reinforcement learning," *arXiv preprint arXiv:2501.12948*, 2025.
- [2] A. Hogan, X. L. Dong, D. Vrandečić, and G. Weikum, "Large language models, knowledge graphs and search engines: A crossroads for answering users' questions," arXiv preprint arXiv:2501.06699, 2025.
- [3] J. Ma, Z. Gao, Q. Chai, J. Liu, P. Wang, J. Tao, and Z. Su, "Fortisavqa and maven: a benchmark dataset and debiasing framework for robust multimodal reasoning," *arXiv* preprint arXiv:2504.00487, 2025.
- [4] R. Dominguez-Olmedo, M. Hardt, and C. Mendler-Dünner, "Questioning the survey responses of large language models," in *NeurIPS*, 2024, pp. 45 850–45 878.
- [5] D. Yang, D. Xiao, J. Wei, M. Li, Z. Chen, K. Li, and L. Zhang, "Improving factuality in large language models via decoding-time hallucinatory and truthful comparators," in *AAAI*, 2025, pp. 25606–25614.
- [6] V. Rawte, A. Sheth, and A. Das, "A survey of hallucination in large foundation models," *arXiv preprint arXiv:2309.05922*, 2023.
- [7] M. Li, S. Miao, and P. Li, "Retrieval or reasoning: The roles of graphs and large language models in efficient knowledge-graph-based retrieval-augmented generation," in *ICLR*, 2025.
- [8] L. LUO, Y.-F. Li, R. Haf, and S. Pan, "Reasoning on graphs: Faithful and interpretable large language model reasoning," in *ICLR*, 2024.
- [9] X. Guan, Y. Liu, H. Lin, Y. Lu, B. He, X. Han, and L. Sun, "Mitigating large language model hallucinations via autonomous knowledge graph-based retrofitting," in *AAAI*, 2024, pp. 18 126–18 134.
- [10] D. Xu, X. Li, Z. Zhang, Z. Lin, Z. Zhu, Z. Zheng, X. Wu, X. Zhao, T. Xu, and E. Chen, "Harnessing large language models for knowledge graph question answering via adaptive multi-aspect retrieval-augmentation," in *Proceedings of the AAAI Conference on Artificial Intelligence*, 2025, pp. 25 570–25 578.
- [11] M. Li, S. Miao, and P. Li, "Simple is effective: The roles of graphs and large language models in knowledge-graph-based retrieval-augmented generation," in *ICLR*, 2025.

- [12] X. Liang and Z. Gu, "Fast think-on-graph: Wider, deeper and faster reasoning of large language model on knowledge graph," arXiv preprint arXiv:2501.14300, 2025.
- [13] J. Jiang, K. Zhou, Z. Dong, K. Ye, W. X. Zhao, and J.-R. Wen, "Structgpt: A general framework for large language model to reason over structured data," in *EMNLP*, 2023, pp. 9237–9251.
- [14] R. Zhao, F. Zhao, L. Wang, X. Wang, and G. Xu, "Kg-cot: Chain-of-thought prompting of large language models over knowledge graphs for knowledge-aware question answering," in *IJCAI*, 2024, pp. 6642–6650.
- [15] J. Ma, Z. Gao, Q. Chai, W. Sun, P. Wang, H. Pei, J. Tao, L. Song, J. Liu, C. Zhang *et al.*, "Debate on graph: a flexible and reliable reasoning framework for large language models," in *AAAI*, 2025, pp. 24768–24776.
- [16] S. Ma, C. Xu, X. Jiang, M. Li, H. Qu, C. Yang, J. Mao, and J. Guo, "Think-on-graph 2.0: Deep and faithful large language model reasoning with knowledge-guided retrieval augmented generation," in *ICLR*, 2025.
- [17] J. Bao, N. Duan, Z. Yan, M. Zhou, and T. Zhao, "Constraint-based question answering with knowledge graph," in *COLING*, 2016, pp. 2503–2514.
- [18] K. Ethayarajh, W. Xu, N. Muennighoff, D. Jurafsky, and D. Kiela, "Kto: Model alignment as prospect theoretic optimization," *arXiv preprint arXiv:2402.01306*, 2024.
- [19] W.-t. Yih, M. Richardson, C. Meek, M.-W. Chang, and J. Suh, "The value of semantic parse labeling for knowledge base question answering," in ACL, 2016, pp. 201–206.
- [20] A. Talmor and J. Berant, "The web as a knowledge-base for answering complex questions," in ACL, 2018, pp. 641–651.
- [21] Y. Zhang, H. Dai, Z. Kozareva, A. Smola, and L. Song, "Variational reasoning for question answering with knowledge graph," in *AAAI*, 2018, pp. 6069–6076.
- [22] J. Sun, C. Xu, L. Tang, S. Wang, C. Lin, Y. Gong, L. Ni, H.-Y. Shum, and J. Guo, "Think-on-graph: Deep and responsible reasoning of large language model on knowledge graph," in *ICLR*, 2024.
- [23] Z. Li, S. Fan, Y. Gu, X. Li, Z. Duan, B. Dong, N. Liu, and J. Wang, "Flexkbqa: A flexible llm-powered framework for few-shot knowledge base question answering," in *AAAI*, 2024, pp. 18 608–18 616.
- [24] C. Mavromatis and G. Karypis, "Gnn-rag: Graph neural retrieval for large language model reasoning," arXiv preprint arXiv:2405.20139, 2024.
- [25] E. J. Hu, Y. Shen, P. Wallis, Z. Allen-Zhu, Y. Li, S. Wang, L. Wang, and W. Chen, "LoRA: Low-rank adaptation of large language models," in *ICLR*, 2022.
- [26] A. Saxena, A. Tripathi, and P. Talukdar, "Improving multi-hop question answering over knowledge graphs using knowledge base embeddings," in ACL, 2020, pp. 4498–4507.
- [27] J. Shi, S. Cao, L. Hou, J. Li, and H. Zhang, "Transfernet: An effective and transparent framework for multi-hop question answering over relation graph," in *EMNLP*, 2021, pp. 4149–4158.
- [28] J. Jiang, K. Zhou, X. Zhao, and J.-R. Wen, "Unikgqa: Unified retrieval and reasoning for solving multi-hop question answering over knowledge graph," in *ICLR*, 2023.
- [29] L. Chen, P. Tong, Z. Jin, Y. Sun, J. Ye, and H. Xiong, "Plan-on-graph: Self-correcting adaptive planning of large language model on knowledge graphs," in *NeurIPS*, 2024.
- [30] S. Cheng, Z. Zhuang, Y. Xu, F. Yang, C. Zhang, X. Qin, X. Huang, L. Chen, Q. Lin, D. Zhang et al., "Call me when necessary: Llms can efficiently and faithfully reason over structured environments," in *Findings* of the ACL, 2024, pp. 4275–4295.
- [31] G. Xiong, J. Bao, and W. Zhao, "Interactive-kbqa: Multi-turn interactions for knowledge base question answering with large language models," in *ACL*, 2024, pp. 10561–10582.
- [32] T. Ao, Y. Yu, Y. Wang, Y. Deng, Z. Guo, L. Pang, P. Wang, T.-S. Chua, X. Zhang, and Z. Cai, "Lightprof: A lightweight reasoning framework for large language model on knowledge graph," in AAAI, 2025, pp. 23 424–23 432.
- [33] J. Baek, A. F. Aji, and A. Saffari, "Knowledge-augmented language model prompting for zero-shot knowledge graph question answering," *arXiv* preprint arXiv:2306.04136, 2023.
- [34] Y. Shu, Z. Yu, Y. Li, B. Karlsson, T. Ma, Y. Qu, and C.-Y. Lin, "Tiara: Multi-grained retrieval for robust question answering over large knowledge base," in *EMNLP*, 2022, pp. 8108–8121.

- [35] M. Galkin, Z. Zhu, H. Ren, and J. Tang, "Inductive logical query answering in knowledge graphs," in NeurIPS, 2022, pp. 15230–15243.
- [36] Y. Cui, Z. Sun, and W. Hu, "A prompt-based knowledge graph foundation model for universal in-context reasoning," in *NeurIPS*, 2024, pp. 7095–7124.
- [37] G. Dong, R. Li, S. Wang, Y. Zhang, Y. Xian, and W. Xu, "Bridging the kb-text gap: Leveraging structured knowledge-aware pre-training for kbqa," in CIKM, 2023, pp. 3854–3859.
- [38] M. Yasunaga, A. Bosselut, H. Ren, X. Zhang, C. D. Manning, P. S. Liang, and J. Leskovec, "Deep bidirectional language-knowledge graph pretraining," in *NeurIPS*, 2022, pp. 37 309–37 323.
- [39] X. He, Y. Tian, Y. Sun, N. Chawla, T. Laurent, Y. LeCun, X. Bresson, and B. Hooi, "G-retriever: Retrieval-augmented generation for textual graph understanding and question answering," in *NeurIPS*, 2024, pp. 132 876–132 907.
- [40] P. Jiang, L. Cao, C. D. Xiao, P. Bhatia, J. Sun, and J. Han, "Kg-fit: Knowledge graph fine-tuning upon open-world knowledge," in *NeurIPS*, 2024, pp. 136 220–136 258.
- [41] J. Zhang, X. Zhang, J. Yu, J. Tang, J. Tang, C. Li, and H. Chen, "Subgraph retrieval enhanced model for multi-hop knowledge base question answering," in ACL, 2022, pp. 5773–5784.
- [42] J. Kim, Y. Kwon, Y. Jo, and E. Choi, "Kg-gpt: A general framework for reasoning on knowledge graphs using large language models," in EMNLP, 2023, pp. 9410–9421.
- [43] Y. Wu, Y. Huang, N. Hu, Y. Hua, G. Qi, J. Chen, and J. Pan, "Cotkr: Chain-of-thought enhanced knowledge rewriting for complex knowledge graph question answering," in *EMNLP*, 2024, pp. 3501–3520.
- [44] Y. Ji, K. Wu, J. Li, W. Chen, M. Zhong, X. Jia, and M. Zhang, "Retrieval and reasoning on kgs: Integrate knowledge graphs into large language models for complex question answering," in *Findings of the EMNLP*, 2024, pp. 7598–7610.
- [45] P. Yixing, Q. Wang, L. Zhang, Y. Liu, and Z. Mao, "Chain-of-question: A progressive question decomposition approach for complex knowledge base question answering," in *Findings of the ACL*, 2024, pp. 4763–4776.
- [46] K. Liang, L. Meng, M. Liu, Y. Liu, W. Tu, S. Wang, S. Zhou, X. Liu, F. Sun, and K. He, "A survey of knowledge graph reasoning on graph types: Static, dynamic, and multi-modal," *IEEE TPAMI*, pp. 9456–9478, 2024.

Technical Appendix

A Related Work

End-to-end Reasoning. To achieve quick and efficient responses, several studies [31, 33, 34] directly feed questions along with retrieved triples from Knowledge Graphs (KGs) into text decoders. These approaches primarily focus on extracting critical knowledge to answer the questions. One line of research [33, 35, 36] retrieves relevant facts by performing exact entity matching between the input question and the knowledge graph. The retrieved facts are then provided to Large Language Models (LLMs) through prompt engineering to generate answers. To support more semantically rich queries, another line of work [37, 28, 38-40] incorporates knowledge facts into pre-trained models inspired by masked language modeling and subsequently fine-tunes the retriever within the KGQA task. However, such methods often retrieve only the facts associated with the explicit information present in the question, overlooking implicit cues. To address this limitation, some studies [41, 42, 9] propose decomposing complex questions into sub-questions and retrieving knowledge based on semantic similarity between the sub-questions and triples. Nevertheless, these methods often struggle with complex questions, particularly when a large number of retrieved facts are directly input into the text decoder, which can overwhelm the model and impair answer quality. In contrast, our proposed framework, DP, employs the reasoning-introspection strategy to perform path selection and backtracking, effectively avoiding the introduction of false positive paths. It should be noted that our work is the first to employ constraint priors in reasoning to the best of our knowledge.

Chain-of-thought Reasoning. With the remarkable success of chain-of-thought prompting, researchers [14, 43, 44] have extended step-by-step reasoning to knowledge graph-based tasks. A prevalent approach [13, 22, 45] first identifies the topic entity in the question, then iteratively retrieves and refines a reasoning path until sufficient factual knowledge is gathered or the answer is obtained, and finally leverages LLMs for answer generation. During the path refinement phase, methods such as DoG [15] utilize in-context learning and multi-agent debate to improve the reliability of generated answers. In contrast to this line of work that decomposes questions step-by-step, another research direction [29, 46, 16] encourages LLMs to directly identify sub-goals of questions and perform reasoning over retrieved knowledge triples. However, both paradigms may produce unfaithful answers, which is a critical issue in high-stakes domains like legal decision-making or medical diagnosis. To mitigate this limitation, recent methods [8, 30] first prompt or fine-tune LLMs to generate relation paths according to questions and then retrieve relevant knowledge triples based on those paths to ground the final answer more faithfully. Unlike previous approaches [8, 30], DP adopts a progressive knowledge distillation strategy to fine-tune LLMs, enabling them to generate more faithful relation paths by more effectively exploiting structural information. This enhanced exploitation is achieved through a more comprehensive collection of weak supervision signals and a preference-aware path generation.

B Experiment

B.1 Experimental Setting

Training Detail. The path generator LLaMA3.1-8B-Instruct is loaded from Hugging Face¹ and trained using the LLaMA-Factory² framework. All training is conducted on two NVIDIA A800-80GB GPUs, with bfloat16 precision enabled to reduce memory usage and accelerate training. We employ Low-Rank Adaptation (LoRA) to perform an efficient adaptation of large-scale parameters in SFT and KTO. The LoRA configuration uses a rank of 16, an alpha of 32, and a dropout rate of 0.1 and applies to the query, key, value, and output of the self-attention layers. The initial learning rate of SFT training is set to 5e-5, with a warm-up ratio of 0.1. The KTO training uses an initial learning rate of 1e-5, with a preference beta of 0.1 and a warm-up ratio of 0.1. We use the default weights for positive and negative samples, setting $\lambda_p = \lambda_n = 1$. The batch size of SFT and KTO training is set to 4. The datset statistics are shown in Table 7.

Baseline Introduction. We compare existing state-of-the-art SL, ICL, and HL-based methods with DP to verify the effectiveness and superiority.

https://huggingface.co

²https://github.com/hiyouga/LLaMA-Factory

Table 7: The statistics of WebQSP, CWQ, and MetaQA.

Dataset	KG	Entities	Relations	Triples	Train	Test	Hop
WebQSP	Freebase	2,566,291	7,058	8,309,105	2,826	1,628	2
CWQ	Freebase	2,566,291	7,058	8,309,105	27,639	3,531	4
MetaQA	Wiki-Movie	43,234	9	133,592	329,282	30,903	3

The SL-based methods are introduced as follows. (1) EmbedKGQA [26] addresses multi-hop question answering over sparse KGs by leveraging KG embeddings to predict missing links, effectively mitigating KG incompleteness. Unlike prior approaches, it relaxes answer selection constraints, significantly improving multi-hop reasoning performance on sparse KGs. (2) TransferNet [27] is a transparent and effective model for multi-hop question answering that unifies reasoning over labeled KG relations and textual relations. It iteratively attends to question components and transfers entity scores along activated relations in a differentiable manner, achieving high improvements with interpretable intermediate results. (3) UniKGQA [28] unifies retrieval and reasoning for multi-hop KGQA through a shared model architecture and joint parameter learning. By combining semantic matching with information propagation over KGs, it jointly optimizes retrieval and reasoning, improving accuracy and efficiency on complex questions. (4) RoG [8] integrates LLMs with KGs via a planning-retrieval-reasoning framework that generates KG-grounded relation paths as faithful plans to guide reasoning. This approach enhances reasoning accuracy and interpretability by leveraging structural KG information and supports flexible integration with diverse LLMs. Different from RoG, our proposed framework DP collects question-to-path mappings in the one-to-many form rather than one-to-one. (5) AMAR [10] is an adaptive multi-aspect retrieval framework that enhances LLM reasoning by retrieving and embedding entities, relations, and subgraphs from KGs. It incorporates self-alignment and relevance gating modules to reduce noise and selectively integrate pertinent knowledge, significantly improving accuracy and logical form generation in KGQA tasks. (6) GNN-RAG [24] integrates the graph reasoning capabilities of Graph Neural Networks (GNNs) with the language understanding of LLMs in a retrieval-augmented generation framework. By extracting dense subgraph reasoning paths via GNNs and verbalizing them for LLM reasoning, it effectively addresses multi-hop KGQA and achieves state-of-the-art performance with efficient model sizes.

The ICL-based methods are described below. (1) PoG [29] presents a self-correcting, adaptive planning framework for KG-augmented LLMs that decomposes questions into sub-goals and iteratively explores, updates, and refines reasoning paths over KGs. By integrating guidance, memory, and reflection mechanisms, PoG improves reasoning efficiency and accuracy in complex KGQA tasks. (2) ToG [22] proposes an interactive LLM-KG integration paradigm in which the LLM acts as an agent performing beam search over KGs to identify and reason along promising paths. This training-free, plug-and-play method improves reasoning, knowledge traceability, and correctability, achieving good results with smaller LLMs and reduced computational cost. (3) Readi [30] enables LLMs to efficiently perform multi-hop reasoning over structured data by generating and iteratively editing reasoning paths only when needed. It improves reasoning accuracy and faithfulness while minimizing unnecessary edits, outperforming prior LLM-based methods on both KGQA and TableQA benchmarks. (4) DoG [15] is an iterative interactive KGQA framework that improves LLM reasoning through a subgraph-focusing mechanism and a multi-role debate strategy. By reducing distractions from long reasoning paths and mitigating false-positive relations, DoG enables more accurate and reliable answers in complex KGQA scenarios.

The HL-based methods are summarized as follows. (1) Interactive-KBQA [31] enables LLMs to generate executable logical forms through direct interaction with knowledge bases under minimal supervision. By introducing general APIs and few-shot exemplars for complex questions, it supports step-by-step reasoning and iterative refinement, achieving strong results in low-resource KGQA settings. (2) LightPROF [32] is a lightweight and efficient framework for KGQA that enhances LLM reasoning by structurally integrating KGs into prompts. It retrieves relevant subgraphs, encodes their factual and structural information via a trainable Knowledge adapter, and maps them into the LLM embedding space, enabling effective reasoning with minimal parameter updates.

B.2 Instruction and Exemplar

We show the instructions and exemplars utilized in the module within the *Planning* and *Introspection* stages.

B.2.1 Path Generation

Please generate relation paths that can help in reasoning to answer the question. The relation paths must start from the topic entities mentioned in the question. The question is: {question}, and the topic entities are: {topic_entities}

B.2.2 Constraint Extraction

Example 5:

- Question: What genre is the movie Titanic?

- Output: ["1. The answer should be a genre of the movie"]

You will be given a question. Your task is to identify and extract any constraints present in the question. **Types of constraints to extract:** 1. Type Constraint: - The answer should be of a specific type or category. 2. Multi-Entity Constraint: - The question contains multiple entities and requires the answer to simultaneously satisfy conditions related to these entities. 3. Explicit Time Constraint: - A specific time period or date is mentioned explicitly. 4. Implicit Time Constraint: - A time period or date is indirectly implied. 5. Order Constraint: - The question involves a sequence or ordering. Instructions: - **Extract only present constraints**: Do not add constraints not explicitly or implicitly mentioned in the question. - **Output Format**: Return a **List object** with the identified constraints. Each constraint type should either contain the relevant information or an empty string if not applicable. In-Context Few-Shot Example 1: - Question: What country bordering France contains an airport that serves Nijmegen? - Output: ["1. The answer should be a country", "2. The country borders France", "3. The country contains an airport that serves Nijmegen."] Example 2: - Question: what did james k polk do before he was president - Output: ["1. The question implies the time before James K. Polk was president"] Example 3: - Question: Who was the 1996 coach of the team owned by Jerry Jones? - Output: ["1. The team is owned by Jerry Jones", "2. The person was the coach in 1996"] Example 4: - Question: What was the last World Series won by the team whose mascot is Lou Seal? - Output: ["1. The team is the one whose mascot is Lou Seal", "2. The answer should be a World Series", "3. The World Series is the last one won by the team"]

#####
Input question: {question}
Output:

B.2.3 Path Selection Based on the reasoning relation paths in Freebase, think step by step to select the most one relevant path to answer the question. You will be given: - Question: The question to be answered. - Topic Entities: The main entities identified in the question. - Memory: Paths have been selected and the feedback of the previous step. - Reasoning Paths: A set of reasoning paths starting from the topic entities. In-Context Few-Shot Example 1: - Question: What sports team owned by George Steinbrenner did Deion Sanders play baseball for?, - Topic Entities: ['Baseball', 'Deion Sanders', 'George Steinbrenner'], - Memory: [], - Reasoning Paths: ['Path 1: Baseball -> base.sportbase.sport.played_by_clubs -> Unknown Entity', 'Path 2: Deion Sanders -> sports.pro_athlete.teams -> Unknown Entity -> sports.sports_team_roster.team -> Unknown Entity', 'Path 3: Deion Sanders -> baseball.baseball_player.batting_stats -> Unknown Entity -> baseball. batting_statistics.team -> Unknown Entity', 'Path 4: George Steinbrenner -> sports. sports_team_owner.teams_owned -> Unknown Entity'] - Output: {{Path 2}} - This path starts from Deion Sanders, follows his professional athlete teams, and connects to a specific sports team. Since the question asks for the team he played baseball for, this path is the most relevant in identifying the correct team. Example 2: - Question: What movie was Charlie Hunnam in that was about human extinction?, - Topic Entities: ['Human extinction', 'Charlie Hunnam'], - Memory: [{{'selected_path': 'Charlie Hunnam -> film.actor.film -> Unknown Entity -> film.performance.film -> Unknown Entity', 'feedback': 'This path connects Charlie Hunnam to films he has acted in, but we need to find which movie is about human extinction.'}}], - Reasoning Paths: ['Path 1: Human extinction -> film.film_subject.films -> Unknown Entity', 'Path 2: Charlie Hunnam -> film.actor.film -> Unknown Entity -> film. performance.film -> Unknown Entity', 'Path 3: Charlie Hunnam -> common.topic. notable_types -> Unknown Entity', 'Path 4: Charlie Hunnam -> tv.tv_actor.'
starring_roles -> Unknown Entity -> tv.regular_tv_appearance.character -> Unknown

- Output: {{Path 1}} - The previous selected path connected Charlie Hunnam to films he acted in but did not ensure the movie was about human extinction. This path directly connects "Human extinction" to relevant films, making it the best choice to identify the correct movie.

Example 3:

Entity']

- Question: Which state with Colorado River that Larry Owens was born in?
- Topic Entities: ['Colorado River', 'Larry Owens'],
- Memory: [{{'selected_path': 'Colorado River -> location.location.

partially_containedby -> Unknown Entity', 'feedback': 'This path connects Colorado River to a location, but we need to find the state Larry Owens was born in.'}}],

- Reasoning Paths: ['Path 1: Larry Owens -> people.person.spouse_s -> Unknown Entity -> people.sibling_relationship.sibling -> Unknown Entity']
- Output: $\{\{\text{no path}\}\}\$ None of the available paths lead to information about the state where Larry Owens was born.

B.2.4 Constraint Verification

```
Given a question and the associated retrieved knowledge triplets from Freebase, your
task is to answer the question with these triplets and your knowledge.
You will be given:
- Question: The question to be answered.
- Topic Entity: The main entity identified in the question.
- Constraints: The constraints extracted from the question that should be verified.
- Reasoning Paths: Paths starting from the topic entity (contains only relations).
- Knowledge Triplets: The instantiated reasoning paths in the form of triplets (
entity, relation, entity).
Think step by step to answer the question:
- List all potential answers (**tail entities**) based on the knowledge triplets,
ranking them by how likely they satisfy the question and constraints, and placing
the most likely ones first.
- Check if the answer satisfies the constraints and provide an explanation detailing
the reasoning process and any missing knowledge needed for full verification.
Return a **JSON object** with the identified constraints.
Important:
- DO NOT output anything except the JSON result.
- DO NOT add explanations, headers, or markdown formatting.
- Return only the JSON object shown in examples.
- Output must be a valid JSON object. All strings and keys must be enclosed in
double quotes.
- Only return the JSON object, no explanation or prefix like "Output:".
Format of the output:
{{"answer": [...], "sufficient": "Yes"/"No", "reason": "..."}}
In-Context Few-Shot
Example 1:
- Question: what is the name of justin bieber brother
- Topic Entity: ["Justin Bieber"],
- Constraints: [],
- Reasoning Path: ["Justin Bieber -> people.person.sibling_s -> Unknown Entity ->
people.sibling_relationship.sibling -> Unknown Entity"],
.
- Knowledge Triplets: [[["Justin Bieber", "people.person.sibling_s", "m.0gxnnwp"],
["m.Ogxnnwp", "people.sibling_relationship.sibling", "Jaxon Bieber"]]]
- Output: {{"answer": ["Jaxon Bieber"], "sufficient": "Yes", "reason": "Based on the
reasoning path, the answer is Jaxon Bieber, which is the sibling of Justin Bieber
."}}
Example 2:
- Question: What movie was Charlie Hunnam in that was about human extinction?,
- Topic Entities: ["Human extinction", "Charlie Hunnam"],
- Constraints: ["1. The movie is a film Charlie Hunnam acted in.", "2. The movie is
about human extinction."],
- Reasoning Path: ["Charlie Hunnam -> film.actor.film -> Unknown Entity -> film.
performance.film -> Unknown Entity"],
- Knowledge Triplets: [[[["Charlie Hunnam", "film.actor.film", "m.0jwksr"], ["m.0
jwksr", "film.performance.film", "Cold Mountain"]],[["Charlie Hunnam", "film.actor.
film", "m.0jy_sj"], ["m.0jy_sj", "film.performance.film", "Green Street"]],[["
Charlie Hunnam", "film.actor.film", "m.046168c"], ["m.046168c", "film.performance.
film", "Children of Men"]]]]
- Output: {{"answer": ["Children of Men", "Green Street", "Cold Mountain"], "
sufficient": "No", "reason": "The reasoning path connects Charlie Hunnam to films he
has acted in, but we need to find which movie is about human extinction."}}
```

B.3 DP performance with various LLMs

The detailed DP performance with various LLMs, presented as mean values with standard deviations, on WebQSP and CWQ is summarized in Table 8.

Table 8: DP performance (mean with standard deviation) on WebQSP and CWQ. The results are averaged over three independent evaluations. We highlight the best performance in bold and the second-best in underline. LM denotes the language model used.

LM	WebQSP			CWQ			MetaQA			
LIVI	Н	H@1	F1	Н	H@1	F1	H	H@1	F1	
LLaMA3.1-8B	87.9±0.2	82.8±0.4	75.7±0.8	70.8±0.3	61.1±0.4	58.5±0.9	90.2±0.1	87.4±0.2	84.1±0.5	
Qwen3-8B	75.1 ± 0.5	82.7 ± 0.3	72.3 ± 0.6	76.1 ± 0.6	61.7 ± 0.4	60.2 ± 0.7	90.4 ± 0.3	89.2 ± 0.2	88.6 ± 0.2	
GPT-3.5	89.7 ± 0.6	86.9 ± 0.3	79.2 ± 0.3	80.0 ± 0.6	72.6 ± 0.1	69.2 ± 0.4	96.7 ± 0.1	95.4 ± 0.3	90.8 ± 0.4	
GPT-4o	90.7 ±0.6	87.5 ± 0.8	81.4 ± 0.5	85.2 ± 0.4	74.6 ± 0.5	70.5 ± 0.5	$\overline{96.5} \pm 0.6$	$\overline{95.2}_{\pm 0.4}$	94.4 ± 0.4	
GPT-4.1	90.6 ± 0.5	$86.7{\scriptstyle\pm0.4}$	$\underline{80.1}{\pm0.8}$	87.2 ± 0.2	75.8 ± 0.7	69.4 ± 0.9	$96.8 {\pm} 0.2$	95.5 ± 0.3	94.9 ± 0.1	

B.4 Exemplar Impacts

We conduct experiments on CWQ and WebQSP to investigate how the number of exemplars influences response generation. As shown in Figure 5, the performance, measured by H@1, declines as the number of exemplars increases. This degradation may stem from two main factors: (1) A larger number of exemplars results in a longer input context, making it more challenging for the model to capture semantic information effectively. (2) The diversity of exemplars remains relatively unchanged despite the increased quantity, which may cause LLMs to become less confident when encountering out-of-distribution scenarios.

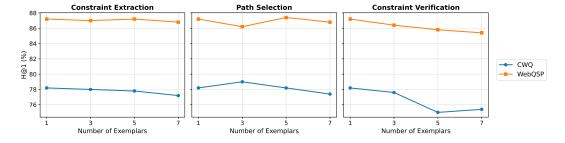


Figure 5: Impact of the number of exemplars on response generation. The results are evaluated by H@1.

B.5 Interaction with Different LLMs

Figure 6 presents the token consumption and LLM invocation statistics of DP when interacting with various LLMs on the CWQ and WebQSP datasets. The results are averaged over three runs. We see that DP with various LLMs consumes similar tokens and LLM calls to answer a question, except for Qwen3-8B, which shows higher consumption due to its inherently slow thinking mechanisms. It is worth noting that the token consumption for path generation is excluded from this analysis, as that component is executed offline. Overall, these results further validate the practicality and efficiency of the proposed DP framework in real-world scenarios.

B.6 Case Study

We conduct case studies to qualitatively analyze the strengths and limitations of the proposed framework DP. Figure 7 and 8 illustrate successful cases, while Figure 9 and 10 showcase failure cases. In the successful examples, DP effectively guides LLMs to generate accurate answers by selecting appropriate reasoning paths. When a reasoning path fails to satisfy certain extracted constraints, DP can provide informative feedback, explicitly indicating which constraint is violated.

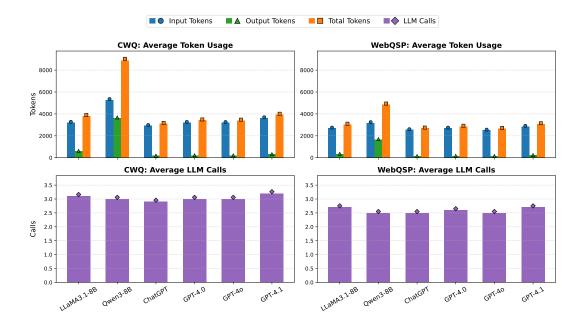


Figure 6: Average token usage and calls of different LLMs.

In contrast, the failure cases highlight two types of errors: incorrect path generation and flawed reasoning. Notably, in the case of path generation errors, the generated paths by DP closely resemble the ground-truth paths, implying that a more robust mechanism may be required better to capture the structural patterns inherent in KGs. In the case of reasoning errors, we see that the LLM fails to cover all accurate answers, although the reasoning paths contain the required knowledge facts.

```
Question: [Mary] is a notable figure in which religion that is observed in [Indonesia]?
Path Generation:
Path 1: Indonesia -> location.statistical_region.religions ->Unknown Entity -> location.religion_percentage.religion ->
Unknown Entity
Path 2: Mary -> people.person.religion -> Unknown Entity
Path 3: Mary -> base.saints.saint.venerated_in -> Unknown Entity
     Constraint Extraction:
1. The answer should be a religion
2. The religion is observed in Indonesia
3. Mary is a notable figure in the religion
Path Selection:
{Path 1} - This path starts from Indonesia and connects to religions observed in the country. Since the question is
asking about the religion that Mary is a notable figure in that is observed in Indonesia, this path is the most
relevant to identify the correct religion.
Instantiation:
[[[['Indonesia', 'location.statistical_region.religions', 'm.03xf2_w'], ['m.03xf2_w', 'location.religion_percentage.religion',
'Islam']],
[['Indonesia', 'location.statistical_region.religions', 'm.03xf301'], ['m.03xf301', 'location.religion_percentage.religion',
'Protestantism']],
[['Indonesia', 'location.statistical_region.religions', 'm.064szk2'], ['m.064szk2', 'location.religion_percentage.religion',
'Catholicism']]]]
Constraint Verification:
{ "answer": ["Islam", "Protestantism", "Catholicism"],
 "sufficient": "No",
 "reason": "The reasoning path connects Indonesia to religions observed in the country. However, we need to
further verify which religion Mary, as a notable figure, is associated with in Indonesia."}
(Constraint 1: ✓ Constraint 2: ✓ Constraint 3: 🔀 )
Path 1: Mary -> people.person.religion -> Unknown Entity
Path 2: Mary -> base.saints.saint.venerated_in -> Unknown Entity
Path Selection:
{Path 1} – This path starts from Mary and connects to her religion. Since the question specifically asks about the
religion associated with Mary as a notable figure, this path directly provides the required information.
Instantiation:
[[[['Indonesia', 'location.statistical_region.religions', 'm.03xf2_w'], ['m.03xf2_w', 'location.religion_percentage.religion',
'Islam']],
[['Indonesia', 'location.statistical_region.religions', 'm.03xf301'], ['m.03xf301', 'location.religion_percentage.religion',
'Protestantism']],
[['Indonesia', 'location.statistical_region.religions', 'm.064szk2'], ['m.064szk2', 'location.religion_percentage.religion',
'Catholicism']]],
[[['Mary', 'people.person.religion', 'Judaism']], [['Mary', 'people.person.religion', 'Catholicism']]]]
Constraint Verification:
 "answer": ["Catholicism"],
  "sufficient": "Yes",
 "reason": "Based on the reasoning paths, we find that Indonesia observes Islam, Protestantism, and Catholicism.
Mary is associated with both Judaism and Catholicism. Considering the constraints, the answer is Catholicism, which
is a religion observed in Indonesia and Mary, a notable figure, is associated with it."}
(Constraint 1: 🗸 Constraint 2: 🔽 Constraint 3: 🔽 )
Answer: "Catholicism"
```

Figure 7: Successful case requiring path selection again.



Figure 8: Successful case without another iteration.

Question: Before the Euro, what was the currency where [Louis-Eugene Cavaignac] was appointed to governmental

```
position?
Path Generation:
Path 1: Louis-Eugène Cavaignac -> people.person.nationality -> Unknown Entity -> <mark>location.country.currency_used</mark> ->
[Ground Relation Path: [people.person.nationality -> location.country. currency _formerly_used]
    Constraint Extraction:
1. The answer should be a currency
2. The currency was in use before the Euro
3. The currency was used in the place where Louis-Eugene Cavaignac was appointed to governmental position
[Only one path, no need to select]
Instantiation:
[[[['Louis-Eugène Cavaignac', 'people.person.nationality', 'France'], ['France', 'location.country.currency_used', 'CFP
franc']],
[['Louis-Eugène Cavaignac', 'people.person.nationality', 'France'], ['France', 'location.country.currency_used', 'Euro']]]]
Constraint Verification:
{ "answer": ["CFP franc", "Euro"],
  "sufficient": "No",
 "reason": "The reasoning links Cavaignac to France and lists CFP franc and Euro as currencies. However, the Euro
is excluded due to timing, and the CFP franc is mainly used in overseas territories, not mainland France where
Cavaignac served. Thus, neither currency fully satisfies the constraints."}
(Constraint 1: 🗸 Constraint 2: 🔀 Constraint 3: 🔀 )
[No remaining path, end iteration]
Answer: "CFP franc", "Euro"
Ground truth of the question: ['Assignat', 'French franc']
```

Figure 9: Case of path generation error.

Question: Which Super Bowl was won by the team that also won the AFC Championship Game in 2013? Path Generation Path 1: Super bowl -> freebase.type_profile.equivalent_topic -> Unknown Entity ->time.recurrinq_event.instances -> Unknown Entity Path 2: Super bowl -> freebase.type_profile.equivalent_topic -> Unknown Entity -> sports.sports_championship.events -> Unknown Entity Path 3: 2013 AFC Championship Game -> sports.sports_championship_event.championship -> Unknown Entity -> time.recurring_event.instances -> Unknown Entity Path 4:m2013 AFC Championship Game -> sports.sports_championship_event.championship -> Unknown Entity -> sports.sports_championship.events -> Unknown Entity .- Path 5:m2013 AFC Championship Game -> sports.sports_championship_event.champion -> Unknown Entity sports.sports team.championships -> Unknown Entity Path 6: 2013 AFC Championship Game -> sports.sports_championship_event.season -> Unknown Entity -> sports.sports_league_season.championship -> Unknown Entity Constraint Extraction: 1. The answer should be a Super Bowl 2. The team won both the Super Bowl and the AFC Championship Game in 2013 Path 5} - This path starts from the 2013 AFC Championship Game, follows to the champion of the event, and then connects that team to their championships. Since the question asks which Super Bowl was won by the team that won the 2013 AFC Championship Game, this path is the most relevant to identify the Super Bowl won by that specific team. Instantiation: [[[[ˈ2013 AFC Championship Game', 'sports.sports_championship_event.champion', 'Baltimore Ravens'], ['Baltimore Ravens', 'sports.sports_team.championships', 'Super Bowl XLVII']], [['2013 AFC Championship Game', 'sports.sports_championship_event.champion', 'Baltimore Ravens'], ['Baltimore Ravens', 'sports.sports_team.championships', '2001 AFC Championship Game']], [['2013 AFC Championship Game', 'sports.sports_championship_event.champion', 'Baltimore Ravens'], ['Baltimore Ravens', 'sports.sports_team.championships', 'Super Bowl XXXV']]]]} Constraint Verification: {"answer": ["Super Bowl XLVII"], "sufficient": "Yes". "reason": "According to the triplets, the Baltimore Ravens were the champions of the 2013 AFC Championship Game and have won several championships, including Super Bowl XLVII, Super Bowl XXXV, and the 2001 AFC Championship Game. However, the constraints specify the Super Bowl won by the team that also won the AFC Championship Game in 2013. Only Super Bowl XLVII matches both constraints, as it was the Super Bowl played following the 2012 NFL season, with the AFC Championship Game played in early 2013 and both won by the Baltimore Ravens. The other listed championships do not satisfy the year constraint. Therefore, 'Super Bowl XLVII' is the only answer that satisfies both constraints."} (Constraint 1: Constraint 2: Constraint 3:) Ground truth of the question: ['Super Bowl XXXV', 'Super Bowl XLVII']

Figure 10: Case of reasoning error.

NeurIPS Paper Checklist

1. Claims

Question: Do the main claims made in the abstract and introduction accurately reflect the paper's contributions and scope?

Answer: [Yes]

Justification: We show the main claim in the abstract and introduction. Specifically, we have concluded four contributions in Section 1.

Guidelines:

- The answer NA means that the abstract and introduction do not include the claims made in the paper.
- The abstract and/or introduction should clearly state the claims made, including the contributions made in the paper and important assumptions and limitations. A No or NA answer to this question will not be perceived well by the reviewers.
- The claims made should match theoretical and experimental results, and reflect how much the results can be expected to generalize to other settings.
- It is fine to include aspirational goals as motivation as long as it is clear that these goals
 are not attained by the paper.

2. Limitations

Question: Does the paper discuss the limitations of the work performed by the authors?

Answer: [Yes]

Justification: We have discussed the limitation in Section 5. While this work advances trustworthy LLM reasoning by incorporating knowledge priors, it still relies on human intervention to define constraints when applied to vertical domains. In the ablation experiment, we explore replacing the manual definition with automatic summarization. The results present a significant decrease. In future work, we plan to investigate automatic methods for extracting and summarizing constraint types, aiming to further reduce manual effort and enhance scalability.

- The answer NA means that the paper has no limitation while the answer No means that the paper has limitations, but those are not discussed in the paper.
- The authors are encouraged to create a separate "Limitations" section in their paper.
- The paper should point out any strong assumptions and how robust the results are to violations of these assumptions (e.g., independence assumptions, noiseless settings, model well-specification, asymptotic approximations only holding locally). The authors should reflect on how these assumptions might be violated in practice and what the implications would be.
- The authors should reflect on the scope of the claims made, e.g., if the approach was only tested on a few datasets or with a few runs. In general, empirical results often depend on implicit assumptions, which should be articulated.
- The authors should reflect on the factors that influence the performance of the approach. For example, a facial recognition algorithm may perform poorly when image resolution is low or images are taken in low lighting. Or a speech-to-text system might not be used reliably to provide closed captions for online lectures because it fails to handle technical jargon.
- The authors should discuss the computational efficiency of the proposed algorithms and how they scale with dataset size.
- If applicable, the authors should discuss possible limitations of their approach to address problems of privacy and fairness.
- While the authors might fear that complete honesty about limitations might be used by reviewers as grounds for rejection, a worse outcome might be that reviewers discover limitations that aren't acknowledged in the paper. The authors should use their best judgment and recognize that individual actions in favor of transparency play an important role in developing norms that preserve the integrity of the community. Reviewers will be specifically instructed to not penalize honesty concerning limitations.

3. Theory assumptions and proofs

Question: For each theoretical result, does the paper provide the full set of assumptions and a complete (and correct) proof?

Answer: [NA]
Justification: NA.

Guidelines:

- The answer NA means that the paper does not include theoretical results.
- All the theorems, formulas, and proofs in the paper should be numbered and cross-referenced.
- All assumptions should be clearly stated or referenced in the statement of any theorems.
- The proofs can either appear in the main paper or the supplemental material, but if they appear in the supplemental material, the authors are encouraged to provide a short proof sketch to provide intuition.
- Inversely, any informal proof provided in the core of the paper should be complemented by formal proofs provided in appendix or supplemental material.
- Theorems and Lemmas that the proof relies upon should be properly referenced.

4. Experimental result reproducibility

Question: Does the paper fully disclose all the information needed to reproduce the main experimental results of the paper to the extent that it affects the main claims and/or conclusions of the paper (regardless of whether the code and data are provided or not)?

Answer: [Yes]

Justification: We have introduced the detailed settings such as implementation details and baselines in Section 4.1 and B.1. We also have released the code with a detailed "readme.md".

- The answer NA means that the paper does not include experiments.
- If the paper includes experiments, a No answer to this question will not be perceived well by the reviewers: Making the paper reproducible is important, regardless of whether the code and data are provided or not.
- If the contribution is a dataset and/or model, the authors should describe the steps taken to make their results reproducible or verifiable.
- Depending on the contribution, reproducibility can be accomplished in various ways. For example, if the contribution is a novel architecture, describing the architecture fully might suffice, or if the contribution is a specific model and empirical evaluation, it may be necessary to either make it possible for others to replicate the model with the same dataset, or provide access to the model. In general, releasing code and data is often one good way to accomplish this, but reproducibility can also be provided via detailed instructions for how to replicate the results, access to a hosted model (e.g., in the case of a large language model), releasing of a model checkpoint, or other means that are appropriate to the research performed.
- While NeurIPS does not require releasing code, the conference does require all submissions to provide some reasonable avenue for reproducibility, which may depend on the nature of the contribution. For example
- (a) If the contribution is primarily a new algorithm, the paper should make it clear how to reproduce that algorithm.
- (b) If the contribution is primarily a new model architecture, the paper should describe the architecture clearly and fully.
- (c) If the contribution is a new model (e.g., a large language model), then there should either be a way to access this model for reproducing the results or a way to reproduce the model (e.g., with an open-source dataset or instructions for how to construct the dataset).
- (d) We recognize that reproducibility may be tricky in some cases, in which case authors are welcome to describe the particular way they provide for reproducibility.

In the case of closed-source models, it may be that access to the model is limited in some way (e.g., to registered users), but it should be possible for other researchers to have some path to reproducing or verifying the results.

5. Open access to data and code

Question: Does the paper provide open access to the data and code, with sufficient instructions to faithfully reproduce the main experimental results, as described in supplemental material?

Answer: [Yes]

Justification: We have released the code in https://anonymous.4open.science/r/Deliberation-on-Priors with a detailed "readme.md." We have clearly described and cited the work of datasets.

Guidelines:

- The answer NA means that paper does not include experiments requiring code.
- Please see the NeurIPS code and data submission guidelines (https://nips.cc/public/guides/CodeSubmissionPolicy) for more details.
- While we encourage the release of code and data, we understand that this might not be possible, so "No" is an acceptable answer. Papers cannot be rejected simply for not including code, unless this is central to the contribution (e.g., for a new open-source benchmark).
- The instructions should contain the exact command and environment needed to run to reproduce the results. See the NeurIPS code and data submission guidelines (https://nips.cc/public/guides/CodeSubmissionPolicy) for more details.
- The authors should provide instructions on data access and preparation, including how
 to access the raw data, preprocessed data, intermediate data, and generated data, etc.
- The authors should provide scripts to reproduce all experimental results for the new proposed method and baselines. If only a subset of experiments are reproducible, they should state which ones are omitted from the script and why.
- At submission time, to preserve anonymity, the authors should release anonymized versions (if applicable).
- Providing as much information as possible in supplemental material (appended to the paper) is recommended, but including URLs to data and code is permitted.

6. Experimental setting/details

Question: Does the paper specify all the training and test details (e.g., data splits, hyperparameters, how they were chosen, type of optimizer, etc.) necessary to understand the results?

Answer: [Yes]

Justification: We have described the training and test details in Section 4.1 and B.1. The full details are shown in the released code https://anonymous.4open.science/r/Deliberation-on-Priors.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The experimental setting should be presented in the core of the paper to a level of detail that is necessary to appreciate the results and make sense of them.
- The full details can be provided either with the code, in appendix, or as supplemental material.

7. Experiment statistical significance

Question: Does the paper report error bars suitably and correctly defined or other appropriate information about the statistical significance of the experiments?

Answer: [Yes]

Justification: The results shown in Table 2 and 6 are obtained by computing the average performance and the standard deviation based on three independent runs.

- The answer NA means that the paper does not include experiments.
- The authors should answer "Yes" if the results are accompanied by error bars, confidence intervals, or statistical significance tests, at least for the experiments that support the main claims of the paper.
- The factors of variability that the error bars are capturing should be clearly stated (for example, train/test split, initialization, random drawing of some parameter, or overall run with given experimental conditions).
- The method for calculating the error bars should be explained (closed form formula, call to a library function, bootstrap, etc.)
- The assumptions made should be given (e.g., Normally distributed errors).
- It should be clear whether the error bar is the standard deviation or the standard error of the mean.
- It is OK to report 1-sigma error bars, but one should state it. The authors should preferably report a 2-sigma error bar than state that they have a 96% CI, if the hypothesis of Normality of errors is not verified.
- For asymmetric distributions, the authors should be careful not to show in tables or figures symmetric error bars that would yield results that are out of range (e.g. negative error rates).
- If error bars are reported in tables or plots, The authors should explain in the text how they were calculated and reference the corresponding figures or tables in the text.

8. Experiments compute resources

Question: For each experiment, does the paper provide sufficient information on the computer resources (type of compute workers, memory, time of execution) needed to reproduce the experiments?

Answer: [Yes]

Justification: We have shown the computing resources such as GPU in Section B.1.

Guidelines:

- The answer NA means that the paper does not include experiments.
- The paper should indicate the type of compute workers CPU or GPU, internal cluster, or cloud provider, including relevant memory and storage.
- The paper should provide the amount of compute required for each of the individual experimental runs as well as estimate the total compute.
- The paper should disclose whether the full research project required more compute than the experiments reported in the paper (e.g., preliminary or failed experiments that didn't make it into the paper).

9. Code of ethics

Question: Does the research conducted in the paper conform, in every respect, with the NeurIPS Code of Ethics https://neurips.cc/public/EthicsGuidelines?

Answer: [Yes]

Justification: Our paper and code adhere to the NeurIPS Code of Ethics.

Guidelines:

- The answer NA means that the authors have not reviewed the NeurIPS Code of Ethics.
- If the authors answer No, they should explain the special circumstances that require a deviation from the Code of Ethics.
- The authors should make sure to preserve anonymity (e.g., if there is a special consideration due to laws or regulations in their jurisdiction).

10. **Broader impacts**

Question: Does the paper discuss both potential positive societal impacts and negative societal impacts of the work performed?

Answer: [Yes]

Justification: We explore the integration of DP and various LLMs in Table 2. The societal impact, such as generating trustworthy responses has been discussed in the analysis.

Guidelines:

- The answer NA means that there is no societal impact of the work performed.
- If the authors answer NA or No, they should explain why their work has no societal impact or why the paper does not address societal impact.
- Examples of negative societal impacts include potential malicious or unintended uses (e.g., disinformation, generating fake profiles, surveillance), fairness considerations (e.g., deployment of technologies that could make decisions that unfairly impact specific groups), privacy considerations, and security considerations.
- The conference expects that many papers will be foundational research and not tied to particular applications, let alone deployments. However, if there is a direct path to any negative applications, the authors should point it out. For example, it is legitimate to point out that an improvement in the quality of generative models could be used to generate deepfakes for disinformation. On the other hand, it is not needed to point out that a generic algorithm for optimizing neural networks could enable people to train models that generate Deepfakes faster.
- The authors should consider possible harms that could arise when the technology is being used as intended and functioning correctly, harms that could arise when the technology is being used as intended but gives incorrect results, and harms following from (intentional or unintentional) misuse of the technology.
- If there are negative societal impacts, the authors could also discuss possible mitigation strategies (e.g., gated release of models, providing defenses in addition to attacks, mechanisms for monitoring misuse, mechanisms to monitor how a system learns from feedback over time, improving the efficiency and accessibility of ML).

11. Safeguards

Question: Does the paper describe safeguards that have been put in place for responsible release of data or models that have a high risk for misuse (e.g., pretrained language models, image generators, or scraped datasets)?

Answer: [Yes]

Justification: We propose a trustworthy framework for large language model reasoning, which has been described in Section 3. The framework employs a progressive knowledge distillation strategy to enhance faithfulness and a reasoning-introspection strategy to promote the reliability of response generation. We have verified the effectiveness on various LLMs.

Guidelines:

- The answer NA means that the paper poses no such risks.
- Released models that have a high risk for misuse or dual-use should be released with
 necessary safeguards to allow for controlled use of the model, for example by requiring
 that users adhere to usage guidelines or restrictions to access the model or implementing
 safety filters.
- Datasets that have been scraped from the Internet could pose safety risks. The authors should describe how they avoided releasing unsafe images.
- We recognize that providing effective safeguards is challenging, and many papers do not require this, but we encourage authors to take this into account and make a best faith effort.

12. Licenses for existing assets

Question: Are the creators or original owners of assets (e.g., code, data, models), used in the paper, properly credited and are the license and terms of use explicitly mentioned and properly respected?

Answer: [Yes]

Justification: We have cited the corresponding work of the owners of assets used in this paper.

- The answer NA means that the paper does not use existing assets.
- The authors should cite the original paper that produced the code package or dataset.

- The authors should state which version of the asset is used and, if possible, include a URL.
- The name of the license (e.g., CC-BY 4.0) should be included for each asset.
- For scraped data from a particular source (e.g., website), the copyright and terms of service of that source should be provided.
- If assets are released, the license, copyright information, and terms of use in the
 package should be provided. For popular datasets, paperswithcode.com/datasets
 has curated licenses for some datasets. Their licensing guide can help determine the
 license of a dataset.
- For existing datasets that are re-packaged, both the original license and the license of the derived asset (if it has changed) should be provided.
- If this information is not available online, the authors are encouraged to reach out to the asset's creators.

13. New assets

Question: Are new assets introduced in the paper well documented and is the documentation provided alongside the assets?

Answer: [Yes]

Justification: We have introduced our released code and model using a clear "readme.md." Guidelines:

- The answer NA means that the paper does not release new assets.
- Researchers should communicate the details of the dataset/code/model as part of their submissions via structured templates. This includes details about training, license, limitations, etc.
- The paper should discuss whether and how consent was obtained from people whose asset is used.
- At submission time, remember to anonymize your assets (if applicable). You can either create an anonymized URL or include an anonymized zip file.

14. Crowdsourcing and research with human subjects

Question: For crowdsourcing experiments and research with human subjects, does the paper include the full text of instructions given to participants and screenshots, if applicable, as well as details about compensation (if any)?

Answer: [NA]
Justification: NA.

Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Including this information in the supplemental material is fine, but if the main contribution of the paper involves human subjects, then as much detail as possible should be included in the main paper.
- According to the NeurIPS Code of Ethics, workers involved in data collection, curation, or other labor should be paid at least the minimum wage in the country of the data collector.

15. Institutional review board (IRB) approvals or equivalent for research with human subjects

Question: Does the paper describe potential risks incurred by study participants, whether such risks were disclosed to the subjects, and whether Institutional Review Board (IRB) approvals (or an equivalent approval/review based on the requirements of your country or institution) were obtained?

Answer: [NA]
Justification: NA.
Guidelines:

- The answer NA means that the paper does not involve crowdsourcing nor research with human subjects.
- Depending on the country in which research is conducted, IRB approval (or equivalent) may be required for any human subjects research. If you obtained IRB approval, you should clearly state this in the paper.
- We recognize that the procedures for this may vary significantly between institutions and locations, and we expect authors to adhere to the NeurIPS Code of Ethics and the guidelines for their institution.
- For initial submissions, do not include any information that would break anonymity (if applicable), such as the institution conducting the review.

16. Declaration of LLM usage

Question: Does the paper describe the usage of LLMs if it is an important, original, or non-standard component of the core methods in this research? Note that if the LLM is used only for writing, editing, or formatting purposes and does not impact the core methodology, scientific rigorousness, or originality of the research, declaration is not required.

Answer: [Yes]

Justification: We have described the usage of LLMs in the analysis of Table 2 and 6. Guidelines:

- The answer NA means that the core method development in this research does not involve LLMs as any important, original, or non-standard components.
- Please refer to our LLM policy (https://neurips.cc/Conferences/2025/LLM) for what should or should not be described.