

# RELATIONAL ATTENTION: GENERALIZING TRANSFORMERS FOR GRAPH-STRUCTURED TASKS

**Cameron Diao** \*  
Department of Computer Science  
Rice University  
cwd2@rice.edu

**Ricky Loynd**  
Microsoft Research  
riloynd@microsoft.com

## ABSTRACT

Transformers flexibly operate over sets of real-valued vectors representing task-specific entities and their attributes, where each vector might encode one word-piece token and its position in a sequence, or some piece of information that carries no position at all. But as set processors, standard transformers are at a disadvantage in reasoning over more general graph-structured data where nodes represent entities and edges represent relations *between* entities. To address this shortcoming, we generalize transformer attention to consider and update edge vectors in each transformer layer. We evaluate this *relational transformer* on a diverse array of graph-structured tasks, including the large and challenging CLRS Algorithmic Reasoning Benchmark. There, it dramatically outperforms state-of-the-art graph neural networks expressly designed to reason over graph-structured data. Our analysis demonstrates that these gains are attributable to relational attention’s inherent ability to leverage the greater expressivity of graphs over sets.

## 1 INTRODUCTION

Graph-structured problems turn up in many domains, including knowledge bases (Hu et al., 2021; Bordes et al., 2013), communication networks (Leskovec et al., 2010), citation networks (McCallum et al., 2000), and molecules (Debnath et al., 1991; Zhang et al., 2020b). One example is predicting the bioactive properties of a molecule, where the atoms of the molecule are the nodes of the graph and the bonds are the edges. Along with their ubiquity, graph-structured problems vary widely in difficulty. For example, certain graph problems can be solved with a simple multi-layer perceptron, while others are quite challenging and require explicit modeling of relational characteristics.

Graph Neural Networks (GNNs) are designed to process graph-structured data, including the graph’s (possibly directed) edge structure and (in some cases) features associated with the edges. In particular, they learn to represent graph features by passing messages between neighboring nodes and edges, and updating the node and (optionally) edge vectors. Importantly, GNNs typically restrict message passing to operate over the edges in the graph.

Standard transformers lack the relational inductive biases (Battaglia et al., 2018) that are explicitly built into the most commonly used GNNs. Instead, the transformer fundamentally consumes *unordered sets* of real-valued vectors, injecting no other assumptions. This allows entities carrying domain-specific attributes (like position) to be encoded as vectors for input to the same transformer architecture applied to different domains. Transformers have produced impressive results in a wide

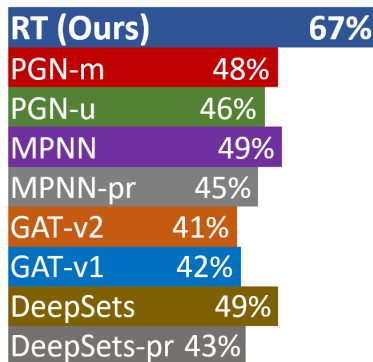


Figure 1: The relational transformer (RT) outperforms baseline GNNs on a set of 30 distinct graph-structured tasks from CLRS-30, averaged by algorithm class.

\*Work was done during an internship at Microsoft Research.




One layer of computation	Edge Vector Incorporation	Transformer Machinery		
		None	Some	Full
	Round-trip node-edge communication	Some GNNs	A few models	<b><i>RT: Relational Transformer</i></b>
	Restricted node-edge communication	<b><i>Most common GNNs</i></b>	Some GNNs and transformer variants	Some transformer variants
	No edge vectors	—	—	<b><i>Standard transformer</i></b>

Figure 2: Categories of GNNs and Transformers, compared in terms of transformer machinery and edge vector incorporation. Model categories tested in our experiments are marked in bold.

variety of domains, starting with machine translation (Vaswani et al., 2017), then quickly impacting language modeling (Devlin et al., 2019) and text generation (Brown et al., 2020). They are revolutionizing image processing (Dosovitskiy et al., 2021) and are being applied to a growing variety of settings including reinforcement learning (RL), both online (Loynd et al., 2020; Parisotto et al., 2020) and offline (Chen et al., 2021; Janner et al., 2021).

Many of the domains transformers succeed in consist of array-structured data, such as text or images. By contrast, graph data is centrally concerned with pairwise relations between entities, represented as edges and edge attributes. Graphs are more general and expressive than sets, in the sense that a set is a special case of a graph—one without edges. So it is not immediately obvious how graph data can be processed by transformers in a way that preserves relational information. Transformers have been successfully applied to graph-structured tasks in one of two broad ways. Certain works, most recently TokenGT (Kim et al., 2022), encode graphs as sets of real-valued vectors passed to a standard transformer. Other works change the transformer architecture itself to consider relational information, e.g. by introducing relative position vectors to transformer attention. We discuss these and many other such approaches in Section 4.

**Our novel contribution is relational attention, a mathematically elegant extension of transformer attention, which incorporates edge vectors as first-class model components.** We call the resulting transformer architecture the Relational Transformer (RT). As a native graph-to-graph model, RT does not rely on special encoding schemes to input or output graph data.

We find that RT outperforms baseline GNNs on a large and diverse set of difficult graph-structured tasks. In particular, RT establishes dramatically improved state-of-the-art performance (Figure 1) over baseline GNNs on the challenging CLRS-30 (Veličković et al., 2022), which comprises 30 different algorithmic tasks in a framework for probing the reasoning abilities of graph-to-graph models. To summarize our main contributions:

- We introduce the relational transformer for application to arbitrary graph-structured tasks, and make the implementation available at <https://github.com/CameronDiao/relational-transformer>.
- We evaluate the reasoning power of RT on a wide range of challenging graph-structured tasks, achieving new state-of-the-art results on CLRS-30.
- We enhance the CLRS-30 framework to support evaluation of a broader array of models (Section 5.1.2).
- We improve the performance of CLRS-30 baseline models by adding multi-layer functionality, and tuning their hyperparameters (Section 5.1.1).

## 2 GRAPH NEURAL NETWORKS

We introduce the graph-to-graph model formalism used in the rest of this paper, inspired by Battaglia et al. (2018). The input graph is a directed, attributed graph  $G = (\mathcal{N}, \mathcal{E})$ , where  $\mathcal{N}$  is an unordered set of node vectors  $\mathbf{n}_i \in \mathbb{R}^{d_n}$ ,  $i$  denoting the  $i$ -th node.  $\mathcal{E}$  is a set of edge vectors  $\mathbf{e}_{ij} \in \mathbb{R}^{d_e}$ , where directed edge  $(i, j)$  points from node  $j$  to node  $i$ . Each layer  $l$  in the model accepts a graph  $G^l$  as

input, processes the graph’s features, then outputs graph  $G^{l+1}$  with the same structure as  $G^l$ , but with potentially updated node and edge vectors. Certain tasks may also include a single global vector with the input or output graph, but we omit those details from our formalism since they are not what distinguishes the approaches described below.

Each layer  $l$  of a graph-to-graph model is comprised of two update functions  $\phi$  and an aggregation function  $\oplus$ ,

$$\text{Node vector } \mathbf{n}_i^{l+1} = \phi_n \left( \mathbf{n}_i^l, \bigoplus_{j \in \mathcal{L}_i} \psi^m(\mathbf{e}_{ij}^l, \mathbf{n}_i^l, \mathbf{n}_j^l) \right) \quad (1)$$

$$\text{Edge vector } \mathbf{e}_{ij}^{l+1} = \phi_e(\mathbf{e}_{ij}^l, \mathbf{e}_{ji}^l, \mathbf{n}_i^{l+1}, \mathbf{n}_j^{l+1}) \quad (2)$$

where  $\mathcal{L}_i$  denotes the set of node  $i$ ’s neighbors (optionally including node  $i$ ), and  $\psi^m$  denotes a message function. The baseline GNNs listed below let  $\phi_e$  be the identity function such that  $\mathbf{e}_{ij}^{l+1} = \mathbf{e}_{ij}^l$  for all edges  $(i, j)$ . Furthermore, they use a permutation-invariant aggregation function for  $\oplus$ . The following details are from Veličković et al. (2022):

In **Deep Sets** (Zaheer et al., 2017), the only edges are self-connections so each  $\mathcal{L}_i$  is a singleton set containing node  $i$ .

In **Graph Attention Networks (GAT)** (Veličković et al., 2018; Brody et al., 2022),  $\oplus$  is self-attention, and the message function  $\psi^m$  merely extracts the sender features:  $\psi^m(\mathbf{e}_{ij}^l, \mathbf{n}_i^l, \mathbf{n}_j^l) = \mathbf{W}_m \mathbf{n}_i^l$ , where  $\mathbf{W}_m$  is a weight matrix.

In **Message Passing Neural Networks (MPNN)** (Gilmer et al., 2017), edges lie between any pair of nodes and  $\oplus$  is the max pooling operation.

In **Pointer Graph Networks (PGN)** (Veličković et al., 2020), edges are constrained by the adjacency matrix and  $\oplus$  is the max pooling operation.

### 3 RELATIONAL TRANSFORMER

We aim to design a mathematically elegant extension of transformer attention, which incorporates edge vectors as first-class model components. This goal leads us to the following design criteria:

1. Preserve all of the transformer’s original machinery (though still not fully understood), for its empirically established advantages.
2. Introduce directed edge vectors to represent relations between entities.
3. Condition transformer attention on the edge vectors.
4. Extend the transformer layer to consume edge vectors and produce updated edge vectors.
5. Preserve the transformer’s  $\mathcal{O}(N^2)$  computational complexity.

#### 3.1 RELATIONAL ATTENTION

(See Appendix A for a mathematical overview of transformers.) In addition to accepting node vectors representing entity features (as do all transformers), RT also accepts edge vectors representing relation features, which may include edge-presence flags from an adjacency matrix. But RT operates over a fully connected graph, unconstrained by any input adjacency matrix.

Transformer attention projects QKV vectors from each node vector, then computes a dot-product between each pair of vectors  $\mathbf{q}_i$  and  $\mathbf{k}_j$ . This dot-product determines the degree to which node  $i$  attends to node  $j$ . Relational attention’s central innovation (illustrated in Figure 3) is to condition the QKV vectors on the directed edge  $\mathbf{e}_{ij}$  between the nodes, by concatenating that edge vector with each node vector prior to the linear transformations:

$$\mathbf{q}_{ij} = [\mathbf{n}_i, \mathbf{e}_{ij}] \mathbf{W}^Q \quad \mathbf{k}_{ij} = [\mathbf{n}_j, \mathbf{e}_{ij}] \mathbf{W}^K \quad \mathbf{v}_{ij} = [\mathbf{n}_j, \mathbf{e}_{ij}] \mathbf{W}^V \quad (3)$$

where each weight matrix  $\mathbf{W}$  is now of size  $\mathbb{R}^{(d_n + d_e) \times d_n}$ , and  $d_e$  is the edge vector size. To implement this efficiently and exactly, we split each weight matrix  $\mathbf{W}$  into two separate matrices for

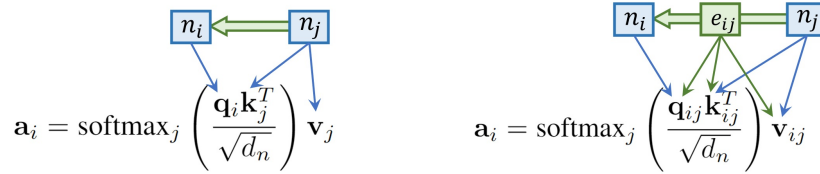


Figure 3: (Left) Standard transformer attention conditions the QKV computation on node vectors. (Right) Relational attention conditions this computation on the intervening edge vector as well.

projecting node and edge vectors, project the edge vector to three embeddings, then add those to the node’s usual attention vectors:

$$\mathbf{q}_{ij} = (\mathbf{n}_i \mathbf{W}_n^Q + \mathbf{e}_{ij} \mathbf{W}_e^Q) \quad \mathbf{k}_{ij} = (\mathbf{n}_j \mathbf{W}_n^K + \mathbf{e}_{ij} \mathbf{W}_e^K) \quad \mathbf{v}_{ij} = (\mathbf{n}_j \mathbf{W}_n^V + \mathbf{e}_{ij} \mathbf{W}_e^V) \quad (4)$$

While we have described relational attention in terms of fully connected self-attention, it applies equally to restricted forms of attention such as causal attention, cross-attention, or even restricted GAT-like attention that passes messages only over the edges present in a graph’s adjacency matrix. Relational attention is compatible with multi-head attention, and leaves the transformer’s  $\mathcal{O}(N^2)$  complexity unchanged. Our implementation maintains the high GPU utilization that makes transformers efficient.

### 3.2 EDGE UPDATES

To update edge vectors in each layer of processing, we follow the general pattern used by transformers to update node vectors: first aggregate messages into one, then use the result to perform a local update. In self-attention each node attends to all nodes in the graph. But having each of the  $N^2$  edges attend to  $N$  nodes would raise computational complexity to  $\mathcal{O}(N^3)$ . Instead, we restrict the edge’s aggregation function to gather messages only from its immediate locale, which consists of its two adjoining nodes, itself, and the directed edge running in the opposite direction:

$$\mathbf{e}_{ij}^{l+1} = \phi_e(\mathbf{e}_{ij}^l, \mathbf{e}_{ji}^l, \mathbf{n}_i^{l+1}, \mathbf{n}_j^{l+1}) \quad (5)$$

We compute the aggregated message  $\mathbf{m}_{ij}^l$  by first concatenating the four neighbor vectors, then applying a single linear transformation to the concatenated vector, followed by a ReLU non-linearity:

$$\mathbf{m}_{ij}^l = \text{ReLU}(\text{concat}(\mathbf{e}_{ij}^l, \mathbf{e}_{ji}^l, \mathbf{n}_i^{l+1}, \mathbf{n}_j^{l+1}) \mathbf{W}_4) \quad (6)$$

where  $\mathbf{W}_4 \in \mathbb{R}^{(2d_e+2d_n) \times d_{eh1}}$ , and the non-linear ReLU operation takes the place of the non-linear softmax in regular attention.

The remainder of the edge update function is essentially identical to the transformer node update function:

$$\mathbf{u}_{ij}^l = \text{LayerNorm}(\mathbf{m}_{ij}^l \mathbf{W}_5 + \mathbf{e}_{ij}^l) \quad \mathbf{e}_{ij}^{l+1} = \text{LayerNorm}(\text{ReLU}(\mathbf{u}_{ij}^l \mathbf{W}_6) \mathbf{W}_7 + \mathbf{u}_{ij}^l) \quad (7)$$

where  $\mathbf{W}_5 \in \mathbb{R}^{d_{eh1} \times d_e}$ ,  $\mathbf{W}_6 \in \mathbb{R}^{d_e \times d_{eh2}}$ ,  $\mathbf{W}_7 \in \mathbb{R}^{d_{eh2} \times d_e}$ , and  $d_{eh1}$  and  $d_{eh2}$  are the hidden layer sizes of the edge feed-forward networks. Node vectors are updated before edge vectors within each RT layer, so that a node aggregates information from the entire graph before its adjoining edges use that information in their local updates. This is another instance of the aggregate-then-update pattern employed by both transformers and GNNs for node vectors.

## 4 PRIOR WORK

We categorize, then discuss prior works based on their use of transformer machinery. We further divide each category based on edge vector incorporation, highlighting works that use full node-edge round-tripping, here defined as the process in which edge vectors directly condition node updates and node vectors directly condition edge updates. See Figure 2 for visual comparisons.

**Encoding Graphs to Sets** For clarity, we define the transformer architecture to exclude any modules that encode inputs to the transformer or decode its outputs. Several prior works have made progress on the challenge of applying standard transformers (Vaswani et al., 2017) to graph-structured tasks by representing graphs as sets of tokens, e.g. with positional encodings. TokenGT (Kim et al., 2022), for example, treats all nodes and edges of a graph as independent tokens, augmented with token-wise embeddings. Graphormer (Ying et al., 2021) and Graph-BERT (Zhang et al., 2020a) introduce structural encodings that are applied to each node prior to transformer processing. GraphTrans (Wu et al., 2021) and ReFormer (Yang et al., 2022) perform initial convolutions or message passing before the transformer module.

**Relative Position Vectors** A number of prior works have modified self-attention to implement relative positional encodings (Ying et al., 2021; Cai & Lam, 2020b; Shaw et al., 2018; Hellendoorn et al., 2020; Dai et al., 2019). To compare these formulations with RT, we expand relational attention’s dot-product into four terms as follows:

$$\mathbf{q}_{ij}\mathbf{k}_{ij}^\top = ([\mathbf{n}_i, \mathbf{e}_{ij}]\mathbf{W}^Q) ([\mathbf{n}_j, \mathbf{e}_{ij}]\mathbf{W}^K)^\top \quad (8)$$

$$= (\mathbf{n}_i\mathbf{W}_n^Q + \mathbf{e}_{ij}\mathbf{W}_e^Q) (\mathbf{n}_j\mathbf{W}_n^K + \mathbf{e}_{ij}\mathbf{W}_e^K)^\top \quad (9)$$

$$= (\mathbf{n}_i\mathbf{W}_n^Q + \mathbf{e}_{ij}\mathbf{W}_e^Q) \left( (\mathbf{n}_j\mathbf{W}_n^K)^\top + (\mathbf{e}_{ij}\mathbf{W}_e^K)^\top \right) \quad (10)$$

$$= \mathbf{n}_i\mathbf{W}_n^Q (\mathbf{n}_j\mathbf{W}_n^K)^\top + \mathbf{n}_i\mathbf{W}_n^Q (\mathbf{e}_{ij}\mathbf{W}_e^K)^\top + \mathbf{e}_{ij}\mathbf{W}_e^Q (\mathbf{n}_j\mathbf{W}_n^K)^\top + \mathbf{e}_{ij}\mathbf{W}_e^Q (\mathbf{e}_{ij}\mathbf{W}_e^K)^\top \quad (11)$$

The transformer of Vaswani et al. (2017) employs only the first term. The transformer of Shaw et al. (2018) adds part of the second term, leaving out one weight matrix  $\mathbf{W}_e^K$ , and GREAT (Hellendoorn et al., 2020) adds the entire third term. The Transformer-XL (Dai et al., 2019) and Graph Transformer of Cai & Lam (2020b) use parts of all four terms, but leave out two of the eight weight matrices  $\mathbf{W}_e^Q$  and  $\mathbf{W}_e^K$ . Each work above uses edge vectors only for relative positional information. RT employs all four terms, allows the edge vectors to represent arbitrary information depending on the task, and updates the edge vectors in each layer of computation.

**Transformers With Restricted Node-Edge Communication** A few prior graph-to-graph transformers restrict round-trip communication between nodes and edges. EGT (Hussain et al., 2022) does a form of node-edge round-tripping but introduces single-scalar bottlenecks (per-edge, per-head). The Graph Transformer of Dwivedi & Bresson (2021), SAT (Chen et al., 2022), and SAN (Kreuzer et al., 2021) condition node attention coefficients on edge vectors, but they do not explicitly condition node vector updates on edge vectors. GRPE (Cai & Lam, 2020a) also conditions node attention on edge vectors, e.g. by adding edge vectors to the node value vectors. But the edge vectors themselves are not explicitly updated using node vectors.

**Highly Modified Transformers** Bergen et al. (2021) introduce the Edge Transformer which replaces standard transformer attention with a triangular attention mechanism that takes edge vectors into account and updates the edge vectors in each layer. This differs from RT in three important respects. First, triangular attention is a completely novel form of attention, unlike relational attention which is framed as a natural extension of standard transformer attention. Second, triangular attention ignores node vectors altogether, and thereby requires node input features and node output predictions to be somehow mapped onto edges. And third, triangular attention’s computational complexity is  $\mathcal{O}(N^3)$  in the number of nodes, unlike RT’s relational attention which maintains the  $\mathcal{O}(N^2)$  transformer complexity. Like Edge Transformer, Nodeformer (Wu et al., 2022) employs a novel form of attention, but in this case with  $\mathcal{O}(N)$  complexity. Nodeformer does not perform node-edge round-tripping, and introduces single-scalar bottlenecks per-edge. Another transformer, GraphGPS (Rampasek et al., 2022), is described by the authors as an MPNN+Transformer hybrid, which does support full node-edge round-tripping. Unlike RT, GraphGPS represents a significant departure from the standard transformer architecture.

Finally, attentional GNNs, such as GAT (Veličković et al., 2018), GATv2 (Brody et al., 2022), Edgeformer (Jin et al., 2023), kgTransformer (Liu et al., 2022), Relational Graph Transformer (Feng et al., 2022), HGT (Hu et al., 2020), and Simple-HGN (Lv et al., 2021) aggregate features across neighborhoods based on transformer-style attention coefficients. However, unlike transformers, attentional GNNs only compute attention over input edge vectors, and (except in Edgeformer and kgTransformer) the edge vectors are not updated in each layer. In particular, kgTransformer, Relational

Graph Transformer, HGT, and Simple-HGN modify transformer attention to consider heterogeneous structures in the graph data, such that the model can differentiate between types of nodes and edges.

**Other GNNs** MPNN (Gilmer et al., 2017) is a popular GNN that accepts entire edge vectors as input, as do some other works such as MXMNet (Zhang et al., 2020c) and G-MPNN (Yadati, 2020). But apart from EGNN (Gong & Cheng, 2019) and Censnet (Jiang et al., 2019), relatively few GNNs update the edge vectors themselves. None of these GNNs use the full transformer machinery, and in general many GNNs are designed for specific settings, such as quantum chemistry.

Unlike any of these prior works, RT preserves all of the original transformer machinery, while adding full bidirectional conditioning of node and edge vector updates.

## 5 EXPERIMENTS

We evaluate RT against common GNNs on the diverse set of graph-structured tasks provided by CLRS-30 (Veličković et al., 2022), which was designed to measure the reasoning abilities of neural networks. This is a common motivation for tasking neural networks to execute algorithms (Zaremba & Sutskever, 2014; Kaiser & Sutskever, 2015; Trask et al., 2018; Kool et al., 2019). RT outperforms baseline GNNs by wide margins, especially on tasks that require processing of node relations (Section 5.1.5). We further evaluate RT against GNNs on the end-to-end shortest paths task provided by Tang et al. (2020), where again RT outperforms the baselines (Section 5.2). Our final experiment (Appendix B) evaluates RT against a standard transformer on a reinforcement learning task where *no graph structure is provided*. We find that RT decreases error rates of the RL agent significantly.

### 5.1 STEP-BY-STEP REASONING

In CLRS-30, each step in a task is framed as a graph-to-graph problem, even for algorithms that may seem unrelated to graphs. To give an example, for list sorting algorithms, each input list element is treated as a separate node and predecessor links are added to order the elements. Task data is organized into task inputs, task outputs, and ‘hints’, which are intermediate inputs and outputs for the intervening steps of an algorithm. Data is comprised of combinations of node, edge, and/or global features, which can be of five possible types: scalars, categoricals, masks, binary masks, or pointers.

CLRS-30 employs an encode-process-decode framework for model evaluation. Input features are encoded using linear layers, then passed to the model (called a processor) being tested. The model performs one step of computation on the inputs, then it outputs a set of node vectors, which are passed back to the model as input on the next step. On each step, the model’s output node vectors are decoded by the framework (using linear layers) and compared with the targets (either hints or final outputs) to compute training losses or evaluation scores.

Certain CLRS-30 tasks provide a global vector with each input graph. As per CLRS-30 specifications, the baseline GNNs handle global vectors by including them as messages in each update step. They do not propagate global vectors through the steps of the algorithm. RT can use two different methods for handling global vectors and we evaluate both in Section 5.1.4.

#### 5.1.1 BASELINE GNNs

We began by reproducing the published results of key baseline models on the eight representative tasks (one per algorithm class) listed in Figure 3 of Veličković et al. (2022) and in our Table 13. For several of the following experiments, we refer to these as the *8 core tasks*. Our results on these tasks agree closely with the published CLRS-30 results (Table 11). See Appendix D for details of our train/test protocol. We chose not to include Memnet in our experiments given our focus on standard GNNs, and given Memnet’s poor performance in the original CLRS-30 experiments. Missing details<sup>1</sup> made it impossible to reproduce the published GAT results on CLRS-30.

The published CLRS-30 results show sharp drops in out-of-distribution (OOD) performance for all models. For instance, MPNN’s average evaluation score drops from 96.63% on the validation set to 51.02% on the test set. We note that small training datasets can induce overfitting even in models that are otherwise capable of generalizing to OOD test sets. To mitigate this spurious form of overfitting,

<sup>1</sup>See the final comment in <https://github.com/deepmind/clrs/issues/92>

Table 1: Mean test scores of all tuned models on the eight CLRS-30 algorithm classes.

Class	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	PGN-c	RT (Ours)
Divide & Conquer	12.29%	15.19%	14.80%	16.14%	16.71%	51.30%	51.30%	<b>66.52%</b>
Dynamic Programming	68.29%	63.88%	59.22%	68.81%	68.56%	71.07%	71.13%	<b>83.20%</b>
Geometry	65.47%	68.94%	67.80%	83.03%	67.77%	66.63%	67.78%	<b>84.55%</b>
Graphs	42.09%	52.79%	55.53%	63.30%	59.16%	64.36%	64.59%	<b>65.33%</b>
Greedy	77.83%	75.75%	75.03%	<b>89.40%</b>	75.30%	76.72%	76.72%	85.32%
Search	50.99%	35.37%	38.04%	43.94%	50.98%	54.21%	60.39%	<b>65.31%</b>
Sorting	<b>68.89%</b>	21.25%	17.82%	27.12%	28.93%	2.48%	28.93%	50.01%
Strings	2.92%	1.36%	1.57%	2.09%	1.61%	1.17%	1.82%	<b>32.52%</b>
Average	48.60%	41.82%	41.23%	49.23%	46.13%	48.49%	52.83%	<b>66.60%</b>

we expanded the training datasets by 10x to 10,000 examples generated from the same canonical random seed of 1, and evaluated the effects on the 8 core tasks. As shown in Table 9, expanding the training set significantly boosts the performance of all baseline models. For all of the other experiments in this work, we use the larger training sets of 10,000 examples.

Following Veličković et al. (2022), we compute results for two separate PGN models, masked (PGN-m) and unmasked (PGN-u), then select the best result on each task to compute the average shown for the combination PGN-c model (which is called PGN in the CLRS-30 results). Note therefore that PGN-c does not represent a single model. But it does represent the performance that would be achievable by a PGN model that adaptively learned when to use masking.

We found in early experiments that RT obtained far better results than those of the CLRS-30 baseline GNNs. So to further enhance the performance of the baseline GNNs, we extended them to support multiple layers (rounds of message passing) per algorithmic step, and thoroughly tuned their hyperparameters (see Appendix C). This significantly improved the baseline results (see Table 10).

See Table 12 for results comparing CLRS-30 baseline model performances with and without our proposed changes. On certain tasks, baseline score variance increased along with mean scores. For example, on the Jarvis’ March task, tuning raised the score of MPNN from  $22.99 \pm 3.87\%$  to  $59.31 \pm 29.3\%$ . See Appendix G for detailed analysis of score variance.

### 5.1.2 ENHANCEMENTS OF CLRS-30’S FRAMEWORK

Most GNNs consume and produce node vectors, and many also consume edge vectors or edge types. However, relatively few GNNs (and none of the CLRS-30 baseline models) are designed to output edge vectors. Because of this, the CLRS-30 framework does not support edge vector outputs from a processor network. To test models such as RT that have these abilities, we extended the CLRS-30 framework to accept edge and global vectors from the processor at each step, and pass these vectors back to the processor as input on the next step. The framework handles node vectors as usual.

In framing algorithms as graph-to-graph tasks, CLRS-30 relies heavily on what it terms a *node pointer*, which is conceptually equivalent to a directed edge pointing from one node to another. Since the CLRS-30 baseline models do not output edge vectors, a decoder in the CLRS-30 framework uses the model’s output node vectors to create node pointers. But for models like RT that output edge vectors, it is more natural to decode node pointers from those edge vectors alone. To better support such models, we added a flag to enable this modified behavior in the CLRS-30 framework.

### 5.1.3 MAIN RESULTS

After tuning hyperparameters for all models (Appendix C), we evaluated RT against the six baseline GNNs on all CLRS-30 tasks, using 20 seeds. The full results are presented in Table 19. RT outperforms the top-scoring baseline model (MPNN) by **11%** overall. As bolded in the table, RT scores the highest on **11 out of 30** tasks. RT is also the best-performing model on **6 of 8** algorithmic classes (Table 1), and scores the highest when results are averaged over those classes (Figure 1). See Table 8 for the algorithm-class mappings. For convenience, Figure 1 includes the prior results (labeled as MPNN-pr and DeepSets-pr) for single-layer GNNs from Veličković et al. (2022). In summary, RT significantly outperforms all baseline GNN models over the CLRS-30 tasks.

#### 5.1.4 ABLATIONS

Using only the 8 core tasks (except where noted), we perform several ablations to analyze the factors behind RT’s solid performance on CLRS-30.

**Transformer** - We compare RT to a standard, set-based transformer (Vaswani et al., 2017) by disabling edge vectors and features in RT. Table 13 shows that performance collapses by almost 40% without edge vectors and relational attention, even after re-tuning its hyperparameters.

**Layers** - The tuned RT uses three layers of computation per algorithmic step. When restricted to a single layer, performance drops drastically (Table 14), even after re-tuning the other hyperparameters. However, single-layer RT still outperforms the top-scoring MPNN by **10.69%** on the 8 core tasks, suggesting that relational attention improves expressivity even when restricted to a single layer of computation.

**Global vector** - Many CLRS-30 tasks provide a global feature vector as input to the processor model. We designed RT to handle this global vector by either concatenating it to each input node vector, or by passing it to a dedicated core node (Loynd et al., 2020; Guo et al., 2019). Hyperparameter tuning chose concatenation instead of the core node option, so concatenation was used in all experiments. But in this ablation, the core-node method obtained slightly higher test scores on 7 tasks that use global vectors as inputs to the processor (Table 16). The score difference of 0.08% was marginal, providing no empirical basis to prefer one method of handling the global vector over the other.

**Node pointer decoding** - We assess impact of the flag we added to the CLRS-30 framework, which can be used to decode node pointers from edge vectors only. Compared to using the original decoding procedure, using the flag improved performance by a small amount (0.30%) (Table 15).

**Disabling edge updates** - We disable edge updates in RT such that RT relies solely on relational attention to process input features. Table 17 shows the resulting drop in performance, from **81.30%** to **53.99%**. This indicates that edge updates are crucial for RT’s learning of relational characteristics in the graph data. As a final note, RT without edge updates still outperforms the transformer by **11.65%**, demonstrating the effectiveness of relational attention even without updated edges.

#### 5.1.5 ALGORITHMIC ANALYSIS

We investigate the reasoning power of RT based on its test performance on specific algorithmic tasks. We only provide possible explanations here, in line with previous work (Veličković et al., 2022; Veličković et al., 2020; Xu et al., 2020).

**Underperformance** - The greedy class is one of two where RT is outperformed (by just one other model). The two greedy tasks, activity selector and task scheduling, require selecting node entities that minimize some metric at each step. For example, in task scheduling, the optimal solution involves repeatedly selecting the task with the smallest processing time. The selection step is aligned with max pooling in GNNs: Veličković et al. (2020) demonstrate how max pooling aligns with making discrete decisions over neighborhoods. Here, each neighborhood represents a set of candidate entities to be selected from. MPNN, PGN-u, and PGN-m all perform max pooling at each step of message passing. On the other hand, RT performs soft attention pooling, which does not align with the discrete decision-making required to execute greedy algorithms. This may explain RT’s underperformance on activity selector and task scheduling, as well as Prim’s and Kruskal’s.

**Overperformance** - RT overwhelmingly beats baseline GNNs on dynamic programming (DP) tasks. This is surprising, considering that GNNs have been proven to align well with dynamic programming routines (Dudzic & Veličković, 2022). To explain RT’s overperformance, we consider 1) edge updates and 2) relational attention. For 1), Ibarz et al. (2022) observe that several algorithms in CLRS-30, especially those categorized as DP, require edge-based reasoning—where edges store values, and update those values based on other edges’ values. These algorithms do not use node representations in their update functions, yet the baseline GNNs can only learn these update functions using message passing between node representations. On the other hand, RT directly supports edge-based reasoning by representing and updating edges. The hypothesis that RT actually uses this ability is supported by the fact that RT beats baseline GNNs on most of the 6 edge-centric tasks (Find Maximum Subarray, Insertion Sort, Matrix Chain Order, and Optimal BST), though not on the other 2 (Dijkstra and Floyd-Warshall). For 2), recall from Section 3.1 that relational attention is an extension of standard



transformer attention. Standard attention itself is a specific instance of the message-passing function described in Dudzik & Veličković (2022), which is part of the author’s framework for aligning GNNs and DP routines. To see how this is the case, the reader can compare our equation equation 12 with equation 1 in Dudzik & Veličković (2022). From this comparison, and from 1), we expect RT to perform well on both of the edge-centric DP tasks Matrix Chain Order and Optimal BST. We find that RT obtains best scores on both of them, by 5.24% and 3.66% respectively.

## 5.2 END-TO-END ALGORITHMIC REASONING

CLRS-30 evaluates reasoning ability by examining how closely a model can emulate each step of an algorithm. But we may also evaluate reasoning ability by training a model to execute an algorithm end-to-end (Xu et al., 2020). We use the task provided by Tang et al. (2020) to evaluate RT in this way. Specifically, we task RT with finding a shortest path distance between two nodes in an undirected lobster graph. The node features are one-hot encoded for source, destination, and remaining. The edge features are binary presence values.

**Main Results** We use the same experiment settings as Tang et al. (2020) for the shortest path task. Importantly, we use their method for testing graph size generalizability by training models on graphs of size  $[4, 34]$  and evaluating models on graphs of size 100. Furthermore, all models use 30 layers. Results are reported using the relative loss metric introduced by the authors, defined as  $|y - \hat{y}|/|y|$  given a label  $y$  and a prediction  $\hat{y}$ . We compare RT to their two baselines, Graph Convolution Network or GCN (Kipf & Welling, 2017) and GAT (Veličković et al., 2018). Results are averaged across 20 random seeds. RT outperforms both baselines with an average relative loss of **0.22**, compared to GCN’s **0.45** and GAT’s **0.28** (Figure 4). These results were obtained without using the iterative module proposed by Tang et al. (2020) that introduces a stopping criterion to message passing computations.

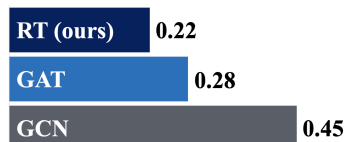


Figure 4: Average Relative Loss on Shortest Paths

## 6 CONCLUSION AND FUTURE WORK

We propose the relational transformer (RT), an elegant extension of the standard transformer to operate on graphs instead of sets. It incorporates edge information through relational attention in a principled and computationally efficient way. Our experimental results demonstrate that RT performs consistently well across a diverse range of graph-structured tasks. Specifically, RT outperforms baseline GNNs on CLRS-30 by wide margins, and also outperforms baseline models on end-to-end algorithmic reasoning. RT even boosts transformer performance on the Sokoban task, where graph structure is entirely hidden and must be discovered by the RL agent.

Beyond establishing RT’s state-of-the-art results on CLRS-30, we enhance performance of the CLRS-30 baseline models, and contribute extensions to the CLRS-30 framework, broadening the scope of models that can be evaluated on the benchmark tasks. All of these improvements make CLRS-30 tasks and baselines more appealing for evaluating current and future models.

In general, comparing GNNs with transformer-based models like RT on common benchmarks is an important challenge for the community. We have made progress on that challenge by rigorously evaluating RT against standard baseline GNNs on the large and challenging CLRS-30 benchmark, but we leave experiments with other transformer-based approaches for future work. One difficulty is the fact that the CLRS-30 framework is written in Jax, and few if any of these transformers have Jax implementations available. But we have improved the CLRS benchmark itself to make such comparisons more practical in the future.

In future work, we aim to fully leverage the richness of CLRS-30 to more thoroughly investigate RT’s capabilities. For example, recent extensions to the CLRS framework (Ibarz et al., 2022) allow us to task RT with executing several algorithms simultaneously, which requires knowledge transfer between algorithms. We also plan to evaluate RT on a wider range of real-world graph settings, such as the molecular domain using the large-scale QM9 dataset (Wu et al., 2018). Finally, we aim to relax the locality bottleneck of RT’s edge updates by allowing edges to attend to other edges directly in a computationally efficient manner.

## ACKNOWLEDGMENTS

We wish to thank our many collaborators for their valuable feedback, including Roland Fernandez, who also provided the XT ML tool that made research at this scale possible.

## REFERENCES

- Peter W. Battaglia, Jessica B. Hamrick, Victor Bapst, Alvaro Sanchez-Gonzalez, Vinicius Zambaldi, Mateusz Malinowski, Andrea Tacchetti, David Raposo, Adam Santoro, Ryan Faulkner, Caglar Gulcehre, Francis Song, Andrew Ballard, Justin Gilmer, George Dahl, Ashish Vaswani, Kelsey Allen, Charles Nash, Victoria Langston, Chris Dyer, Nicolas Heess, Daan Wierstra, Pushmeet Kohli, Matt Botvinick, Oriol Vinyals, Yujia Li, and Razvan Pascanu. Relational inductive biases, deep learning, and graph networks, 2018. URL <https://arxiv.org/abs/1806.01261>.
- Leon Bergen, Timothy O’Donnell, and Dzmitry Bahdanau. Systematic generalization with edge transformers. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 1390–1402. Curran Associates, Inc., 2021. URL <https://proceedings.neurips.cc/paper/2021/file/0a4dc6dae338c9cb08947c07581f77a2-Paper.pdf>.
- Antoine Bordes, Nicolas Usunier, Alberto Garcia-Durán, Jason Weston, and Oksana Yakhnenko. Translating embeddings for modeling multi-relational data. In *Proceedings of the 26th International Conference on Neural Information Processing Systems - Volume 2, NIPS’13*, pp. 2787–2795, Red Hook, NY, USA, 2013. Curran Associates Inc.
- Shaked Brody, Uri Alon, and Eran Yahav. How attentive are graph attention networks? In *International Conference on Learning Representations*, 2022. URL <https://openreview.net/forum?id=F72ximsx7Cl>.
- Tom Brown, Benjamin Mann, Nick Ryder, Melanie Subbiah, Jared D Kaplan, Prafulla Dhariwal, Arvind Neelakantan, Pranav Shyam, Girish Sastry, Amanda Askell, Sandhini Agarwal, Ariel Herbert-Voss, Gretchen Krueger, Tom Henighan, Rewon Child, Aditya Ramesh, Daniel Ziegler, Jeffrey Wu, Clemens Winter, Chris Hesse, Mark Chen, Eric Sigler, Mateusz Litwin, Scott Gray, Benjamin Chess, Jack Clark, Christopher Berner, Sam McCandlish, Alec Radford, Ilya Sutskever, and Dario Amodei. Language models are few-shot learners. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 1877–1901. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/1457c0d6bfc4967418bfb8ac142f64a-Paper.pdf>.
- Deng Cai and Wai Lam. Graph transformer for graph-to-sequence learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34:7464–7471, Apr. 2020a. doi: 10.1609/aaai.v34i05.6243. URL <https://ojs.aaai.org/index.php/AAAI/article/view/6243>.
- Deng Cai and Wai Lam. Graph transformer for graph-to-sequence learning. *Proceedings of the AAAI Conference on Artificial Intelligence*, 34(05):7464–7471, Apr. 2020b. doi: 10.1609/aaai.v34i05.6243. URL <https://ojs.aaai.org/index.php/AAAI/article/view/6243>.
- Dexiong Chen, Leslie O’Bray, and Karsten Borgwardt. Structure-aware transformer for graph representation learning. In *Proceedings of the 39th International Conference on Machine Learning (ICML)*, Proceedings of Machine Learning Research, 2022.
- Lili Chen, Kevin Lu, Aravind Rajeswaran, Kimin Lee, Aditya Grover, Misha Laskin, Pieter Abbeel, Arvind Srinivas, and Igor Mordatch. Decision transformer: Reinforcement learning via sequence modeling. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 15084–15097. Curran Associates, Inc., 2021. URL <https://proceedings.neurips.cc/paper/2021/file/7f489f642a0ddb10272b5c31057f0663-Paper.pdf>.
- Zihang Dai, Zhilin Yang, Yiming Yang, Jaime G. Carbonell, Quoc Viet Le, and Ruslan Salakhutdinov. Transformer-xl: Attentive language models beyond a fixed-length context. In Anna Korhonen, David R. Traum, and Lluís Màrquez (eds.), *Proceedings of the 57th Conference of the Association for Computational Linguistics, ACL 2019, Florence, Italy, July 28- August 2, 2019, Volume 1: Long Papers*, pp. 2978–2988. Association for Computational Linguistics, 2019.

- Asim Kumar Debnath, Rosa L. Lopez de Compadre, Gargi Debnath, Alan J. Shusterman, and Corwin Hansch. Structure-activity relationship of mutagenic aromatic and heteroaromatic nitro compounds. correlation with molecular orbital energies and hydrophobicity. *Journal of Medicinal Chemistry*, 34(2):786–797, 1991. doi: 10.1021/jm00106a046. URL <https://doi.org/10.1021/jm00106a046>.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. BERT: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 4171–4186, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1423. URL <https://aclanthology.org/N19-1423>.
- Alexey Dosovitskiy, Lucas Beyer, Alexander Kolesnikov, Dirk Weissenborn, Xiaohua Zhai, Thomas Unterthiner, Mostafa Dehghani, Matthias Minderer, Georg Heigold, Sylvain Gelly, Jakob Uszkoreit, and Neil Houlsby. An image is worth 16x16 words: Transformers for image recognition at scale. In *International Conference on Learning Representations*, 2021. URL <https://openreview.net/forum?id=YicbFdNTTy>.
- Andrew Dudzik and Petar Veličković. Graph neural networks are dynamic programmers, 2022. URL <https://arxiv.org/abs/2203.15544>.
- Vijay Prakash Dwivedi and Xavier Bresson. A generalization of transformer networks to graphs. *AAAI Workshop on Deep Learning on Graphs: Methods and Applications*, 2021.
- Shangbin Feng, Zhaoxuan Tan, Rui Li, and Minnan Luo. Heterogeneity-aware twitter bot detection with relational graph transformers. *Proceedings of the AAAI Conference on Artificial Intelligence*, 36(4):3977–3985, Jun. 2022. doi: 10.1609/aaai.v36i4.20314. URL <https://ojs.aaai.org/index.php/AAAI/article/view/20314>.
- Justin Gilmer, Samuel S. Schoenholz, Patrick F. Riley, Oriol Vinyals, and George E. Dahl. Neural message passing for quantum chemistry. In *Proceedings of the 34th International Conference on Machine Learning - Volume 70, ICML’17*, pp. 1263–1272. JMLR.org, 2017.
- Liyu Gong and Qiang Cheng. Exploiting edge features for graph neural networks. In *2019 IEEE/CVF Conference on Computer Vision and Pattern Recognition (CVPR)*, pp. 9203–9211, 2019. doi: 10.1109/CVPR.2019.00943.
- Arthur Guez, Mehdi Mirza, Karol Gregor, Rishabh Kabra, Sebastien Racaniere, Theophane Weber, David Raposo, Adam Santoro, Laurent Orseau, Tom Eccles, Greg Wayne, David Silver, and Timothy Lillicrap. An investigation of model-free planning. In *ICML*, pp. 2464–2473, 2019.
- Qipeng Guo, Xipeng Qiu, Pengfei Liu, Yunfan Shao, Xiangyang Xue, and Zheng Zhang. Star-transformer. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 1315–1325, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1133. URL <https://aclanthology.org/N19-1133>.
- Vincent J. Hellendoorn, Charles Sutton, Rishabh Singh, Petros Maniatis, and David Bieber. Global relational models of source code. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=B1lnbRntwr>.
- Weihua Hu, Matthias Fey, Hongyu Ren, Maho Nakata, Yuxiao Dong, and Jure Leskovec. Ogb-lsc: A large-scale challenge for machine learning on graphs, 2021. URL <https://arxiv.org/abs/2103.09430>.
- Ziniu Hu, Yuxiao Dong, Kuansan Wang, and Yizhou Sun. Heterogeneous graph transformer. In *Proceedings of The Web Conference 2020, WWW ’20*, pp. 2704–2710, New York, NY, USA, 2020. Association for Computing Machinery. ISBN 9781450370233. doi: 10.1145/3366423.3380027. URL <https://doi.org/10.1145/3366423.3380027>.

- Md Shamim Hussain, Mohammed J. Zaki, and Dharmashankar Subramanian. Global self-attention as a replacement for graph convolution. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. ACM, aug 2022. doi: 10.1145/3534678.3539296. URL <https://doi.org/10.1145%2F3534678.3539296>.
- Borja Ibarz, Vitaly Kurin, George Papamakarios, Kyriacos Nikiforou, Mehdi Bennani, Róbert Csordás, Andrew Joseph Dudzik, Matko Bošnjak, Alex Vitvitskyi, Yulia Rubanova, Andreea Deac, Beatrice Bevilacqua, Yaroslav Ganin, Charles Blundell, and Petar Veličković. A generalist neural algorithmic learner. In *The First Learning on Graphs Conference, 2022*. URL <https://openreview.net/forum?id=FebadKZf6Gd>.
- Michael Janner, Qiyang Li, and Sergey Levine. Offline reinforcement learning as one big sequence modeling problem. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 1273–1286. Curran Associates, Inc., 2021. URL <https://proceedings.neurips.cc/paper/2021/file/099fe6b0b444c23836c4a5d07346082b-Paper.pdf>.
- Xiaodong Jiang, Pengsheng Ji, and Sheng Li. Censnet: Convolution with edge-node switching in graph neural networks. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, IJCAI-19*, pp. 2656–2662. International Joint Conferences on Artificial Intelligence Organization, 7 2019. doi: 10.24963/ijcai.2019/369. URL <https://doi.org/10.24963/ijcai.2019/369>.
- Bowen Jin, Yu Zhang, Yu Meng, and Jiawei Han. Edgeformers: Graph-empowered transformers for representation learning on textual-edge networks. In *The Eleventh International Conference on Learning Representations, 2023*. URL <https://openreview.net/forum?id=2YQrqe4RNv>.
- Łukasz Kaiser and Ilya Sutskever. Neural gpus learn algorithms, 2015. URL <https://arxiv.org/abs/1511.08228>.
- Jinwoo Kim, Dat Tien Nguyen, Seonwoo Min, Sungjun Cho, Moontae Lee, Honglak Lee, and Seunghoon Hong. Pure transformers are powerful graph learners. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL [https://openreview.net/forum?id=um2BxfgkT2\\_](https://openreview.net/forum?id=um2BxfgkT2_).
- Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations, 2017*. URL <https://openreview.net/forum?id=SJU4ayYgl>.
- Wouter Kool, Herke van Hoof, and Max Welling. Attention, learn to solve routing problems! In *International Conference on Learning Representations, 2019*. URL <https://openreview.net/forum?id=ByxBFsRqYm>.
- Devin Kreuzer, Dominique Beaini, William L. Hamilton, Vincent Létourneau, and Prudencio Tossou. Rethinking graph transformers with spectral attention. In A. Beygelzimer, Y. Dauphin, P. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, 2021. URL <https://openreview.net/forum?id=huAdB-Tj4yG>.
- Jure Leskovec, Daniel Huttenlocher, and Jon Kleinberg. Signed networks in social media. In *Proceedings of the SIGCHI Conference on Human Factors in Computing Systems, CHI '10*, pp. 1361–1370, New York, NY, USA, 2010. Association for Computing Machinery. ISBN 9781605589299. doi: 10.1145/1753326.1753532. URL <https://doi.org/10.1145/1753326.1753532>.
- Xiao Liu, Shiyu Zhao, Kai Su, Yukuo Cen, Jiezhong Qiu, Mengdi Zhang, Wei Wu, Yuxiao Dong, and Jie Tang. Mask and reason: Pre-training knowledge graph transformers for complex logical queries. In *Proceedings of the 28th ACM SIGKDD Conference on Knowledge Discovery and Data Mining*. ACM, aug 2022. doi: 10.1145/3534678.3539472. URL <https://doi.org/10.1145%2F3534678.3539472>.
- Ricky Loynd, Roland Fernandez, Asli Celikyilmaz, Adith Swaminathan, and Matthew Hausknecht. Working memory graphs. In Hal Daumé III and Aarti Singh (eds.), *Proceedings of the 37th*

- International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 6404–6414. PMLR, 13–18 Jul 2020. URL <https://proceedings.mlr.press/v119/loynd20a.html>.
- Qingsong Lv, Ming Ding, Qiang Liu, Yuxiang Chen, Wenzheng Feng, Siming He, Chang Zhou, Jianguo Jiang, Yuxiao Dong, and Jie Tang. Are we really making much progress? revisiting, benchmarking and refining heterogeneous graph neural networks. In *Proceedings of the 27th ACM SIGKDD Conference on Knowledge Discovery & Data Mining*, KDD '21, pp. 1150–1160, New York, NY, USA, 2021. Association for Computing Machinery. ISBN 9781450383325. doi: 10.1145/3447548.3467350. URL <https://doi.org/10.1145/3447548.3467350>.
- Andrew Kachites McCallum, Kamal Nigam, Jason Rennie, and Kristie Seymore. Automating the construction of internet portals with machine learning. *Information Retrieval*, 3:127–163, 2000.
- Emilio Parisotto, Francis Song, Jack Rae, Razvan Pascanu, Caglar Gulcehre, Siddhant Jayakumar, Max Jaderberg, Raphaël Lopez Kaufman, Aidan Clark, Seb Noury, Matthew Botvinick, Nicolas Heess, and Raia Hadsell. Stabilizing transformers for reinforcement learning. In Hal Daumé III and Aarti Singh (eds.), *Proceedings of the 37th International Conference on Machine Learning*, volume 119 of *Proceedings of Machine Learning Research*, pp. 7487–7498. PMLR, 13–18 Jul 2020. URL <https://proceedings.mlr.press/v119/parisotto20a.html>.
- Ladislav Rampasek, Mikhail Galkin, Vijay Prakash Dwivedi, Anh Tuan Luu, Guy Wolf, and Dominique Beaini. Recipe for a general, powerful, scalable graph transformer. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=lMMaNf6oxKM>.
- Peter Shaw, Jakob Uszkoreit, and Ashish Vaswani. Self-attention with relative position representations. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pp. 464–468, New Orleans, Louisiana, June 2018. Association for Computational Linguistics. doi: 10.18653/v1/N18-2074. URL <https://aclanthology.org/N18-2074>.
- Hao Tang, Zhiao Huang, Jiayuan Gu, Bao-Liang Lu, and Hao Su. Towards scale-invariant graph-related problem solving by iterative homogeneous graph neural networks. In *Proceedings of the 34th International Conference on Neural Information Processing Systems*, NIPS'20, Red Hook, NY, USA, 2020. Curran Associates Inc. ISBN 9781713829546.
- Andrew Trask, Felix Hill, Scott E Reed, Jack Rae, Chris Dyer, and Phil Blunsom. Neural arithmetic logic units. In S. Bengio, H. Wallach, H. Larochelle, K. Grauman, N. Cesa-Bianchi, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 31. Curran Associates, Inc., 2018. URL <https://proceedings.neurips.cc/paper/2018/file/0e64a7b00c83e3d22ce6b3acf2c582b6-Paper.pdf>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017. URL <https://proceedings.neurips.cc/paper/2017/file/3f5ee243547dee91fbd053c1c4a845aa-Paper.pdf>.
- Petar Veličković, Adrià Puigdomènech Badia, David Budden, Razvan Pascanu, Andrea Banino, Misha Dashevskiy, Raia Hadsell, and Charles Blundell. The CLRS algorithmic reasoning benchmark. In Kamalika Chaudhuri, Stefanie Jegelka, Le Song, Csaba Szepesvari, Gang Niu, and Sivan Sabato (eds.), *Proceedings of the 39th International Conference on Machine Learning*, volume 162 of *Proceedings of Machine Learning Research*, pp. 22084–22102. PMLR, 17–23 Jul 2022. URL <https://proceedings.mlr.press/v162/velickovic22a.html>.
- Petar Veličković, Lars Buesing, Matthew Overlan, Razvan Pascanu, Oriol Vinyals, and Charles Blundell. Pointer graph networks. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 2232–2244. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/176bf6219855a6eb1f3a30903e34b6fb-Paper.pdf>.

- Petar Veličković, Guillem Cucurull, Arantxa Casanova, Adriana Romero, Pietro Liò, and Yoshua Bengio. Graph attention networks. In *International Conference on Learning Representations*, 2018. URL <https://openreview.net/forum?id=rJXMpikCZ>.
- Petar Veličković, Rex Ying, Matilde Padovano, Raia Hadsell, and Charles Blundell. Neural execution of graph algorithms. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=SkqK00EtvS>.
- Qitian Wu, Wentao Zhao, Zenan Li, David Wipf, and Junchi Yan. Nodeformer: A scalable graph structure learning transformer for node classification. In Alice H. Oh, Alekh Agarwal, Danielle Belgrave, and Kyunghyun Cho (eds.), *Advances in Neural Information Processing Systems*, 2022. URL <https://openreview.net/forum?id=sMezXGG5So>.
- Zhanghao Wu, Paras Jain, Matthew Wright, Azalia Mirhoseini, Joseph E Gonzalez, and Ion Stoica. Representing long-range context for graph neural networks with global attention. In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 13266–13279. Curran Associates, Inc., 2021. URL <https://proceedings.neurips.cc/paper/2021/file/6e67691b60ed3e4a55935261314dd534-Paper.pdf>.
- Zhenqin Wu, Bharath Ramsundar, Evan N. Feinberg, Joseph Gomes, Caleb Geniesse, Aneesh S. Pappu, Karl Leswing, and Vijay Pande. Moleculenet: a benchmark for molecular machine learning. *Chem. Sci.*, 9:513–530, 2018. doi: 10.1039/C7SC02664A. URL <http://dx.doi.org/10.1039/C7SC02664A>.
- Keyulu Xu, Jingling Li, Mozhi Zhang, Simon S. Du, Ken ichi Kawarabayashi, and Stefanie Jegelka. What can neural networks reason about? In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=rJxbJeHFPS>.
- Naganand Yadati. Neural message passing for multi-relational ordered and recursive hypergraphs. In H. Larochelle, M. Ranzato, R. Hadsell, M.F. Balcan, and H. Lin (eds.), *Advances in Neural Information Processing Systems*, volume 33, pp. 3275–3289. Curran Associates, Inc., 2020. URL <https://proceedings.neurips.cc/paper/2020/file/217eedd1ba8c592db97d0dbe54c7adfc-Paper.pdf>.
- Xuwen Yang, Yingru Liu, and Xin Wang. Reformer: The relational transformer for image captioning. In *Proceedings of the 30th ACM International Conference on Multimedia*, MM ’22, pp. 5398–5406, New York, NY, USA, 2022. Association for Computing Machinery. ISBN 9781450392037. doi: 10.1145/3503161.3548409. URL <https://doi.org/10.1145/3503161.3548409>.
- Chengxuan Ying, Tianle Cai, Shengjie Luo, Shuxin Zheng, Guolin Ke, Di He, Yanming Shen, and Tie-Yan Liu. Do transformers really perform badly for graph representation? In M. Ranzato, A. Beygelzimer, Y. Dauphin, P.S. Liang, and J. Wortman Vaughan (eds.), *Advances in Neural Information Processing Systems*, volume 34, pp. 28877–28888. Curran Associates, Inc., 2021. URL <https://proceedings.neurips.cc/paper/2021/file/f1c1592588411002af340cbaedd6fc33-Paper.pdf>.
- Manzil Zaheer, Satwik Kottur, Siamak Ravanbakhsh, Barnabas Poczos, Russ R Salakhutdinov, and Alexander J Smola. Deep sets. In I. Guyon, U. Von Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems*, volume 30. Curran Associates, Inc., 2017. URL <https://proceedings.neurips.cc/paper/2017/file/f22e4747dalaa27e363d86d40ff442fe-Paper.pdf>.
- Wojciech Zaremba and Ilya Sutskever. Learning to execute, 2014. URL <https://arxiv.org/abs/1410.4615>.
- Jiawei Zhang, Haopeng Zhang, Congying Xia, and Li Sun. Graph-bert: Only attention is needed for learning graph representations, 2020a. URL <https://arxiv.org/abs/2001.05140>.
- Liang Zhang, Xudong Wang, Hongsheng Li, Guangming Zhu, Peiyi Shen, Ping Li, Xiaoyuan Lu, Syed Afaq Ali Shah, and Mohammed Bennamoun. Structure-feature based graph self-adaptive pooling. In *Proceedings of The Web Conference 2020*. ACM, apr 2020b. doi: 10.1145/3366423.3380083. URL <https://doi.org/10.1145/3366423.3380083>.

Shuo Zhang, Yang Liu, and Lei Xie. Molecular mechanics-driven graph neural network with multiplex graph for molecular structures. In *NeurIPS-W*, 2020c.

## A TRANSFORMERS

We describe the transformer architecture introduced by Vaswani et al. (2017). This description also applies to most transformer variants proposed over the years. Layer superscripts are employed to distinguish input vectors from output vectors, and are often omitted for vectors inside the same layer.

Although the transformer is a set-to-set model, it can be described using our graph-to-graph formalism as limited to computation over *nodes* only. Each transformer layer is a function passing updated node vectors to the next layer. A single transformer layer can therefore be expressed as a modified version of equation 1:

$$\mathbf{n}_i^{l+1} = \phi_n \left( \mathbf{n}_i^l, \bigoplus_{j \in \mathcal{L}_i} a(\mathbf{n}_i^l, \mathbf{n}_j^l) \psi^m(\mathbf{n}_j^l) \right) \quad (12)$$

where  $a(\mathbf{n}_i^l, \mathbf{n}_j^l)$  computes the attentional coefficient  $\alpha_{ij}^l$  applied by node  $i$  to the value vector  $\mathbf{v}_j^l$ , which is computed by  $\psi^m(\mathbf{n}_j^l)$ , a linear transformation:

$$\alpha_{ij}^l = a(\mathbf{n}_i^l, \mathbf{n}_j^l) \quad \mathbf{v}_j^l = \psi^m(\mathbf{n}_j^l) = \mathbf{n}_j^l \mathbf{W}^V \quad (13)$$

The attentional coefficients applied by node  $i$  to the set of all nodes  $j$  is a probability distribution  $\mathbf{a}_i$  computed by the softmax function over a set of vector dot products:

$$\mathbf{a}_i = \text{softmax}_j \left( \frac{\mathbf{q}_i \mathbf{k}_j^T}{\sqrt{d_n}} \right) \quad (14)$$

The  $QKV$  vectors introduced above are linear transformations of node vectors:

$$\mathbf{q}_i = \mathbf{n}_i \mathbf{W}^Q \quad \mathbf{k}_j = \mathbf{n}_j \mathbf{W}^K \quad \mathbf{v}_j = \mathbf{n}_j \mathbf{W}^V \quad (15)$$

where  $\mathbf{W}^Q \in \mathbb{R}^{d_n \times d_n}$ ,  $\mathbf{W}^K \in \mathbb{R}^{d_n \times d_n}$ ,  $\mathbf{W}^V \in \mathbb{R}^{d_n \times d_n}$ , and  $d_n$  is the node vector size. These  $\mathbf{W}$  matrices (like all other trainable parameters in  $\phi_n$ ) are not shared between transformer layers.

The aggregation function  $\bigoplus$  sums the incoming messages from all nodes  $\mathcal{L}_i$  in the completely connected graph:

$$\mathbf{m}_i^l = \bigoplus_{j \in \mathcal{L}_i} a(\mathbf{n}_i^l, \mathbf{n}_j^l) \psi^m(\mathbf{n}_j^l) = \sum_j \alpha_{ij}^l \mathbf{v}_j^l \quad (16)$$

This aggregated message  $\mathbf{m}_i^l$  is then passed to the local update function  $\phi_n$  (shared by all nodes), which is the following stack of linear layers, skip connections, layer normalization and a ReLU activation function:

$$\mathbf{u}_i^l = \text{LayerNorm}(\mathbf{m}_i^l \mathbf{W}_1 + \mathbf{n}_i^l) \quad (17)$$

$$\mathbf{n}_i^{l+1} = \text{LayerNorm}(\text{ReLU}(\mathbf{u}_i^l \mathbf{W}_2) \mathbf{W}_3 + \mathbf{u}_i^l) \quad (18)$$

where  $\mathbf{W}_1 \in \mathbb{R}^{d_n \times d_n}$ ,  $\mathbf{W}_2 \in \mathbb{R}^{d_n \times d_{nh}}$ ,  $\mathbf{W}_3 \in \mathbb{R}^{d_{nh} \times d_n}$ , and  $d_{nh}$  is the hidden layer size of the feed-forward network.

This overview of the transformer architecture has focused on the fully connected case of self-attention. For brevity we have omitted the details of multi-head attention, bias vectors, and the stacking of vectors into matrices for maximal GPU utilization.

## B SOKOBAN EXPERIMENTS

In the experiments described in the main text, the model received edge feature vectors as inputs. The question we pose here is whether RT’s latent edge vectors can improve reasoning ability even on tasks with graph structure that is *hidden*, rather than passed to the model in the form of edge vectors. We use the Sokoban (Guez et al., 2019) reinforcement learning task to investigate. In Sokoban, the agent must push four yellow boxes onto the red targets within 120 time steps. Humans solving these



puzzles tend to plan out which boxes will go onto which targets. Assuming that a successful agent will learn a similar strategy, representing each box-to-target pair as a directed relation, we hypothesize that RT is more capable than a standard transformer at reasoning over such pairwise relations. For evaluation, we use RT in place of the standard transformer originally used by the Working Memory Graph (WMG) RL agent (Loynd et al., 2020), then train both modified and unmodified agents on the Sokoban task for 10 million time steps.

**Main Results** We find that using RT reduces the agent’s final error rate by a relative **15%**, from 34% to 29% of the puzzles. This improvement is much larger than the confidence intervals (0.3% and 0.7% standard error, respectively). Our results support the hypothesis that RT can learn even hidden graph structure. One alternative explanation would be that the extra trainable parameters added by RT simply improved the expressivity of WMG. But this seems unlikely since hyperparameter tuning of the unmodified WMG agent (Loynd et al., 2020) converged to an intermediate model size, rather than a larger model for more expressivity.

## C HYPERPARAMETERS

To tune the hyperparameters of RT and the CLRS-30 baseline GNNs, we used Distributed Grid Descent (DGD) (Loynd et al., 2020), a self-guided form of random search. Each search was terminated after model performance converged to a stable value. Then 20 additional runs were executed, using the winning hyperparameter configuration, to obtain results free from selection bias. All tuning runs used the CLRS-30 protocol described in D, except for the following details:

1. To prevent tuning on the canonical datasets or any fixed datasets at all, the dataset generation seeds were randomized at the start of each run.
2. To reduce variance, the minimum evaluation dataset size was raised from 32 to 100.
3. To mitigate the computational costs, all models were tuned on only the 8 core algorithms, and each training run was shortened to 32,000 examples.

Very similar procedures were used to tune RT hyperparameters for the other (non-CLRS-30) experiments. For all experiments, all untuned hyperparameter values were chosen to match the settings of the corresponding baseline models.

### C.1 CLRS-30 EXPERIMENTS

Table 2 lists the tuned hyperparameter values for CLRS-30 experiments, and Table 3 reports the sets of values considered in those searches. The runtime sizes of the corresponding models are found in Table 4, along with their training speeds in Table 5.

Table 2: Tuned hyperparameter values for CLRS-30 experiments.

	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	RT
batch_size	4	4	4	4	4	4	4
num_layers	2	2	2	1	1	3	3
learning_rate	2.5e-4	6.3e-4	2.5e-4	1.6e-3	1.6e-3	1e-3	2.5e-4
$d_n = d_e = d_g$	512	-	-	512	180	512	-
nb_heads	-	10	12	-	-	-	12
head_size	-	64	64	-	-	-	16
$d_{nh}$	-	-	-	-	-	-	32
$d_{eh1}$	-	-	-	-	-	-	16
$d_{eh2}$	-	-	-	-	-	-	8
ptr_from_edges	-	-	-	-	-	-	true
graph_vec	-	-	-	-	-	-	cat

Table 3: Hyperparameter values considered for CLRS-30 experiments.

batch_size	1, 2, 4, 8, 16
num_layers	1, 2, 3, 4
learning_rate	4e-5, 6.3e-5, 1e-4, 1.6e-4, 2.5e-4, 4e-4, 6.3e-4, 1e-3, 1.6e-3, 2.5e-3, 4e-3, 6.3e-3, 1e-2
$d_n = d_e = d_g$	45, 64, 90, 128, 180, 256, 360, 512
nb_heads	3, 4, 6, 8, 10, 12, 16
head_size	8, 12, 16, 24, 32, 45, 64
$d_{nh}$	4, 6, 8, 12, 16, 24, 32, 45, 64, 90
$d_{eh1}$	12, 16, 24, 32, 45, 64
$d_{eh2}$	4, 6, 8, 12, 16, 24, 32, 45
ptr_from_edges	false, true
graph_vec	core, cat

Table 4: Number of trainable parameters in each model tested on CLRS-30, including the framework’s encoding and decoding layers, on the reference algorithm Bellman Ford.

	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	RT
tuned	8,675,332	11,168,732	17,730,076	6,573,060	816,844	10,777,604	1,103,404
untuned	414,468	418,960	397,957	414,468	414,468	414,468	-

Table 5: Training speed in examples per second on a T4 GPU, on the reference algorithm Bellman Ford.

	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	RT
tuned	13.4	14.8	10.1	15.7	18.7	11.6	8.7
untuned	128.9	140.7	134.8	128.8	128.6	128.6	-

## C.2 LOBSTER GRAPH HYPERPARAMETERS

Table 6 lists the tuned hyperparameter values for RT on the shortest-path task over lobster graphs, along with the sets of values considered in that search.

## C.3 SOKOBAN HYPERPARAMETERS

Table 7 lists the tuned hyperparameter values for RT on the Sokoban task, along with the sets of values considered in that search.

## D TRAIN/TEST PROTOCOL

Except where specifically noted, our experiments follow the exact train/test protocol defined by CLRS-30. CLRS-30 provides canonical datasets (training, validation, and test) which can also be generated from specific random seeds: 1, 2, 3. The graphs in the training and validation datasets contain 16 nodes, while the test graphs are of size 64 to evaluate the out-of-distribution (OOD) generalization of models. Training is performed on a random sequence of 320,000 examples drawn with replacement from the train set, where each example trajectory contains a variable number of reasoning steps. During training, the model is evaluated on the validation set after every 320 examples. At the end of training, the model with the highest validation score is evaluated on the test set. The average test micro-F1 score is reported for all results. The published CLRS-30 results are reported as averages over 3 random run seeds, but we use 20 seeds in all of our experiments.

## E TEST RESULTS ON CLRS-30

Test performance of all tuned models evaluated on CLRS-30 may be found in Tables 19 (mean test micro-F1 score) and 18 (standard deviation). On certain tasks in which baseline GNN performances

Table 6: Tuned hyperparameter values for RT on the lobster graph experiment.

	Tuned values	Values considered
learning_rate	6.3e-5	4e-5, 6.3e-5, 1e-4, 1.6e-4, 2.5e-4, 4e-4
output_layer_size	180	64, 90, 128, 180, 256, 360, 512
nb_heads	8	3, 4, 6, 8, 10
head_size	28	12, 16, 20, 24, 28, 32
$d_{nh}$	12	3, 4, 6, 8, 12, 16, 24
$d_e$	128	16, 24, 32, 45, 64, 90, 128
$d_{eh1}$	32	12, 16, 24, 32, 45, 64, 90
$d_{eh2}$	8	8, 12, 16, 24, 32, 45, 64
dropout_rate	0.0	0.0, 0.01, 0.02, 0.04, 0.08
grad_clip	128.0	16.0, 32.0, 64.0, 128.0, 256.0, 512.0

Table 7: Tuned hyperparameter values for RT on Sokoban.

	Tuned values	Values considered
$d_e$	128	8, 12, 16, 24, 32, 45, 64, 90, 128, 180, 256, 360, 512, 720, 1024
$d_{eh1}$	64	6, 8, 12, 16, 24, 32, 45, 64, 90, 128, 180, 256, 360, 512
$d_{eh2}$	12	6, 8, 12, 16, 24, 32, 45, 64, 90, 128, 180, 256, 360, 512

improved, we also observed higher variability in results. Following Veličković et al. (2022), we report the best performance between PGN-u and PGN-m on every task in the column titled PGN-c (for PGN-combination). Note therefore that PGN-c does not represent a single model.

We bold the results of the best-performing single model for each specific task. RT was the best-performing on **11 out of 30** of the tasks. Overall, MPNN was the top-scoring baseline model, winning on 8 tasks. Deep Sets won on 4 tasks. PGN-u won on 1 task, and PGN-m won on 5 tasks. Finally, GAT-v2 won on 1 task.

Table 1 shows test performances of all tuned models across 8 algorithm classes. As mentioned in Section 5.1.3, RT performed best in **6 out of 8** of the classes, and second-best on greedy algorithms and sorting.

Table 8 shows which algorithms belong to which classes, and which task types. Each algorithm may correspond to multiple task types if the hint and final outputs of that algorithm differ.

Table 9 shows test performance of the baseline GNN models trained on datasets of varying size, without hyperparameter tuning. Specifically, we compare test scores between the models trained on datasets of size 1000, and datasets of size 10000. We note that the results in the first row agree closely with those in the CLRS-30 paper (Table 11).

## F CLRS-30 BENCHMARK ABLATIONS

We perform our ablation studies on the 8 core CLRS-30 tasks. Table 13 compares the test performance of the standard transformer to the performance of RT. Table 14 shows the drop in test performance that resulted from restricting RT to one layer. The original, tuned RT had 3 layers, and is labeled RT-3. Table 15 shows the marginal improvement that resulted from decoding node vectors using only edge vectors. Table 16 shows the effects that handling global input vectors through a core node (vs. concatenation with the input node vectors) has on RT test performance. RT with core node only won on 3 out of 7 tasks, but had the higher average test performance by 0.08%. Finally, Table 17 shows the drop in test performance that resulted from removing edge updates from RT.

## G CLRS-30 MODEL VARIANCE

Table 18 shows that RT produces some of the largest standard deviations over random runs. To investigate these results, we first examine the Naïve String Matcher task, where RT’s variance is the largest value in the table (32.3%). Figure 5 displays each model’s distribution of run scores, through

histograms. We see that RT’s twenty runs on this task obtain a wide range of scores, including a spike in the range from 80% to 100%, while none of the baseline model runs surpass a score of 20%. This explains RT’s high variance on this task compared to the other models. In summary, in a case like this higher variance is a consequence of higher performance.

The same behavior can be inferred without the histograms by examining Table 18 and Table 19, which show that RT’s high variance on Naïve String Matcher is associated with far higher mean performance on the task than the baseline models. The same pattern is apparent for RT’s next two highest-variance tasks, Topological Sort and Quickselect.

For a broader view of variance, Figure 6 displays the model score distributions over all CLRS-30 tasks. We see that RT’s distribution is weighted more heavily than the other models in the  $>80\%$  range, and underweighted in the  $<20\%$  range. Meanwhile, all model distributions are spread quite widely over the five range bins. This spread is quantified numerically by the last row of Table 18, where RT’s overall standard deviation is shown to be one of the smallest.

Figure 5: Histograms describing the variance in model results on Naïve String Matcher, across runs

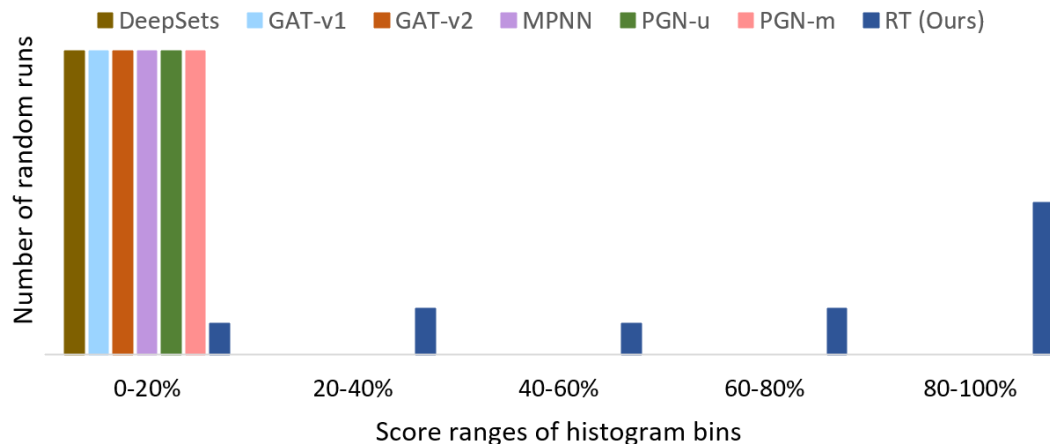


Figure 6: Histograms describing the variance in model results across all runs on the 30 CLRS tasks

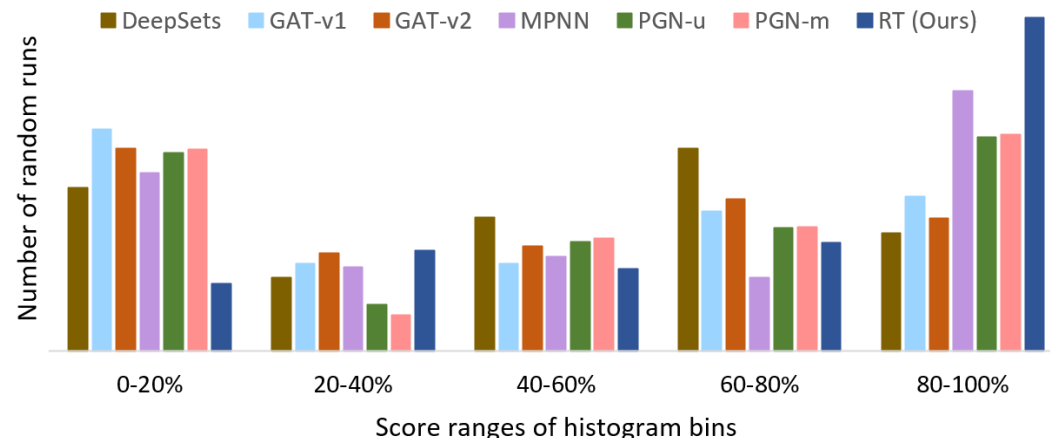


Table 8: Algorithms and their respective classes and task types. Taking hint targets into consideration, there are 3 task types in CLRS-30: node (N), edge (E), and graph (G).

Algorithm	N	E	G	D&C	DP	Geo	Graph	Greedy	Search	Sort	String
Activity Selector											
Articulation Points											
Bellman-Ford											
BFS											
Binary Search											
Bridges											
Bubble Sort											
DAG Shortest Paths											
DFS											
Dijkstra											
Find Max. Subarray											
Floyd-Warshall											
Graham Scan											
Heapsort											
Insertion Sort											
Jarvis' March											
KMP Matcher											
LCS Length											
Matrix Chain Order											
Minimum											
MST-Kruskal											
MST-Prim											
Naïve String Match											
Optimal BST											
Quickselect											
Quicksort											
Segments Intersect											
SCC											
Task Scheduling											
Topological Sort											
Total	27	29	14	1	3	3	12	2	3	4	2

Table 9: Average test scores of untuned baseline models trained on either the original small datasets, versus trained on the expanded training datasets, for the 8 core tasks.

Training Set Size	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	PGN-c
1000	45.95%	42.24%	42.53%	54.66%	51.07%	56.18%	61.29%
10000	46.70%	42.97%	45.37%	56.93%	56.77%	58.20%	67.11%

Table 10: Test score improvements from hyperparameter tuning on the 8 core tasks. The drop in score for PGN-m was likely the result of tuning hyperparameters (for all models) on shorter training runs than was used for evaluation.

Algorithm	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	PGN-c
No Tuning	46.70%	42.97%	45.37%	56.93%	56.77%	58.20%	67.11%
Tuning	51.55%	50.47%	48.97%	59.75%	59.97%	57.53%	67.86%

Table 11: Reproduction of baseline model results on the 8 core algorithms.

Results	# Seeds	Deep Sets	MPNN	PGN-c
Published (Veličković et al., 2022)	3	45.50%	53.05%	61.15%
Reproduced (Ours)	20	45.95%	54.66%	61.29%

Table 12: Test score improvements from augmenting the CLRS-30 baseline models.

Results	# Seeds	Deep Sets	MPNN	PGN-c
CLRS-30 Published Results	3	42.72%	44.99%	50.84%
Our Results	20	48.60%	49.23%	52.82%

Table 13: Standard transformer ablation (with re-tuned hyperparameters) evaluated on the 8 core algorithms.

Algorithm	Transformer	RT (Ours)
Activity Selector	68.01% $\pm$ 6.0	<b>87.72%</b> $\pm$ 2.7
Bellman-Ford	39.79% $\pm$ 2.4	<b>94.24%</b> $\pm$ 1.5
Binary Search	2.84% $\pm$ 0.6	<b>81.48%</b> $\pm$ 6.7
Find Max. Subarray	26.60% $\pm$ 6.0	<b>66.52%</b> $\pm$ 3.7
Graham Scan	58.84% $\pm$ 6.9	<b>74.15%</b> $\pm$ 7.4
Insertion Sort	60.57% $\pm$ 15.7	<b>89.43%</b> $\pm$ 9.0
Matrix Chain Order	80.54% $\pm$ 6.8	<b>91.89%</b> $\pm$ 1.2
Naïve String Match	1.51% $\pm$ 1.7	<b>65.01%</b> $\pm$ 32.
Average	42.34%	<b>81.30%</b>

Table 14: Single-layer RT ablation (with re-tuned hyperparameters) evaluated on the 8 core algorithms.

Algorithm	RT-1	RT-3 (Ours)
Activity Selector	83.41% $\pm$ 5.8	<b>87.72%</b> $\pm$ 2.7
Bellman-Ford	93.52% $\pm$ 1.7	<b>94.24%</b> $\pm$ 1.5
Binary Search	61.61% $\pm$ 15.1	<b>81.48%</b> $\pm$ 6.7
Find Max. Subarray	65.07% $\pm$ 4.0	<b>66.52%</b> $\pm$ 3.7
Graham Scan	<b>74.80%</b> $\pm$ 7.9	74.15% $\pm$ 7.4
Insertion Sort	77.54% $\pm$ 10.3	<b>89.43%</b> $\pm$ 9.0
Matrix Chain Order	91.05% $\pm$ 1.0	<b>91.89%</b> $\pm$ 1.2
Naïve String Match	16.50% $\pm$ 23.2	<b>65.01%</b> $\pm$ 32.
Average	70.44%	<b>81.30%</b>

Table 15: Ablation of the node pointer decoding procedure evaluated on the 8 core algorithms.

Algorithm	RT with original decoding	RT with edge-only decoding (Ours)
Activity Selector	<b>88.09%</b> $\pm$ 5.0	87.72% $\pm$ 2.7
Bellman-Ford	<b>94.95%</b> $\pm$ 1.1	94.24% $\pm$ 1.5
Binary Search	80.06% $\pm$ 6.6	<b>81.48%</b> $\pm$ 6.7
Find Max. Subarray	<b>67.44%</b> $\pm$ 3.7	66.52% $\pm$ 3.7
Graham Scan	<b>75.71%</b> $\pm$ 10.3	74.15% $\pm$ 7.4
Insertion Sort	71.32% $\pm$ 11.0	<b>89.43%</b> $\pm$ 9.0
Matrix Chain Order	<b>92.12%</b> $\pm$ 0.9	91.89% $\pm$ 1.2
Naïve String Match	<b>78.43%</b> $\pm$ 22.5	65.01% $\pm$ 32.
Average	81.00%	<b>81.30%</b>

Table 16: Ablation of RT core node (vs. concatenation of the global vector) evaluated on 7 representative algorithms that use global input features or hints.

Algorithm	RT with core node	RT without core node (Ours)
Binary Search	75.40% $\pm$ 11.0	<b>81.48%</b> $\pm$ 6.7
Find Max. Subarray	<b>66.96%</b> $\pm$ 4.5	66.52% $\pm$ 3.7
Graham Scan	71.83% $\pm$ 10.2	<b>74.15%</b> $\pm$ 7.4
Heapsort	30.67% $\pm$ 18.9	<b>32.96%</b> $\pm$ 14.8
KMP Matcher	0.02% $\pm$ 0.0	<b>0.03%</b> $\pm$ 0.1
MST-Kruskal	<b>75.59%</b> $\pm$ 5.8	64.91% $\pm$ 11.8
Task Scheduling	<b>83.09%</b> $\pm$ 1.8	82.93% $\pm$ 1.8
Average	<b>57.65%</b>	57.57%

Table 17: Ablation of RT’s edge update procedure evaluated on the 8 core algorithms

Algorithm	RT without edge updates	RT with edge updates (Ours)
Activity Selector	82.13% $\pm$ 7.0	<b>87.72%</b> $\pm$ 2.7
Bellman-Ford	91.03% $\pm$ 2.3	<b>94.24%</b> $\pm$ 1.5
Binary Search	60.29% $\pm$ 12.5	<b>81.48%</b> $\pm$ 6.7
Find Max. Subarray	19.09% $\pm$ 1.6	<b>66.52%</b> $\pm$ 3.7
Graham Scan	69.19% $\pm$ 7.7	<b>74.15%</b> $\pm$ 7.4
Insertion Sort	22.30% $\pm$ 8.5	<b>89.43%</b> $\pm$ 9.0
Matrix Chain Order	85.68% $\pm$ 1.5	<b>91.89%</b> $\pm$ 1.2
Naïve String Match	2.22% $\pm$ 0.8	<b>65.01%</b> $\pm$ 32.
Average	53.99%	<b>81.30%</b>

Table 18: Standard deviations over 20 seeds for all tuned models on all algorithms. Each value in the row “Over All Runs” is not an average of variances for each algorithm, but rather the variance across all runs.

Algorithm	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	RT (Ours)
Activity Selector	1.7%	1.4%	2.1%	1.3%	2.6%	1.9%	2.7%
Articulation Points	6.0%	8.0%	6.3%	6.1%	3.5%	7.5%	14.6%
Bellman-Ford	2.4%	1.5%	1.6%	1.9%	0.9%	1.3%	1.5%
BFS	1.0%	0.4%	0.4%	0.2%	0.3%	0.5%	0.7%
Binary Search	3.8%	5.8%	7.9%	5.0%	10.4%	3.7%	6.7%
Bridges	4.8%	6.4%	8.0%	17.8%	11.0%	7.8%	11.8%
Bubble Sort	3.1%	2.5%	1.3%	5.0%	1.9%	0.2%	13.0%
DAG Shortest Paths	3.8%	2.3%	2.2%	1.6%	3.2%	0.9%	1.6%
DFS	1.9%	2.1%	1.7%	2.7%	1.5%	1.5%	10.5%
Dijkstra	3.6%	9.5%	7.1%	4.3%	11.0%	3.4%	5.8%
Find Max. Subarray	1.5%	2.4%	2.1%	2.9%	1.6%	15.0%	3.7%
Floyd-Warshall	4.2%	6.0%	3.7%	4.7%	4.8%	2.5%	7.6%
Graham Scan	3.3%	6.6%	5.3%	1.4%	5.7%	6.0%	7.4%
Heapsort	8.8%	3.8%	4.1%	7.1%	8.9%	0.4%	14.8%
Insertion Sort	1.5%	14.8%	11.6%	9.1%	11.2%	0.2%	9.0%
Jarvis’ March	8.6%	2.6%	3.9%	29.3%	2.5%	5.8%	2.2%
KMP Matcher	1.0%	0.6%	0.6%	1.1%	0.7%	0.4%	0.1%
LCS Length	6.5%	7.2%	4.6%	2.7%	7.8%	3.5%	4.1%
Matrix Chain Order	2.8%	5.4%	5.1%	2.3%	0.9%	1.1%	1.2%
Minimum	5.8%	2.6%	10.4%	3.4%	3.4%	27.3%	2.0%
MST-Kruskal	4.9%	2.9%	4.2%	5.9%	6.1%	4.3%	11.8%
MST-Prim	11.4%	9.2%	10.7%	5.1%	4.6%	7.2%	7.9%
Naïve String Match	0.3%	0.7%	0.5%	1.7%	0.8%	0.7%	32.3%
Optimal BST	6.0%	5.7%	5.1%	3.5%	2.0%	2.0%	2.6%
Quickselect	2.4%	0.5%	0.4%	1.6%	0.9%	1.0%	17.3%
Quicksort	4.3%	1.3%	0.8%	3.9%	1.9%	0.2%	13.2%
Segments Intersect	0.7%	0.5%	0.7%	2.5%	0.8%	0.8%	2.6%
SCC	5.9%	8.8%	9.9%	5.2%	6.0%	6.9%	15.2%
Task Scheduling	0.5%	0.4%	0.8%	0.9%	0.5%	0.5%	1.8%
Topological Sort	10.3%	12.7%	17.8%	5.8%	6.5%	10.1%	17.5%
Over All Runs	29.3%	32.0%	31.3%	34.6%	33.1%	35.0%	29.6%

Table 19: Average test scores of all tuned models on all algorithms.

Algorithm	Deep Sets	GAT-v1	GAT-v2	MPNN	PGN-u	PGN-m	PGN-c	RT (Ours)
Activity Selector	72.22%	68.89%	67.45%	<b>95.45%</b>	67.05%	69.83%	69.83%	87.72%
Articulation Points	38.50%	31.46%	31.96%	46.21%	46.87%	<b>49.73%</b>	49.73%	34.15%
Bellman-Ford	51.00%	93.10%	93.75%	95.42%	<b>95.83%</b>	95.43%	95.83%	94.24%
BFS	98.14%	99.76%	99.49%	<b>99.78%</b>	99.71%	99.27%	99.71%	99.14%
Binary Search	55.77%	17.21%	31.11%	38.00%	61.71%	<b>87.03%</b>	87.03%	81.48%
Bridges	36.20%	22.90%	24.07%	<b>61.29%</b>	44.72%	57.15%	57.15%	37.88%
Bubble Sort	<b>65.03%</b>	9.69%	8.46%	13.14%	7.54%	2.05%	7.54%	38.22%
DAG Shortest Paths	77.98%	86.44%	89.35%	97.33%	96.23%	<b>98.16%</b>	98.16%	96.61%
DFS	7.62%	11.71%	12.08%	13.85%	10.78%	8.88%	10.78%	<b>39.23%</b>
Dijkstra	44.51%	61.42%	68.10%	<b>92.18%</b>	78.45%	90.02%	90.02%	91.20%
Find Max. Subarray	12.29%	15.19%	14.80%	16.14%	16.71%	51.30%	51.30%	<b>66.52%</b>
Floyd-Warshall	6.24%	30.53%	37.58%	28.81%	27.60%	<b>39.24%</b>	39.24%	31.59%
Graham Scan	64.48%	65.05%	67.07%	<b>95.31%</b>	67.89%	64.66%	67.89%	74.15%
Heapsort	<b>72.39%</b>	9.90%	7.65%	27.08%	17.88%	1.60%	17.88%	32.96%
Insertion Sort	72.88%	61.00%	50.19%	50.30%	82.42%	3.64%	82.42%	<b>89.43%</b>
Jarvis' March	46.01%	55.40%	50.23%	59.31%	49.54%	49.57%	49.57%	<b>94.57%</b>
KMP Matcher	<b>3.71%</b>	1.03%	1.32%	2.35%	1.75%	0.44%	1.75%	0.03%
LCS Length	55.85%	48.14%	48.30%	54.42%	53.85%	56.00%	56.00%	<b>83.32%</b>
Matrix Chain Order	81.65%	81.59%	65.58%	85.53%	86.65%	86.47%	86.65%	<b>91.89%</b>
Minimum	91.69%	86.87%	80.60%	90.73%	89.22%	70.69%	89.22%	<b>95.28%</b>
MST-Kruskal	69.07%	67.26%	68.60%	<b>70.84%</b>	63.47%	69.35%	69.35%	64.91%
MST-Prim	35.70%	61.83%	68.72%	<b>86.43%</b>	81.59%	83.61%	83.61%	85.77%
Naïve String Match	2.12%	1.70%	1.81%	1.83%	1.46%	1.90%	1.90%	<b>65.01%</b>
Optimal BST	67.37%	61.91%	63.78%	66.48%	65.19%	70.74%	70.74%	<b>74.40%</b>
Quickselect	5.51%	2.03%	2.40%	3.07%	2.00%	4.92%	4.92%	<b>19.18%</b>
Quicksort	<b>65.26%</b>	4.41%	5.00%	17.95%	7.90%	2.63%	7.90%	39.42%
Segments Intersect	85.94%	86.36%	86.10%	<b>94.46%</b>	85.89%	85.66%	85.89%	84.94%
SCC	21.13%	23.66%	<b>29.47%</b>	12.58%	12.97%	17.20%	17.20%	28.59%
Task Scheduling	83.45%	82.61%	82.61%	83.36%	83.54%	<b>83.62%</b>	83.62%	82.93%
Topological Sort	19.02%	43.47%	43.23%	54.93%	51.71%	64.28%	64.28%	<b>80.62%</b>
Average	50.29%	46.42%	46.70%	55.15%	51.94%	52.17%	56.57%	<b>66.18%</b>