

Improving Long Document Topic Segmentation Models With Enhanced Coherence Modeling

Hai Yu, Chong Deng, Qinglin Zhang, Jiaqing Liu, Qian Chen, Wen Wang

Speech Lab, Alibaba Group
{yuhai.yu, w.wang}@alibaba-inc.com

Abstract

Topic segmentation is critical for obtaining structured documents and improving downstream tasks such as information retrieval. Due to its ability of automatically exploring clues of topic shift from abundant labeled data, recent supervised neural models have greatly promoted the development of long document topic segmentation, but leaving the deeper relationship between coherence and topic segmentation underexplored. Therefore, this paper enhances the ability of supervised models to capture coherence from both **logical structure** and **semantic similarity** perspectives to further improve the topic segmentation performance, proposing **Topic-aware Sentence Structure Prediction (TSSP)** and **Contrastive Semantic Similarity Learning (CSSL)**. Specifically, the TSSP task is proposed to force the model to comprehend structural information by learning the original relations between adjacent sentences in a disarrayed document, which is constructed by jointly disrupting the original document at topic and sentence levels. Moreover, we utilize inter- and intra-topic information to construct contrastive samples and design the CSSL objective to ensure that the sentences representations in the same topic have higher similarity, while those in different topics are less similar. Extensive experiments show that Longformer with our approach significantly outperforms state-of-the-art (SOTA) methods. Our approach improves F_1 of SOTA by 3.42 (73.74 \rightarrow 77.16) and improves P_k by 1.11 points (15.0 \rightarrow 13.89) on WIKI-727K and achieves an average relative reduction of 4.3% on P_k on WikiSection. The average relative P_k drop of 8.38% on two out-of-domain datasets also demonstrates the robustness of our approach¹.

1 Introduction

Topic segmentation aims to automatically segment the text into non-overlapping topically coherent

parts (Hearst, 1994). Topic segmentation makes documents easier to read and understand, and also plays a key role in many downstream tasks such as information extraction (Prince and Labadié, 2007; Shtekh et al., 2018) and document summarization (Xiao and Carenini, 2019; Liu et al., 2022). Topic segmentation methods can be categorized into linear segmentation (Hearst, 1997), which yields a linear sequence of topic segments, and hierarchical segmentation (Bayomi and Lawless, 2018; Hazem et al., 2020), which produces a hierarchical structure with top-level segments divided into sub-segments. We focus on linear topic segmentation in this work, especially for long documents.

Based on the definition of topics, each sentence in a topic relates to the central idea of the topic, and topics should be discriminative. Hence, two adjacent sentences from the same topic are more similar than those from different topics. Exploring this idea, prior unsupervised models mainly infer topic boundaries through computing text similarity (Riedl and Biemann, 2012b; Glavaš et al., 2016) or exploring topic representation of text (Misra et al., 2009; Du et al., 2013). Different from the shallow features carefully designed and used by unsupervised methods, supervised neural models can model deeper semantic information and explore clues of topic shift from labeled data (Badjatiya et al., 2018; Koshorek et al., 2018). Supervised models have achieved large gains on topic segmentation through pre-training language models (PLMs) (e.g., BERT) and fine-tuning on large-scale supervised datasets (Kenton and Toutanova, 2019; Lukasik et al., 2020; Zhang et al., 2021; Inan et al., 2022). Recently, (Arnold et al., 2019; Xing et al., 2020; Somasundaran et al., 2020; Lo et al., 2021) improve topic segmentation performance by explicitly modeling text coherence. However, these approaches either neglect context modeling beyond adjacent sentences (Wang et al., 2017), or require additional label information (Arnold et al., 2019;

¹Our code is publicly available at <https://github.com/alibaba-damo-academy/SpokenNLP/>

Barrow et al., 2020; Lo et al., 2021; Inan et al., 2022), or impede learning sentence-pair coherence without considering both coherent and incoherent pairs (Xing et al., 2020). Moreover, compared to short documents, topic segmentation becomes more critical for understanding long documents, and coherence modeling for long document topic segmentation is more crucial.

Coherence plays a key role in understanding both logical structures and text semantics. Consequently, to enhance coherence modeling in supervised topic segmentation methods, we propose two auxiliary coherence-related tasks, namely, **Topic-aware Sentence Structure Prediction (TSSP)** and **Contrastive Semantic Similarity Learning (CSSL)**. We create disordered incoherent documents, then the TSSP task utilizes these documents and enhances learning sentence-pair structure information. The CSSL task regulates sentence representations and ensures sentences in the same topic have higher semantic similarity while sentences in different topics are less similar. Experimental results demonstrate that both TSSP and CSSL improve topic segmentation performance and their combination achieves further gains. Moreover, performance gains on out-of-domain data from the proposed approaches demonstrate that they also significantly improve generalizability of the model.

Large Language Models such as ChatGPT² have achieved impressive performance on a wide variety of NLP tasks. We adopt the prompts proposed by Fan and Jiang (2023) and evaluate ChatGPT on the WIKI-50 dataset (Koshorek et al., 2018). We find ChatGPT performs considerably worse than fine-tuning BERT-sized PLMs on long document topic segmentation (as shown in Appendix A).

Our contributions can be summarized as follows.

- We investigate supervised topic segmentation on long documents and confirm the necessity of exploiting longer context information.
- We propose two novel auxiliary tasks TSSP and CSSL for coherence modeling from the perspectives of both logical structure and semantic similarity, thereby improving the performance of topic segmentation.
- Our proposed approaches set new state-of-the-art (SOTA) performance on topic segmentation benchmarks, including long documents. Ablation study shows that both new tasks effectively

improve topic segmentation performance and they also improve generalizability of the model.

2 Related Work

2.1 Topic Segmentation Models

Both unsupervised and supervised approaches have been proposed before to solve topic segmentation. Unsupervised methods typically design features based on the assumption that segments in the same topic are more coherent than those that belong to different topics, such as lexical cohesion (Hearst, 1997; Choi, 2000; Riedl and Biemann, 2012b), topic models (Misra et al., 2009; Riedl and Biemann, 2012a; Jameel and Lam, 2013; Du et al., 2013) and semantic embedding (Glavaš et al., 2016; Solbiati et al., 2021; Xing and Carenini, 2021). In contrast, supervised models can achieve more precise predictions by automatically mining clues of topic shift from large amounts of labeled data, either by classification on the pairs of sentences or chunks (Wang et al., 2017; Lukasik et al., 2020) or sequence labeling on the whole input sequence (Koshorek et al., 2018; Badjatiya et al., 2018; Xing et al., 2020; Zhang et al., 2021). However, the memory consumption and efficiency of neural models such as BERT (Kenton and Toutanova, 2019) can be limiting factors for modeling long documents as their length increases. Some approaches (Arnold et al., 2019; Lukasik et al., 2020; Lo et al., 2021; Somasundaran et al., 2020) use hierarchical modeling from tokens to sentences, while others (Somasundaran et al., 2020; Zhang et al., 2021) use sliding windows to reduce resource consumption. However, both directions of methods may not be adequate for capturing the full context of long documents, which is critical for accurate topic segmentation.

2.2 Coherence Modeling

The NLP community has developed models for comprehending text coherence and tasks to measure their effectiveness, such as predicting the coherence score of documents (Barzilay and Lapata, 2008), predicting the position where the removed sentence was originally located (Elsner and Charniak, 2011) and restoring out-of-order sentences (Logeswaran et al., 2018; Chowdhury et al., 2021). Some researchers have aimed to improve topic segmentation models by explicitly modeling text coherence. However, **all of prior works consider coherence modeling for topic segmenta-**

²<https://chat.openai.com>

tion only from a single perspective. For example, Wang et al. (2017) ranked sentence pairs based on their semantic coherence to segment documents within the Learning-to-Rank framework, but they did not consider contextual information beyond two sentences. CATS (Somasundaran et al., 2020) created corrupted text by randomly shuffling or replacing sentences to force the model to produce a higher coherence score for the correct document than for its corrupt counterpart. However the fluency of the constructed document is too low so that the semantic information is basically lost. Xing et al. (2020) proposed to add the Consecutive Sentence-pair Coherence (CSC) task by computing the cosine similarity as coherence score. But no more incoherent sentence pairs are considered in CSC, except for those located at segment boundaries. Other methods (Arnold et al., 2019; Barrow et al., 2020; Lo et al., 2021; Inan et al., 2022) have used topic labels to constrain sentence representations within the same topic, but they require additional topic label information. In contrast to these works, **our work is the first to consider topical coherence as both text semantic similarity and logical structure (flow) of sentences.**

3 Methodology

In this section, we first describe our baseline model for topic segmentation (Section 3.1), then introduce our proposed Topic-aware Sentence Structure Prediction (TSSP) module (Section 3.2) and Contrastive Semantic Similarity Learning (CSSL) module (Section 3.3). Figure 1 illustrates the overall architecture of our topic segmentation model.

3.1 Baseline Model for Topic Segmentation

Our supervised baseline model formulates topic segmentation as a sentence-level sequence labeling task (Zhang et al., 2021)). Given a document represented as a sequence of sentences $[s_1, s_2, s_3, \dots, s_n]$ (where n is the number of sentences), the model predicts binary labels $[y_1, y_2, \dots, y_{n-1}]$ corresponding to each sentence except for the last sentence, where $y_i = 1, i \in \{1, \dots, n-1\}$ means s_i is the last sentence of a topic and 0 means not.

Following prior works (Somasundaran et al., 2020; Zhang et al., 2021), we prepend a special token BOS before each sentence and the updated sentence is shown in Eq. 1, where $t_{i,1}$ is BOS and $|s_i|$ is the number of tokens in s_i .

$$s'_i = [t_{i,1}, t_{i,2}, \dots, t_{i,|s_i|+1}] \quad (1)$$

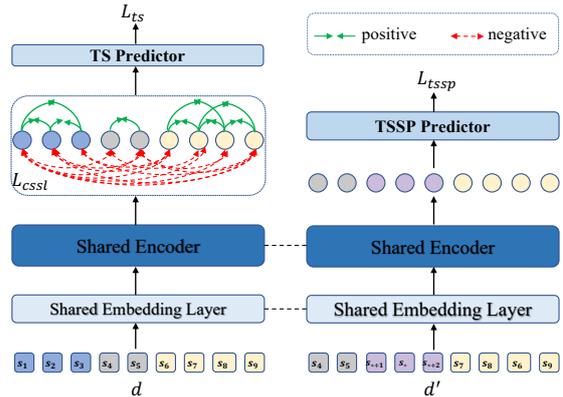


Figure 1: The overall architecture of our model. s_i is i -th sentence in document d . d' is the augmented data we construct corresponding to document d (Section 3.2). TS denotes Topic Segmentation, TSSP denotes Topic-aware Sentence Structure Prediction (Section 3.2) and CSSL denotes Contrastive Semantic Similarity Learning (Section 3.3). L_{ts} , L_{tssp} and L_{cssl} denote the losses we describe in Section 3.

The token sequence for the document is embedded through the embedding layer and then fed into the encoder to obtain its contextual representations. We take the representation of each BOS h_i as the sentence representation, as shown in Eq. 4. Then we apply a softmax binary classifier g as in Eq. 3 on top of h_i to compute the topic segmentation probability p of each sentence. We use the standard binary cross-entropy loss function as in Eq. 2 to train the model.

$$L_{ts} = - \sum_{i=1}^{n-1} [y_i \ln p_i + (1-y_i) \ln(1-p_i)] \quad (2)$$

$$p_i = g(h_i) \quad (3)$$

$$h_i = Encoder(t_{i,1}) \quad (4)$$

3.2 Topic-aware Sentence Structure Prediction

Learning sentence representations that reflect inter-sentence coherence (inter-sentence relations) is critical for topic segmentation. Several tasks have been proposed in prior works for modeling sentence-pair relations. The Next Sentence Prediction (NSP) task in BERT (Kenton and Toutanova, 2019) predicts whether two segments appear consecutively in the same document or come from different documents, hence it fuses topic prediction and coherence prediction in one task. In order to better model inter-sentence coherence, the Binary Sentence Ordering (BSO) task in ALBERT (Lan et al., 2019) constructs input as two consecutive segments from the

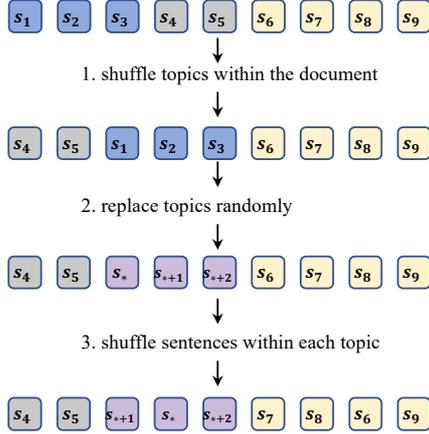


Figure 2: The process of constructing the augmented document (the bottom line) from the original document (the top line). s_i denotes i -th sentence of the document. The sentences with the same colors are in the same topic. Sentences in light purple are topics from another document.

same document but 50% of the time their order is reversed. The ternary Sentence Structural Objective (SSO) in StructBERT (Wang et al., 2019) further increases the task difficulty of BSO by adding a class of sentence pairs from different documents.

All these tasks for learning inter-sentence coherence have not explored topic structures. Different from them, we propose a **Topic-aware Sentence Structure Prediction (TSSP)** task to help the model learn sentence representations with structural information that explore **topic structures** and hence are more suitable for topic segmentation.

Data Augmentation We tailor data augmentation techniques for topic segmentation. As depicted in the right half of Figure 1, we create an augmented document d' from the original document d and feed d' into the shared encoder after the embedding layer to enhance inter-sentence coherence modeling. Different from the auxiliary coherence modeling approach proposed by Somasundaran et al. (2020) which merely forces the model to predict a lower coherence for the corrupted document than for the original document, we simultaneously perturb d at both topic and sentence levels, constructing the augmented document to force the model to learn topic-aware inter-sentence structure information. Hence, our task is more challenging and the learned sentence representations are more suitable for topic segmentation. Figure 2 illustrates the process of constructing an augmented document. We first shuffle topics within the doc-

ument, then randomly replace some topics with topics from other documents to increase diversity. Specifically, for a randomly selected subset of p_1 percent of the documents, we replace each topic in them with a topic snippet from other documents with a probability of p_2 and keep the same with the probability of $1 - p_2$. The default values of p_1 and p_2 are both 0.5. Finally, we shuffle the sentences in each topic to further increase the difficulty of the TSSP task.

Sentence-pair Relations After constructing the augmented document d' , we define the TSSP task as an auxiliary objective to assist the model to capture inter-sentence coherence, by learning the *original* structural relations between adjacent sentence pair a and b in the augmented *incoherent* document d' . We define three types of sentence-pair relations. The first type (label 0) is when a and b belong to different topics, indicating a topic shift. The second type (label 1) is when a and b are in the same topic and b is the next sentence of a . The third type (label 2) is when a and b belong to the same topic but b is not the next sentence of a . For example, the sequence of sentences in Figure 2 will be assigned with the TSSP labels as [1, 0, 2, 2, 0, 1, 2, 2]. We use $\tilde{y} = [\tilde{y}_0, \tilde{y}_1, \tilde{y}_2]$ to represent the one-hot encoding of the TSSP labels, where $\tilde{y}_j = 1, j \in \{0, 1, 2\}$ if the sentence pair belongs to the j -th category; otherwise, $\tilde{y}_j = 0$. For the TSSP task, we use the cross entropy loss function defined in Eq. 5, where $y_{i,j}$ denotes the label of the i -th sentence pair, and $p_{i,j}$ denotes the probability of the i -th sentence pair belonging to the j -th category.

$$L_{tssp} = - \sum_{i=1}^{n-1} \sum_{j=0}^2 y_{i,j} \ln(p_{i,j}) \quad (5)$$

3.3 Contrastive Semantic Similarity Learning

We assume that two sentences or segments from the same topic are inherently more coherent than those from different topics. Therefore, the motivation of our **Contrastive Semantic Similarity Learning (CSSL)** module is to adjust the sentence representation learning to grasp the **relative** high and low coherence relationship. Different from (Xing et al., 2020) which only calculates the cosine similarity of two adjacent sentences, our CSSL takes into account both *similar* and *dissimilar* sentence pairs to improve sentence representation learning.

Construct Positive and Negative Samples The upper left part of Figure 1 illustrates how CSSL

leverages contrastive learning to regulate sentence representations, which in turn influences the predictions of topic segmentation. To construct positive and negative sample pairs in the contrastive learning framework, prior works in NLP propose several data augmentation techniques such as word deletion and substitution (Wu et al., 2020), dropout (Gao et al., 2021), and adversarial attack (Yan et al., 2021). However, different from prior works that synthesize positive and negative pairs, we explore *natural* positive and negative pairs for topic segmentation, as two sentences or segments from the same topic are inherently more coherent than those from different topics. Accordingly, regarding each sentence in the document as the anchor sentence, we choose k_1 sentences in the same topic to constitute positive pairs and k_2 sentences from different topics as negative pairs based on the ordering of the distance of a sentence from the anchor sentence, starting from the nearest to the farthest. Recently, Gao et al. (2023) proposes a contrastive learning method for unsupervised topic segmentation. However, in their unsupervised method, similar and dissimilar sample pairs could be noisy due to lack of ground truth topic labels, which would not occur in our supervised settings.

Loss Function As illustrated in Figure 1, we utilize the following loss function to train our model and learn contrastive semantic representations of inter-topic and intra-topic sentences. k_1 and k_2 are hyperparameters that determine the number of sentences used to form positive and negative pairs, respectively. For each sentence representation h_i , $h_{i,j}^+$ denotes the j -th similar sentence in the same topic as sentence i , while $h_{i,j}^-$ denotes the j -th dissimilar sentence in a different topic from sentence i . We select sentences to form sentence pairs based on their distances to the anchor sentence, from closest to farthest. The objective of our loss function is to bring semantically similar neighbors closer and push away negative sentence pairs, as in Eq. 6. τ in Eq. 8 is a temperature hyper-parameter to scale the cosine similarity of two vectors, with a default value 0.1. In future work, in order to avoid pushing away sentence pairs in different topics but covering similar topical semantics, we plan to consider refining the loss, such as assigning loss weights based on their semantic similarity.

$$L_{cssl} = - \sum_{i=1}^n \log(l_{cssl}^i) \quad (6)$$

$$l_{cssl}^i = \frac{\sum_{j=1}^{k_1} e^{\text{sim}(h_i, h_{i,j}^+)}}{\sum_{j=1}^{k_1} e^{\text{sim}(h_i, h_{i,j}^+)} + \sum_{j=1}^{k_2} e^{\text{sim}(h_i, h_{i,j}^-)}} \quad (7)$$

$$\text{sim}(x_1, x_2) = \frac{x_1^T x_2}{\|x_1\| \cdot \|x_2\|} / \tau \quad (8)$$

Combining Eq. 2, 5 and 6, we form the final loss function of our topic segmentation model as Eq. 9, where α_1 and α_2 are hyper-parameters used to adjust the loss weights.

$$L_{total} = L_{ts} + \alpha_1 L_{tssp} + \alpha_2 L_{cssl} \quad (9)$$

Dataset	Docs	#Topics	#Sentences	#Tokens
WIKI-727K	727,746	6.18	52.65	1356
WikiSection	23,129	6.98	57.69	1321
WIKI-50	50	7.68	61.40	1544
Elements	118	7.71	23.81	1654

Table 1: Statistics of the Intra-domain and Out-of-domain datasets. #X denotes the average number of X per document.

4 Experiments

4.1 Experimental Setup

Datasets We conduct two sets of experiments to evaluate the effectiveness of our method, including intra-domain and out-of-domain settings. The details of the datasets are summarized in Table 1.

Intra-domain Datasets We use WIKI-727K (Koshorek et al., 2018) and English WikiSection (Arnold et al., 2019), which are widely used as benchmarks to evaluate the text segmentation performance of models. WIKI-727K is a large corpus with segmentation annotations, created by leveraging the manual structures of about 727K Wikipedia pages and automatically organizing them into sections. WikiSection consists of 38K English and German Wikipedia articles from the domains of *disease* and *city*, with the topic labeled for each section of the text. We use *en_city* and *en_disease* throughout the paper to denote the English subsets of disease and city domains, and use *WikiSection* to represent the collection of these two subsets. Each section is divided into sentences using the *PUNKT* tokenizer of the NLTK library³. Additionally, we utilize the newline information in WikiSection to only predict whether sentences with line breaks are

³<https://www.nltk.org/>

Model	<i>en_city</i>			<i>en_disease</i>		
	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$
SEC>T+bloom (Arnold et al., 2019)	71.6	14.4	-	56.6	26.8	-
S-LSTM (Barrow et al., 2020)	76.1	9.1	-	59.3	20.0	-
BiLSTM+BERT (Xing et al., 2020)	-	9.3	-	-	21.1	-
Transformer ² _{BERT} (Lo et al., 2021)	-	9.1	-	-	18.8	-
Tipster (Gong et al., 2022)	79.8	8.3	-	62.2	14.2	-
PEN-NS (Xia et al., 2022)	80.0	8.0	-	-	-	-
Naive LongT5-Base-DS (Inan et al., 2022)	-	8.2	-	-	33.5	-
Naive LongT5-Base-SS (Inan et al., 2022)	73.1	9.2	-	38.8	24.8	-
BERT-Base	78.99	8.94	11.34	67.34	19.69	24.83
+TSSP+CSSL (ours)	80.16	8.22	10.19	68.26	18.29	22.06
BigBird-Base	80.49	8.21	10.24	70.61	16.73	20.44
+TSSP+CSSL (ours)	81.89	7.71	9.70	72.14	16.62	20.55
LongformerSim	79.75	9.85	11.75	66.66	19.60	22.74
Longformer-Base	82.19 _{0.20}	7.76 _{0.13}	9.74 _{0.08}	72.29 _{0.31}	16.66 _{0.44}	20.62 _{0.79}
+CATS (Somasundaran et al., 2020) [†]	82.30	7.84	9.80	72.00	16.21	19.95
+CSC (Xing et al., 2020) [†]	82.40	7.74	9.69	72.84	16.18	19.74
+TSSP (ours)	83.12	7.39	9.31	73.74	16.03	19.71
+CSSL (ours)	82.67	7.57	9.54	73.07	15.88	19.25
+TSSP+CSSL (ours)	83.19 _{0.03} *	7.38 _{0.05} *	9.29 _{0.06} *	74.17 _{0.14} *	15.44 _{0.45} *	19.05 _{0.58} *
Pre-trained LongT5-Base-DS (Inan et al., 2022)	-	6.8	-	-	15.3	-
Pre-trained LongT5-Base-SS (Inan et al., 2022)	82.3	7.1	-	68.3	15.0	-
Pre-trained Longformer-Base	84.70	6.83	8.52	76.02	14.15	17.28
+TSSP+CSSL (ours)	85.14	6.48	8.26	77.33	13.66	16.70

Table 2: Performance of baselines and w/ our methods on *en_city* and *en_disease* test sets of WikiSection. LongformerSim denotes Longformer-Base that uses cosine similarity of neighbor sentences as the predictor. Pre-trained Longformer-Base denotes further pre-training Longformer-Base with WIKI-727K training set and then fine-tuning with WikiSection training set. [†] denotes training Longformer-Base with the corresponding auxiliary task described in Section 2.2. Max sequence length for BigBird-Base and Longformer-Base is 2048. x and y in x_y denote mean and standard deviation from three runs with different random seeds. * indicates the gains from +TSSP+CSSL over Longformer-Base are statistically significant with $p < 0.05$.

topic boundaries, which is beneficial to alleviate the class imbalance problem.

Out-of-domain Datasets Following prior work (Xing et al., 2020), to evaluate the domain transfer capability of our model, we fine-tune the model on the training set of *WikiSection* dataset (union of *en_city* and *en_disease*) due to its distinct domain characteristics. Then we evaluate its performance on two other datasets, including WIKI-50 (Koshorek et al., 2018) and Elements (Chen et al., 2009), which have different domain distributions from WikiSection. Specifically, WIKI-50 consists of 50 samples randomly selected from Wikipedia, while Elements consists of 118 samples which are also extracted from Wikipedia but focuses on chemical elements.

Evaluation Metrics Following prior works, we use three standard evaluation metrics for topic segmentation, namely, positive F_1 , P_k (Beeferman et al., 1999), and WindowDiff (WD) (Pevzner and Hearst, 2002)⁴. To simplify notations, we use F_1 and WD throughout the paper to denote posi-

tive F_1 and WindowDiff. F_1 is calculated based on precision and recall of correctly predicted topic segmentation boundaries. The P_k metric is introduced to address some limitations of positive F_1 , such as the inherent trade-off between precision and recall as well as its insensitivity to near-misses. WD is proposed by Pevzner and Hearst (2002) as a supplement to P_k to avoid being sensitive to variations in segment size distribution and over-penalizing near-misses. By default, the window size for both P_k and WD is equal to half the average length of actual segments. Lower P_k and WD scores indicate better algorithm performance.

Baseline Models Although Transformer (Vaswani et al., 2017) has become the SOTA architecture for sequence modeling on a wide variety of NLP tasks and transformer-based PLMs such as BERT (Devlin et al., 2019) become dominant in NLP, the core self-attention mechanism has quadratic time and memory complexity to the input sequence length (Vaswani et al., 2017), limiting the max sequence length during pre-training (e.g., 512 for BERT) for a balance between performance and memory usage. As shown in Table 1, the avg. num-

⁴We use <https://segeval.readthedocs.io/> to compute P_k and WD

ber of tokens per document of each dataset exceeds 512 and hence these datasets contain long documents. We tailor the backbone model selection for long documents. Prior models using BERT-like PLMs for topic segmentation either truncate long documents into the max sequence length or use a sliding window. These approaches may degrade performance due to losing contextual information. Consequently, we first evaluate BERT-Base (Devlin et al., 2019) and several competitive efficient transformers on the WikiSection dataset, including BigBird-Base (Zaheer et al., 2020) and Longformer-Base (Beltagy et al., 2020). As shown in Table 2, Longformer-Base achieves **82.19** and **72.29** F_1 , greatly outperforming BERT-Base (78.99 and 67.34 F_1) by **(+3.2, +4.95)** F_1 and BigBird-Base (80.49 and 70.61 F_1). Hence we select Longformer-Base as the encoder for the main experiments. To compare with our coherence-related auxiliary tasks, we evaluate Longformer-Base on WikiSection with the prior auxiliary CATS or CSC task in Section 2.2. In addition, following Inan et al. (2022), we evaluate the pre-trained settings where we first pre-train Longformer on WIKI-727K and then fine-tune on WikiSection. Under the domain transfer setting, we cite the results in (Xing et al., 2020). Note that all the baselines we include for comparisons are well-established and exhibit top performances on these benchmarks.

Implementation Details To investigate the efficacy of exploring longer context for topic segmentation, we conducted additional evaluations on WikiSection using maximum sequence lengths of 512, 1024, and 4096, alongside the default 2048. For documents longer than the max sequence length, we use a sliding window to take the last sentence of the prior sample as the start sentence of the next sample. We run the baseline Longformer-Base and w/ our model (i.e., Longformer-Base+TSSP+CSSL) three times with different random seeds and report means and standard deviations of the metrics. Details of hyperparameters are in Appendix B.

4.2 Main Results

Intra-domain Performance Table 2 and Table 3 show the performance of baselines and w/ our approaches on WikiSection and WIKI-727K test sets, respectively. The results of Longformer-Base and LongformerSim in Table 2 show that using cosine similarity alone is insufficient to predict the topic segmentation boundary. Longformer-

Model	WIKI-727K		
	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$
Bi-LSTM (Koshorek et al., 2018)	-	22.13	-
Cross-segment BERT (Lukasik et al., 2020)	66.0	-	-
Hier. BERT (Lukasik et al., 2020)	66.5	-	-
CATS (Somasundaran et al., 2020)	-	15.95	-
Seq-BERT-Base (Zhang et al., 2021) [†]	70.39	17.35	18.50
Seq-ELECTRA-Base (Zhang et al., 2021) [†]	73.74	15.83	17.01
Naive LongT5-Base-DS (Inan et al., 2022)	-	15.4	-
Naive LongT5-Base-SS (Inan et al., 2022)	-	15.0	-
Longformer-Base	76.27 _{0.07}	14.40 _{0.03}	15.50 _{0.03}
+TSSP (ours)	76.57	14.13	15.20
+CSSL (ours)	76.30	14.28	15.40
+TSSP+CSSL (ours)	77.16 _{0.06}	13.89 _{0.02}	14.99 _{0.02}

Table 3: Performance of baselines and w/ our methods on the WIKI-727K test set. [†] represents our reproduced results. x and y in x_y denote mean and standard deviation from three runs with different random seeds. * indicates the gains from +TSSP+CSSL over Longformer-Base are statistically significant with $p < 0.05$.

Base already outperforms all baselines in the first group of Table 2 and Table 3 and BERT-Base and BigBird-Base. Training BERT-Base, BigBird-Base and Longformer-Base with our TSSP or CSSL task achieves further gains. Table 2 shows that our TSSP and CSSL both outperform CATS or CSC auxiliary tasks. More importantly, combining TSSP and CSSL exhibits complementary effects, as it achieves further gains and sets the new SOTA, confirming the necessity of modeling both sentence structure and text semantic similarity for modeling text coherence and in turn for topic segmentation. On WikiSection, +TSSP+CSSL improves BERT-Base by **(+1.17, +0.92)** F_1 , BigBird-Base by **(+1.4, +1.53)** F_1 , and Longformer-Base by **(+1.0, +1.88)** F_1 . On WIKI-727K, +TSSP+CSSL improves Longformer-Base by **+0.89** F_1 . In addition, utilizing pre-training data also improves the performance on WikiSection, by **(+1.95, +3.16)** F_1 . Finally, our new SOTA reduces P_k of old SOTA by **1.11** points on WIKI-727K (15.0 \rightarrow 13.89) and achieves an average relative reduction of 4.3% on P_k on WikiSection. It is also important to note that our proposed TSSP and CSSL are agnostic to document lengths and are also applicable to models and datasets for short documents, which is verified by their gains on both short and long document subsets of WIKI-727K test set (as shown in Appendix C).

Domain Transfer Performance Table 4 shows the performance of the baselines and w/ our method on the out-of-domain WIKI-50 and Elements test sets. Longformer-Base already achieves **5.51** point reduction on P_k on Elements over the prior best performance from supervised models, and our approach further improves P_k by **2.83** points. While

Model	WIKI-50			Elements		
	F ₁ ↑	P _k ↓	WD ↓	F ₁ ↑	P _k ↓	WD ↓
BayesSeg (Eisenstein and Barzilay, 2008)	-	49.2	-	-	35.6	-
GraphSeg (Glavaš et al., 2016)	-	63.6	-	-	49.1	-
Sector (Arnold et al., 2019)	-	28.6	-	-	42.8	-
CATS (Somasundaran et al., 2020)	-	29.3	-	-	45.2	-
BiLSTM+BERT (Xing et al., 2020)	-	26.8	-	-	39.4	-
Longformer-Base	46.45 _{0.85}	28.76 _{0.28}	31.16 _{0.63}	55.13 _{2.16}	33.89 _{3.01}	44.99 _{2.81}
+CATS (Somasundaran et al., 2020) [†]	43.96	28.11	29.82	57.48	31.45	41.75
+CSC (Xing et al., 2020) [†]	48.18	28.88	31.20	55.18	33.26	42.51
+TSSP+CSSL (ours)	52.29 _{1.33} *	25.70 _{0.65} *	27.69 _{0.60} *	58.54 _{2.51}	31.06 _{3.05}	43.91 _{1.40}

Table 4: Performance of baselines and w/ our methods under domain transfer setting. BERT and Longformer are Base size. The training set of WikiSection is used for fine-tuning. [†] denotes fine-tuning Longformer with the corresponding auxiliary task described in Section 2.2. x and y in x_y denote mean and standard deviation from three runs with different random seeds. * indicates the gains from +TSSP+CSSL over Longformer-Base are statistically significant with $p < 0.05$.

Longformer-Base does not perform best on WIKI-50, incorporating our method achieves **+5.84** F₁ gain and **3.06** point gain on P_k, setting new SOTA on WIKI-50 and Elements for both unsupervised and supervised methods. Overall, the results demonstrate that our proposed method not only greatly improves the performance of a model under the intra-domain setting, but also remarkably improves the generalizability of the model.

Inference Speed Our proposed TSSP and CSSL do not bring any additional computational cost to inference and do not change the inference speed. We randomly sample 1K documents from WIKI-727K test set and measure the inference speed on a single Tesla V100 GPU with *batch_size* = 1. On average, BERT-Base with max sequence length 512 processes 19.5K tokens/sec while Longformer-Base with max sequence length 2048 processes 15.9K tokens/sec. This observation is consistent with the findings in (Tay et al., 2020) that Longformer does not show a speed advantage over BERT until the input length exceeds 3K tokens.

5 Analysis

Effect of Context Size To study the effect of the context size, we evaluate Longformer with max sequence length of 512, 1024, 2048 and 4096 on WikiSection. We evaluate the effectiveness of our proposed methods using the corresponding max sequence length to investigate whether they remain effective with different context sizes. As can be seen from Figure 3, the topic segmentation F₁ gradually improves as the context length increases. Among them, the effect of increasing the input length from 512 to 1024 is the largest with F₁ on *en_city* and *en_disease* improved by **+2.54** and

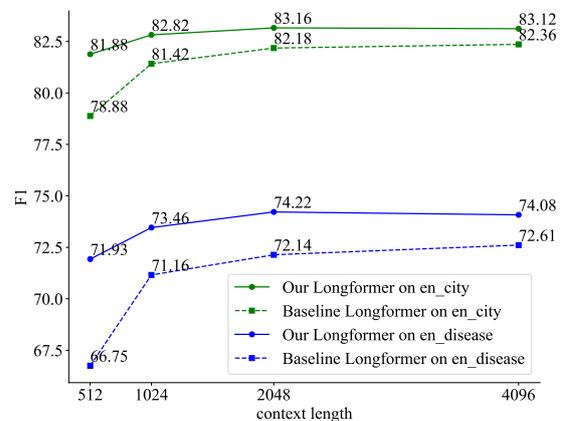


Figure 3: F1 of baseline Longformer and our Longformer (i.e., Longformer+TSSP+CSSL) on the WikiSection *en_city* and *en_disease* test sets as the context length increases.

+4.41 respectively. Considering that the average document length of WikiSection is 1321, we infer that capturing more context information is more beneficial to topic segmentation on long documents. We also observe that compared to Longformer-Base, Longformer+TSSP+CSSL yields consistent improvements across different input lengths on both *en_city* and *en_disease* test sets. These results suggest that our methods are effective at enhancing topic segmentation across various context sizes and can be applied to a wide range of data sets. **Ablation Study of TSSP and CSSL** Figure 4 shows ablation study of TSSP and CSSL on the WikiSection dev set, respectively. Figure 4(a) demonstrates effectiveness of the three classification tasks in the TSSP task (Section 2.1). Compared to SSO and CATS, TSSP helps the model learn better inter-sentence relations and both intra- and inter-topic

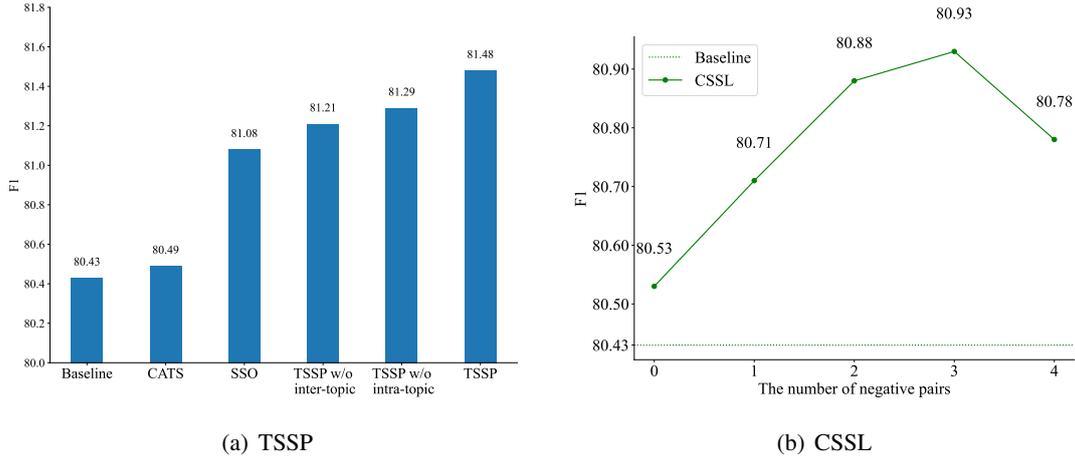


Figure 4: Ablation study of Longformer with our method on the WikiSection dev set with (a) TSSP and (b) CSSL separately. CATS and SSO in Figure (a) are previously proposed auxiliary tasks where CATS denotes Coherence-Aware Text Segmentation (Section 2.2) and SSO denotes Sentence Structural Objective (Section 3.2). In Figure (a), TSSP w/o inter-topic means without category 0 and w/o intra-topic means category 1 and 2 in Section 3.2. In Figure (b), 0 negative pairs represents fine-tuning with just the CSC task (Section 2.2).

structure labels are needed to improve performance. Figure 4(b) illustrates the impact of varying numbers of negative sample pairs for CSSL on Longformer. We find that adding similarity-related auxiliary tasks improves the performance. Compared with CSC, CSSL focuses on sentences of the same and different topics when learning sentence representations. As the number of negative samples increases, the model performance improves and optimizes at $k_2=3$. Gain from TSSP is slightly larger than that from CSSL, indicating that comprehending structural information contributes more to coherence modeling. We speculate that encoding the entire topic segment into a semantic space to learn contrastive representation may help detecting topic boundaries, which we plan to explore in future work.

Similarity of Sentence-pair Representations To investigate impact of coherence-related auxiliary tasks on sentence representation learning, we calculate cosine similarity of adjacent sentence representations for predicting topic boundaries. We compute F_1 of baselines and our Longformer (i.e., Longformer-Base+TSSP+CSSL) on *en_city* and *en_disease* dev sets. As shown in Figure 5, compared to Longformer-Base, our model achieves higher F_1 , indicating that sentence representations learned with our methods are more relevant to topic segmentation and are better at distinguishing sentences from different topics. We also explore combining probability and similarity to predict topic boundaries in Appendix D but find no further gain. The results suggest that the model trained with TSSP+CSSL covers more features than similarity.

6 Conclusion

Comprehending text coherence is crucial for topic segmentation, especially on long documents. We propose the Topic-aware Sentence Structure Prediction and Contrastive Semantic Similarity Learning auxiliary tasks to enhance coherence modeling. Experimental results show that Longformer trained with our methods significantly outperforms SOTAs on two English long document benchmarks. Our methods also significantly improve generalizability of the model. Future work includes extending our approach to spoken document topic segmentation and other segmentation tasks at various levels of granularity and with modalities beyond text.

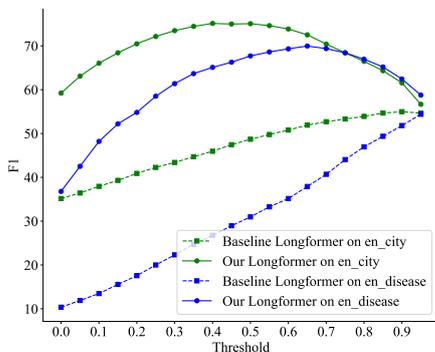


Figure 5: F_1 from using cosine similarity of two adjacent sentence representations to predict topic boundaries, with different thresholds on WikiSection dev set.

Limitations

Although our approach has achieved SOTA results on long document topic segmentation, further research is required on how to more efficiently model even longer context. In addition, our method needs to construct augmented data for the TSSP task, which will take twice the training time.

References

- Sebastian Arnold, Rudolf Schneider, Philippe Cudré-Mauroux, Felix A Gers, and Alexander Löser. 2019. Sector: A neural model for coherent topic segmentation and classification. *Transactions of the Association for Computational Linguistics*, 7:169–184.
- Pinkesh Badjatiya, Litton J Kurisinkel, Manish Gupta, and Vasudeva Varma. 2018. Attention-based neural text segmentation. In *Advances in Information Retrieval: 40th European Conference on IR Research, ECIR 2018, Grenoble, France, March 26-29, 2018, Proceedings*, pages 180–193. Springer.
- Joe Barrow, Rajiv Jain, Vlad Morariu, Varun Manjunatha, Douglas W Oard, and Philip Resnik. 2020. A joint model for document segmentation and segment labeling. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pages 313–322.
- Regina Barzilay and Mirella Lapata. 2008. Modeling local coherence: An entity-based approach. *Computational Linguistics*, 34(1):1–34.
- Mostafa Bayomi and Séamus Lawless. 2018. C-hits: A concept-based hierarchical text segmentation approach. In *Proceedings of the Eleventh International Conference on Language Resources and Evaluation (LREC 2018)*.
- Doug Beeferman, Adam Berger, and John Lafferty. 1999. Statistical models for text segmentation. *Machine learning*, 34:177–210.
- Iz Beltagy, Matthew E Peters, and Arman Cohan. 2020. Longformer: The long-document transformer. *arXiv preprint arXiv:2004.05150*.
- Harr Chen, SRK Branavan, Regina Barzilay, and David R Karger. 2009. Global models of document structure using latent permutations. Association for Computational Linguistics.
- Freddy YY Choi. 2000. Advances in domain independent linear text segmentation. In *1st Meeting of the North American Chapter of the Association for Computational Linguistics*.
- Somnath Basu Roy Chowdhury, Faeze Brahman, and Snigdha Chaturvedi. 2021. Is everything in order? a simple way to order sentences. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 10769–10779.
- Jacob Devlin, Ming-Wei Chang, Kenton Lee, and Kristina Toutanova. 2019. BERT: pre-training of deep bidirectional transformers for language understanding. In *NAACL-HLT*, pages 4171–4186. Association for Computational Linguistics.
- Lan Du, Wray Buntine, and Mark Johnson. 2013. Topic segmentation with a structured topic model. In *Proceedings of the 2013 conference of the North American chapter of the Association for Computational Linguistics: Human language technologies*, pages 190–200.
- Jacob Eisenstein and Regina Barzilay. 2008. Bayesian unsupervised topic segmentation. In *Proceedings of the 2008 Conference on Empirical Methods in Natural Language Processing*, pages 334–343.
- Micha Elsner and Eugene Charniak. 2011. Extending the entity grid with entity-specific features. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pages 125–129.
- Yaxin Fan and Feng Jiang. 2023. Uncovering the potential of chatgpt for discourse analysis in dialogue: An empirical study. *arXiv preprint arXiv:2305.08391*.
- Haoyu Gao, Rui Wang, Ting-En Lin, Yuchuan Wu, Min Yang, Fei Huang, and Yongbin Li. 2023. Unsupervised dialogue topic segmentation with topic-aware utterance representation. *arXiv e-prints*, pages arXiv-2305.
- Tianyu Gao, Xingcheng Yao, and Danqi Chen. 2021. Simcse: Simple contrastive learning of sentence embeddings. In *Proceedings of the 2021 Conference on Empirical Methods in Natural Language Processing*, pages 6894–6910.
- Goran Glavaš, Federico Nanni, and Simone Paolo Ponzetto. 2016. Unsupervised text segmentation using semantic relatedness graphs. In *Proceedings of the Fifth Joint Conference on Lexical and Computational Semantics*, pages 125–130.
- Zheng Gong, Shiwei Tong, Han Wu, Qi Liu, Hanqing Tao, Wei Huang, and Runlong Yu. 2022. Tipster: A topic-guided language model for topic-aware text segmentation. In *Database Systems for Advanced Applications: 27th International Conference, DASFAA 2022, Virtual Event, April 11–14, 2022, Proceedings, Part III*, pages 213–221. Springer.
- Amir Hazem, Béatrice Daille, Dominique Stutzmann, Christopher Kermorvant, and Louis Chevalier. 2020. Hierarchical text segmentation for medieval manuscripts. In *Proceedings of the 28th International Conference on Computational Linguistics*, pages 6240–6251.
- Marti A Hearst. 1994. Multi-paragraph segmentation expository text. In *32nd Annual Meeting of the Association for Computational Linguistics*, pages 9–16.

- Marti A Hearst. 1997. Text tiling: Segmenting text into multi-paragraph subtopic passages. *Computational linguistics*, 23(1):33–64.
- Hakan Inan, Rashi Rungta, and Yashar Mehdad. 2022. Structured summarization: Unified text segmentation and segment labeling as a generation task. *arXiv preprint arXiv:2209.13759*.
- Shoaib Jameel and Wai Lam. 2013. An unsupervised topic segmentation model incorporating word order. In *Proceedings of the 36th international ACM SIGIR conference on Research and development in information retrieval*, pages 203–212.
- Jacob Devlin Ming-Wei Chang Kenton and Lee Kristina Toutanova. 2019. Bert: Pre-training of deep bidirectional transformers for language understanding. In *Proceedings of NAACL-HLT*, pages 4171–4186.
- Omri Koshorek, Adir Cohen, Noam Mor, Michael Rotman, and Jonathan Berant. 2018. Text segmentation as a supervised learning task. In *Proceedings of the 2018 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 2 (Short Papers)*, pages 469–473.
- Zhenzhong Lan, Mingda Chen, Sebastian Goodman, Kevin Gimpel, Piyush Sharma, and Radu Soricut. 2019. Albert: A lite bert for self-supervised learning of language representations. *arXiv preprint arXiv:1909.11942*.
- Yang Liu, Chenguang Zhu, and Michael Zeng. 2022. End-to-end segmentation-based news summarization. In *Findings of the Association for Computational Linguistics: ACL 2022*, pages 544–554.
- Kelvin Lo, Yuan Jin, Weicong Tan, Ming Liu, Lan Du, and Wray Buntine. 2021. Transformer over pre-trained transformer for neural text segmentation with enhanced topic coherence. In *Findings of the Association for Computational Linguistics: EMNLP 2021*, pages 3334–3340.
- Lajanugen Logeswaran, Honglak Lee, and Dragomir Radev. 2018. Sentence ordering and coherence modeling using recurrent neural networks. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 32.
- Ilya Loshchilov and Frank Hutter. 2017. Decoupled weight decay regularization. *arXiv preprint arXiv:1711.05101*.
- Michal Lukasik, Boris Dadachev, Kishore Papineni, and Gonçalo Simões. 2020. Text segmentation by cross segment attention. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pages 4707–4716.
- Hemant Misra, François Yvon, Joemon M Jose, and Olivier Cappé. 2009. Text segmentation via topic modeling: an analytical study. In *Proceedings of the 18th ACM conference on Information and knowledge management*, pages 1553–1556.
- Lev Pevzner and Marti A Hearst. 2002. A critique and improvement of an evaluation metric for text segmentation. *Computational Linguistics*, 28(1):19–36.
- Violaine Prince and Alexandre Labadié. 2007. Text segmentation based on document understanding for information retrieval. In *Natural Language Processing and Information Systems: 12th International Conference on Applications of Natural Language to Information Systems, NLDB 2007, Paris, France, June 27-29, 2007. Proceedings 12*, pages 295–304. Springer.
- Martin Riedl and Chris Biemann. 2012a. Text segmentation with topic models. *Journal for Language Technology and Computational Linguistics*, 27(1):47–69.
- Martin Riedl and Chris Biemann. 2012b. Topic tiling: a text segmentation algorithm based on lda. In *Proceedings of ACL 2012 student research workshop*, pages 37–42.
- Gennady Shtekh, Polina Kazakova, Nikita Nikitinsky, and Nikolay Skachkov. 2018. Exploring influence of topic segmentation on information retrieval quality. In *Internet Science: 5th International Conference, INSCI 2018, St. Petersburg, Russia, October 24–26, 2018, Proceedings 5*, pages 131–140. Springer.
- Alessandro Solbiati, Kevin Heffernan, Georgios Damaskinos, Shivani Poddar, Shubham Modi, and Jacques Cali. 2021. Unsupervised topic segmentation of meetings with bert embeddings. *arXiv preprint arXiv:2106.12978*.
- Swapna Somasundaran et al. 2020. Two-level transformer and auxiliary coherence modeling for improved text segmentation. In *Proceedings of the AAAI Conference on Artificial Intelligence*, volume 34, pages 7797–7804.
- Yi Tay, Mostafa Dehghani, Samira Abnar, Yikang Shen, Dara Bahri, Philip Pham, Jinfeng Rao, Liu Yang, Sebastian Ruder, and Donald Metzler. 2020. Long range arena: A benchmark for efficient transformers. *arXiv preprint arXiv:2011.04006*.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N. Gomez, Lukasz Kaiser, and Illia Polosukhin. 2017. [Attention is all you need](#). In *NeurIPS*, pages 5998–6008.
- Liang Wang, Sujian Li, Yajuan Lü, and Houfeng Wang. 2017. Learning to rank semantic coherence for topic segmentation. In *Proceedings of the 2017 Conference on Empirical Methods in Natural Language Processing*, pages 1340–1344.
- Wei Wang, Bin Bi, Ming Yan, Chen Wu, Zuyi Bao, Jiangnan Xia, Liwei Peng, and Luo Si. 2019. Structbert: Incorporating language structures into pre-training for deep language understanding. *arXiv e-prints*, pages arXiv–1908.

Zhuofeng Wu, Sinong Wang, Jiatao Gu, Madian Khabsa, Fei Sun, and Hao Ma. 2020. Clear: Contrastive learning for sentence representation. *arXiv preprint arXiv:2012.15466*.

Jinxiong Xia, Cao Liu, Jiansong Chen, Yuchen Li, Fan Yang, Xunliang Cai, Guanglu Wan, and Houfeng Wang. 2022. Dialogue topic segmentation via parallel extraction network with neighbor smoothing. In *Proceedings of the 45th International ACM SIGIR Conference on Research and Development in Information Retrieval*, pages 2126–2131.

Wen Xiao and Giuseppe Carenini. 2019. Extractive summarization of long documents by combining global and local context. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pages 3011–3021.

Linzi Xing and Giuseppe Carenini. 2021. Improving unsupervised dialogue topic segmentation with utterance-pair coherence scoring. In *Proceedings of the 22nd Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pages 167–177.

Linzi Xing, Brad Hackinen, Giuseppe Carenini, and Francesco Trebbi. 2020. Improving context modeling in neural topic segmentation. In *Proceedings of the 1st Conference of the Asia-Pacific Chapter of the Association for Computational Linguistics and the 10th International Joint Conference on Natural Language Processing*, pages 626–636.

Yuanmeng Yan, Rumei Li, Sirui Wang, Fuzheng Zhang, Wei Wu, and Weiran Xu. 2021. Consert: A contrastive framework for self-supervised sentence representation transfer. In *Proceedings of the 59th Annual Meeting of the Association for Computational Linguistics and the 11th International Joint Conference on Natural Language Processing (Volume 1: Long Papers)*, pages 5065–5075.

Manzil Zaheer, Guru Guruganesh, Kumar Avinava Dubey, Joshua Ainslie, Chris Alberti, Santiago Ontanon, Philip Pham, Anirudh Ravula, Qifan Wang, Li Yang, et al. 2020. Big bird: Transformers for longer sequences. *Advances in neural information processing systems*, 33:17283–17297.

Qinglin Zhang, Qian Chen, Yali Li, Jiaqing Liu, and Wen Wang. 2021. Sequence model with self-adaptive sliding window for efficient spoken document segmentation. In *2021 IEEE Automatic Speech Recognition and Understanding Workshop (ASRU)*, pages 411–418. IEEE.

A ChatGPT for Topic Segmentation in Long Document

To investigate the performance of ChatGPT on long document topic segmentation, we adopt the prompts proposed by Fan and Jiang (2023) and

evaluate ChatGPT on the WIKI-50 test set. The prompts are shown in Table 5. We set temperature as 0 to ensure the consistency of ChatGPT. The post-processing strategy for ChatGPT remains unchanged to obtain the formatted output. Different from Fan and Jiang (2023), we change the key word **dialogue** to **document** in the prompt and try to use one-shot prompt to see if it can improve performance.

Table 6 shows the results of ChatGPT with different prompts and Longformer with supervised data. Firstly, the results show that the generative prompt can achieve higher performance than the discriminative prompt, which is consistent with the conclusion of Fan and Jiang (2023) that representing structure directly can better leverage the generation ability of ChatGPT. Additionally, incorporating a single example in the generative prompt can further improve 2-point F_1 , which indicates one-shot prompt can better stimulate the in-context learning ability of Large Language Models. However, while ChatGPT-GP_{one} achieves an F_1 metric that is 4.6 points higher than Longformer_{ood}, its P_k and WD metric are significantly worse due to the high false recall rate of topic boundaries. This suggests that how to fully apply the ability of Large Language Models to the topic segmentation in long documents remains to be further explored. Finally, compared with ChatGPT, the significant improvement of Longformer_{iid} shows the key role supervised data plays in the topic segmentation task.

B Training Details

Our experiments are implemented with *transformers* package⁵. The model parameters are initialized with corresponding pre-trained parameters. The initial learning rate is $5e-5$ and the dropout probability is 0.1. AdamW (Loshchilov and Hutter, 2017) is used for optimization. The batch size for WIKI-727K and WikiSection is 4 and 8, and the epoch for WIKI-727K and WikiSection is 3 and 5 respectively. We set the number of positive pair in CSSL as $k_1 = 1$ and carry out grid-search of loss weight $\alpha_1, \alpha_2 \in [0.5, 1.0]$, $k_2 \in [1, 2, 3, 4]$ on dev set. The final configuration in the two benchmarks is $k_2 = 3, \alpha_1 = 0.5$. α_2 performs best on WikiSection when set to 1.0 while on WIKI-727K $\alpha_2 = 0.5$ performs best.

⁵<https://github.com/huggingface/transformers>

Type	Prompts for Document Topic Segmentation
Discriminative	<p>The following is a document. Give each utterance a binary label, where 1 indicates that the utterance starts a new topic. please output the result of the sequence annotation as a python list.</p> <p>0: s_1 1: s_2 ... $n - 1$: s_n</p>
Generative	<p>Please identify several topic boundaries for the following document and each topic consists of several consecutive utterances. please output in the form of {topic i:[], ... ,topic j:[]}, where the elements in the list are the index of the consecutive utterances within the topic, and output even if there is only one topic.</p> <p>0: s_1 1: s_2 ... $n - 1$: s_n</p>

Table 5: Prompts for Document Topic Segmentation. n denotes the number of sentences and s_i denotes i -th sentence in the document.

Model	WIKI-50		
	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$
ChatGPT-DP _{zero}	23.28	52.83	66.63
ChatGPT-GP _{zero}	49.59	37.79	46.18
ChatGPT-DP _{one}	21.91	54.86	71.40
ChatGPT-GP _{one}	51.61	37.19	45.21
Longformer _{ood}	47.01	29.04	31.41
Longformer _{iid}	76.32	11.01	11.82

Table 6: Comparison of ChatGPT and Longformer on the WIKI-50 test set. Longformer_{ood} denotes fine-tuning Longformer on WikiSection and Longformer_{iid} denotes fine-tuning Longformer on WIKI-727K. DP and GP are short for discriminative prompt and generative prompt, respectively. *zero* and *one* denote zero-shot and one-shot prompting settings.

C Performance of the Proposed Approach on Short and Long Documents

It is important to note that our proposed TSSP and CSSL approaches are agnostic to document lengths and are applicable to models and datasets for short documents. In order to evaluate the performance of our proposed approach on various document lengths, we partition the WIKI-727K test set into a short document subset (18310 samples) and a long document subset (54922 samples) according to whether the number of tokens in a document is less than 512 or not. The results from the baseline Longformer and Longformer with our approaches

Model	WIKI-727K _{short}			WIKI-727K _{long}		
	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$
Longformer-Base	83.36 _{0.09}	11.58 _{0.10}	11.78 _{0.11}	75.20 _{0.06}	15.34 _{0.02}	16.76 _{0.03}
+TSSP+CSSL(ours)	83.97 _{0.09}	11.13 _{0.06}	11.30 _{0.07}	76.18 _{0.05}	14.81 _{0.01}	16.22 _{0.01}

Table 7: The performance of Longformer-Base and our approach on short and long document subsets of WIKI-727K test set.* indicates the gains from +TSSP+CSSL over Longformer-Base are statistically significant with $p < 0.05$.

Model	Score	<i>en_city</i>			<i>en_disease</i>		
		$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$	$F_1 \uparrow$	$P_k \downarrow$	$WD \downarrow$
Longformer	<i>Prob Only</i>	82.18	7.87	9.82	72.33	17.23	22.30
	<i>Prob and Sim</i>	82.05	7.97	10.07	72.69	16.39	20.71
+TSSP+CSSL	<i>Prob Only</i>	83.16	7.33	9.24	74.19	16.29	20.29
	<i>Prob and Sim</i>	83.08	7.52	9.47	74.31	16.44	20.76

Table 8: The results of combing the probability and cosine similarity to predict topic boundary on *en_city* and *en_disease*. *Prob Only* denotes only using probability. *Prob and Sim* denotes compute score as Formula 10.

(+TSSP+CSSL) are shown in Table 7. Our approach significantly improves the baseline on both short and long documents. Notably, the gains from our approach are larger on long documents, suggesting that our coherence modeling benefits long document topic segmentation even more. This is consistent with our hypothesis.

D Ensemble Probability and Similarity

As shown in Formula 10, we try to combine the cosine similarity of neighbor sentence representations (*Sim*) and model probability (*Prob*) to get the final score to infer topic boundary. Specifically, we get

different thresholds at intervals of 0.05 from 0 to 1. Then we choose the threshold when F_1 reaches the best in the dev set, and finally use this threshold to obtain the effect on the test set. The results shown in Table 8 suggest that the score combining similarity of neighbor sentence representations and model probability lower the performance slightly. We speculate that the boundary probability prediction and auxiliary coherence tasks are performed during training simultaneously, therefore the model has incorporated more features than just similarity.

$$Score = \frac{1}{2} * (Prob + Sigmoid(-1 * Sim)) \quad (10)$$

$$Sigmoid(x) = \frac{1}{1 + e^{-x}} \quad (11)$$