

VISUAL COMPOSITIONAL TUNING

Anonymous authors

Paper under double-blind review

ABSTRACT

Visual instruction tuning (VIT) datasets are constructed from randomly sampled image-question pairs, without regard to the informativeness of each pair. Recent dataset selection methods have shown that a small fraction of such datasets enriched with informative samples can lead to efficient finetuning of Multimodal Large Language Models. In this work, we explore the impact of sample complexity on informative data curation and introduce COMPACT (COMpositional Atomicto-complex Visual Compositional Tuning), a VIT data recipe that scales training sample complexity by combining multiple atomic visual capabilities in a single training example. Concretely, we synthesize rich and informative text questions for each image, allowing us to significantly reduce the number of training examples required for effective visual instruction tuning. COMPACT demonstrates superior data efficiency compared to existing data reduction methods. When applied to the LLaVA-665K VIT dataset, COMPACT reduces the data budget by 90% while still achieving 100.2% of the full VIT performance (compared to only 97.5% by the state-of-the-art method) across eight multimodal benchmarks. Further, training on the COMPACT data *outperforms* training on the full-scale data on particularly complex benchmarks such as MM-Vet (+8.6%) and MMStar (+2.9%). COMPACT offers a scalable and efficient synthetic data generation recipe to improve on visual language tasks.

1 INTRODUCTION

Visual instruction tuning (VIT) data for Multimodal Large Language Models (MLLMs) have continuously scaled over time. Cambrian-10M (Tong et al., 2025) is 15 times larger than LLaVA-665K (Liu et al., 2024a), and Eagle 2 (Li et al., 2025) instruction tuning data is 2.6 times larger than Cambrian-10M. As a result, state-of-the-art MLLMs like LLaVA (Liu et al., 2023; 2024a), Cambrian (Tong et al., 2025), and Eagle (Shi et al., 2024; Li et al., 2025) have shown impressive progress in a wide range of vision-language tasks (Bai et al., 2023; Alayrac et al., 2022; Li et al., 2022). The prevailing axiom of *quantity over quality* (Li et al., 2024a) in multimodal training shifted the attention of subsequent works away from the fundamental question: *Can we develop more effective data curation methods beyond blind scaling?*

Visual reasoning often relies on combining multiple fundamental visual capabilities (Ke et al., 2025; Wu et al., 2024b; Zerroug et al., 2022). Consider the question, “What color is the object on the left side of the car?”. A model needs to see the car (object recognition), find what is on the left side (spatial relationship), and identify its color (color attribution) to answer the question. However, VIT datasets typically focus on individual or limited combinations of visual capabilities (e.g. “What color is the car?”), ignoring the crucial relationship between these capabilities and how they might be combined to solve complex tasks. The resulting visual reasoning questions are often simplistic and refer to a limited region in the image, under-utilizing the rich visual information within. We therefore ask whether scaling the complexity of each sample can lead to more informative datasets.

We first define a set of fundamental visual capabilities essential for visual reasoning, called *atomic capabilities* (Tab. 1), by analyzing the LLaVA-665K VIT dataset (see §3.1 and §A.4 for more details on the curation process). Using these as building blocks, we define a complexity measure, called *k-value*, as the number of atomic capabilities required to answer a question. This measure allows us to quantify the complexity of each sample and identify combinations of capabilities that improve information density. For example, instead of the $k = 2$ question, “What color is the car?” (object recognition and color attribution), we can ask a $k = 3$ question, “What color is the object on the

054
055
056
057
058
059
060
061
062
063
064
065
066
067
068
069
070
071
072
073
074
075
076
077
078
079
080
081
082
083
084
085
086
087
088
089
090
091
092
093
094
095
096
097
098
099
100
101
102
103
104
105
106
107

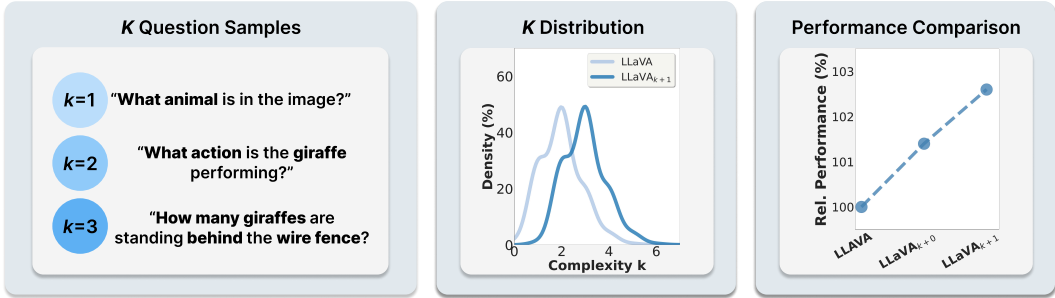


Figure 1: **Complexity k** . We show that increasing the complexity of LLaVA-665K improves performance. (left) Examples of questions with different k -values, where k is the number of atomic capabilities required. (middle) Distribution of k -value in VIT subset (LLaVA) and VIT subset augmented with 1 additional capability (LLaVA $_{k+1}$). (right) Performance on downstream tasks (§4.1) for VIT subset (LLaVA), VIT subset regenerated with no capability augmentation (LLaVA $_{k+0}$) and VIT subset augmented with 1 additional capability (LLaVA $_{k+1}$).

Table 1: **Taxonomy of atomic capabilities**. We identify 10 atomic capabilities that are necessary for visual reasoning. We categorize them into attribution, recognition, and relation. Atomic capabilities serve as building blocks for building complex tasks.

Group	Capability	Definition	Example Question
Attribution	Color	Identifying or comparing colors of objects in the image	What color is the car?
	Shape	Recognizing and describing the shapes of objects in the image	What shape is the dining table?
Recognition	Object Recognition	Identifying and naming objects present in the image	What object is on the table?
	Action Recognition	Identifying what action is being performed	What is the person doing in this image?
	Text Recognition	Reading and interpreting text visible in the image	What word is written on the sign?
	Spatial Recognition	Understanding the overall spatial layout and arrangement of the entire scene	How is the furniture arranged in this room?
Relation	Counting	Determining the number of instances of something in the image	How many people are in the room?
	Spatial Relationship	Identifying how specific objects are positioned relative to each other	What is next to the red car?
	Object Interaction	Analyzing how multiple objects interact with each other	How is the woman interacting with the laptop?
	Scene Understanding	Identifying the type of environment/setting	Where is this scene taking place?

left side of the car?” (object recognition, color attribution, and spatial understanding). Analysis of existing VIT datasets reveals an over-representation of simpler ($k \leq 2$) questions that under-exploit the visual information in images.

We conduct an exploratory experiment where we take a small amount of VIT data and increase the k -value for a subset of examples. We first identify the atomic visual capabilities required to answer each question. We then regenerate the questions with Gemini-2.0-Flash (Team et al., 2023) after adding a randomly selected atomic visual capability. The distribution of k in the dataset shifts to the right by 1, effectively increasing the average complexity of the training dataset. Fig. 1 shows that VIT on higher k dataset leads to higher performance on downstream tasks, after controlling for the data generation method. These results motivate our complexity-aware VIT data curation method.

We propose **COMPACT** (COMpositional Atomic-to-complex Visual Capability Tuning), an efficient VIT data recipe that controls the complexity of each sample by combining atomic visual capabilities. We summarize our key contributions:

1. We show that increasing the complexity of training samples allow more effective use of information content in a given dataset. We introduce COMPACT to address limitations in complexity-agnostic scaling of conventional VIT methods.
2. We define the k -value to quantify the complexity of a vision-language task. We analyze the optimal distribution of complexity in the data for maximum efficiency and performance.
3. We demonstrate the effectiveness of COMPACT. With only 10% volume of the LLaVA-665K (Liu et al., 2024b) VIT dataset, training with our COMPACT data matches the performance of full-scale VIT (100.2% relative performance), and even outperforms on particularly complex multimodal benchmarks like MM-Vet (Yu et al., 2023) (29.2 when trained with full LLaVA-665K vs 31.7 when trained with COMPACT) and MMStar (Chen et al., 2024a) (35.1 vs. 36.1).

2 RELATED WORK

Visual Instruction Tuning. Instruction following is an essential capability in language models (Wei et al., 2021; Zhou et al., 2023). Misalignment between a model’s response and the format requested by a question can hinder the precise evaluation of its performance (He et al., 2024; Hsieh et al., 2023; Salido et al., 2025; Balepur et al., 2025). VIT involves training a model on a fixed set of response patterns that can be repeated during inference (e.g., multiple-choice, short- and long-response questions) (Liu et al., 2023; 2024b). Although VIT has shown performance improvements in general multimodal capabilities (Huang et al., 2023), recent work (Ghosh et al., 2024) has shown that optimizing for response formatting potentially limits the quality of language model responses.

While VIT (Liu et al., 2024b) relies on simple questions to train instruction following capability, COMPACT leverages more complex questions to achieve the same goal. Higher k questions facilitate learning by encouraging the model to learn from more visual features in each image.

Complex Tasks in LLMs and MLLMs. Complexity in the space of vision-language tasks has been loosely conceptualized by different interpretations of compositionality. Some studies view compositionality as a sequential arrangement of basic tasks (Chen et al., 2024b; Li et al., 2024c). Compositionality as integrations of basic capabilities has been examined in geometric reasoning (Chae et al.) and general visual reasoning (Hua et al., 2024), but mainly in the context of evaluation.

We argue that compositional complexity can be studied in the context of training MLLMs. Studies highlight that while MLLMs do show signs of compositional capability (Ossowski et al., 2024), they struggle when constituting components and their combined patterns are not strongly learned or missing during training (Campbell et al., 2025). COMPACT builds on this insight by defining complexity as the combination of atomic visual capabilities and widening the range of complexity represented in the dataset.

Scaling Visual Instruction Tuning Data. VIT is a data- and compute-heavy step in training (Xu et al., 2023). Prior work has approached this challenge from mainly two directions. First, upscaling-based approaches (Tong et al., 2025; Liu et al., 2024b) argue that ever larger corpora can continue to improve visual capabilities, partially addressing the challenge of low information density through sheer volume of data. Second, data selection studies argue that full performance can be reproduced with smaller amounts of data (Lee et al., 2024; Liu et al., 2024c). ICONS (Wu et al., 2024a) shows that models can achieve near-full performance across a suite of MLLM benchmarks using only a fraction of the original VIT dataset.

However, these approaches treat complexity as a byproduct of scale rather than a controllable metric. COMPACT exposes the model to more complex tasks without scaling the dataset size by explicitly targeting higher k -values during sample generation.

3 METHOD

We aim to construct a training dataset in which each sample requires knowledge of the fundamental visual capabilities and their meaningful combinations that progressively increase the complexity of the task. Inspired by the compositional nature of visual reasoning, we first define complexity as a metric that arises from combining basic visual capabilities. This requires identification of a set of fundamental visual capabilities that can be combined, called atomic visual capabilities (§3.1). A subset of these capabilities are combined to generate a new sample with target complexity, which corresponds to COMPACT’s four-step data recipe (§3.2).

3.1 ATOMIC VISUAL CAPABILITIES

Atomic capabilities are foundational skills that can be combined to solve complex tasks. For example, a model needs to acquire object recognition, color attribution, and spatial relationship understanding capabilities to identify how objects of different colors are spatially oriented. For each task T , we identify a set of atomic visual capabilities $\{c_1, \dots, c_k\}$ required to solve this task. We define the number of atomic capabilities required to solve the task T as its *complexity* k .

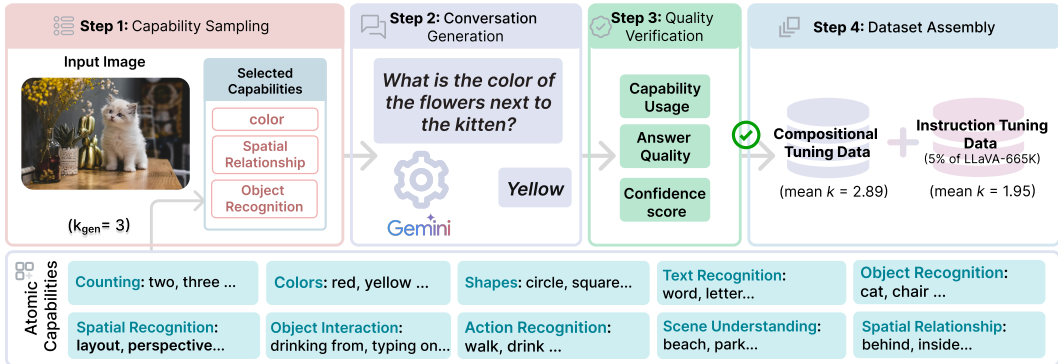


Figure 2: **COMPACT data generation pipeline.** (Left): We design a data recipe that can scale the complexity of each training example. We randomly sample $k_{gen} \in \{1, 2, 3\}$ atomic capabilities such as color, object recognition, and spatial relationship. (Center): We generate questions that integrate all k_{gen} sampled capabilities and verify their quality. (Right): We combine the synthetically generated compositional tuning data with instruction tuning data for response formatting.

We build the taxonomy of atomic capabilities (Tab. 1) based on two key considerations. First, we focus on vision-centric skills that can encourage the model utilize the visual information in the image. Therefore, we exclude non-perceptual capabilities (e.g. cultural knowledge, historical context, coding, and math) that require external information beyond the image. Second, we include capabilities that can also be found in existing VIT data curation methods (Liu et al., 2023; Tong et al., 2025; Li et al., 2025), for fair comparison of our approach to others. As a result, we create a list of 10 atomic capabilities which can be divided into three major categories: 1) **Attribution**: identifying visual properties (e.g., color and shape). 2) **Recognition**: identifying visual entities, including objects, actions, and text. 3) **Relation**: identifying visual interactions and spatial orientations.

We note that the atomic capabilities in Tab. 1 are not expected to cover the entire multimodal task space or be completely orthogonal (see Appendix Fig. 8). Rather, we aim to find sufficiently distinct capabilities that allow meaningful combinations to generate diverse visual reasoning tasks. We provide more details and discussion on the taxonomy curation in Appendix §A.4.

3.2 VISUAL COMPOSITIONAL TUNING DATA RECIPE

COMPACT generates multi-capability questions \mathcal{D}_{comp} by prompting vision-language models to create questions that require natural¹ integration of multiple atomic visual capabilities. This process involves four key steps: (1) sampling a subset of capabilities from our predefined set of atomic visual capabilities (**Capability Sampling**), (2) prompting Gemini-2.0-Flash (Team et al., 2023) to generate questions that integrate all the selected capabilities (**Conversation Generation**), (3) validating the capability requirement and the quality of each question (**Quality Verification**), and (4) combining our generated compositional tuning data with a small portion of the LLaVA-665K (Liu et al., 2024b) VIT data for response formatting (**Dataset Assembly**).

Step 1: Capability Sampling. We start by taking a random sample of images from LLaVA-665K (Liu et al., 2024b). For each image, we repeatedly sample $k_{gen} \in \{1, 2, 3\}$ capabilities from our predefined pool of 10 atomic visual capabilities. At this stage, k_{gen} functionally serves as the lower bound of the actual k -value of the generated conversation. We sample k_{gen} with the expectation that the final k -value of the sample will eventually be higher ($k_{gen} \leq k$), as some atomic capabilities are weakly correlated in practice (see Fig. 8 in Appendix). In order to maximize capability coverage, we do the following in each round of capability sampling: (a) prioritize the capabilities that have not been selected for that image, and (b) drop duplicate combinations of capabilities for the same image. These efforts ensure that our training examples capture diverse visual information.

¹We use the term “natural” to denote combination of visual capabilities that correspond to their co-occurrence patterns in real-world settings, wherein multiple capabilities are integrated in a way that is contextually and semantically meaningful.

Table 2: **Baseline comparisons.** COMPACT outperforms baseline VIT data recipes on multimodal benchmarks. With only 5% of the LLaVA-665K (Liu et al., 2024b) VIT data and 32K of our compositional tuning data (65K total), COMPACT outperforms the random subset of the VIT data (Random), various data reduction methods, as well as the full VIT data. The best and second best results for each benchmark are shown in **bold** and underlined, respectively. We further provide results using an open-source generator (Qwen3-VL-4B-Instruct) for COMPACT in Table 9.

Recipe	# Data	InfoVQA	SeedBench2Plus	MME	TextVQA	MM-Vet	CV-Bench	MMStar	LLaVA-W	Rel. (%)
LLaVA-665K	665K	20.80	41.72	1478.48	46.99	29.22	60.92	35.11	68.50	<u>100.00</u>
Random	65K	20.05	41.85	1327.70	42.88	30.46	54.71	34.13	64.30	95.38
EL2N	65K	20.52	42.95	1378.58	42.41	33.53	50.92	33.82	66.40	97.09
Perplexity	65K	20.46	41.90	1375.32	42.95	30.32	52.72	33.47	68.40	96.09
SemDeDup	65K	20.54	43.96	1431.36	42.71	28.39	42.24	34.18	62.10	93.31
D2-Pruning	65K	20.90	<u>43.70</u>	1343.34	41.82	31.61	48.49	36.63	68.40	97.13
Self-Sup	65K	20.61	42.51	<u>1434.30</u>	42.68	30.18	54.30	34.33	61.20	96.04
Self-Filter	65K	19.99	41.33	1290.34	36.59	28.21	45.17	33.67	66.40	90.51
ICONS	65K	21.0	42.03	1402.75	43.12	31.23	55.96	35.96	61.8	97.47
COMPACT (ours)	65K	23.68	43.13	1379.94	<u>44.37</u>	<u>31.74</u>	55.28	<u>36.13</u>	64.50	100.18

Step 2: Conversation Generation. For each capability combination that is sampled, we prompt Gemini-2.0-Flash (Team et al., 2023) to generate a conversational question-answer pair that integrates all capabilities in the combination, as well as a score between 0 and 100 that represents its confidence in the quality of the conversation. Our carefully designed prompt (see Appendix §B) enforces several key constraints: (a) questions must require the use of visual information from the image and cannot be answered from its text alone, (b) answers must be concise, (c) questions must integrate the specified capabilities naturally (without using conjunctions to simply conjoin single-capability questions), and (d) questions must reference objects and features actually present in the image. The purpose of these constraints is to produce vision-centric conversations that are unambiguous and natural.

Step 3: Quality Verification. We include a verification process with Gemini-2.0-Flash (Team et al., 2023) to ensure the quality and diversity of the training dataset. We filter out questions with uninformative answers (e.g., “unknown”, “not visible”) or those with confidence scores below 70%. We discard questions that share more than 60% of the words with those previously accepted.

We then perform capability verification by prompting Gemini-2.0-Flash (Team et al., 2023) to analyze whether each question indeed requires the k_{gen} specified capabilities. The generation and verification processes in steps 2 and 3 repeat iteratively until we collect 2-3 high-quality conversations per k_{gen} for each image or reach a maximum of 10 verification attempts.

Step 4: Dataset Assembly. We address the challenge of aligning the response format by mixing our synthetically generated compositional tuning data with a random 5% subset of the LLaVA-665K (Liu et al., 2024b) VIT dataset. This mixture of instruction tuning and compositional tuning data has the following effects. First, the VIT subset maintains the model’s ability to handle diverse response formats and instructions required by modern MLLM benchmarks (e.g., multiple-choice questions (Fu et al., 2023), open-ended answers (Liu et al., 2024b)). Second, our compositional tuning data leverages complex questions to facilitate learning with higher information density. In this way, we delegate the instruction following capability training to the original VIT data and allow our compositional tuning data to focus on visual reasoning.

The size of the compositional tuning data is determined by the minimum number of images needed to match full LLaVA-665K (Liu et al., 2024b) VIT performance. COMPACT preserves the contents of the images, which enables us to fairly compare against existing methods in their ability to extract rich visual information.

4 EXPERIMENTS

In this section, we evaluate the baseline approaches and COMPACT on existing multimodal benchmarks. First, we discuss our evaluation setup and the benchmarks (§4.1). Second, we compare the performance of COMPACT with relevant baselines, including LLaVA-665K (Liu et al., 2024b) VIT

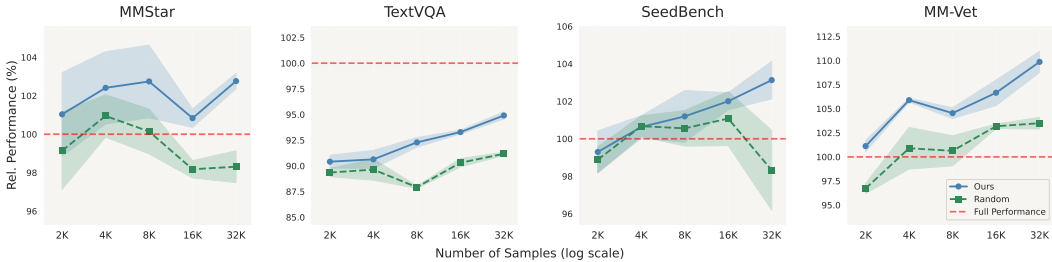


Figure 3: **Performance across compositional tuning data scales.** We show that COMPACT’s compositional tuning data scales more efficiently than conventional VIT. We fix the VIT subset (5% of LLaVA-665K (Liu et al., 2024b)) and scale the compositional tuning data in COMPACT from 2K to 32K. We compare each mix with VIT only datasets with equal data budgets. COMPACT (solid lines) consistently outperforms LLaVA-665K VIT (dashed lines) with fewer data. COMPACT’s compositional tuning data scales particularly well on SeedBench2Plus (Li et al., 2024b), which consists of spatially complex tasks of navigating charts and maps.

(§4.2). Third, we investigate the source of COMPACT’s performance improvement. (§4.3). Finally, we ablate the various design choices of COMPACT (§4.4).

4.1 EVALUATION TESTBED

Model. We train LLaVA-v1.5-7B-LoRA (Liu et al., 2024b) model’s pre-visual-instruction-tuning checkpoint² on our COMPACT training dataset. This checkpoint has not been exposed to any visual instruction tuning data prior to COMPACT training. The training dataset includes 32K-sample compositional tuning data unless otherwise stated. Additionally, we mix 5% of LLaVA-665K (Liu et al., 2024b) to preserve instruction following capability. We train the model for one epoch with its official LLaVA-v1.5 LoRA fine-tuning settings.

Baselines. We compare the effectiveness of our COMPACT data recipe with several baseline datasets by training models with the same architecture under identical training configurations. **LLaVA-665K:** The full LLaVA-665K (Liu et al., 2024b) VIT dataset (665K samples) used in LLaVA-v1.5. This serves as our primary performance baseline. **Random:** A 65K-sample random subset of LLaVA-665K that matches our training data size. This baseline controls for data volume. We further evaluate on 65K-sample subsets curated with various data reduction methods: EL2N (Paul et al., 2021), Perplexity (Marion et al., 2023), SemDeDup (Abbas et al., 2023), D2-Pruning (Maharana et al., 2023), Self-Sup (Sorscher et al., 2022), Self-Filter (Chen et al., 2024c), and ICONS (Wu et al., 2024a).

Benchmarks. We evaluate models trained with different data recipes on established multimodal benchmarks that assess complex visual capabilities. 1) **MM-Vet** (Yu et al., 2023) includes 16 types of complex multimodal tasks integrated from 6 core capabilities (recognition, OCR, knowledge, language generation, spatial awareness, and math). 2) **MME** (Fu et al., 2023) contains 10 perception (e.g., color, count, OCR) and 4 cognition (e.g., commonsense reasoning, text translation, code understanding) related visual subtasks. 3) **LLaVA-in-the-Wild** (Liu et al., 2024b) is an open-ended visual question answering benchmark that asks complex questions on real-world images. 4) **SeedBench2Plus** (Li et al., 2024b) evaluates visual comprehension skills of MLLMs with a focus on charts, maps, and webs. 5) **MMStar** (Chen et al., 2024a) contains 1,500 visual questions that span 6 core capabilities (fine-grained perception, coarse perception, mathematics, science & technology, logical reasoning and instance reasoning), carefully curated to evaluate multimodal understanding. 6) **CV-Bench** (Tong et al., 2025) is a MLLM benchmark specialized for 2D and 3D visual understanding that includes spatial relationship, object count, relative distance, and depth order. 7) **TextVQA** (Singh et al., 2019) evaluates visual understanding of texts in the image. 8) **InfoVQA** (Mathew et al., 2022) measures visual understanding of infographic images. These benchmarks cover a broad range of vision-centric capabilities. We also note that some of these benchmarks include non-visual questions

²LLaVA-v1.5-mlp2x-336px-pretrain-vicuna-7b-v1.5, which has no prior exposure to visual instruction tuning data.

Table 3: **Matching LLaVA-665K distribution.** We show that performance improvements of COMPACT can be attributed to increased complexity k . COMPACT_{llava} capability distribution exactly matches that of random LLaVA-665K subset, controlling for complexity. Note that we use 16K compositional data here (different from 32K in Tab. 2) for faster iteration. Roughly half of the performance gain in COMPACT can be attributed to the higher k compositional tuning data.

Recipe	#Data	InfoVQA	SeedBench2Plus	MME	TextVQA	MMVet	CV-Bench	MMStar	LLaVA-W	Rel. (%)
LLaVA-665K	665K	20.80	41.72	1478.48	46.99	29.22	60.92	35.11	68.50	100.00
Random	49k	20.33	42.38	1290.45	42.22	30.18	54.75	34.3	70.5	96.28
COMPACT _{llava}	49k	22.76	43.43	1308.52	43.94	28.81	52.39	36.08	66.8	97.55
COMPACT	49k	22.68	42.82	1362.68	43.73	30.78	54.69	35.59	66.6	98.83

involving such skills as knowledge and math, which are not our primary focus. We provide a more detailed discussion of these tasks in Appendix §A.2 and §A.3.

4.2 MAIN RESULTS

Overall Performance. As shown in Tab. 2, COMPACT performs on par with the LLaVA-665K (Liu et al., 2024b) baseline with only 10% of its data volume. COMPACT’s training dataset contains a mixture of 32K compositional tuning data and 5% of LLaVA-665K (Liu et al., 2024b) VIT data (33K). The compositional tuning data trains the model on complex questions, and the VIT subset maintains the model’s instruction-following capability.

Across all benchmarks, our COMPACT achieves an average relative performance of 100.2%, outperforming the full LLaVA-665K (Liu et al., 2024b) (100.0%), random baseline (95.4%), and ICONS (Wu et al., 2024a) (97.5%). COMPACT achieves strong gains on tasks like MM-Vet (Yu et al., 2023) (+8.6% over LLaVA-665K (Liu et al., 2024b)), MMStar (Chen et al., 2024a) (+2.9%), InfoVQA (Mathew et al., 2022) (+13.8%), and SeedBench2Plus (Li et al., 2024b) (+3.4%) while maintaining competitive performance on TextVQA (Singh et al., 2019) and LLaVA-in-the-Wild (Liu et al., 2024b). This highlights the effectiveness of the COMPACT data recipe. Additionally, we provide qualitative results in Appendix §C.

Complex Training Data is Efficient. We study the data efficiency of complex samples by analyzing how COMPACT’s performance changes as we scale the amount of compositional tuning data. We fix the VIT subset (5% of LLaVA-665K (Liu et al., 2024b)) and scale the compositional tuning data in COMPACT from 2K to 32K. For comparison, we match the size of each dataset purely with VIT data. Fig. 3 shows that as the number of compositional tuning data samples increases, the performance of COMPACT on multimodal benchmarks steadily improves unlike the random baseline. Interestingly, models trained on smaller amount of compositional tuning data (2K-8K samples) often match or exceed the performance of random baseline models trained on much larger VIT data. For instance, COMPACT’s 2K model achieves 30.8 on MM-Vet (Yu et al., 2023), outperforming the random baseline’s 32K model at 30.5. This demonstrates that COMPACT makes more effective use of training data compared to the baselines.

This improvement in data efficiency comes from several factors. COMPACT training data has higher k samples that encourage the model to extract more visual information from the image. The learning potential of lower k samples that LLaVA-665K (Liu et al., 2024b) relies on are limited by the amount of visual information that the model can afford to ignore. However, a range of simple to complex training samples are still necessary to properly disentangle each atomic capability from complex questions. COMPACT’s complexity-aware data generation process that progressively increases the complexity of the samples achieves balance these effects.

4.3 ANALYSIS

Complexity Distribution in LLaVA-665K. We characterize the complexity distribution of LLaVA-665K (Liu et al., 2024b) VIT dataset that serves as the primary baseline for COMPACT. We use Gemini-2.0-Flash (Team et al., 2023) to analyze the k -value of 5,400 questions that belong to 1,000 randomly sampled images (see the details of the system prompt in Appendix §B). Fig. 1 shows that the mean k value of the samples is approximately $k = 1.95$, and the mode is $k = 2$. 77%

378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431

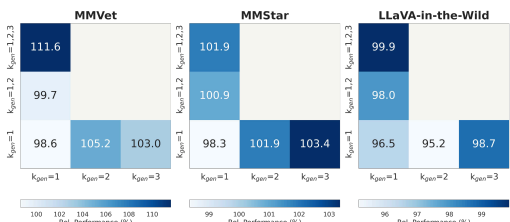


Figure 4: **Impact of k -value range:** Performance comparison across variations of COM-PACT whose compositional tuning data is synthesized with different ranges of k_{gen} in the **Capability Sampling** step (§3.2). Models trained on higher and wider ranges of complexity (darker bars) achieve higher performance across benchmarks.

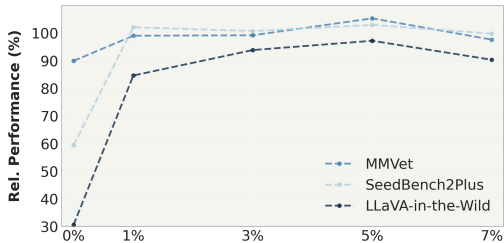


Figure 5: **Impact of instruction tuning data ratio.** Relative performance of COMPACT with different amounts instruction tuning data from LLaVA-665K (Liu et al., 2024b). The x-axis is the percentage of LLaVA-665K used as instruction tuning data, and the y-axis is relative score. The performance improves significantly with a small amount of instruction tuning data and stabilizes around 5%.

of the questions require two or fewer atomic visual capabilities. Interestingly, a small fraction of the questions (0.06%) require as many as 10 capabilities (e.g., “Question: Describe this photo in detail.”). We also observe that 0.9% of the questions require zero capabilities. We further provide $k = 0$ examples (see Appendix §C.2).

Complexity Distribution in COMPACT. We confirm that COMPACT increases the complexity distribution of the training dataset previously established by LLaVA-665K. We use Gemini-2.0-Flash (Team et al., 2023) to analyze 7200 questions that belong to 1000 randomly sampled images in the compositional tuning data. The mean k -value of the data is $k = 2.89$, and mode is $k = 3$, which are higher than the LLaVA counterparts. We also find that the representation of each capability in the dataset is more balanced compared to LLaVA-665K (see Appendix Fig. 6). We provide more details on the data statistics of COMPACT and LLaVA-665K data in Appendix §A.5.

COMPACT successfully scales the k -value distribution of the training dataset. The number of capabilities sampled during generation (k_{gen}) in the **Capability Sampling** step (§3.2) practically acts as the lower bound of the question’s final k -value for two reasons: 1) Object recognition capability is implicitly assumed by the conversation generator (i.e. Gemini (Team et al., 2023)) during generation and verification steps (see Fig. 7 in Appendix). We hypothesize that “object-oriented”ness is implicitly required to generate high-quality questions about the image, likely due to the biases in the image sources. We note that COMPACT does not change the visual contents of the images. 2) We find that spatial capabilities such as scene understanding, spatial recognition, and spatial relationship are often related in practice as the question becomes spatially complex (see Fig. 8 in Appendix). The spatial orientation of objects can be influenced by the overall layout of the scene. For example, what is “on the left side of” an object could be described as “behind”, depending on their relative depth.

Effect of Matching LLaVA-665K Distribution. We isolate the complexity effect from COMPACT’s performance gain by controlling for the sample generator. We generate a 16K-sample compositional tuning data whose capability and k -value distribution matches that of LLaVA-665K (Liu et al., 2024b). Similar to the original COMPACT data recipe, we mix this complexity-matched compositional tuning data with the random 5% subset of the VIT data. We compare this training dataset with the following baselines: 1) a random subset of the VIT data with the same size, 2) original COMPACT with 16K compositional tuning data, and 3) the full VIT dataset. As shown in Tab. 3, the performance of complexity-matched COMPACT (COMPACT_{llava}) stands at 97.6% (compared to the full VIT baseline). The performance of original COMPACT jumps to 98.8%, suggesting that at least half of the performance gain (1.3% out of 2.6% improvement over random baseline) in COMPACT comes from higher complexity in the compositional tuning data.

4.4 ABLATION STUDIES

We conduct ablation studies to understand how COMPACT addresses the aforementioned challenges in using complexity as tool to control sampling for VIT data curation. First, we vary the range of complexity in the data to show that training efficiency benefits from higher and wider ranges of k . Second, we show that response formatting can be trained by mixing a relatively small amount of prompt-engineered VIT dataset. Unless otherwise specified, all experiments use 5% of LLaVA-665K (Liu et al., 2024b) VIT data and 16K compositional tuning data.

Effect of k -value Range. We analyze the relationship between information density and efficient learning based on the learning potential of different ranges of complexity. We train the model on COMPACT with five different versions of 16K compositional tuning data, each generated from using $k_{gen} = 1$, $k_{gen} = 2$, $k_{gen} = 3$, $k_{gen} = 1, 2$ or $k_{gen} = 1, 2, 3$ in the **Capability Sampling** step (§3.2). For fair comparison, we maintain consistent sample counts and use an identical set of images in all five settings. As shown in Fig. 4, increasing the number of sampled capabilities per question leads to consistent improvements on all three benchmarks. Training on $k_{gen} = 1, 2, 3$ compositional tuning data achieves the highest performance on MM-Vet (Yu et al., 2023) and LLaVA-in-the-wild (Liu et al., 2024b), and second highest on MMStar (Chen et al., 2024a). Surprisingly, sampling from $k_{gen} = 1, 2, 3$ demonstrates stronger performance on average compared to sampling only $k_{gen} = 3$. This suggests that although complex samples are more information dense, their benefit is maximized in the presence of simpler samples. We provide more details on k -value range in Appendix §A.2.

Impact of Instruction Tuning Data Ratio. We show that the domain adaptation problem of fitting model’s response to the format required by the test dataset can be resolved with a data mixture. We fix the 16K compositional tuning data and scale the amount of VIT subset from 0% (pure compositional tuning) to 7% of LLaVA-665K (Liu et al., 2024b). Fig. 5 shows that a small addition of VIT subset improves the performance of the model on MMVet (Yu et al., 2023) (short answer), SeedBench2Plus (Li et al., 2024b) (multiple choice) and LLaVA-in-the-Wild (Liu et al., 2024b) (long answer). We find that the prompt engineered VIT subset is training the instruction following capability of the model on various question types even at just 1%. Interestingly, further scaling gives diminishing returns, and starts to lose absolute gains at 7%. These results suggest that instruction following capability is potentially orthogonal to the capabilities of the base model and the atomic visual capabilities, and can be acquired with minimal instruction tuning data.

5 DISCUSSION

Conclusion. In this work, we introduce COMPACT, a data recipe that increases the complexity of the training samples by combining higher number of atomic visual capabilities (e.g., object recognition, spatial reasoning, shape attribution). Our experimental results show that training on more complex samples matches the full LLaVA-665K (Liu et al., 2024b) VIT performance across benchmarks with less than 10% of the original data budget. Our work presents the potential of complexity-enhanced learning as a scalable, data-efficient pathway toward multimodal models that can solve multi-capability tasks.

Limitations. Our approach faces two key limitations. First, we mainly rely on data generated from closed-source models (i.e., Gemini (Team et al., 2023)), which potentially introduce their compositional limitations and biases to our dataset. We provide further discussion on failure modes in Appendix §A.6. Additionally, this data generation process is costly, which could pose challenges for reproducibility. To support future research, we will publicly release the data generated in this project. Second, our approach focuses on the compositionality of vision-centric capabilities. Therefore, our approach may not be optimal for addressing knowledge-intensive tasks that lie outside the scope of visual reasoning. Detailed discussion on knowledge-intensive task results is in App. §A.3.

Future Work. We aim to extend COMPACT by investigating the intersection of image complexity and question complexity. Currently, our data recipe generates questions given fixed set of images. Specifically, certain groups of atomic visual capabilities and complexity levels might be optimal for different types of visual content present in the image. Additionally, investigating how complexity impacts learning efficiency of different learning algorithms such as reinforcement learning would be promising avenues of future research.

REFERENCES

- 486
487
488 Amro Abbas, Kushal Tirumala, Dániel Simig, Surya Ganguli, and Ari S Morcos. Semdedup: Data-
489 efficient learning at web-scale through semantic deduplication. *arXiv preprint arXiv:2303.09540*,
490 2023.
- 491 Jean-Baptiste Alayrac, Jeff Donahue, Pauline Luc, Antoine Miech, Iain Barr, Yana Hasson, Karel
492 Lenc, Arthur Mensch, Katherine Millican, Malcolm Reynolds, et al. Flamingo: a visual language
493 model for few-shot learning. *Advances in neural information processing systems*, 35:23716–23736,
494 2022.
- 495
496 Jinze Bai, Shuai Bai, Shusheng Yang, Shijie Wang, Sinan Tan, Peng Wang, Junyang Lin, Chang Zhou,
497 and Jingren Zhou. Qwen-vl: A versatile vision-language model for understanding, localization.
498 *Text Reading, and Beyond*, 2, 2023.
- 499 Nishant Balepur, Rachel Rudinger, and Jordan Lee Boyd-Graber. Which of these best describes
500 multiple choice evaluation with llms? a) forced b) flawed c) fixable d) all of the above. *arXiv*
501 *preprint arXiv:2502.14127*, 2025.
- 502
503 Declan Campbell, Sunayana Rane, Tyler Giallanza, Camillo Nicolò De Sabbata, Kia Ghods, Amogh
504 Joshi, Alexander Ku, Steven Frankland, Tom Griffiths, Jonathan D Cohen, et al. Understanding
505 the limits of vision language models through the lens of the binding problem. *Advances in Neural*
506 *Information Processing Systems*, 37:113436–113460, 2025.
- 507 Hyunsik Chae, Seungwoo Yoon, Chloe Yewon Chun, Gyeahun Go, Yongin Cho, Gyeongmin Lee, and
508 Ernest K Ryu. Decomposing complex visual comprehension into atomic visual skills for vision
509 language models. In *The 4th Workshop on Mathematical Reasoning and AI at NeurIPS'24*.
- 510
511 Lin Chen, Jinsong Li, Xiaoyi Dong, Pan Zhang, Yuhang Zang, Zehui Chen, Haodong Duan, Jiaqi
512 Wang, Yu Qiao, Dahua Lin, et al. Are we on the right way for evaluating large vision-language
513 models? *arXiv preprint arXiv:2403.20330*, 2024a.
- 514 Mingyang Chen, Haoze Sun, Tianpeng Li, Fan Yang, Hao Liang, Keer Lu, Bin Cui, Wentao Zhang,
515 Zenan Zhou, and Weipeng Chen. Facilitating multi-turn function calling for llms via compositional
516 instruction tuning. *arXiv preprint arXiv:2410.12952*, 2024b.
- 517
518 Ruibo Chen, Yihan Wu, Lichang Chen, Guodong Liu, Qi He, Tianyi Xiong, Chenxi Liu, Junfeng
519 Guo, and Heng Huang. Your vision-language model itself is a strong filter: Towards high-quality
520 instruction tuning with data selection. *arXiv preprint arXiv:2402.12501*, 2024c.
- 521 Chaoyou Fu, Peixian Chen, Yunhang Shen, Yulei Qin, Mengdan Zhang, Xu Lin, Zhenyu Qiu,
522 Wei Lin, Jinrui Yang, Xiawu Zheng, et al. Mme: a comprehensive evaluation benchmark for
523 multimodal large language models. corr abs/2306.13394 (2023), 2023.
- 524
525 Sreyan Ghosh, Chandra Kiran Reddy Evuru, Sonal Kumar, Deepali Aneja, Zeyu Jin, Ramani Du-
526 raiswami, Dinesh Manocha, et al. A closer look at the limitations of instruction tuning. *arXiv*
527 *preprint arXiv:2402.05119*, 2024.
- 528 Jia He, Mukund Rungta, David Koleczek, Arshdeep Sekhon, Franklin X Wang, and Sadid Hasan.
529 Does prompt formatting have any impact on llm performance? *arXiv preprint arXiv:2411.10541*,
530 2024.
- 531
532 Cheng-Yu Hsieh, Jieyu Zhang, Zixian Ma, Aniruddha Kembhavi, and Ranjay Krishna. Sugarcrepe:
533 Fixing hackable benchmarks for vision-language compositionality. *Advances in neural information*
534 *processing systems*, 36:31096–31116, 2023.
- 535 Hang Hua, Yunlong Tang, Ziyun Zeng, Liangliang Cao, Zhengyuan Yang, Hangfeng He, Chenliang
536 Xu, and Jiebo Luo. Mmcomposition: Revisiting the compositionality of pre-trained vision-
537 language models. *arXiv preprint arXiv:2410.09733*, 2024.
- 538
539 Jiaying Huang, Jingyi Zhang, Kai Jiang, Han Qiu, and Shijian Lu. Visual instruction tuning towards
general-purpose multimodal model: A survey. *arXiv preprint arXiv:2312.16602*, 2023.

- 540 Fucai Ke, Joy Hsu, Zhixi Cai, Zixian Ma, Xin Zheng, Xindi Wu, Sukai Huang, Weiqing Wang,
541 Pari Delir Haghighi, Gholamreza Haffari, et al. Explain before you answer: A survey on compo-
542 sitional visual reasoning. *arXiv preprint arXiv:2508.17298*, 2025.
- 543
- 544 Jaewoo Lee, Boyang Li, and Sung Ju Hwang. Concept-skill transferability-based data selection for
545 large vision-language models. *arXiv preprint arXiv:2406.10995*, 2024.
- 546
- 547 Bo Li, Yuanhan Zhang, Dong Guo, Renrui Zhang, Feng Li, Hao Zhang, Kaichen Zhang, Peiyuan
548 Zhang, Yanwei Li, Ziwei Liu, et al. Llava-onevision: Easy visual task transfer. *arXiv preprint*
549 *arXiv:2408.03326*, 2024a.
- 550 Bohao Li, Yuying Ge, Yi Chen, Yixiao Ge, Ruimao Zhang, and Ying Shan. Seed-bench-2-plus:
551 Benchmarking multimodal large language models with text-rich visual comprehension. *arXiv*
552 *preprint arXiv:2404.16790*, 2024b.
- 553
- 554 Junnan Li, Dongxu Li, Caiming Xiong, and Steven Hoi. Blip: Bootstrapping language-image pre-
555 training for unified vision-language understanding and generation. In *International conference on*
556 *machine learning*, pp. 12888–12900. PMLR, 2022.
- 557
- 558 Ming Li, Pei Chen, Chenguang Wang, Hongyu Zhao, Yijun Liang, Yupeng Hou, Fuxiao Liu, and
559 Tianyi Zhou. Mosaic-it: Free compositional data augmentation improves instruction tuning. *arXiv*
560 *preprint arXiv:2405.13326*, 2024c.
- 561
- 562 Zhiqi Li, Guo Chen, Shilong Liu, Shihao Wang, Vibashan VS, Yishen Ji, Shiyi Lan, Hao Zhang,
563 Yilin Zhao, Subhashree Radhakrishnan, et al. Eagle 2: Building post-training data strategies from
564 scratch for frontier vision-language models. *arXiv preprint arXiv:2501.14818*, 2025.
- 565
- 566 Haotian Liu, Chunyuan Li, Qingyang Wu, and Yong Jae Lee. Visual instruction tuning. *Advances*
567 *in neural information processing systems*, 36:34892–34916, 2023.
- 568
- 569 Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction
570 tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*,
571 pp. 26296–26306, 2024a.
- 572
- 573 Haotian Liu, Chunyuan Li, Yuheng Li, and Yong Jae Lee. Improved baselines with visual instruction
574 tuning. In *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*,
575 pp. 26296–26306, 2024b.
- 576
- 577 Zikang Liu, Kun Zhou, Wayne Xin Zhao, Dawei Gao, Yaliang Li, and Ji-Rong Wen. Less is more:
578 High-value data selection for visual instruction tuning. *arXiv preprint arXiv:2403.09559*, 2024c.
- 579
- 580 Adyasha Maharana, Prateek Yadav, and Mohit Bansal. D2 pruning: Message passing for balancing
581 diversity and difficulty in data pruning. *arXiv preprint arXiv:2310.07931*, 2023.
- 582
- 583 Max Marion, Ahmet Üstün, Luiza Pozzobon, Alex Wang, Marzieh Fadaee, and Sara Hooker.
584 When less is more: Investigating data pruning for pretraining llms at scale. *arXiv preprint*
585 *arXiv:2309.04564*, 2023.
- 586
- 587 Minesh Mathew, Viraj Bagal, Rubèn Tito, Dimosthenis Karatzas, Ernest Valveny, and CV Jawahar.
588 Infographicvqa. In *Proceedings of the IEEE/CVF Winter Conference on Applications of Computer*
589 *Vision*, pp. 1697–1706, 2022.
- 590
- 591 Timothy Ossowski, Ming Jiang, and Junjie Hu. Prompting large vision-language models for compo-
592 sitional reasoning. *arXiv preprint arXiv:2401.11337*, 2024.
- 593
- 594 Mansheej Paul, Surya Ganguli, and Gintare Karolina Dziugaite. Deep learning on a data diet:
595 Finding important examples early in training. *Advances in neural information processing systems*,
34:20596–20607, 2021.
- 596
- 597 Eva Sánchez Salido, Julio Gonzalo, and Guillermo Marco. None of the others: a general technique
598 to distinguish reasoning from memorization in multiple-choice llm evaluation benchmarks. *arXiv*
599 *preprint arXiv:2502.12896*, 2025.


- 594 Min Shi, Fuxiao Liu, Shihao Wang, Shijia Liao, Subhashree Radhakrishnan, De-An Huang, Hongxu
595 Yin, Karan Sapra, Yaser Yacoob, Humphrey Shi, et al. Eagle: Exploring the design space for
596 multimodal llms with mixture of encoders. *arXiv preprint arXiv:2408.15998*, 2024.
597
- 598 Amanpreet Singh, Vivek Natarajan, Meet Shah, Yu Jiang, Xinlei Chen, Dhruv Batra, Devi Parikh,
599 and Marcus Rohrbach. Towards vqa models that can read. In *Proceedings of the IEEE/CVF*
600 *conference on computer vision and pattern recognition*, pp. 8317–8326, 2019.
- 601 Ben Sorscher, Robert Geirhos, Shashank Shekhar, Surya Ganguli, and Ari Morcos. Beyond neural
602 scaling laws: beating power law scaling via data pruning. *Advances in Neural Information*
603 *Processing Systems*, 35:19523–19536, 2022.
- 604 Gemini Team, Rohan Anil, Sebastian Borgeaud, Jean-Baptiste Alayrac, Jiahui Yu, Radu Soricut,
605 Johan Schalkwyk, Andrew M Dai, Anja Hauth, Katie Millican, et al. Gemini: a family of highly
606 capable multimodal models. *arXiv preprint arXiv:2312.11805*, 2023.
607
- 608 Peter Tong, Ellis Brown, Penghao Wu, Sanghyun Woo, Adithya Jairam Vedagiri IYER, Sai Charitha
609 Akula, Shusheng Yang, Jihan Yang, Manoj Middepogu, Ziteng Wang, et al. Cambrian-1: A fully
610 open, vision-centric exploration of multimodal llms. *Advances in Neural Information Processing*
611 *Systems*, 37:87310–87356, 2025.
- 612 Jason Wei, Maarten Bosma, Vincent Y Zhao, Kelvin Guu, Adams Wei Yu, Brian Lester, Nan Du,
613 Andrew M Dai, and Quoc V Le. Finetuned language models are zero-shot learners. *arXiv preprint*
614 *arXiv:2109.01652*, 2021.
- 615 Xindi Wu, Mengzhou Xia, Rulin Shao, Zhiwei Deng, Pang Wei Koh, and Olga Russakovsky. Icons:
616 Influence consensus for vision-language data selection. *arXiv preprint arXiv:2501.00654*, 2024a.
617
- 618 Xindi Wu, Dingli Yu, Yangsibo Huang, Olga Russakovsky, and Sanjeev Arora. Conceptmix: A
619 compositional image generation benchmark with controllable difficulty. *Advances in Neural*
620 *Information Processing Systems*, 37:86004–86047, 2024b.
621
- 622 Lingling Xu, Haoran Xie, Si-Zhao Joe Qin, Xiaohui Tao, and Fu Lee Wang. Parameter-efficient
623 fine-tuning methods for pretrained language models: A critical review and assessment. *arXiv*
624 *preprint arXiv:2312.12148*, 2023.
- 625 Weihao Yu, Zhengyuan Yang, Linjie Li, Jianfeng Wang, Kevin Lin, Zicheng Liu, Xinchao Wang,
626 and Lijuan Wang. Mm-vet: Evaluating large multimodal models for integrated capabilities. *arXiv*
627 *preprint arXiv:2308.02490*, 2023.
- 628 Aimen Zerroug, Mohit Vaishnav, Julien Colin, Sebastian Musslick, and Thomas Serre. A benchmark
629 for compositional visual reasoning. *Advances in neural information processing systems*, 35:29776–
630 29788, 2022.
631
- 632 Jeffrey Zhou, Tianjian Lu, Swaroop Mishra, Siddhartha Brahma, Sujoy Basu, Yi Luan, Denny
633 Zhou, and Le Hou. Instruction-following evaluation for large language models. *arXiv preprint*
634 *arXiv:2311.07911*, 2023.
635
636
637
638
639
640
641
642
643
644
645
646
647

648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701

Appendices


A	Additional Analysis	2
A.1	Relationship between k-value and complexity of the task	3
A.2	Breakdown of performance on MMStar	3
A.3	Performance on Knowledge-Intensive Tasks	4
A.4	Atomic capability selection	4
A.5	Analysis on Data Statistics	5
A.6	Quality Verification and Failure Mode Analysis	5
A.7	Additional Experiments with Open-source Data Generator	6
B	System Prompts	6
C	Visualizations	7
C.1	Qualitative Comparison	7
C.2	Zero-Capability Samples in LLaVA-665K	7
C.3	COMPACT Data Visualization	8

702 A ADDITIONAL ANALYSIS

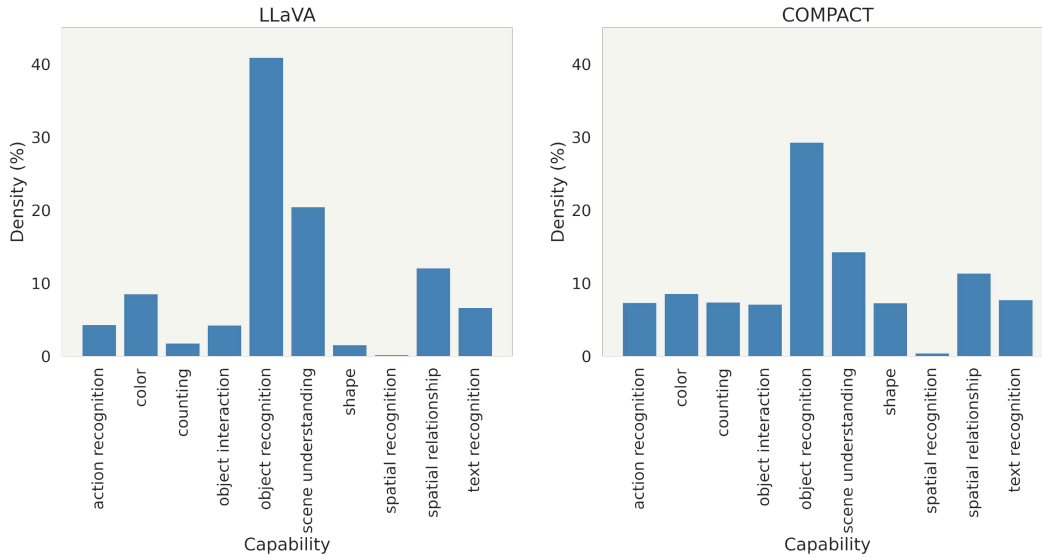

703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755

Figure 6: **Comparison of capability distribution.** The bar plots show the frequency of each atomic capability in LLaVA (*left*) and COMPACT (*right*) samples. In LLaVA, the distribution is notably imbalanced: object recognition and scene understanding are some of the most frequent, while shape and spatial recognition are less prevalent. In contrast, COMPACT exhibits a more balanced distribution across capability categories.

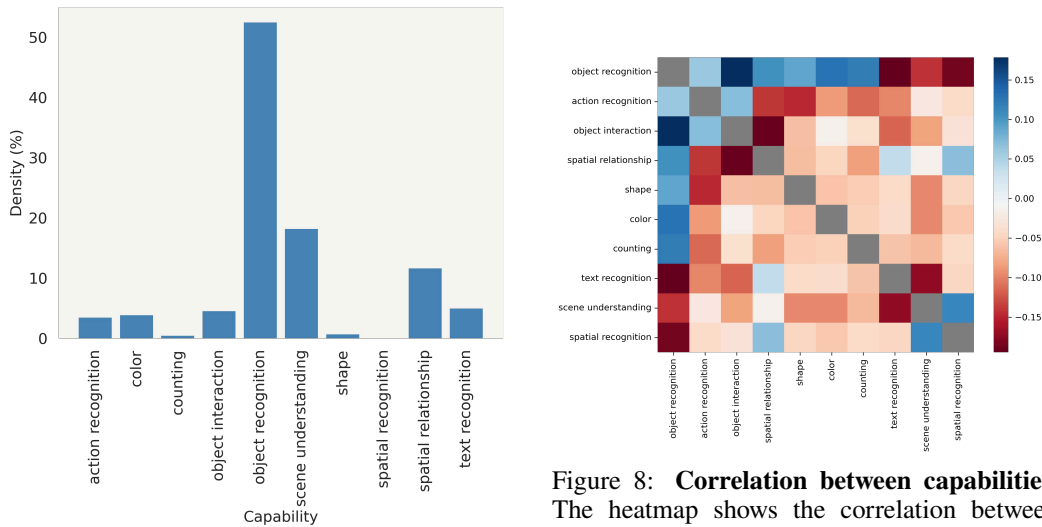

748
749
750
751
752
753
754
755

Figure 7: **Distribution of implicitly assumed capabilities.** The bar plot shows the frequency of atomic capabilities that are implicitly assumed during COMPACT's compositional tuning data generation. Object recognition is most commonly assumed during question generation, most likely to generate meaningful questions with object centered images.

Figure 8: **Correlation between capabilities.** The heatmap shows the correlation between unique capabilities in COMPACT's compositional tuning data. Object recognition's correlations with other capabilities are relatively strong. Spatial capabilities are also locally correlated, as spatial questions require some understanding of the scene, depth, and relative position in practice.

756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809

Figure 9: Limited performance improvements on knowledge-intensive benchmarks. Comparison shows modest improvements over random baseline on tasks that require substantial world knowledge or domain expertise. Numbers reported in accuracy (%) and relative performance to full model (%).

Model	OK-VQA	MMMU	MMMU-Pro		Rel. (Avg.)
			Standard	Vision	
Random	49.30	32.89	18.15	11.44	92.0%
COMPACT	50.02	33.89	20.23	11.91	96.6%
LLaVA-665K (Liu et al., 2024b)	57.96	33.89	20.12	11.97	100%

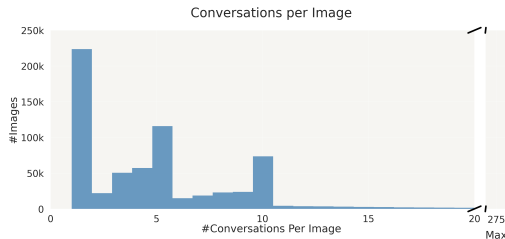


Figure 10: Distribution of conversations per image in LLaVA-665K. The overwhelming majority of images (97.69%) have ≤ 20 conversation pairs. The average of number of conversations per image is 5.18 ($\sigma = 5.62$). A small subset (2.31%) exceeds 20 conversations, which includes a sample with the maximum length of 275. Total conversations: 3,444,246.

A.1 RELATIONSHIP BETWEEN K-VALUE AND COMPLEXITY OF THE TASK

We use TextVQA (Singh et al., 2019) to demonstrate that increasing the k-value makes the task progressively more challenging. Every question in this benchmark contains one key atomic capability (text recognition) in addition to potentially others. We split the TextVQA validation set according to the k-value of each question, and report the results of the LLaVA-v1.5-7b model.

	k = 1	k = 2	k = 3
Density	73.6%	19.1%	2.2%
LLaVA-v1.5-7B	46.4	45.6	39.8

Table 4: Performance of LLaVA-v1.5-7b on each k-value in TextVQA. $k \geq 4$ is excluded as it contains less than 10 samples. Approximately 5% of the questions are $k = 0$, which are ambiguous and do not strictly refer to the image (e.g., “Are Jordan products produced in Jordan?”).

Tab. 4 shows that the LLaVA-v1.5-7b model struggles more as other capabilities (e.g. color, spatial relation understanding) are added to text recognition. This provides further evidence that complexity measured by the k-value is related to the model’s ability to process visual information, and that the k-value characterizes the complexity of the question in a meaningful way. In short, as the k-value increases, overall task difficulty increases.

We report on the TextVQA benchmark because the results are more interpretable. Every question requires a shared atomic capability (text recognition) and has the same answer format, allowing us to isolate the effect of adding capabilities more strictly.

A.2 BREAKDOWN OF PERFORMANCE ON MMSTAR

Category-specific performance. We split the questions in MMStar (Chen et al., 2024a) by category (provided by the dataset) and report category-specific results on the models. Tab. 5 shows that COMPACT improves performance across most categories except math, which we exclude from our list of atomic capabilities for fair comparison with training on LLaVA-665K data. We observe particularly large improvements on science & technology (diagram and chart understanding) and instance reasoning (perception and relation understanding) categories, suggesting that COMPACT broadly generalizes to visual tasks.

k-value specific performance. We provide further analysis to explain the mechanism of improvement in COMPACT. We split the questions in MMStar by k-value and measure the performance of three models each trained on three different datasets ($k_{gen}=1, k_{gen}=1,2$, and $k_{gen}=1,2,3$; Fig. 4) with progressively higher k-value distributions. Tab. 6 shows that $k_{gen}=1,2,3$ outperforms others

810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863

MMStar	Data	coarse perception	fine-grained perception	instance reasoning	logical reasoning	math	science and technology
Random	49K	59.5	28.9	38.1	29.9	28.7	25.2
COMPACT	49K	61.6	28.9	41.2	31.8	28.1	27.7
Improvement		+3.5%	0%	+8.1%	+6.4%	-2.1%	+9.9%

Table 5: Performance of COMPACT and random LLaVA-665K subset on each category in MMStar. COMPACT data has 33K VIT data and 16K compositional tuning data.

on higher k-value ($k \geq 2$) questions. The improvement is larger when we compare $k_{gen}=1,2,3$ and $k_{gen}=1$, as opposed to $k_{gen}=1,2,3$ and $k_{gen}=1,2$. These results suggest that increasing the k-value of the training data enables the model to perform well on higher k-value questions in the test dataset.

Tab. 6 also shows that training on $k_{gen} = 1, 2, 3$ leads to a small drop in performance on lower k-value ($k = 1$) questions, indicating a trade-off between lower and higher k-value regimes. This explains why both simple and complex samples are necessary for training.

MMStar	Data	k = 1	k = 2	k = 3	k = 4
$k_{gen} = 1, 2, 3$ vs $k_{gen} = 1$	49K	-0.5%	+3.6%	+22.7%	+33.5%
$k_{gen} = 1, 2, 3$ vs $k_{gen} = 1, 2$	49K	-1.3%	+2.6%	+14.1%	+9.1%

Table 6: Performance improvements on each k-value in MMStar by $k_{gen} = 1, 2, 3$ dataset compared to $k_{gen} = 1$ and $k_{gen} = 1, 2$.

A.3 PERFORMANCE ON KNOWLEDGE-INTENSIVE TASKS

While our compositional tuning approach shows general improvements on various benchmarks, we observe more modest gains in knowledge-intensive tasks. Tab. 9 compares the performance of different approaches on OK-VQA, MMMU, and MMMU-Pro benchmarks. COMPACT with 32k compositional tuning data shows relatively small improvements over the random baseline: OK-VQA (50.02% vs 49.30%), MMMU (33.89% vs 32.89%), and MMMU-Pro (20.23% vs 18.15% on standard tasks, 11.91% vs 11.44% on vision tasks). Notably, training on the full LLaVA-665K (Liu et al., 2024b) VIT dataset leads to limited performance improvements on MMMU (33.89%). Although knowledge-related tasks are not our main focus, this inspires future work on designing compositional tuning approaches that cover broader capabilities outside of the vision space.

A.4 ATOMIC CAPABILITY SELECTION

We conduct ablations on each atomic capability to analyze which capability is driving the most gains in COMPACT. For each iteration, we prepare an ablated COMPACT training dataset after we exclude each atomic capability in the data generation step (Step 2). Tab. 7 shows the average drop in relative performance across multimodal benchmarks (§4.1) when we ablate each atomic capability. The results indicate that all atomic capabilities contribute non-trivially to COMPACT’s performance.

Atomic Capability Selection. The original LLaVA-665K data curation process lays out 8 of the 10 atomic capabilities in COMPACT; the two others (object interaction and shape attribution) we identify manually from inspecting the dataset. We acknowledge that alternative taxonomies are possible depending on specific training goals, and we view our 10 atomic capabilities as a practical starting point rather than a definitive set.

Non-Orthogonality of Capabilities. We agree that perfect orthogonality is neither achievable nor necessary for our framework. Real-world visual reasoning naturally involves overlapping skills—for example, spatial reasoning often co-occurs with object recognition. The correlation analysis in Fig. 8 reveals these natural dependencies, which we view as a feature rather than a limitation. The key insight is that combining multiple capabilities, even correlated ones, requires the model to integrate more visual information, which increases information density.

864
865
866
867
868
869
870
871
872
873
874

Atomic Capability	Rel. Performance Drop
w/o scene understanding	-5.2%
w/o spatial relationship	-4.9%
w/o text recognition	-4.7%
w/o object recognition	-4.0%
w/o color	-3.7%
w/o counting	-3.3%
w/o object interaction	-3.2%
w/o spatial recognition	-3.1%
w/o action recognition	-2.1%
w/o shape	-0.7%

875
876
877
878

Table 7: Average drop in relative performance as a result of ablating each atomic capability during 16K compositional tuning data generation in COMPACT.

879
880
881
882
883
884
885

Implicit Assumption of Object Recognition. Fig. 7 shows that object recognition is frequently implicitly assumed during question generation. Object recognition serves as a foundational capability that often appears alongside other skills, similar to how reading comprehension is fundamental to many NLP tasks. Rather than undermining decomposability, this reflects the hierarchical nature of visual reasoning where basic perception enables higher-level reasoning. This foundational role is consistent with the design of vision-centric instruction tuning, where grounding responses in specific objects is essential for meaningful visual understanding.

886

A.5 ANALYSIS ON DATA STATISTICS

888
889
890
891
892
893
894

Conversation length distribution in LLaVA-665K. Fig. 10 shows the distribution of the number of conversations per image in LLaVA-665K (Liu et al., 2024b). 93.6% of the samples fall below the 10-pair threshold. The distribution’s mean of 5.18 conversations per image ($\sigma = 5.62$) shows that the data is heavily skewed towards lower values. We fix the target number of conversations per image in the compositional tuning dataset based on these findings. We ensure a fair comparison by aligning the distribution of our data with the baseline distribution.

895
896
897
898
899
900
901
902
903
904

Token-level analysis on COMPACT data. We conduct token-level analysis comparing our COMPACT generated compositional tuning data (32k samples) with an equivalent-sized LLaVA-665K subset (32k samples). The results demonstrate that COMPACT achieves substantial token efficiency despite incorporating multiple atomic questions. Tab. 8 reveals that COMPACT uses 104.87 tokens/samples (3.36M total tokens) compared to LLaVA’s 197.42 tokens/samples (6.32M total tokens), achieving a 46.88% reduction (92.55 fewer tokens per entry). Specifically, COMPACT’s input (question) tokens average 12.83 ± 4.18 (31% shorter than LLaVA’s 16.85 ± 25.49), and answer tokens average 1.70 ± 0.90 (92% shorter than LLaVA’s 21.74 ± 73.38). The token reduction translates directly to faster training ($\sim 47\%$ fewer tokens to process), lower storage usage (shorter sequences), and better data efficiency (more focused atomic capabilities per token).

905
906
907
908
909
910

Metric	COMPACT	LLaVA	Difference
Input tokens (mean)	12.83 ± 4.18	16.85 ± 25.49	31% shorter
Output tokens (mean)	1.70 ± 0.90	21.74 ± 73.38	92% shorter
Tokens per Q&A turn	14.53	38.59	62% fewer
Total tokens per entry	104.87	197.42	46.88% reduction

911

Table 8: Token-level comparison between COMPACT and LLaVA datasets (32k entries each).

912

913

A.6 QUALITY VERIFICATION AND FAILURE MODE ANALYSIS

914
915
916
917

We conduct a systematic analysis of failure modes in our generated compositional tuning data to ensure quality and transparency. To quantify the effectiveness of our quality control process, we perform a controlled experiment generating questions for $k_{gen} = 1, 2, 3$ on a sample of images.

Table 9: **Baseline comparisons (Qwen3 generator)**. Following Tab. 2, We report COMPACT results using an open-source generator (Qwen3-VL-4B-Instruct), along with the full LLaVA-665K (Liu et al., 2024b) baseline and our compact COMPACT recipe for reference.

Recipe	# Data	InfoVQA	SeedBench2Plus	MME	TextVQA	MM-Vet	CV-Bench	MMStar	LLaVA-W	Rel. (%)
LLaVA-665K	665K	20.80	41.72	1478.48	46.99	29.22	60.92	35.11	68.50	100.00
COMPACT (ours, Gemini)	65K	23.68	43.13	1379.94	44.37	31.74	55.28	36.13	64.50	100.18
COMPACT (ours, Qwen3)	65K	22.97	42.12	1370.76	43.07	30.78	56.38	34.04	65.70	98.31

Rejection Rates and Failure Modes. Our multi-stage filtering (described in Section 3.2 of the main paper) rejected approximately 21% of generated questions across four primary failure modes: (1) **Low confidence scores (10%)**: questions where the VLM cannot answer confidently, often due to ambiguous phrasing or requiring information not present in the image; (2) **Uninformative responses (12.5%)**: questions with answers like “unknown”, “not visible”, “yes”, or “no” that do not provide meaningful visual supervision (for example, “What text is visible on the wooden tray?” answered with “None”); (3) **High word overlap/near-duplicates (40%)**: questions that share more than 60% of words with previously accepted questions for the same image (for instance, generating both “What is the color of the bench in the image?” and “What is the color of the bench located in the center of the scene?” with 70% word overlap); and (4) **Capability mismatch (37.5%)**: questions that do not naturally integrate the specified capabilities (for example, asking “What object is present in the image without any action being performed?” for $k_{gen} = 2$ with action_recognition and object_recognition, where the question only requires object recognition, as the VLM correctly identified only 1 of 2 expected capabilities). Notably, capability mismatch becomes increasingly important as k increases, accounting for 0%, 50%, and 66.7% of rejections for $k_{gen} = 1, 2, 3$ respectively. This demonstrates that our verification successfully filters questions that artificially force capability combinations.

Common Failure Patterns in Remaining Data. Despite our rigorous filtering, some failure patterns remain in the final dataset: (1) **Overly complex $k_{gen} = 3$ questions**: some high-complexity questions are difficult even for humans to answer, potentially due to the challenge of naturally integrating three or more capabilities in a single question; (2) **VLM misidentification errors**: cases where the VLM generator misidentifies image content, leading to incorrect ground-truth answers (while our verification step mitigates this issue, it does not eliminate it entirely); (3) **Spatial reasoning errors**: questions involving spatial relationships when objects are ambiguously positioned, leading to potential disagreement about correct answers; and (4) **Attribute questions for occluded objects**: color or shape questions about small or partially occluded objects where the attributes are not clearly visible. However, COMPACT achieves consistent improvements across diverse benchmarks with different evaluation protocols, suggesting these biases do not critically harm generalization. This multi-stage quality control ensures that our training data maintains both high quality and natural capability integration.

A.7 ADDITIONAL EXPERIMENTS WITH OPEN-SOURCE DATA GENERATOR

We evaluate COMPACT using an open-source generator (Qwen3-VL-4B-Instruct) to test whether our gains persist without proprietary generation. Tab. 9 reports these results, alongside the full LLaVA-665K baseline and our compact COMPACT recipe for direct comparison.

B SYSTEM PROMPTS

System Prompts for Capability Analysis and Sample Generation. We provide the system prompt for our capability analysis where we identify all the required capabilities for a given question (**A**). We also provide the system prompts for compositional question generation (**B**) and verification (**C**). The generation prompt includes structured guidelines to ensure that the generated multi-capability questions naturally blend different capabilities and can only be answered by checking the corresponding images. The verification prompt checks if the questions meet these guidelines and do not contain subjective interpretations or compositional flaws.

For conversation generation, we use Gemini-2.0-Flash (Team et al., 2023) with temperature 0.1, top-p 0.9, max token 1000. We have 3 runs per question on average. We use 32 parallel processes

972 to generate 32K compositional tuning data. Each generation uses about 700 tokens on average. The
973 total generation time is roughly 2 hours and the API cost is \$86.5.
974

975 (A) System Prompt for Capability Analysis

976 **Prompt:** You are an AI assistant that analyzes questions to identify the core capabilities required to
977 answer them.

978 Given a question, identify ALL the capabilities it requires from this list:

- 979 - spatial relationship (understanding relative positions)
- 980 - object interaction (how objects/people interact)
- 981 - scene understanding (understanding the background)
- 982 - text recognition (reading text in images)
- 983 - spatial recognition (understanding 3D space)
- 984 - action recognition (identifying actions/activities)
- 985 - object recognition (identifying objects)
- 986 - counting (counting objects/people)
- 987 - color (identifying colors)
- 988 - shape (identifying shapes)

989 Return ONLY a JSON array of the required capabilities, like: ["capability1", "capability2"]
990

991 (C) System Prompt for Question Verification

992 **Prompt:** You are an AI assistant that verifies if questions about images properly utilize specified
993 capabilities.

994 Given a question and its answer, analyze whether it NATURALLY requires using EXACTLY k specified
995 capabilities - no more, no less.

996 **IMPORTANT:**

- 1000 • The question should require ALL specified capabilities to be answered
 - 1001 • The question should not require additional major capabilities beyond those specified
 - 1002 • The capabilities must be naturally integrated, not artificially forced
- 1003
1004
1005
1006

1007 C VISUALIZATIONS

1008 C.1 QUALITATIVE COMPARISON

1009 We provide qualitative visualizations that compare the outputs from our compositionally-tuned
1010 COMPACT model and the LLaVA-665K VIT model. Examples in Fig. 11 highlight the importance of
1011 compositional tuning for handling complex multi-capability tasks ($k \geq 3$). These cases demonstrate
1012 COMPACT model's enhanced ability to integrate multiple visual capabilities, while showing the
1013 baseline model's difficulty with such compositionally complex queries.
1014
1015
1016

1017 C.2 ZERO-CAPABILITY SAMPLES IN LLaVA-665K

1018 We identify a subset of samples in the LLaVA-665K dataset that require no visual capabilities,
1019 which we refer to as zero-capability samples. These include general knowledge queries, subjective
1020 prompts, or requests that can be answered without inspecting the image at all. While such data may
1021 still be useful for instruction following, it does not contribute to the development of vision-centric
1022 skills. In our analysis, we find that approximately 1.1% of the questions in LLaVA-665K fall into
1023 this zero-capability category.
1024
1025

1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079

Zero-Capability Samples

Zero-Capability Questions:

- How is the weather?
- Should I move to London?
- Can you provide some information about the Emirates airline?
- Give me a long list of what duties are considered rental activity
- Have the cat declare her new name as ruler
- rewrite it from the perspective of an expensive therapist
- Can you tell me how to prepare a Colombian dish
- how to do coding
- Can you explain Map Reduce to me?
- A 35 year old patient presented to the emergency department with shortness of breath. Before this, he was at a crowded event. He does not have a history of diabetes or high blood pressure. He had a positive PCR test at an outside hospital. What should be the next steps for the physician?
- please convert those snomed codes to FHIR
- I'm running a used car dealership, what are some emerging opportunities for me brought by large language models like GPT-3?
- answer it again in Chinese
- you are a legislator. You are asked to come up with a framework for new legislation that advances the science of reading for grades K-3. Write that model legislation.
- I'm looking to create a podcast, can you help me?

C.3 COMPACT DATA VISUALIZATION

We provide a visualization of the COMPACT dataset to provide insights into its compositional structure. Figs. 12 and 13 show selected examples from COMPACT dataset. Each question is generated from a combination of k atomic capabilities. These cases demonstrate our model's enhanced ability to integrate multiple visual capabilities simultaneously, while the baseline model often struggles with such compositionally complex queries.

1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133

(B) System Prompt for Question Generation

Prompt: You are an AI assistant that generates challenging but well-defined questions and answers about images. First, I will provide you with k specific capabilities. Generate 1 question that naturally integrates EXACTLY these k capabilities.

IMPORTANT:

- If the question can be answered without looking at the image (e.g., the answer can be inferred from the question itself or previous questions), it's a BAD question
- Questions should be reasonably challenging but must have clear, unambiguous answers
- All answers must be extremely concise - use only a single word or short phrase
- Each question must be a single, integrated question that naturally combines all k given capabilities
- DO NOT use "and" or commas to combine separate questions
- Questions should require careful observation and reasoning
- Only generate questions when you can determine the answer with high confidence
- Avoid subjective or ambiguous questions
- ONLY ask about objects and capabilities that are ACTUALLY PRESENT in the image
- NEVER create questions about objects or features that don't exist in the image
- Generate diverse questions that differ in topic and required reasoning

CAPABILITY DEFINITIONS:

- **spatial_relationship:** Identifying how specific objects are positioned relative to each other (above, below, next to, inside, etc.) - focuses on the direct relationship between two or more particular objects
- **spatial_recognition:** Understanding the overall spatial layout and arrangement of the entire scene - focuses on the general organization, depth, perspective, or environmental context, rather than relationships between specific objects
- **text_recognition:** Reading and interpreting text visible in the image
- **action_recognition:** Identifying what action is being performed (can involve a single person/object)
- **object_interaction:** Analyzing how multiple objects interact with each other (requires at least two objects) - MUST involve at least one moving/active object, not just static objects positioned together - can include humans interacting with objects and humans interacting with humans
- **object_recognition:** Identifying and naming objects present in the image
- **counting:** Determining the number of instances of something in the image
- **color:** Identifying or comparing colors of objects in the image
- **shape:** Recognizing and describing the shapes of objects in the image
- **scene_understanding:** Identifying where the image is taken or the type of environment/setting (indoor/outdoor, beach, mountain, kitchen, office, etc.) - focuses on identifying the overall scene, background, or context of the image

Examples:

- **BAD:** "What color is the car, and where is it located?" (two separate questions)
- **BAD:** "What might the person be thinking?" (subjective/ambiguous)
- **BAD:** "Is this a nice room?" (subjective)
- **BAD:** "What breed of dog is in the corner?" (when no dog exists in the image)
- **BAD:** "How are the fridge and desk interacting?" (static objects don't qualify as interaction)
- **BAD:** "What is the color of the red car?" (answer can be inferred from the question itself without seeing the image)
- **GOOD:** "What color car is parked next to the red brick building?" (specific, clear answer)
- **GOOD:** "How many yellow tennis balls are visible on the wooden court?" (requires counting + color)
- **GOOD:** "What is the person in blue using to interact with the television?" (proper object interaction)
- **GOOD:** "Where is this image taken?" (scene understanding)
- **GOOD:** "Where is this scene happening?" (scene understanding)

1134
 1135
 1136
 1137
 1138
 1139
 1140
 1141
 1142
 1143
 1144
 1145
 1146
 1147
 1148
 1149
 1150
 1151
 1152
 1153
 1154
 1155
 1156
 1157
 1158
 1159
 1160
 1161
 1162
 1163
 1164
 1165
 1166
 1167
 1168
 1169
 1170
 1171
 1172
 1173
 1174
 1175
 1176
 1177
 1178
 1179
 1180
 1181
 1182
 1183
 1184
 1185
 1186
 1187

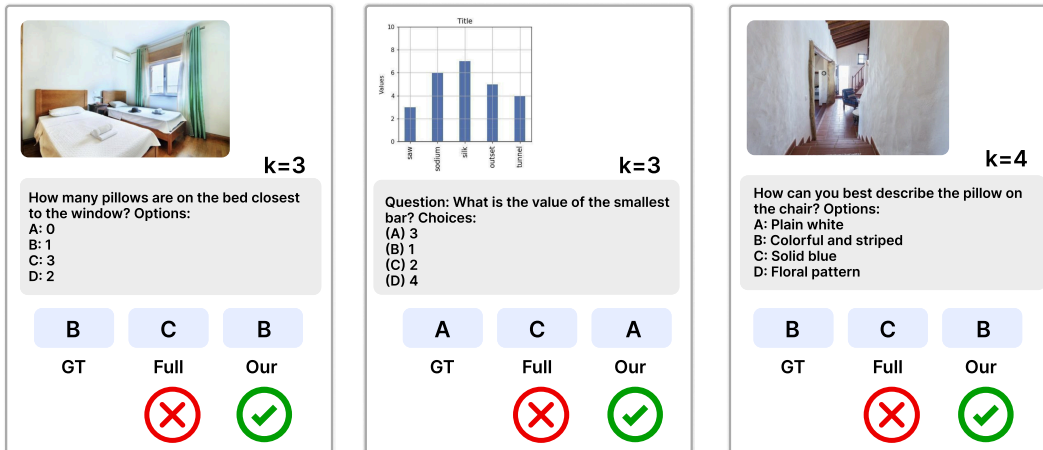


Figure 11: **Qualitative comparison of model outputs.** Examples showing responses from our compositionally-tuned COMPACT model and LLaVA-665K (Liu et al., 2024b) VIT model on complex queries that require multiple capabilities ($k \geq 3$). Our model demonstrates better integration of visual capabilities which leads to more accurate responses.

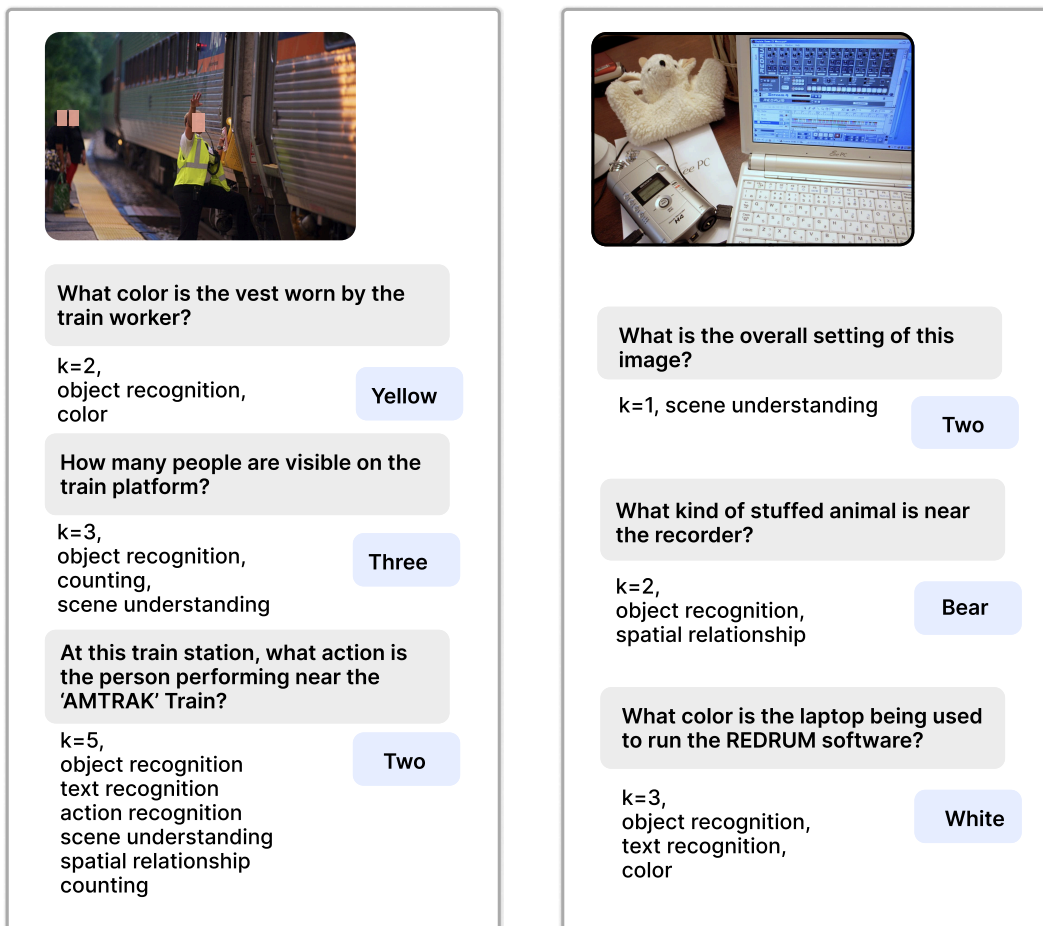


Figure 12: **Visualization of COMPACT compositional tuning samples.**

1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241



	
<p>What is positioned next to the punch dispenser?</p>	<p>What time of day does the lighting suggest?</p>
<p>k=2, object recognition, spatial relationship</p>	<p>k=1, scene understanding</p>
<p>Vase</p>	<p>Sunset</p>
<p>What color liquid is being dispensed from the beverage dispenser?</p>	<p>What vehicle is the person riding?</p>
<p>k=2, action recognition, color</p>	<p>k=2, object recognition, object interaction</p>
<p>Red</p>	<p>Motorcycle</p>
<p>What action is depicted on the sign behind the vase?</p>	<p>What color is the motorcycle parked on the city street?</p>
<p>k=5, object recognition, text recognition, action recognition, scene understanding, spatial relationship</p>	<p>k=3, color, object_recognition, scene_understanding</p>
<p>Hockey</p>	<p>Red</p>

Figure 13: Visualization of COMPACT compositional tuning samples.