

LEARNING REASONING PATHS OVER SEMANTIC GRAPHS FOR VIDEO-GROUNDED DIALOGUES

Hung Le^{†‡}, Nancy F. Chen[†], Steven C.H. Hoi^{†§}

[†] Singapore Management University
 hungle.2018@smu.edu.sg

[‡] A*STAR, Institute for Infocomm Research
 nfychen@i2r.a-star.edu.sg

[§] Salesforce Research Asia
 shoi@salesforce.com

ABSTRACT

Compared to traditional visual question answering, video-grounded dialogues require additional reasoning over dialogue context to answer questions in a multi-turn setting. Previous approaches to video-grounded dialogues mostly use dialogue context as a simple text input without modelling the inherent information flows at the turn level. In this paper, we propose a novel framework of Reasoning Paths in Dialogue Context (PDC). PDC model discovers information flows among dialogue turns through a semantic graph constructed based on lexical components in each question and answer. PDC model then learns to predict reasoning paths over this semantic graph. Our path prediction model predicts a path from the current turn through past dialogue turns that contain additional visual cues to answer the current question. Our reasoning model sequentially processes both visual and textual information through this reasoning path and the propagated features are used to generate the answer. Our experimental results demonstrate the effectiveness of our method and provide additional insights on how models use semantic dependencies in a dialogue context to retrieve visual cues.

1 INTRODUCTION

Traditional visual question answering (Antol et al., 2015; Jang et al., 2017) involves answering questions about a given image. Extending from this line of research, recently Das et al. (2017); Alamri et al. (2019) add another level of complexity by positioning each question and answer pair in a multi-turn or conversational setting (See Figure 1 for an example). This line of research has promising applications to improve virtual intelligent assistants in multi-modal scenarios (e.g. assistants for people with visual impairment). Most state-of-the-part approaches in this line of research (Kang et al., 2019; Schwartz et al., 2019b; Le et al., 2019) tackle the additional complexity in the multi-turn setting by learning to process dialogue context sequentially turn by turn. Despite the success of these approaches, they often fail to exploit the dependencies between dialogue turns of long distance, e.g. the 2nd and 5th turns in Figure 1. In long dialogues, this shortcoming becomes more obvious and necessitates an approach for learning long-distance dependencies between dialogue turns.

To reason over dialogue context with long-distance dependencies, recent research in dialogues discovers graph-based structures at the turn level to predict the speaker’s emotion (Ghosal et al., 2019) or generate sequential questions semi-autoregressively (Chai & Wan, 2020). Recently Zheng et al. (2019) incorporate graph neural models to connect the textual cues between all pairs of dialogue turns. These methods, however, involve a fixed graphical structure of dialogue turns, in which only a small number of nodes contains lexical overlap with the question of the current turn, e.g. the 1st, 3rd, and 5th turns in Figure 1. These methods also fail to factor in the temporality of dialogue turns as the graph structures do not guarantee the sequential ordering among turns. In this paper, we propose a novel framework of Reasoning Paths in Dialogue Context (PDC). PDC model learns a reasoning path that traverses through dialogue turns to propagate contextual cues that are densely related to the semantics of the current questions. Our approach balances between a sequential and graphical process to exploit dialogue information.

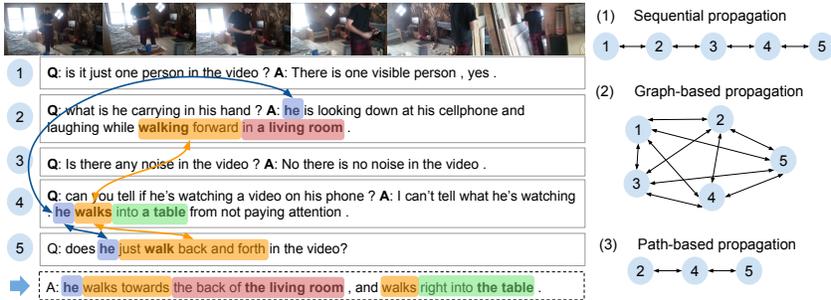


Figure 1: Sequential reasoning approaches fail to detect long-distance dependencies between the current turn and the 2nd turn. Graph-based reasoning approaches signals from all turns are directly forwarded to the current turn but the 1st and 3rd contain little lexical overlap to the current question.

Our work is related to the long-studied research domain of discourse structures, e.g. (Barzilay & Lapata, 2008; Feng & Hirst, 2011; Tan et al., 2016; Habernal & Gurevych, 2017). A form of discourse structure is argument structures, including premises and claims and their relations. Argument structures have been studied to assess different characteristics in text, such as coherence, persuasiveness, and susceptibility to attack. However, most efforts are designed for discourse study in monologues and much less attention is directed towards conversational data. In this work, we investigate a form of discourse structure through semantic graphs built upon the overlap of component representations among dialogue turns. We further enhance the models with a reasoning path learning model to learn the best information path for the next utterance generation.

To learn a reasoning path, we incorporate our method with *bridge entities*, a concept often seen in reading comprehension research, and earlier used in entity-based discourse analysis (Barzilay & Lapata, 2008). In reading comprehension problems, bridge entities denote entities that are common between two knowledge bases e.g. Wikipedia paragraphs in HotpotQA (Yang et al., 2018b). In discourse analysis, entities and their locations in text are used to learn linguistic patterns that indicate certain qualities of a document. In our method, we first reconstruct each dialogue turn (including question and answer) into a set of component *sub-nodes* (e.g. entities, action phrases) using common syntactical dependency parsers. Each result dialogue turn contains sub-nodes that can be used as bridge entities. Our reasoning path learning approach contains 2 phases: (1) first, at each dialogue turn, a graph network is constructed at the turn level. Any two turns are connected if they have an overlapping sub-node or if two of their sub-nodes are semantically similar. (2) secondly, a path generator is trained to predict a path from the current dialogue turn to past dialogue turns that provide additional and relevant cues to answer the current question. The predicted path is used as a skeleton layout to propagate visual features through each step of the path.

Specifically, in PDC, we adopt non-parameterized approaches (e.g. cosine similarity) to construct the edges in graph networks and each sub-node is represented by pre-trained word embedding vectors. Our path generator is a transformer decoder that regressively generates the next turn index conditioned on the previously generated turn sequence. Our reasoning model is a combination of a vanilla graph convolutional network (Kipf & Welling, 2017) and transformer encoder (Vaswani et al., 2017). In each traversing step, we retrieve visual features conditioned by the corresponding dialogue turn and propagate the features to the next step. Finally, the propagated multimodal features are used as input to a transformer decoder to predict the answer.

Our experimental results show that our method can improve the results on the Audio-Visual Scene-Aware Dialogues (AVSD) generation settings (Alamri et al., 2019), outperform previous state-of-the-art methods. We evaluate our approach through comprehensive ablation analysis and qualitative study. PDC model also provides additional insights on how the inherent contextual cues in dialogue context are learned in neural networks in the form of a reasoning path.

2 RELATED WORK

Discourses in monologues. Related to our work is the research of discourse structures. A long-studied line of research in this domain focuses on argument mining to identify the structure of argument, claims and premises, and relations between them (Feng & Hirst, 2011; Stab & Gurevych, 2014; Peldszus & Stede, 2015; Persing & Ng, 2016; Habernal & Gurevych, 2017). More recently,

Ghosh et al. (2016); Duthie & Budzynska (2018); Jiang et al. (2019) propose to learn argument structures in student essays and official debates. In earlier approaches, Barzilay & Lapata (2008); Lin et al. (2011); Feng et al. (2014) study discourses to derive coherence assessment methods through entity-based representations of text. These approaches are proposed from linguistic theories surrounding entity patterns in discourses, i.e. how they are introduced and discussed (Grosz et al., 1995). Guinaudeau & Strube (2013); Putra & Tokunaga (2017) extend prior work with graphical structures in which sentence similarity is calculated based on semantic vectors representing those sentences. These lines of research show that studying discourse structures is useful in many tasks, such as document ranking and discrimination. However, most of these approaches are designed for monologues rather than dialogues.

Discourses in dialogues. More related to our problem setting is discourse research on text in a multi-turn setting. Murakami & Raymond (2010); Boltužić & Šnajder (2014); Swanson et al. (2015); Tan et al. (2016); Niculae et al. (2017); Morio & Fujita (2018); Chakrabarty et al. (2019) introduce new corpus and different methods to mine arguments in online discussion forums. Their models are trained to extract claims and premises in each user post and identify their relations between argument components in each pair of user posts. More recently, Li et al. (2020a); Jo et al. (2020) extend argument mining in online threads to identify attackability and persuasiveness in online posts.

In this work, we address the problem of video-grounded dialogue, in which dialogue turns are often semantically connected by a common grounding information source, a video. In this task, a discourse-based approach enables dialogue models to learn to anticipate the upcoming textual information in future dialogue turns. However, directly applying prior work on discourse or argument structures into video-grounded dialogues is not straightforward due to the inherent difference between online discussion posts and video-grounded dialogues. In video-grounded dialogues, the language is often closer to spoken language and there are fewer clear argument structures to be learned. Moreover, the presence of video necessitates the interaction between multiple modalities, text and vision. Incorporating traditional discourse structures to model cross-modality interaction is not straightforward. In this work, we propose to model dialogue context by using compositional graphical structures and constructing information traversal paths through dialogue turns.

Graph-based dialogue models. Related to our work is research study that investigates different types of graph structures in dialogue. Hu et al. (2019); Shi & Huang (2019); Zhu et al. (2020) address the “reply_to” relationship among multi-party dialogues through graph networks that incorporate conversational flows in comment threads on social networks, e.g. Reddit and Ubuntu IRC, and online games. Zheng et al. (2019) propose a fully connected graph structure at the turn level for visual dialogues. Concurrently, Ghosal et al. (2019) also propose a fully connected graph structure with heterogeneous edges to detect the emotion of participating speakers. All of these methods discover graph structures connecting pairs of dialogue turns of little lexical overlap, resulting in sub-optimal feature propagation. This drawback becomes more significant in question answering problems in multi-turn settings. Our approach constructs graph networks based on compositional similarities.

Reasoning path learning. Our method is also motivated by the recent research of machine reading comprehension, e.g. WikiHop (Welbl et al., 2018) and HotpotQA (Yang et al., 2018a). De Cao et al. (2019); Qiu et al. (2019) construct graph networks of supporting documents with entity nodes that are connected based on different kinds of relationships. Tu et al. (2019); Tang et al. (2020) enhance these methods with additional edges connecting output candidates and documents. Extended from these methods are path-based approaches that learn to predict a reasoning path through supporting documents. Kundu et al. (2019); Asai et al. (2020) score and rank path candidates that connect entities in question to the target answer. A common strategy among these methods is the use of *bridge entities*. However, unlike reading comprehension, dialogues are normally not entity-centric and it is not trivial to directly adopt bridge entities into dialogue context.

Cross-modality feature learning. Our work is related to study that integrates visual and linguistic information representation. A line of research in this domain is the problem of visual QA, e.g. (Minh Le et al., 2020; Gao et al., 2019). Closer to our method are methods that adopt compositionality in textual features. Specifically, Socher et al. (2014) introduce image and language representation learning by detecting the component lexical parts in sentences and combining them with image features. The main difference between these approaches and our work is the study of cross-modalities in a multi-turn setting. Our approach directly tackles the embedded sequential order in dialogue utterances and examines how cross-modality features are passed from turn to turn.

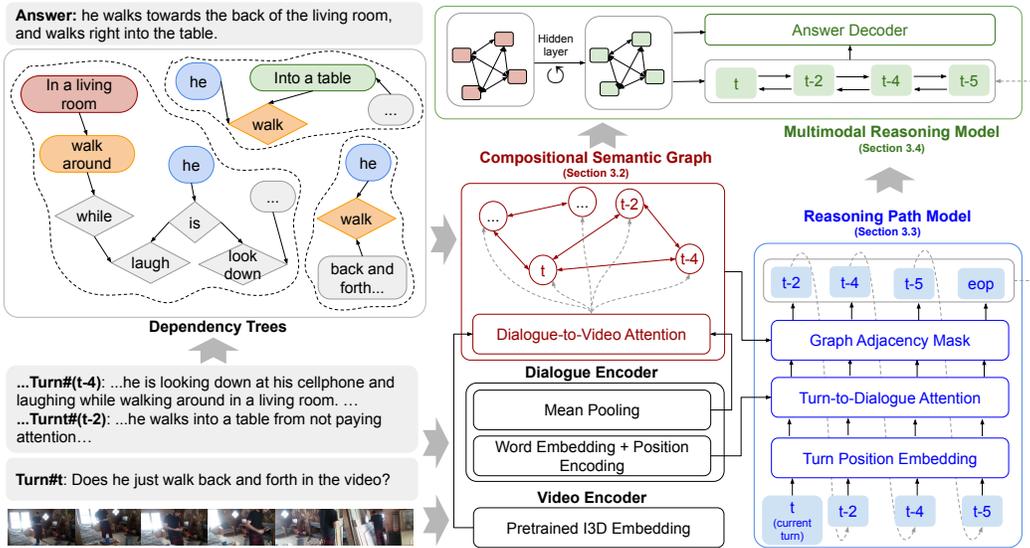


Figure 2: An overview of our PDC method.

3 METHOD

To describe our PDC model, we introduce a new graph-based method (Section 3.2) that constructs a graph structure to connect turn-level representations in dialogue context based on their compositional semantics. The compositional semantics consists of sub-nodes detected through syntactical dependency parsing methods. We enhance our approach with a path-based propagation method (Section 3.3) to narrow down the contextual information that facilitates question answering of the current turn. Our approach integrates a strong strategy to model dialogue flows in the form of graphical and path-based information such that contextual linguistic information is exploited to propagate relevant visual features (Section 3.4). Figure 2 demonstrates an overview of our method.

3.1 PROBLEM DEFINITION

The inputs to a question answering problem in a multi-turn setting consist of a dialogue \mathcal{D} and the visual input of a video \mathcal{I} . Each dialogue contains a sequence of dialogue turns, each of which is a pair of question \mathcal{Q} and answer \mathcal{A} . At each dialogue turn t , we denote the dialogue context \mathcal{C}_t as all previous dialogue turns $\mathcal{C}_t = \{(\mathcal{Q}_i, \mathcal{A}_i)\}_{i=1}^{t-1}$. Since it is positioned in a dialogue, the question of turn t \mathcal{Q}_t might be dependent on a subset of the dialogue context \mathcal{C}_t . The output is the answer of the current turn $\hat{\mathcal{A}}_t$. Each textual component, i.e. \mathcal{Q} and \mathcal{A} , is represented as a sequence of token or word indices $\{w_m\}_{m=1}^L \in \mathbb{V}$, where L is the sequence length and \mathbb{V} is the vocabulary set. The objective of the task is the generation objective that output answers of the current turn:

$$\hat{\mathcal{A}}_t = \arg \max_{\mathcal{A}_t} P(\mathcal{A}_t | \mathcal{I}, \mathcal{C}_t, \mathcal{Q}_t; \theta) = \arg \max_{\mathcal{A}_t} \prod_{m=1}^{L_{\mathcal{A}}} P_m(w_m | \mathcal{A}_{t,1:m-1}, \mathcal{I}, \mathcal{C}_t, \mathcal{Q}_t; \theta) \quad (1)$$

3.2 COMPOSITIONAL SEMANTIC GRAPH OF DIALOGUE CONTEXT

The semantic relations between dialogue turns are decomposed to semantic relations between sub-nodes that constitute each turn. These composition relations serve as strong clues to determine how a dialogue turn is related to another. We first employ a co-reference resolution system, e.g. (Clark & Manning, 2016), to replace pronouns with the original entities. We then explore using the Stanford parser system¹ to discover sub-nodes. The parser decomposes each sentence into grammatical components, where a word and its modifier are connected in a tree structure. For each dialogue turn, we concatenate the question and answer of that turn as input to the parser. The output dependency tree is pruned to remove unimportant constituents and merge adjacent nodes to form a semantic unit.

¹v3.9.2 retrieved at <https://nlp.stanford.edu/software/lex-parser.shtml>

A graph structure \mathcal{G} is then constructed. Any two turns are connected if one of their corresponding sub-nodes are semantically similar. To calculate the similarity score, we obtain their pre-trained word2vec embeddings² and compute the cosine similarity score. Algorithm 1 provides the details of the procedure to automatically construct a semantic graph. Note that our approach can also be applied with other co-reference resolution systems, parser, or pre-trained embeddings. Unlike graph structures in machine reading comprehension such as Wikipedia graph, the semantic graph \mathcal{G} is not fixed throughout the sample population but is constructed for each dialogue and at each turn.

Algorithm 1: Compositional semantic graph of dialogue context

Data: Dialogue context \mathcal{C}_t , question of the current turn \mathcal{Q}_t
Result: Semantic graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$

```

1 begin
2    $\mathcal{T} \leftarrow \emptyset; \mathcal{G} = \{\mathcal{V}, \mathcal{E}\}; \mathcal{E} \leftarrow \emptyset; \mathcal{V} \leftarrow \emptyset; \mathcal{S} \leftarrow \emptyset;$ 
3    $\mathcal{H} \leftarrow \text{Coreference\_Resolution}([\mathcal{C}_t; \mathcal{Q}_t]);$ 
4   for each dialogue turn  $h \in \mathcal{H}$  do
5      $T_h \leftarrow \text{Merge\_Nodes}(\text{Prune\_Tree}(\text{Dependency\_Parse}(h))); \mathcal{T} \leftarrow \mathcal{T} \cup \{T_h\};$ 
6      $\mathcal{V} \leftarrow \mathcal{V} \cup \{h\}; \mathcal{E} \leftarrow \mathcal{E} \cup \{\langle \text{Turn\_Position}(h), \text{Turn\_Position}(h) \rangle\}$ 
7   for each dependency tree  $T = (V_T, E_T) \in \mathcal{T}$  do  $\mathcal{S} \leftarrow \mathcal{S} \cup \{V_T\}$ 
8   for each sub-node  $s_i \in \mathcal{S}$  do
9     for each sub-node  $s_j \in \mathcal{S}$  do
10      if not  $\text{In\_Same\_Turn}(s_i, s_j)$  and  $\text{Is\_Similar}(s_i, s_j)$  then
11         $\mathcal{E} \leftarrow \mathcal{E} \cup \{\langle \text{Get\_Dial\_Turn}(s_i), \text{Get\_Dial\_Turn}(s_j) \rangle\}$ 
12         $\mathcal{E} \leftarrow \mathcal{E} \cup \{\langle \text{Get\_Dial\_Turn}(s_j), \text{Get\_Dial\_Turn}(s_i) \rangle\}$ 
13 return  $\mathcal{G}$ 

```

3.3 LEARNING TO GENERATE REASONING PATHS

Our proposed compositional approach to construct a semantic graph in dialogue context ensures lexical overlaps with the question, but the graph structure does not guarantee the temporal order of dialogue turns. To ensure this sequential information is maintained, we train a generator to predict reasoning paths that traverse through current dialogue turn to past dialogue turns.

We use a Transformer decoder to model the reasoning paths from the current turn t . The first position of the path, z_0 is initialized with the turn-level position embedding of t . The next turn index is generated auto-regressively by conditioning on the previously generated path sequence:

$$z_0 = \text{Embed}(t) \in \mathbb{R}^d \quad (2)$$

$$Z_{0:m-1} = \text{Embed}([t; \hat{r}_1, \dots, \hat{r}_{m-1}]) \quad (3)$$

where \hat{r}_i denotes a predicted dialogue turn index. The dialogue context and question of the current turn are represented by embedding vectors of their component tokens. Following Vaswani et al. (2017), their representations are enhanced with the sine-cosine positional encoding PosEncode.

$$Q_t = \text{Embed}(\mathcal{Q}_t) + \text{PosEncode}(\mathcal{Q}_t) \in \mathbb{R}^{L_{Q_t} \times d} \quad (4)$$

$$C_t = \text{Embed}(\mathcal{C}_t) + \text{PosEncode}(\mathcal{C}_t) \in \mathbb{R}^{L_{C_t} \times d} \quad (5)$$

Note that the dialogue context representation C_t is the embedding of dialogue turns up to the last turn $t - 1$, excluding answer embedding of the current turn A_t .

We denote a Transformer attention block as Transformer(query, key, value). The path generator incorporates contextual information through attention layers on dialogue context and question.

$$D_{\text{path}}^{(1)} = \text{Transformer}(Z_{0:m-1}, Z_{0:m-1}, Z_{0:m-1}) \in \mathbb{R}^{m \times d} \quad (6)$$

$$D_{\text{path}}^{(2)} = \text{Transformer}(D_{\text{path}}^{(1)}, Q_t, Q_t) \in \mathbb{R}^{m \times d} \quad (7)$$

$$D_{\text{path}}^{(3)} = \text{Transformer}(D_{\text{path}}^{(2)}, C_t, C_t) \in \mathbb{R}^{m \times d} \quad (8)$$

²<https://code.google.com/archive/p/word2vec/>

At the m -th decoding step ($m \geq 1$), our model selects the next dialogue turn among the set of dialogue turns that are adjacent to one at $(m - 1)$ -th decoding step in the semantic graph. This is enforced through masking the softmax output scores in which non-adjacent turn indices are assigned to a very low scalar s_{masked} . We denote the adjacency matrix of semantic graph $\mathcal{G} = (\mathcal{V}, \mathcal{E})$ as a square matrix A of size $|\mathcal{V}| \times |\mathcal{V}|$ where $A_{i,j} = 1$ if $\langle i, j \rangle \in \mathcal{E}$ and $A_{i,i} = 1 \forall i = 1, \dots, |\mathcal{V}|$. The probability of decoded turns at the m -th decoding step is:

$$P_m = \text{softmax}(D_{\text{path},m}^{(3)} W_{\text{path}}) \in \mathbb{R}^{|\mathcal{V}|}, \quad P_{m,i} = s_{\text{masked}} \forall i | A_{\hat{r}_{m-1},i} = 0 \quad (9)$$

where $W_{\text{path}} \in \mathbb{R}^{d \times |\mathcal{V}|}$. The decoding process is terminated when the next decoded token is an $[EOP]$ (end-of-path) token. During inference time, we adopt a greedy decoding approach. Due to the small size of \mathcal{V} , we found that a greedy approach can perform as well as beam search methods. The computational cost of generating reasoning paths in dialogue context is, thus, only dependent on the average path length, which is bounded by the maximum number of dialogue turns.

Data Augmentation. We train our path generator in a supervision manner. At each dialogue turn t with a semantic graph \mathcal{G} , we use a graph traversal method, e.g. BFS, to find all paths that start from the current turn to any past turn. We maintain the ground-truth paths with dialogue temporal order by keeping the dialogue turn index in path position m lower than the turn index in path position $m - 1$. We also narrow down ground-truth paths based on their total lexical overlaps with the expected output answers. Using the dialogue in Figure 1 as an example, using BFS results in three potential path candidates: $5 \rightarrow 4$, $5 \rightarrow 2$, and $5 \rightarrow 4 \rightarrow 2$. We select $5 \rightarrow 4 \rightarrow 2$ as the ground-truth path because it can cover the most sub-nodes in the expected answers. If two paths have the same number of lexical overlaps, we select one with a shorter length. If two paths are equivalent, we randomly sample one path following uniform distribution at each training step. Ground-truth reasoning paths are added with $[EOP]$ token at the final position for termination condition. The objective to train the path generator is the generation objective of reasoning path at each dialogue turn:

$$\hat{\mathcal{R}}_t = \arg \max_{\mathcal{R}_t} P(\mathcal{R}_t | \mathcal{C}_t, \mathcal{Q}_t; \phi) = \arg \max_{\mathcal{R}_t} \prod_{m=1}^{L_{\text{path}}} P_m(r_m | \mathcal{R}_{t,1:m-1}, \mathcal{C}_t, \mathcal{Q}_t; \phi) \quad (10)$$

3.4 MULTIMODAL REASONING FROM REASONING PATHS

The graph structure \mathcal{G} and generated path $\hat{\mathcal{R}}_t$ are used as layout to propagate features of both textual and visual inputs. For each dialogue turn from \mathcal{V} , we obtain the corresponding embeddings and apply mean pooling to get a vector representation. We denote the turn-level representations of \mathcal{V} as $V \in \mathbb{R}^{d \times |\mathcal{V}|}$. We use attention to retrieve the turn-dependent visual features from visual input.

$$M = \text{Transformer}(V, I, I) \in \mathbb{R}^{d \times |\mathcal{V}|} \quad (11)$$

where I is a two-dimensional feature representation of visual input \mathcal{I} . We define a new multimodal graph based on semantic graph \mathcal{G} : $G_{\text{mm}} = (\mathcal{V}_{\text{mm}}, \mathcal{E}_{\text{mm}})$ where $\mathcal{V}_{\text{mm}} = M$ and edges $\langle m_i, m_j \rangle \in \mathcal{E}_{\text{mm}} \forall i, j | \langle i, j \rangle \in \mathcal{E}$. We employ a vanilla graph convolution network (Kipf & Welling, 2017) to update turn-level multimodal representations through message passing along all edges.

$$e_k = \frac{1}{|\Omega_k|} \sum_{m_j \in \Omega_k} f(m_k, m_j), \quad e = \frac{1}{|\mathcal{V}|} \sum_k e_k, \quad \tilde{m}_k = g(m_k, e_k, e) \quad (12)$$

where Ω_k is the set of adjacent nodes of m_k and $f(\cdot)$ and $g(\cdot)$ are non-linear layers, e.g. MLP and their inputs are just simply concatenated. To propagate features along a reasoning path $\hat{\mathcal{R}}_t$, we utilize the updated turn-level multimodal representations $\tilde{M} \in |\mathcal{V}|$ and traverse the path sequentially through the representation of the corresponding turn index r_m in each traversing step. Specifically, We obtain $G = \{\tilde{m}_{\hat{r}_0}, \tilde{m}_{\hat{r}_1} \dots\} \in \mathbb{R}^{L_{\text{path}} \times d}$. The traversing process can be done through a recurrent network or a transformer encoder.

$$\tilde{G} = \text{Transformer}(G, G, G) \in \mathbb{R}^{L_{\text{path}} \times d} \quad (13)$$

To incorporate propagated features into the target response, we adopt a state-of-the-art decoder model from (Le et al., 2019) that exploits multimodal attention over contextual features. Specifically, We integrate both \tilde{M} and \tilde{G} at each response decoding step through two separate attention layers.

Models	B-1	B-2	B-3	B-4	M	R	C
Baseline (Hori et al., 2019)	0.621	0.480	0.379	0.305	0.217	0.481	0.733
TopicEmb (Kumar et al., 2019) [‡]	0.632	0.499	0.402	0.329	0.223	0.488	0.762
FGA (Schwartz et al., 2019b)	-	-	-	-	-	-	0.806
JMAN (Chu et al., 2020)	0.667	0.521	0.413	0.334	0.239	0.533	0.941
FA+HRED (Nguyen et al., 2019) [‡]	0.695	0.533	0.444	0.360	0.249	0.544	0.997
MTN (Le et al., 2019)	0.715	0.581	0.476	0.392	0.269	0.559	1.066
VideoSum (Sanabria et al., 2019) [†]	0.718	0.584	0.478	0.394	0.267	0.563	1.094
MSTN (Lee et al., 2020) [‡]	-	-	-	0.377	0.275	0.566	1.115
Student-Teacher (Hori et al., 2019) [‡]	0.727	0.593	0.488	0.405	0.273	0.566	1.118
PDC (Ours)	0.747	0.616	0.512	0.429	0.282	0.579	1.194
VideoSum (Sanabria et al., 2019) ^{†§}	0.723	0.586	0.476	0.387	0.266	0.564	1.087
VGD-GPT2 (Le & Hoi, 2020) ^{†§}	0.749	0.620	0.520	0.436	0.282	0.582	1.194
RLM (Li et al., 2020b) ^{‡§}	0.765	0.643	0.543	0.459	0.294	0.606	1.308
PDC (Ours) + GPT2[§]	0.770	0.653	0.539	0.449	0.292	0.606	1.295

Table 1: **AVSD@DSTC7 test results:** † uses visual features other than I3D, e.g. ResNeXt, scene graphs. ‡ incorporates additional video background audio inputs. § indicates finetuning methods on additional data or pre-trained language models. Metric notations: B-n: BLEU-n, M: METEOR, R: ROUGE-L, C: CIDEr.

Besides, we also experiment with integrating propagated features with decoder as Transformer language models. Transformer language models have shown impressive performance recently in generation tasks by transferring language representations pretrained in massive data (Radford et al., 2019). To integrate, we simply concatenate \tilde{M} and \tilde{G} to the input sequence embeddings as input to language models, similar as (Le & Hoi, 2020; Li et al., 2020b).

Optimization. The multimodal reasoning model is learned jointly with other model components. All model parameters are optimized through the objectives from both Equation 1 and 10. We use the standard cross-entropy loss which calculates the logarithm of each softmax score at each decoding position of $\hat{\mathcal{A}}_t$ and $\hat{\mathcal{R}}_t$.

4 EXPERIMENTS

Dataset. We use the Audio-Visual Sene-Aware Dialogue (AVSD) benchmark developed by Alamri et al. (2019). The benchmark focuses on dialogues grounded on videos from the Charades dataset (Sigurdsson et al., 2016). Each dialogue can have up to 10 dialogue turns, which makes it an appropriate choice to evaluate our approach of reasoning paths over dialogue context. We used the standard visual features I3D to represent the video input. We experimented with the test splits used in the 7th Dialogue System Technology Challenge (DSTC7) (Yoshino et al., 2019) and DSTC8 (Kim et al., 2019). Please see the Appendix A for our experimental setups.

	Train	Val	Test@DSTC7	Test@DSTC8
#Dialogs	7,659	1,787	1,710	1,710
#Questions/Answers	153,180	35,740	13,490	18,810
#Words	1,450,754	339,006	110,252	162,226

Table 2: Dataset Summary of the AVSD benchmark with both test splits @DSTC7 and @DSTC8.

Overall Results. The dialogues in the AVSD benchmark focuses on question answering over multiple turns and entail less semantic variance than open-domain dialogues. Therefore, we report the objective scores, including BLEU (Papineni et al., 2002), METEOR (Banerjee & Lavie, 2005), ROUGE-L (Lin, 2004), and CIDEr (Vedantam et al., 2015), which are found to have strong correlation with human subjective scores (Alamri et al., 2019). In Table 1 and 3, we present the test results of our models in comparison with previous models in DSTC7 and DSTC8 respectively. In both test splits, our models achieve very strong performance against models without using pre-trained language models. Comparing with models using pre-trained models and additional fine-tuning, our models achieve competitive performances in both test splits. The performance gain of our models when using GPT2 indicates current model sensitivity to language modelling as a generator. A unique benefit of our

Models	B-1	B-2	B-3	B-4	M	R	C
Baseline (Hori et al., 2019)	0.614	0.467	0.365	0.289	0.210	0.480	0.651
DMN (Xie & Iacobacci, 2020) [‡]	-	-	-	0.296	0.214	0.496	0.761
Simple (Schwartz et al., 2019a)	-	-	-	0.311	0.224	0.502	0.766
JMAN (Chu et al., 2020)	0.645	0.504	0.402	0.324	0.232	0.521	0.875
STSGR (Geng et al., 2020) [†]	-	-	-	0.357	0.267	0.553	1.004
MSTN (Lee et al., 2020) [‡]	-	-	-	0.385	0.270	0.564	1.073
PDC(Ours)	0.723	0.595	0.493	0.410	0.270	0.570	1.105
RLM (Li et al., 2020b) ^{‡§}	0.746	0.626	0.528	0.445	0.286	0.598	1.240
PDC (Ours) + GPT2[§]	0.749	0.629	0.528	0.439	0.285	0.592	1.201

Table 3: **AVSD@DSTC8 test results:** † uses visual features other than I3D, e.g. ResNeXt, scene graphs. ‡ incorporates additional video background audio inputs. § indicates finetuning methods on additional data or pre-trained language models. Metric notations: B-n: BLEU-n, M: METEOR, R: ROUGE-L, C: CIDEr.

Semantics	Direction	GraphProp	PathProp	B-1	B-2	B-3	B-4	M	R	C
Comp.	BiDirect	✓	✓	0.747	0.616	0.512	0.429	0.282	0.579	1.194
Comp.	BiDirect	✓		0.746	0.611	0.503	0.418	0.281	0.580	1.179
Comp.	TODirect	✓		0.748	0.613	0.505	0.420	0.279	0.579	1.181
Comp.	BiDirect		✓	0.745	0.611	0.504	0.419	0.282	0.577	1.172
Global	BiDirect	✓	✓	0.743	0.609	0.504	0.421	0.279	0.579	1.178
Global	BiDirect	✓		0.744	0.610	0.502	0.416	0.280	0.577	1.169
Global	TODirect	✓		0.743	0.609	0.501	0.416	0.279	0.579	1.161
Global	BiDirect		✓	0.749	0.613	0.505	0.421	0.279	0.578	1.172
Fully	BiDirect	✓		0.745	0.607	0.500	0.414	0.277	0.576	1.169
Fully	TODirect	✓		0.743	0.605	0.497	0.411	0.277	0.573	1.163

Table 4: **Ablation of AVSD@DSTC7 test results:** We experiment with graphs that are compositional semantics, global semantics, and fully-connected with bidirectional or temporally ordered edges, and with graph-based or path-based feature propagation. Metric notations: B-n: BLEU-n, M: METEOR, R: ROUGE-L, C: CIDEr.

models from prior approaches is the insights of how the models exploit information from dialogue turns in the form of reasoning paths (Please see example outputs in Figure 3).

Ablation Analysis. In Table 4 we report the results of path learning in a *global* semantic graph. In these graphs, we do not decompose each dialogue turn into component sub-nodes (line 5 in Algorithm 1) but directly compute the similarity score based on the whole sentence embedding. In this case, to train the path generator, we obtain the ground-truth path by using BFS to traverse to the node with the most sentence-level similarity score to the expected answer. We observe that: (1) models that learn paths based on component lexical overlaps results in better performance than paths based on global lexical overlaps in most of the objective metrics. (2) Propagation by reasoning path alone without using GCN does not result in better performance. This can be explained as the information in each traversal step is not independent but still contains semantic dependencies to other turns. It is different from standard reading comprehension problems where each knowledge base is independent and it is not required to propagate features through a graph structure to obtain contextual updates. Please see the Appendix B for additional analysis of Table 4.

Impacts of Reasoning Path Learning. We compare models that can learn reasoning paths against those that use a fixed propagation path through the past dialogue turns. From Table 5, we observe that: (1) learning dynamic instance-based reasoning paths outperforms all models that propagate through a default path. This is achieved by using the reasoning path as a skeleton for feature propagation as well as adopting the joint training strategy. We can consider dynamically learned paths as an ideal traversal path to propagate visual cues among all possible paths within the semantic graph of the dialogue context. (2) our path generator can generate reasoning paths well and the model with learned paths can perform as well as one using the oracle paths. (3) due to the short length of reasoning paths (limited by the maximum dialogue length), either beam search or greedy decoding approach is good enough to generate paths. The greedy approach has the advantage of much lower computational cost.

Qualitative Analysis. In Figure 3, we demonstrate some examples of our predicted responses and the corresponding reasoning paths. Specifically, we showcase samples in which the reasoning paths are 2-hops (Example A and B) and 3-hops (Example C and D), and the distance in each hop can be over one dialogue turn (Example B and D) or more (Example A and C). The example reasoning paths

Reasoning Path	B-1	B-2	B-3	B-4	M	R	C
Learned Path (beam search)	0.747	0.616	0.512	0.429	0.282	0.579	1.194
Learned Path (greedy)	0.747	0.616	0.512	0.430	0.282	0.580	1.195
Oracle Path	0.748	0.617	0.512	0.430	0.282	0.580	1.195
Random Path	0.552	0.437	0.345	0.274	0.194	0.420	0.684
Path through last 10 turns	0.744	0.607	0.500	0.415	0.278	0.576	1.166
Path through last 9 turns	0.743	0.607	0.500	0.416	0.277	0.574	1.161
Path through last 8 turns	0.749	0.615	0.509	0.423	0.277	0.578	1.168
Path through last 7 turns	0.754	0.618	0.510	0.422	0.282	0.579	1.170
Path through last 6 turns	0.746	0.608	0.498	0.412	0.278	0.575	1.150
Path through last 5 turns	0.744	0.607	0.500	0.415	0.278	0.576	1.169
Path through last 4 turns	0.745	0.610	0.502	0.417	0.278	0.576	1.165
Path through last 3 turns	0.744	0.607	0.500	0.414	0.278	0.576	1.163
Path through last 2 turns	0.748	0.615	0.508	0.423	0.278	0.579	1.171
Path through last 1 turns	0.740	0.603	0.494	0.408	0.276	0.575	1.149

Table 5: Comparison of AVSD@DSTC7 test results between learned paths and paths as sequences of the last n turns: We experiment with paths predicted by our path generator and paths as a sequence of the last n turns, i.e. $\{t, \dots, \max(0, t - n)\}$. Metric notations: B-n: BLEU-n, M: METEOR, R: ROUGE-L, C: CIDEr.

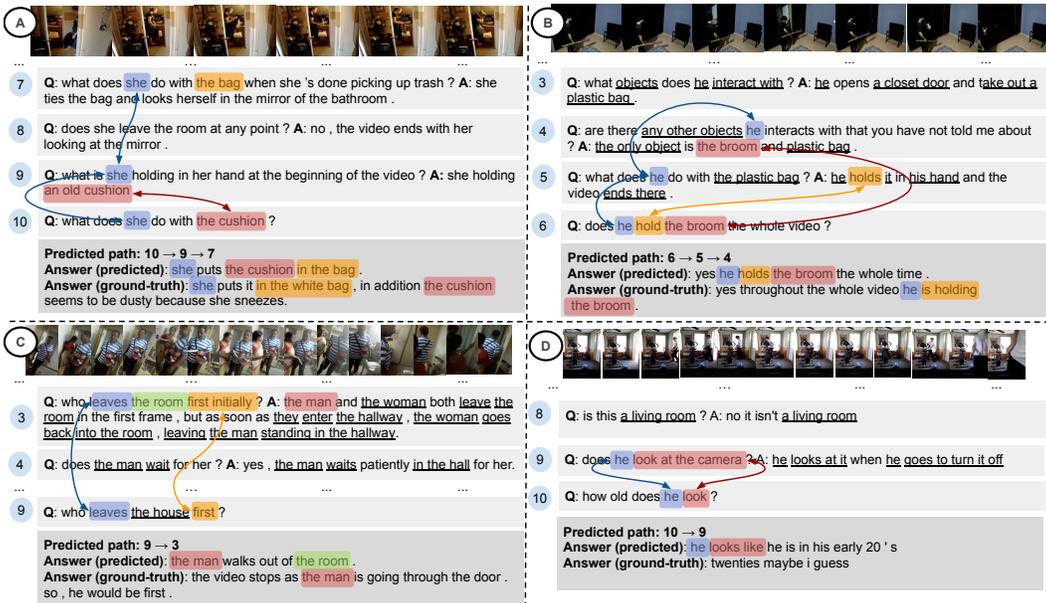


Figure 3: Example outputs of reasoning paths and dialogue responses. We demonstrate 4 cases of reasoning paths with 2 to 3 hops and with varied distances between two ends of the reasoning path.

show to be able to connect a sequence of dialogue turns that are most relevant to questions of the current turn. For instance, in Example A, the reasoning path can connect the 7th and 9th turn to the current turn as they contain lexical overlaps, i.e. “the bag”, and “the cushion”. The path skips the 8th turn which is not relevant to the current question. Likewise, in Example C, the path skips the 4 – 8th turns. All examples show that dialogue context can be used to extract additional visual clues relevant to the current turn. Information from dialogues, thus, deserves more attention than just being used as a background text input. Please see the Appendix C for additional analysis.

5 CONCLUSION

We proposed PDC, a novel approach to learning a reasoning path over dialogue turns for video-grounded dialogues. Our approach exploits the compositional semantics in each dialogue turn to construct a semantic graph, which is then used to derive an optimal path for feature propagation. Our experiments demonstrate that our model can learn to retrieve paths that are most relevant to the current question. We hope our approach can motivate further study to investigate reasoning over multiple turns, especially in complex settings with interconnected dialogue flows (Sun et al., 2019).

ACKNOWLEDGMENTS

We thank all reviewers for their insightful feedback on the manuscript of this paper. The first author of this paper is supported by the Agency for Science, Technology and Research (A*STAR) Computing and Information Science scholarship.

REFERENCES

- Huda Alamri, Vincent Cartillier, Abhishek Das, Jue Wang, Stefan Lee, Peter Anderson, Irfan Essa, Devi Parikh, Dhruv Batra, Anoop Cherian, Tim K. Marks, and Chiori Hori. Audio-visual scene-aware dialog. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2019.
- Stanislaw Antol, Aishwarya Agrawal, Jiasen Lu, Margaret Mitchell, Dhruv Batra, C Lawrence Zitnick, and Devi Parikh. Vqa: Visual question answering. In *Proceedings of the IEEE international conference on computer vision*, pp. 2425–2433, 2015.
- Akari Asai, Kazuma Hashimoto, Hannaneh Hajishirzi, Richard Socher, and Caiming Xiong. Learning to retrieve reasoning paths over wikipedia graph for question answering. In *International Conference on Learning Representations*, 2020. URL <https://openreview.net/forum?id=SJgVHkrYDH>.
- Satanjeev Banerjee and Alon Lavie. Meteor: An automatic metric for mt evaluation with improved correlation with human judgments. In *Proceedings of the acl workshop on intrinsic and extrinsic evaluation measures for machine translation and/or summarization*, pp. 65–72, 2005.
- Regina Barzilay and Mirella Lapata. Modeling local coherence: An entity-based approach. *Computational Linguistics*, 34(1):1–34, 2008. doi: 10.1162/coli.2008.34.1.1. URL <https://doi.org/10.1162/coli.2008.34.1.1>.
- Filip Boltužić and Jan Šnajder. Back up your stance: Recognizing arguments in online discussions. In *Proceedings of the First Workshop on Argumentation Mining*, pp. 49–58, 2014.
- Zi Chai and Xiaojun Wan. Learning to ask more: Semi-autoregressive sequential question generation under dual-graph interaction. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 225–237, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.21. URL <https://www.aclweb.org/anthology/2020.acl-main.21>.
- Tuhin Chakrabarty, Christopher Hidey, Smaranda Muresan, Kathy McKeown, and Alyssa Hwang. AMPERSAND: argument mining for persuasive online discussions. In Kentaro Inui, Jing Jiang, Vincent Ng, and Xiaojun Wan (eds.), *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing, EMNLP-IJCNLP 2019, Hong Kong, China, November 3-7, 2019*, pp. 2933–2943. Association for Computational Linguistics, 2019. doi: 10.18653/v1/D19-1291. URL <https://doi.org/10.18653/v1/D19-1291>.
- Yun-Wei Chu, Kuan-Yen Lin, Chao-Chun Hsu, and Lun-Wei Ku. Multi-step joint-modality attention network for scene-aware dialogue system. *DSTC Workshop @ AAI*, 2020.
- Kevin Clark and Christopher D. Manning. Deep reinforcement learning for mention-ranking coreference models. In *Proceedings of the 2016 Conference on Empirical Methods in Natural Language Processing*, pp. 2256–2262, Austin, Texas, November 2016. Association for Computational Linguistics. doi: 10.18653/v1/D16-1245. URL <https://www.aclweb.org/anthology/D16-1245>.
- Abhishek Das, Satwik Kottur, Khushi Gupta, Avi Singh, Deshraj Yadav, José MF Moura, Devi Parikh, and Dhruv Batra. Visual dialog. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 326–335, 2017.

- Nicola De Cao, Wilker Aziz, and Ivan Titov. Question answering by reasoning across documents with graph convolutional networks. In *Proceedings of the 2019 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies, Volume 1 (Long and Short Papers)*, pp. 2306–2317, Minneapolis, Minnesota, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/N19-1240. URL <https://www.aclweb.org/anthology/N19-1240>.
- Ming Ding, Chang Zhou, Qibin Chen, Hongxia Yang, and Jie Tang. Cognitive graph for multi-hop reading comprehension at scale. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 2694–2703, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1259. URL <https://www.aclweb.org/anthology/P19-1259>.
- Rory Duthie and Katarzyna Budzynska. A deep modular rnn approach for ethos mining. In *Proceedings of the Twenty-Seventh International Joint Conference on Artificial Intelligence, IJCAI-18*, pp. 4041–4047. International Joint Conferences on Artificial Intelligence Organization, 7 2018. doi: 10.24963/ijcai.2018/562. URL <https://doi.org/10.24963/ijcai.2018/562>.
- Vanessa Wei Feng and Graeme Hirst. Classifying arguments by scheme. In *Proceedings of the 49th annual meeting of the association for computational linguistics: Human language technologies*, pp. 987–996, 2011.
- Vanessa Wei Feng, Ziheng Lin, and Graeme Hirst. The impact of deep hierarchical discourse structures in the evaluation of text coherence. In *Proceedings of COLING 2014, the 25th International Conference on Computational Linguistics: Technical Papers*, pp. 940–949, 2014.
- Peng Gao, Zhengkai Jiang, Haoxuan You, Pan Lu, Steven CH Hoi, Xiaogang Wang, and Hongsheng Li. Dynamic fusion with intra-and inter-modality attention flow for visual question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 6639–6648, 2019.
- Shijie Geng, Peng Gao, Chiori Hori, Jonathan Le Roux, and Anoop Cherian. Spatio-temporal scene graphs for video dialog. *arXiv preprint arXiv:2007.03848*, 2020.
- Deepanway Ghosal, Navonil Majumder, Soujanya Poria, Niyati Chhaya, and Alexander Gelbukh. DialogueGCN: A graph convolutional neural network for emotion recognition in conversation. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 154–164, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1015. URL <https://www.aclweb.org/anthology/D19-1015>.
- Debanjan Ghosh, Aquila Khanam, Yubo Han, and Smaranda Muresan. Coarse-grained argumentation features for scoring persuasive essays. In *Proceedings of the 54th Annual Meeting of the Association for Computational Linguistics (Volume 2: Short Papers)*, pp. 549–554, Berlin, Germany, August 2016. Association for Computational Linguistics. doi: 10.18653/v1/P16-2089. URL <https://www.aclweb.org/anthology/P16-2089>.
- Xavier Glorot and Yoshua Bengio. Understanding the difficulty of training deep feedforward neural networks. In *Proceedings of the thirteenth international conference on artificial intelligence and statistics*, pp. 249–256, 2010.
- Barbara J. Grosz, Scott Weinstein, and Aravind K. Joshi. Centering: A framework for modeling the local coherence of discourse. *Comput. Linguist.*, 21(2):203–225, June 1995. ISSN 0891-2017.
- Camille Guinaudeau and Michael Strube. Graph-based local coherence modeling. In *Proceedings of the 51st Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 93–103, 2013.
- Ivan Habernal and Iryna Gurevych. Argumentation mining in user-generated web discourse. *Computational Linguistics*, 43(1):125–179, 2017.

- C. Hori, H. Alamri, J. Wang, G. Wichern, T. Hori, A. Cherian, T. K. Marks, V. Cartillier, R. G. Lopes, A. Das, I. Essa, D. Batra, and D. Parikh. End-to-end audio visual scene-aware dialog using multimodal attention-based video features. In *ICASSP 2019 - 2019 IEEE International Conference on Acoustics, Speech and Signal Processing (ICASSP)*, pp. 2352–2356, May 2019. doi: 10.1109/ICASSP.2019.8682583.
- Chiori Hori, Anoop Cherian, Tim K Marks, and Takaaki Hori. Joint student-teacher learning for audio-visual scene-aware dialog. *Proc. Interspeech 2019*, pp. 1886–1890, 2019.
- Wenpeng Hu, Zhangming Chan, Bing Liu, Dongyan Zhao, Jinwen Ma, and Rui Yan. Gsn: A graph-structured network for multi-party dialogues. In *Proceedings of the Twenty-Eighth International Joint Conference on Artificial Intelligence, IJCAI-19*, pp. 5010–5016. International Joint Conferences on Artificial Intelligence Organization, 7 2019. doi: 10.24963/ijcai.2019/696. URL <https://doi.org/10.24963/ijcai.2019/696>.
- Yunseok Jang, Yale Song, Youngjae Yu, Youngjin Kim, and Gunhee Kim. Tgif-qa: Toward spatio-temporal reasoning in visual question answering. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2758–2766, 2017.
- Shiyan Jiang, Kexin Yang, Chandrakumari Suvarna, Pooja Casula, Mingtong Zhang, and Carolyn Rosé. Applying Rhetorical Structure Theory to student essays for providing automated writing feedback. In *Proceedings of the Workshop on Discourse Relation Parsing and Treebanking 2019*, pp. 163–168, Minneapolis, MN, June 2019. Association for Computational Linguistics. doi: 10.18653/v1/W19-2720. URL <https://www.aclweb.org/anthology/W19-2720>.
- Yohan Jo, Seojin Bang, Emaad Manzoor, Eduard Hovy, and Chris Reed. Detecting attackable sentences in arguments. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 1–23, Online, November 2020. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/2020.emnlp-main.1>.
- Gi-Cheon Kang, Jaeseo Lim, and Byoung-Tak Zhang. Dual attention networks for visual reference resolution in visual dialog. In *Proceedings of the 2019 Conference on Empirical Methods in Natural Language Processing and the 9th International Joint Conference on Natural Language Processing (EMNLP-IJCNLP)*, pp. 2024–2033, Hong Kong, China, November 2019. Association for Computational Linguistics. doi: 10.18653/v1/D19-1209. URL <https://www.aclweb.org/anthology/D19-1209>.
- Seokhwan Kim, Michel Galley, Chulaka Gunasekara, Sungjin Lee, Adam Atkinson, Baolin Peng, Hannes Schulz, Jianfeng Gao, Jinchao Li, Mahmoud Adada, et al. The eighth dialog system technology challenge. *arXiv preprint arXiv:1911.06394*, 2019.
- Diederick P Kingma and Jimmy Ba. Adam: A method for stochastic optimization. In *International Conference on Learning Representations (ICLR)*, 2015.
- Thomas N. Kipf and Max Welling. Semi-supervised classification with graph convolutional networks. In *International Conference on Learning Representations (ICLR)*, 2017.
- Shachi H Kumar, Eda Okur, Saurav Sahay, Jonathan Huang, and Lama Nachman. Leveraging topics and audio features with multimodal attention for audio visual scene-aware dialog. *3rd Visually Grounded Interaction and Language (ViGIL) Workshop, NeurIPS*, 2019.
- Souvik Kundu, Tushar Khot, Ashish Sabharwal, and Peter Clark. Exploiting explicit paths for multi-hop reading comprehension. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 2737–2747, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1263. URL <https://www.aclweb.org/anthology/P19-1263>.
- Hung Le and Steven C.H. Hoi. Video-grounded dialogues with pretrained generation language models. In *Proceedings of the 58th Annual Meeting of the Association for Computational Linguistics*, pp. 5842–5848, Online, July 2020. Association for Computational Linguistics. doi: 10.18653/v1/2020.acl-main.518. URL <https://www.aclweb.org/anthology/2020.acl-main.518>.

- Hung Le, Doyen Sahoo, Nancy Chen, and Steven Hoi. Multimodal transformer networks for end-to-end video-grounded dialogue systems. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 5612–5623, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1564. URL <https://www.aclweb.org/anthology/P19-1564>.
- Hwanhee Lee, Seunghyun Yoon, Franck Dernoncourt, Doo Soon Kim, Trung Bui, and Kyomin Jung. Dstc8-avsd: Multimodal semantic transformer network with retrieval style word generator. *DSTC Workshop @ AAI 2020*, 2020.
- Jialu Li, Esin Durmus, and Claire Cardie. Exploring the role of argument structure in online debate persuasion. In *Proceedings of the 2020 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 8905–8912, Online, November 2020a. Association for Computational Linguistics. URL <https://www.aclweb.org/anthology/2020.emnlp-main.716>.
- Zekang Li, Zongjia Li, Jinchao Zhang, Yang Feng, Cheng Niu, and Jie Zhou. Bridging text and video: A universal multimodal transformer for video-audio scene-aware dialog. *DSTC Workshop @ AAI, 2020b*.
- Chin-Yew Lin. Rouge: A package for automatic evaluation of summaries. *Text Summarization Branches Out*, 2004.
- Ziheng Lin, Hwee Tou Ng, and Min-Yen Kan. Automatically evaluating text coherence using discourse relations. In *Proceedings of the 49th Annual Meeting of the Association for Computational Linguistics: Human Language Technologies*, pp. 997–1006, 2011.
- Thao Minh Le, Vuong Le, Svetha Venkatesh, and Truyen Tran. Dynamic language binding in relational visual reasoning. In Christian Bessiere (ed.), *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-20*, pp. 818–824. International Joint Conferences on Artificial Intelligence Organization, 7 2020. doi: 10.24963/ijcai.2020/114. URL <https://doi.org/10.24963/ijcai.2020/114>. Main track.
- Gaku Morio and Katsuhide Fujita. End-to-end argument mining for discussion threads based on parallel constrained pointer architecture. In Noam Slonim and Ranit Aharonov (eds.), *Proceedings of the 5th Workshop on Argument Mining, ArgMining@EMNLP 2018, Brussels, Belgium, November 1, 2018*, pp. 11–21. Association for Computational Linguistics, 2018. doi: 10.18653/v1/w18-5202. URL <https://doi.org/10.18653/v1/w18-5202>.
- Akiko Murakami and Rudy Raymond. Support or oppose? classifying positions in online debates from reply activities and opinion expressions. In *Coling 2010: Posters*, pp. 869–875, 2010.
- Dat Tien Nguyen, Shikhar Sharma, Hannes Schulz, and Layla El Asri. From film to video: Multi-turn question answering with multi-modal context. In *AAAI 2019 Dialog System Technology Challenge (DSTC7) Workshop*, 2019.
- Vlad Niculae, Joonsuk Park, and Claire Cardie. Argument mining with structured SVMs and RNNs. In *Proceedings of the 55th Annual Meeting of the Association for Computational Linguistics (Volume 1: Long Papers)*, pp. 985–995, Vancouver, Canada, July 2017. Association for Computational Linguistics. doi: 10.18653/v1/P17-1091. URL <https://www.aclweb.org/anthology/P17-1091>.
- Kishore Papineni, Salim Roukos, Todd Ward, and Wei-Jing Zhu. Bleu: a method for automatic evaluation of machine translation. In *Proceedings of the 40th annual meeting on association for computational linguistics*, pp. 311–318. Association for Computational Linguistics, 2002.
- Andreas Peldszus and Manfred Stede. Joint prediction in mst-style discourse parsing for argumentation mining. In *Proceedings of the 2015 Conference on Empirical Methods in Natural Language Processing*, pp. 938–948, 2015.
- Isaac Persing and Vincent Ng. End-to-end argumentation mining in student essays. In *Proceedings of the 2016 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 1384–1394, 2016.

- Jan Wira Gotama Putra and Takenobu Tokunaga. Evaluating text coherence based on semantic similarity graph. In *Proceedings of TextGraphs-11: the Workshop on Graph-based Methods for Natural Language Processing*, pp. 76–85, 2017.
- Lin Qiu, Yunxuan Xiao, Yanru Qu, Hao Zhou, Lei Li, Weinan Zhang, and Yong Yu. Dynamically fused graph network for multi-hop reasoning. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 6140–6150, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1617. URL <https://www.aclweb.org/anthology/P19-1617>.
- Alec Radford, Jeffrey Wu, Rewon Child, David Luan, Dario Amodei, and Ilya Sutskever. Language models are unsupervised multitask learners. *OpenAI Blog*, 1(8):9, 2019.
- Ramon Sanabria, Shruti Palaskar, and Florian Metzger. Cmu sinbad’s submission for the dstc7 avsd challenge. In *DSTC7 at AAI2019 workshop*, volume 6, 2019.
- Idan Schwartz, Alexander G Schwing, and Tamir Hazan. A simple baseline for audio-visual scene-aware dialog. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 12548–12558, 2019a.
- Idan Schwartz, Seunghak Yu, Tamir Hazan, and Alexander G Schwing. Factor graph attention. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 2039–2048, 2019b.
- Zhouxing Shi and Minlie Huang. A deep sequential model for discourse parsing on multi-party dialogues. In *AAAI*, 2019.
- Gunnar A Sigurdsson, Gül Varol, Xiaolong Wang, Ali Farhadi, Ivan Laptev, and Abhinav Gupta. Hollywood in homes: Crowdsourcing data collection for activity understanding. In *European Conference on Computer Vision*, pp. 510–526. Springer, 2016.
- Richard Socher, Andrej Karpathy, Quoc V. Le, Christopher D. Manning, and Andrew Y. Ng. Grounded compositional semantics for finding and describing images with sentences. *Transactions of the Association for Computational Linguistics*, 2:207–218, 2014. doi: 10.1162/tacl_a_00177. URL <https://www.aclweb.org/anthology/Q14-1017>.
- Christian Stab and Iryna Gurevych. Identifying argumentative discourse structures in persuasive essays. In *Proceedings of the 2014 Conference on Empirical Methods in Natural Language Processing (EMNLP)*, pp. 46–56, 2014.
- Kai Sun, Dian Yu, Jianshu Chen, Dong Yu, Yejin Choi, and Claire Cardie. Dream: A challenge data set and models for dialogue-based reading comprehension. *Transactions of the Association for Computational Linguistics*, 7:217–231, 2019.
- Reid Swanson, Brian Ecker, and Marilyn Walker. Argument mining: Extracting arguments from online dialogue. In *Proceedings of the 16th Annual Meeting of the Special Interest Group on Discourse and Dialogue*, pp. 217–226, Prague, Czech Republic, September 2015. Association for Computational Linguistics. doi: 10.18653/v1/W15-4631. URL <https://www.aclweb.org/anthology/W15-4631>.
- Christian Szegedy, Vincent Vanhoucke, Sergey Ioffe, Jon Shlens, and Zbigniew Wojna. Rethinking the inception architecture for computer vision. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 2818–2826, 2016.
- Chenhao Tan, Vlad Niculae, Cristian Danescu-Niculescu-Mizil, and Lillian Lee. Winning arguments: Interaction dynamics and persuasion strategies in good-faith online discussions. In *Proceedings of the 25th international conference on world wide web*, pp. 613–624, 2016.
- Zeyun Tang, Yongliang Shen, Xinyin Ma, Wei Xu, Jiale Yu, and Weiming Lu. Multi-hop reading comprehension across documents with path-based graph convolutional network. In Christian Bessiere (ed.), *Proceedings of the Twenty-Ninth International Joint Conference on Artificial Intelligence, IJCAI-20*, pp. 3905–3911. International Joint Conferences on Artificial Intelligence Organization, 7 2020. doi: 10.24963/ijcai.2020/540. URL <https://doi.org/10.24963/ijcai.2020/540>. Main track.

- Ming Tu, Guangtao Wang, Jing Huang, Yun Tang, Xiaodong He, and Bowen Zhou. Multi-hop reading comprehension across multiple documents by reasoning over heterogeneous graphs. In *Proceedings of the 57th Annual Meeting of the Association for Computational Linguistics*, pp. 2704–2713, Florence, Italy, July 2019. Association for Computational Linguistics. doi: 10.18653/v1/P19-1260. URL <https://www.aclweb.org/anthology/P19-1260>.
- Ashish Vaswani, Noam Shazeer, Niki Parmar, Jakob Uszkoreit, Llion Jones, Aidan N Gomez, Łukasz Kaiser, and Illia Polosukhin. Attention is all you need. In I. Guyon, U. V. Luxburg, S. Bengio, H. Wallach, R. Fergus, S. Vishwanathan, and R. Garnett (eds.), *Advances in Neural Information Processing Systems 30*, pp. 5998–6008. Curran Associates, Inc., 2017. URL <http://papers.nips.cc/paper/7181-attention-is-all-you-need.pdf>.
- Ramakrishna Vedantam, C Lawrence Zitnick, and Devi Parikh. Cider: Consensus-based image description evaluation. In *Proceedings of the IEEE conference on computer vision and pattern recognition*, pp. 4566–4575, 2015.
- Johannes Welbl, Pontus Stenetorp, and Sebastian Riedel. Constructing datasets for multi-hop reading comprehension across documents. *Transactions of the Association for Computational Linguistics*, 6:287–302, 2018. doi: 10.1162/tacl_a_00021. URL <https://www.aclweb.org/anthology/Q18-1021>.
- Huiyuan Xie and Ignacio Iacobacci. Audio visual scene-aware dialog system using dynamic memory networks, 02 2020.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Proceedings of the 2018 Conference on Empirical Methods in Natural Language Processing*, pp. 2369–2380, Brussels, Belgium, October–November 2018a. Association for Computational Linguistics. doi: 10.18653/v1/D18-1259. URL <https://www.aclweb.org/anthology/D18-1259>.
- Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov, and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question answering. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*, 2018b.
- Koichiro Yoshino, Chiori Hori, Julien Perez, Luis Fernando D’Haro, Lazaros Polymenakos, Chulaka Gunasekara, Walter S Lasecki, Jonathan K Kummerfeld, Michel Galley, Chris Brockett, et al. Dialog system technology challenge 7. *arXiv preprint arXiv:1901.03461*, 2019.
- Zilong Zheng, Wenguan Wang, Siyuan Qi, and Song-Chun Zhu. Reasoning visual dialogs with structural and partial observations. In *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, pp. 6669–6678, 2019.
- Henghui Zhu, Feng Nan, Zhiguo Wang, Ramesh Nallapati, and Bing Xiang. Who did they respond to? conversation structure modeling using masked hierarchical transformer. In *The Thirty-Fourth AAAI Conference on Artificial Intelligence, AAAI 2020, The Thirty-Second Innovative Applications of Artificial Intelligence Conference, IAAI 2020, The Tenth AAAI Symposium on Educational Advances in Artificial Intelligence, EAAI 2020, New York, NY, USA, February 7-12, 2020*, pp. 9741–9748. AAAI Press, 2020. URL <https://aaai.org/ojs/index.php/AAAI/article/view/6524>.

A EXPERIMENTAL SETUP

We experiment with the Adam optimizer (Kingma & Ba, 2015). The models are trained with a warm-up learning rate period of 5 epochs before the learning rate decays and the training finishes up to 50 epochs. The best model is selected by the average loss in the validation set. All model parameters, except the decoder parameters when using pre-trained language models, are initialized with uniform distribution (Glorot & Bengio, 2010). The Transformer hyper-parameters are fine-tuned by validation results over $d = \{128, 256\}$, $h = \{1, 2, 4, 8, 16\}$, and a dropout rate from 0.1 to 0.5. Label smoothing (Szegedy et al., 2016) is applied on labels of $\hat{\mathcal{A}}_t$ (label smoothing does not help when optimizing over $\hat{\mathcal{R}}_t$ as the labels are limited by the maximum length of dialogues, i.e. 10 in AVSD).

B IMPACTS OF COMPOSITIONAL SEMANTIC GRAPH

We experiment with model variants based on different types of graph structures. Specifically, we compare our compositional semantic graph against a graph built upon the turn-level *global* semantics. In these graphs, we do not decompose each dialogue turn into component sub-nodes (line 5 in Algorithm 1) but directly compute the similarity score based on the whole sentence embedding. We also experiment with a fully connected graph structure. In each graph structure, we experiment with temporally ordered edges (TODirect). This is enforced by adding a check whether $\text{Get_Dial_Turn}(s_j) > \text{Get_Dial_Turn}(s_i)$ in line 11 and removing line 12 in Algorithm 1. From the results in Table 4, we observe that: (1) based on the CIDEr metric, the best performing graph structure is the compositional semantic graph while the global semantic graph and fully connected graph structure are almost equivalent. This is consistent with the previous insight in machine reading comprehension research that entity lexical overlaps between knowledge bases are often overlooked by global embeddings (Ding et al., 2019) and it is not reliable to construct a knowledge graph based on global representations alone. (2) regarding the direction of edges, bidirectional edges and temporally ordered edges perform similarly, indicating that processing dialogue turns following temporal orders provides enough information and backward processing is only supplementary.

C ADDITIONAL QUALITATIVE ANALYSIS

In Figure 4, we demonstrate examples outputs of reasoning paths and dialogue responses and have the following observations:

- For questions that do not involve actions and can be answered by a single frame, there is typically no reasoning path, i.e. the path only includes the current turn (Example A and B). These questions are usually simple and they are rarely involved in multiple dialogue turns.
- In many cases, the dialogue agent can predict an appropriate path but still not generate the correct answers (Example D and G). These paths are able to connect turns that are most relevant to the current turns but these past turns do not contain or contain very limited clues to the expected answers. For example, in Example F, the 2nd and 4th turn are linked by the lexical component for “the woman”. However, they do not have useful information relevant to the current turn, i.e. her clothes.
- Finally, our approach shows that the current benchmark, AVSD, typically contains one-hop (Example C, D, E) to two-hop (Example F, G, H) reasoning paths over dialogue context. We hope future dialogue benchmarks will factor in the complexity of dialogue context in terms of reasoning hops to facilitate better research of intelligent dialogue systems.

Discussion of failure cases. From the above observations, we identify the following scenarios that our models are susceptible to and propose potential directions for improvement.

- **Long complex utterances.** One limitation of our methods is its dependence on syntactical parser methods to decompose a sentence into sub-nodes. In most dialogues, this problem is not too serious due to the short length of utterances, usually just a single sentence. However, in cases that the utterance contains multiple sentences/clauses or exhibits usage of spoken language with loose linguistic syntax, the parser may fail to decompose it properly. For

instance, in Example G in Figure 4, the ground-truth answer contains a causality-based clause (“because”), making it harder to identify sub-nodes such as “sneeze” or “dusty”.

- **Contextualized semantic similarity.** Another area we can improve upon this method is to inject some forms of sentence-level contextual cues into each sub-node to improve their semantic representations. For instance, in a hypothetical dialogue that involves 2 question utterances such as the 2nd turn in Example A and the 6th turn in Example E in Figure 4, our method might not detect the connection between these two as they do not have overlap component sub-nodes. However, they are both related to the audio aspect of the video and a reasoning path between these two turns is appropriate.

D STATISTICS OF LOCAL VS. GLOBAL SEMANTIC GRAPHS

In Table 6, we report the statistics of graph structures constructed by local and global semantics in all data splits of the AVSD benchmark. We observe that constructing graphs with local semantics result in a lower number of instances with no reasoning paths than making graphs with global semantics. This is due to compositionality in our method, resulting in higher lexical overlap between dialogue turns. With our method, the number of sub-nodes per dialogue turn is more than 4 on average, making it easier to connect dialogue turns. This also leads to a larger and more diverse set of reasoning paths for supervision learning. In local semantic graphs, the average number of reasoning paths per dialogue turn is 2 to 3 on average, higher than this number in global semantic graphs. Although our method requires additional computational effort to constructing these graphs, it is scalable to the size of the dialogue, i.e. number of the dialogue turns. To efficiently construct these graphs in a dialogue, the semantic graph of a dialogue turn can be built on top of the semantic graph of the last turn. This is done by simply adding the new sub-nodes to the last turn’s semantic graph and defining new edges adjacent to these sub-nodes only. In this way, the complexity of our graph construction method is linear to the number of dialogue turns.

	Local Semantic Graphs			Global Semantic Graphs		
	train	val	test	train	val	test
# sub-nodes in total	341,186	88,617	31,936	76,590	17,870	6,745
# sub-nodes per dialogue turn	4.45	4.96	4.73	1.00	1.00	1.00
# edges in total	619,428	147,588	32,765	270,356	63,141	40,470
# dialogue turns with no reasoning paths	27,704	6,420	3,048	35,048	8,152	3,696
max # reasoning paths per dialogue turn	35	33	24	10	9	5
avg. # reasoning paths per dialogue turn	3.10	3.10	1.99	1.21	1.10	1.04

Table 6: Comparison of dialogue context graphs built by local semantics and global semantics.

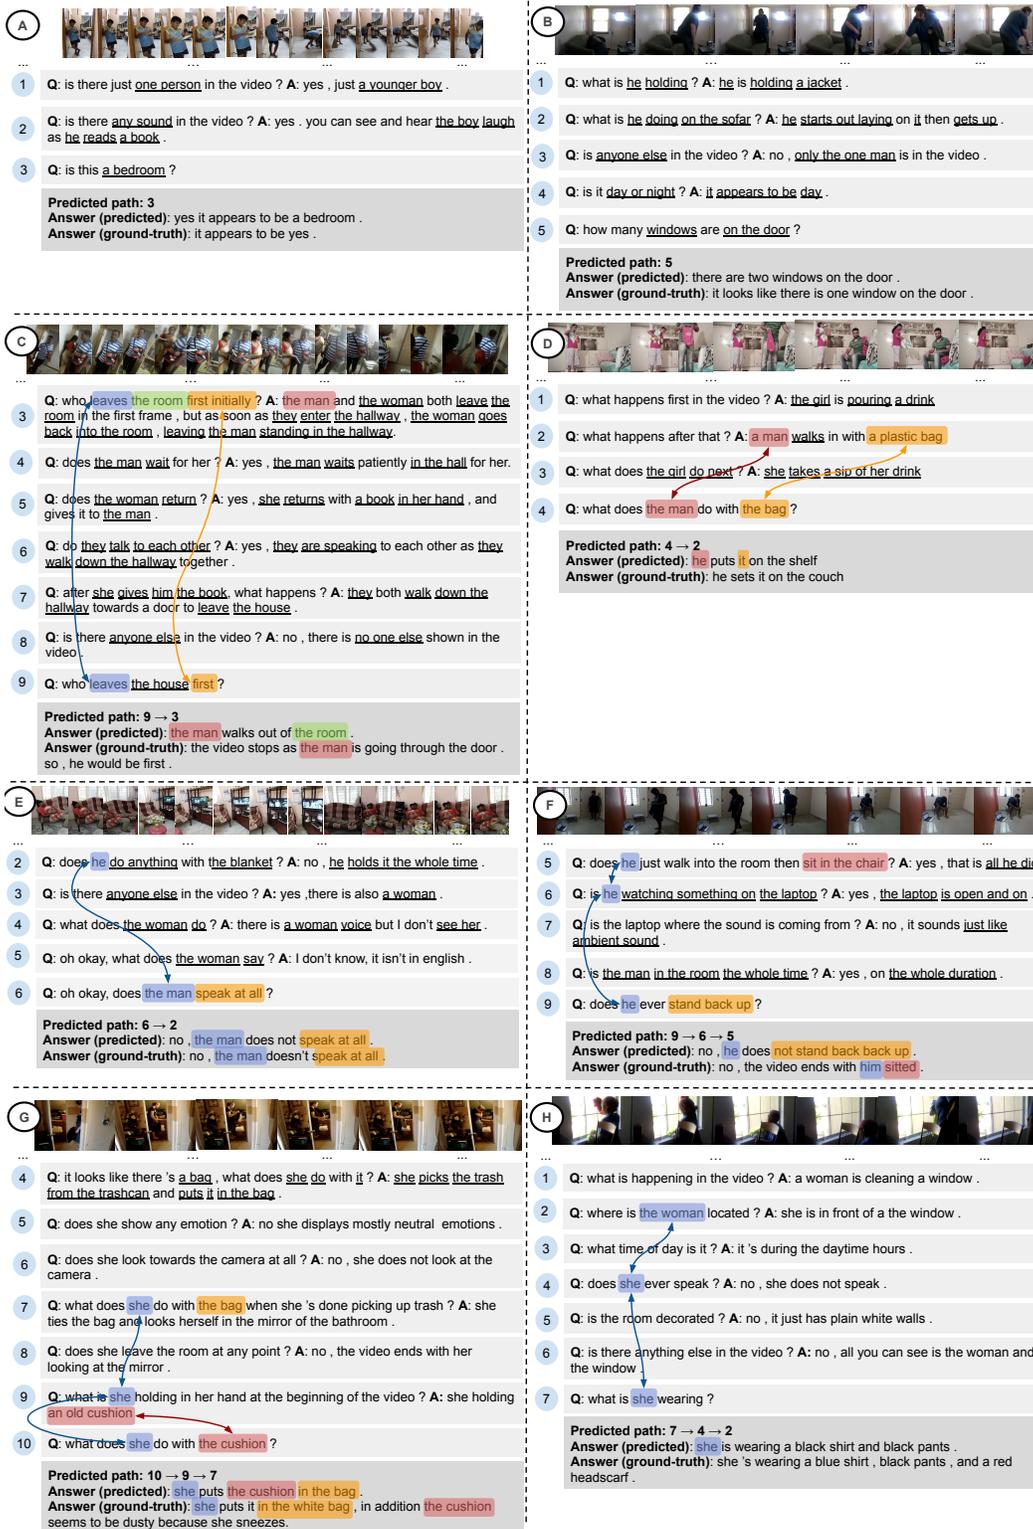


Figure 4: Example outputs of reasoning paths and dialogue responses.