

LP-RAG: A LINK PREDICTION-BASED FRAMEWORK FOR RETRIEVAL-AUGMENTED GENERATION

Anonymous authors

Paper under double-blind review

ABSTRACT

Retrieval-augmented generation (RAG) strategies have empowered large language models (LLMs) through integration with external knowledge sources, thereby enabling more accurate, up-to-date, and contextually relevant outputs. Among these, graph-based RAG methods stand out as particularly prominent. These approaches aim to structure external knowledge into graphs and leverage relational reasoning to retrieve relevant information to the context at hand. However, existing approaches remain limited in their ability to exploit query-based semantic cues. In this paper, we propose LP-RAG, a link prediction-based framework for document RAG. Specifically, LP-RAG employs an LLM-prompted chunker and text encoders to construct a graph of similarity relationships among chunks, which is then augmented with chunk-conditioned synthetic queries that emulate potential questions for each chunk. This design enables the incorporation of chunk-specific semantic information for model training. In our framework, retrieval is cast as an inductive link prediction problem, where the goal is to predict chunk–query links. Notably, LP-RAG is model-agnostic and can incorporate any link prediction method (e.g., graph neural network–based predictors). To demonstrate its effectiveness, we evaluate LP-RAG across diverse settings/benchmarks. Results show that LP-RAG consistently outperforms existing graph-based RAG methods.

1 INTRODUCTION

Large language models (LLMs) (Brown et al., 2020; Chowdhery et al., 2023; Kaplan et al., 2020) have quickly become one of the most transformative technologies of modern era, enabling significant progress across a range of applications, such as conversational agents (Pan et al., 2025), automated code generation (Liu et al., 2023), education (Liu et al., 2024), and healthcare (Kim et al., 2024; Wu et al., 2024). Yet, their reliance on static corpora prevents access to real-time information, limits coverage of domain-specific knowledge, and hinders reliable encoding of long-tail factual knowledge (Kandpal et al., 2023; Luo et al., 2025). To address these limitations, retrieval-augmented generation (RAG) systems (Lewis et al., 2020; Jimenez Gutierrez et al., 2024; Xu et al., 2025) couple LLMs with information retrieval strategies, integrating external knowledge into the generation process. Nowadays, RAG systems constitute a central component of LLM-based applications, underpinning widely deployed products such as search engines and chat assistants (Cai et al., 2024).

Despite rapid progress, most RAG methods still lack a high-level, global understanding of knowledge distributed across documents and do not provide principled mechanisms to exploit relationships among their textual elements (Luo et al., 2024; Xu et al., 2025). As a result, they often struggle with multi-hop reasoning and summary-level queries (Han et al., 2024b). To address these limitations, graph-based RAG (GraphRAG) (Han et al., 2023; Jimenez Gutierrez et al., 2024) emerged as an alternative that aim to organize the text corpus into a graph, where nodes typically represent entities or chunks and edges encode diverse relation types. Recent approaches further leverage LLMs to incorporate summary-based information into graphs (Edge et al., 2024; Jimenez Gutierrez et al., 2024), and employ graph neural networks (GNNs) (Scarselli et al., 2009; Gilmer et al., 2017) to reason over these structures (Mavromatis & Karypis, 2025; He et al., 2024).

However, we argue that existing approaches overlook query-based semantic cues for retrieval tasks. To the best of our knowledge, no prior works leverage simulated queries as supervision signal for learnable retrieval methods on graph data. This is critical since simulated queries provide a direct

proxy for the information needs of downstream users, enabling the model to align graph traversal and context selection with query intent rather than relying solely on static graph connectivity.

In this paper, we propose LP-RAG — a novel link prediction-based approach for QA document RAG. Our key insight is to leverage LLM-prompted synthetic queries to augment graph indexes with fine-grained semantic information. Importantly, our design enables *i*) exploiting semantic cues from chunks (candidate passages for retrieval), and *ii*) integrating learned powerful link prediction methods for retrieval. More specifically, our methodology begins by breaking down complex and abstract concepts into simpler chunks using a prompt-driven strategy with a small-scale language model. Each resulting chunk is represented as a node, and connections between nodes are established through similarity scores from contextual embeddings. Subsequently, synthetic queries are generated by the language model conditioned on the extracted chunks. These chunks, queries, and inter-node connections are then integrated to form a unified graph structure, referred to as the chunk-query graph. Finally, we formulate retrieval as a link prediction problem, where the goal is to predict links between an incoming query and chunk nodes. Crucially, the use of synthetic queries provides direct supervision for training the link predictors, enabling LP-RAG to flexibly incorporate a wide range of link prediction models. Figure 1 illustrates the steps of LP-RAG.

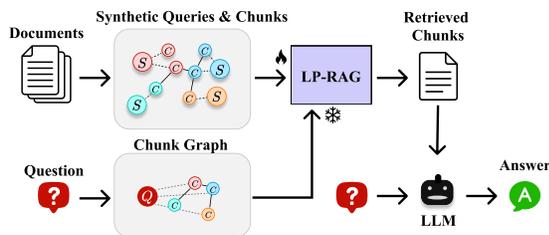


Figure 1: **Overview of LP-RAG.** We use the chunk-query graph for training. For inference, we feed only the chunk graph and the user query to LP-RAG to obtain chunks for generation.

To evaluate the effectiveness of LP-RAG, we mainly follow the experimental setups of Xu et al. (2025) and Luo et al. (2025) and consider ten multi-hop RAG benchmarks. Our results demonstrate that LP-RAG consistently outperforms strong baselines, including NodeRAG, HippoRAG, and GFM-RAG, in open-ended head-to-head evaluations, while maintaining a competitive number of retrieval tokens. We also conduct ablation studies to demonstrate the importance of using synthetic queries in our framework, and the impact of different GNNs and negative sampling schemes.

In sum, our contributions are:

- We are the first to formulate RAG as a link prediction problem, enabling us to leverage the rich available toolbox of link prediction methods;
- We propose LP-RAG, a simple graph-based RAG approach that integrates synthetic queries, LLM-prompted chunker, and link predictors for effective retrieval on graphs;
- We demonstrate the efficiency and effectiveness of LP-RAG in multiple domains, with significant empirical gains over recently introduced baselines, like NodeRAG and GFM-RAG.

2 RELATED WORKS

Retrieval-Augmented Generation (RAG) (Lewis et al., 2020; Gao et al., 2023b) provides an effective way to integrate external knowledge into LLMs by retrieving relevant documents to facilitate LLM generation. Early works adopt the pre-trained dense embedding model to encode documents as separate vectors (Lewis et al., 2020; Chen et al., 2024a; Moreira et al., 2024), which are then retrieved via similarity scores to the query. Despite efficiency and generalizability, these methods struggle to capture complex document relationships. Subsequent studies have explored multi-step retrieval, where LLMs guide an iterative process to retrieve and reason over multiple documents (Gao et al., 2023a; Su et al., 2024).

Graph-based RAG (Peng et al., 2024; Han et al., 2024a) leverages graphs to explicitly model the complex relationships between knowledge, facilitating retrieval and reasoning. The methods GraphRAG (Han et al., 2023; Edge et al., 2024) and LightRAG (Guo et al., 2025) incorporate graph structures into text indexing and retrieval, enabling efficient retrieval of entities and their relationships. HippoRAG (Jimenez Gutierrez et al., 2024) enhances multi-hop retrieval by using a personalized PageRank algorithm to locate relevant knowledge. NodeRAG (Xu et al., 2025) further

advances this line of work by introducing heterogeneous graph structures specifically designed to enable a more seamless and holistic integration of graph algorithms into the RAG workflow. However, the graph structure can be noisy and incomplete, leading to suboptimal performance. Efforts to incorporate GNNs into graph-enhanced RAG (He et al., 2024; Mavromatis & Karypis, 2025; Li et al., 2025b; Luo et al., 2025) have shown impressive results due to the strong graph reasoning capabilities of GNNs in handling graph data. Nonetheless, these methods still limit in generalizability due to the dependence, in some degree, on similarity algorithms during the retrieval stage.

Knowledge graph construction & reasoning. Other frameworks focus on constructing and fusing structured knowledge: RAGraph retrieves whole graphs from a library to augment downstream graph learning (Jiang et al., 2024), while Graphusion uses LLMs to extract triplets and fuse them into a global knowledge graph for improved retrieval and reasoning (Yang et al., 2025). TOBU-Graph (Kashmira et al., 2024) instead builds knowledge graphs from documents and perform graph-traversal retrieval on these KGs, providing an alternative to text-only similarity retrieval Kashmira et al. (2024). Finally, specialized methods target schema-matching and multi-hop retrieval by combining vector-based matching with graph-traversal over large external KGs (Ma et al., 2025).

Link prediction aims to infer missing or future edges in a graph by estimating a score for each candidate node pair. Classical structural heuristics — e.g., Common Neighbors, Jaccard and Adamic-Adar — remain strong, scalable baselines and are commonly used for social and information networks (Liben-Nowell & Kleinberg, 2003; Yao et al., 2016; Adamic & Adar, 2003). More recently, neural methods have dominated benchmarks: variational graph autoencoders learn node latents specifically for reconstructing edges (Kipf & Welling, 2016), while subgraph-centric GNN methods, such as SEAL, extract enclosing subgraphs and learn structure-aware classifiers (Zhang & Chen, 2018). Equivariant positional-encoding GNNs (e.g., PEG, Wang et al. (2022)) and Neural Common Neighbor (NCN) (Wang et al., 2024) architectures enhance expressivity by combining structural features and MPNN representations.

Collectively, these graph-based RAG methods emphasize graph construction (passage graphs or knowledge graphs) and the use of graph traversal or GNN-based ranking to guide retrieval (Peng et al., 2024). To the best of our knowledge, framing retrieval as a supervised link-prediction problem — where chunk and query nodes are explicitly linked and edge existence is learned — remains unexplored. Our proposed LP-RAG fills this gap by (i) decomposing documents into chunk-nodes and synthetic query-nodes, and (ii) learning a link-prediction model to score query-chunk edges.

3 METHOD: LP-RAG

This section introduces LP-RAG, a novel link prediction-based framework for retrieval-augmented generation. We begin with a brief overview of the document RAG task and our approach, and then Sections 3.1–3.4 provide a detailed description of each component of LP-RAG. A detailed example of the LP-RAG process can be found in Appendix A.

Notation. A corpus is a collection of documents $\mathcal{D} = \{D_1, \dots, D_{|\mathcal{D}|}\}$, where each document D_i is represented as a sequence of tokens $(x_1^i, \dots, x_{|D_i|}^i)$. A *chunk* is defined as a contiguous subsequence of tokens within a document. Formally, a chunk $x_{s:e}^i$ corresponds to the slice (x_s^i, \dots, x_e^i) with $1 \leq s \leq e \leq |D_i|$. Moreover, we represent an *attributed undirected graph* as a tuple $G = (V, E, z)$, where V is a set of vertices, E is a set of unordered pairs of vertices, called edges, and $z : V \rightarrow \mathbb{R}^d$ is an attribute function that assigns a feature (or color) $z(v)$ to each vertex $v \in V$. The set of neighbors of a node v in G is denoted by $\mathcal{N}^G(v) = \{u \in V : \{v, u\} \in E\}$. Hereafter, we denote the features of v by z_v .

Document RAG tasks. Let \mathcal{C} denote the collection of all chunks. Given a user query q , a corpus \mathcal{D} , and a pre-trained language model $\text{LLM}(\cdot)$, we want to find a retrieval function RETRIEVE , with

$$\mathcal{C}_q = \text{RETRIEVE}(q, \mathcal{D}) \subseteq \mathcal{C}, \quad (1)$$

such that the retrieved chunks \mathcal{C}_q are relevant to q . The notion of relevance is broad and task-dependent. Here, we are particularly interested in retrieval functions for which the combination of q and \mathcal{C}_q , denoted by $\text{COMBINE}(q, \mathcal{C}_q)$, maximizes the expected utility of the LLM answers

$$y_q \sim \text{LLM}(\text{COMBINE}(q, \mathcal{C}_q)). \quad (2)$$

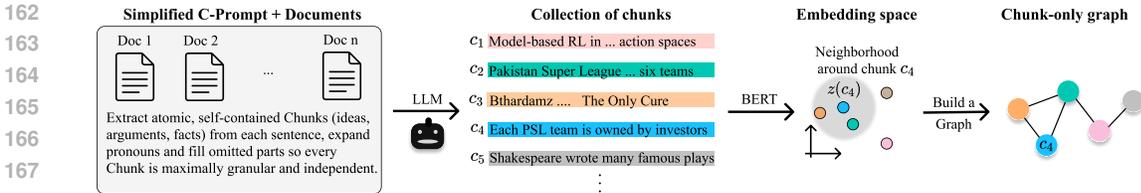


Figure 2: **Chunking.** LP-RAG decomposes a document into chunks via a prompted LLM. Then, we compute embeddings for each chunk node using a BERT-based encoder. Next, we calculate pairwise cosine similarity scores between all chunk-node embeddings. Finally, each chunk node is connected to its top- k most similar neighbors, as given by these similarity scores.

The notion of utility is task-dependent, e.g., semantic equivalence or exact match for Q&A. Equations 1 and 2 denote the retrieval and generation phases of RAG systems, respectively.

Overview. Our approach targets the retrieval stage by representing the corpus with a graph index. In LP-RAG, we first construct a graph whose nodes are either document chunks or synthetically generated queries, and whose edges encode node-embedding similarity. The key idea is that synthetic queries expose chunk-specific semantics that chunk-only graphs may miss. We then train a general link-prediction model on this synthetic graph to capture chunk–query relationships. At inference, given a new query q , retrieval reduces to predicting links from q to chunk nodes and ranking the top-scored candidates. We detail each step below and provide an overview of LP-RAG in Figure 1.

3.1 CHUNK EXTRACTION

A key challenge in applying RAG to augment LLMs is document chunking. Chunks must balance granularity and coverage: they should be small enough to enable efficient retrieval and stay within the model’s input token budget, yet sufficiently informative to remain semantically coherent and contain the evidence needed to answer the user query.

We carry out chunking via a prompted LLM. The idea is that leveraging prompted LLMs for chunk extraction help to mitigate truncated content and per-chunk ambiguity while obviating manual tuning of chunk length. It may also alleviate overlap issues commonly observed in heuristic approaches (e.g., TextSplit, SemanticSplit, and RecursiveSplit) (Lensu, 2025; Stabler et al., 2025).

Let C-PROMPT denote a fixed instruction prompt (for details, see Appendix C). We apply an LLM, conditioned on C-PROMPT and the corpus \mathcal{D} , to obtain the collection of chunks, i.e., the chunk set is $\mathcal{C} = \text{LLM}(\text{C-PROMPT} \parallel \mathcal{D})$. A illustration of this procedure is given in Figure 2.

3.2 SYNTHETIC QUERY GENERATION

We prompt an LLM to generate synthetic queries conditioned on the extracted chunks. The goal is for the LLM to produce queries that closely resemble those posed by human users.

Let $C \in \mathcal{C}$ be a target chunk. We prompt an LLM to generate synthetic queries whose answers are given in C . Using a fixed prompt S-PROMPT (see Appendix C for a detailed description), we generate up to n_C synthetic queries for C :

$$\mathcal{S}_C \sim \text{LLM}(\text{S-PROMPT} \parallel C; n_C). \tag{3}$$

We denote the full set of synthetic queries by $\mathcal{S} = \bigcup_{C \in \mathcal{C}} \mathcal{S}_C$.

For efficiency, we employ batched generation: given a batch $\mathcal{B} \subseteq \mathcal{C}$, the LLM is prompted jointly to produce $\mathcal{S}_{\mathcal{B}} = \bigcup_{C \in \mathcal{B}} \mathcal{S}_C$. Note that a synthetic query can be associated with one or more chunks. We record chunk–query associations via the relation $\mathcal{A} \subseteq \mathcal{S} \times \mathcal{C}$, with $(S, C) \in \mathcal{A}$ for every $S \in \mathcal{S}_C$.

3.3 GRAPH CONSTRUCTION

Given the chunk set \mathcal{C} and the synthetic query set \mathcal{S} , we build an undirected attributed graph $G = (V, E, z)$ with node set $V = \mathcal{C} \cup \mathcal{S}$, node-feature function z given by a pre-trained contextual encoder (e.g., Contriever (Izacard et al., 2022)), and edge set E defined as follows.

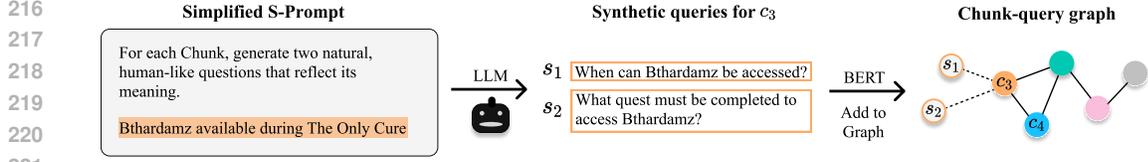


Figure 3: **Synthetic queries and chunk-query graphs.** For each chunk node, we create some synthetic queries via LLMs. We convert the synthetic queries into embeddings using Contriever. Finally, each synthetic query is added to the graph and connected to its respective chunks.

Query-chunk edges. Let $\mathcal{A} \subseteq \mathcal{S} \times \mathcal{C}$ denote the query-chunk relation (Section 3.2). We add an edge between a query S and a chunk C if, and only if, $(S, C) \in \mathcal{A}$, i.e.,

$$\{S, C\} \in E \iff (S, C) \in \mathcal{A} \quad (\text{equivalently, } S \in \mathcal{S}_C). \quad (4)$$

Chunk-chunk edges. Let $\text{sim} : \mathbb{R}^d \times \mathbb{R}^d \rightarrow \mathbb{R}$ be a similarity metric (e.g., cosine similarity) in the embedding space. Also, for $k \in \mathbb{N}$, define the k -NN set of a chunk C as

$$\mathcal{N}_k(C) = \arg \text{topk}\{\text{sim}(z_{C'}, z_C) : C' \in \mathcal{C} \setminus \{C\}\}.$$

Then, we connect two chunks C and C' by *mutual k -NN*, that is

$$\{C, C'\} \in E \iff C \in \mathcal{N}_k(C') \wedge C' \in \mathcal{N}_k(C). \quad (5)$$

Regarding scalability, we note that, with embeddings cached and an approximate nearest-neighbor (ANN) index over $\{z_C\}_{C \in \mathcal{C}}$, adding a batch of new chunks requires $O(|\mathcal{B}|)$ encoder calls and $O(|\mathcal{B}| \log |\mathcal{C}|)$ (amortized) neighbor lookups, yielding incremental, near-linear updates in batch size.

3.4 LEARNING TO RETRIEVE

We now formulate retrieval as an inductive link prediction task. Let $G' = (V', E')$ be an (unknown) underlying graph and let $G = (V, E)$ with $V \subseteq V'$ and $E \subseteq E'$ be an observed subgraph. In standard link prediction, the goal is to infer missing edges in $E' \setminus E$ among nodes in V . In the *inductive* setting, the predictor must also infer edges involving unseen nodes in $V' \setminus V$. In our context, the observed graph corresponds to the attributed query-chunk graph G (in Section 3.2) and the goal is to predict links between incoming user queries (treated as unseen nodes) and chunk nodes in G .

Formally, we consider parameterized link predictors of the form $\phi_\theta : V \times V \rightarrow \mathbb{R}$, with parameters $\theta \in \mathbb{R}^m$. Given the undirected nature of our graphs, we further require $\phi_\theta(u, v) = \phi_\theta(v, u) \forall u, v$. For an unseen query $q \notin V$, we create the augmented graph $\tilde{G} = (V \cup \{q\}, E)$ and apply ϕ_θ inductively to pairs of nodes in \tilde{G} . Then, retrieval amounts to scoring candidate edges between q and chunk nodes $C \in \mathcal{C}$ and selecting those with the highest values:

$$\mathcal{C}_q = \arg \text{topk}\{\phi_\theta(q, C) : C \in \mathcal{C}\} \quad \text{or} \quad \mathcal{C}_q = \{C \in \mathcal{C} : \phi_\theta(q, C) \geq \tau\}, \quad (6)$$

for a chosen k or threshold τ . Therefore, the retrieved set \mathcal{C}_q comprises the chunk nodes predicted to form links with q .

For simplicity, we have omitted node features from this formulation. However, we recall that each node is endowed with a contextual embedding produced by a text encoder (e.g., BERT; see Section 3.3). We also highlight that our approach is rather general and accommodate arbitrary models. Box 3.4 briefly illustrates the use of GNNs for link prediction.

Regarding training, as usual, we apply the binary cross-entropy (BCE) loss with negative sampling to learn the parameters θ of our predictor ϕ_θ . Let us define $\hat{y}_{u,v} = \sigma(\phi_\theta(u, v))$ where σ denotes the sigmoid logistic function. Then, we want to minimize the loss

$$\mathcal{L} = - \sum_{\{u,v\} \in E} (\log \hat{y}_{u,v} + \mathbb{E}_{v' \sim \mathbb{P}_V(u)} [\log(1 - \hat{y}_{u,v'})]), \quad (10)$$

270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323

Box 3.4: Graph Neural Networks (GNNs) for Link Prediction

Most GNNs can be described using the message-passing paradigm (Gilmer et al., 2017). They employ a sequence of message-passing steps, where each node v aggregates messages from its neighbors $\mathcal{N}^G(v)$ and use the resulting vector to update its own embedding.

Let $h_v^{(0)} = z_v$ for all $v \in V$. Message-passing GNNs recursively compute

$$m_v^{(\ell)} = f_{\text{agg}} \left(\{ \{ h_u^{(\ell-1)} : u \in \mathcal{N}(v) \} \} \right) \quad \forall v \in V \quad (7)$$

$$h_v^{(\ell)} = f_{\text{upd}}(h_v^{(\ell-1)}, m_v^{(\ell)}) \quad \forall v \in V, \quad (8)$$

where f_{agg} is an order-invariant function and f_{upd} is an arbitrary map (often an MLP). The final GNN embeddings, $\{h_v^{(L)}\}_{v \in V}$, can be further processed using feedforward layers. Finally, the score for a link $\{u, v\}$ is given by

$$\phi(u, v) = \text{MLP} \circ \text{Readout}(\{h_u^{(L)}, h_v^{(L)}\}). \quad (9)$$

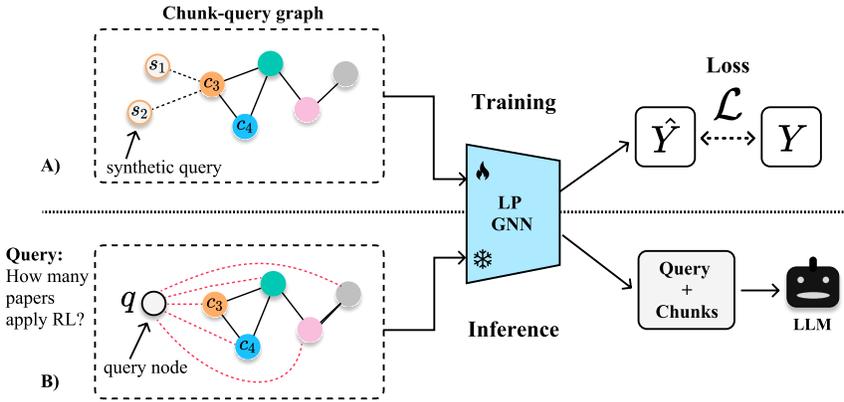


Figure 4: A) **GNN training** with the graph formed by the method. The edges connecting the queries are given greater importance; B) For **inference**, synthetic query nodes are removed from the graph.

where $\mathbb{P}_V(u)$ is a negative-sampling distribution over V . In practice, we employ Monte-Carlo approximation $\mathcal{L} = - \sum_{\{u,v\} \in E} (\log \hat{y}_{u,v} + |P(u)|^{-1} \sum_{v' \in P(u)} \log(1 - \hat{y}_{u,v'}))$, where $P(u)$ is a small set of i.i.d. samples from $\mathbb{P}_V(u)$. **Figure 4** shows the training/test phases of GNN-based LP-RAG.

Integration into LLMs. The final step of LP-RAG consists of combining the input user prompt with the retrieved chunks. Given the retrieved set \mathcal{C}_q , we sort the chunks in reverse order by their link-prediction scores w.r.t. q , i.e., we obtain a sequence of chunks $C_1, C_2, \dots, C_{|\mathcal{C}_q|} \in \mathcal{C}_q$ such that $\phi_\theta(q, C_i) \geq \phi_\theta(q, C_{i+1})$ for all i . We then concatenate the query with the sorted chunks to form the input to the LLM:

$$\text{COMBINE}(q, \mathcal{C}_q) = q \parallel C_1 \parallel C_2 \parallel \dots \parallel C_m.$$

The exact final prompt sent to the LLM is described in [Appendix C](#).

4 EXPERIMENTS

This section evaluates LP-RAG on widely used benchmarks. We conduct three sets of experiments designed to assess our approach across diverse conditions, including different LLMs, data scales, and evaluation benchmarks. We also perform ablation studies to show the contribution of different design choices: the effect of diverse link prediction methods, the benefit of synthetic queries within LP-RAG, and the impact of different negative sampling strategies. Implementation details are provided in [Appendix B](#), and [Appendix C](#) contains the set of prompts used in our experiments.

Table 1: Q&A results: LP-RAG consistently outperforms all baselines in all datasets while utilizing minimum resources. Bold text denotes the best results.

Methods	HotpotQA-S			MuSiQue-S			MultiHop-S			RAG-QA-S			ICLR-S		
	Acc.↑	F1↑	Tok↓												
NaiveRAG	67.50	22.50	7.2k	69.43	20.30	7.1k	68.23	21.14	8.1k	67.08	25.50	8.2k	53.90	21.62	7.9k
HyDe	72.17	36.95	7.3k	69.43	34.60	6.7k	73.89	37.59	8.3k	54.96	38.63	8.4k	68.50	35.30	7.2k
GraphRAG	87.24	65.00	6.1k	61.71	42.00	5.8k	72.15	58.62	6.4k	65.96	43.60	6.4k	74.50	42.00	6.9k
LightRAG	79.83	65.00	5.4k	63.14	41.50	5.3k	70.63	48.95	6.7k	65.89	43.62	6.3k	72.40	43.96	6.9k
NodeRAG	86.90	69.50	4.0k	66.00	45.00	5.2k	70.86	54.50	6.0k	67.20	56.86	3.3k	77.92	54.82	6.2k
LP-RAG	89.32	86.29	3.2k	89.67	85.15	3.8k	89.12	86.35	3.8k	87.89	85.26	2.2k	91.16	89.51	2.4k

4.1 EXPERIMENT I: OPEN-SOURCE LLM IN SMALL-DATA REGIMES

In this experiment, we evaluate NaiveRAG (Lewis et al., 2020), HyDe (Gao et al., 2023a), GraphRAG (Edge et al., 2024), LightRAG (Guo et al., 2025), NodeRAG (Xu et al., 2025), and LP-RAG (ours) across smaller versions of five popular benchmarks: HotpotQA (Yang et al., 2018), MuSiQue (Trivedi et al., 2022), MultiHop-RAG (Tang & Yang, 2024), RAG-QA (Han et al., 2024b), and ICLR Papers (Feng et al., 2025). Following Xu et al. (2025), we compute macro accuracy, F1 score, and measure the average number of retrieved tokens to evaluate efficiency.

Implementation details. We conduct a controlled experiment using LLaMA 3.3-70B and sampling 20 documents per dataset — except for ICLR Papers, for which we sample 50 documents. To distinguish the reduced datasets from their original counterparts, we append the suffix “-S” to the smaller versions. This reduced setting enabled us to (1) re-run baselines and perform ablation studies, and (2) compute F1 scores (not available in Xu et al. (2025)), ensuring a fair and reliable comparison. Link prediction methods were implemented using PyTorch / PyTorch Geometric (Fey & Lenssen, 2019). As link predictor, we employ the NCN model (Wang et al., 2024). Additionally, we use Contriever (Izacard et al., 2022) as embedding model for all texts.

Regarding synthetic queries, we generate two queries per chunk. We observed that LLMs tend to produce highly similar queries when prompted for multiple variants; hence, we additionally generate queries spanning connected chunks. This step improves the model’s ability to handle 2-, 3-, and 4-hop reasoning queries. We provide further details in Appendix B.

Results. Table 1 shows the results. Across all datasets, LP-RAG significantly outperforms all baselines: for the HotpotQA-S dataset, it achieves a 22% accuracy advantage over NaiveRAG, and a 2.42% over NodeRAG. Furthermore, its cost is lower than that of all baselines across datasets, with particularly large savings on the ICLR dataset. Regarding similarity-based baselines (i.e., NaiveRAG, HyDe, and GraphRAG), they generally achieve lower accuracy and macro F1 scores, even when they use graphs to capture relational structure. This behavior is evidenced in the GraphRAG results where accuracy is lower than NaiveRAG in the MuSiQue-S dataset. These findings suggest that these similarity-based methods struggle to identify the most informative nodes for generation, reinforcing the benefits of LP-RAG’s link-prediction-based retrieval mechanism.

We hypothesize that LP-RAG achieves the lowest token consumption for two reasons. First, our chunk extractor produces short, atomic chunks. Second, retrieval is based on the probability of an edge existing in a chunk rather than a fixed top- k selection. Together, these factors yield higher-quality information and more efficient retrieval. Overall, our results suggest that link prediction methods can improve retrieval performance in LLM-based question-answering tasks.

4.2 EXPERIMENT II: PRIVATE LLM ON ARENA BENCHMARKS

In this experiment, we compare LP-RAG against the same baselines of EXPERIMENT I using a private LLM on larger datasets (thousands of documents). Following the evaluation protocol of Xu et al. (2025), we adopt GPT-4.0-mini as LLM and use the Arena Benchmarks (Han et al., 2024b).

For fairness, we use the exact data splits of Xu et al. (2025) and consider four domains: Writing, Recreation, Science, and Tech, which keeps evaluation costs manageable. Baseline results are taken directly from their work. Consistent with their evaluation, we measure token usage for efficiency and report the win-tie ratio (W+T). For LP-RAG, we use the same configuration described in Section 4.1.

Table 2: Results on the Arena datasets. LP-RAG surpasses the performance of the baselines in 2 out of 4 datasets. Best values are in bold.

Methods	Writing		Tech		Science		Recreation	
	W+T ↑	Token↓						
NaiveRAG	0.663	9.4k	0.689	9.1k	0.526	9.0k	0.720	9.1k
HyDe	0.789	9.6k	0.863	9.3k	0.823	9.3k	0.777	9.3k
LightRAG	0.754	6.3k	0.937	6.9k	0.840	7.1k	0.800	6.8k
GraphRAG	0.749	6.4k	0.943	6.7k	0.863	6.7k	0.806	6.8k
NodeRAG	0.794	3.3k	0.949	3.8k	0.903	4.2k	0.886	3.3k
LP-RAG	0.775	4.2k	0.948	4.8k	0.920	4.1k	0.907	4.1k

Results. Table 2 reports the results on the Arena benchmarks. LP-RAG attains the highest win/tie ratio in both the Science and Recreation domains. It outperforms NaiveRAG, HyDe, LightRAG, and GraphRAG in three domains (Science, Recreation, and Technology), with particularly large gains in Science, where it exceeds NaiveRAG by 0.394. In the Writing domain, LP-RAG does not surpass NodeRAG or HyDe, but it still improves over GraphRAG by 0.026 while using substantially fewer tokens. Overall, LP-RAG’s token usage remains comparable to NodeRAG across all domains.

4.3 EXPERIMENT III: ADDITIONAL COMPARISON ON STANDARD BENCHMARKS

Now we evaluate the retrieval and the question-answering performance of LP-RAG against several methods. More specifically, we follow the same setup by Guo et al. (2025), which includes: three widely-used multi-hop QA datasets, i.e., HotpotQA (Yang et al., 2018), MuSiQue (Trivedi et al., 2022), and 2WikiMultiHopQA (2Wiki) (Ho et al., 2020); a well-documented separation of data to avoid data leakage; two evaluation metrics for retrieval performance, i.e., recall@2 (R@2) and recall@5 (R@5); two evaluation metrics for final QA performance, i.e., exact match (EM) score and F1 score; and finally, several widely used retrieval methods: BM25 (Robertson & Walker, 1994), Contriever (Izcard et al., 2022), GTR (Ni et al., 2022), ColBERTv2 (Santhanam et al., 2022), RAPTOR (Sarathi et al., 2024), Proposition (Chen et al., 2024b), GraphRAG (MS) (Edge et al., 2024), LightRAG (Guo et al., 2025), HippoRAG (Jimenez Gutierrez et al., 2024), SubgraphRAG (Li et al., 2025a), G-retriever (He et al., 2024), and GFM-RAG (Luo et al., 2025).

Regarding LP-RAG, we again employ the same setup from Section 4.1 and use GPT-4.0-mini.

Table 3: Retrieval performance comparison. LP-RAG outperforms GFM-RAG in three scenarios, and is second best in all scenarios.

Method	HotpotQA		MuSiQue		2Wiki	
	R@2	R@5	R@2	R@5	R@2	R@5
BM25	55.4	72.2	32.3	41.2	51.8	61.9
Contriever	57.2	75.5	34.8	46.6	56.0	57.5
GTR	59.4	73.3	37.4	47.9	60.2	67.0
ColBERTv2	64.7	79.3	37.9	49.2	59.2	68.2
RAPTOR	58.1	75.9	35.7	49.3	56.9	63.0
Proposition	58.7	71.1	37.6	49.3	56.4	63.4
GraphRAG (MS)	58.3	76.6	35.4	49.3	61.6	77.3
LightRAG	38.8	54.7	31.4	43.9	51.0	67.9
HippoRAG (Contriever)	59.0	76.2	39.1	52.1	71.5	89.5
HippoRAG (ColBERTv2)	60.5	77.9	40.2	53.2	73.5	90.4
SubgraphRAG	61.5	73.0	36.9	50.2	63.3	71.7
G-retriever	53.3	65.5	38.8	45.1	60.8	67.5
GFM-RAG	78.3	87.1	49.1	58.2	90.8	95.6
LP-RAG	77.9	89.6	53.6	61.8	89.9	93.2

Results: retrieval performance. As shown in Table 3, LP-RAG achieves the best performance on three scenarios, outperforming the SOTA GFM-RAG by 4.5% in R@2 and 3.6% in R@5 on MuSiQue. The results demonstrate the effectiveness of LP-RAG in multi-hop retrieval. This results

Table 4: Results: Q&A performance. LP-RAG is the best method in both metrics for all datasets.

Method	HotpotQA		MuSiQue		2Wiki	
	EM	F1	EM	F1	EM	F1
None	30.4	42.8	12.5	24.1	31.0	39.0
ColBERTv2	43.4	57.7	15.5	26.4	33.4	43.3
GraphRAG (MS)	35.3	54.6	13.6	24.9	28.3	38.4
LightRAG	36.8	48.3	18.1	27.5	45.1	49.5
HippoRAG (ColBERTv2)	41.8	55.0	19.2	29.8	46.6	59.5
GFM-RAG	51.6	66.9	30.2	40.4	69.8	77.7
LP-RAG	53.2	69.1	32.6	43.9	72.6	78.3

indicates that the LP-RAG can effectively conduct multi-hop reasoning. Compared to the other baselines, LP-RAG significantly outperforms them by a large margin. In particular, against HippoRAG (ColBERTv2), LP-RAG has a 17.4% gain in R@2 for the HotpotQA dataset.

Results: Q&A performance. Table 4 depicts the results regarding Q&A performance. Notably, LP-RAG achieves state-of-the-art performance against all baselines. In particular, LP-RAG outperforms GFM-RAG by 1.6%, 2.4%, 2.8% in EM on HotpotQA, MuSiQue, and 2Wiki, respectively.

4.4 EFFICIENCY ANALYSIS

We now compare the computational performance of LP-RAG with the main graph-based methods in Section 4.1. Our comparison covers indexing time, storage usage, average query latency, and average number of retrieved tokens. Importantly, all experiments were conducted under the same hardware and setup to ensure a fair comparison. We report the results in Table 5.

Overall, our method demonstrates equal or superior performance across all five datasets. In terms of query time, it is the fastest method on 4 out of 5 datasets, indicating that the overhead introduced by the GNN-based predictor is offset by the significantly lower number of retrieved tokens. Also, the indexing time is comparable with that of NodeRAG. These results underscore the efficiency of our framework when compared with existing graph-based approaches. For completeness, we also report the computational performance of LP-RAG on large datasets (Arena Benchmarks) in Section D.1.

Table 5: LP-RAG performance. Corpus size in total tokens, indexing time in minutes, storage usage in MegaBytes (MB), query time in seconds (s). Light refers to LightRAG and Node refers to NodeRAG

Dataset	Size	Indexing time (min)			Storage usage (MB)			Avg query time (s)			Avg retrieved tokens		
		Light	Node	LP-RAG	Light	Node	LP-RAG	Light	Node	LP-RAG	Light	Node	LP-RAG
HotpotQA-S	62K	7.9	5.1	4.7	21.2	10.7	10.3	5.8	4.2	3.6	5462	4019	3208
MuSiQue-S	58K	5.6	5.2	5.8	21.6	9.8	10.1	6.2	5.6	5.1	5312	5269	3849
MultiHop-S	49K	5.9	5.3	4.8	19.7	10.4	9.7	7.4	5.9	5.1	6752	6032	3816
RAG-QA-S	54K	6.1	5.8	6.2	26.8	14.0	12.1	5.6	4.8	4.2	6325	3370	2279
ICLR-S	67K	10.3	8.6	7.9	38.7	26.9	15.7	7.9	5.4	5.7	6946	6214	2428

4.5 ABLATION STUDY

We now conduct an ablation study using the same five datasets and evaluation metrics as in Table 1. We begin by evaluating the contribution of the GNN-based retrieval module, then examine the effect of incorporating synthetic queries, and finally assess how different negative sampling strategies influence LP-RAG’s performance.

Impact of GNN architecture. We consider four popular GNNs for link prediction: VGAE (Kipf & Welling, 2016), PEG (Wang et al., 2022), SEAL (Zhang & Chen, 2018), and NCC (Wang et al., 2024). For completeness, we also include an MLP. The results are given in Table 6.

Overall, the results confirm that a robust GNN with stronger negative link discrimination is essential for producing higher accuracy results. In contrast, an MLP, which lacks the capacity to model relationships between entities, tends to underperform even compared to NaiveRAG. Another notable

Table 6: Ablation study concerning the performance of different GNNs and the importance of synthetic queries. Here, * denotes models trained using only chunk nodes (no synthetic queries). Overall, NCN is the best performing model, and using synthetic queries is crucial.

GNN	HotpotQA-S			MuSiQue-S			MultiHop-S			RAG-QA-S			ICLR-S		
	Acc.↑	F1.↑	Tok↓	Acc.↑	F1.↑	Tok↓	Acc.↑	F1.↑	Tok↓	Acc.↑	F1.↑	Tok↓	Acc.↑	F1.↑	Tok↓
SEAL	89.28	85.12	3.2k	89.41	84.05	3.5k	89.03	87.62	3.7k	87.73	83.13	2.2k	89.14	88.23	2.5k
PEG	87.01	86.11	3.3k	85.22	83.16	3.5k	87.64	85.63	3.8k	83.14	82.63	2.2k	84.37	82.09	2.6k
VGAE	82.03	80.43	3.2k	84.63	80.50	3.7k	84.07	81.64	3.7k	83.29	80.19	2.4k	86.21	79.53	2.6k
NCN	89.32	86.29	3.2k	89.67	85.15	3.8k	89.12	86.35	3.8k	87.89	85.26	2.2k	91.16	89.51	2.4k
MLP	32.50	12.25	5.3k	43.91	22.50	5.6k	29.80	16.24	5.7k	42.58	16.80	5.7k	48.90	23.78	5.3k
VGAE*	60.50	42.82	3.9k	50.92	41.63	3.9k	40.06	22.16	4.1k	60.15	37.16	2.8k	60.15	48.60	2.8k
NCN*	69.15	42.80	3.9k	68.64	55.20	4.0k	52.15	48.05	3.8k	67.15	45.18	2.4k	72.60	48.95	2.9k

result is that VGAE achieves a result comparable to the state-of-the-art NodeRAG, even though VGAE is a much less simpler model than NCN. This suggests that even simpler GNNs can achieve high-quality chunk retrieval when trained using our approach.

Impact of synthetic queries. Our second experiment (also reported in Table 6) evaluates the impact of synthetic queries on retrieval quality. Here, the GNNs architectures were trained on graphs containing only interconnected chunks, without synthetic queries. In this setting, even the strongest GNN (i.e., NCN) performs similarly to NaiveRAG, confirming the importance of augmenting graph information with synthetic queries in our framework.

Impact of negative sampling. Recent works (Aiyappa et al., 2025) have discussed issues related uniform negative sampling in link prediction. To assess the impact of negative sampling, we compare LP-RAG using uniform vs. degree-based negative sampling (Aiyappa et al., 2025), under the setup of EXPERIMENT I. As we can observe, modern negative-sampling strategies improve the performance of LP-RAG in some cases. However, despite these improvements, their overall impact is considerably smaller than the effect of the GNN architecture. We hypothesize that this is likely due to the approximately regular structure of our query–chunk graph, which results from the use of a k -NN-based construction.

Additional results. For completeness, in Appendix D, we report further experiments regarding i) the generalization of LP-RAG to unseen documents and cross-domain transferability; ii) the effect of our chunking scheme on other RAG methods; and iii) computational performance on large-scale data.

5 CONCLUSIONS

In this paper, we propose a novel graph-based RAG framework based on link prediction. Crucially, our method relies on synthetic queries to obtain supervision signals for the link prediction GNN. Intuitively, these queries enrich the graph with fine-grained semantic cues, guiding retrieval toward passages that are not only structurally connected but also semantically relevant. Retrieval tasks are formulated as inductive link prediction over a chunk–query graph. Through extensive experiments on multiple datasets, we demonstrate that LP-RAG not only achieves a significant improvement in accuracy and F1-score compared to multiple baselines but also operates with little to moderate resources. Overall, LP-RAG demonstrates that integrating synthetic queries into RAG pipelines can significantly boost the quality of information retrieval and performance on question-answering tasks.

Limitations. As most GraphRAG methods, scalability is a major issue. As the size of the corpus grows, the number of nodes and edges can quickly reach millions or billions, leading to prohibitive storage and retrieval costs. Running graph neural networks on such large graphs is often computationally expensive and infeasible in real-time settings. In this context, adopting simple heuristics for link prediction represents a promising alternative, given their strong predictive performance.

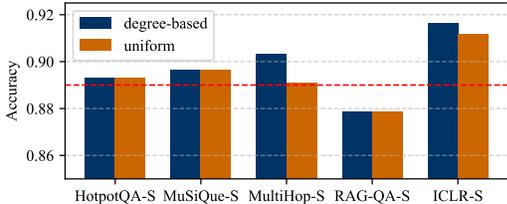


Figure 5: Impact of negative sampling on Q&A accuracy: Uniform vs. degree-based sampling.

540 ETHICS STATEMENT

541
542 We do not anticipate any immediate societal or ethical concerns arising from this work. In addition,
543 we acknowledge the use of LLMs to assist with grammar and style checks in parts of the manuscript,
544 primarily in the introduction.

546 REPRODUCIBILITY STATEMENT

547
548 To ensure the reproducibility of our work, we will release the code publicly after the review process
549 is complete, including data splits and all prompts used. Furthermore, we provide implementation
550 details in [Appendix B](#).

552 REFERENCES

- 553
554 Kingma DP Ba J Adam et al. A method for stochastic optimization. *arXiv preprint arXiv:1412.6980*,
555 1412(6), 2014.
- 556
557 Lada A Adamic and Eytan Adar. Friends and neighbors on the web. *Social networks*, 25(3):211–230,
558 2003.
- 559
560 Rachith Aiyappa, Xin Wang, Munjung Kim, Ozgur Can Seckin, Jisung Yoon, Yong-Yeol Ahn, and
561 Sadamori Kojaku. Implicit degree bias in the link prediction task. In *International Conference on
Machine Learning*, 2025.
- 562
563 Tom Brown, Benjamin Mann, Nick Ryder, and Melanie Subbiah. Language models are few-shot
564 learners. In *Advances in Neural Information Processing Systems*, 2020.
- 565
566 Tianchi Cai, Zhiwen Tan, Xierui Song, Tao Sun, Jiyan Jiang, Yunqi Xu, Yinger Zhang, and Jinjie
567 Gu. Forag: Factuality-optimized retrieval augmented generation for web-enhanced long-form
question answering. In *Conference on Knowledge Discovery and Data Mining (KDD)*, 2024.
- 568
569 Jianlv Chen, Shitao Xiao, Peitian Zhang, Kun Luo, Defu Lian, and Zheng Liu. Bge m3-embedding:
570 Multi-lingual, multi-functionality, multi-granularity text embeddings through self-knowledge dis-
tillation. *arXiv preprint arXiv:2402.03216*, 2024a.
- 571
572 Tong Chen, Hongwei Wang, Sihao Chen, Wenhao Yu, Kaixin Ma, Xinran Zhao, Hongming Zhang,
573 and Dong Yu. Dense x retrieval: What retrieval granularity should we use? In *Proceedings of
the 2024 Conference on Empirical Methods in Natural Language Processing*, pp. 15159–15177,
574 2024b.
- 575
576 Aakanksha Chowdhery, Sharan Narang, Jacob Devlin, Maarten Bosma, Gaurav Mishra, Adam
577 Roberts, Paul Barham, Hyung Won Chung, Charles Sutton, Sebastian Gehrmann, et al. Palm:
578 Scaling language modeling with pathways. *Journal of Machine Learning Research*, 24(240):
579 1–113, 2023.
- 580
581 Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt,
582 and J Larson. From local to global: a graph rag approach to query-focused summarization. *URL
https://arxiv.org/abs/2404.16130*, 2024.
- 583
584 Tao Feng, Yihang Sun, and Jiaxuan You. Grapheval: A lightweight graph-based llm framework for
585 idea evaluation. In *The Thirteenth International Conference on Learning Representations*, 2025.
- 586
587 M. Fey and J. E. Lenssen. Fast graph representation learning with PyTorch Geometric. In *Workshop
track of the International Conference on Representation Learning (ICLR)*, 2019.
- 588
589 Luyu Gao, Xueguang Ma, Jimmy Lin, and Jamie Callan. Precise zero-shot dense retrieval without
590 relevance labels. In *Proceedings of the 61st Annual Meeting of the Association for Computational
Linguistics (Volume 1: Long Papers)*, pp. 1762–1777, 2023a.
- 591
592 Yunfan Gao, Yun Xiong, Xinyu Gao, Kangxiang Jia, Jinliu Pan, Yuxi Bi, Yixin Dai, Jiawei Sun,
593 Haofen Wang, and Haofen Wang. Retrieval-augmented generation for large language models: A
survey. *arXiv preprint arXiv:2312.10997*, 2(1), 2023b.

- 594 Justin Gilmer, Samuel S Schoenholz, Patrick F Riley, Oriol Vinyals, and George E Dahl. Neural
595 message passing for quantum chemistry. In *International conference on machine learning*, pp.
596 1263–1272. PMLR, 2017.
- 597
598 Zirui Guo, Lianghao Xia, Yanhua Yu, Tu Ao, and Chao Huang. Lightrag: Simple and fast retrieval-
599 augmented generation. In *The Thirteenth Conference on Empirical Methods in Natural Language*
600 *Processing [EMNLP 2025]*, 2025.
- 601
602 Haoyu Han, Yu Wang, Harry Shomer, Kai Guo, Jiayuan Ding, Yongjia Lei, Mahantesh Halap-
603 panavar, Ryan A Rossi, Subhabrata Mukherjee, Xianfeng Tang, et al. Retrieval-augmented gen-
604 eration with graphs (graphrag). *arXiv preprint arXiv:2501.00309*, 2024a.
- 605
606 Rujun Han, Yuhao Zhang, Peng Qi, Yumo Xu, Jenyuan Wang, Lan Liu, William Yang Wang, Bonan
607 Min, and Vittorio Castelli. Rag-qa arena: Evaluating domain robustness for long-form retrieval
608 augmented question answering. *arXiv preprint arXiv:2407.13998*, 2024b.
- 609
610 Zhen Han, Anand Muralidhar, and Aditya Degala. Graphrag: Reasoning on graphs with retrieval-
611 augmented llms. In *NeurIPS Workshop on New Frontiers in Graph Learning (GLFrontiers)*, 2023.
- 612
613 Xiaoxin He, Yijun Tian, Yifei Sun, Nitesh Chawla, Thomas Laurent, Yann LeCun, Xavier Bresson,
614 and Bryan Hooi. G-retriever: Retrieval-augmented generation for textual graph understanding and
615 question answering. *Advances in Neural Information Processing Systems*, 37:132876–132907,
616 2024.
- 617
618 Xanh Ho, Anh-Khoa Duong Nguyen, Saku Sugawara, and Akiko Aizawa. Constructing a multi-hop
619 qa dataset for comprehensive evaluation of reasoning steps. *arXiv preprint arXiv:2011.01060*,
620 2020.
- 621
622 Gautier Izacard, Mathilde Caron, Lucas Hosseini, Sebastian Riedel, Piotr Bojanowski, Armand
623 Joulin, and Edouard Grave. Unsupervised dense information retrieval with contrastive learning.
624 *Transactions on Machine Learning Research*, 2022. ISSN 2835-8856.
- 625
626 Xinke Jiang, Rihong Qiu, Yongxin Xu, Wentao Zhang, Yichen Zhu, Ruizhe Zhang, Yuchen Fang,
627 Xu Chu, Junfeng Zhao, and Yasha Wang. Ragraph: A general retrieval-augmented graph learning
628 framework. In *NeurIPS 2024*, 2024.
- 629
630 Bernal Jimenez Gutierrez, Yiheng Shu, Yu Gu, Michihiro Yasunaga, and Yu Su. Hipporag: Neurobi-
631 ologically inspired long-term memory for large language models. *Advances in Neural Information*
632 *Processing Systems*, 37:59532–59569, 2024.
- 633
634 Nikhil Kandpal, Haikang Deng, Adam Roberts, Eric Wallace, and Colin Raffel. Large language
635 models struggle to learn long-tail knowledge. In *International Conference on Machine Learning*
636 *(ICML)*, 2023.
- 637
638 Jared Kaplan, Sam McCandlish, Tom Henighan, Tom B Brown, Benjamin Chess, Rewon Child,
639 Scott Gray, Alec Radford, Jeffrey Wu, and Dario Amodei. Scaling laws for neural language
640 models. *arXiv preprint arXiv:2001.08361*, 2020.
- 641
642 Savini Kashmira, Jayanaka L. Dantanarayana, Joshua Brodsky, Ashish Mahendra, Yiping Kang,
643 Krisztian Flautner, Lingjia Tang, and Jason Mars. Tobugraph: Knowledge graph-based retrieval
644 for enhanced llm performance beyond rag. *arXiv preprint arXiv:2412.05447*, 2024.
- 645
646 Yubin Kim, Chanwoo Park, Hyewon Jeong, Yik Siu Chan, Xuhai Xu, Daniel McDuff, Hyeonhoon
647 Lee, Marzyeh Ghassemi, Cynthia Breazeal, and Hae Won Park. Mdagents: an adaptive collabo-
648 ration of llms for medical decision-making. In *Proceedings of the 38th International Conference*
649 *on Neural Information Processing Systems*, 2024.
- 650
651 Thomas N Kipf and Max Welling. Variational graph auto-encoders. In *NeurIPS Workshop on*
652 *Bayesian Deep Learning*, 2016.
- 653
654 Urho Lensu. Impact of chunking granularity on accuracy and token consumption in retrieval-
655 augmented generation for question-answering. *Master’s thesis Aalto Fi*, 2025.

- 648 Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal,
649 Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktaschel, Sebastian Riedel, and Douwe
650 Kiela. Retrieval-augmented generation for knowledge-intensive NLP tasks. *Advances in neural
651 information processing systems*, 33:9459–9474, 2020.
- 652 Mufei Li, Siqi Miao, and Pan Li. Simple is effective: The roles of graphs and large language mod-
653 els in knowledge-graph-based retrieval-augmented generation. In *The Thirteenth International
654 Conference on Learning Representations*, 2025a.
- 655 Zijian Li, Qingyan Guo, Jiawei Shao, Lei Song, Jiang Bian, Jun Zhang, and Rui Wang. Graph neural
656 network enhanced retrieval for question answering of large language models. In *Proceedings of
657 NAACL 2025*, 2025b.
- 659 David Liben-Nowell and Jon Kleinberg. The link prediction problem for social networks. In *Pro-
660 ceedings of the twelfth international conference on Information and knowledge management*, pp.
661 556–559, 2003.
- 662 Jiawei Liu, Chunqiu Steven Xia, Yuyao Wang, and Lingming Zhang. Is your code generated by
663 chatGPT really correct? rigorous evaluation of large language models for code generation. In
664 *Conference on Neural Information Processing Systems*, 2023.
- 666 Jiayu Liu, Zhenya Huang, Tong Xiao, Jing Sha, Jinze Wu, Qi Liu, Shijin Wang, and Enhong Chen.
667 Socraticlm: Exploring socratic personalized teaching with large language models. In *Advances
668 in Neural Information Processing Systems*, volume 37, 2024.
- 669 Linhao Luo, Yuan-Fang Li, Gholamreza Haffari, and Shirui Pan. Reasoning on graphs: Faithful and
670 interpretable large language model reasoning. In *International Conference on Learning Repre-
671 sentations*, 2024.
- 673 Linhao Luo, Zicheng Zhao, Gholamreza Haffari, Dinh Phung, Chen Gong, and Shirui Pan. Gfm-
674 rag: graph foundation model for retrieval augmented generation. In *The thirty-ninth Conference
675 on Neural Information Processing Systems*, 2025.
- 676 Chuangtao Ma, Sriom Chakrabarti, Arijit Khan, and Bálint Molnár. Knowledge graph-based
677 retrieval-augmented generation for schema matching. *arXiv preprint arXiv:2501.08686*, 2025.
- 679 Costas Mavromatis and George Karypis. GNN-RAG: Graph neural retrieval for efficient large
680 language model reasoning on knowledge graphs. In Wanxiang Che, Joyce Nabende, Ekaterina
681 Shutova, and Mohammad Taher Pilehvar (eds.), *Findings of the Association for Computational
682 Linguistics: ACL 2025*, pp. 16682–16699, 2025.
- 683 Gabriel de Souza P Moreira, Radek Osmulski, Mengyao Xu, Ronay Ak, Benedikt Schifferer, and
684 Even Oldridge. Nv-retriever: Improving text embedding models with effective hard-negative
685 mining. *arXiv preprint arXiv:2407.15831*, 2024.
- 686 Jianmo Ni, Chen Qu, Jing Lu, Zhuyun Dai, Gustavo Hernandez Abrego, Ji Ma, Vincent Zhao,
687 Yi Luan, Keith Hall, Ming-Wei Chang, et al. Large dual encoders are generalizable retrievers. In
688 *Proceedings of the 2022 Conference on Empirical Methods in Natural Language Processing*, pp.
689 9844–9855, 2022.
- 691 Zhuoshi Pan, Qianhui Wu, Huiqiang Jiang, Xufang Luo, Hao Cheng, Dongsheng Li, Yuqing Yang,
692 Chin-Yew Lin, H. Vicky Zhao, Lili Qiu, and Jianfeng Gao. Secom: On memory construction and
693 retrieval for personalized conversational agents. In *International Conference on Representation
694 Learning*, 2025.
- 695 Boci Peng, Yun Zhu, Yongchao Liu, Xiaohe Bo, Haizhou Shi, Chuntao Hong, Yan Zhang, and
696 Siliang Tang. Graph retrieval-augmented generation: A survey. *arXiv preprint arXiv:2408.08921*,
697 2024.
- 698 Stephen E Robertson and Steve Walker. Some simple effective approximations to the 2-poisson
699 model for probabilistic weighted retrieval. In *SIGIR'94: Proceedings of the Seventeenth Annual
700 International ACM-SIGIR Conference on Research and Development in Information Retrieval,
701 organised by Dublin City University*, pp. 232–241. Springer, 1994.

- 702 Keshav Santhanam, Omar Khattab, Jon Saad-Falcon, Christopher Potts, and Matei Zaharia. Col-
703 bertv2: Effective and efficient retrieval via lightweight late interaction. In *Proceedings of the*
704 *2022 Conference of the North American Chapter of the Association for Computational Linguistics: Human Language Technologies*, pp. 3715–3734, 2022.
- 706 Parth Sarthi, Salman Abdullah, Aditi Tuli, Shubh Khanna, Anna Goldie, and Christopher D Man-
707 ning. Raptor: Recursive abstractive processing for tree-organized retrieval. In *The Twelfth Inter-*
708 *national Conference on Learning Representations*, 2024.
- 710 Franco Scarselli, Marco Gori, Ah Chung Tsoi, Markus Hagenbuchner, and Gabriele Monfardini.
711 The graph neural network model. *IEEE Transactions on Neural Networks*, 20(1):61–80, 2009.
- 712 Maximilian Stabler, Steffen Turnbull, Tobias Muller, Chris Langdon, Jorge Marx-Gomez, and Frank
713 Koster. The impact of chunking strategies on domain-specific information retrieval in rag systems.
714 In *2025 IEEE International Conference on Omni-layer Intelligent Systems (COINS)*, pp. 1–6,
715 2025. doi: 10.1109/COINS65080.2025.11125724.
- 716 W Su, Y Tang, Q Ai, Z Wu, and Y Liu. Dragin: Dynamic retrieval augmented generation
717 based on the real-time information needs of large language models. arxiv 2024. *arXiv preprint*
718 *arXiv:2403.10081*, 2024.
- 720 Yixuan Tang and Yi Yang. Multihop-rag: Benchmarking retrieval-augmented generation for multi-
721 hop queries. In *First Conference on Language Modeling*, 2024.
- 722 Harsh Trivedi, Niranjan Balasubramanian, Tushar Khot, and Ashish Sabharwal. musique: Multihop
723 questions via single-hop question composition. *Transactions of the Association for Computational*
724 *Linguistics*, 10:539–554, 2022.
- 726 Haorui Wang, Haoteng Yin, Muhan Zhang, and Pan Li. Equivariant and stable positional encoding
727 for more powerful graph neural networks. In *International Conference on Learning Representa-*
728 *tions*, 2022.
- 729 Xiyuan Wang, Haotong Yang, and Muhan Zhang. Neural common neighbor with completion for
730 link prediction. In *The Twelfth International Conference on Learning Representations*, 2024.
- 732 Zhenbang Wu, Anant Dadu, Michael Nalls, Faraz Faghri, and Jimeng Sun. Instruction tuning large
733 language models to understand electronic health records. In *Advances in Neural Information*
734 *Processing Systems 37: Datasets and Benchmarks Track*, 2024.
- 735 Tianyang Xu, Haojie Zheng, Chengze Li, Haoxiang Chen, Yixin Liu, Ruoxi Chen, and Lichao Sun.
736 NodeRAG: Structuring graph-based RAG with heterogeneous nodes. In *Submitted to ACL Rolling*
737 *Review - May 2025*, 2025. URL <https://openreview.net/forum?id=68YmiLGFrz>.
- 738 Rui Yang, Boming Yang, Xinjie Zhao, Fan Gao, Aosong Feng, Sixun Ouyang, Moritz Blum, Tian-
739 wei She, Yuang Jiang, Freddy Lecue, Jinghui Lu, and Irene Li. Graphusion: A rag framework for
740 scientific knowledge graph construction with a global perspective. In *Companion Proceedings*
741 *of the ACM on Web Conference 2025, WWW ’25*, pp. 2579–2588, New York, NY, USA, 2025.
742 Association for Computing Machinery. ISBN 9798400713316.
- 744 Zhilin Yang, Peng Qi, Saizheng Zhang, Yoshua Bengio, William W. Cohen, Ruslan Salakhutdinov,
745 and Christopher D. Manning. HotpotQA: A dataset for diverse, explainable multi-hop question
746 answering. In *Conference on Empirical Methods in Natural Language Processing (EMNLP)*,
747 2018.
- 748 Lin Yao, Luning Wang, Lv Pan, and Kai Yao. Link prediction based on common-neighbors for
749 dynamic social network. *Procedia Computer Science*, 83:82–89, 2016.
- 750 Muhan Zhang and Yixin Chen. Link prediction based on graph neural networks. *Advances in neural*
751 *information processing systems*, 31, 2018.
- 752
753
754
755

756 A LP-RAG PIPELINE EXAMPLE
757
758

759 In this section, we attempt to show a simple example of chunks returned by LP-RAG and the LLM
760 response for a given query. The pipeline followed in this experiment was the same as that reported
761 in Table 1. In red we highlight the main chunks used by LLM to generate the response.
762

763 **Box A.1: Real query from MuSiQue**
764

765 **Query:**

766 When was the publisher of Crux launched?
767

768 **LP-RAG retrieved chunks with probabilities:**

769 “Crux Ansata is a book subtitled ‘An Indictment of the Roman Catholic Church’ by H. G.
770 Wells.”, 0.94

771 “Crux Ansata is a wartime book.”, 0.87

772 “Crux Ansata has 96 pages.”, 0.92

773 “Crux Ansata was first published in 1943.”, 0.95

774 “Crux Ansata was published by Penguin Books.”, 0.91

775 “Crux Ansata was published in Hammonsworth, Great Britain.”, 0.88

776 “Crux Ansata is classified as Penguin Special No. 129.”, 0.90

777 “The U.S. edition of Crux Ansata was copyrighted.”, 0.89

778 “The U.S. edition of Crux Ansata was published in 1944.”, 0.93

779 “The U.S. edition of Crux Ansata was published by Agora Publishing Company.”, 0.86

780 “The U.S. edition of Crux Ansata was published in New York.”, 0.92

781 “The U.S. edition of Crux Ansata includes a portrait frontispiece.”, 0.90

782 “The U.S. edition of Crux Ansata includes an appendix.”, 0.87

783 “The appendix of the U.S. edition of Crux Ansata contains an interview with H. G. Wells.”,
784 0.94

785 “The interview with H. G. Wells in the U.S. edition of Crux Ansata was recorded by John
786 Rowland.”, 0.91

787 “The U.S. edition of Crux Ansata has 144 pages.”, 0.88

788 “The U.S. edition of Crux Ansata went into a third printing.”, 0.93

789 “The third printing of the U.S. edition of Crux Ansata occurred in August 1946.”, 0.89

790 “CrossGen was an American comic book publisher.”, 0.95

791 “CrossGen was an entertainment company.”, 0.88

792 **“CrossGen operated from 1998 to 2004.”, 0.95**

793 “The Walt Disney Company acquired CrossGen’s assets in 2004.”, 0.94

794 “CrossGen’s assets were designated to Disney Publishing Worldwide.”, 0.90

795 “Disney re-established the CrossGen brand in July 2010.”, 0.87

796 “Disney re-established the CrossGen brand through Marvel Comics.”, 0.91

797 “Marvel Comics announced plans to revive CrossGen titles.”, 0.89

798 “Crux is an American comic book.”, 0.86

799 **“Crux was published by CrossGen Entertainment.”, 0.98**

800 “Crux was published from May 2001 to February 2004.”, 0.88

801 “Crux was cancelled in 2004.”, 0.92

802 “Crux was cancelled due to bankruptcy.”, 0.87

803 “Crux was one of the later titles of Crossgen.”, 0.91

804 “Crux came first in a second wave of Crossgen titles.”, 0.89

805 “The second wave of Crossgen titles included Sojourn.”, 0.85

806 “The second wave of Crossgen titles included Brath.”, 0.88

807 “Crux detailed the exploits of six Atlanteans.”, 0.93

808 “The six Atlanteans were put into stasis.”, 0.90

809 “The six Atlanteans were awoken 100,000 years later.”, 0.94

807 **LLM response:**

808 The publisher of Crux was launched in 1998 by CrossGen that operated from 1998 to 2004.
809

Why does it work? During the chunk-node graph generation phase, LP-RAG interconnected most of the returned chunks in this example. In particular, the chunks [“CrossGen operated from 1998 to 2004.”, “Crux was published by CrossGen Entertainment.”, “CrossGen was an American comic book publisher.”, “Crux is an American comic book.”] were interconnected. During the synthetic query generation phase for the chunks, our model had the following queries added to the LP-RAG training graph: [“Which American comic book publisher, active between 1998 and 2004, published Crux?”], [“Which company published American comic books between 1998 and 2004, including Crux?”], [“What is Crux and who published it?”]. This combination of synthetic queries and interconnected chunks during the training stage provided LP-RAG with a high power of interpretation of the query in question in the example, thus returning the correct answer.

B EXPERIMENTAL DETAILS

B.1 DATASETS AND BASELINES

Datasets. We consider seven benchmarks:

- *HotpotQA* (Yang et al., 2018) is a multi-hop question-answering dataset where each question requires combining information from multiple documents to find the correct answer.
- *MuSiQue* (Trivedi et al., 2022) is also a multi-hop question-answering dataset that challenges models to combine information across multiple documents in a structured, step-by-step manner.
- *MultiHop-RAG* (Tang & Yang, 2024) is a multi-hop question-answering dataset that includes four distinct question types: comparison query, null query, inference query, and temporal query.
- *Arena benchmark* (Han et al., 2024b) builds on Long-form RobustQA (LFRQA), a dataset of 26K queries across 7 domains. Here, we consider the Writing, Tech, Science, and Recreation domains.
- *RAG-QA* (Han et al., 2024b) is a shortened version of the Arena Benchmark, where we selected samples from the 7 domains.
- *ICLR Papers* (Feng et al., 2025) is formed by abstracts and review decisions from paper submissions to the ICLR conferences between 2021 and 2023. We use an LLM to generate questions and answers to tailor it to the Q&A task.
- *2WikiMultiHopQA (2Wiki)* (Ho et al., 2020) is a multi-hop QA dataset that requires reasoning over multiple Wikipedia articles to answer questions. The dataset consists of 192k questions, which are designed to be answerable using information from 2 or 4 articles.

Baselines. In the following, we provide a brief overview of the baselines considered in the paper.

- *NaiveRAG* (Lewis et al., 2020) represents a simple baseline for RAG systems. It first divides documents into several text chunks and encode them into a vector space utilizing text embeddings. Then retrieve related text chunks based on similarity of query representations.
- *HyDe* (Gao et al., 2023a) improves upon traditional RAG systems. In particular, HyDe uses an LLM to generate “synthetic answers” from the input query. These “synthetic answers” are transformed into embeddings and used to search for the most similar chunks.
- *GraphRAG* (Edge et al., 2024) segments the input document into chunks and extracts the entities and their relationships to create a graph. This graph is then divided into multiple communities at different levels. At query time, GraphRAG identifies the relevant entities from the question and synthesizes answers by referencing these corresponding community summaries.
- *LightRAG* (Guo et al., 2025) is an improved approach based on GraphRAG, designed to minimize computational overhead while enhancing the comprehensiveness of retrieved information through dual-level retrieval. This leads to more efficient retrieval and a better balance between effectiveness and speed compared to GraphRAG.
- *NodeRAG* (Xu et al., 2025) is a graph-centric approach that leverages heterogeneous graphs.
- *BM25* (Robertson & Walker, 1994) is a classic information retrieval method based on the probabilistic model that ranks a set of documents based on the query terms frequency appearing in each document.

- *Contriever* (Izacard et al., 2022) trains a dense retriever with contrastive learning on a large-scale corpus to retrieve relevant documents for a given query.
- *GTR* (Ni et al., 2022) develops a scale-up T5-based dense retriever that could generalize across different datasets and domains.
- *ColBERTv2* (Santhanam et al., 2022) is a state-of-the-art dense retriever that couples an aggressive residual compression mechanism with a denoised supervision strategy to simultaneously improve the retrieval quality.
- *RAPTOR* (Sarathi et al., 2024) is an LLM-augmented retriever that recursively embeds, clusters, and summarizes chunks of text, constructing a tree with differing levels of summarization to enable accurate retrieval.
- *Proposition* (Chen et al., 2024b) enhances the performance of dense retrievers by leveraging LLMs to generate a natural language proposition that captures the essential information of the document.
- *HippoRAG* (Jimenez Gutierrez et al., 2024) is a state-of-the-art, training-free graph-enhanced retriever that uses the Personalized PageRank algorithm to assess entity relevance to a query and performs multihop retrieval on a document-based knowledge graph. It can be directly applied to various datasets.
- *GFM-RAG* (Luo et al., 2025) uses a Graph Foundation Model (GFM) to reason over a knowledge-graph index built from documents. The model is pretrained at scale (60 KGs, 14M triples + 700k documents).
- *SubgraphRAG* (Li et al., 2025a) retrieves relevant subgraphs from a knowledge graph (KG) using a lightweight multilayer perceptron and a parallel triple-scoring mechanism, while encoding directional structural distances to improve retrieval effectiveness. Then, those subgraphs (triples) are fed into an LLM, which reasons over them to generate grounded and explainable answers.
- *G-retriever* (He et al., 2024) works by: (1) indexing graph nodes and edges using embeddings; (2) retrieving the most relevant elements based on similarity when given a query; (3) constructing a relevant subgraph by formulating it as a Steiner Tree problem to avoid context explosion; and (4) using an LLM to generate an answer with soft prompt tuning based on that subgraph.

B.2 DETAILS ON EXPERIMENT I

In this section, we provide more details about the evaluation setup for the experiments reported in Tables [1, and 6], and about the hyperparameters used in all GNNs.

LP-RAG was implemented using PyTorch, with all experiments conducted on a machine with 32GB RAM, Intel Core I7-13700 30mb 2.5ghz, and a single NVIDIA RTX 2060 super with 8GB. In addition, we used LLaMA 3.3-70B with temperature 0 and API calls from groq API.

For MuSiQue, we use the “ans” version. For the other datasets, we use the version available in their respective repositories. We randomly sampled 20 documents from each dataset, with the exception of the ICLR papers, where we sampled 50 documents since it is much smaller.

Table 7: Hyperparameters used for the link prediction methods.

GNN	LR	WD	layers	epochs	h-dim
VGAE	10^{-2}	10^{-4}	2	400	32
PEG	10^{-2}	10^{-4}	2	400	32
NCN	0.0043	10^{-8}	1	100	256
SEAL	10^{-4}	10^{-8}	3	50	32
MLP*	10^{-3}	$5 * 10^{-4}$	2	1000	1000

Regarding the configuration of each GNN, Table 7 shows the used hyperparameters. To train the GNNs, we employ the Adam optimizer (Adam et al., 2014). We use a uniform random negative sampling strategy. We considered chunks with a confidence level greater than 50% ($\tau = 0.5$) assigned by the GNN to generate the response.

B.3 DETAILS ON EXPERIMENT II

For Experiment II, we use NCN with the same hyperparameter choice reported in Table 7. We also use the same negative sampling, Adam optimizer, and chunk selection criteria from EXPERIMENT I. Also, we use `gpt-4o-mini` with temperature 0 as LLM with calls to the OpenAI API.

For Arena-Writing, we consider 11,250 documents for chunking, and 2,693 questions. For Arena-Science, we consider 5,283 documents and 1,403 questions. For Arena-Tech, we consider 8,438 documents and 2,063 questions. Finally, for Arena-Recreation, we consider 4,341 documents and 2,089 questions. The baseline results reported in Table 2 were collected from (Xu et al., 2025).

B.4 DETAILS ON EXPERIMENT III

For EXPERIMENT III, we also use NCN as link predictor with uniform negative sampling. Table 8 shows the hyperparameters for each dataset. We use `gpt-4o-mini` with temperature 0 as LLM.

Table 8: Hyperparameters for NCN used in Experiment III.

dataset	LR	WD	layers	epochs	h-dim
MuSiQue	0.0043	10^{-8}	1	1000	256
HotpotQA	0.0043	10^{-8}	3	1000	256
2wiki	0.0085	10^{-8}	3	1000	32

MuSiQue, HotpotQA, and 2wiki have 6119, 9221, 11656 documents, respectively. Each dataset contains 1000 documents for test. To train LP-RAG, we use the same test split reported from Luo et al. (2025). The baseline results reported in Table 3 and Table 4 were collected from (Luo et al., 2025).

C USED PROMPTS

In this section, we provide all the prompts used during the LP-RAG experiments. Note that, overall, we adopted a few-shot example instruction prompting strategy. This allowed us to have more control over the LLM output, making the task of retrieving information easier via Regex. For example, by specifying in the prompt that we want the output of the chunk extraction step to be `[chunk]`, we can force LLM to add the characters `[and]` to each chunk, which allows for very easy string regex searching. One drawback of using this technique is that it significantly increases LLM’s input token consumption, which can result in higher additional costs for users of paid APIs, such as openAI. However, openAI itself is already addressing this issue by implementing the cached-prompt strategy.

972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025

Box C.1: Chunk extraction prompt

—Role: System—

You are required to act as an AI annotator and extract the Chunks embedded in the sentences of the provided paragraph text. Below, you will be given a paragraph from a text. You need to break it down sentence by sentence and extract the Chunks embedded in each sentence. The extracted Chunks can be an idea, argument, or fact. Each sentence may contain one or more Chunks to be extracted. The extracted Chunks should be as granular as possible to ensure they cannot be further broken down.

When extracting Chunks from a sentence, pay attention to the context within the paragraph. Replace pronouns with the nouns they represent and complete any omitted sentence components to ensure the independence of the Chunks is not compromised. This means that each extracted Chunk should not contain pronouns whose referents cannot be found within that Chunk.

Below is an example interaction that can serve as a reference for format and method of extracting Chunks:

System’s Input:

[The Start of Paragraph text]

Pakistan Super League (Urdu: PSL) is a Twenty20 cricket league, founded in Lahore on 9 September 2015 with five teams and now comprises six teams. Instead of operating as an association of independently owned teams, the league is a single entity in which each franchise is owned and controlled by investors.

[The End of Paragraph text]

Your Answer:

[Sentence 1]

Pakistan Super League (Urdu: PSL) is a Twenty20 cricket league, founded in Lahore on 9 September 2015 with five teams and now comprises six teams.

[Extracted Chunks in Sentence 1]

[Pakistan Super League (PSL) is a Twenty20 cricket league.]
[Pakistan Super League (PSL) was founded in Lahore on 9 September 2015.]
[Pakistan Super League (PSL) was founded with five teams.]
[Pakistan Super League (PSL) now comprises six teams.]

[Sentence 2]

Instead of operating as an association of independently owned teams, the league is a single entity in which each franchise is owned and controlled by investors.

[Extracted Chunks in Sentence 2]

[Pakistan Super League (PSL) does not operate as an association of independently owned teams.]
[Pakistan Super League (PSL) operates as a single entity.]
[Each franchise in the Pakistan Super League (PSL) is owned by investors.]
[Each franchise in the Pakistan Super League (PSL) is controlled by investors.]

—Role: User—

[The Start of Paragraph text]

{Your Text Here}

[The End of Paragraph text]

1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079

Box C.2: Query response prompt

—Role: System—

You are a through assistant responding to questions based on retrieved information. Below, you’ll find a bag of chunks and a query. Your job is to answer the query using only the information contained in the chunks. If the answer isn’t in the chunks, simply answer: “I don’t know.”

—Role: User—

[Bag of chunks]
{Retrieved chunks}

[Query]
{Your query}

Box C.3: Synthetic query generation prompt

—Role: System—

You are required to act as an AI annotator and generate questions in the provided paragraph chunks. Below, you will be given a bage of chunks from a paragraph. You need to generate two questions about it for each chunk. The generated two questions need to be like a human made question and each chunk may contain two questions. The question generated should be as similar as possible to a human question.

When generating the two questions from a chunk, pay attention to the context within the chunk.

Below is an example interaction that can serve as a reference for format and method of generate questions:

System’s Input:

[The Start bag of chunks]

[Chunk 1]

We propose a model-based reinforcement learning (MBRL) approach for continuous action spaces.

[Chunk 2]

Bthardamz is only accessible during the quest The Only Cure.

[The End bag of chunks]

Your Answer:

[Questions Chunk 1]

[What type of reinforcement learning approach was proposed?]

[What type of action spaces does the proposed approach target?]

[Questions Chunk 2]

[When can Bthardamz be accessed?]

[What quest must be completed to access Bthardamz?]

—Role: User—

[The Start bag of chunks]

{Your chunks here}

[The End bag of chunks]

D ADDITIONAL EXPERIMENTS

D.1 EFFICIENCY

In this section, we compare the computational efficiency of LP-RAG against NodeRAG (Xu et al., 2025) on the Arena benchmarks. For indexing time, we consider the time to extract the chunks, plus the time to generate the synthetic queries, plus the time to train the GNN. Corpus size is in total tokens; storage usage comprises the size of the final generated graph plus the parameters of the GNN. Avg Query time is the average response time of the entire pipeline (in seconds).

Table 9: Performance metrics for LP-RAG method, including Indexing Time, Storage Usage, Avg Query Time, and Retrieval Tokens across Arena datasets.

Dataset	Corpus size	Index time		Storage usage		Avg Query time		Avg retrieved tokens	
		NodeRAG	LP-RAG	NodeRAG	LP-RAG	NodeRAG	LP-RAG	NodeRAG	LP-RAG
A. Writing	1.82M	13min	183min	157MB	175MB	5.40s	6.32s	3373	4219
A. Tech	1.72M	14min	165min	139MB	168MB	6.74s	7.98s	3821	4863
A. Science	1.43M	17min	161min	111MB	157MB	8.85s	8.69s	4284	4188
A. Recreation	0.93M	10min	152min	80MB	143MB	6.90s	7.64s	3448	4103

Table 9 presents the system performance of the NodeRAG method and our proposed approach. Compared to NodeRAG, LP-RAG achieves comparable performance in terms of query time, storage usage, and retrieved tokens.

D.2 IMPACT OF CHUNKING STRATEGY

The chunking strategy can be considered a data preprocessing step and therefore can impact the method’s performance. In this experiment, we analyzed whether our chunk strategy could benefit other baselines. We used the chunks extracted from the samples used in EXPERIMENT I to feed all the baselines and we report the macro accuracy found.

Table 10: Macro accuracy using our chunk strategy as data preprocessing for the baselines. LP-RAG results are from Table 1.

Method	HotpotQA-S	MuSiQue-S	MultiHop-S	RAG-QA-S	ICLR-S
NaiveRAG	18.33	15.56	16.67	12.78	11.11
HyDe	25.46	21.19	36.50	32.67	37.69
LightRAG	71.25	60.62	64.25	61.20	66.62
NodeRAG	83.31	62.29	70.64	67.05	74.43
LP-RAG	89.32	89.67	89.12	87.89	91.16

As we can see in Table 10, our chunk strategy does not show a significant gain for the baselines; in fact, it’s the opposite. All baselines showed lower accuracy than those reported in Table 1. The most impacted baseline was NaiveRAG, with all results falling below 20%. We believe that our short chunks with atomic information are too small for similarity-based methods to correctly connect them with a query. Larger chunks provide more information, and traditional RAG models can take advantage of this to generate a more accurate response, which is not the case when they use our chunking strategy.

D.3 GENERALIZATION TO UNSEEN DOCUMENTS (SMALL-DATA REGIME)

In this section, we evaluate the generalizability of LP-RAG by conducting domain-specific generalization on data not seen during training. For each domain-specific LP-RAG acquired during EXPERIMENT I, we select 50 completely new samples. For this new data, we only construct the chunk graph, without fine-tuning the model. We also re-evaluated the baselines with the same 50 samples. In the end, we calculated the macro accuracy.

As can be seen in Table 11, LP-RAG is able to generalize to new documents not seen during training. In fact, macro accuracy has a significant decay compared to the results in Table 1, but our method is still superior in all datasets, especially MuSiQue, which had a 16% gain compared to NodeRAG.

Table 11: Generalization to unseen documents.

Method	HotpotQA-S	MuSiQue-S	MultiHop-S	RAG-QA-S	ICLR-S
NaiveRAG	52.00	42.00	38.00	54.00	64.00
HyDe	64.00	68.00	66.00	62.00	70.00
LightRAG	74.00	62.00	68.00	66.00	72.00
NodeRAG	84.00	66.00	74.00	68.00	72.00
LP-RAG	86.00	82.00	84.00	82.00	84.00

D.3.1 CROSS-DOMAIN TRANSFERABILITY

To demonstrate the transferability of LP-RAG, we consider the retrieval performance (R@2 and R@5) of LP-RAG on two datasets following the setup of Experiment III. In particular, we now take the LP-RAG model trained on the MuSiQue dataset and evaluate it on HotpotQA and 2Wiki.

Table 12: Retrieval performance comparison of LP-RAG trained only using the MuSiQue dataset.

Method	HotpotQA		2Wiki	
	R@2	R@5	R@2	R@5
BM25	55.4	72.2	51.8	61.9
Contriever	57.2	75.5	56.0	57.5
GTR	59.4	73.3	60.2	67.0
ColBERTv2	64.7	79.3	59.2	68.2
RAPTOR	58.1	75.9	56.9	63.0
Proposition	58.7	71.1	56.4	63.4
GraphRAG (MS)	58.3	76.6	61.6	77.3
LightRAG	38.8	54.7	51.0	67.9
HippoRAG (Contriever)	59.0	76.2	71.5	89.5
HippoRAG (ColBERTv2)	60.5	77.9	73.5	90.4
SubgraphRAG	61.5	73.0	63.3	71.7
G-retriever	53.3	65.5	60.8	67.5
GFM-RAG	68.8	81.8	84.4	89.6
LP-RAG	65.4	78.3	75.9	91.6

As shown in Table 12, LP-RAG is the best model in 1/4 cases and the second-best in the remaining ones — surpassing models like HippoRAG by a large margin. It is important to note that GFM-RAG is pre-trained using a larger number of documents.