

000
001
002
003
004
005
006
007
008
009
010
011
012
013
014
015
016
017
018
019
020
021
022
023
024
025
026
027
028
029
030
031
032
033
034
035
036
037
038
039
040
041
042
043
044
045
046
047
048
049
050
051
052
053

SIMPLEMEM: EFFICIENT LIFELONG MEMORY FOR LLM AGENTS

Anonymous authors
Paper under double-blind review

ABSTRACT

To support long-term interaction in complex environments, LLM agents require memory systems that manage historical experiences. Existing approaches either retain full interaction histories via passive context extension, leading to substantial redundancy, or rely on iterative reasoning to filter noise, incurring high token costs. To address this challenge, we introduce SimpleMem, an efficient memory framework based on semantic lossless compression. We propose a three-stage pipeline designed to maximize information density and token utilization: (1) Semantic Structured Compression, which distills unstructured interactions into compact, multi-view indexed memory units; (2) Online Semantic Synthesis, an intra-session process that instantly integrates related context into unified abstract representations to eliminate redundancy; and (3) Intent-Aware Retrieval Planning, which infers search intent to dynamically determine retrieval scope and construct precise context efficiently. Experiments on benchmark datasets show that our method consistently outperforms baseline approaches in accuracy, retrieval efficiency, and inference cost, achieving an average F1 improvement of 26.4% in LoCoMo while reducing inference-time token consumption by up to 30x, demonstrating a superior balance between performance and efficiency.

1 INTRODUCTION

Large Language Model (LLM) agents have recently demonstrated remarkable capabilities across a wide range of tasks (Xia et al., 2025; Team et al., 2025; Qiu et al., 2025). However, constrained by fixed context windows, existing agents exhibit significant limitations when engaging in long-context and multi-turn interaction scenarios (Liu et al., 2023; Wang et al., 2024a; Liu et al., 2025; Hu et al., 2025; Tu et al., 2025). To facilitate reliable long-term interaction, LLM agents require robust memory systems to efficiently manage and utilize historical experience (Dev & Taranjeet, 2024; Fang et al., 2025; Wang & Chen, 2025; Tang et al., 2025; Yang et al., 2025; Ouyang et al., 2025).

While recent research has extensively explored the design of memory modules for LLM agents, current systems still suffer from suboptimal retrieval efficiency and low token utilization (Fang et al., 2025; Hu et al., 2025). On one hand, many existing systems maintain complete interaction histories through full-context extension (Li et al., 2025; Zhong et al., 2024). However, this approach introduces substantial redundant information (Hu et al., 2025). Specifically, during long-horizon interactions, user inputs and model responses accumulate substantial low-entropy noise (e.g., repetitive logs, non-task-oriented dialogue), which degrades the effective information density of the memory buffer. This redundancy adversely affects memory retrieval and downstream reasoning, often leading to middle-

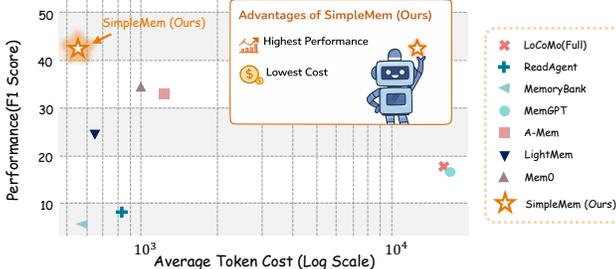


Figure 1: Performance vs. Efficiency Trade-off. Comparison of Average F1 Score against Average Token Cost (Log Scale) on the LoCoMo benchmark. SimpleMem occupies the ideal top-left position, achieving high accuracy with minimal token consumption.

context degradation phenomena (Liu et al., 2023), while also incurring significant computational overhead during retrieval and secondary inference. On the other hand, some agentic frameworks mitigate noise through online filtering based on iterative reasoning procedures (Yan et al., 2025; Packer et al., 2023). Although such approaches improve retrieval relevance, they rely on repeated inference cycles, resulting in substantial computational cost, including increased latency and token usage. As a result, neither paradigm achieves efficient allocation of memory and computation resources.

To address these limitations, we introduce **SimpleMem**, an efficient memory framework inspired by the Complementary Learning Systems (CLS) theory (Kumaran et al., 2016) and built around structured semantic compression. The objective of SimpleMem is to improve information efficiency under fixed context and token budgets. We develop a three-stage pipeline that supports dynamic memory compression, organization, and adaptive retrieval: (1) **Semantic Structured Compression**: we apply a semantic density gating mechanism via LLM-based qualitative assessment. The system uses the foundation model as a semantic judge to estimate information gain relative to history, preserving only content with high downstream utility. Retained information is reformulated into compact memory units and indexed jointly using dense semantic embeddings, sparse lexical features, and symbolic metadata. (2) **Online Semantic Synthesis**: inspired by biological consolidation and optimized for real-time interaction, we introduce an intra-session process that reorganizes memory on-the-fly. Related memory units are synthesized into higher-level abstract representations during the write phase, allowing repetitive or structurally similar experiences to be denoised and compressed immediately. (3) **Intent-Aware Retrieval Planning**: we employ a planning-based retrieval strategy that infers latent search intent to determine retrieval scope dynamically. The system constructs a precise context by querying multiple indexes (symbolic, semantic, lexical) and unifying results through ID-based deduplication, balancing structural constraints and semantic relevance without complex linear weighting.

Our primary contribution is SimpleMem, an efficient memory framework grounded in structured semantic compression, which improves information efficiency through principled memory organization, online synthesis, and intent-aware planning. As shown in Figure 1, our empirical experiments demonstrate that SimpleMem establishes a new state-of-the-art with an F1 score, outperforming strong baselines like Mem0 by 26.4%, while reducing inference token consumption by $30\times$ compared to full-context models.

2 THE SIMPLEMEM ARCHITECTURE

In this section, we present **SimpleMem**, which operates through a three-stage pipeline (see Figure 2 for the detailed architecture). Specifically, we first describe the *Semantic Structured Compression*, which utilizes implicit semantic gating to filter redundant interaction content and reformulate raw dialogue streams into compact memory units. Next, we describe *Online Semantic Synthesis*, an on-the-fly mechanism that instantly synthesizes related memory units into higher-level abstract representations. Finally, we present *Intent-Aware Retrieval Planning*, which infers latent search intent to dynamically adjust retrieval scope.

2.1 SEMANTIC STRUCTURED COMPRESSION

A primary bottleneck in long-term interaction is *context inflation*, the accumulation of raw, low-entropy dialogue. For example, a large portion of interaction segments in the real-world consists of phatic chit-chat or redundant confirmations, which contribute little to downstream reasoning but consume substantial context capacity. To address this, we introduce a mechanism to actively filter and restructure information at the source.

Specifically, first, incoming dialogue is segmented into overlapping sliding windows W of fixed length, where each window represents a short contiguous span of recent interaction. These windows serve as the basic units for processing.

Unlike traditional approaches that rely on rigid heuristic filters or separate classification models, we employ an implicit semantic density gating mechanism integrated directly into the generation process. We model the information assessment as an instruction-following task performed by the foundation model itself. The system leverages the attention mechanism of the LLM f to identify high-entropy spans within the window W relative to the immediate history H .

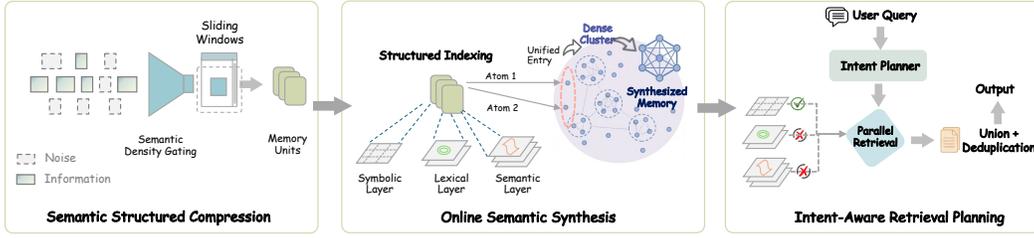


Figure 2: The SimpleMem Architecture. SimpleMem follows a three-stage pipeline: (1) Semantic Structured Compression filters low-utility dialogue and converts informative windows into compact, context-independent memory units. (2) Online Semantic Synthesis consolidates related fragments during writing, maintaining a compact and coherent memory topology. (3) Intent-Aware Retrieval Planning infers search intent to adapt retrieval scope and query forms, enabling parallel multi-view retrieval and token-efficient context construction.

Formally, we define the gating function Φ_{gate} not as a binary classifier, but as a generative filter resulting from the model’s extraction capability:

$$\Phi_{\text{gate}}(W) \rightarrow \{m_k\} \quad \text{s.t.} \quad |\{m_k\}| \geq 0 \quad (1)$$

Here, the generation of an empty set (\emptyset) inherently signifies a low-density window (e.g., pure phatic chitchat), effectively discarding it without explicit threshold tuning. This instruction-driven gating allows the system to capture subtle semantic nuances while naturally filtering redundancy through the model’s semantic compression objectives.

For windows containing valid semantic content, the system performs a unified *De-linearization Transformation* \mathcal{F}_θ . Instead of sequential independent modules, we optimize the extraction, coreference resolution, and temporal anchoring as a joint generation task. The transformation projects the raw dialogue window W directly into a set of context-independent memory units $\{m_k\}$:

$$\{m_k\} = \mathcal{F}_\theta(W; H) \approx (g_{\text{time}} \circ g_{\text{coref}} \circ g_{\text{ext}})(W). \quad (2)$$

In this unified pass, the model follows strict instructional constraints to: (1) resolve ambiguous pronouns to specific entity names (g_{coref}), (2) convert relative temporal expressions into absolute ISO-8601 timestamps (g_{time}), and (3) atomize complex dialogue flows into self-contained factual statements. By aggregating all resulting units m_k across sliding windows, we obtain the complete memory set \mathcal{M} .

Following compression, the system organizes the memory units to support storage and retrieval. This stage consists of two synergistic processes: (i) structured multi-view indexing for precise access, and (ii) online semantic synthesis for minimizing redundancy at the point of creation.

To support flexible and high-fidelity retrieval, each memory unit is indexed through three complementary representations. First, at the *Semantic Layer*, we map the entry to a dense vector space s_k using embedding models, capturing abstract meaning to enable fuzzy matching (e.g., retrieving "latte" when querying "hot drink"). Second, the *Lexical Layer* utilizes an inverted index-based sparse representation. This acts as a high-dimensional sparse vector l_k focusing on exact keyword matches and rare proper nouns, ensuring that specific entities are not diluted in dense vector space. Third, the *Symbolic Layer* extracts structured metadata, such as timestamps and entity types, to enable deterministic filtering logic. Formally, for a given memory unit m_k , these projections form the comprehensive indexing \mathcal{I} :

$$\mathcal{I}(m_{t,k}) = \begin{cases} s_k = E_{\text{dense}}(m_k) & \text{(Semantic Layer)} \\ l_k = E_{\text{sparse}}(m_k) & \text{(Lexical Layer)} \\ r_k = E_{\text{sym}}(m_k) & \text{(Symbolic Layer)} \end{cases} \quad (3)$$

This architecture allows the system to flexibly query information based on conceptual similarity, exact keyword matches, or structured metadata constraints.

2.2 ONLINE SEMANTIC SYNTHESIS

While this multi-view indexing strategy facilitates access, naively accumulating raw extractions leads to fragmentation, causing the memory structure to grow in a purely additive and unregulated

manner that fails to adapt in real time to the evolving semantic context of an ongoing interaction. To address this, we introduce *Online Semantic Synthesis*, an intra-session consolidation mechanism. Unlike traditional systems that rely on asynchronous background maintenance, SimpleMem performs synthesis on-the-fly during the write phase. The model analyzes the stream of extracted facts within the current session scope and synthesizes related fragments into unified, high-density entries before they are committed to the database.

Formally, we define this synthesis as a transformation function \mathcal{F}_{syn} that maps a set of new observations O_{session} to a consolidated memory entry $\mathcal{F}_{\text{syn}}(O_{\text{session}}, \mathcal{C}_{\text{context}}; f)$, where $\mathcal{C}_{\text{context}}$ represents the current conversational context. This operation denoises the input by merging scattered details into a coherent whole. For instance, rather than storing three separate fragments like "User wants coffee", "User prefers oat milk", and "User likes it hot", the synthesis layer consolidates them into a single, comprehensive entry: "User prefers hot coffee with oat milk". This proactive synthesis ensures that the memory topology remains compact and free of redundant fragmentation, significantly reducing the burden on the retrieval system during future interactions.

2.3 INTENT-AWARE RETRIEVAL PLANNING

After memory entries are organized, the final challenge is to retrieve relevant information under constrained context budgets. Standard retrieval approaches typically fetch a fixed number of entries, which often results in recall failure for complex queries or token wastage for simple ones. To address this, we introduce *Intent-Aware Retrieval Planning*, a mechanism that dynamically determines the retrieval scope and depth by inferring the user’s latent search intent.

Unlike systems that rely on scalar complexity classifiers, SimpleMem leverages the reasoning capabilities of the LLM to generate a comprehensive retrieval plan. Given a query q and history H , the planning module \mathcal{P} acts as a reasoner to decompose the information needs and estimate the necessary search depth d :

$$\{q_{\text{sem}}, q_{\text{lex}}, q_{\text{sym}}, d\} \sim \mathcal{P}(q, H) \quad (4)$$

where q_{sem} , q_{lex} , and q_{sym} are optimized queries for semantic, lexical, and symbolic retrieval respectively. The parameter d represents the *adaptive retrieval depth*, which reflects the estimated complexity of the query. Based on d , the system utilizes a candidate limit n (where $n \propto d$) to balance recall coverage against context window constraints.

Guided by this plan, the system executes a parallel multi-view retrieval. We simultaneously query all three index layers defined in Section 2.1, imposing the quantity limit n on each path:

$$\begin{aligned} \mathcal{R}_{\text{sem}} &= \text{Top-}n(\cos(E(q_{\text{sem}}), E(m_i)) \mid m_i \in \mathcal{M}) \\ \mathcal{R}_{\text{lex}} &= \text{Top-}n(\text{BM25}(q_{\text{lex}}, m_i) \mid m_i \in \mathcal{M}) \\ \mathcal{R}_{\text{sym}} &= \text{Top-}n(\{m_i \in \mathcal{M} \mid \text{Meta}(m_i) \models q_{\text{sym}}\}) \end{aligned} \quad (5)$$

Here, each view captures distinct relevance signals: \mathcal{R}_{sem} retrieves based on dense embedding similarity; \mathcal{R}_{lex} matches exact keywords or proper nouns; and \mathcal{R}_{sym} filters entries based on structured metadata constraints.

Finally, we construct the context \mathcal{C}_q by merging the results from these three views using a set union operation. This step naturally deduplicates overlapping entries, ensuring a comprehensive yet compact context:

$$\mathcal{C}_q = \mathcal{R}_{\text{sem}} \cup \mathcal{R}_{\text{lex}} \cup \mathcal{R}_{\text{sym}} \quad (6)$$

This hybrid approach ensures that strong signals from any view are preserved, allowing the system to adaptively scale its retrieval volume n based on the inferred depth d .

3 EXPERIMENTS

In this section, we evaluate SimpleMem on the benchmark to answer the following research questions: (1) Does SimpleMem outperform other memory systems in complex long-term reasoning understanding tasks? (2) Can SimpleMem achieve a superior trade-off between retrieval accuracy and token consumption? (3) How effective are the proposed components? (4) What factors account for the observed performance and efficiency gains?

Table 1: Performance on the LoCoMo benchmark with High-Capability Models (GPT-4.1 series and Qwen3-Plus). SimpleMem achieves superior efficiency-performance balance.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average		Token Cost
		F1	BLEU									
GPT-4.1-mini	LoCoMo	25.02	21.62	12.04	10.63	19.05	17.07	18.68	15.87	18.70	16.30	16,910
	ReadAgent	6.48	5.6	5.31	4.23	7.66	6.62	9.18	7.91	7.16	6.09	643
	MemoryBank	5.00	4.68	5.94	4.78	5.16	4.52	5.72	4.86	5.46	4.71	432
	MemGPT	17.72	16.02	19.44	16.54	11.29	10.18	25.59	24.25	18.51	16.75	16,977
	A-Mem	25.06	17.32	51.01	44.75	13.22	14.75	41.02	36.99	32.58	28.45	2,520
	LightMem	24.96	21.66	20.55	18.39	19.21	17.68	33.79	29.66	24.63	21.85	612
	Mem0	30.14	27.62	48.91	44.82	16.43	14.94	41.3	36.17	34.20	30.89	973
	SimpleMem	43.46	38.82	58.62	50.10	19.76	18.04	51.12	43.53	43.24	37.62	531
GPT-4o	LoCoMo	28.00	18.47	9.09	5.78	16.47	14.80	61.56	54.19	28.78	23.31	16,910
	ReadAgent	14.61	9.95	4.16	3.19	8.84	8.37	12.46	10.29	10.02	7.95	805
	MemoryBank	6.49	4.69	2.47	2.43	6.43	5.30	8.28	7.10	5.92	4.88	569
	MemGPT	30.36	22.83	17.29	13.18	12.24	11.87	40.16	36.35	25.01	21.06	16,987
	A-Mem	32.86	23.76	39.41	31.23	17.10	15.84	44.43	38.97	33.45	27.45	1,216
	LightMem	28.15	21.83	36.53	29.12	13.38	11.54	33.76	28.02	27.96	22.63	645
	Mem0	35.13	27.56	52.38	44.15	17.73	15.92	39.12	35.43	36.09	30.77	985
	SimpleMem	35.89	32.83	56.71	20.57	18.23	16.34	45.41	39.25	39.06	27.25	550
Qwen3-Plus	LoCoMo	24.15	18.94	16.57	13.28	11.81	10.58	38.58	28.16	22.78	17.74	16,910
	ReadAgent	9.52	6.83	11.22	8.15	5.41	5.23	9.85	7.96	9.00	7.04	742
	MemoryBank	5.25	4.94	1.77	6.26	5.88	6.00	6.90	5.57	4.95	5.69	302
	MemGPT	25.80	17.50	24.10	18.50	9.50	7.80	40.20	42.10	24.90	21.48	16,958
	A-Mem	26.50	19.80	46.10	35.10	11.90	11.50	43.80	36.50	32.08	25.73	1,427
	LightMem	28.95	24.13	42.58	38.52	16.54	13.23	40.78	36.52	32.21	28.10	606
	Mem0	32.42	21.24	47.53	39.82	17.18	14.53	46.25	37.52	35.85	28.28	1,020
	SimpleMem	33.74	29.04	50.87	43.31	18.41	16.24	46.94	38.16	37.49	31.69	583

Table 2: Performance comparison on the LongMemEval benchmark. The evaluation uses gpt-4.1-mini as the judge. SimpleMem achieves the best overall performance while maintaining balanced capabilities across different sub-tasks.

Model	Method	Temporal	Multi-Session	Knowledge-Update	Single-Session-User	Single-Session-Assistant	Single-Session-Preference	Average
GPT-4.1-mini	Full-context	27.06%	30.08%	41.03%	47.14%	32.14%	60.00%	39.57%
	Mem0	40.60%	50.37%	69.23%	87.14%	48.21%	63.33%	59.81%
	LightMem	85.71%	47.37%	92.30%	88.57%	21.43%	76.67%	68.67%
	SimpleMem	83.46%	60.92%	79.48%	85.71%	75.00%	76.67%	76.87%
GPT-4.1	Full-context	51.88%	39.10%	70.51%	65.71%	96.43%	16.67%	56.72%
	Mem0	43.61%	54.89%	75.64%	54.29%	39.29%	83.33%	58.51%
	LightMem	84.96%	57.89%	89.74%	87.14%	71.43%	70.00%	76.86%
	SimpleMem	86.47%	81.20%	80.76%	98.57%	76.79%	80.00%	83.97%

3.1 EXPERIMENTAL SETUP

Benchmark Dataset. We evaluate performance on the LoCoMo (Maharana et al., 2024) and LongMemEval-S (Wu et al., 2024) benchmarks. Brief descriptions are provided below, with additional details in Appendix B.

LoCoMo (Maharana et al., 2024) is specifically designed to test the limits of LLMs in processing long-term conversational dependencies. The dataset comprises conversation samples ranging from 200 to 400 turns, containing complex temporal shifts and interleaved topics. The evaluation set consists of 1,986 questions categorized into four distinct reasoning types: (1) multi-hop reasoning; (2) temporal reasoning; (3) open Domain; (4) single hop.

LongMemEval-S (Wu et al., 2024) features extreme context lengths that pose severe challenges for memory systems. Unlike standard benchmarks, it requires precise answer localization across multiple sub-categories (e.g., temporal events, user preferences) within exceptionally long interaction histories. We use gpt-4.1-mini to evaluate answer correctness against ground-truth references, labeling responses as CORRECT or WRONG based on semantic and temporal alignment. The full evaluation prompt is provided in Appendix A.4.

Baselines. We compare SimpleMem with representative memory-augmented systems: LO-COMO (Maharana et al., 2024), READAGENT (Lee et al., 2024), MEMORYBANK (Zhong et al., 2024), MEMGPT (Packer et al., 2023), A-MEM (Xu et al., 2025), LIGHTMEM (Fang et al., 2025), and Mem0 (Dev & Taranjeet, 2024).

Backbone Models. To test robustness across capability scales, we instantiate each baseline and SimpleMem on multiple LLM backends: GPT-4o, GPT-4.1-mini, Qwen-Plus, Qwen2.5 (1.5B/3B), and Qwen3 (1.7B/8B).

Table 3: Performance on the LoCoMo benchmark with Efficient Models (Small parameters). SimpleMem demonstrates robust performance even on 1.5B/3B models, often surpassing larger models using baseline memory systems.

Model	Method	MultiHop		Temporal		OpenDomain		SingleHop		Average		Token Cost
		F1	BLEU									
Qwen2.5-1.5b	LoCoMo	9.05	6.55	4.25	4.04	9.91	8.50	11.15	8.67	8.59	6.94	16,910
	ReadAgent	6.61	4.93	2.55	2.51	5.31	12.24	10.13	7.54	6.15	6.81	752
	MemoryBank	11.14	8.25	4.46	2.87	8.05	6.21	13.42	11.01	9.27	7.09	284
	MemGPT	10.44	7.61	4.21	3.89	13.42	11.64	9.56	7.34	9.41	7.62	16,953
	A-Mem	18.23	11.94	24.32	19.74	16.48	14.31	23.63	19.23	20.67	16.31	1,300
	LightMem	16.43	11.39	22.92	18.56	15.06	11.23	23.28	19.24	19.42	15.11	605
	Mem0	20.18	14.53	27.42	22.14	19.83	15.68	27.63	23.42	23.77	18.94	942
	SimpleMem	21.85	16.10	29.12	23.50	21.05	16.80	28.90	24.50	25.23	20.23	678
Qwen2.5-3b	LoCoMo	4.61	4.29	3.11	2.71	4.55	5.97	7.03	5.69	4.83	4.67	16,910
	ReadAgent	2.47	1.78	3.01	3.01	5.57	5.22	3.25	2.51	3.58	3.13	776
	MemoryBank	3.60	3.39	1.72	1.97	6.63	6.58	4.11	3.32	4.02	3.82	298
	MemGPT	5.07	4.31	2.94	2.95	7.04	7.10	7.26	5.52	5.58	4.97	16,961
	A-Mem	12.57	9.01	27.59	25.07	7.12	7.28	17.23	13.12	16.13	13.62	1,137
	LightMem	16.43	11.39	6.92	4.56	8.06	7.23	18.28	15.24	12.42	9.61	605
	Mem0	16.89	11.54	8.52	6.23	10.24	8.82	16.47	12.43	13.03	9.76	965
	SimpleMem	17.03	11.87	21.47	19.50	12.52	10.19	20.90	18.01	17.98	14.89	572
Qwen3-1.7b	LoCoMo	10.28	8.82	6.45	5.78	10.42	9.02	11.16	10.35	9.58	8.49	16,910
	ReadAgent	7.50	5.60	3.15	2.95	6.10	12.45	10.80	8.15	6.89	7.29	784
	MemoryBank	11.50	8.65	4.95	3.20	8.55	6.80	13.90	11.50	9.73	7.54	290
	MemGPT	11.50	8.20	4.65	4.10	13.85	11.90	10.25	7.85	10.06	8.01	16,954
	A-Mem	18.45	11.80	25.82	18.45	10.90	9.95	21.58	16.72	19.19	14.23	1,258
	LightMem	14.84	11.56	9.35	7.85	13.76	10.59	28.14	22.89	16.52	13.22	679
	Mem0	18.23	13.44	18.54	14.22	16.82	13.54	31.15	26.42	21.19	16.91	988
	SimpleMem	20.85	15.42	26.75	18.63	17.92	14.15	32.85	26.46	24.59	18.67	730
Qwen3-8b	LoCoMo	13.50	9.20	6.80	5.50	10.10	8.80	14.50	11.20	11.23	8.68	16,910
	ReadAgent	7.20	5.10	3.50	3.10	5.50	5.40	8.10	6.20	6.08	4.95	721
	MemoryBank	9.50	7.10	3.80	2.50	7.50	6.50	9.20	7.50	7.50	5.90	287
	MemGPT	14.20	9.80	5.50	4.20	12.50	10.80	11.50	9.10	10.93	8.48	16,943
	A-Mem	20.50	13.80	22.50	18.20	13.20	10.50	26.80	21.50	20.75	16.00	1,087
	LightMem	18.53	14.23	26.78	21.52	14.12	11.24	29.48	23.83	22.23	17.71	744
	Mem0	22.42	16.83	32.48	26.13	15.23	12.54	33.05	27.24	25.80	20.69	1,015
	SimpleMem	28.97	24.93	42.85	36.49	15.35	13.90	46.62	40.69	33.45	29.00	621

Implementation Details. For semantic structured compression, we use a sliding window of size $W = 20$. Memory indexing is implemented using LanceDB with a multi-view design: Qwen3-embedding-0.6b (1024 dimensions) for dense semantic embeddings, BM25 for sparse lexical indexing, and SQL-based metadata storage for symbolic attributes. During retrieval, we employ adaptive query-aware retrieval, where the retrieval depth is dynamically adjusted based on estimated query complexity, ranging from $k_{\min} = 3$ for simple lookups to $k_{\max} = 20$ for complex reasoning queries.

Evaluation Metrics. For LoCoMo, we report F1 and BLEU-1 (accuracy), Adversarial Success Rate (robustness to distractors), and Token Cost (retrieval efficiency). For LongMemEval-S, we use its standard accuracy-style metric.

3.2 RESULTS AND ANALYSIS

Tables 1 and 3 present detailed performance comparisons on the LoCoMo benchmark across different model scales, while Table 2 reports results on LongMemEval-S.

Performance on High-Capability Models. Across LoCoMo and LongMemEval-S, SimpleMem consistently outperforms existing memory systems across model scales, achieving strong and robust gains in accuracy.

On LoCoMo (Table 1), SimpleMem leads all baselines. Using GPT-4.1-mini, it achieves an Average F1 of 43.24, substantially exceeding Mem0 (34.20) and the full-context baseline (18.70). The largest gains are observed in Temporal Reasoning, where SimpleMem reaches 58.62 F1 compared to 48.91 for Mem0, underscoring the effectiveness of semantic structured compression in resolving complex temporal dependencies. These improvements persist at larger scales: on GPT-4o, SimpleMem attains the highest Average F1 (39.06), outperforming Mem0 (36.09) and A-Mem (33.45).

A task-level breakdown on LoCoMo further highlights the balanced capabilities of SimpleMem. In SingleHop QA, SimpleMem consistently achieves the best performance (e.g., 51.12 F1 on GPT-4.1-mini), demonstrating precise factual retrieval. In more challenging MultiHop settings, SimpleMem significantly outperforms Mem0 and LightMem on GPT-4.1-mini, indicating its ability to bridge disconnected facts and support deep reasoning without relying on expensive iterative retrieval loops.

Results on LongMemEval-S (Table 2) further demonstrate the robustness of SimpleMem under extreme context lengths. Using the `gpt-4.1-mini` backbone, SimpleMem achieves the highest average accuracy of 76.87%, outperforming LightMem (68.67%) and substantially exceeding Mem0 (59.81%) and the full-context baseline (39.57%). Gains are most pronounced in the challenging *Multi-Session* category, where SimpleMem attains 60.92% accuracy, compared to 47.37% for LightMem and 30.08% for full-context, highlighting its effectiveness in cross-session information integration under severe context constraints.

When scaled to the more capable `gpt-4.1` backbone, SimpleMem maintains its state-of-the-art performance with an average accuracy of 83.97%. It is particularly strong in the *Single-Session User* task (98.57%), demonstrating near-perfect recall of immediate user-provided details. While LightMem exhibits strong performance on temporally specific queries, SimpleMem offers a more balanced profile: it avoids catastrophic failures in assistant-focused recall (where LightMem drop significantly on the mini model) while maintaining high accuracy in complex multi-session retrieval. This balance suggests that SimpleMem’s structured indexing strategy effectively disentangles episodic noise from salient facts, providing a reliable memory substrate for long-term interaction.

Token Efficiency. A key strength of SimpleMem lies in its inference-time efficiency. As reported in the rightmost columns of Tables 1 and 3, full-context approaches such as LOCOMO and MEMGPT consume approximately 16,900 tokens per query. In contrast, SimpleMem reduces token usage by roughly 30 \times , averaging 530-580 tokens per query. Furthermore, compared to optimized retrieval baselines like Mem0 (\sim 980 tokens) and A-Mem (\sim 1,200+ tokens), SimpleMem reduces token usage by 40-50% while delivering superior accuracy. For instance, on GPT-4.1-mini, SimpleMem uses only 531 tokens to achieve state-of-the-art performance, whereas ReadAgent consumes more (643 tokens) but achieves far lower accuracy (7.16 F1). This validates the effectiveness of SimpleMem in strictly controlling context bandwidth without sacrificing information density.

Performance on Smaller Models. Table 3 highlights the ability of SimpleMem to empower smaller parameter models. On Qwen3-8b, SimpleMem achieves an impressive Average F1 of 33.45, significantly surpassing Mem0 (25.80) and LightMem (22.23). Crucially, a 3B-parameter model (Qwen2.5-3b) paired with SimpleMem achieves 17.98 F1, outperforming the same model with Mem0 (13.03) by nearly 5 points. Even on the extremely lightweight Qwen2.5-1.5b, SimpleMem maintains robust performance (25.23 F1), beating larger models using inferior memory strategies (e.g., Qwen3-1.7b with Mem0 scores 21.19).

3.3 EFFICIENCY ANALYSIS

We conduct a comprehensive evaluation of computational efficiency, examining both end-to-end system latency and the scalability of memory indexing and retrieval. To assess practical deployment viability, we measured the full lifecycle costs on the LoCoMo-10 dataset using GPT-4.1-mini.

As illustrated in Table 4, SimpleMem exhibits superior efficiency across all operational phases. In terms of memory construction, our system achieves the fastest processing speed at 92.6 seconds per sample. This represents a dramatic improvement over existing baselines, outperforming Mem0 by approximately 14 \times (1350.9s) and A-Mem by over 50 \times (5140.5s). This massive speedup is directly attributable to our semantic structured compression, which processes data in a streamlined single pass, thereby avoiding the complex graph updates required by Mem0 or the iterative summarization overheads inherent to A-Mem.

Beyond construction, SimpleMem also maintains the lowest retrieval latency at 388.3 seconds per sample, which is approximately 33% faster than LightMem and Mem0. This gain arises from the *adaptive retrieval* mechanism, which dynamically limits retrieval scope and prioritizes high-level abstract representations before accessing fine-grained details. By restricting retrieval to only the most relevant memory entries, the system avoids the expensive neighbor traversal and expansion operations that commonly dominate the latency of graph-based memory systems.

Table 4: Comparison of construction time, retrieval time, total experiment time, and average F1 score across different memory systems (tested on LoCoMo-10 with GPT-4.1-mini).

Model	Construction Time	Retrieval Time	Total Time	Average F1
A-mem	5140.5s	796.7s	5937.2s	32.58
Lightmem	97.8s	577.1s	675.9s	24.63
Mem0	1350.9s	583.4s	1934.3s	34.20
SimpleMem	92.6s	388.3s	480.9s	43.24

When considering the total time-to-insight, SimpleMem achieves a $4\times$ speedup over Mem0 and a $12\times$ speedup over A-Mem. Crucially, this efficiency does not come at the expense of performance. On the contrary, SimpleMem achieves the highest Average F1 among all compared methods. These results support our central claim that structured semantic compression and adaptive retrieval produce a more compact and effective reasoning substrate than raw context retention or graph-centric memory designs, enabling a superior balance between accuracy and computational efficiency.

Table 5: Full ablation analysis with GPT-4.1-mini backend. The "Diff" columns indicate the percentage drop relative to the full SimpleMem model. The results confirm that each stage contributes significantly to specific reasoning capabilities.

Configuration	Multi-hop		Temporal		Open Domain		Single Hop		Average	
	F1	Diff								
Full SimpleMem	43.46	-	58.62	-	19.76	-	51.12	-	43.24	-
w/o Semantic Compression	34.20	(↓21.3%)	25.40	(↓56.7%)	17.50	(↓11.4%)	48.05	(↓6.0%)	31.29	(↓27.6%)
w/o Online Synthesis	29.85	(↓31.3%)	55.10	(↓6.0%)	18.20	(↓7.9%)	49.80	(↓2.6%)	38.24	(↓11.6%)
w/o Intent-Aware Retrieval	38.60	(↓11.2%)	56.80	(↓3.1%)	14.50	(↓26.6%)	41.20	(↓19.4%)	37.78	(↓12.6%)

3.4 ABLATION STUDY

We conduct an ablation study using the GPT-4.1-mini backend to assess the contribution of three key components. Results are summarized in Table 5.

Impact of Semantic Structured Compression. Replacing semantic structured compression with standard chunk-based storage causes a severe degradation in temporal reasoning performance. Specifically, Temporal F1 drops by 56.7%, from 58.62 to 25.40, indicating that without context normalization, the retriever fails to reliably disambiguate events along the timeline, reducing performance to levels comparable to conventional RAG systems.

Impact of Online Semantic Synthesis. Disabling online semantic synthesis leads to a 31.3% drop in multi-hop reasoning performance. Without write-time consolidation, related facts remain fragmented, increasing redundancy and exhausting the context window during complex queries. This result highlights the necessity of proactive synthesis for maintaining a compact and coherent memory.

Intent-Aware Retrieval Planning. Removing intent-aware retrieval planning harms open-domain and single-hop tasks, with performance drops of 26.6% and 19.4%, respectively. Without query-adaptive retrieval, the system either retrieves insufficient evidence or introduces unnecessary context, underscoring the importance of dynamically adjusting retrieval scope.

3.5 CASE STUDY: LONG-TERM TEMPORAL GROUNDING

To illustrate how SimpleMem handles long-horizon conversational history, Figure 3 presents a representative multi-session example spanning two weeks and approximately 24,000 raw tokens. SimpleMem filters low-information dialogue during ingestion and retains only high-utility memory entries, reducing the stored memory to about 800 tokens without losing task-relevant content.

Temporal Normalization. Relative temporal expressions such as "last week" and "yesterday" refer to different absolute times across sessions. SimpleMem resolves it into absolute timestamps at memory construction time, ensuring consistent temporal grounding over long interaction gaps.

Precise Retrieval. When queried about Sarah’s past artworks, the intent-aware retrieval planner infers both the semantic focus (art-related activities) and the temporal constraints implied by the query. The system then performs parallel multi-view retrieval, combining semantic similarity with symbolic filtering to exclude unrelated activities and return only temporally valid entries. This example demonstrates how structured compression, temporal normalization, and adaptive retrieval jointly enable reliable long-term reasoning under extended interaction histories.

4 RELATED WORK

Memory Systems for LLM Agents. Recent approaches manage memory through virtual context or structured representations. Virtual context methods, including MEMGPT (Packer et al., 2023), MEMORYOS (Kang et al., 2025), and SCM (Wang et al., 2023), extend interaction length via paging

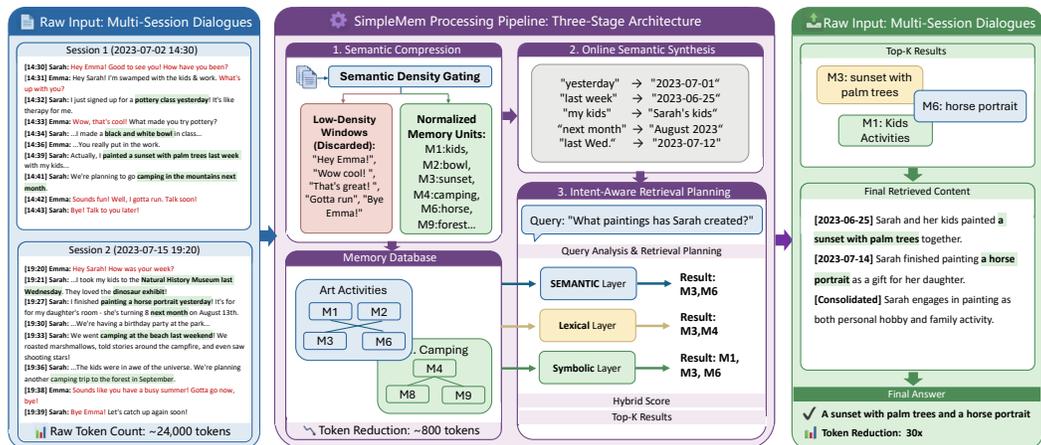


Figure 3: A Case of SimpleMem for Long-Term Multi-Session Dialogues. SimpleMem processes multi-session dialogues by filtering redundant content, normalizing temporal references, and organizing memories into compact representations. During retrieval, it adaptively combines semantic, lexical, and symbolic signals to select relevant entries.

or stream-based controllers (Wang et al., 2024b) but typically store raw conversation logs, leading to redundancy and increasing processing costs. In parallel, structured and graph-based systems, such as MEMORYBANK (Zhong et al., 2024), MEM0 (Dev & Taranjeet, 2024), ZEP (Rasmussen et al., 2025), A-MEM (Xu et al., 2025), and O-MEM (Wang et al., 2025), impose structural priors to improve coherence but still rely on raw or minimally processed text, preserving referential and temporal ambiguities that degrade long-term retrieval. In contrast, SimpleMem adopts a semantic compression mechanism that converts dialogue into independent, self-contained facts, explicitly resolving referential and temporal ambiguities prior to storage.

Context Management and Retrieval Efficiency. Beyond memory storage, efficient access to historical information remains a core challenge. Existing approaches primarily rely on either long-context models or retrieval-augmented generation (RAG). Although recent LLMs support extended context windows (OpenAI, 2025; Deepmind, 2025; Anthropic, 2025), and prompt compression methods aim to reduce costs (Jiang et al., 2023a; Liskavetsky et al., 2025), empirical studies reveal the “Lost-in-the-Middle” effect (Liu et al., 2023; Kuratov et al., 2024), where reasoning performance degrades as context length increases, alongside prohibitive computational overhead for lifelong agents. RAG-based methods (Lewis et al., 2020; Asai et al., 2023; Jiang et al., 2023b), including structurally enhanced variants such as GRAPH-RAG (Edge et al., 2024; Zhao et al., 2025) and LIGHTRAG (Guo et al., 2024), decouple memory from inference but are largely optimized for static knowledge bases, limiting their effectiveness for dynamic, time-sensitive episodic memory. In contrast, SimpleMem improves retrieval efficiency through *Intent-Aware Retrieval Planning*, jointly leveraging semantic, lexical, and symbolic signals to construct query-specific retrieval plans and dynamically adapt the retrieval budget. In contrast, SimpleMem improves retrieval efficiency through *Intent-Aware Retrieval Planning*, jointly leveraging semantic, lexical, and symbolic signals to construct query-specific retrieval plans and dynamically adapt the retrieval budget, achieving token-efficient reasoning under constrained context budgets.

5 CONCLUSION

We introduce SimpleMem, an efficient agent memory architecture grounded in the principle of semantic lossless compression. By treating memory as an active process rather than passive storage, SimpleMem integrates *Semantic Structured Compression* to filter noise at the source, *Online Semantic Synthesis* to consolidate fragmented observations during writing, and *Intent-Aware Retrieval Planning* to dynamically adapt retrieval scope. Empirical evaluation on the LoCoMo and LongMemEval-S benchmark demonstrates the effectiveness and efficiency of our method.

REFERENCES

- 486
487
488 Anthropic. Claude 3.7 sonnet and claude code. <https://www.anthropic.com/news/claude-3-7-sonnet>, 2025.
489
- 490 Akari Asai, Zeqiu Wu, Yizhong Wang, Avirup Sil, and Hannaneh Hajishirzi. Self-rag: Learning to
491 retrieve, generate, and critique through self-reflection. *arXiv preprint arXiv:2310.11511*, 2023.
492
- 493 Google Deepmind. Gemini 2.5: Our most intelligent AI model —
494 blog.google. [https://blog.google/technology/google-deepmind/
495 gemini-model-thinking-updates-march-2025/#gemini-2-5-thinking](https://blog.google/technology/google-deepmind/gemini-model-thinking-updates-march-2025/#gemini-2-5-thinking),
496 2025. Accessed: 2025-03-25.
- 497 Khant Dev and Singh Taranjeet. mem0: The memory layer for ai agents. [https://github.
498 com/mem0ai/mem0](https://github.com/mem0ai/mem0), 2024.
499
- 500 Darren Edge, Ha Trinh, Newman Cheng, Joshua Bradley, Alex Chao, Apurva Mody, Steven Truitt,
501 and Jonathan Larson. From local to global: A graph rag approach to query-focused summarization.
502 *arXiv preprint arXiv:2404.16130*, 2024.
- 503 Jizhan Fang, Xinle Deng, Haoming Xu, Ziyang Jiang, Yuqi Tang, Ziwen Xu, Shumin Deng, Yunzhi
504 Yao, Mengru Wang, Shuofei Qiao, et al. Lightmem: Lightweight and efficient memory-augmented
505 generation. *arXiv preprint arXiv:2510.18866*, 2025.
506
- 507 Zirui Guo, Lianghao Xia, Yanhua Yu, Tu Ao, and Chao Huang. Lightrag: Simple and fast retrieval-
508 augmented generation. *arXiv preprint arXiv:2410.05779*, 2024.
- 509 Yuyang Hu, Shichun Liu, Yanwei Yue, Guibin Zhang, Boyang Liu, Fangyi Zhu, Jiahang Lin,
510 Honglin Guo, Shihan Dou, Zhiheng Xi, et al. Memory in the age of ai agents. *arXiv preprint
511 arXiv:2512.13564*, 2025.
512
- 513 Huiqiang Jiang, Qianhui Wu, Chin-Yew Lin, Yuqing Yang, and Lili Qiu. Llm lingua: Compressing
514 prompts for accelerated inference of large language models. *arXiv preprint arXiv:2310.05736*,
515 2023a.
- 516 Zhengbao Jiang, Frank F Xu, Luyu Gao, Zhiqing Sun, Qian Liu, Jane Dwivedi-Yu, Yiming Yang,
517 Jamie Callan, and Graham Neubig. Active retrieval augmented generation. *arXiv preprint
518 arXiv:2305.06983*, 2023b.
- 519 Jiazheng Kang, Mingming Ji, Zhe Zhao, and Ting Bai. Memory os of ai agent. *arXiv preprint
520 arXiv:2506.06326*, 2025.
521
- 522 Dharshan Kumaran, Demis Hassabis, and James L McClelland. What learning systems do intelligent
523 agents need? complementary learning systems theory updated. *Trends in cognitive sciences*, 20(7):
524 512–534, 2016.
525
- 526 Yury Kuratov et al. In case of context: Investigating the effects of long context on language model
527 performance. *arXiv preprint*, 2024.
- 528 Kuang-Huei Lee, Xinyun Chen, Hiroki Furuta, John Canny, and Ian Fischer. A human-inspired
529 reading agent with gist memory of very long contexts. *arXiv preprint arXiv:2402.09727*, 2024.
530
- 531 Patrick Lewis, Ethan Perez, Aleksandra Piktus, Fabio Petroni, Vladimir Karpukhin, Naman Goyal,
532 Heinrich Küttler, Mike Lewis, Wen-tau Yih, Tim Rocktäschel, et al. Retrieval-augmented genera-
533 tion for knowledge-intensive nlp tasks. *Advances in Neural Information Processing Systems*, 33:
534 9459–9474, 2020.
- 535 Zhiyu Li, Shichao Song, Hanyu Wang, Simin Niu, Ding Chen, Jiawei Yang, Chenyang Xi, Huayi
536 Lai, Jihao Zhao, Yezhaohui Wang, Junpeng Ren, Zehao Lin, Jiahao Huo, Tianyi Chen, Kai Chen,
537 Ke-Rong Li, Zhiqiang Yin, Qingchen Yu, Bo Tang, Hongkang Yang, Zhiyang Xu, and Feiyu Xiong.
538 Memos: An operating system for memory-augmented generation (mag) in large language models.
539 *ArXiv*, abs/2505.22101, 2025. URL [https://api.semanticscholar.org/CorpusID:
278960153](https://api.semanticscholar.org/CorpusID:278960153).

- 540 Alexey Liskavetsky et al. Compressor: Context-aware prompt compression for enhanced llm
541 inference. *arXiv preprint*, 2025.
- 542
- 543 Jiaqi Liu, Kaiwen Xiong, Peng Xia, Yiyang Zhou, Haonian Ji, Lu Feng, Siwei Han, Mingyu Ding,
544 and Huaxiu Yao. Agent0-vl: Exploring self-evolving agent for tool-integrated vision-language
545 reasoning. *arXiv preprint arXiv:2511.19900*, 2025.
- 546 Nelson F Liu, Kevin Lin, John Hewitt, Ashwin Paranjape, Michele Bevilacqua, Fabio Petroni,
547 and Percy Liang. Lost in the middle: How language models use long contexts. *arXiv preprint*
548 *arXiv:2307.03172*, 2023.
- 549 Adyasha Maharana, Dong-Ho Lee, Sergey Tulyakov, Mohit Bansal, Francesco Barbieri, and Yuwei
550 Fang. Evaluating very long-term conversational memory of llm agents, 2024. URL <https://arxiv.org/abs/2402.17753>.
- 551
- 552
- 553 OpenAI. Introducing gpt-5. <https://openai.com/index/introducing-gpt-5/>, 2025.
- 554
- 555 Siru Ouyang, Jun Yan, I Hsu, Yanfei Chen, Ke Jiang, Zifeng Wang, Rujun Han, Long T Le, Samira
556 Daruki, Xiangru Tang, et al. Reasoningbank: Scaling agent self-evolving with reasoning memory.
557 *arXiv preprint arXiv:2509.25140*, 2025.
- 558 Charles Packer, Vivian Fang, Shishir G. Patil, Kevin Lin, Sarah Wooders, and Joseph Gonzalez.
559 Memgpt: Towards llms as operating systems. *ArXiv*, abs/2310.08560, 2023. URL <https://api.semanticscholar.org/CorpusID:263909014>.
- 560
- 561 Jiahao Qiu, Xuan Qi, Tongcheng Zhang, Xinzhe Juan, Jiacheng Guo, Yifu Lu, Yimin Wang, Zixin
562 Yao, Qihan Ren, Xun Jiang, et al. Alita: Generalist agent enabling scalable agentic reasoning with
563 minimal predefinition and maximal self-evolution. *arXiv preprint arXiv:2505.20286*, 2025.
- 564
- 565 Preston Rasmussen, Pavlo Paliychuk, Travis Beauvais, Jack Ryan, and Daniel Chalef. Zep: a temporal
566 knowledge graph architecture for agent memory. *arXiv preprint arXiv:2501.13956*, 2025.
- 567 Xiangru Tang, Tianrui Qin, Tianhao Peng, Ziyang Zhou, Daniel Shao, Tingting Du, Xinming Wei,
568 Peng Xia, Fang Wu, He Zhu, et al. Agent kb: Leveraging cross-domain experience for agentic
569 problem solving. *arXiv preprint arXiv:2507.06229*, 2025.
- 570 Tongyi DeepResearch Team, Baixuan Li, Bo Zhang, Dingchu Zhang, Fei Huang, Guangyu Li, Guoxin
571 Chen, Hui Feng Yin, Jialong Wu, Jingren Zhou, et al. Tongyi deepresearch technical report. *arXiv*
572 *preprint arXiv:2510.24701*, 2025.
- 573
- 574 Aaron Tu, Weihao Xuan, Heli Qi, Xu Huang, Qingcheng Zeng, Shayan Talaei, Yijia Xiao, Peng
575 Xia, Xiangru Tang, Yuchen Zhuang, et al. Position: The hidden costs and measurement gaps of
576 reinforcement learning with verifiable rewards. *arXiv preprint arXiv:2509.21882*, 2025.
- 577 Bing Wang, Xinnian Liang, Jian Yang, Hui Huang, Shuangzhi Wu, Peihao Wu, Lu Lu, Zejun Ma,
578 and Zhoujun Li. Enhancing large language model with self-controlled memory framework. *arXiv*
579 *preprint arXiv:2304.13343*, 2023.
- 580 Piaohong Wang, Motong Tian, Jiaxian Li, Yuan Liang, Yuqing Wang, Qianben Chen, Tiannan
581 Wang, Zhicong Lu, Jiawei Ma, Yuchen Eleanor Jiang, et al. O-mem: Omni memory system for
582 personalized, long horizon, self-evolving agents. *arXiv e-prints*, pp. arXiv-2511, 2025.
- 583
- 584 Tiannan Wang, Meiling Tao, Ruoyu Fang, Huilin Wang, Shuai Wang, Yuchen Eleanor Jiang, and
585 Wangchunshu Zhou. Ai persona: Towards life-long personalization of llms. *arXiv preprint*
586 *arXiv:2412.13103*, 2024a.
- 587 Yu Wang and Xi Chen. Mirix: Multi-agent memory system for llm-based agents. *arXiv preprint*
588 *arXiv:2507.07957*, 2025.
- 589 Zora Zhiruo Wang, Jiayuan Mao, Daniel Fried, and Graham Neubig. Agent workflow memory. *arXiv*
590 *preprint arXiv:2409.07429*, 2024b.
- 591
- 592 Di Wu, Hongwei Wang, Wenhao Yu, Yuwei Zhang, Kai-Wei Chang, and Dong Yu. Longmemeval:
593 Benchmarking chat assistants on long-term interactive memory. *arXiv preprint arXiv:2410.10813*,
2024.

594 Peng Xia, Kaide Zeng, Jiaqi Liu, Can Qin, Fang Wu, Yiyang Zhou, Caiming Xiong, and Huaxiu
595 Yao. Agent0: Unleashing self-evolving agents from zero data via tool-integrated reasoning. *arXiv*
596 *preprint arXiv:2511.16043*, 2025.
597

598 Wujiang Xu, Zujie Liang, Kai Mei, Hang Gao, Juntao Tan, and Yongfeng Zhang. A-mem:
599 Agentic memory for llm agents. *ArXiv*, abs/2502.12110, 2025. URL <https://api.semanticscholar.org/CorpusID:276421617>.
600

601 BY Yan, Chaofan Li, Hongjin Qian, Shuqi Lu, and Zheng Liu. General agentic memory via deep
602 research. *arXiv preprint arXiv:2511.18423*, 2025.
603

604 Bufang Yang, Lilin Xu, Liekang Zeng, Kaiwei Liu, Siyang Jiang, Wenrui Lu, Hongkai Chen, Xiaofan
605 Jiang, Guoliang Xing, and Zhenyu Yan. Contextagent: Context-aware proactive llm agents with
606 open-world sensory perceptions. *arXiv preprint arXiv:2505.14668*, 2025.

607 Yibo Zhao, Jiapeng Zhu, Ye Guo, Kangkang He, and Xiang Li. E²graphrag: Streamlining graph-
608 based rag for high efficiency and effectiveness. *arXiv preprint arXiv:2505.24226*, 2025.
609

610 Wanjun Zhong, Lianghong Guo, Qiqi Gao, He Ye, and Yanlin Wang. Memorybank: Enhancing large
611 language models with long-term memory. In *Proceedings of the AAAI Conference on Artificial*
612 *Intelligence*, volume 38, pp. 19724–19731, 2024.
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647

A DETAILED SYSTEM PROMPTS

To ensure full reproducibility of the **SimpleMem** pipeline, we provide the exact system prompts used in the key processing stages. All prompts are designed to be model-agnostic but were optimized for GPT-4o-mini in our experiments to ensure cognitive economy.

A.1 STAGE 1: SEMANTIC STRUCTURED COMPRESSION PROMPT

This prompt performs entropy-aware filtering and context normalization. Its goal is to transform raw dialogue windows into compact, context-independent memory units while excluding low-information interaction content.

Listing 1: Prompt for Semantic Structured Compression and Normalization.

```

You are a memory encoder in a long-term memory system. Your task is to
transform raw conversational input into compact, self-contained
memory units.

INPUT METADATA:
Window Start Time: {window_start_time} (ISO 8601)
Participants: {speakers_list}

INSTRUCTIONS:
1. Information Filtering:
  - Discard social filler, acknowledgements, and conversational routines
    that introduce no new factual or semantic information.
  - Discard redundant confirmations unless they modify or finalize a
    decision.
  - If no informative content is present, output an empty list.
2. Context Normalization:
  - Resolve all pronouns and implicit references into explicit entity
    names.
  - Ensure each memory unit is interpretable without access to prior
    dialogue.
3. Temporal Normalization:
  - Convert relative temporal expressions (e.g., "tomorrow", "last week
    ") into absolute ISO 8601 timestamps using the window start time.
4. Memory Unit Extraction:
  - Decompose complex utterances into minimal, indivisible factual
    statements.

INPUT DIALOGUE:
{dialogue_window}

OUTPUT FORMAT (JSON):
{
  "memory_units": [
    {
      "content": "Alice agreed to meet Bob at the Starbucks on 5th Avenue
        on 2025-11-20T14:00:00.",
      "entities": ["Alice", "Bob", "Starbucks", "5th Avenue"],
      "topic": "Meeting Planning",
      "timestamp": "2025-11-20T14:00:00",
      "salience": "high"
    }
  ]
}

```

A.2 STAGE 2: ADAPTIVE RETRIEVAL PLANNING PROMPT

This prompt analyzes the user query prior to retrieval. Its purpose is to estimate query complexity and generate a structured retrieval plan that adapts retrieval scope accordingly.

Listing 2: Prompt for Query Analysis and Adaptive Retrieval Planning.

```
Analyze the following user query and generate a retrieval plan. Your
objective is to retrieve sufficient information while minimizing
unnecessary context usage.

USER QUERY:
{user_query}

INSTRUCTIONS:
1. Query Complexity Estimation:
  - Assign "LOW" if the query can be answered via direct fact lookup or
  a single memory unit.
  - Assign "HIGH" if the query requires aggregation across multiple
  events, temporal comparison, or synthesis of patterns.

2. Retrieval Signals:
  - Lexical layer: extract exact keywords or entity names.
  - Temporal layer: infer absolute time ranges if relevant.
  - Semantic layer: rewrite the query into a declarative form suitable
  for semantic matching.

OUTPUT FORMAT (JSON):
{
  "complexity": "HIGH",
  "retrieval_rationale": "The query requires reasoning over multiple
  temporally separated events.",
  "lexical_keywords": ["Starbucks", "Bob"],
  "temporal_constraints": {
    "start": "2025-11-01T00:00:00",
    "end": "2025-11-30T23:59:59"
  },
  "semantic_query": "The user is asking about the scheduled meeting with
  Bob, including location and time."
}
```

A.3 STAGE 3: RECONSTRUCTIVE SYNTHESIS PROMPT

This prompt guides the final answer generation using retrieved memory. It combines high-level abstract representations with fine-grained factual details to produce a grounded response.

Listing 3: Prompt for Reconstructive Synthesis (Answer Generation).

```
You are an assistant with access to a structured long-term memory.

USER QUERY:
{user_query}

RETRIEVED MEMORY (Ordered by Relevance):

[ABSTRACT REPRESENTATIONS]:
{retrieved_abstracts}

[DETAILED MEMORY UNITS]:
{retrieved_units}

INSTRUCTIONS:
1. Hierarchical Reasoning:
  - Use abstract representations to capture recurring patterns or
  general user preferences.
```

756 - Use detailed memory units to ground the response with specific facts
 757 .
 758
 759 2. Conflict Handling:
 760 - If inconsistencies arise, prioritize the most recent memory unit.
 761 - Optionally reference abstract patterns when relevant.
 762
 763 3. Temporal Consistency:
 764 - Ensure all statements respect the timestamps provided in memory.
 765
 766 4. Faithfulness:
 767 - Base the answer strictly on the retrieved memory.
 768 - If required information is missing, respond with: "I do not have
 enough information in my memory."
 769
 770 FINAL ANSWER:

771 A.4 LONGMEMEVAL EVALUATION PROMPT

772
 773 For the LongMemEval benchmark, we employed gpt-4.1-mini as the judge to evaluate the
 774 correctness of the agent's responses. The prompt strictly instructs the judge to focus on semantic
 775 and temporal consistency rather than exact string matching. The specific prompt template used is
 776 provided below:

777 Listing 4: LLM-as-a-Judge Evaluation Prompt.

778
 779 Your task is to label an answer to a question as 'CORRECT' or 'WRONG'.
 780 You will be given the following data:
 781 (1) a question (posed by one user to another user),
 782 (2) a 'gold' (ground truth) answer,
 783 (3) a generated answer
 which you will score as CORRECT/WRONG.
 784
 785 The point of the question is to ask about something one user should know
 about the other user based on their prior conversations.
 786 The gold answer will usually be a concise and short answer that includes
 787 the referenced topic, for example:
 788 Question: Do you remember what I got the last time I went to Hawaii?
 789 Gold answer: A shell necklace
 790
 791 The generated answer might be much longer, but you should be generous
 792 with your grading - as long as it touches on the same topic as the
 gold answer, it should be counted as CORRECT.
 793
 794 For time related questions, the gold answer will be a specific date,
 795 month, year, etc. The generated answer might be much longer or use
 796 relative time references (like "last Tuesday" or "next month"), but
 797 you should be generous with your grading - as long as it refers to
 the same date or time period as the gold answer, it should be counted
 798 as CORRECT. Even if the format differs (e.g., "May 7th" vs "7 May"),
 799 consider it CORRECT if it's the same date.
 800
 801 Now it's time for the real question:
 802 Question: {question}
 803 Gold answer: {gold_answer}
 804 Generated answer: {generated_answer}
 805
 806 First, provide a short (one sentence) explanation of your reasoning, then
 finish with CORRECT or WRONG.
 807 Do NOT include both CORRECT and WRONG in your response, or it will break
 the evaluation script.
 808
 809 Just return the label CORRECT or WRONG in a json format with the key as "
 label".

B EXTENDED IMPLEMENTATION DETAILS AND EXPERIMENTS

B.1 DATASET DESCRIPTION

LoCoMo Maharana et al. (2024) is specifically designed to test the limits of LLMs in processing long-term conversational dependencies. The dataset comprises conversation samples ranging from 200 to 400 turns, containing complex temporal shifts and interleaved topics. The evaluation set consists of 1,986 questions categorized into four distinct reasoning types: (1) Multi-Hop Reasoning: Questions requiring the synthesis of information from multiple disjoint turns (e.g., "Based on what X said last week and Y said today..."); (2) Temporal Reasoning: Questions testing the model's ability to understand event sequencing and absolute timelines (e.g., "Did X happen before Y?"); (3) Open Domain: General knowledge questions grounded in the conversation context; (4) Single Hop: Direct retrieval tasks requiring exact matching of specific facts.

LongMemEval-S benchmark. The defining characteristic of this dataset is its *extreme context length*, which poses a unique and severe challenge for memory systems. Unlike standard benchmarks, LongMemEval-S requires the system to precisely locate specific answers across various sub-categories (e.g., temporal events, user preferences) within an exceptionally long interaction history. This massive search space significantly escalates the difficulty of retrieval and localization, serving as a rigorous stress test for the system's precision. We utilized an *LLM-as-a-judge* protocol (using gpt-4.1-mini) to score the correctness of generated answers against ground-truth references, categorizing responses as either CORRECT or WRONG based on semantic and temporal alignment. The full evaluation prompt is provided in Appendix A.4.

B.2 HYPERPARAMETER CONFIGURATION

Table 7 summarizes the hyperparameters used to obtain the results reported in Section 3. These values were selected to balance memory compactness and retrieval recall, with particular attention to the thresholds governing semantic structured compression and recursive consolidation.

B.3 HYPERPARAMETER SENSITIVITY ANALYSIS

To assess the effectiveness of semantic structured compression and to motivate the design of adaptive retrieval, we analyze system sensitivity to the number of retrieved memory entries (k). We vary k from 1 to 20 and report the average F1 score on the LoCoMo benchmark using the GPT-4.1-mini backend.

Table 6 provides two key observations. First, rapid performance saturation is observed at low retrieval depth. SimpleMem achieves strong performance with a single retrieved entry (35.20 F1) and reaches approximately 99% of its peak performance at $k = 3$. This behavior indicates that semantic structured compression produces memory units with high information content, often sufficient to answer a query without aggregating many fragments.

Second, robustness to increased retrieval depth distinguishes SimpleMem from baseline methods. While approaches such as MemGPT experience performance degradation at larger k , SimpleMem maintains stable accuracy even when retrieving up to 20 entries. This robustness enables adaptive retrieval to safely expand context for complex reasoning tasks without introducing excessive irrelevant information.

Table 6: Performance sensitivity to retrieval count (k). **SimpleMem** demonstrates "Rapid Saturation," reaching near-optimal performance at $k = 3$ (42.85) compared to its peak at $k = 10$ (43.45). This validates the high information density of Atomic Entries, proving that huge context windows are often unnecessary for accuracy.

Method	Top- k Retrieved Entries				
	$k=1$	$k=3$	$k=5$	$k=10$	$k=20$
ReadAgent	6.12	8.45	9.18	8.92	8.50
MemGPT	18.40	22.15	25.59	24.80	23.10
SimpleMem	35.20	42.85	43.24	43.45	43.40

864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917

Table 7: Detailed hyperparameter configuration for SimpleMem. The system employs adaptive thresholds to balance memory compactness and retrieval effectiveness.

Module	Parameter	Value / Description
<i>Stage 1: Semantic Structured Compression</i>	Window Size (W)	20 turns
	Sliding Stride	5 turns (25% overlap)
	Model Backend	gpt-4.1-mini (temperature = 0.0)
	Output Constraint	Strict JSON schema enforced
<i>Stage 2: Online Semantic Synthesis</i>	Embedding Model	Qwen3-embedding-0.6b (1024 dimensions)
	Vector Database	LanceDB (v0.4.5) with IVF-PQ indexing
	Stored Metadata	timestamp, entities, topic, salience
<i>Stage 3: Intent-Aware Retrieval Planning</i>	Query Complexity Estimator	gpt-4.1-mini
	Retrieval Range	[3, 20]
	Minimum Depth	1
	Maximum Depth	20
	Re-ranking	Disabled (multi-view score fusion applied directly)